

March 17, 1970

E. C. MARSHALL

3,501,365

PRESSURE SENSITIVE LABEL STRIP CONSTRUCTION

Filed July 11, 1969

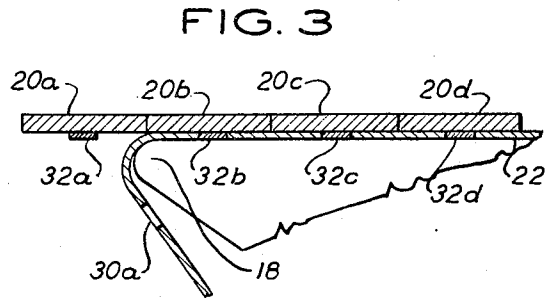
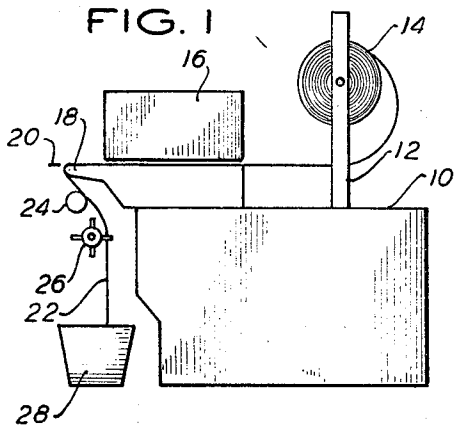


FIG. 4




FIG. 2

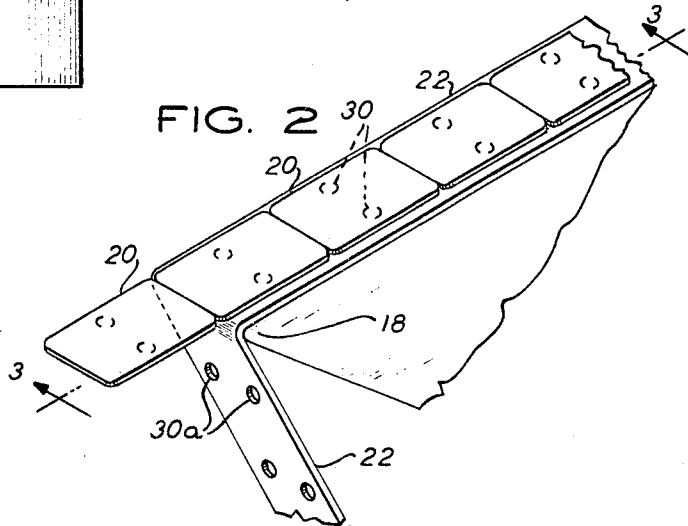


FIG. 5

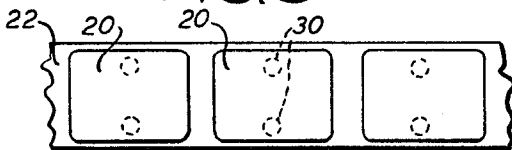


FIG. 6

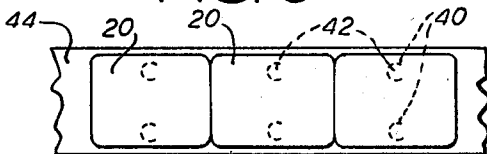


FIG. 7


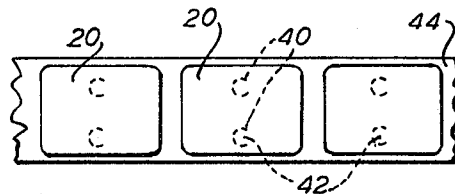


FIG. 8

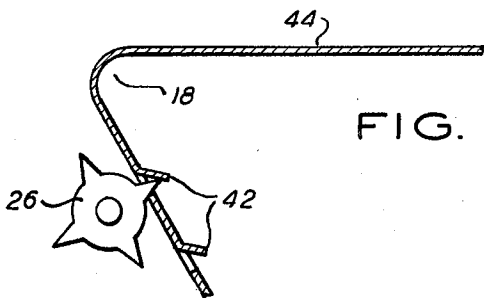

INVENTOR
EDWARD C. MARSHALL
BY
Edward C. Marshall
ATTORNEY

1

2

3,501,365

PRESSURE SENSITIVE LABEL STRIP CONSTRUCTION

Edward C. Marshall, Upper Montclair, N.J., assignor to
Litton Business Systems, Inc., a corporation of New
York

Continuation-in-part of application Ser. No. 562,771,
July 5, 1966. This application July 11, 1969, Ser.
No. 841,100

Int. Cl. G09f 3/00

U.S. Cl. 161—38

15 Claims

ABSTRACT OF THE DISCLOSURE

A plurality of labels with pressure sensitive adhesive thereon are disposed along a supporting material of release paper in either spaced or juxtaposed relationship and with feed holes formed in the release paper so that all the feed holes lie within the peripheral limits of associated labels and so that some release paper also lies within the peripheral limits of the feed holes; said periphery of said feed holes either being formed in a complete geometric shape or an incomplete geometric shape. When the label and supporting material is thereafter fed by a pin feed drum about a stripping edge, in those situations where the feed holes are defined by a complete geometric periphery the portion of the supporting material therewithin travels with the label as it is stripped from support material; while in those situations where the feed holes are defined by an incomplete geometric shape the support material lying therewithin remains with the web of supporting material and is moved out of the plane thereof when said supporting material coacts with the pin feed drum in a chadless type operation.

CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of my co-pending application Ser. No. 562,771 filed on July 5, 1966 and now abandoned.

BACKGROUND OF THE INVENTION— FIELD OF APPLICATION

This invention pertains to pressure sensitive label strip construction and the method for making same and more particularly to a novel way of constructing pressure sensitive label strips employing hidden feed holes to cooperate with a strip advancing mechanism and which will not interfere with the normal processing of the pressure sensitive label strip.

BACKGROUND OF THE INVENTION— DESCRIPTION OF PRIOR ART

Pressure sensitive labels have found wide use in various industries today, both at the point of manufacture and also at the point of sale of various items. Some of the reasons for their success are that they require no licking or external device such as a stapling gun, a stringing device or similar article for attachment to the article to be marked or labeled and provide the pressure sensitive label from the backing strip and to place it directly upon the item to be marked or labeled. Pressure sensitive labels are generally provided to the user in the form of rolls in which the pressure sensitive labels themselves are adhered to a backing strip treated or coated for easy release of the labels when desired. The labels may be supplied either in blank or they may be supplied partially punched or imprinted at the desire of the user. Labels are then generally fed from a supply reel through a processing device, which may be an imprinting or punching station,

and then to the point at which the label is stripped from the backing strip and used.

Pressure sensitive labels are usually manufactured by laminating together a strip of label stock and a strip of release material with a suitable adhesive therebetween. The label stock and release material start coextensive in length and width. The labels are then usually die cut to a predetermined configuration with that portion of the label stock lying between the labels and along the edges cut away as waste. The release material remains intact.

In order to advance the label strip from a supply reel, through an imprinting or punching station, if such be employed, and then to the using point it is necessary to provide a drive force. This has been accomplished by a feed arm which engages the edge of a label attached to the release material and pushes the strip along. However such a feed device quite often damages the label, separates it from the release material, or results in improper feed, and so alternatively it has become common to provide a feed which applies the force directly to the backing strip. Most of the later techniques employed at this time may be categorized in two fashions. They either involve pressure contact upon the backing strip itself by means of a series of pressure rollers; or involve the engagement of a slotted arm, or the pins of a pin feed roller, with the side walls of apertures located in the backing strip. The use of pressure rollers sometimes results in a somewhat erratic operation due to variations in the pressure placed upon the rollers because of wear, the accumulation of dirt, or variations in the size of the labels.

The other techniques, involving an arm engaging a slot, or a series of pins upon a pin roller engaging side walls of apertures in the backing material of the label strip generally diminishes the number of labels which may be affixed to a given length of backing strip. For example, considering a series of one inch label placed apart on a release strip by the distance required for the location in said release strip of apertures to accept the pins of a pin roller; these one inch labels will be spaced apart possibly three-sixteenths of an inch resulting in a net reduction of the total number of labels available on a given length of strip by some 19%. Thus in order to get a given quantity of labels it is either necessary to increase the size of the roll of labels or to change the reel a number of times. In the former arrangement, the additional size of the roll usually adds weight beyond the capacity of the equipment and cannot be accommodated. In the later case it will require greater operator attention and diminish the number of machines which he may be able to attend at one time.

A partial solution to this problem as shown by the prior art is the use of a backing strip which is far wider than the width of the labels to be applied. The corners of the labels are then removed in an arcuate fashion, in one approach, so that the apertures for the pins of the pin advance roller may fit in the backing strip and within the removed arcuate corners of two adjacent labels. The arrangement produces some difficulty in that direct pressure may be brought to bear upon the edges of the label causing the label itself to be crinkled or torn and further reduces the usable label surface. In a further approach the feed holes are disposed to the sides of the label area. This requires a larger label handling system.

In all of the prior art situations where the feed apertures are located outside the periphery of the label the amount of waste material that must be stripped away is significant and costly.

The provision of feed holes in the release material within the periphery of the label has not in and of itself been found to be the solution to the problem. The adhesive on the back of the label will migrate through such

3

an aperture onto an adjacent label and damage same. To replace such apertures by crossed slits which open to receive a pin feed drive is furthermore not the cure since this results in an undefined feed surface which will vary depending on the nature of the feed and the release material. An undefined feed surface may result in improper feed and poor location of the label in the printing or punching station.

SUMMARY OF THE INVENTION

The present invention obviates all of these difficulties by providing a unique arrangement wherein the labels may be placed in either an abutting arrangement, or a spaced arrangement, such as not to waste the space normally necessary for locating the feed holes. The present invention employs a series of die cuts in the release material which do not extend through the label stock. The die cuts clearly define the feed surface and encircle an internal portion of release material. Thus the label adhesive remains covered and cannot migrate. In addition when the label arrives at the imprinting or punching station it presents a level surface thereto and not one which is in any way unsupported. As the label is stripped from the release material the internal portion will stick to the back of the label, if the die cut forms a closed configuration, thus freeing the feed holes for cooperation with an appropriate pin feed. Due to the small size of the internal portion the surface available for adhesion of the pressure sensitive label to the material to be marked or labeled is not greatly diminished and there is no interference with the ability of the label to adhere to the surface to be marked. In a further embodiment the die cutting of the feed holes is not made complete and it is only upon the action of the pins against the preformed pin feed holes that the apertures are exposed to the pins providing a form of chadless label strip construction.

It is therefore an object of this invention to provide an improved form of pressure sensitive label strip construction and the method for making same.

It is still another object of this invention to provide a novel form of pressure sensitive label strip construction wherein feed holes are provided within the backing strip and within the label area but which do not extend through the label.

It is still another object of this invention to provide a novel form of pressure sensitive label strip construction wherein feed holes are die cut into the backing strip only and within the label area and do not extend through the label and which are exposed by the action of the removal of the label from the backing strip such as to provide clear feed surfaces.

It is still another object of this invention to provide a novel form for pressure sensitive label strip construction and method of making same wherein partially die cut feed holes are mounted below the label and within the backing strip only said feed holes being within the label area, these feed holes being exposed at an advancing station by means of pins of a pin advancing feed itself.

Other objects and features of the invention will be pointed out in the following description and claims and illustrated in the accompanying drawings, which disclose, by way of example, the principle of the invention, and the best modes which have been contemplated for carrying them out.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

FIG. 1 is a side elevation in highly schematic form of a pressure sensitive label strip handling device including a pressure sensitive label strip processing means.

FIG. 2 is a isometric view of a pressure sensitive label strip constructed in accordance with the basic concepts of the invention.

FIG. 3 is a sectional elevation taken along the line 3—3 of FIG. 2 and showing in greater detail the construction

4

of the pressure sensitive label strip constructed in accordance with the basic concepts of the invention.

FIG. 4 is a bottom view of a pressure sensitive label which has been removed from the backing strip.

FIG. 5 shows an alternative construction of the pressure sensitive label strip of FIG. 2.

FIG. 6 shows a further pressure sensitive label strip construction embodiment.

FIG. 7 shows a further form of pressure sensitive label construction.

FIG. 8 is a simplified schematic showing of the operation of a pin feed roller with the label strips constructed in accordance with FIGS. 6 and 7.

Similar elements will be given similar reference characters in each of the respective figures.

Turning now to FIG. 1 there is shown a side elevation in highly schematic form of a device for handling and processing pressure sensitive labels. The device is generally shown to have a base 10 to which is attached a supply reel support structure 12 upon which is placed a reel 14 containing a coiled pressure sensitive label strip, which includes a backing strip 22 of suitable release material as well as pressure sensitive labels 20. The pressure sensitive label strip is then fed from reel 14 through a label processing station 16, which may include label imprinting and punching devices or other similar devices such as reading means etc. After leaving processing station 16, the label strip is passed over a sharp or small radius of curvature separator point 18, at which point, due to the sharp bending of backing strip 22, a label, such as 20, is caused to separate from backing strip 22, which is continued over a guide roller 24 to the pins of a pin advance roller 26 and finally into a waste bin 28. As can be seen, it is solely the action of the pins of pin roller 26 engaging the sidewalls of feed holes 30 in backing strip 22 which causes the movement of the pressure sensitive label strip from reel 14 through processing station 16 to waste basket 28.

Turning now to FIG. 2 the construction of the pressure sensitive label strip may be better understood. Backing strip 22 is arranged to be of the same width or slightly in excess of the width of pressure sensitive labels 20. As can be seen, each of pressure sensitive label 20 covers a set of die cut pin feed holes 30 in backing strip 22. By permitting internal portions or inserts 32 of strip 22 to remain with the label strip there is no possibility of adhesive migration; or label destruction during the printing or punching operation which may take place within processing station 16. If internal portions 32 were removed and printing were attempted tearing of the label or smearing or distortion of the printing might occur. Leaving internal portions 32 within feed holes 30 results in no discernable difference in the amount of support for each label 20 at any point along its width or length.

At separator point 18 backing strip 22 is caused to move downwardly and labels 20 move forwardly therefrom as shown more clearly in FIG. 1. This will be described below. Internal portions 32 remain with their associated label 20 as it leaves backing strip 22 as shown at 32a in FIG. 4. Thus the feed holes, such as those shown at 30a (FIG. 2) in the portion of backing strip 22 already stripped of labels 20 will have clearly defined side walls for interaction with the pins of pin advance roller 26 to be described below.

Labels 20 are generally constructed of 2½ to 4 point paper coated with an adhesive layer. Backing strip 22 may be of glassine or some other similar material permitting rapid release of pressure sensitive labels 20. With certain materials, used as backing strip 22, it is necessary to put a release coating on backing strip 22 to insure that pressure sensitive labels 20 may be more easily released from backing strip 22 without the destruction of either labels 20 or backing strip 22. In the arrangement shown in FIG. 2 it can be seen that labels 20 were placed in abutment with one another upon backing strip 22, there

being no spacing necessary between adjacent labels 20. Depending upon the size of the label or the label strip advancing device it may be desirable to place pin feed holes 30 beneath selected ones of the labels 20, for example, at every second or third label. Additionally, it may be desirable to place but a single feed hole 30 at each selected label 20 along the strip.

Referring to FIG. 3 there is a side view of a label strip taken along the line 3—3 of FIG. 2. Labels 20b, 20c, and 20d are shown in their normal position in engagement with backing strip 22 and over individual feed holes 30b, 30c, and 30d. It should be noted that feed holes 30b, 30c, and 30d have been fully die cut but that the internal portions 32b, 32c, and 32d have not been removed. Label 20a (FIGS. 2 and 3) is shown with its associated backing strip 22 passing about separator point 18 and as it stands out in a plane along the direction in which it was formerly traveling. It can be seen that label 20a takes with it internal portions 32a leaving feed holes 30a (only one visible in FIG. 3) in backing strip 22 exposed so that the side walls thereof may coact with the feed means. In this position the label 20a may be removed by hand for application to an item to be marked; or it may be applied by mechanical means.

Turning now to FIG. 4 there is shown a bottom view of the label 20a of FIG. 3 showing internal portions 32a. The presence of two feed holes for the advancement of backing strip 22 through processing station 16 results in only approximately 2.5% of the bottom surface, that is the adhesive coated surface of the label 20a being lost. This amount of loss is not significant and will not prevent the proper adherence of pressure sensitive label 20a to the item to be marked.

This type of arrangement provides a chadless backing strip arrangement in what would otherwise be a chad arrangement. For example, in a comparable punch paper tape if the feed holes were fully die cut the internal portions would be removed by the sprocket of the paper tape advance mechanism and would produce loose portions, commonly known as chad. However, in this arrangement because of the adherence of the so-called chad to the adhesive bottom portion of pressure sensitive label 20a the device provides a chadless mode of operation.

FIG. 5 shows a further arrangement of pressure sensitive labels 20 with respect to backing strip 22. In this arrangement, labels 20 are placed in a spaced arrangement along the length of backing strip 22. Such an arrangement may be necessitated by the particular type of imprinting device used which is not recycled fast enough to be able to handle labels in the abutted arrangement as is shown in FIG. 2. Feed holes 30 are completely die cut into the backing strip 22 below labels 20 and internal portions 32 remain with labels 20 during the time of its travel from reel 14 through processing station 16 until application at the point of separator 18. The over-all operation of this construction is similar to that described with reference to FIGS. 2 to 4.

Turning now to FIG. 6 there is shown a further type of chadless operation in which labels 20 are placed in close abutment with backing strip 22. However, in this instance feed holes 40 are formed in backing strip 24 with an incomplete geometric configuration to present flap type internal portions 42 within the die cut lines of severance. In this case, as in the cases described above the die cutting is within the backing strip only and does not extend through the label material.

Referring to FIG. 7 there is shown a spaced arrangement of the individual labels 20 upon backing strip 22 in a manner similar to that shown with reference to FIG. 5. The variation of this construction over that of FIG. 5 is that feed holes 40 are cut in a manner similar to that described with reference to FIG. 6, that is feed holes 40 do not represent completely closed geometric figures but are incomplete geometric figures which may take the shape of an over-all circular pattern, rectangular,

triangular, square or any other convenient geometric form.

Turning now to FIG. 8 there is shown the pin roller 26 interaction with the side walls of an aperture 40 of backing strip 42. In this figure for simplicity's sake each of the labels have been removed but it should be understood that the general movement of the labels will be similar to that described with reference to FIGS. 2 and 3. Even after backing strip 42 has passed separator point 18, feed holes 40 remain with internal portions 42 in the closed position until such time as one of the pins of pin roller 26 engages a portion 42 and forces it to be displaced. It can be seen from FIGS. 6 and 7 that the feed holes are die cut in such a manner that the leading edge of the feed hole has been cut whereas the trailing edge has not. Therefore, the leading edge will yield to contact with the pins of pin roller 26 and will cause internal portions or chad 42 to be pivoted about its back, anchored, uncut point. With this arrangement, there is no loss of adhesive surface of the individual labels 20 as is true of the labels 20 shown in FIG. 2 wherein the feed holes are completely cut and the inserts remain with the labels. There again the sidewalls of apertures 40 are clearly defined for coaction with the pins of pin feed roller 26.

While there have been shown, described and pointed out the fundamental and novel features of the invention as applied to the preferred embodiments, it will be understood that various omissions and substitutions and changes of the form and details of the devices illustrated and its operation may be made by those skilled in the art, without departing from the spirit of the invention.

I claim:

1. The combination of label material and supporting material disposed in juxtaposed relation and a layer of adhesive material therebetween releasably securing said label material and said supporting material one to the other, a plurality of cut means each forming a line of severance only through said supporting material, each of said lines of severance constituting the side walls of a feed hole disposed within the peripheral limits of said associated label material in such a way that some of said supporting material forms an internal portion lying within each of said line of severance, said side walls defined by said lines of severance constituting a defined feed surface permitting the advancing of said label material and said supporting material.

2. The combination defined in claim 1, wherein said label material comprises: a plurality of discrete labels, each label having a width approximately coextensive with said supporting material, said labels being arranged along said supporting material in an abutting, nonspaced relationship, selected ones of said labels having associated therewith at least one of said feed holes.

3. The combination as defined in claim 2, wherein each of said lines of severance forms a closed geometric shape.

4. The combination as defined in claim 3, wherein there are at least two rows of feed holes in said supporting material.

5. The combination as defined in claim 3, wherein said label stock and supporting material are adapted to be moved about separator means having a small radius of curvature causing the separation of individual ones of said labels from said supporting material together with said internal portions whereby said feed hole is cleared for interaction with feed means.

6. The combination as defined in claim 2, wherein lines of severance forms an incomplete geometric shape.

7. The combination as defined in claim 6, wherein there are at least two rows of feed holes in said supporting material.

8. The combination as defined in claim 6, wherein said label stock and supporting material are adapted to be moved about separator means having a small radius of curvature causing the separation of individual ones of

7

said labels from said supporting material and further adapted to pass over a pin drum of a feeding means whereby said internal portions of said feed holes are displaced forming chadless feed holes to accept the pins of the pin drum.

9. The combination as defined in claim 1, wherein said label material comprises: a plurality of discrete labels, having a width approximately co-extensive with said supporting material, said labels being arranged along said supporting material in a spaced apart nonabutting relationship selected ones of said labels having associated therewith at least one of said feed holes.

10. The combination as defined in claim 1, wherein each of said lines of severance forms a closed geometric shape.

11. The combination as defined in claim 10, wherein said label stock and supporting material are adapted to be moved about separator means having a small radius of curvature causing the separation of individual ones of said labels from said supporting material together with said internal portions whereby said feed hole is cleared for interaction with feed means.

12. The combination as defined in claim 1 wherein there are at least two rows of feed holes in said supporting material.

13. The combination as defined in claim 1, wherein

8

each of said lines of severance forms an incomplete geometric shape.

14. The combination as defined in claim 13, wherein there are at least two rows of feed holes in said supporting material.

15. The combination as defined in claim 13, wherein said label stock and supporting material are adapted to be moved about separator means having a small radius of curvature causing the separation of individual ones of said labels from said supporting material and further adapted to pass over a pin drum of a feeding means whereby said internal portions of said feed holes are displaced forming chadless feed holes to accept the pins of the pin drum.

References Cited

UNITED STATES PATENTS

2,259,358	10/1941	Templeton	229—69	XR
3,032,463	5/1962	Morgan	156—268	X
3,265,553	8/1966	Kind et al.	156—384	

ROBERT F. BURNETT, Primary Examiner

R. L. MAY, Assistant Examiner

U.S. Cl. X.R.

156—283; 161—39, 111, 113, 406; 206—56; 283—21