

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/040167 A1

(43) International Publication Date
21 March 2013 (21.03.2013)

WIPO | PCT

(51) International Patent Classification:
C09K 8/035 (2006.01) *C09K 8/68* (2006.01)
C09K 8/60 (2006.01)

(74) Agents: DUNLAP, Thoburn T. et al.; The Lubrizol Corporation, Legal Department/MD022B, 29400 Lakeland Blvd., Wickliffe, Ohio 44092-2298 (US).

(21) International Application Number:
PCT/US2012/055094

(22) International Filing Date:
13 September 2012 (13.09.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/533,884 13 September 2011 (13.09.2011) US
61/533,887 13 September 2011 (13.09.2011) US
61/578,297 21 December 2011 (21.12.2011) US

(71) Applicant (for all designated States except US): LUBRIZOL ADVANCED MATERIALS, INC. [US/US]; 9911 Brecksville Road, Cleveland, Ohio 44141-3247 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CHARI, Krishnan [US/US]; 7475 Andover Way, Hudson, Ohio 44236 (US). HSU, Shui-Jen Raymond [US/US]; 28816 Woodmill Drive, Westlake, Ohio 44145 (US). YANG, Wei-Yeih [US/US]; 4045 Boxelder Drive, Brecksville, Ohio 44141 (US). BHARGAVA, Prachur [IN/US]; 13 Kris Court, Newark, Delaware 19702 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: SURFACTANT RESPONSIVE MICRO-GELS

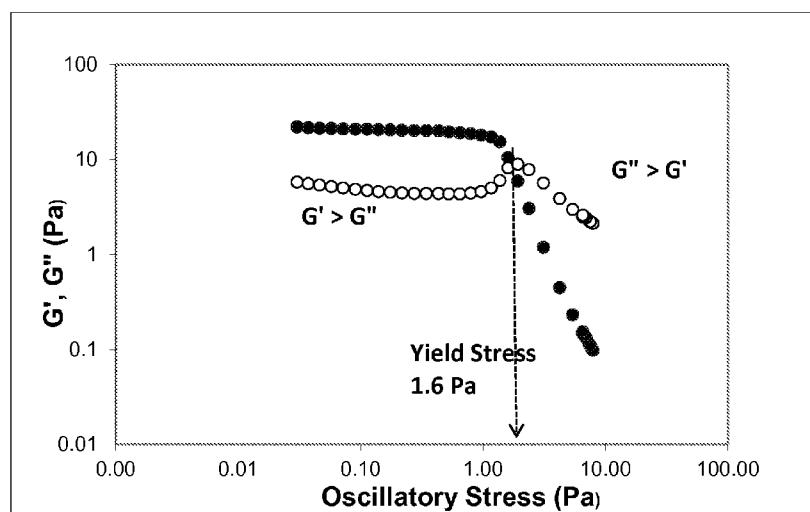

(57) Abstract: A stable, aqueous composition containing a crosslinked, nonionic, amphiphilic polymer capable of forming a yield stress fluid in the presence of a surfactant is disclosed. The yield stress fluid is capable of suspending insoluble materials in the form of particulates and/or droplets requiring suspension or stabilization.

WO 2013/040167 A1



Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

SURFACTANT RESPONSIVE MICRO-GELS

FIELD OF THE INVENTION

[0001] The present invention relates to rheology modifiers and more specifically to a yield stress fluid comprising a surfactant responsive micro-gel. Additionally, this invention also relates to the formation of a rheologically and phase stable surfactant responsive micro-gel compositions that can be used over a broad pH range to suspend particulates and insoluble materials.

BACKGROUND OF THE INVENTION

[0002] We are surrounded in everyday life by yield stress fluids. Simply stated, yield stress fluids remain stationary until a sufficient stress is placed on the fluid at which point the fluid will flow. It can be thought of as the initial resistance to flow under stress and is also referred to as yield value. Yield stress is a measurable quantity similar to, but not dependent on viscosity. While a certain rheology modifier may thicken or enhance the viscosity of a composition in which it is included, it does not necessarily have desirable yield stress properties.

[0003] A desirable yield stress property is critical to achieving certain physical and aesthetic characteristics in a liquid medium, such as the indefinite suspension of particles, insoluble liquid droplets, or the stabilization of gas bubbles within a liquid medium. Particles dispersed in a liquid medium will remain suspended if the yield stress (yield value) of the medium is sufficient to overcome the effect of gravity or buoyancy on those particles. Insoluble liquid droplets can be prevented from rising and coalescing and gas bubbles can be suspended and uniformly distributed in a liquid medium using yield value as a formulating tool. An example of a yield stress fluid is a micro-gel rheology modifier which is used generally to adjust or modify the rheological properties of aqueous compositions. Such properties include, without limitation, viscosity, flow rate, stability to viscosity change over time, and the ability to suspend particles for indefinite periods of time. They are useful in a number of consumer and industrial applications. An important consumer application includes their use

in the formulation of personal care products such as body washes, skin creams, toothpastes, shampoos, hair gels and other cosmetics. In industrial applications, they are useful as subterranean treatment fluids in the oil and gas industry as a component in drilling and fracturing fluids. Typically, they comprise chemically crosslinked polymers having a pH-responsive functionality that is either base or acid sensitive. The polymers may be mixed with other ingredients in a formulation and then neutralized by the addition of a neutralization agent such as an acid or a base. Acid sensitive thickeners are activated upon contact with an acidic agent, while base-sensitive thickeners are activated upon contact with an alkaline agent. Upon neutralization, the polymers swell significantly to form a randomly close-packed (RCP) jammed network of swollen cross-linked micro-gel particles imparting a desired rheological profile, i.e., yield stress, elastic modulus, and viscosity, as well as optical clarity to the formulation.

[0004] These types of rheology modifiers are well known in the art. For example, U.S. Pat. Nos. 2,798,053; 2,858,281; 3,032,538; and 4,758,641 describe cross-linked carboxylic acid polymers based on acrylic acid, maleic acid, itaconic acid or methacrylic acid monomers. U.S. Pat. No. 6,635,702 describes crosslinked alkali-swellable acrylate copolymers comprising one or more carboxylic acid monomers and one or more non-acid vinyl monomers. U.S. Pat. No. 7,378,479 discloses a crosslinked acid-swellable polymer containing at least one basic amino substituent that is cationic at low pH, at least one hydrophobically modified polyoxyalkylene substituent derived from an associative vinyl monomer, and at least one polyoxyalkylene substituent derived from a semihydrophobic vinyl surfactant monomer. A key feature of these pH-responsive micro-gels is the very large increase in diameter (or size) of individual cross-linked polymer particles upon neutralization. The high swelling efficiency allows formulators to achieve the desired yield stress and viscosity using relatively small amounts of polymer resulting in low cost-in-use. Dalmont, Pinprayoon and Saunders (*Langmuir* vol. 24, page 2834, 2008) show that individual particles in a micro-gel dispersion of a copolymer of ethyl acrylate, and methacrylic acid cross-linked with butanediol diacrylate increase in diameter by at least a factor of 3 upon pH-activation or neutralization. The level of swelling

causes an increase in volume fraction of at least 27 (3³). A jammed network is achieved upon neutralization (or activation) with a relatively low concentration of polymer (less than 3 wt.%).

[0005] Although pH-responsive micro-gels provide yield stress fluids with the high efficiency that is desired by the formulator, they suffer from a major disadvantage. Rheological properties are not uniform across a broad range in pH and show sharp changes as a function of pH. To overcome these difficulties, various non-ionic thickeners have been proposed. U.S. Pat. No. 4,722,962 describes non-ionic associative thickeners comprising a water-soluble monoethylenically unsaturated monomer and a non-ionic urethane monomer. These polymers provide increases in viscosity or thickening of aqueous formulations that is relatively independent of pH but the polymers are not cross-linked and the purely associative interactions do not create a yield stress.

[0006] In addition to pH-responsive micro-gels, temperature-responsive micro-gels are known in the art. Senff and Richtering (*Journal of Chemical Physics*, vol. 111, page 1705, 1999) describe the change in size of non-ionic chemically cross-linked poly (N-isopropylacrylamide) (PNIPAM) micro-gel particles as a function of temperature. The particles swell by almost a factor of 2.5 in diameter (15 times in terms of volume fraction) when the temperature is reduced from 35°C to 10°C. Although this represents a significant degree of swelling, the use of temperature to activate micro-gels is undesirable. A method of activation is needed that enables switching from a free-flowing suspension to a jammed yield stress fluid under ambient conditions.

[0007] Wu and Zhou (*Journal of Polymer Science: Part B: Polymer Physics*, vol.34, page 1597, 1996) describe the effect of surfactant on swelling of chemically cross-linked PNIPAM homo-polymer micro-gel particles in water. The use of surfactants to activate micro-gels is attractive because many formulations contain surfactants as co-ingredients. However, the efficiency of swelling reported by Wu and Zhou is extremely low. The anionic surfactant sodium dodecyl (lauryl) sulfate increases the size of cross-linked PNIPAM particles by only a factor of 1.4 at room temperature. Furthermore, Wu and Zhou do not teach how to create a shear thinning yield stress fluid with high optical clarity.

[0008] Another inherent drawback with PNIPAM micro-gels is the low yield of polymer solids attained at the conclusion of synthesis. Thorne, Vine and Snowden (*Colloid Polymer Science*, vol. 289, page 642, 2011) report that PNIPAM prepared by surfactant free emulsion polymerization (SFEP) results in a solids concentration of 0.5% (w/v). Typical emulsion polymerized commercially available micro-gel latexes contain at least about 28% (w/v) and higher solids levels.

[0009] Hidi, Napper and Sangster (*Macromolecules*, vol.28, page 6042, 1995) describe the effect of surfactant on swelling of poly (vinyl acetate) homopolymer micro-gels in water. For micro-gels that are not cross-linked they report an increase in diameter by a factor of 3 to 4 corresponding to a 30 to 60 fold change in volume of the original particles in the presence of sodium dodecyl (lauryl) sulfate. However, swelling is drastically reduced for cross-linked particles. In this case, they observe an increase in diameter by only a factor of 1.4. Once again, Hidi, Napper and Sangster do not teach how to create a shear thinning yield stress fluid with high optical clarity.

[0010] Apart from providing the necessary rheology profiles, the suspension of solids and/or insoluble materials in a phase stable system is as equally important to a rheology modifier. In drilling for oil and gas, subterranean treatment fluids (e.g., drilling and fracture fluids) are typically modified with gelling agents to provide desired rheological properties. Gelling agents include any substance that is capable of increasing the viscosity of a fluid, for example, by forming a micro-gel. These agents must not only possess desirable rheological properties in terms of fluid flow and pumpability, but must also have the capability to suspend solids under both dynamic and static conditions. During active drilling operations, the drilling fluid must possess sufficient structure to carry the formation cuttings to the surface and also have the necessary shear thinning properties to be pumpable. During non-drilling periods, the drilling fluid may remain stationary in the bore hole for hours or even days at a time. During this period, settling of entrained solids can be problematic if the fluid does not have enough structure to support both large and small particulate matter.

[0011] Fracturing is used to boost the production of hydrocarbons such as petroleum or natural gas from subterranean formations. In this process, a fracturing fluid containing a gelling agent is injected through a wellbore and forced against the formation strata by high pressure sufficient to cause the strata to crack and fracture thereby liberating the hydrocarbon trapped in the formation. The fracturing fluid also carries a proppant to the fracture site. Proppant particles remain in the fracture thereby “propping” the fracture open when the well is in production. The proppant material is typically selected from sand, sintered bauxite, glass balls, polystyrene beads, and the like. Whereas sufficient rheological properties are important in treatment fluids used in fracturing, satisfactory suspending ability is necessary for the transport of the proppant materials to the fracture site within the formation.

[0012] Conditions are harsh within a subterranean formation and a gelling agent must be stable to variations in temperature, brackish environments, wide ranges of pH, and changes in shear forces.

[0013] Various problems have been encountered with subterranean treatment fluids in oil field applications, including the lack of thermal stability of the gel upon exposure to varying temperatures and pH, as well as high shear conditions. This can result in changes in the rheological properties of the gel which can ultimately affect the ability of the fluid to suspend bore hole cuttings and or proppant materials. If particulate materials are prematurely lost from the treatment fluid, it can have a detrimental effect on the drilling and development of the formation. Furthermore, gel instability can result in higher loss of fluid into the formation thereby diminishing the efficiency of the operation.

[0014] Personal care compositions which can suspend particles and/or other water insoluble materials are very desirable. These materials impart or contribute to a variety of user benefits including but not limited to exfoliation, visual aesthetics, and/or the encapsulation and release of beneficial agents upon use. The suspension of particulate and insoluble materials as active and aesthetic agents in personal care compositions is becoming increasingly popular with formulators. Typically, particles are suspended in personal care compositions using structuring systems such as acrylate polymers, structuring

gums (e.g., xanthan gum), starch, agar, hydroxyl alkyl cellulose, etc. However, the addition of beads or particles to personal care compositions tends to be problematic. For example, one problem is that particles or insoluble materials very frequently tend to be of a different density than the continuous phase of the composition to which they are added. This mismatch in the density can lead to separation of the particles from the continuous phase and a lack of overall product stability. In one aspect, when added particles are less dense than that of the composition continuous phase, the particles tend to rise to the top of such phase ("creaming"). In another aspect, when the added particles have a density greater than that of the continuous phase, the particles tend to gravitate to the bottom of such phase ("settling"). When large particles are desired to be suspended (e.g., polyethylene particles, guar beads, etc.), the level of polymer used is typically increased to provide increased structure for suspended beads. A consequence of thickening a liquid to provide structure for suspended beads causes a significant increase in liquid viscosity and a corresponding decrease in pourability, a property which is not always desirable. Highly viscous products are typically difficult to apply and rinse away, especially if the shear thinning profile of the viscosity building agent is deficient. High viscosities can also adversely affect packaging, dispensing, dissolution, and the foaming and sensory properties of the product. Moreover, conventionally structured liquids are often opaque or turbid thereby obscuring the suspended beads from the consumer, which adversely affects the aesthetic appeal of the product.

[0015] Many common thickeners such as xanthan gum, carboxymethylcellulose (CMC), carrageenan, and acrylic acid homopolymers and copolymers are anionic and therefore, can react with the cationic surfactants and cause precipitation of the cationic and thickener or reduce the efficacy of the cationic surfactant. Non-ionic thickeners such as hydroxyethylcellulose (HEC) and hydroxypropylmethylcellulose (HPMC) can provide viscosity in cationic systems, however, very little suspension properties are imparted to the fluid. Cationic thickeners such as Polyquaternium-10 (cationically modified HEC) and cationic guar provide thickening in cationic systems but not suspension. Some acrylic polymers are effective at thickening cationic systems but they can be

limited by pH, require high concentrations, have high cost-in-use, and often have narrow limits of compatibility with the cationic materials.

[0016] Anionic surfactants are often used as detergents in cleansers and cleaning products because of their excellent cleaning and foaming properties. Exemplary anionic surfactants traditionally utilized in these formulations include, for example, alkyl sulfates and alkyl benzene sulfonates. While the anionic surfactants and, in particular, the anionic sulfates and sulfonates are efficient detergents, they are severe ocular irritants and capable of causing mild to moderate dermal irritation to some sensitized persons. Accordingly, it has become increasingly important to consumers that aqueous cleansing compositions be mild in that they do not irritate the eyes and skin when in use. Manufacturers are striving to provide mild cleansing products that also incorporate insoluble benefit and/or aesthetic agents that require stable suspension. It is known that the irritation caused by anionic sulfates and sulfonates can be reduced by utilizing the ethoxylated forms thereof. While ethoxylated surfactants may mitigate ocular and skin irritation in compositions in which they are included, a major problem in using these surfactants is that it is difficult to obtain desirable yield stress properties in an ethoxylated system.

[0017] U.S. Pat. No. 5,139,770 describes the use of crosslinked homopolymers of vinyl pyrrolidone in surfactant containing formulations such as conditioning shampoo to obtain relatively high viscosities. However, the patent does not teach how to create a yield stress fluid with high optical clarity that is also shear thinning.

[0018] U.S. Pat. No. 5,663,258 describes the preparation of crosslinked copolymers of vinyl pyrrolidone/vinyl acetate. High viscosities are obtained when the polymer is combined with water but there is no teaching about using the polymer to create a yield stress fluid that is activated by surfactant.

[0019] U.S. Patent No. 6,645,476 discloses a water soluble polymer prepared from the free radical polymerization of a hydrophobically modified ethoxylated macromer in combination with a copolymerizable second monomer selected from unsaturated acids and their salts and/or a myriad of other monomers including N-vinyl lactams and vinyl acetate. Preferred polymers are

crosslinked and are polymerized from hydrophobically modified ethoxylated macromers in combination with neutralized 2-acrylamido-2-methylpropanesulfonic acid. The viscosities of 1% aqueous solutions of the polymer preferably range from 20,000 mPa·s to 100,000 mPa·s. There is no teaching of a surfactant activated polymer devoid of hydrophobically modified ethoxylated macromer repeating units providing a yield stress fluid exhibiting good suspension properties without a substantial increase in viscosity.

[0020] There remains a challenge to not only demonstrate the ability to effectively suspend particles within stable micro-gel containing compositions, but also exhibit desirable mildness, desirable rheology profiles, clarity and aesthetic characteristics across a wide range of temperature and pH conditions at low polymer usage levels. Accordingly, there is a need for a yield stress fluid based on polymer micro-gel particles wherein the concentration of polymer is no more than 5 wt.% based on the weight of the composition in which it is included and having yield stress value of at least 0.1 Pa, wherein the yield stress, elastic modulus and optical clarity are substantially independent of pH. There is also a need to provide yield stress fluids formulated with mild surfactants such as, for example, surfactants containing ethylene oxide moieties.

SUMMARY OF THE INVENTION

[0021] In one aspect, embodiments of the present invention relate to crosslinked, nonionic, amphiphilic polymers that are swollen in the presence of a surfactant. In another aspect, an embodiment of the invention relates to a yield stress fluid comprising a crosslinked, nonionic, amphiphilic polymer and a surfactant.

[0022] In still another aspect, an embodiment of the invention relates to a thickened aqueous composition comprising a crosslinked, nonionic, amphiphilic polymer and at least one surfactant, wherein the concentration of the polymer is no more than 5 wt.% based on the total weight of the composition, and the at least one surfactant is no more than 30 wt.% of the composition, the yield stress of the composition is at least 0.1 Pa with a shear thinning index of less than 0.5 at shear rates between about 0.1 and about 1 reciprocal seconds, and wherein

the yield stress, elastic modulus and optical clarity of the composition are substantially independent of pH in the range of about 2 to about 14

[0023] In still another aspect, an embodiment of the invention relates to a thickened aqueous composition comprising a crosslinked, nonionic, amphiphilic polymer and at least one surfactant, wherein the concentration of the polymer is no more than 5 wt.% based on the total weight of the composition, and the at least one surfactant is no more than 30 wt.% of the composition, wherein the ratio of the standard deviation to the mean of measured values for yield stress, elastic modulus and optical clarity is less than 0.3 in one aspect, and less than 0.2 in another aspect in the pH range from about 2 to about 14.

[0024] In still another aspect, an embodiment of the invention relates to a thickened aqueous composition comprising a crosslinked, nonionic, amphiphilic polymer and at least one surfactant, wherein the concentration of the polymer is no more than 5 wt.% based on the total weight of the composition, and at least one surfactant is no more than 30 wt.% of the composition, the yield stress of the composition is at least 0.1 Pa with a shear thinning index of less than 0.5 at shear rates between about 0.1 and about 1 reciprocal seconds, and wherein the yield stress, elastic modulus and optical clarity of the composition are substantially independent of pH in the range of about 2 to about 14 and wherein the composition is able to suspend beads of a size between 0.5 and 1.5 mm wherein the difference in specific gravity of the beads relative to water is in the range of +/- 0.2 to 0.5 for a period of at least 4 weeks at room temperature.

[0025] In still another aspect, an embodiment of the invention relates to a thickened aqueous composition comprising a crosslinked, nonionic, amphiphilic polymer and one or more surfactants, wherein the concentration of the polymer is no more than 5 wt.% based on the total weight of the composition, wherein the total concentration of surfactant is no more than 30 wt.% of the composition, the yield stress of the composition is at least 0.1 Pa with a shear thinning index of less than 0.5 at shear rates between about 0.1 and about 1 reciprocal seconds, and wherein the yield stress, elastic modulus and optical clarity of the composition are substantially independent of pH in the range of about 2 to about 14 and wherein the composition is able to suspend beads of a size between 0.5

and 1.5 mm where the difference in specific gravity of the beads relative to water is in the range of +/- 0.2 to 0.5 for a period of at least 4 weeks at room temperature and wherein one of the surfactants contains ethylene oxide moieties and said surfactant is more than 75% by weight of the total surfactant.

[0026] The crosslinked, nonionic, amphiphilic polymer compositions as well as the thickened aqueous fluid comprising the nonionic, amphiphilic, polymer compositions and the at least one surfactant of the present invention may suitably comprise, consist of, or consist essentially of the components, elements, and process delineations described herein. The invention illustratively disclosed herein suitably may be practiced in the absence of any element which is not specifically disclosed herein.

[0027] Unless otherwise stated, all percentages, parts, and ratios expressed herein are based upon the total weight of the components contained in the compositions of the present invention.

[0028] As used herein, the term "amphiphilic polymer" is defined to mean a polymer having a composite solubility parameter (δ_c) that ranges from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0029] As used herein, the term "hydrophilic monomer" means a monomer whose homopolymer has a solubility parameter (δ_i) greater than 21.0 MPa^{1/2}.

[0030] As used herein, the term "hydrophobic monomer" means a monomer whose homopolymer has a solubility parameter (δ_i) of about 19.3 MPa^{1/2} or less.

[0031] By "nonionic" is meant that a monomer, monomer composition or a polymer prepared from a monomer composition is devoid of ionic or ionizable moieties ("nonionizable").

[0032] An ionizable moiety is any group that can be made ionic by neutralization with an acid or a base.

[0033] An ionic or an ionized moiety is any moiety that has been neutralized by an acid or a base.

[0034] By "substantially nonionic" is meant that the monomer, monomer composition or polymer prepared from a monomer composition contains less than 5 wt.% in one aspect, less than 3 wt.% in another aspect, less than 1 wt.%

in a further aspect, less than 0.5 wt.% in a still further aspect, less than 0.1 wt.% in an additional aspect, and less than 0.05 wt.% in a further aspect, of an ionizable and/or an ionized moiety.

[0035] For the purpose of the specification, the prefix "(meth)acryl" includes "acryl" as well as "methacryl". For example, the term "(meth)acrylamide" includes both acrylamide and methacrylamide.

BRIEF DESCRIPTION OF THE DRAWINGS

[0036] Fig. 1 is a plot of the average particle size of a crosslinked, nonionic, amphiphilic polymer in the yield stress fluid of Example 16 formulated with sodium dodecyl sulfate (SDS) at various concentrations.

[0037] Fig. 2 is a plot of the elastic (G') and viscous moduli (G'') as a function of increasing oscillatory stress amplitude (Pa) for the yield stress fluid formulation of Example 17. The plot shows the crossover point of G' and G'' corresponding to the yield stress value of the formulation.

[0038] Fig. 3 is a plot of the elastic (G') and viscous moduli (G'') as a function of increasing oscillatory stress amplitude for a yield stress fluid formulated from the crosslinked, nonionic, amphiphilic polymer of Example 9.

DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0039] Exemplary embodiments in accordance with the present invention will be described. Various modifications, adaptations or variations of the exemplary embodiments described herein may become apparent to those skilled in the art as such are disclosed. It will be understood that all such modifications, adaptations or variations that rely upon the teachings of the present invention, and through which these teachings have advanced the art, are considered to be within the scope and spirit of the present invention.

[0040] While overlapping weight ranges for the various components and ingredients that can be contained in the compositions of the invention have been expressed for selected embodiments and aspects of the invention, it should be readily apparent that the specific amount of each component in the disclosed

- 12 -

compositions will be selected from its disclosed range such that the amount of each component is adjusted such that the sum of all components in the composition will total 100 weight percent. The amounts employed will vary with the purpose and character of the desired product and can be readily determined by one skilled in the art.

[0041] It has been discovered that unexpectedly highly efficient yield stress fluids with excellent shear thinning and optical clarity over a broad pH range are obtained if certain chemically crosslinked, nonionic, amphiphilic polymers are mixed with surfactants in water. The crosslinked, nonionic, amphiphilic polymers of the invention have a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}. As used herein and throughout the specification, the composite solubility parameter is defined as:

$$\delta_c = \sum x_i \delta_i$$

where x_i is the mole fraction of a monomer polymerized into the amphiphilic polymer backbone and δ_i is the solubility parameter of the homopolymer based on that monomer. The solubility parameter (δ_i) is defined as:

$$\delta_i^2 = \delta_D^2 + \delta_P^2 + \delta_H^2$$

where δ_D , δ_P , and δ_H , respectively, are the Hansen dispersion, polar and hydrogen bonding variables of the solubility parameter. Details on solubility parameters are outlined by C.M. Hansen in *Hansen Solubility Parameters A User's Handbook*, pages 6-7, published by CRC press, Boca Raton, Florida (2007), which is herein incorporated by reference. The amphiphilic polymers of the invention also contain a crosslinking monomer. It has been determined that crosslinking provides the right balance between mechanical rigidity of the particles and expansion in aqueous surfactant media. The crosslinked, nonionic, amphiphilic polymers of the invention display high surfactant activated swelling in water with increases in particle diameter of at least a factor of 2.5 in one aspect and at least 2.7 in another aspect. Furthermore, swollen micro-gels based on

the polymers of the invention interact with each other in aqueous surfactant media to create soft glassy materials (SGMs) with high yield stress and shear thinning flow that is substantially independent of pH.

[0042] In one aspect, the crosslinked, nonionic, amphiphilic polymers of the invention have a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2} inclusive of polymers derived from a monomer composition comprising up to about 10 wt.% in one aspect, and up to about 5 wt.% in another aspect, of an associative and/or a semi-hydrophobic monomer.

Amphiphilic Polymer

[0043] The crosslinked, nonionic, amphiphilic polymers useful in the practice of the invention are polymerized from monomer components that contain free radical polymerizable unsaturation. In one aspect of the invention, the composite solubility parameter for the crosslinked, nonionic, amphiphilic polymers have a composite solubility parameter ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0044] In one embodiment, the crosslinked, nonionic, amphiphilic polymers useful in the practice of the invention are polymerized from a monomer composition comprising at least one nonionic, hydrophilic unsaturated monomer, at least one unsaturated hydrophobic monomer, and at least one polyunsaturated crosslinking monomer. In one aspect, the copolymer can be polymerized from a monomer composition comprising any weight ratio of nonionic, hydrophilic unsaturated monomer to unsaturated hydrophobic monomer, subject to the proviso that the composite solubility parameter of the resulting polymer is greater than about 19.3 MPa^{1/2} and less than or equal to about 21.0 MPa^{1/2}.

[0045] In one embodiment, the copolymers can be polymerized from a monomer composition typically having a hydrophilic monomer to hydrophobic monomer ratio of from about 5:95 wt.% to about 95:5 wt.%, from about 15:85 wt.% to about 85:15 wt.% in another aspect, and from about 30:70 wt.% to about 70:30 wt.% in a further aspect, based on the total weight of the hydrophilic and hydrophobic monomers present, so long as the composite solubility parameter of

the resulting polymer is greater than about 19.3 MPa^{1/2} and less than or equal to about 21.0 MPa^{1/2}. The hydrophilic monomer component can be selected from a single hydrophilic monomer or a mixture of hydrophilic monomers, and the hydrophobic monomer component can be selected from a single hydrophobic monomer or a mixture of hydrophobic monomers.


[0046] As one of ordinary skill in the art will recognize the ratio of hydrophilic to hydrophobic monomers can be adjusted so as to obtain copolymers having a composite solubility parameter within the range set forth above.

Hydrophilic Monomer

[0047] The hydrophilic monomers suitable for the preparation of the crosslinked, nonionic, amphiphilic polymer compositions of the invention can be any monomer whose homopolymer has a solubility parameter (δ_i) above about 21.0 MPa^{1/2}. Representative hydrophilic monomers include but are not limited to hydroxy(C₁-C₅)alkyl (meth)acrylates; open chain and cyclic N-vinylamides (N-vinyl lactams containing 4 to 9 atoms in the lactam ring moiety, wherein the ring carbon atoms optionally can be substituted by one or more lower alkyl groups such as methyl, ethyl or propyl); amino group (amine group) containing vinyl monomers selected from (meth)acrylamide, N-(C₁-C₅)alkyl(meth)acrylamides, N,N-di(C₁-C₅)alkyl(meth)acrylamides, N-(C₁-C₅)alkylamino(C₁-C₅)alkyl(meth)acrylamides and N,N-di(C₁-C₅)alkylamino(C₁-C₅)alkyl(meth)acrylamides, wherein the alkyl moieties on the disubstituted amino groups can be the same or different, and wherein the alkyl moieties on the monosubstituted and disubstituted amino groups can be optionally substituted with a hydroxyl group; other monomers include vinyl alcohol; vinyl imidazole; and (meth)acrylonitrile. Mixtures of the foregoing monomers also can be utilized.

[0048] The hydroxy(C₁-C₅)alkyl (meth)acrylates can be structurally represented by the following formula:

- 15 -


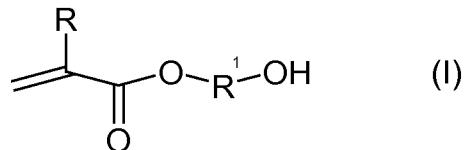


wherein R is hydrogen or methyl and R¹ is an divalent alkylene moiety containing 1 to 5 carbon atoms, wherein the alkylene moiety optionally can be substituted by one or more methyl groups. Representative monomers include 2-hydroxyethyl(meth)acrylate, 3-hydroxypropyl(meth)acrylate, 4-hydroxybutyl(meth)acrylate, and mixtures thereof.

[0049] Representative open chain N-vinylamides include N-vinylformamide, N-methyl-N-vinylformamide, N-(hydroxymethyl)-N-vinylformamide, N-vinylacetamide, N-vinylmethylacetamide, N-(hydroxymethyl)-N-vinylacetamide, and mixtures thereof.

[0050] Representative cyclic N-vinylamides (also known as N-vinyl lactams) include N-vinyl-2-pyrrolidinone, N-(1-methyl vinyl) pyrrolidinone, N-vinyl-2-piperidone, N-vinyl-2-caprolactam, N-vinyl-5-methyl pyrrolidinone, N-vinyl-3,3-dimethyl pyrrolidinone, N-vinyl-5-ethyl pyrrolidinone and N-vinyl-6-methyl piperidone, and mixtures thereof. Additionally, monomers containing a pendant N-vinyl lactam moiety can also be employed, e.g., N-vinyl-2-ethyl-2-pyrrolidone (meth)acrylate.

[0051] The amino group containing vinyl monomers include (meth)acrylamide, diacetone acrylamide and monomers that are structurally represented by the following formulas:

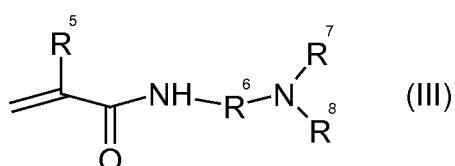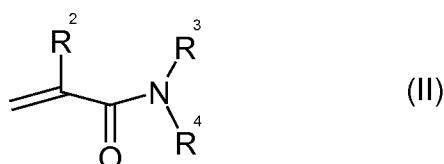

[0052] Formula (II) represents N-(C₁-C₅)alkyl(meth)acrylamide or N,N-di(C₁-C₅)alkyl(meth)acrylamide wherein R² is hydrogen or methyl, R³ independently is selected from hydrogen, C₁ to C₅ alkyl and C₁ to C₅ hydroxyalkyl, and R⁴ independently is selected from C₁ to C₅ alkyl or C₁ to C₅ hydroxyalkyl.

[0053] Formula (III) represents N-(C₁-C₅)alkylamino(C₁-C₅)alkyl(meth)acrylamide or N,N-di(C₁-C₅)alkylamino(C₁-C₅)alkyl(meth)acrylamide wherein R⁵ is hydrogen or methyl, R⁶ is C₁ to C₅ alkylene, R⁷ independently is selected from hydrogen or C₁ to C₅ alkyl, and R⁸ independently is selected from C₁ to C₅ alkyl.

[0054] Representative N-alkyl(meth)acrylamides include but are not limited to N-methyl(meth)acrylamide, N-ethyl(meth)acrylamide, N-propyl(meth)acrylamide, N-isopropyl(meth)acrylamide, N-tert-butyl(meth)acrylamide, N-(2-hydroxyethyl)(meth)acrylamide, N-(3-hydroxypropyl)(meth)acrylamide, and mixtures thereof.

[0055] Representative N,N-dialkyl(meth)acrylamides include but are not limited to N,N-dimethyl(meth)acrylamide, N,N-diethyl(meth)acrylamide, N,N-(di-2-hydroxyethyl)(meth)acrylamide, N,N-(di-3-hydroxypropyl)(meth)acrylamide, N-methyl,N-ethyl(meth)acrylamide, and mixtures thereof.

[0056] Representative N,N-dialkylaminoalkyl(meth)acrylamides include but are not limited to N,N-dimethylaminoethyl(meth)acrylamide, N,N-diethylaminoethyl(meth)acrylamide, N,N-dimethylaminopropyl(meth)acrylamide, and mixtures thereof.

Hydrophobic Monomer


[0057] Hydrophobic monomers suitable for the preparation of the crosslinked, nonionic, amphiphilic polymer compositions of the invention are set forth below, or if not mentioned any monomer whose homopolymer has a solubility parameter (δ_i) below about 19.3 MPa^{1/2}. In one aspect, suitable hydrophobic monomers are selected from but are not limited to one or more of esters of (meth)acrylic acid with alcohols containing 1 to 30 carbon atoms; vinyl

esters of aliphatic carboxylic acids containing 1 to 22 carbon atoms; vinyl ethers of alcohols containing 1 to 22 carbon atoms; vinyl aromatics containing 8 to 20 carbon atoms; vinyl halides; vinylidene halides; linear or branched alpha-monoolefins containing 2 to 8 carbon atoms; an associative monomer, having a hydrophobic end group containing 8 to 30 carbon atoms; and mixtures thereof.

Semi-Hydrophobic Monomer


[0058] Optionally, at least one semi-hydrophobic monomer can be used in the preparation of the amphiphilic polymers of the invention. A semi-hydrophobic monomer is similar in structure to an associative monomer, but has a substantially non-hydrophobic end group selected from hydroxyl or a moiety containing 1 to 4 carbon atoms.

[0059] In one aspect of the invention, the esters of (meth)acrylic acid with alcohols containing 1 to 30 carbon atoms can be represented by the following formula:

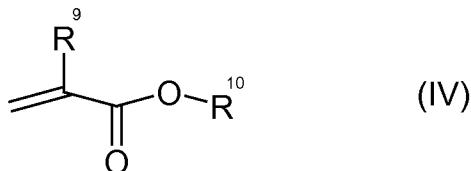

wherein R^9 is hydrogen or methyl and R^{10} is C_1 to C_{22} alkyl. Representative monomers under formula (IV) include but are not limited to methyl (meth)acrylate, ethyl (meth)acrylate, butyl (meth)acrylate, sec-butyl (meth)acrylate, iso-butyl (meth)acrylate, hexyl (meth)acrylate, heptyl (meth)acrylate, octyl (meth)acrylate, 2-ethylhexyl (meth)acrylate, decyl (meth)acrylate, isodecyl (meth)acrylate, lauryl (meth)acrylate, tetradecyl (meth)acrylate, hexadecyl (meth)acrylate, stearyl (meth)acrylate, behenyl (meth)acrylate, and mixtures thereof.

[0060] Vinyl esters of aliphatic carboxylic acids containing 1 to 22 carbon atoms can be represented by the following formula:



wherein R^{11} is a C_1 to C_{22} aliphatic group which can be an alkyl or alkenyl. Representative monomers under formula (V) include but are not limited to vinyl acetate, vinyl propionate, vinyl butyrate, vinyl isobutyrate, vinyl valerate, vinyl hexanoate, vinyl 2-methylhexanoate, vinyl 2-ethylhexanoate, vinyl iso-octanoate, vinyl nonanoate, vinyl neodecanoate, vinyl decanoate, vinyl versatate, vinyl laurate, vinyl palmitate, vinyl stearate, and mixtures thereof.

[0061] In one aspect, the vinyl ethers of alcohols containing 1 to 22 carbon atoms can be represented by the following formula:



wherein R^{13} is a C_1 to C_{22} alkyl. Representative monomers of formula (VI) include methyl vinyl ether, ethyl vinyl ether, butyl vinyl ether, isobutyl vinyl ether, 2-ethylhexyl vinyl ether, decyl vinyl ether, lauryl vinyl ether, stearyl vinyl ether, behenyl vinyl ether, and mixtures thereof.

[0062] Representative vinyl aromatic monomers include but are not limited to styrene, alpha-methylstyrene, 3-methyl styrene, 4-methyl styrene, 4-propyl styrene, 4-tert-butyl styrene, 4-n-butyl styrene, 4-n-decyl styrene, vinyl naphthalene, and mixtures thereof.

[0063] Representative vinyl and vinylidene halides include but are not limited to vinyl chloride and vinylidene chloride, and mixtures thereof.

[0064] Representative alpha-olefins include but are not limited to ethylene, propylene, 1-butene, iso-butylene, 1-hexene, and mixtures thereof.

[0065] The associative monomer of the invention has an ethylenically unsaturated end group portion (i) for addition polymerization with the other monomers of the invention; a polyoxyalkylene mid-section portion (ii) for imparting selective hydrophilic and/or hydrophobic properties to the product

polymer, and a hydrophobic end group portion (iii) for providing selective hydrophobic properties to the polymer.

[0066] The portion (i) supplying the ethylenically unsaturated end group can be a residue derived from an α,β -ethylenically unsaturated monocarboxylic acid. Alternatively, portion (i) of the associative monomer can be a residue derived from an allyl ether or vinyl ether; a nonionic vinyl-substituted urethane monomer, such as disclosed in U.S. Reissue Patent No. 33,156 or U.S. Patent No. 5,294,692; or a vinyl-substituted urea reaction product, such as disclosed in U.S. Patent No. 5,011,978; the relevant disclosures of each are incorporated herein by reference.

[0067] The mid-section portion (ii) is a polyoxyalkylene segment of about 2 to about 150 in one aspect, from about 10 to about 120 in another aspect, and from about 15 to about 60 in a further aspect of repeating C_2 – C_4 alkylene oxide units. The mid-section portion (ii) includes polyoxyethylene, polyoxypropylene, and polyoxybutylene segments, and combinations thereof comprising from about 2 to about 150 in one aspect, from about 5 to about 120 in another aspect, and from about 10 to about 60 in a further aspect of ethylene, propylene and/or butylene oxide units, arranged in random or block sequences of ethylene oxide, propylene oxide and/or butylene oxide units.

[0068] The hydrophobic end group portion (iii) of the associative monomer is a hydrocarbon moiety belonging to one of the following hydrocarbon classes: a C_8 – C_{30} linear alkyl, a C_8 – C_{30} branched alkyl, a C_2 – C_{30} alkyl-substituted phenyl, aryl-substituted C_2 – C_{30} alkyl groups, a C_8 – C_{30} carbocyclic alkyl.

[0069] Non-limiting examples of suitable hydrophobic end group portions (iii) of the associative monomers are linear or branched alkyl groups having about 8 to about 30 carbon atoms, such as capryl (C_8), iso-octyl (branched C_8), decyl (C_{10}), lauryl (C_{12}), myristyl (C_{14}), cetyl (C_{16}), cetearyl (C_{16} – C_{18}), stearyl (C_{18}), isostearyl (branched C_{18}), arachidyl (C_{20}), behenyl (C_{22}), lignoceryl (C_{24}), cerotyl (C_{26}), montanyl (C_{28}), melissyl (C_{30}), and the like.

[0070] Examples of linear and branched alkyl groups having about 8 to about 30 carbon atoms that are derived from a natural source include, without being limited thereto, alkyl groups derived from hydrogenated peanut oil,

soybean oil and canola oil (all predominately C₁₈), hydrogenated tallow oil (C₁₆-C₁₈), and the like; and hydrogenated C₁₀-C₃₀ terpenols, such as hydrogenated geraniol (branched C₁₀), hydrogenated farnesol (branched C₁₅), hydrogenated phytol (branched C₂₀), and the like.

[0071] Non-limiting examples of suitable C₂-C₃₀ alkyl-substituted phenyl groups include octylphenyl, nonylphenyl, decylphenyl, dodecylphenyl, hexadecylphenyl, octadecylphenyl, isooctylphenyl, sec-butylphenyl, and the like.



[0072] Exemplary aryl-substituted C₂-C₄₀ alkyl groups include, without limitation thereto, styryl (e.g., 2-phenylethyl), distyryl (e.g., 2,4-diphenylbutyl), tristyryl (e.g., 2,4,6-triphenylhexyl), 4-phenylbutyl, 2-methyl-2-phenylethyl, tristyrylphenolyl, and the like.

[0073] Suitable C₈-C₃₀ carbocyclic alkyl groups include, without being limited thereto, groups derived from sterols from animal sources, such as cholesterol, lanosterol, 7-dehydrocholesterol, and the like; from vegetable sources, such as phytosterol, stigmasterol, campesterol, and the like; and from yeast sources, such as ergosterol, mycosterol, and the like. Other carbocyclic alkyl hydrophobic end groups useful in the present invention include, without being limited thereto, cyclooctyl, cyclododecyl, adamantyl, decahydronaphthyl, and groups derived from natural carbocyclic materials, such as pinene, hydrogenated retinol, camphor, isobornyl alcohol, and the like.

[0074] Useful associative monomers can be prepared by any method known in the art. See, for example, U.S. Patents No. 4,421,902 to Chang *et al.*; No. 4,384,096 to Sonnabend; No. 4,514,552 to Shay *et al.*; No. 4,600,761 to Ruffner *et al.*; No. 4,616,074 to Ruffner; No. 5,294,692 to Barron *et al.*; No. 5,292,843 to Jenkins *et al.*; No. 5,770,760 to Robinson; and No. 5,412,142 to Wilkerson, III *et al.*; the pertinent disclosures of which are incorporated herein by reference.

[0075] In one aspect, exemplary associative monomers include those represented by formulas (VII) and (VIIA)


- 21 -

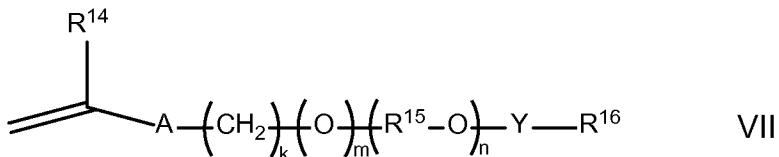

wherein R^{14} is hydrogen or methyl; A is $-\text{CH}_2\text{C}(\text{O})\text{O}-$, $-\text{C}(\text{O})\text{O}-$, $-\text{O}-$, $-\text{CH}_2\text{O}-$, $-\text{NHC}(\text{O})\text{NH}-$, $-\text{C}(\text{O})\text{NH}-$, $-\text{Ar}-(\text{CE}_2)_z-\text{NHC}(\text{O})\text{O}-$, $-\text{Ar}-(\text{CE}_2)_z-\text{NHC}(\text{O})\text{NH}-$, or $-\text{CH}_2\text{CH}_2\text{NHC}(\text{O})-$; Ar is a divalent arylene (e.g., phenylene); E is H or methyl; z is 0 or 1; k is an integer ranging from about 0 to about 30, and m is 0 or 1, with the proviso that when k is 0, m is 0, and when k is in the range of 1 to about 30, m is 1; D represents a vinyl or an allyl moiety; $(\text{R}^{15}-\text{O})_n$ is a polyoxyalkylene moiety, which can be a homopolymer, a random copolymer, or a block copolymer of $\text{C}_2\text{-C}_4$ oxyalkylene units, R^{15} is a divalent alkylene moiety selected from C_2H_4 , C_3H_6 , or C_4H_8 , and combinations thereof; and n is an integer in the range of about 2 to about 150 in one aspect, from about 10 to about 120 in another aspect, and from about 15 to about 60 in a further aspect; Y is $-\text{R}^{15}\text{O}-$, $-\text{R}^{15}\text{NH}-$, $-\text{C}(\text{O})-$, $-\text{C}(\text{O})\text{NH}-$, $-\text{R}^{15}\text{NHC}(\text{O})\text{NH}-$, or $-\text{C}(\text{O})\text{NHC}(\text{O})-$; R^{16} is a substituted or unsubstituted alkyl selected from a $\text{C}_8\text{-C}_{30}$ linear alkyl, a $\text{C}_8\text{-C}_{30}$ branched alkyl, a $\text{C}_8\text{-C}_{30}$ carbocyclic alkyl, a $\text{C}_2\text{-C}_{30}$ alkyl-substituted phenyl, an aralkyl substituted phenyl, and an aryl-substituted $\text{C}_2\text{-C}_{30}$ alkyl; wherein the R^{16} alkyl group, aryl group, phenyl group optionally comprises one or more substituents selected from the group consisting of a hydroxyl group, an alkoxy group, benzyl group phenylethyl group, and a halogen group.

[0076] In one aspect, the hydrophobically modified associative monomer is an alkoxylated (meth)acrylate having a hydrophobic group containing 8 to 30 carbon atoms represented by the following formula:

- 22 -

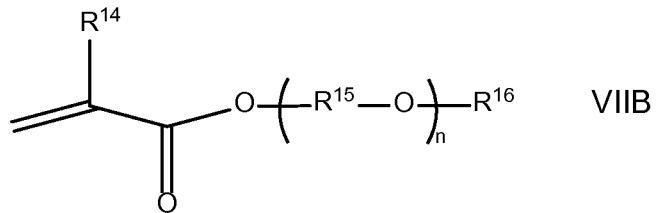

wherein R¹⁴ is hydrogen or methyl; R¹⁵ is a divalent alkylene moiety independently selected from C₂H₄, C₃H₆, and C₄H₈, and n represents an integer ranging from about 2 to about 150 in one aspect, from about 5 to about 120 in another aspect, and from about 10 to about 60 in a further aspect, (R¹⁵-O) can be arranged in a random or a block configuration; R¹⁶ is a substituted or unsubstituted alkyl selected from a C₈-C₃₀ linear alkyl, a C₈-C₃₀ branched alkyl, a C₈-C₃₀ carbocyclic alkyl, a C₂-C₃₀ alkyl-substituted phenyl, and an aryl-substituted C₂-C₃₀ alkyl.

[0077] Representative monomers under formula (VII) include lauryl polyethoxylated methacrylate (LEM), cetyl polyethoxylated methacrylate (CEM), cetearyl polyethoxylated methacrylate (CSEM), stearyl polyethoxylated (meth)acrylate, arachidyl polyethoxylated (meth)acrylate, behenyl polyethoxylated methacrylate (BEM), cerotyl polyethoxylated (meth)acrylate, montanyl polyethoxylated (meth)acrylate, melissyl polyethoxylated (meth)acrylate, phenyl polyethoxylated (meth)acrylate, nonylphenyl polyethoxylated (meth)acrylate, ω -tristyrylphenyl polyoxyethylene methacrylate, where the polyethoxylated portion of the monomer contains about 2 to about 150 ethylene oxide units in one aspect, from about 5 to about 120 in another aspect, and from about 10 to about 60 in a further aspect; octyloxy polyethyleneglycol (8) polypropyleneglycol (6) (meth)acrylate, phenoxy polyethylene glycol (6) polypropylene glycol (6) (meth)acrylate, and nonylphenoxy polyethylene glycol polypropylene glycol (meth)acrylate.



[0078] The semi-hydrophobic monomers of the invention are structurally similar to the associative monomer described above, but have a substantially non-hydrophobic end group portion. The semi-hydrophobic monomer has an ethylenically unsaturated end group portion (i) for addition polymerization with

the other monomers of the invention; a polyoxyalkylene mid-section portion (ii) for imparting selective hydrophilic and/or hydrophobic properties to the product polymer and a semi- hydrophobic end group portion (iii). The unsaturated end group portion (i) supplying the vinyl or other ethylenically unsaturated end group for addition polymerization is preferably derived from an α,β -ethylenically unsaturated mono carboxylic acid. Alternatively, the end group portion (i) can be derived from an allyl ether residue, a vinyl ether residue or a residue of a nonionic urethane monomer.

[0079] The polyoxyalkylene mid-section (ii) specifically comprises a polyoxyalkylene segment, which is substantially similar to the polyoxyalkylene portion of the associative monomers described above. In one aspect, the polyoxyalkylene portions (ii) include polyoxyethylene, polyoxypropylene, and/or polyoxybutylene units comprising from about 2 to about 150 in one aspect, from about 5 to about 120 in another aspect, and from about 10 to about 60 in a further aspect of ethylene oxide, propylene oxide, and/or butylene oxide units, arranged in random or blocky sequences.



[0080] The semi-hydrophobic end group portion (iii) is substantially non-hydrophobic and is selected from hydroxyl and a linear or branched C₁ to C₄ alkyl.

[0081] In one aspect, the semi-hydrophobic monomer can be represented by the following formulas:

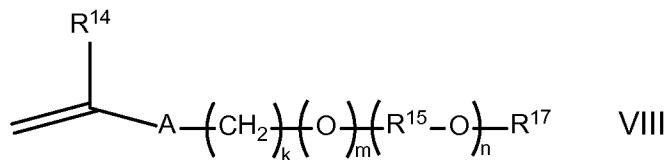

wherein R^{14} is hydrogen or methyl; A is $-CH_2C(O)O-$, $-C(O)O-$, $-O-$, $-CH_2O-$, $-NHC(O)NH-$, $-C(O)NH-$, $-Ar-(CE_2)_z-NHC(O)O-$, $-Ar-(CE_2)_z-NHC(O)NH-$, or $-CH_2CH_2NHC(O)-$; Ar is a divalent arylene (e.g., phenylene); E is H or methyl; z is 0 or 1; k is an integer ranging from about 0 to about 30, and m is 0 or 1, with the proviso that when k is 0, m is 0, and when k is in the range of 1 to about 30, m is 1; $(R^{15}-O)_n$ is a polyoxyalkylene moiety, which can be a homopolymer, a random copolymer, or a block copolymer of C_2-C_4 oxyalkylene units, R^{15} is a divalent alkylene moiety selected from C_2H_4 , C_3H_6 , or C_4H_8 , and combinations thereof; and n is an integer in the range of about 2 to about 150 in one aspect, from about 5 to about 120 in another aspect, and from about 10 to about 60 in a further aspect; R^{17} is selected from hydrogen and a linear or branched C_1-C_4 alkyl group (e.g., methyl, ethyl, propyl, iso-propyl, butyl, iso-butyl, and tert-butyl); and D represents a vinyl or an allyl moiety.

[0082] In one aspect, the semi-hydrophobic monomer under formula VIII can be represented by the following formulas:




wherein R^{14} is hydrogen or methyl, and "a" is an integer ranging from 0 or 2 to about 120 in one aspect, from about 5 to about 45 in another aspect, and from about 10 to about .25 in a further aspect, and "b" is an integer ranging from about 0 or 2 to about 120 in one aspect, from about 5 to about 45 in another aspect, and from about 10 to about .25 in a further aspect, subject to the proviso that "a" and "b" cannot be 0 at the same time.

[0083] Examples of semi-hydrophobic monomers under formula VIIIA include polyethyleneglycol methacrylate available under the product names Blemmer[®] PE-90 (R^{14} = methyl, a = 2, b = 0), PE-200 (R^{14} = methyl, a = 4.5, b = 0), and PE-350 (R^{14} = methyl a = 8, b = 0,); polypropylene glycol methacrylate available under the product names Blemmer[®] PP-1000 (R^{14} = methyl, b = 4-6, a = 0), PP-500 (R^{14} = methyl, a = 0, b = 9), PP-800 (R^{14} = methyl, a = 0, b = 13);

polyethyleneglycol polypropylene glycol methacrylate available under the product names Blemmer® 50PEP-300 (R^{14} = methyl, a = 3.5, b = 2.5), 70PEP-350B (R^{14} = methyl, a = 5, b = 2); polyethyleneglycol acrylate available under the product names Blemmer® AE-90 (R^{14} = hydrogen, a = 2, b = 0), AE-200 (R^{14} = hydrogen, a = 2, b = 4.5), AE-400 (R^{14} = hydrogen, a = 10, b = 0); polypropyleneglycol acrylate available under the product names Blemmer® AP-150 (R^{14} = hydrogen, a = 0, b = 3), AP-400 (R^{14} = hydrogen, a = 0, b = 6), AP-550 (R^{14} = hydrogen, a = 0, b = 9). Blemmer® is a trademark of NOF Corporation, Tokyo, Japan.

[0084] Examples of semi-hydrophobic monomers under formula VIIIB include methoxypolyethyleneglycol methacrylate available under the product names Visiomer® MPEG 750 MA W (R^{14} = methyl, a = 17, b = 0), MPEG 1005 MA W (R^{14} = methyl, a = 22, b = 0), MPEG 2005 MA W (R^{14} = methyl, a = 45, b = 0), and MPEG 5005 MA W (R^{14} = methyl, a = 113, b = 0) from Evonik Röhm GmbH, Darmstadt, Germany); Bisomer® MPEG 350 MA (R^{14} = methyl, a = 8, b = 0), and MPEG 550 MA (R^{14} = methyl, a = 12, b = 0) from GEO Specialty Chemicals, Ambler PA; Blemmer® PME-100 (R^{14} = methyl, a = 2, b = 0), PME-200 (R^{14} = methyl, a = 4, b = 0), PME400 (R^{14} = methyl, a = 9, b = 0), PME-1000 (R^{14} = methyl, a = 23, b = 0), PME-4000 (R^{14} = methyl, a = 90, b = 0).

[0085] In one aspect, the semi-hydrophobic monomer set forth in formula IX can be represented by the following formulas:



wherein d is an integer of 2, 3, or 4; e is an integer in the range of from about 1 to about 10 in one aspect, from about 2 to about 8 in another aspect, and from about 3 to about 7 in a further aspect; f is an integer in the range of from about 5 to about 50 in one aspect, from about 8 to about 40 in another aspect, and from about 10 to about 30 in a further aspect; g is an integer in the range of from 1 to about 10 in one aspect, from about 2 to about 8 in another aspect, and from about 3 to about 7 in a further aspect; and h is an integer in the range of from

about 5 to about 50 in one aspect, and from about 8 to about 40 in another aspect; e, f, g, and h can be 0 subject to the proviso that e and f cannot be 0 at the same time, and g and h cannot be 0 at the same time.

[0086] Monomers under formulas IXA and IXB are commercially available under the trade names Emulsogen® R109, R208, R307, RAL109, RAL208, and RAL307 sold by Clariant Corporation; BX-AA-E5P5 sold by Bimax, Inc.; and combinations thereof. EMULSOGEN⁷ R109 is a randomly ethoxylated/propoxylated 1,4-butanediol vinyl ether having the empirical formula $\text{CH}_2=\text{CH}-\text{O}(\text{CH}_2)_4\text{O}(\text{C}_3\text{H}_6\text{O})_4(\text{C}_2\text{H}_4\text{O})_{10}\text{H}$; Emulsogen® R208 is a randomly ethoxylated/propoxylated 1,4-butanediol vinyl ether having the empirical formula $\text{CH}_2=\text{CH}-\text{O}(\text{CH}_2)_4\text{O}(\text{C}_3\text{H}_6\text{O})_4(\text{C}_2\text{H}_4\text{O})_{20}\text{H}$; Emulsogen® R307 is a randomly ethoxylated/propoxylated 1,4-butanediol vinyl ether having the empirical formula $\text{CH}_2=\text{CH}-\text{O}(\text{CH}_2)_4\text{O}(\text{C}_3\text{H}_6\text{O})_4(\text{C}_2\text{H}_4\text{O})_{30}\text{H}$; Emulsogen® RAL109 is a randomly ethoxylated/propoxylated allyl ether having the empirical formula $\text{CH}_2=\text{CHCH}_2\text{O}(\text{C}_3\text{H}_6\text{O})_4(\text{C}_2\text{H}_4\text{O})_{10}\text{H}$; Emulsogen® RAL208 is a randomly ethoxylated/propoxylated allyl ether having the empirical formula $\text{CH}_2=\text{CHCH}_2\text{O}(\text{C}_3\text{H}_6\text{O})_4(\text{C}_2\text{H}_4\text{O})_{20}\text{H}$; Emulsogen® RAL307 is a randomly ethoxylated/propoxylated allyl ether having the empirical formula $\text{CH}_2=\text{CHCH}_2\text{O}(\text{C}_3\text{H}_6\text{O})_4(\text{C}_2\text{H}_4\text{O})_{30}\text{H}$; and BX-AA-E5P5 is a randomly ethoxylated/propoxylated allyl ether having the empirical formula $\text{CH}_2=\text{CHCH}_2\text{O}(\text{C}_3\text{H}_6\text{O})_5(\text{C}_2\text{H}_4\text{O})_5\text{H}$.

[0087] In the associative and semi-hydrophobic monomers of the invention, the polyoxyalkylene mid-section portion contained in these monomers can be utilized to tailor the hydrophilicity and/or hydrophobicity of the polymers in which they are included. For example, mid-section portions rich in ethylene oxide moieties are more hydrophilic while mid-section portions rich in propylene oxide moieties are more hydrophobic. By adjusting the relative amounts of ethylene oxide to propylene oxide moieties present in these monomers, the hydrophilic and hydrophobic properties of the polymers in which these monomers are included can be tailored as desired.

[0088] The amount of associative and/or semi-hydrophobic monomer utilized in the preparation of the polymers of the present invention can vary

widely and depends, among other things, on the final rheological and aesthetic properties desired in the polymer. When utilized, the monomer reaction mixture contains one or more monomers selected from the associative and/or semi-hydrophobic monomers disclosed above in amounts ranging from about 0.01 to about 15 wt.% in one aspect, from about 0.1 wt.% to about 10 wt.% in another aspect, from about 0.5 to about 8 wt.% in still another aspect and from about 1, 2 or 3 to about 5 wt.% in a further aspect, based on the weight of the total monomers.

Ionizable Monomer

[0089] In one aspect of the invention, the crosslinked, nonionic, amphiphilic polymer compositions of the invention can be polymerized from a monomer composition comprising 0 to 5 wt.% of an ionizable and/or ionized monomer, based on the weight of the total monomers, so long as the yield stress value of the yield stress fluids in which the polymers of the invention are included are not deleteriously affected (i.e., the yield stress value of the fluid does not fall below 0.1 Pa).

[0090] In another aspect, the amphiphilic polymer compositions of the invention can be polymerized from a monomer composition comprising less than 3 wt.% in one aspect, less than 1 wt.% in a further aspect, less than 0.5 wt.% in a still further aspect, less than 0.1 wt.% in an additional aspect, and less than 0.05 wt.% in a further aspect, of an ionizable and/or an ionized moiety, based on the weight of the total monomers.

[0091] Ionizable monomers include monomers having a base neutralizable moiety and monomers having an acid neutralizable moiety. Base neutralizable monomers include olefinically unsaturated monocarboxylic and dicarboxylic acids and their salts containing 3 to 5 carbon atoms and anhydrides thereof. Examples include (meth)acrylic acid, itaconic acid, maleic acid, maleic anhydride, and combinations thereof. Other acidic monomers include styrenesulfonic acid, 2-acrylamido-2-methylpropanesulfonic acid (AMPS[®]) monomer, Available from Lubrizol Advanced Materials, Inc.), vinylsulfonic acid, vinylphosphonic acid, allylsulfonic acid, methallylsulfonic acid; and salts thereof.

[0092] Acid neutralizable monomers include olefinically unsaturated monomers which contain a basic nitrogen atom capable of forming a salt or a quaternized moiety upon the addition of an acid. For example, these monomers include vinylpyridine, vinylpiperidine, vinylimidazole, vinylmethylimidazole, dimethylaminomethyl (meth)acrylate, dimethylaminoethyl (meth)acrylate, diethylaminomethyl (meth)acrylate, dimethylaminoneopentyl (meth)acrylate, dimethylaminopropyl (meth)acrylate, and diethylaminoethyl (meth)acrylate.

Crosslinking Monomer

[0093] In one embodiment, the crosslinked, nonionic, amphiphilic polymers useful in the practice of the invention are polymerized from a monomer composition comprising a first monomer comprising at least one nonionic, hydrophilic unsaturated monomer, at least one nonionic, unsaturated hydrophobic monomer, and mixtures thereof, and a third monomer comprising at least one polyunsaturated crosslinking monomer. The component monomers in the polymerizable monomer composition can be present in any weight ratio subject to the proviso that the resulting polymer product has a composite solubility parameter ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0094] A crosslinking monomer(s) is utilized to polymerize covalent crosslinks into the polymer backbone. In one aspect, the crosslinking monomer is a polyunsaturated compound containing at least 2 unsaturated moieties. In another aspect, the crosslinking monomer contains at least 3 unsaturated moieties. Exemplary polyunsaturated compounds include di(meth)acrylate compounds such as ethylene glycol di(meth)acrylate, polyethylene glycol di(meth)acrylate, triethylene glycol di(meth)acrylate, 1,3-butylene glycol di(meth)acrylate, 1,6-butylene glycol di(meth)acrylate, 1,6-hexanediol di(meth)acrylate, neopentyl glycol di(meth)acrylate, 1,9-nanediol di(meth)acrylate, 2,2'-bis(4-(acryloxy-propyloxyphenyl))propane, and 2,2'-bis(4-(acryloxydiethoxy-phenyl))propane; tri(meth)acrylate compounds such as, trimethylolpropane tri(meth)acrylate, trimethylolethane tri(meth)acrylate, and tetramethylolmethane tri(meth)acrylate; tetra(meth)acrylate compounds such as ditrimethylolpropane tetra(meth)acrylate, tetramethylolmethane

tetra(meth)acrylate, and pentaerythritol tetra(meth)acrylate; hexa(meth)acrylate compounds such as dipentaerythritol hexa(meth)acrylate; allyl compounds such as allyl (meth)acrylate, diallylphthalate, diallyl itaconate, diallyl fumarate, and diallyl maleate; polyallyl ethers of sucrose having from 2 to 8 allyl groups per molecule, polyallyl ethers of pentaerythritol such as pentaerythritol diallyl ether, pentaerythritol triallyl ether, and pentaerythritol tetraallyl ether, and combinations thereof; polyallyl ethers of trimethylolpropane such as trimethylolpropane diallyl ether, trimethylolpropane triallyl ether, and combinations thereof. Other suitable polyunsaturated compounds include divinyl glycol, divinyl benzene, and methylenebisacrylamide.

[0095] In another aspect, suitable polyunsaturated monomers can be synthesized via an esterification reaction of a polyol made from ethylene oxide or propylene oxide or combinations thereof with unsaturated anhydride such as maleic anhydride, citraconic anhydride, itaconic anhydride, or an addition reaction with unsaturated isocyanate such as 3-isopropenyl- α - α -dimethylbenzene isocyanate.

[0096] Mixtures of two or more of the foregoing polyunsaturated compounds can also be utilized to crosslink the nonionic, amphiphilic polymers of the invention. In one aspect, the mixture of unsaturated crosslinking monomer contains an average of 2 unsaturated moieties. In another aspect, the mixture of crosslinking monomers contains an average of 2.5 unsaturated moieties. In still another aspect, the mixture of crosslinking monomers contains an average of about 3 unsaturated moieties. In a further aspect, the mixture of crosslinking monomers contains an average of about 3.5 unsaturated moieties.

[0097] In one embodiment of the invention, the crosslinking monomer component can be used in an amount ranging from about 0.01 to about 1 wt.% in one aspect, from about 0.05 to about 0.75 wt.% in another aspect, and from about 0.1 to about 0.5 wt.% in a further aspect, based on the dry weight of the nonionic, amphiphilic polymer of the invention.

[0098] In another embodiment of the invention, the crosslinking monomer component contains an average of about 3 unsaturated moieties and can be used in an amount ranging from about 0.01 to about 0.3 wt.% in one aspect,

from about 0.02 to about 0.25 wt.% in another aspect, from about 0.05 to about 0.2 wt.% in a further aspect, and from about 0.075 to about 0.175 wt.% in a still further aspect, and from about 0.1 to about 0.15 wt.% in another aspect, based upon the total weight of the, nonionic, amphiphilic polymer of the invention.

[0099] In one aspect, the crosslinking monomer is selected from trimethylolpropane tri(meth)acrylate, trimethylolethane tri(meth)acrylate, tetramethylolmethane tri(meth)acrylate, pentaerythritol triallylether and polyallyl ethers of sucrose having 3 allyl groups per molecule.

Amphiphilic Polymer Synthesis

[0100] The crosslinked, nonionic, amphiphilic polymer of the present invention can be made using conventional free-radical polymerization techniques including emulsion, dispersion or solution processes. The polymerization processes are carried out in the absence of oxygen under an inert atmosphere such as nitrogen. In one aspect, emulsion and dispersion polymerization techniques are employed to obtain the polymers of the invention. The polymerization can be carried out in any suitable solvent system such as water, hydrocarbon solvent, organic solvents, as well as in mixtures thereof. The polymerization reactions are initiated by any means which results in the generation of a suitable free-radical. Thermally derived radicals, in which the radical species is generated from thermal, homolytic dissociation of peroxides, hydroperoxides, persulfates, percarbonates, peroxyesters, hydrogen peroxide and azo compounds can be utilized. The initiators can be water soluble or water insoluble depending on the solvent system employed for the polymerization reaction. The initiator compounds can be utilized in an amount of up to 30 wt.% in one aspect, 0.01 to 10 wt.% in another aspect, and 0.2 to 3 wt.% in a further aspect, based on the dry polymer weight.

[0101] Exemplary free radical water soluble initiators include, but are not limited to, inorganic persulfate compounds, such as ammonium persulfate, potassium persulfate, and sodium persulfate; peroxides such as hydrogen peroxide, benzoyl peroxide, acetyl peroxide, and lauryl peroxide; organic hydroperoxides, such as cumene hydroperoxide and t-butyl hydroperoxide;

organic peracids, such as peracetic acid, and water soluble azo compounds, such as 2,2'-azobis(tert-alkyl) compounds having a water solubilizing substituent on the alkyl group. Exemplary free radical oil soluble compounds include, but are not limited to 2,2'-azobisisobutyronitrile, and the like. The peroxides and peracids can optionally be activated with reducing agents, such as sodium bisulfite, sodium formaldehyde, or ascorbic acid, transition metals, hydrazine, and the like.

[0102] In one aspect, azo polymerization catalysts include the Vazo® free-radical polymerization initiators, available from DuPont, such as Vazo® 44 (2,2'-azobis(2-(4,5-dihydroimidazolyl)propane), Vazo® 56 (2,2'-azobis(2-methylpropionamidine) dihydrochloride), Vazo® 67 (2,2'-azobis(2-methylbutyronitrile)), and Vazo® 68 (4,4'-azobis(4-cyanovaleic acid)).

[0103] Optionally, the use of known redox initiator systems as polymerization initiators can be employed. Such redox initiator systems include an oxidant (initiator) and a reductant. Suitable oxidants include, for example, hydrogen peroxide, sodium peroxide, potassium peroxide, t-butyl hydroperoxide, t-amyl hydroperoxide, cumene hydroperoxide, sodium perborate, perphosphoric acid and salts thereof, potassium permanganate, and ammonium or alkali metal salts of peroxydisulfuric acid, typically at a level of 0.01% to 3.0% by weight, based on dry polymer weight, are used. Suitable reductants include, for example, alkali metal and ammonium salts of sulfur-containing acids, such as sodium sulfite, bisulfite, thiosulfate, hydrosulfite, sulfide, hydrosulfide or dithionite, formadinesulfinic acid, hydroxymethanesulfonic acid, acetone bisulfite, amines such as ethanolamine, glycolic acid, glyoxylic acid hydrate, ascorbic acid, isoascorbic acid, lactic acid, glyceric acid, malic acid, 2-hydroxy-2-sulfinatoacetic acid, tartaric acid and salts of the preceding acids typically at a level of 0.01% to 3.0% by weight, based on dry polymer weight, is used. In one aspect, combinations of peroxydisulfates with alkali metal or ammonium bisulfites can be used, for example ammonium peroxydisulfate and ammonium bisulfite. In another aspect, combinations of hydrogen peroxide containing compounds (t-butyl hydroperoxide) as the oxidant with ascorbic or erythorbic

acid as the reductant can be utilized. The ratio of peroxide-containing compound to reductant is within the range from 30:1 to 0.05:1.

[0104] Examples of suitable hydrocarbon solvents or diluents that can be utilized in the polymerization medium are aromatic solvents such as toluene, o-xylene, p-xylene, cumene, chlorobenzene, and ethylbenzene, aliphatic hydrocarbons, such as pentane, hexane, heptane, octane, nonane, decane, and the like, halogenated hydrocarbons, such as methylene chloride, alicyclic hydrocarbons, such as cyclopentane, methyl cyclopentane, cyclohexane, cycloheptane, cyclooctane, cyclononane, cyclodecane, and the like, and mixtures thereof. Suitable organic solvents include acetone, cyclohexanone, tetrahydrofuran, dioxane, glycols and glycol derivatives, polyalkylene glycols and derivatives thereof, diethyl ether, tert-butyl methyl ether, methyl acetate, methyl acetate, ethyl acetate, propyl acetate, isopropyl acetate, butyl acetate, butyl propionate, ethanol, isopropanol, water, and mixtures thereof. Mixtures of hydrocarbon solvents and organic solvents are also useful.

[0105] In emulsion and dispersion polymerization processes, it can be advantageous to stabilize the monomer/polymer droplets or particles by means of surface active auxiliaries. Typically, these are emulsifiers or protective colloids. Emulsifiers used can be anionic, nonionic, cationic or amphoteric. Examples of anionic emulsifiers are alkylbenzenesulfonic acids, sulfonated fatty acids, sulfosuccinates, fatty alcohol sulfates, alkylphenol sulfates and fatty alcohol ether sulfates. Examples of usable nonionic emulsifiers are alkylphenol ethoxylates, primary alcohol ethoxylates, fatty acid ethoxylates, alkanolamide ethoxylates, fatty amine ethoxylates, EO/PO block copolymers and alkylpolyglucosides. Examples of cationic and amphoteric emulsifiers used are quaternized amine alkoxylates, alkylbetaines, alkylamidobetaines and sulfobetaines.

[0106] Examples of typical protective colloids are cellulose derivatives, polyethylene glycol, polypropylene glycol, copolymers of ethylene glycol and propylene glycol, polyvinyl acetate, poly(vinyl alcohol), partially hydrolyzed poly(vinyl alcohol), polyvinyl ether, starch and starch derivatives, dextran, polyvinylpyrrolidone, polyvinylpyridine, polyethyleneimine, polyvinylimidazole,

polyvinylsuccinimide, polyvinyl-2-methylsuccinimide, polyvinyl-1,3-oxazolid-2-one, polyvinyl-2-methylimidazoline and maleic acid or anhydride copolymers. The emulsifiers or protective colloids are customarily used in concentrations from 0.05 to 20 wt.%, based on the weight of the total monomers.

[0107] The polymerization reaction can be carried out at temperatures ranging from 20 to 200°C in one aspect, from 50 to 150°C in another aspect, and from 60 to 100°C in a further aspect.

[0108] The polymerization can be carried out the presence of chain transfer agents. Suitable chain transfer agents include, but are not limited to, thio- and disulfide containing compounds, such as C₁-C₁₈ alkyl mercaptans, such as tert-butyl mercaptan, n-octyl mercaptan, n-dodecyl mercaptan, tert-dodecyl mercaptan hexadecyl mercaptan, octadecyl mercaptan; mercaptoalcohols, such as 2-mercaptopropanol, 2-mercaptopropanol; mercaptocarboxylic acids, such as mercaptoacetic acid and 3-mercaptopropionic acid; mercaptocarboxylic acid esters, such as butyl thioglycolate, isoctyl thioglycolate, dodecyl thioglycolate, isoctyl 3-mercaptopropionate, and butyl 3-mercaptopropionate; thioesters; C₁-C₁₈ alkyl disulfides; aryl disulfides; polyfunctional thiols such as trimethylolpropane-tris-(3-mercaptopropionate), pentaerythritol-tetra-(3-mercaptopropionate), pentaerythritol-tetra-(thioglycolate), pentaerythritol-tetra-(thiolactate), dipentaerythritol-hexa-(thioglycolate), and the like; phosphites and hypophosphites; C₁-C₄ aldehydes, such as formaldehyde, acetaldehyde, propionaldehyde; haloalkyl compounds, such as carbon tetrachloride, bromotrichloromethane, and the like; hydroxylammonium salts such as hydroxylammonium sulfate; formic acid; sodium bisulfite; isopropanol; catalytic chain transfer agents such as, for example, cobalt complexes (e.g., cobalt (II) chelates).

[0109] The chain transfer agents are generally used in amounts ranging from 0.1 to 10 wt.%, based on the total weight of the monomers present in the polymerization medium.

Emulsion Process

[0110] In one exemplary aspect of the invention, the crosslinked, nonionic, amphiphilic polymer is polymerized via an emulsion process. The emulsion process can be conducted in a single reactor or in multiple reactors as is well-known in the art. The monomers can be added as a batch mixture or each monomer can be metered into the reactor in a staged process. A typical mixture in emulsion polymerization comprises water, monomer(s), an initiator (usually water-soluble) and an emulsifier. The monomers may be emulsion polymerized in a single-stage or two-stage polymerization process according to well-known methods in the emulsion polymerization art. In a two-stage polymerization process, the first stage monomers are added and polymerized first in the aqueous medium, followed by addition and polymerization of the second stage monomers. The aqueous medium optionally can contain an organic solvent. If utilized the organic solvent is less than about 5 wt.% of the aqueous medium. Suitable examples of water-miscible organic solvents include, without limitation, esters (e.g., alkyl acetates, alkyl propionates) alkylene glycol ethers, alkylene glycol ether esters, lower molecular weight aliphatic alcohols, and the like.

[0111] To facilitate emulsification of the monomer mixture, the emulsion polymerization is carried out in the presence of at least one surfactant. In one embodiment, the emulsion polymerization is carried out in the presence of surfactant (active weight basis) ranging in the amount of about 0.2% to about 5% by weight in one aspect, from about 0.5% to about 3% in another aspect, and from about 1% to about 2% by weight in a further aspect, based on a total monomer weight basis. The emulsion polymerization reaction mixture also includes one or more free radical initiators which are present in an amount ranging from about 0.01% to about 3% by weight based on total monomer weight. The polymerization can be performed in an aqueous or aqueous alcohol medium. Surfactants for facilitating the emulsion polymerization include anionic, nonionic, amphoteric, and cationic surfactants, as well as mixtures thereof. Most commonly, anionic and nonionic surfactants can be utilized as well as mixtures thereof.

[0112] Suitable anionic surfactants for facilitating emulsion polymerizations are well known in the art and include, but are not limited to (C₆-C₁₈) alkyl sulfates, (C₆-C₁₈) alkyl ether sulfates (e.g., sodium lauryl sulfate and sodium laureth sulfate), amino and alkali metal salts of dodecylbenzenesulfonic acid, such as sodium dodecyl benzene sulfonate and dimethylethanolamine dodecylbenzenesulfonate, sodium (C₆-C₁₆) alkyl phenoxy benzene sulfonate, disodium (C₆-C₁₆) alkyl phenoxy benzene sulfonate, disodium (C₆-C₁₆) di-alkyl phenoxy benzene sulfonate, disodium laureth-3 sulfosuccinate, sodium dioctyl sulfosuccinate, sodium di-sec-butyl naphthalene sulfonate, disodium dodecyl diphenyl ether sulfonate, disodium n-octadecyl sulfosuccinate, phosphate esters of branched alcohol ethoxylates, and the like.

[0113] Nonionic surfactants suitable for facilitating emulsion polymerizations are well known in the polymer art, and include, without limitation, linear or branched C₈-C₃₀ fatty alcohol ethoxylates, such as capryl alcohol ethoxylate, lauryl alcohol ethoxylate, myristyl alcohol ethoxylate, cetyl alcohol ethoxylate, stearyl alcohol ethoxylate, cetearyl alcohol ethoxylate, sterol ethoxylate, oleyl alcohol ethoxylate, and, behenyl alcohol ethoxylate; alkylphenol alkoxylates, such as octylphenol ethoxylates; and polyoxyethylene polyoxypropylene block copolymers, and the like. Additional fatty alcohol ethoxylates suitable as non-ionic surfactants are described below. Other useful nonionic surfactants include C₈-C₂₂ fatty acid esters of polyoxyethylene glycol, ethoxylated mono- and diglycerides, sorbitan esters and ethoxylated sorbitan esters, C₈-C₂₂ fatty acid glycol esters, block copolymers of ethylene oxide and propylene oxide, and combinations thereof. The number of ethylene oxide units in each of the foregoing ethoxylates can range from 2 and above in one aspect, and from 2 to about 150 in another aspect.

[0114] Optionally, other emulsion polymerization additives and processing aids which are well known in the emulsion polymerization art, such as auxiliary emulsifiers, protective colloids, solvents, buffering agents, chelating agents, inorganic electrolytes, polymeric stabilizers, biocides, and pH adjusting agents can be included in the polymerization system.

[0115] In one embodiment of the invention, the protective colloid or auxiliary emulsifier is selected from poly(vinyl alcohol) that has a degree of hydrolysis ranging from about 80 to 95 % in one aspect, and from about 85 to 90 % in another aspect.

[0116] In a typical two stage emulsion polymerization, a mixture of the monomers is added to a first reactor under inert atmosphere to a solution of emulsifying surfactant (e.g., anionic surfactant) in water. Optional processing aids can be added as desired (e.g., protective colloids, auxiliary emulsifier(s)). The contents of the reactor are agitated to prepare a monomer emulsion. To a second reactor equipped with an agitator, an inert gas inlet, and feed pumps are added under inert atmosphere a desired amount of water and additional anionic surfactant and optional processing aids. The contents of the second reactor are heated with mixing agitation. After the contents of the second reactor reaches a temperature in the range of about 55 to 98°C, a free radical initiator is injected into the so formed aqueous surfactant solution in the second reactor, and the monomer emulsion from the first reactor is gradually metered into the second reactor over a period typically ranging from about one half to about four hours. The reaction temperature is controlled in the range of about 45 to about 95°C. After completion of the monomer addition, an additional quantity of free radical initiator can optionally be added to the second reactor, and the resulting reaction mixture is typically held at a temperature of about 45 to 95°C for a time period sufficient to complete the polymerization reaction to obtain the polymer emulsion.

Dispersion Process

[0117] In another aspect of the invention, the crosslinked, nonionic, amphiphilic polymer is obtained by free-radical mediated dispersion polymerization in a non-aqueous medium that is non-solvent for the polymer formed. Non-aqueous dispersion polymerization is discussed in detail in the book *Dispersion Polymerization in Organic Media*, edited by K. E. G. Barrett and published by John Wiley & Sons, New York, 1975. In a typical procedure for preparing a dispersion polymer, an organic solvent containing the polymerizable monomers, any polymerization additives such as processing aids, chelants, pH

buffers and a stabilizer polymer is charged to an oxygen purged, temperature controlled reactor equipped with a mixer, a thermocouple, a nitrogen purging tube, and a reflux condenser. The reaction medium is mixed vigorously, heated to the desired temperature, and then a free-radical initiator is added. The polymerization is usually conducted at reflux temperature to prevent oxygen from inhibiting the reaction. Reflux temperature typically falls in the range of from about 40°C to about 200°C in one aspect, and from about 60°C to about 140°C in another aspect, depending on the boiling point of the solvents comprising the non-aqueous medium in which the polymer is prepared. The reaction medium is continually purged with nitrogen while maintaining temperature and mixing for several hours. After this time, the mixture is cooled to room temperature, and any post-polymerization additives are charged to the reactor. Hydrocarbons are preferably used as the dispersion solvent. The reaction time required in such a polymerization will vary with the reaction temperature employed, initiator system, and initiator level. Generally, this reaction time will vary from about 20 minutes up to about 30 hours. Commonly, it will be preferred to utilize a reaction time from about 1 up to about 6 hours.

[0118] Typically, polymerization of the monomers used to prepare the polymers is initiated by free-radical initiators that are soluble in the non-aqueous medium. Examples include azo compound initiators such as 2,2'-azobis (2,4-dimethylpentane nitrile), 2,2'-azobis (2-methylbutanenitrile), and 2,2'-azobis(2-methylbutyronitrile). The initiators can be used in customary amounts, for example 0.05 to 7 wt.%, based on the amount of monomers to be polymerized.

[0119] In one aspect, the solvent is a hydrocarbon selected from aliphatic and cycloaliphatic solvents, as well as mixtures thereof. Exemplary hydrocarbon solvents include pentane, hexane, heptane, octane, nonane, decane, cyclopentane, methyl cyclopentane, cyclohexane, cycloheptane, cyclooctane, cyclononane, cyclodecane, and their mixtures.

[0120] In another aspect, the solvent is an organic solvent selected from acetone, cyclohexanone, tetrahydrofuran, dioxane, glycols and glycol derivatives, polyalkylene glycols and derivatives thereof, diethyl ether, tert-butyl methyl ether, methyl acetate, methyl acetate, ethyl acetate, propyl acetate,

isopropyl acetate, butyl acetate, butyl propionate, ethanol, isopropanol, water, and mixtures thereof.

[0121] The amount of solvent utilized normally will be in excess of the monomers to be polymerized and the proportion can vary from at least 1 wt.% of the monomer components and 99 wt.% solvent, up to about 65 wt.% polymerizable monomer components and 35 wt.% solvent. In another aspect, a concentration of about 10 to 60 wt.% polymerizable monomer components can be employed, where the weight percent is based on the total amount of monomer and solvent charged to the reaction vessel.

[0122] When mixtures of organic solvents and hydrocarbon solvents are utilized, the organic solvents and the hydrocarbon solvents can be premixed or can be added separately to the reaction mixture and polymerization reaction can be carried out thereafter. The relative weight ratio of the at least one organic solvent to at least one hydrocarbon solvent can be in the range of from about 95/5 to about 1/99 in one aspect, from about 80/20 to about 5/95 in another aspect, and from about 2:1 to 1:2 in a further aspect.

[0123] The stabilizer, typically a block or graft copolymer, prevents settling of the desired solid polymer product produced during the reaction. The block copolymer dispersion stabilizer can be selected from a variety of polymers containing at least two blocks wherein at least one of said blocks ("A" block) is soluble in the dispersion medium and at least another of said blocks ("B" block) is insoluble in the dispersion medium, and the stabilizer acts to disperse polymer products which are formed in the stabilizer's presence. The insoluble "B" block provides an anchor segment for attachment to the obtained polymer product, thus reducing the solubility of the polymerized product in the dispersion medium. The soluble "A" block of the dispersion stabilizer provides a sheath around the otherwise insoluble polymer and maintains the polymeric product as numerous small discrete particles rather than an agglomerated or highly coalesced mass. Details of the mechanism of such steric stabilization are described in Napper, D.H., "Polymeric Stabilization of Colloidal Dispersions," Academic Press, New York, N.Y., 1983. Representative stabilizers useful in the dispersion polymerization process of the invention are disclosed in U.S. Patent Nos.

5,349,030; 5,373,044; 5,468,797; and 6,538,067, which are incorporated herein by reference.

[0124] In one aspect of the invention, the steric stabilizer is selected from poly(12-hydroxystearic acid) such as disclosed in U.S. Patent No. 5,288,814. In another aspect of the invention, the steric stabilizer comprises the ester of the reaction product of a C₁₈-C₂₄ hydrocarbyl substituted succinic acid or the anhydride thereof with a polyol such as disclosed in U.S. Patent No. 7,044,988. In another aspect, the steric stabilizer comprises the ester of the reaction product of a C₂₀ to C₂₄ alkyl substituted succinic anhydride and a polyol selected from glycerin and/or a polyglycerol containing 2 to 6 glycerin units. U.S. Patent Nos. 5,288,814 and 7,044,988 are herein incorporated by reference.

[0125] In still another aspect, the steric stabilizer is a copolymer of N-vinyl pyrrolidone/stearyl methacrylate/butyl acrylate in a weight ratio of 50/30/20, respectively. Mixtures of this steric stabilizer with esters and half esters of the reaction product of the C₁₂ to C₃₀ alkenyl substituted succinic anhydride and a polyol selected from C₂ to C₄ glycols are also contemplated.

[0126] The amount of steric stabilizer used in the polymerization process of this invention will cause variations in the size and specific surface area of the disperse polymer. In general, the amount of stabilizer utilized can range from 0.1 to 10 wt.% of the monomers present in the main polymerization process. Of course, smaller particles of disperse polymer require more stabilizer than large particles of disperse polymer.

[0127] In one embodiment, the crosslinked, nonionic, amphiphilic polymers of the invention are selected from an emulsion polymer polymerized from a monomer mixture comprising at least 30 wt.% of at least one C₁-C₄ hydroxyalkyl (meth)acrylate (e.g., hydroxyethyl methacrylate), 15 to 70 wt.% of at least one C₁-C₁₂ alkyl acrylate, 5 to 40 wt.% of at least one vinyl ester of a C₁-C₁₀ carboxylic acid (based on the weight of the total monomers), and 0.01 to 1 wt.% at least one crosslinker (based on the dry weight of the polymer). Such polymers possess a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0128] In another aspect, the crosslinked, nonionic, amphiphilic polymers of the invention are selected from an emulsion polymer polymerized from a monomer mixture comprising at least 30 wt.% hydroxyethyl methacrylate, 15 to 35 wt.% ethyl acrylate, 5 to 25 wt.% butyl acrylate, 10 to 25 wt.% of a vinyl ester of a C₁-C₅ carboxylic acid selected from vinyl formate, vinyl, acetate, vinyl propionate, vinyl butyrate, vinyl isobutyrate, and vinyl valerate (said weight percent is based on the weight of the total monomers), and from about 0.01 to about 0.3 wt.% of a crosslinking monomer having an average of at least 3 crosslinkable unsaturated groups (based on the dry weight of the polymer). Such polymers possess a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0129] In another embodiment, the crosslinked, nonionic, amphiphilic polymers of the invention are selected from an emulsion polymer polymerized from a monomer mixture comprising from about 30 to 60 wt.% of at least one C₁-C₄ hydroxyalkyl (meth)acrylate (e.g., hydroxyethyl methacrylate), 15 to 70 wt.% of at least one C₁-C₁₂ alkyl acrylate (at least one C₁-C₅ alkyl acrylate in another aspect), from about 0.1 to about 10 wt. of at least one associative and/or semi-hydrophobic monomer (based on the weight of the total monomers), and from 0.01 to about 1 wt.% at least one crosslinker (based on the dry weight of the polymer). Such polymers possess a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0130] In another embodiment, the crosslinked, nonionic, amphiphilic polymers of the invention are selected from an emulsion polymer polymerized from a monomer mixture comprising from about 35 to 50 wt.% of at least one C₁-C₄ hydroxyalkyl (meth)acrylate (e.g., hydroxyethyl methacrylate), 15 to 60 wt.% of at least one C₁-C₁₂ alkyl acrylate in one aspect (at least one C₁-C₅ alkyl acrylate in another aspect), from about 0.1 to about 10 wt.% of at least one associative and/or semi-hydrophobic monomer (based on the weight of the total monomers), and from 0.01 to about 1 wt.% at least one crosslinker (based on the dry weight of the polymer). Such polymers possess a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0131] In another embodiment, the crosslinked, nonionic, amphiphilic polymers of the invention are selected from an emulsion polymer polymerized from a monomer mixture comprising from about 40 to 45 wt.% of at least one C₁-C₄ hydroxyalkyl (meth)acrylate (e.g., hydroxyethyl methacrylate), 15 to 60 wt.% of at least two different C₁-C₅ alkyl acrylate monomers, from about 1 to about 5 wt.% of at least one associative and/or semi-hydrophobic monomer (based on the weight of the total monomers), and from 0.01 to about 1 wt.% at least one crosslinker (based on the dry weight of the polymer). Such polymers possess a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0132] In another embodiment, the crosslinked, nonionic, amphiphilic polymers of the invention are selected from an emulsion polymer polymerized from a monomer mixture comprising from about 40 to 45 wt.% of hydroxyethyl acrylate, 30 to 50 wt. % of ethyl acrylate, 10 to 20 wt.% of butyl acrylate and from about 1 to about 5 wt.% of at least one associative and/or semi-hydrophobic monomer (based on the weight of the total monomers), and from 0.01 to about 1 wt.% at least one crosslinker (based on the weight of the dry polymer). Such polymers possess a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.

[0133] In another embodiment, the crosslinked, nonionic, amphiphilic polymers of the invention are selected from a dispersion polymer polymerized from a monomer mixture comprising 95 to 99.5 wt.% of a combination of at least one vinyl lactam and at least one vinyl ester of a C₁-C₂₂ carboxylic acid, wherein at least 60 wt.% of said monomer combination is selected from a vinyl lactam, 0.05 to 5 wt.% of at least one C₈-C₂₂ alkyl (meth)acrylate, optionally up to 5 wt.% of a hydrophobically modified alkoxylated associative monomer and/or a semi-hydrophobic monomer (said weight percent is based on the weight of the total monomers), and 0.01 to 1 wt.% of a crosslinking monomer (based on the dry weight of the polymer). When the optional associative and/or semi-hydrophobic monomer is present, the combined weight percentage of the C₈-C₂₂ alkyl (meth)acrylate and the associative monomer and/or the semi-hydrophobic monomer cannot exceed 5 wt.% of the weight of the total monomer composition.

[0134] In another embodiment, the crosslinked, nonionic, amphiphilic dispersion polymer is polymerized from a monomer mixture comprising 30 to 90 wt.% of N-vinyl pyrrolidone, 10 to 35 wt.% of at least one vinyl ester selected from vinyl acetate, vinyl propionate, vinyl butyrate, vinyl isobutyrate, vinyl valerate, vinyl hexanoate, vinyl 2-methylhexanate, vinyl 2-ethylhexanoate, vinyl iso-octanoate, vinyl nonanoate, vinyl neodecanoate, vinyl decanoate, vinyl versatate, vinyl laurate, vinyl palmitate, and vinyl stearate, 0.5 to 5 wt.% of an C₈-C₂₂ alkyl (meth)acrylate selected from octyl (meth)acrylate, 2-ethylhexyl (meth)acrylate, decyl (meth)acrylate, isodecyl (meth)acrylate, lauryl (meth)acrylate, tetradecyl (meth)acrylate, hexadecyl (meth)acrylate, stearyl (meth)acrylate, and behenyl (meth)acrylate, 0 to 4.5 wt.% of at least one associative monomer and/or semi-hydrophobic monomer (said weight percent is based on the weight of the total monomers), and 0.01 to 1 wt.% of a crosslinking monomer (based on the dry weight of the polymer). When the optional associative monomer and/or semi-hydrophobic monomer is present the combined weight percentage of the C₈-C₂₂ alkyl (meth)acrylate and the associative monomer and/or the semi-hydrophobic monomer cannot exceed 5 wt.% of the weight of the total monomer composition.

Yield Stress Fluids

[0135] In one exemplary aspect of the invention, the yield stress fluid of the invention comprises: i) at least one crosslinked, nonionic amphiphilic polymer(s) described previously; ii) at least one surfactant selected from at least one anionic surfactant, at least one cationic surfactant, at least one amphoteric surfactant, at least one nonionic surfactant, and combinations thereof; and iii) water.

[0136] In another exemplary aspect of the invention, the yield stress fluid of the invention comprises: i) at least one crosslinked, nonionic amphiphilic polymer(s) described previously; ii) at least one anionic surfactant; and iii) water.

[0137] In another exemplary aspect of the invention, the yield stress fluid of the invention comprises: i) at least one crosslinked, nonionic amphiphilic polymer(s) described previously; ii) at least one anionic surfactant and at least one amphoteric surfactant; and iii) water.

[0138] Surprisingly, the present amphiphilic polymers can be activated by a surfactant to provide a stable yield stress fluid with desirable rheological and aesthetic properties with the ability to suspend particulate and insoluble materials in an aqueous medium for indefinite periods of time independent of pH. The yield stress value, elastic modulus and optical clarity are substantially independent of pH in the compositions in which they are included. The yield stress fluid of the invention is useful in the pH range of from about 2 to about 14 in one aspect, from about 3 to 11 in another aspect, and from about 4 to about 9 in a further aspect. Unlike the pH-responsive crosslinked polymers (acid or base sensitive) that require neutralization with an acid or a base to impart a desired rheological profile, the rheological profiles of the crosslinked, nonionic, amphiphilic polymers of the invention are substantially independent of pH. By substantially independent of pH is meant that the yield stress fluid within which the polymer of the invention is included imparts a desired rheological profile (e.g., a yield stress of at least 0.1 Pa in one aspect, at least 0.5 Pa in another aspect, at least 1 Pa in still another aspect, and at least 2 Pa in a further aspect) across a wide pH range (e.g., from about 2 to about 14) wherein the standard deviation in yield stress values across the pH range is less than 1 Pa in one aspect, less than 0.5 Pa in another aspect, and less than 0.25 Pa in a further aspect of the invention.

[0139] In one exemplary aspect of the invention, the yield stress fluid comprises at least one crosslinked, nonionic, amphiphilic polymer, at least one anionic surfactant, an optional nonionic surfactant, and water.

[0140] In another exemplary aspect, the yield stress fluid comprises at least one crosslinked, nonionic amphiphilic polymer, at least one anionic surfactant, at least one amphoteric surfactant, an optional nonionic surfactant, and water.

[0141] In still another exemplary aspect, the yield stress fluid comprises at least one crosslinked, nonionic, amphiphilic polymer, at least one anionic ethoxylated surfactant, an optional nonionic surfactant, and water. In one aspect, the average degree of ethoxylation in the anionic surfactant can range

from about 1 to about 3. In another aspect, the average degree of ethoxylation is about 2.

[0142] In a further exemplary aspect, the yield stress fluid comprises at least one crosslinked, nonionic, amphiphilic polymer, at least one anionic ethoxylated surfactant, at least one amphoteric surfactant, an optional nonionic surfactant, and water. In one aspect, the average degree of ethoxylation in the anionic surfactant can range from about 1 to about 3. In another aspect, the average degree of ethoxylation is about 2.

[0143] In a still further exemplary aspect, the yield stress fluid comprises at least one crosslinked, nonionic, amphiphilic polymer, at least one anionic non-ethoxylated surfactant, at least one anionic ethoxylated surfactant, an optional nonionic surfactant, and water. In one aspect, the average degree of ethoxylation in the anionic surfactant can range from about 1 to about 3. In another aspect, the average degree of ethoxylation is about 2.

[0144] In another exemplary aspect, the yield stress fluid comprises at least one crosslinked, nonionic, amphiphilic polymer, at least one anionic non-ethoxylated surfactant, at least one anionic ethoxylated surfactant, at least one amphoteric surfactant, an optional nonionic surfactant, and water. In one aspect, the average degree of ethoxylation in the anionic surfactant can range from about 1 to about 3. In another aspect, the average degree of ethoxylation is about 2.

[0145] The amount of amphiphilic polymer utilized in formulating the yield stress fluid of the invention ranges from about 0.5 to about 5 wt.% polymer solids (100 % active polymer) based on the weight of the total composition. In another aspect, the amount of amphiphilic polymer utilized in the formulation ranges from about 0.75 wt.% to about 3.5 wt.%. In still another aspect, the amount of amphiphilic polymer employed in the yield stress fluid ranges from about 1 to about 3 wt.%. In a further aspect, the amount of amphiphilic polymer employed in the yield stress fluid ranges from about 1.5 wt.% to about 2.75 wt.%. In a still further aspect, the amount of amphiphilic polymer utilized in the yield stress fluid ranges from about 2 to about 2.5 wt.%. The crosslinked, nonionic, amphiphilic

polymer utilized in formulating the yield stress fluids of the invention is an emulsion polymer, a dispersion polymer, and combinations thereof.

[0146] The surfactants utilized to formulate the yield stress fluids of the invention can be selected from anionic surfactants, cationic surfactants, amphoteric surfactants, nonionic surfactants, and mixtures thereof.

[0147] Non-limiting examples of anionic surfactants are disclosed in *McCutcheon's Detergents and Emulsifiers*, North American Edition, 1998, published by Allured Publishing Corporation; and McCutcheon's, *Functional Materials*, North American Edition (1992); both of which are incorporated by reference herein in their entirety. The anionic surfactant can be any of the anionic surfactants known or previously used in the art of aqueous surfactant compositions. Suitable anionic surfactants include but are not limited to alkyl sulfates, alkyl ether sulfates, alkyl sulphonates, alkaryl sulfonates, α -olefin-sulphonates, alkylamide sulphonates, alkarylpolyether sulphates, alkylamidoether sulphates, alkyl monoglyceryl ether sulfates, alkyl monoglyceride sulfates, alkyl monoglyceride sulfonates, alkyl succinates, alkyl sulfosuccinates, alkyl sulfosuccinamates, alkyl ether sulphosuccinates, alkyl amidosulfosuccinates; alkyl sulphoacetates, alkyl phosphates, alkyl ether phosphates, alkyl ether carboxylates, alkyl amidoethercarboxylates, N-alkylamino acids, N-acyl amino acids, alkyl peptides, N-acyl taurates, alkyl isethionates, carboxylate salts wherein the acyl group is derived from fatty acids; and the alkali metal, alkaline earth metal, ammonium, amine, and triethanolamine salts thereof.

[0148] In one aspect, the cation moiety of the forgoing salts is selected from sodium, potassium, magnesium, ammonium, mono-, di- and triethanolamine salts, and mono-, di-, and tri-isopropylamine salts. The alkyl and acyl groups of the foregoing surfactants contain from about 6 to about 24 carbon atoms in one aspect, from 8 to 22 carbon atoms in another aspect and from about 12 to 18 carbon atoms in a further aspect and can be saturated or unsaturated. The aryl groups in the surfactants are selected from phenyl or benzyl. The ether containing surfactants set forth above can contain from 1 to 10 ethylene oxide and/or propylene oxide units per surfactant molecule in one

aspect, and from 1 to 3 ethylene oxide units per surfactant molecule in another aspect.

[0149] Examples of suitable anionic surfactants include but are not limited to the sodium, potassium, lithium, magnesium, and ammonium salts of laureth sulfate, trideceth sulfate, myreth sulfate, C₁₂-C₁₃ pareth sulfate, C₁₂-C₁₄ pareth sulfate, and C₁₂-C₁₅ pareth sulfate, ethoxylated with 1, 2, 3, 4 or 5 moles of ethylene oxide; sodium, potassium, lithium, magnesium, ammonium, and triethanolamine lauryl sulfate, coco sulfate, tridecyl sulfate, myristyl sulfate, cetyl sulfate, cetearyl sulfate, stearyl sulfate, oleyl sulfate, and tallow sulfate, disodium lauryl sulfosuccinate, disodium laureth sulfosuccinate, sodium cocoyl isethionate, sodium C₁₂-C₁₄ olefin sulfonate, sodium laureth-6 carboxylate, sodium methyl cocoyl taurate, sodium cocoyl glycinate, sodium myristyl sarcocinate, sodium dodecylbenzene sulfonate, sodium cocoyl sarcosinate, sodium cocoyl glutamate, potassium myristoyl glutamate, triethanolamine monolauryl phosphate, and fatty acid soaps, including the sodium, potassium, ammonium, and triethanolamine salts of a saturated and unsaturated fatty acids containing from about 8 to about 22 carbon atoms.

[0150] The cationic surfactants can be any of the cationic surfactants known or previously used in the art of aqueous surfactant compositions. Useful cationic surfactants can be one or more of those described, for example, in *McCutcheon's Detergents and Emulsifiers*, North American Edition, 1998, *supra*, and *Kirk-Othmer, Encyclopedia of Chemical Technology*, 4th Ed., Vol. 23, pp. 478-541, the contents of which are herein incorporated by reference. Suitable classes of cationic surfactants include but are not limited to alkyl amines, alkyl imidazolines, ethoxylated amines, quaternary compounds, and quaternized esters. In addition, alkyl amine oxides can function as a cationic surfactant at a low pH.

[0151] Alkylamine surfactants can be salts of primary, secondary and tertiary fatty C₁₂-C₂₂ alkylamines, substituted or unsubstituted, and substances sometimes referred to as "amidoamines". Non-limiting examples of alkylamines and salts thereof include dimethyl cocamine, dimethyl palmitamine, dioctylamine, dimethyl stearamine, dimethyl soyamine, soyamine, myristyl amine, tridecyl

amine, ethyl stearylamine, N-tallowpropane diamine, ethoxylated stearylamine, dihydroxy ethyl stearylamine, arachidyl behenylamine, dimethyl lauramine, stearylamine hydrochloride, soyamine chloride, stearylamine formate, N-tallowpropane diamine dichloride, and amodimethicone.

[0152] Non-limiting examples of amidoamines and salts thereof include stearamido propyl dimethyl amine, stearamidopropyl dimethylamine citrate, palmitamidopropyl diethylamine, and cocamidopropyl dimethylamine lactate.

[0153] Non-limiting examples of alkyl imidazoline surfactants include alkyl hydroxyethyl imidazoline, such as stearyl hydroxyethyl imidazoline, coco hydroxyethyl imidazoline, ethyl hydroxymethyl oleyl oxazoline, and the like.

[0154] Non-limiting examples of ethoxylated amines include PEG-copolyamine, PEG-15 tallow amine, quaternium-52, and the like.

[0155] Among the quaternary ammonium compounds useful as cationic surfactants, some correspond to the general formula: $(R^{20}R^{21}R^{22}R^{23}N^+)E^-$, wherein R^{20} , R^{21} , R^{22} , and R^{23} are independently selected from an aliphatic group having from 1 to about 22 carbon atoms, or an aromatic, alkoxy, polyoxyalkylene, alkylamido, hydroxyalkyl, aryl or alkylaryl group having 1 to about 22 carbon atoms in the alkyl chain; and E^- is a salt-forming anion such as those selected from halogen, (e.g., chloride, bromide), acetate, citrate, lactate, glycolate, phosphate, nitrate, sulfate, and alkylsulfate. The aliphatic groups can contain, in addition to carbon and hydrogen atoms, ether linkages, ester linkages, and other groups such as amino groups. The longer chain aliphatic groups, e.g., those of about 12 carbons, or higher, can be saturated or unsaturated. In one aspect, the aryl groups are selected from phenyl and benzyl.


[0156] Exemplary quaternary ammonium surfactants include, but are not limited to cetyl trimethylammonium chloride, cetylpyridinium chloride, dicetyl dimethyl ammonium chloride, dihexadecyl dimethyl ammonium chloride, stearyl dimethyl benzyl ammonium chloride, dioctadecyl dimethyl ammonium chloride, dieicosyl dimethyl ammonium chloride, didocosyl dimethyl ammonium chloride, dihexadecyl dimethyl ammonium chloride, dihexadecyl dimethyl ammonium acetate, behenyl trimethyl ammonium chloride, benzalkonium chloride,

benzethonium chloride, and di(coconutalkyl) dimethyl ammonium chloride, ditallowdimethyl ammonium chloride, di(hydrogenated tallow) dimethyl ammonium chloride, di(hydrogenated tallow) dimethyl ammonium acetate, ditallowdimethyl ammonium methyl sulfate, ditallow dipropyl ammonium phosphate, and ditallow dimethyl ammonium nitrate.

[0157] At low pH, amine oxides can protonate and behave similarly to N-alkyl amines. Examples include, but are not limited to, dimethyl- dodecylamine oxide, oleyldi(2-hydroxyethyl) amine oxide, dimethyltetradecylamine oxide, di(2-hydroxyethyl)-tetradecylamine oxide, dimethylhexadecylamine oxide, behenamine oxide, cocamine oxide, decyltetradecylamine oxide, dihydroxyethyl C₁₂-C₁₅ alkoxypropylamine oxide, dihydroxyethyl cocamine oxide, dihydroxyethyl lauramine oxide, dihydroxyethyl stearamine oxide, dihydroxyethyl tallowamine oxide, hydrogenated palm kernel amine oxide, hydrogenated tallowamine oxide, hydroxyethyl hydroxypropyl C₁₂-C₁₅ alkoxypropylamine oxide, lauramine oxide, myristamine oxide, cetylamine oxide, oleamidopropylamine oxide, oleamine oxide, palmitamine oxide, PEG-3 lauramine oxide, dimethyl lauramine oxide, potassium trisphosphonomethylamine oxide, soyamidopropylamine oxide, cocamidopropylamine oxide, stearamine oxide, tallowamine oxide, and mixtures thereof.

[0158] The term “amphoteric surfactant” as used herein, is also intended to encompass zwitterionic surfactants, which are well known to formulators skilled in the art as a subset of amphoteric surfactants. Non-limiting examples of amphoteric surfactants are disclosed in *McCutcheon's Detergents and Emulsifiers*, North American Edition, *supra*, and *McCutcheon's, Functional Materials*, North American Edition, *supra*; both of which are incorporated by reference herein in their entirety. Suitable examples include but are not limited to amino acids (e.g., N-alkyl amino acids and N-acyl amino acids), betaines, sultaines, and alkyl amphocarboxylates.

[0159] Amino acid based surfactants suitable in the practice of the present invention include surfactants represented by the formula:






wherein R^{25} represents a saturated or unsaturated hydrocarbon group having 10 to 22 carbon atoms or an acyl group containing a saturated or unsaturated hydrocarbon group having 9 to 22 carbon atoms, Y is hydrogen or methyl, Z is selected from hydrogen, $-\text{CH}_3$, $-\text{CH}(\text{CH}_3)_2$, $-\text{CH}_2\text{CH}(\text{CH}_3)_2$, $-\text{CH}(\text{CH}_3)\text{CH}_2\text{CH}_3$, $-\text{CH}_2\text{C}_6\text{H}_5$, $-\text{CH}_2\text{C}_6\text{H}_4\text{OH}$, $-\text{CH}_2\text{OH}$, $-\text{CH}(\text{OH})\text{CH}_3$, $-(\text{CH}_2)_4\text{NH}_2$, $-(\text{CH}_2)_3\text{NHC}(\text{NH})\text{NH}_2$, $-\text{CH}_2\text{C}(\text{O})\text{O}^{\text{-}}\text{M}^{\text{+}}$, $-(\text{CH}_2)_2\text{C}(\text{O})\text{O}^{\text{-}}\text{M}^{\text{+}}$. M is a salt forming cation. In one aspect, R^{25} represents a radical selected from a linear or branched C_{10} to C_{22} alkyl group, a linear or branched C_{10} to C_{22} alkenyl group, an acyl group represented by $\text{R}^{26}\text{C}(\text{O})-$, wherein R^{26} is selected from a linear or branched C_9 to C_{22} alkyl group, a linear or branched C_9 to C_{22} alkenyl group. In one aspect, $\text{M}^{\text{+}}$ is a cation selected from sodium, potassium, ammonium, and triethanolamine (TEA).

[0160] The amino acid surfactants can be derived from the alkylation and acylation of α -amino acids such as, for example, alanine, arginine, aspartic acid, glutamic acid, glycine, isoleucine, leucine, lysine, phenylalanine, serine, tyrosine, and valine. Representative N-acyl amino acid surfactants are, but not limited to the mono- and di- carboxylate salts (e.g., sodium, potassium, ammonium and TEA) of N-acylated glutamic acid, for example, sodium cocoyl glutamate, sodium lauroyl glutamate, sodium myristoyl glutamate, sodium palmitoyl glutamate, sodium stearoyl glutamate, disodium cocoyl glutamate, disodium stearoyl glutamate, potassium cocoyl glutamate, potassium lauroyl glutamate, and potassium myristoyl glutamate; the carboxylate salts (e.g., sodium, potassium, ammonium and TEA) of N-acylated alanine, for example, sodium cocoyl alaninate, and TEA lauroyl alaninate; the carboxylate salts (e.g., sodium, potassium, ammonium and TEA) of N-acylated glycine, for example, sodium cocoyl glycinate, and potassium cocoyl glycinate; the carboxylate salts (e.g., sodium, potassium, ammonium and TEA) of N-acylated sarcosine, for example,

- 50 -

sodium lauroyl sarcosinate, sodium cocoyl sarcosinate, sodium myristoyl sarcosinate, sodium oleoyl sarcosinate, and ammonium lauroyl sarcosinate; and mixtures of the foregoing surfactants.


[0161] The betaines and sultaines useful in the present invention are selected from alkyl betaines, alkylamino betaines, and alkylamido betaines, as well as the corresponding sulfobetaines (sultaines) represented by the formulas:



wherein R^{27} is a C₇-C₂₂ alkyl or alkenyl group, each R^{28} independently is a C₁-C₄ alkyl group, R^{29} is a C₁-C₅ alkylene group or a hydroxy substituted C₁-C₅ alkylene group, n is an integer from 2 to 6, A is a carboxylate or sulfonate group, and M is a salt forming cation. In one aspect, R^{27} is a C₁₁-C₁₈ alkyl group or a C₁₁-C₁₈ alkenyl group. In one aspect, R^{28} is methyl. In one aspect, R^{29} is methylene, ethylene or hydroxy propylene. In one aspect, n is 3. In a further aspect, M is selected from sodium, potassium, magnesium, ammonium, and mono-, di- and triethanolamine cations.

[0162] Examples of suitable betaines include, but are not limited to, lauryl betaine, coco betaine, oleyl betaine, cocohexadecyl dimethylbetaine, lauryl amidopropyl betaine, cocoamidopropyl betaine (CAPB), and cocamidopropyl hydroxysultaine.

[0163] The alkylamphocarboxylates such as the alkylamphoacetates and alkylamphopropionates (mono- and disubstituted carboxylates) can be represented by the formula:



wherein R^{27} is a $\text{C}_7\text{-C}_{22}$ alkyl or alkenyl group, R^{30} is $-\text{CH}_2\text{C}(\text{O})\text{O}^- \text{M}^+$, $-\text{CH}_2\text{CH}_2\text{C}(\text{O})\text{O}^- \text{M}^+$, or $-\text{CH}_2\text{CH}(\text{OH})\text{CH}_2\text{SO}_3^- \text{M}^+$, R^{31} is hydrogen or $-\text{CH}_2\text{C}(\text{O})\text{O}^- \text{M}^+$, and M is a cation selected from sodium, potassium, magnesium, ammonium, and mono-, di- and triethanolamine.

[0164] Exemplary alkylamphocarboxylates include, but are not limited to, sodium cocoamphoacetate, sodium lauroamphoacetate, sodium capryloamphoacetate, disodium cocoamphodiacetate, disodium lauroamphodiacetate, disodium caprylamphodiacetate, disodium capryloamphodiacetate, disodium cocoamphodipropionate, disodium lauroamphodipropionate, disodium caprylamphodipropionate, and disodium capryloamphodipropionate.

[0165] Non-limiting examples of nonionic surfactants are disclosed in *McCutcheon's Detergents and Emulsifiers*, North American Edition, 1998, *supra*; and *McCutcheon's, Functional Materials*, North American, *supra*; both of which are incorporated by reference herein in their entirety. Additional Examples of nonionic surfactants are described in U.S. Patent No. 4,285,841, to Barrat et al., and U.S. Patent. No. 4,284,532, to Leikhim et al., both of which are incorporated by reference herein in their entirety. Nonionic surfactants typically have a hydrophobic portion, such as a long chain alkyl group or an alkylated aryl group, and a hydrophilic portion containing various degrees of ethoxylation and/or propoxylation (e.g., 1 to about 50) ethoxy and/or propoxy moieties. Examples of some classes of nonionic surfactants that can be used include, but are not limited to, ethoxylated alkylphenols, ethoxylated and propoxylated fatty alcohols, polyethylene glycol ethers of methyl glucose, polyethylene glycol ethers of

sorbitol, ethylene oxide-propylene oxide block copolymers, ethoxylated esters of fatty acids, condensation products of ethylene oxide with long chain amines or amides, condensation products of ethylene oxide with alcohols, and mixtures thereof.

[0166] Suitable nonionic surfactants include, for example, alkyl polysaccharides, alcohol ethoxylates, block copolymers, castor oil ethoxylates, ceto/oleyl alcohol ethoxylates, cetearyl alcohol ethoxylates, decyl alcohol ethoxylates, dinonyl phenol ethoxylates, dodecyl phenol ethoxylates, end-capped ethoxylates, ether amine derivatives, ethoxylated alkanolamides, ethylene glycol esters, fatty acid alkanolamides, fatty alcohol alkoxylates, lauryl alcohol ethoxylates, mono-branched alcohol ethoxylates, nonyl phenol ethoxylates, octyl phenol ethoxylates, oleyl amine ethoxylates, random copolymer alkoxylates, sorbitan ester ethoxylates, stearic acid ethoxylates, stearyl amine ethoxylates, tallow oil fatty acid ethoxylates, tallow amine ethoxylates, tridecanol ethoxylates, acetylenic diols, polyoxyethylene sorbitols, and mixtures thereof. Various specific examples of suitable nonionic surfactants include, but are not limited to, methyl gluceth-10, PEG-20 methyl glucose distearate, PEG-20 methyl glucose sesquistearate, ceteth-8, ceteth-12, dodoxynol-12, laureth-15, PEG-20 castor oil, polysorbate 20, steareth-20, polyoxyethylene-10 cetyl ether, polyoxyethylene-10 stearyl ether, polyoxyethylene-20 cetyl ether, polyoxyethylene- 10 oleyl ether, polyoxyethylene-20 oleyl ether, an ethoxylated nonylphenol, ethoxylated octylphenol, ethoxylated dodecylphenol, or ethoxylated fatty (C₆-C₂₂) alcohol, including 3 to 20 ethylene oxide moieties, polyoxyethylene-20 isohexadecyl ether, polyoxyethylene-23 glycerol laurate, polyoxyethylene-20 glyceryl stearate, PPG-10 methyl glucose ether, PPG-20 methyl glucose ether, polyoxyethylene-20 sorbitan monoesters, polyoxyethylene-80 castor oil, polyoxyethylene-15 tridecyl ether, polyoxyethylene-6 tridecyl ether, laureth-2, laureth-3, laureth-4, PEG-3 castor oil, PEG 600 dioleate, PEG 400 dioleate, poloxamers such as poloxamer 188, polysorbate 21, polysorbate 40, polysorbate 60, polysorbate 61, polysorbate 65, polysorbate 80, polysorbate 81, polysorbate 85, sorbitan caprylate, sorbitan cocoate, sorbitan diisostearate, sorbitan dioleate, sorbitan

distearate, sorbitan fatty acid ester, sorbitan isostearate, sorbitan laurate, sorbitan oleate, sorbitan palmitate, sorbitan sesquiisostearate, sorbitan sesquioleate, sorbitan sesquistearate, sorbitan stearate, sorbitan triisostearate, sorbitan trioleate, sorbitan tristearate, sorbitan undecylenate, or mixtures thereof.

[0167] Alkyl glycoside nonionic surfactants can also be employed and are generally prepared by reacting a monosaccharide, or a compound hydrolyzable to a monosaccharide, with an alcohol such as a fatty alcohol in an acid medium. For example, U.S. Patent Nos. 5,527,892 and 5,770,543 describe alkyl glycosides and/or methods for their preparation. Suitable examples are commercially available under the names of Glucopon™ 220, 225, 425, 600 and 625, PLANTACARE®, and PLANTAPON®, all of which are available from Cognis Corporation of Ambler, Pennsylvania.

[0168] In another aspect, nonionic surfactants include, but are not limited to, alkoxylated methyl glucosides such as, for example, methyl gluceth-10, methyl gluceth-20, PPG-10 methyl glucose ether, and PPG-20 methyl glucose ether, available from Lubrizol Advanced Materials, Inc., under the trade names, Glucam® E10, Glucam® E20, Glucam® P10, and Glucam® P20, respectively; and hydrophobically modified alkoxylated methyl glucosides, such as PEG 120 methyl glucose dioleate, PEG-120 methyl glucose trioleate, and PEG-20 methyl glucose sesquistearate, available from Lubrizol Advanced Materials, Inc., under the trade names, Glucamate® DOE-120, Glucamate™ LT, and Glucamate™ SSE-20, respectively, are also suitable. Other exemplary hydrophobically modified alkoxylated methyl glucosides are disclosed in U.S. Patent Nos. 6,573,375 and 6,727,357, the disclosures of which are hereby incorporated by reference in their entirety.

[0169] Other useful nonionic surfactants include water soluble silicones such as PEG-10 Dimethicone, PEG-12 Dimethicone, PEG-14 Dimethicone, PEG-17 Dimethicone, PPG-12 Dimethicone, PPG-17 Dimethicone and derivatized/functionalized forms thereof such as Bis-PEG/PPG-20/20 Dimethicone Bis-PEG/PPG-16/16 PEG/PPG-16/16 Dimethicone, PEG/PPG-14/4 Dimethicone, PEG/PPG-20/20 Dimethicone, PEG/PPG-20/23 Dimethicone, and Perfluorononyl ethyl Carboxydecyl PEG-10 Dimethicone.

[0170] The amount of the at least one surfactant (active weight basis) utilized in formulating the yield stress fluid of the invention ranges from about 1 to about 30 wt.% based on the weight of the total yield stress fluid composition. In another aspect, the amount of the at least one surfactant utilized in the formulation ranges from about 3 to about 25 wt.%. In still another aspect, the amount of the at least one surfactant employed in the yield stress fluid ranges from about 5 to about 22 wt.%. In a further aspect, the amount of the at least one surfactant utilized ranges from about 6 to about 20 wt.%. In still a further aspect, the amount of at least one surfactant is about 10, 12, 14, 16, and 18 wt.% based on the total weight yield of the stress fluid.

[0171] In one embodiment of the invention, the weight ratio (based on active material) of anionic surfactant (non-ethoxylated and/or ethoxylated surfactant) to amphoteric surfactant can range from about 10:1 to about 2:1 in one aspect, and can be 9:1, 8:1, 7:1 6:1, 5:1, 4.5:1, 4:1, or 3:1 in another aspect. When employing an ethoxylated anionic surfactant and a non-ethoxylated anionic surfactant in combination with an amphoteric surfactant, the weight ratio (based on active material) of ethoxylated anionic surfactant to non-ethoxylated anionic surfactant to amphoteric surfactant can range from about 3.5:3.5:1 in one aspect to about 1:1:1 in another aspect.

[0172] In one embodiment, the yield stress value of the fluid is at least about 0.1 Pa in one aspect, at least about 0.5 Pa in another aspect, at least about 1 Pa in still another aspect, and at least about 1.5 Pa in a further aspect. In another embodiment, the yield stress of the fluid ranges from about 0.1 to about 20 Pa in one aspect, from about 0.5 Pa to about 10 Pa in another aspect, from about 1 to about 3 Pa in a further aspect, and from about 1.5 to about 3.5 in a still further aspect.

[0173] Optionally, the yield stress fluids of the invention can contain an electrolyte. Suitable electrolytes are known compounds and include salts of multivalent anions, such as potassium pyrophosphate, potassium tripolyphosphate, and sodium or potassium citrate, salts of multivalent cations, including alkaline earth metal salts such as calcium chloride and calcium bromide, as well as zinc halides, barium chloride and calcium nitrate, salts of

monovalent cations with monovalent anions, including alkali metal or ammonium halides, such as potassium chloride, sodium chloride, potassium iodide, sodium bromide, and ammonium bromide, alkali metal or ammonium nitrates, and blends thereof. The amount of the electrolyte used will generally depend on the amount of the amphiphilic polymer incorporated, but may be used at concentration levels of from about 0.1 to about 4 wt.% in one aspect and from about 0.2 to about 2 wt.% in another aspect, based on the weight of the total composition.

[0174] The yield stress fluid must be easily pourable with a shear thinning index of less than 0.5 at shear rates between 0.1 and 1 reciprocal second, and an optical transmission of at least 10%. The yield stress fluid of the invention can be utilized in combination with a rheology modifier (thickener) to enhance the yield value of a thickened liquid. In one aspect, the yield stress fluid of the invention can be combined with a nonionic rheology modifier which rheology modifier when utilized alone does not have a sufficient yield stress value. Any rheology modifier is suitable, so long as such is soluble in water, stable and contains no ionic or ionizable groups. Suitable rheology modifiers include, but are not limited to natural gums (e.g., polygalactomannan gums selected from fenugreek, cassia, locust bean, tara and guar), modified cellulose (e.g., ethylhexylethylcellulose (EHEC), hydroxybutylmethylcellulose (HBMC), hydroxyethylmethylcellulose (HEMC), hydroxypropylmethylcellulose (HPMC), methyl cellulose (MC), hydroxyethylcellulose (HEC), hydroxypropylcellulose (HPC) and cetyl hydroxyethylcellulose), methylcellulose, polyethylene glycols (e.g., PEG 4000, PEG 6000, PEG 8000, PEG 10000, PEG 20000), polyvinyl alcohol, polyacrylamides (homopolymers and copolymers), and hydrophobically modified ethoxylated urethanes (HEUR); and mixtures thereof. The rheology modifier can be utilized in an amount ranging from about 0.5 to about 25 wt.% in one aspect, from about 1 to about 15 wt.% in another aspect, and from about 2 to about 10 wt.% in a further aspect, based on the weight of the total weight of the composition.

[0175] The yield stress fluids of the invention can be used in any application requiring yield stress properties. The yield stress fluids can be used

alone or in combination with other fluids to enhance the yield stress values thereof.

[0176] In one embodiment, the yield stress fluids of the invention can be utilized to suspend particulate materials and insoluble droplets within an aqueous composition. Such fluids are useful in the oil and gas, personal care, and homecare industries.

[0177] In the oil and gas industry, the yield stress fluids of the invention can be used to enhance the yield stress value of drilling and hydraulic fracturing fluids, and can be employed to suspend borehole cuttings and fracturing proppants such as, for example, sand, sintered bauxite, glass balls, ceramic materials, polystyrene beads, and the like.

[0178] In the personal care industry, the yield stress fluids of the invention can be utilized to improve the yield stress properties of detergents compositions, hair and skin care compositions, as well as cosmetics, and can be utilized to suspend insoluble silicones, opacifiers and pearlescent agents (e.g., mica, coated mica), pigments, exfoliants, anti-dandruff agents, clay, swellable clay, laponite, gas bubbles, liposomes, microsponges, cosmetic beads, cosmetic microcapsules, and flakes. The yield stress fluids of the invention can stabilize these materials in suspension for at least one month at 23°C in one aspect, at least 6 months in another aspect, and at least one year in a further aspect.

[0179] The stable compositions maintain a smooth, acceptable rheology with good shear thinning properties without significant increases or decreases in viscosity, with no phase separation, e.g., settling or creaming out (rising to the surface), or loss of clarity over extended periods of time, such as for at least one month at 45°C.

[0180] Exemplary bead components include, but are not limited to, agar beads, alginate beads, jojoba beads, gelatin beads, Styrofoam™ beads, polyacrylate, polymethylmethacrylate (PMMA), polyethylene beads, Unispheres™ and Unipearls™ cosmetic beads (Induchem USA, Inc., New York, NY), Lipocapsule™, Liposphere™, and Lipopearl™ microcapsules (Lipo Technologies Inc., Vandalia, OH), and Confetti II™ dermal delivery flakes (United-Guardian, Inc., Hauppauge, NY). Beads can be utilized as aesthetic

materials or can be used to encapsulate benefit agents to protect them from the deteriorating effects of the environment or for optimal delivery, release and performance in the final product.

[0181] In one aspect, the cosmetic beads range in size from about 0.5 to about 1.5 mm. In another aspect, the difference in specific gravity of the bead and water is between about +/- 0.01 and 0.5 in one aspect and from about +/- 0.2 to 0.3 in another aspect.

[0182] In one aspect, the microcapsules range in size from about 0.5 to about 300 μm . In another aspect, the difference in specific gravity between the microcapsules and water is from about +/- 0.01 to 0.5. Non-limiting examples of microcapsule beads are disclosed in U.S. Patent No. 7,786,027, the disclosure of which is herein incorporated by reference.

[0183] In one aspect of the invention, the amount of particulate component and/or insoluble droplets can range from about 0.1% to about 10% by weight based on the total weight of the composition.

[0184] While overlapping weight ranges for the various components and ingredients that can be contained in the yield stress fluids of the invention have been expressed for selected embodiments and aspects of the invention, it should be readily apparent that the specific amount of each component in the compositions will be selected from its disclosed range such that the amount of each component is adjusted such that the sum of all components in the composition will total 100 weight percent. The amounts employed will vary with the purpose and character of the desired product and can be readily determined by one skilled in the formulation art and from the literature.

[0185] This invention is illustrated by the following examples that are merely for the purpose of illustration and are not to be regarded as limiting the scope of the invention or the manner in which it can be practiced. Unless specifically indicated otherwise, parts and percentages are given by weight.

[0186] The following abbreviations and trade names are utilized in the examples.

AA	Acrylic Acid
AMD	Acrylamide
AMPS® Monomer	2-Acrylamido-2-Methylpropanesulfonic Acid, Lubrizol Advanced Materials, Inc.
AN	Acrylonitrile
APE	Allyl Pentaerythritol
n-BA	n-Butyl Acrylate
BDGMA	Butyl Diglycol Methacrylate
BEM	Sipomer® Ethoxylated (25) Behenyl Methacrylate, Rhodia
i-BMA	iso-Butyl Methacrylate
s-BMA	sec-Butyl Methacrylate
Chembetaine™ CAD	Cocamidopropyl Betaine (amphoteric surfactant), Lubrizol Advanced Materials, Inc. (35% active)
CSEM	Visiomer® C18 PEG 1105 MA W Polyethyleneglycol (25) Cetearyl Methacrylate, Evonik Röhm GmbH
CYCLO	Cyclohexane
Celvol® 502 PVA	Polyvinyl Alcohol (hydrolysis % = 87-89%), Celanese Corpaktion
EA	Ethyl Acrylate
EMA	Ethyl Methacrylate
HBMA	4-Hydroxybutyl Methacrylate
2-HEA	2-Hydroxyethyl Acrylate
HEMA	2-Hydroxyethyl Methacrylate
HPA	Hydroxypropyl Acrylate
HPMA	3-Hydroxypropyl Methacrylate
LEM	Blemmer® PLE-200 Lauroxy Polyethyleneglycol Methacrylate, NOF Corporation
LMA	Lauryl Methacrylate
MA	Methyl Acrylate
MAA	Methacrylic Acid
MA EO/PO-300	Blemmer® 50PEP-300 Polyethyleneglycol (3.5) Polypropyleneglycol (2.5) Methacrylate, NOF Corporation
MA EO/PO-800	Blemmer® 55PET-800 Polyethyleneglycol (10) Polypropyleneglycol (5) Methacrylate, NOF Corporation
MAMD	Methacrylamide
MMA	Methyl Methacrylate
MPEG 350	Bisomer® 350 MA Methoxy Polyethyleneglycol (8) Methacrylate, GEO Specialty Chemicals
MPEG 400	Blemmer® PME-400 Methoxy Polyethyleneglycol (9) Methacrylate, NOF Corporation
MPEG S10 W	Bisomer® S10 W Methoxy Polyethyleneglycol (23) Methacrylate, GEO Specialty Chemicals
NPEA-1300	Blemmer® ANE-1300, Nonylphenoxy Polyethyleneglycol (30) Acrylate, NOF Corporation
OEO/POMA	Blemmer® 50POEP-800B Octoxy

- 59 -

	Polyethyleneglycol (8) Polypropyleneglycol (6) Methacrylate, NOF Corporation (hydrophobe = 2-ethylhexyl)
PEA	Blemmer® AAE-300 Phenoxy Polyethyleneglycol (5.5) acrylate, NOF Corporation
PEO/POMA	Blemmer® 43PAPE-600B Phenoxy Polyethyleneglycol (6) Polypropyleneglycol (6) Methacrylate, NOF Corporation
SEM-400	Blemmer® PSE-400 Stearoxy Polyethyleneglycol (9) Methacrylate, NOF Corporation
SEM-1300	Blemmer® PSE-1300 Stearoxy Polyethyleneglycol (30) Methacrylate, NOF Corporation
SMA	Stearyl Methacrylate
STYSEM-25	Sipomer®, ω -Tristyrylphenyl Polyoxyethylene (25) Methacrylate)
Sulfochem™ ALS-K	Ammonium Lauryl Sulfate (anionic surfactant preserved with Kathon® CG preservative from Rohm and Haas Company), Lubrizol Advanced Materials, Inc. (30% active)
Sulfochem™ ES-2	Sodium Laureth Sulfate - 2 moles of ethoxylation (anionic surfactant), Lubrizol Advanced Materials, Inc. (26% active)
Sulfochem™ SLS	Sodium Lauryl Sulfate (anionic surfactant), Lubrizol Advanced Materials, Inc. (30% active)
Sulfochem™ TLS	TEA-Lauryl Sulfate (anionic surfactant) Lubrizol Advanced Materials, Inc. (40% active)
TBHP	tert-butyl t-butyl hydroperoxide
VA	Vinyl Acetate
VA-10	Vinyl Decanoate
VP	N-Vinylpyrrolidone
i-PAMD	iso-Propylacrylamide
MAMD	Methacrylamide

[0187] The Table 1 sets forth the solubility parameters for homopolymers polymerized from the listed monomers.

TABLE 1

Polymer	Hansen Solubility Parameter Constants ¹			Solubility Parameter ² (δ_i)	Monomer Molecular Weight
	D	P	H		
SMA	16.7	1.2	4.1	17.0	338.6
LMA	16.6	1.7	4.5	17.0	254.4
s-BMA	15.4	2.2	5.9	17.2	142.2
EMA	16.3	3.3	6.8	17.6	114.1
MMA	16.4	3.1	7.4	17.9	100.1

Polymer	Hansen Solubility Parameter Constants ¹			Solubility Parameter ² (δ_i)	Monomer Molecular Weight
	D	P	H		
BA	16.4	4.5	7.2	18.1	128.2
VA10	16.6	4.5	6.6	18.5	198.3
BEM	16.7	0	8.5	18.5	1494
EA	16.4	5.5	8.2	18.7	100.1
VA	16.6	5.6	9.2	19.2	86.1
MA	16.6	5.6	9.2	19.2	86.1
i-BMA	16.2	2.4	6.0	19.3	142.2
HBMA	16.6	4.6	12.2	20.9	158.2
VP	16.9	10.3	7.3	21.1	111.1
HPMA	16.6	5.0	13.5	21.5	144.2
HEMA	17.0	10.1	16.3	22.8	130.1
HPA	16.8	7.1	16.9	22.9	130.1
AN	17.1	15.0	6.3	23.2	53.1
i-PAMD	17.2	12.0	9.9	24.7	113.2
P2-HEA	17.2	13.2	19.1	24.7	116.1
PMAMD	17.6	14.3	11.8	24.8	85.1
PAM	18.7	14.7	12.3	28.1	71.1

¹D (dispersion), P (polar) and H (hydrogen bonding) values listed in S. Abbott, C.M. Hansen, H. Yamamoto, R.S. Valpey "Hansen Solubility Parameters in Practice", 3rd Ed. Version 3.1, (Hansen-Solubility.com) ISBN 978-0-9551220-2-6.

²Calculated by the Yamamoto Molecular Break Estimation Method, "Hansen Solubility Parameters in Practice", *supra*.

Example 1

[0188] An emulsion polymer polymerized from a monomer mixture comprising 50 wt.% EA, 10 wt.% n-BA, 10 wt.% MMA, 30 wt.% HEMA, and crosslinked with APE (0.08 wt.% based on the weight of the dry polymer) is synthesized as follows.

[0189] A monomer premix is made by mixing 140 grams of water, 16.67 grams of Sulfochem™ SLS surfactant (hereafter SLS), 250 grams of EA, 50 grams of n-BA, 50 grams of MMA, 0.57 grams of 70% APE, and 150 grams of HEMA. Initiator A is made by mixing 2.86 grams of 70% TBHP in 40 grams of water. Reductant A is prepared by dissolving 0.13 grams of erythorbic acid in 5 grams of water. Reductant B is prepared by dissolving 2.0 grams of erythorbic acid in 100 grams of water. A 3 liter reactor vessel is charged with 800 grams of

water and 1.58 grams of SLS surfactant, and then is heated to 60°C under a nitrogen blanket and proper agitation. Initiator A is then added to the reaction vessel and followed by adding reductant A. After about 1 minute, the monomer premix is metered to the reaction vessel for over a period of 150 minutes. About 3 minutes after the start of monomer premix proportioning, reductant B is metered to the reaction vessel for over a period of 180 minutes. After completion of reductant B feed, the temperature of the reaction vessel is maintained at 60°C for 60 minutes. The reaction vessel is then cooled to 55°C. A solution of 1.79 grams of 70% TBHP and 0.58 grams of SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.05 grams of erythorbic acid and 0.1 grams of SLS in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 55°C. After 30 minutes, a solution of 1.79 grams of 70% TBHP and 0.3 grams of SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.0 grams of erythorbic acid and 0.17 grams of SLS in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 55°C for about 30 minutes. Then, the reaction vessel is cooled to room temperature and its contents are filtered through 100 µm cloth. The pH of the resulting emulsion is adjusted to 5 to 6 with ammonium hydroxide. The polymer emulsion has 30 wt.% polymer solids, a viscosity 15 cps, a particle size 209 nm, and a composite solubility parameter (δ_c) of 19.6.

[0190] The composite solubility parameter of the polymer is determined by the following calculations:

[0191] For 100g of polymer, the number of moles of each monomer is calculated as follows:

$$\text{EA (50/100.11 = 0.5)}$$

$$\text{n-BA (10/128.17 = 0.08)}$$

$$\text{MMA (10/100.12 = 0.1)}$$

$$\text{HEMA (30/130.14 = 0.23)}$$

- 62 -

[0192] The total number of moles of monomer is $0.5+0.08+0.1+0.23 = 0.91$.

[0193] The mole fractions (x_i) of the various monomer components are:

EA ($0.5/0.91 = 0.55$)

n-BA ($0.08/0.91 = 0.09$)

MMA ($0.1/0.91 = 0.11$)

HEMA ($0.23/0.91 = 0.25$)

$\delta_c = \sum x_i \delta_i = (0.55 \times 18.7) + (0.09 \times 18.1) + (0.11 \times 17.9) + (0.25 \times 22.8) = 19.6$, where the solubility parameters of homopolymers of EA, n-BA, MMA and HEMA are 18.7, 18.1, 17.9 and 22.8 respectively.

Example 2

[0194] An emulsion polymer polymerized from a monomer mixture comprising 35 wt.% EA, 20 wt.% n-BA, 45 wt.% HEMA, and crosslinked with APE (0.08 wt.% based on the weight of the dry polymer) is prepared as follows.

[0195] A monomer premix is made by mixing 140 grams of water, 5 grams of SLS, 175 grams of EA, 100 grams of n-BA, 0.57 grams of 70% APE, and 225 grams of HEMA. Initiator A is made by mixing 2.86 grams of 70% TBHP in 40 grams of water. Reductant A is prepared by dissolving 0.13 grams of erythorbic acid in 5 grams of water. Reductant B is prepared by dissolving 2.0 grams of erythorbic acid in 100 grams of water. A 3 liter reactor vessel is charged with 800 grams of water, 13.3 grams of SLS, and 25 grams of poly(vinyl alcohol) (having an average molecular weight 13,000-23,000 Daltons and 87-89% hydrolyzed from Sigma-Aldrich Co.). The reactor vessel is heated to 60°C under a nitrogen blanket and proper agitation. Initiator A is then added to the reaction vessel and followed by the addition of reductant A. After about 1 minute, the monomer premix is metered into the reaction vessel over a period of 150 minutes. About 3 minutes after the start of monomer premix metering, reductant B is metered into the reaction vessel over a period of 180 minutes. After completion of reductant B feed, the temperature of the reaction vessel is

maintained at 60°C for 60 minutes. The reaction vessel is then cooled to 55°C. A solution of 1.79 grams of 70% TBHP and 0.58 grams of 30% SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.05 grams of erythorbic acid and 0.1 grams of SLS in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 55°C. After 30 minutes, a solution of 1.79 grams of 70% TBHP and 0.3 grams of SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.0 grams of erythorbic acid solution and 0.17 grams of SLS in 25 grams of water is added to the reaction vessel. The reaction vessel was maintained at 55°C for about 30 minutes. Then, the reaction vessel is cooled to room temperature and its contents are filtered through 100 µm cloth. The pH of the resulting emulsion is adjusted to between 5 and 6 with ammonium hydroxide. The polymer emulsion has 29.74 wt.% polymer solids, a viscosity of 21cps, a particle size of 109 nm, and a composite solubility parameter (δ_c) of 20.2, as calculated by the method in Example 1.

Example 3

[0196] An emulsion polymer polymerized from a monomer mixture comprising 45 wt.% EA, 15 wt.% n-BA, 45 wt.% HEMA, and crosslinked with APE (0.08 wt.% based on the weight of the dry polymer) is prepared by a method similar to Example 2 except that 200 grams of EA and 75 grams of n-BA are used. The polymer emulsion has 29.43 wt.% polymer solids, a viscosity of 26 cps, a particle size 101 nm, and a composite solubility parameter (δ_c) of 20.2, as calculated by the method in Example 1.

Example 4 (comparative)

[0197] An emulsion polymer polymerized from a monomer mixture comprising 50 wt.% EA, 20 wt.% MMA, 30 wt.% HEMA, and crosslinked with APE (0.35 wt.% based on the weight of the dry polymer) is prepared as follows.

[0198] A monomer premix is made by mixing 140 grams of water, 16.67 grams of SLS, 250 grams of EA, 75 grams of MMA, 1.75 grams of APE, and 150 grams of HEMA. Initiator A is made by mixing 2.86 grams of 70% TBHP in 40

grams of water. Reductant A is prepared by dissolving 0.13 grams of erythorbic acid in 5 grams of water. Reductant B is prepared by dissolving 2.0 grams of erythorbic acid in 100 grams of water. A 3 liter reactor vessel is charged with 800 grams of water and 1.58 grams of SLS, and then is heated to 60°C under a nitrogen blanket and proper agitation. Initiator A is then added to the reaction vessel and followed by adding reductant A. After about 1 minute, the monomer premix is metered to the reaction vessel over a period of 144 minutes. About 3 minutes after the start of monomer premix metering, reductant B is proportioned to the reaction vessel over a period of 180 minutes. After completion of monomer premix feed, 25 grams of MMA is metered into the reaction vessel over a period of 6 minutes. After completion of the reductant B feed, the temperature of the reaction vessel is maintained at 60°C for 60 minutes. The reaction vessel is then cooled to 55°C. A solution of 1.79 grams of 70% TBHP and 0.58 grams of SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.05 grams of erythorbic acid and 0.1 grams of 30% SLS in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 55°C. After 30 minutes, a solution of 1.79 grams of 70% TBHP and 0.3 grams of 30% SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.0 grams of erythorbic acid solution and 0.17 grams of SLS in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 55°C for about 30 minutes. Then, the reaction vessel is cooled to room temperature and filtered through 100 µm cloth. The pH of the resulting emulsion is adjusted to between 5 and 6 with ammonium hydroxide. The polymer emulsion has 28.65 wt.% polymer solids, a viscosity 6 cps, a particle size 94 nm, and a composite solubility parameter (δ_c) of 19.7, as calculated by the method in Example 1. This polymer contains a relatively high level of a crosslinker (APE).

Example 5 (comparative)

[0199] An emulsion polymer polymerized from a monomer mixture comprising 50 wt.% EA, 20 wt.% MMA, 30 wt.% HEMA, and crosslinked with APE (0.53 wt.% based on the weight of the dry polymer) is prepared by a

method similar to Example 4 except that 2.65 grams of APE is used. The polymer emulsion has 26.31 wt.% polymer solids, a viscosity of 5 cps, a particle size 94 nm, and a composite solubility parameter (δ_c) of 19.7, as calculated by the method in Example 1. This polymer contains a relatively high level of crosslinker (APE).

Example 6 (comparative)

[0200] An emulsion polymer polymerized from a monomer mixture comprising 35 wt.% EA, 20 wt.% n-BA, 45 wt.% HEMA, and no crosslinker is prepared by a method similar to Example 2 except that no APE is used. The polymer emulsion has 29.55 wt.% polymer solids, a viscosity of 26 cps, a particle size 93 nm, and a composite solubility parameter (δ_c) of 20.2, as calculated by the method in Example 1.

Example 7 (comparative)

[0201] An emulsion polymer polymerized from a monomer mixture comprising 70 wt.% EA, 20 wt.% n-BA, 10 wt.% HEMA, and crosslinked with APE (0.08 wt.% based on the weight of the dry polymer) is synthesized by a method similar to Example 2. The polymer emulsion has 29.73 wt.% polymer solids, a viscosity of 26 cps, a particle size 93 nm, and a composite solubility parameter (δ_c) of 18.8, as calculated by the method in Example 1. The composite solubility parameter of this polymer is below 19.0 MPa^{1/2}.

Example 8

[0202] An emulsion polymer polymerized from a monomer mixture comprising 40 wt.% EA, 15 wt.% n-BA, 10 wt.% HEA, 35 wt.% HEMA, and crosslinked with APE (0.06 wt.% based on the dry weight of the polymer) is prepared as follows.

[0203] A monomer premix is made by mixing 140 grams of water, 5 grams of SLS, 200 grams of EA, 75 grams of n-BA, 50 grams of 2-hydroxyl ethyl acrylate (HEA), and 175 grams of HEMA. Initiator A is made by mixing 2.86 grams of 70% TBHP in 40 grams of water. Reductant A is prepared by

dissolving 0.13 grams of erythorbic acid in 5 grams of water. Reductant B is prepared by dissolving 2.0 grams of erythorbic acid in 100 grams of water. A 3 liter reactor vessel is charged with 800 grams of water, 13.3 grams of 30% SLS, and 25 grams of poly(vinyl alcohol) (having an average molecular weight 13,000-23,000 Daltons and 87-89% hydrolyzed). The reactor vessel is heated to 60°C under a nitrogen blanket and proper agitation. Initiator A is then added to the reaction vessel and followed by the addition of reductant A. After about 1 minute, the monomer premix is metered to the reaction vessel over a period of 150 minutes. About 3 minutes after the start of monomer premix metering, reductant B is metered to the reaction vessel over a period of 180 minutes. About 60 minutes after the start of monomer premix metering, 0.43 grams of 70% APE is added to the monomer premix. After completion of reductant B feed, the temperature of the reaction vessel is maintained at 60°C for 60 minutes. The reaction vessel is then cooled to 55°C. A solution of 1.79 grams of 70% TBHP and 0.58 grams of SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.05 grams of erythorbic acid and 0.1 grams of SLS in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 55°C. After 30 minutes, a solution of 1.79 grams of 70% TBHP and 0.3 grams of SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.0 grams of erythorbic acid solution and 0.17 grams of SLS in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 55°C for about 30 minutes. Then, the reaction vessel is cooled to room temperature and the contents are filtered through 100 µm cloth. The pH of the resulting emulsion is adjusted to between 5 and 6 with ammonium hydroxide. The polymer emulsion had 30.44% polymer solids, a viscosity of 17cps, a particle size 99 nm, and a composite solubility parameter (δ_c) of 20.5, as calculated by the method in Example 1.

Example 9

[0204] An emulsion polymer polymerized from a monomer mixture comprising 20 wt.% EA, 15 wt.% n-BA, 20 wt.% VA, 45 wt.% HEMA, and crosslinked with APE (0.06 wt.% based on the dry weight of the polymer) is

synthesized in a manner similar to that of Example 8. The monomer mixture contains 20 grams of VA, 20 grams of EA, 75 grams of n-BA, and 225 grams of HEMA. The poly(vinyl alcohol) in the reactor is switched to one with an average molecular weight about 9,000-1,0000 Daltons and 80% hydrolyzed. The polymer emulsion has 30.1 wt.% polymer solids, a viscosity of 14 cps, a particle size of 135 nm, and a composite solubility parameter (δ_c) of 20.4, as calculated by the method in Example 1.

Example 10

[0205] An emulsion polymer polymerized from a monomer mixture comprising 20 wt.% EA, 15 wt.% n-BA, 20 wt.% VA, 45 wt.% HEMA, and crosslinked with APE (0.06 wt.% based on the dry weight of the polymer) is synthesized in a manner similar to that of Example 9 except APE is added into the monomer premix at about 90 minutes after the start of monomer premix metering. The resulting polymer emulsion has 29.94 wt.% polymer solids, a viscosity of 16 cps, a particle size of 130 nm, and a composite solubility parameter (δ_c) of 20.4, as calculated by the method in Example 1.

Examples 11 to 14

[0206] A free radical initiated dispersion polymerization is utilized to make crosslinked, nonionic, amphiphilic polymers of the invention. The polymerization reactor consists of a water-cooled resin kettle equipped with a reflux condenser, nitrogen purging tube, a mechanical agitator and a thermal-couple connected to a temperature control module. Admixtures of monomers, crosslinkers and processing aids are set forth in Table are first added to the resin kettle, followed by polymerization solvent. The quantities of these components in grams for the various polymer preparations are shown in the table. While the reaction medium is heated to the target polymerization temperature, the reactor is purged with nitrogen for at least half an hour. As the reactor temperature reaches the set polymerization temperature, typically at about 67°C, the initiator solution is injected to start the polymerization. The polymerization is continued for at least 6 hours at 67°C before a series of shots of additional initiator solution are

injected into the reactor to reduce residual monomers to acceptable levels. The final product is recovered as a fine powder after the polymerization solvent is removed by rotary evaporator under vacuum followed by a gentle milling process. The total polymer solids in the final dispersion is typically at about 30 wt.%.

TABLE 2

Example No.	NVP (wt.%) ¹	VA (wt.%) ¹	SMA ¹ (wt.%)	LMA ¹ (wt.%)	VA-10 (wt.%) ¹	APE ² (wt.%) ²	Stabilizer ³ (wt.%) ²	PGS ⁴ (wt.%) ²	CYCLO ² (wt.%) ²	Initiator ⁵ (wt.%) ²
11	84	15	1	--	--	0.1	6	1	231	0.12
12	84	15	--	1	--	0.1	6	1	231	0.12
13	64	35	--	--	1	0.1	6	1	230	0.12
14 ⁶	84	15	--	--	1	--	6	1	231	0.12

¹Based on the weight of the total monomers

²Based on the dry weight of the polymer

³50/30/20 (wt.%) copolymer of N-vinyl pyrrolidone/stearyl methacrylate/butyl methacrylate employed as a polymeric dispersion stabilizer

⁴Reaction product C₂₀-C₂₄ substituted succinic anhydride and glycerin and or polyglycerol containing 2 to 6 glycerin units employed as a processing aid

⁵2,2'-azobis(2-methylbutyronitrile)

⁶Comparative Example

[0207] Table 3 summarizes the constituent components of the various polymers prepared in Examples 11 to 14.

TABLE 3

Example No.	Composition ¹ Monomer/(wt. %)	APE (wt. %) ²	Composite Solubility Parameter (δ_0) ³
11	NVP(84)/VA(15)/SMA(1)	0.1	20.7
12	NVP(84)/VA(15)/LMA(1)	0.1	20.7
13	NVP(64)/VA(35)/VA-10(1)	0.1	19.6
14 ⁴	NVP(84)/VA(15)/VA-10(1)	--	20.7

¹Weight % of polymerized monomer repeating unit

²Based on the dry weight of the polymer

³Calculated by the method in Example 1

⁴Comparative Example

Examples 15 to 21

[0208] The swelling of individual polymer particles in the emulsions of Examples 1 to 7 by the anionic surfactant, sodium dodecyl sulfate (SDS), is determined by preparing test samples containing 0.01 wt.% of the polymer (total polymer solids), 20 mM sodium chloride at surfactant concentrations ranging from 0 to 6 mM in water. In cases where there is swelling, the particle size, measured by dynamic light scattering (DLS), remained constant up to a critical surfactant concentration but increased monotonically above this concentration to a plateau value at the highest surfactant concentrations. Referring to Figure 1, a swelling or expansion ratio is obtained for the polymer of Example 16 by dividing the plateau value (250 nm) by the size of the particle below the critical concentration threshold (93.5 nm) (polymer expansion ratio: 250 nm/93.5 nm = 2.7).

[0209] Samples containing 3 wt.% polymer solids and 5 wt.% SLS in water are prepared using each of the polymers prepared in Examples 1 to 7. The yield stress, viscosity and shear thinning index of these samples were determined by oscillatory and steady shear measurements on a controlled stress rheometer (TA Instruments AR1000N rheometer, New Castle, DE) with cone and plate geometry (40 mm cone with a cone angle of 2 degrees and 56 μ m gap) at 25°C. The oscillatory measurements are performed at a fixed frequency ranging from 1Hz to 0.001Hz. The elastic and viscous moduli (G' and G" respectively) are obtained as a function of increasing stress amplitude. In cases where the swollen polymer particles created a jammed network, G' is larger than G" at low

stress amplitudes but decreases at higher amplitudes crossing G'' because of rupture of the network. The stress corresponding to the crossover of G' and G'' is noted as the yield stress. Figure 2 illustrates the G' (solid fill) and G'' (no fill) crossover point (yield stress value) for the yield stress fluid of Example 17. A plot of viscosity versus shear rate was obtained from the steady shear measurements. The viscosity at a shear rate of 3s^{-1} is noted. The shear thinning index is obtained from a power law fit ($\eta = K\gamma^{n-1}$) in the shear rate range 0.1 to 1s^{-1} where η is viscosity, γ is shear rate, n is the shear thinning index and K is a constant. The optical clarity (expressed as percent transmittance or %T) of the samples was measured using a Brinkmann PC 910 colorimeter with a 420nm filter. The results of these measurements are shown in Table 4, along with the polymer expansion ratio.

TABLE 4

Example No.	Polymer No.	Yield Stress (Pa)	Viscosity (Pas)	Shear Thinning Index	% T	Polymer Expansion Ratio	Suspension Stability (wks.)
15	1	2.7	1.1	0.26	28.5	2.9	16+
16	2	3.0	1.2	0.29	41.5	2.7	16+
17	3	1.6	1.0	0.3	52	3.0	16+
18 (comparative)	4	NONE	0.024	1.0	4.5	2.2	Fail
19 (comparative)	5	NONE	0.023	1.0	4.4	2.2	Fail
20 (comparative)	6	NONE	0.06	1.0	93	--	Fail
21 (comparative)	7	NONE	0.002	1.0	4.9	1.2	Fail

[0210] It is clear that the compositions of Examples 15 to 17 (prepared with crosslinked amphiphilic polymers having expansion ratios greater than 2.5) have a high yield stress (greater than 0.5 Pa), excellent shear thinning and good optical clarity. Comparative formulations Examples 18 and 19 are formulated with polymers having a relatively high a level of crosslinker and they are not able to swell adequately in the surfactant medium. These compositions do not

display a yield stress or shear thinning and have extremely low viscosities and optical clarity.

[0211] Comparative Example 20 is formulated with a polymer that contains no crosslinking. In this case there is high optical clarity but no yield stress or shear thinning attributes. Comparative Example 21 is formulated with a polymer having the right level of crosslinker but too low a level of hydrophilic monomer. This polymer also does not exhibit adequate swelling in the surfactant medium and displays no yield stress or shear thinning attributes coupled with poor optical clarity and low viscosities.

[0212] The ability of a polymer system to suspend active and/or aesthetically pleasing insoluble oily, gaseous and particulate materials is important from the standpoint of product efficacy and appeal. The long-term suspension of 1.2 mm sized beads with specific gravity of approximately 1.4 (Unisphere™ REL 552 from Induchem AG, Switzerland) is examined in Examples 16 to 22. A six dram vial (approximately 70 mm high x 25 mm in diameter) is filled to the 50 mm point with each formulation. The beads are weighed into each sample (0.6 wt.% based on the weight of the total formulation) and stirred gently with a wooden spatula until they are uniformly dispersed throughout each sample. The vials are placed on a lab bench at ambient room temperature to age for a 16 week period. The bead suspension property of each sample is monitored on a daily basis. The suspension results are visually observed over the 16 week test period. The beads remain suspended (do not rise or settle) in the formulations of the invention. The formulations of Comparative Examples 19 to 22 failed in that the beads settled to the bottom of the vials after 2 weeks.

Example 22

[0213] This example illustrates the effect of alternative anionic surfactants containing different salts on the rheology and optical clarity of yield stress fluids. Aqueous compositions containing 3 wt.% (total polymer solids) of the polymer from Example 2 and 5 wt.% surfactant (active material) listed in the table below

are prepared and the yield stress, viscosity, shear thinning index and optical clarity are measured as in Examples 15 to 21. The results are shown in Table 5.

TABLE 5

Salt	Surfactant	Yield Stress (Pa)	Viscosity (Pa·s)	Shear Thinning Index	%T
Triethylammonium	Sulfochem TM TLS	3.3	1.5	0.18	10
Ammonium	Sulfochem TM ALS-K	5.0	2.2	0.15	18

[0214] It is clear that yield stress fluids displaying high yield stresses, excellent shear thinning and acceptable optical clarity are obtained with various anionic surfactants.

Example 23

[0215] This example illustrates a combination of anionic ethoxylated surfactant and amphoteric surfactant on the rheology and optical clarity of yield stress fluids containing the polymers of the invention. Aqueous compositions containing 3 wt.% polymer solids and 14 wt.% of a surfactant blend (12 wt.% (active) anionic surfactant, SulfochemTM ES-2 and 2 wt.% (active) amphoteric surfactant, ChembetaineTM CAD, are prepared by mixing the polymer and the surfactant combination. The yield stress, viscosity, shear thinning index and optical clarity are measured as in Examples 15 to 21. The results are shown in Table 6.

TABLE 6

Polymer No.	Yield Stress (Pa)	Viscosity (Pa·s)	Shear Thinning Index	%T
Ex. 8	4.1	2.2	0.33	59
Ex. 9	6.8	2.3	0.24	32
Ex. 10	3.8	1.5	0.32	74

[0216] Yield stress fluids displaying high yield stresses, excellent shear thinning and acceptable optical clarity are obtained by using polymers of the invention in combination with a mixture of anionic and amphoteric surfactant.

[0217] The long-term suspension of 1.2 mm sized beads with a specific gravity of approximately 1.4 (Unisphere REL 552 from Induchem AG, Switzerland) is examined for the yield stress fluids in Table 6 according to the method of Examples 15 to 21. The beads remain suspended in the yield stress fluid formulations set forth in this example for over 4 months at room temperature (approximately 23°C).

[0218] Figure 3 shows oscillatory rheology measurements on the yield stress fluid formulated above from the polymer of Example 9. The vertical line drawn through the crossover point of G' (no fill) and G" (solid fill) on the plot indicates the boundary between a jammed network of micro-gels at low stresses and a fluid above a threshold (yield) stress. The plot of G" versus stress displays a maximum that is characteristic of a soft glassy material (SGM).

Example 24

[0219] This example illustrates the influence of crosslinked, nonionic, amphiphilic polymer prepared by dispersion polymerization on formulating yield stress fluids with an anionic surfactant in water. Samples containing 2 wt.% polymer (total polymer solids) and 2 wt.% SLS surfactant (active material) in water are prepared using the polymers prepared in Examples 11 to 14. The yield stress, viscosity, shear thinning index and optical clarity of these samples are determined using the methods described in Examples 15 to 21. The results are presented in Table 7.

TABLE 7

Polymer No.	Yield Stress (Pa)	Viscosity (Pa·s)	Shear Thinning Index	%T
11	1.9	1.4	0.3	85
12	2.9	1.6	0.29	86
13	0.6	0.8	0.4	94
14 (comparative)	None	0.015	1.0	99

[0220] It is clear that the yield stress fluids formulated with the polymers of Examples 11 to 13 display high yield stresses, good shear thinning indices and

excellent optical clarity. The comparative composition formulated with the polymer of Comparative Example 14 which does not contain any crosslinker has no yield stress value.

Example 25 (comparative)

[0221] This example illustrates the behavior of nonionic hydrophobically modified associative thickeners in combination with an anionic surfactant in water.

[0222] A hydrophobic ethoxylated urethane (HEUR) polymer (Aculyn® 44 from Dow Chemical) and a hydrophobically modified hydroxyethylcellulose (HMHEC) polymer (Natrosol® Plus 330 PA from Ashland Chemical) are combined with SDS surfactant to prepare compositions containing 3 wt.% polymer (total polymer solids) and 5 wt.% surfactant (active material) in water. The rheology of the compositions is determined using the procedure described in Example 1. In both cases it is found that the samples did not exhibit a yield stress value.

Example 26

[0223] This example compares the effect of pH on the yield stress of fluid compositions containing a mixture of surfactant and polymer of the invention versus compositions containing a pH responsive polymer formulated in the same surfactant system. The comparative polymer is Acrylates Crosspolymer-4 (INCI) (marketed as Carbopol® Aqua SF-2, Lubrizol Advanced Materials, Inc.), a cross-linked, anionic acrylic emulsion polymer of (meth)acrylic acid or one or more of their C₁ to C₄ alkyl esters.

[0224] Several examples containing 2.5% (total polymer solids) of the polymer of Example 10 and 14wt% of a surfactant blend (12 wt.% (active material) anionic ethoxylated surfactant, Sulfochem™ ES-2, and 2 wt.% (active material) amphoteric surfactant Chembetaine™ CAD) and 10 mM sodium chloride in water are prepared. Identical samples are formulated with the comparative Acrylates Crosspolymer-4 (Carbopol™ Aqua SF-2, Lubrizol Advanced Materials, Inc.) The pH of these samples is adjusted to values

ranging from 3 to 12 using dilute aqueous solutions of sodium hydroxide (18% wt./wt.) or citric acid (50% wt./wt.). The yield stress at a frequency of 1Hz is measured using the methods of Examples 15 to 21. The results for the compositions formulated with the polymer of Example 10 are shown in Table 8, and the results for compositions formulated with the pH responsive comparative polymer are shown in Table 9.

TABLE 8 (Invention)

pH	Yield Stress (Pa)
4	2.96
4.6	2.71
5.7	2.58
6.7	2.45
7.8	2.54
8.5	2.52
9.5	2.52
10.3	2.19
11.5	2.55

[0225] The yield stress values in Table 8 have a mean value of 2.56 Pa and standard deviation of 0.19 Pa whereas the yield stress values in Table 9 have a mean value of 1.58 Pa and a standard deviation of 2.07 Pa. It is clear that the polymer of the invention provides significantly more uniform yield stress over a broad range in pH compared to the control polymer.

TABLE 9 (Comparative)

pH	Yield Stress (Pa)
3.8	4.7
4.7	4.6
5.3	3.3
7.2	0
8.5	0
9.4	0
10.7	0
11.1	0

[0226] Long term suspension of 1.4mm sized beads with a specific gravity of approximately 1.3 (Unisphere REL 551 from Induchem AG, Switzerland) is examined according to the method of Examples 15 to 21. It is found that the beads remain suspended in all samples exemplified in Table 8 for over 4 months

at room temperature but the beads failed to remain suspended in the last five samples exemplified in Table 9.

Example 27

[0227] This example illustrates the effect of compositions of the invention on alignment of mica and pearlescence.

[0228] Samples containing 3 wt.% polymer and 5 wt.% of sodium dodecyl sulfate (SDS) in water are prepared using the polymers of Example 1 and Example 2. Mica platelets coated with iron oxide (Colorona Copper Cosmetic Pigment, product # 017378 from EM Industries, Inc.) are added to these samples at a concentration of 0.7 mg per ml. A drop of the sample containing mica is placed on a microscope slide, covered with a cover slip and allowed to equilibrate for 5 minutes. The slide is then placed on the stage of a microscope (Olympus BX51TRF) equipped with a polarizer, analyzer and a color camera. After focusing in bright field, the polarizer and analyzer are crossed and an image is captured with the color camera. The image is then decomposed into its three component color channels: red, green and blue. Using image analysis software (Image J software, National Institutes of Health), the total number of platelets darker than the background in the blue channel and the total number of platelets brighter than the background in the red channel are counted. Platelets that are not aligned under shear appear bright in the red channel when viewed with crossed polarizers. The fraction of platelets not aligned under shear is calculated as the total number of platelets counted in the red channel divided by the total number of platelets counted in the blue channel. The fraction of aligned platelets is calculated as 1 minus the fraction of platelets not aligned. Samples containing polymers of Example 1 and Example 2 show 88.8% and 87.4% alignment of mica platelets with standard deviations of 5.2 and 5.3, respectively. Alignment greater than 80% provides extremely pleasing visual appearance of pearlescence.

Examples 28 to 30

[0229] The following polymers are prepared by a dispersion polymerization process similar to Examples 11 to 14. Monomers, crosslinkers and processing aids used in the polymerization are given in Table 10.

TABLE 10

Ex. No.	NVP (wt.%)	VA (wt.%)	SMA (wt.%)	BEM ¹ (wt.%) ²	APE (wt.%) ²	Stabilizer ³ (wt.%) ²	PGS ⁴ (wt.%) ²	CYCLO (wt.%) ²	EtAc (wt.%) ²	Initiator ⁵ (wt.%) ²
28 ⁶	100	—	—	—	0.12	—	—	631	270	0.1
29	82.5	14.5	—	3	0.12	6	1	157	67	0.1
30	82	14	1	3	0.12	6	1	159	68	0.1

¹Ethoxylated (25) Behenyl Methacrylate (Sipomer BEM from Rhodia)

²Based on the dry weight of the polymer

³50/30/20 (wt.%) copolymer of N-vinyl pyrrolidone/stearyl methacrylate/butyl methacrylate utilized as a dispersion polymerization stabilizer

⁴Reaction product C₂₀-C₂₄ substituted succinic anhydride and glycerin and or polyglycerol containing 2 to 6 glycerin units utilized as a process aid

⁵2,2'-azobis(2-methylbutyronitrile)

⁶Comparative example

[0230] Table 11 summarizes the constituent components of the various polymers prepared in Examples 28 to 30.

TABLE 11

Example No.	Composition monomer (wt%)	APE (wt%) ²	Composite solubility Parameter (δ_c)
28 ¹	NVP(100)	0.12	21.1
29	NVP(82.5)/VA(14.5)/BEM(3)	0.12	20.5
30	NVP(82)/VA(14)/SMA(1)/BEM(3)	0.12	20.5

¹Comparative example

²Based on the dry weight of the polymer

Example 31

[0231] This example compares the performance of the hydrophilic homopolymer of Example 28 with that of a polymer of the invention based on Example 29. Samples containing 2 wt.% polymer solids and 7 wt.% surfactant (a mixture of 5 wt.% SulfochemTM ALS-K and 2 wt.% ChembetaineTM CAD based on active material) in water are prepared and the yield stress measured as in Examples 15 to 21. It is found that the control sample exhibits a yield stress of only 0.1 Pa whereas the invention sample shows a yield stress of 3.3 Pa. The

long term suspension of 1.2 mm sized beads with a specific gravity of approximately 1.4 (Unisphere REL 552 from Induchem AG, Switzerland) is examined according to the method of Examples 15 to 21. The beads remain suspended in the composition of the invention for over 4 months at room temperature but suspension is not achieved in the control sample.

Example 32

[0232] This example illustrates a composition containing a polymer of the invention prepared by the dispersion polymerization process (Example 30) with a surfactant mixture containing greater than 75 wt.% of an anionic ethoxylated surfactant. A sample containing 2.5 wt.% polymer solids and 14wt% surfactant (12wt% anionic ethoxylated surfactant SulfochemTM ES-2 and 2wt% amphoteric surfactant ChembetaineTM CAD based on active material) is prepared and the yield stress is measured as in Examples 15 to 21. The sample exhibited a yield stress of 2.1 Pa.

Example 33

[0233] An emulsion polymer is polymerized from a monomer mixture comprising 45wt% HEMA, 35wt% EA, 15wt% n-BA, 5wt% BEM, and crosslinked with APE (0.08wt% based on the dry weight of the polymer) is prepared as follows.

[0234] A monomer premix is made by mixing 140 grams of water, 3.75 grams of 40% alpha olefin sulfonate (AOS) aqueous solution, 175 grams of EA, 71 grams of n-BA, 33.33 grams of BEM and 225 grams of HEMA. Initiator A was made by mixing 2.86 grams of 70% TBHP in 40 grams of water. Reductant A is prepared by dissolving 0.13 grams of erythorbic acid in 5 grams of water. Reductant B is prepared by dissolving 2.0 grams of erythorbic acid in 100 grams of water. A 3-liter reactor vessel is charged with 800 grams of water, 10 grams of 40% AOS and 25 grams of Celvol[®] 502 PVA and then is heated to 65°C under a nitrogen blanket and proper agitation. Initiator A is then added to the reaction vessel and followed by adding reductant A. After about 1 minute, the monomer premix is metered into the reaction vessel over a period of 150 minutes;

simultaneously, reductant B is metered into the reaction vessel over a period of 180 minutes. After the addition of monomer premix, a solution of 0.40 grams of 70% APE and 3.6 grams n-BA is added into the monomer premixer. After the completion of monomer premix feed, 33 grams of water is added to flush the residual monomers from the premixer. After the completion of reductant B feed, the temperature of the reaction vessel is maintained at 65°C for 65 minutes. The reaction vessel is then cooled to 60°C. A solution of 1.79 grams of 70% TBHP and 0.13 grams of 40% AOS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.05 grams of erythorbic acid in 25 grams of water is added to the reaction vessel. After 30 minutes, a solution of 1.79 grams of 70% TBHP and 0.13 grams of 40% AOS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.05 grams of erythorbic acid in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 60°C for about 30 minutes. Then, the contents of the reaction vessel is cooled to room temperature and filtered through 100 µm cloth. The pH of the resulting emulsion is adjusted to 3.5-4.5 with 28% ammonium hydroxide. The resulting polymer latex has a solids level 30%, viscosity 16 cps, and particle size 110 nm and a composite solubility parameter (δ_c) of 20.6.

Example 34

[0235] An emulsion polymer polymerized from a monomer mixture comprising 45% HEMA 35wt% EA, 15wt% n-BA, 5wt% MPEG 350, and crosslinked with APE (0.08% based on the dry weight of the polymer) is prepared as follows.

[0236] A monomer premix is made by mixing 140 grams of water, 5 grams of 30% sodium lauryl sulfate (SLS) aqueous solution, 175 grams of EA, 71 grams of n-BA, 25 grams of Bisomer[®] MPEG 350 MA, and 225 grams of HEMA. Initiator A is made by mixing 2.86 grams of 70% TBHP in 40 grams of water. Reductant A is prepared by dissolving 0.13 grams of erythorbic acid in 5 grams of water. Reductant B is prepared by dissolving 2.0 grams of erythorbic acid in 100 grams of water. A 3-liter reactor vessel is charged with 800 grams of water, 13.33 grams of 30% SLS and 25 grams of Celvol[®] 502 PVA, and the contents

- 80 -

are heated to 65°C under a nitrogen blanket and proper agitation. Initiator A is added to the reaction vessel and followed by adding reductant A. After about 1 minute, the monomer premix is metered into the reaction vessel over a period of 150 minutes; simultaneously, reductant B is metered into the reaction vessel over a period of 180 minutes. After the addition of monomer premix, a solution of 0.40 grams of 70% APE and 3.6 grams n-BA is added into the monomer premixer. After the completion of monomer premix feed, 33 grams of water is added to flush the residual monomers in the premixer. After the completion of reductant B feed, the temperature of the reaction vessel is maintained at 65°C for 65 minutes. The reaction vessel is then cooled to 60°C. A solution of 1.79 grams of 70% TBHP and 0.17 grams of 30% SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.05 grams of erythorbic acid in 25 grams of water is added to the reaction vessel. After 30 minutes, a solution of 1.79 grams of 70% TBHP and 0.17 grams of 30% SLS in 25 grams of water is added to the reaction vessel. After 5 minutes, a solution of 1.05 grams of erythorbic acid in 25 grams of water is added to the reaction vessel. The reaction vessel is maintained at 60°C for about 30 minutes. Then, the reaction vessel is cooled to room temperature and filtered through 100 µm cloth. The pH of the resulting emulsion is adjusted to 3.5-4.5 with 28% ammonium hydroxide. The resulting polymer latex had a solids level of 30%, a viscosity of 16 cps, and particle size of 125 nm and a composite solubility parameter (δ_c) of 20.6.

Example 35

[0237] Samples containing 2.5% (total polymer solids) of the polymer of Example 33 and 17 wt.% of a surfactant blend (14 wt.% (active material) anionic surfactant Sulfochem™ ES-2, and 3 wt.% (active material) amphoteric surfactant Chembetaine™ CAD) and 0.1 wt.% sodium chloride in water are prepared. The pH of these samples is adjusted to values ranging from 3 to 12 using dilute aqueous solutions of sodium hydroxide (18% wt./wt.) or citric acid (50% wt./wt.). Yield stress and optical clarity for each sample is measured and recorded in Table 12. The yield stress at a frequency of 1Hz is measured on a controlled stress rheometer (TA instruments AR2000EX rheometer, New Castle, DE) with

cone and plate geometry (60mm cone with a cone angle of 2 degrees and 56 μm gap) at 25°C using the method described in Examples 15 to 21. The optical clarity (expressed as percent transmittance or %T) of each sample is measured using a Brinkmann PC 910 colorimeter with a 420 nm filter. The results are shown in Table 12.

Table 12

pH	Yield Stress (Pa)	Optical Clarity (%T)
3.9	7.4	72.1
4.9	7	75.5
5.8	6.7	76.1
6.4	6.7	77.9
7.2	6.5	78.4
8.7	5.7	77.1
9.6	5.5	78.5
10.3	5.7	78.7
11.4	5.6	77.9

[0238] The yield stress values have a mean value of 6.3 with a standard deviation of 0.7. The ratio of the standard deviation to the mean is 0.11 in the pH range 3 to 12. The optical clarity values in have a mean value of 76.9 and a standard deviation of 2.1. The ratio of the standard deviation to the mean is 0.03 in the pH range 3 to 12.

Example 36

[0239] Samples containing 2.5% (total polymer solids) of the polymer of Example 34 are prepared and evaluated for yield stress and optical clarity properties as described in Example 35. The results are given in Table 13.

Table 13

pH	Yield Stress (Pa)	Optical Clarity (%T)
3.7	10.1	42.1
4.4	8.9	38.4
5.9	9.6	37.9
6.3	7.4	35.4
7.1	8.3	37.2
8.6	8.4	37.3
9.7	8.5	35.3
10.2	8.6	36.9
11.7	9.4	36.5

[0240] The yield stress values have a mean value of 8.8 with a standard deviation of 0.8. The ratio of the standard deviation to the mean is 0.09 in the pH range 3 to 12. The optical clarity values have a mean value of 37.4 and a standard deviation of 2.0. The ratio of the standard deviation to the mean is 0.05 in the pH range 3 to 12.

Examples 37 to 54

[0241] Emulsion polymers of the invention are prepared from the monomer components and amounts (wt.% based on the total monomer weight) set forth in Table 14 in accordance with the procedures and conditions of Example 33. A crosslinking monomer (APE) is used at 0.1 wt.% (based on the dry weight of the polymer) in all examples.

Table 14

Examples 55 to 64

[0242] Emulsion polymers of the invention are prepared from the monomer components and amounts (wt.% based on the total monomer weight) set forth in Table 15 in accordance with the procedures and conditions of Example 33. A crosslinking monomer (APE) is used at 0.9 wt.% (based on the dry weight of the polymer) in all examples.

Table 15

WHAT IS CLAIMED IS:

1. A yield stress fluid composition comprising water, at least one nonionic amphiphilic polymer and at least one surfactant wherein the concentration of said polymer is 5 wt.% or less and the concentration of said surfactant is 30 wt.% or less, based on the total weight of the composition, and wherein said amphiphilic polymer has a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2}.
2. A yield stress fluid composition comprising water, at least one nonionic amphiphilic polymer and at least one surfactant wherein the concentration of said polymer is 5 wt.% or less and the concentration of said surfactant is 30 wt.% or less, based on the total weight of the composition, and wherein said amphiphilic polymer has a composite solubility parameter (δ_c) ranging from above about 19.3 MPa^{1/2} to about 21.0 MPa^{1/2} wherein said amphiphilic polymer contains repeating units polymerized from a monomer mixture comprising from about 0.1 to about 10 wt.% of an associative and/or a semi-hydrophobic monomer.
3. A composition of any of the preceding claims wherein the concentration of said polymer ranges from about 0.5 to about 3.5 wt.%.
4. A composition of any of the preceding claims wherein said polymer is prepared from a monomer mixture comprising at least one hydrophobic monomer and at least one hydrophilic monomer.
5. A composition of any of the preceding claims wherein said polymer is prepared from a monomer mixture comprising at least 30 wt.% of said hydrophilic monomers and at least 5 wt.% of said hydrophobic monomers.
6. A composition of any of the preceding claims wherein said monomer mixture comprises a crosslinking monomer which is present in an amount

ranging from about 0.01 to about 1 wt.%, based on the dry weight of the polymer.



7. A composition of any of the preceding claims wherein said crosslinking monomer contains an average of about 3 crosslinkable unsaturated moieties.

8. A composition of any of the preceding claims wherein said monomer mixture comprises a crosslinking monomer which is present in an amount sufficient to be incorporated into said polymer from about 0.01 to about 0.3 wt.%, based on the dry weight of the polymer.

9. A composition of any of the preceding claims wherein the said at least one hydrophilic monomer when homopolymerized has a solubility parameter (δ_i) greater than 21.0 MPa^{1/2}.

10. A composition of any of the preceding claims wherein said at least one hydrophobic monomer when homopolymerized has a solubility parameter (δ_i) less than or equal to about 19.3 MPa^{1/2}.

11. A composition of any of the preceding claims wherein the at least one hydrophilic monomer is selected from hydroxy(C₁-C₅)alkyl (meth)acrylates, N-vinyl amides, amino group containing monomers selected from (meth)acrylamide, diacetone acrylamide and monomers represented by the following formulas:

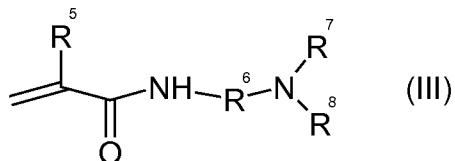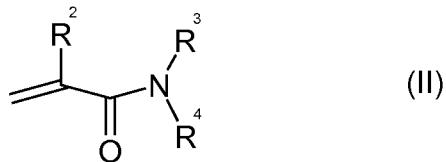

wherein R^2 is hydrogen or methyl, R^3 independently is selected from hydrogen, C_1 to C_5 alkyl and C_1 to C_5 hydroxyalkyl, and R^4 independently is selected from is C_1 to C_5 alkyl or C_1 to C_5 hydroxyalkyl, R^5 is hydrogen or methyl, R^6 is C_1 to C_5 alkylene, R^7 independently is selected from hydrogen or C_1 to C_5 alkyl, and R^8 independently is selected from C_1 to C_5 alkyl; and mixtures thereof.

12. A composition of any of the preceding claims wherein the at least one hydrophobic monomer is selected from esters of (meth)acrylic acid with alcohols containing 1 to 30 carbon atoms, vinyl esters of aliphatic carboxylic acids containing 1 to 22 carbon atoms, vinyl ethers of alcohols containing 1 to 22 carbon atoms, vinyl aromatic monomers, vinyl halides, vinylidene halides, and associative monomers.

13. A composition of any of the preceding claims wherein at least one monomer is selected from a semi-hydrophobic monomer.

14. A composition of any of the preceding claims wherein the at least one crosslinking monomer is selected from polyallyl ethers of trimethylolpropane, polyallyl ethers of pentaerythritol, polyallyl ethers of sucrose, and mixtures thereof.

15. A composition of any of the preceding claims wherein the at least one crosslinking monomer is selected from trimethylolpropane tri(meth)acrylate,

trimethylolethane tri(meth)acrylate, tetramethyolmethane tri(meth)acrylate, and mixtures thereof.

16. A composition of any of the preceding claims wherein the at least one crosslinking monomer is selected from pentaerythritol diallyl ether, pentaerythritol triallyl ether, pentaerythritol tetraallyl ether; and mixtures thereof.
17. A composition of any of the preceding claims wherein said polymer is in the form of particles that exhibit plateau swelling of at least a factor of 2.5 in linear dimension in the presence of sodium lauryl sulfate and 0.1 wt.% sodium chloride.
18. A composition of any of the preceding claims wherein the at least one surfactant is selected from an anionic, cationic, amphoteric, nonionic, and mixtures thereof.
19. A composition of any of the preceding claims wherein the at least one surfactant is selected from an anionic surfactant.
20. A composition of any of the preceding claims wherein the at least one surfactant is selected from an anionic surfactant and an amphoteric surfactant.
21. A composition of any of the preceding claims wherein the at least one anionic surfactant is ethoxylated.
22. A composition of any of the preceding claims wherein the at least one anionic surfactant contains an average of 1 to 3 moles of ethoxylation.
23. A composition of any of the preceding claims wherein the at least one anionic surfactant contains an average of 1 to 2 moles of ethoxylation.

24. A composition of any of the preceding claims wherein the at least one anionic surfactant is selected from sodium and ammonium salts of dodecyl sulfate, lauryl sulfate, laureth sulfate, and mixtures thereof.
25. A composition of any of the preceding claims wherein the at least one amphoteric surfactant is cocamidopropyl betaine.
26. A composition of any of the preceding claims wherein the at least polymer and the at least one surfactant are substantially free of ethylene oxide moieties.
27. A composition of any of the preceding claims wherein the concentration of surfactant is less than 25 wt.% (active material), based on the weight of the total composition.
28. A composition of any of the preceding claims wherein the concentration of surfactant ranges from about 6 to about 20 wt. % (active material), based on the weight of the total composition.
29. A composition of any of the preceding claims wherein the ratio of anionic surfactant to amphoteric surfactant (active material) is 10:1 to about 2:1 in one aspect, and 9:1, 8:1, 7:1 6:1, 5:1, 4.5:1, 4:1, or 3:1 in another aspect.
30. A composition of any of the preceding claims wherein the amount of polymer solids ranges from about 1 to about 3 wt.%, based on the weight of the total composition.
31. A composition of any of the preceding claims wherein said yield stress is at least 0.1 Pa.
32. A composition of any of the preceding claims wherein said yield stress is at least 0.5 Pa.

33. A composition of any of the preceding claims wherein said yield stress is at least 1 Pa.
34. A composition of any of the preceding claims wherein said composition is able to suspend beads of a size between 0.5 and 1.5 mm for at least one month at 23°C wherein the difference in specific gravity between the beads and water is between +/- 0.2 and 0.5.
35. A composition of any of the previous claims wherein said composition is able to suspend microcapsules of a size between 0.5 and 300 µm for at least one month at 23°C wherein the difference in specific gravity between the microcapsule beads and water is between +/- 0.01 and 0.5.
36. A composition of any of the preceding claims wherein said yield stress is substantially independent of pH in the pH range 2 to 14.
37. A composition of any of the preceding claims wherein said yield stress is substantially independent of pH in the pH range 3 to 10.
38. A composition of any of the preceding claims further comprising mica particles.
39. A composition of any of the preceding claims that is pearlescent in appearance.
40. A composition of any of the preceding claims wherein the percent optical transmission is at least 10%.
41. A composition of any of the preceding claims wherein the percent optical transmission is at least 20%.

- 90 -

42. A composition of any of the preceding claims wherein the viscosity is less than 2 Pa·s at a shear rate of 3 reciprocal seconds.

43. A composition of any of the preceding claims that has a shear thinning index less than 0.5 at shear rates between 0.1 and 1 reciprocal second.

44. A composition of any of the preceding claims wherein the elastic modulus is greater than the viscous modulus at oscillatory stress below a critical stress at a fixed frequency.

45. A composition of any of the preceding claims wherein said polymer is an emulsion polymer.

46. A composition of claim 45 wherein said yield stress is at least 0.1 Pa.

47. A composition of claim 46 wherein said yield stress is measured at a fixed frequency selected from a frequency range of 1Hz to 0.001Hz.

48. A composition of claims 45 to 47 wherein said emulsion polymer is polymerized from a monomer mixture comprising at least 30 wt.% of at least one C₁-C₄ hydroxyalkyl (meth)acrylate, 15 to 70 wt. of at least one C₁-C₁₂ alkyl (meth)acrylate, 5 to 40 wt.% of at least one vinyl ester of a C₁-C₁₀ carboxylic acid (based on the weight of the total monomers), and 0.01 to 1 wt.% of at least one crosslinker (based on the dry weight of the polymer).

49. A composition of claims 45 to 48 wherein said emulsion polymer is polymerized from a monomer mixture comprising at least 30 wt.% of at least one C₁-C₄ hydroxyalkyl (meth)acrylate, 15 to 70 wt. of at least one C₁-C₁₂ alkyl (meth)acrylate, 1 to 10 wt.% of at least one monomer selected from an associative monomer, a semi-hydrophobic monomer and mixtures thereof (based on the weight of the total monomers), and 0.01 to 1 wt.% of at least one crosslinker (based on the dry weight of the polymer).

50. A composition of claim 48 wherein said C₁-C₄ hydroxyalkyl (meth)acrylate is hydroxyethyl methacrylate, said C₁-C₁₂ alkyl acrylate is selected from methyl methacrylate, ethyl acrylate, butyl acrylate and mixtures thereof, said vinyl ester of a C₁-C₁₀ carboxylic acid is selected from vinyl formate, vinyl acetate, vinyl propionate, vinyl butyrate, vinyl isobutyrate, vinyl valerate, vinyl hexanoate, vinyl 2-methylhexanoate, vinyl 2-ethylhexanoate, vinyl iso-octanoate, vinyl nonanoate, vinyl neodecanoate, vinyl decanoate, vinyl versatate, vinyl laurate, vinyl palmitate, vinyl stearate, and mixtures thereof; and mixtures thereof.

51. A composition of claim 49 or 50 wherein said emulsion polymer is polymerized from a monomer mixture comprising hydroxyethyl methacrylate, and a monomer selected from methyl methacrylate, ethyl acrylate, butyl acrylate, vinyl acetate, vinyl neodecanoate, vinyl decanoate, an associative monomer, a semi-hydrophobic monomer, or mixtures thereof.

52. A composition of claim 51 wherein said emulsion polymer is polymerized from a monomer mixture comprising hydroxyethyl methacrylate, ethyl acrylate, butyl acrylate and a monomer selected from an associative and/or a semi-hydrophobic monomer.



53. A composition of claim 52 wherein said emulsion polymer is polymerized from a monomer mixture comprising hydroxyethyl methacrylate, ethyl acrylate, butyl acrylate and vinyl acetate.

54. A composition of claim 49, 51 or 52 wherein said emulsion polymer is polymerized from a monomer mixture comprising hydroxyethyl methacrylate, ethyl acrylate, butyl acrylate and a monomer selected from an associative and/or a semi-hydrophobic monomer.

55. A composition of claim 54 wherein said associative monomer comprises (i) an ethylenically unsaturated end group portion; (ii) a polyoxyalkylene mid-

section portion, and (iii) a hydrophobic end group portion containing 8 to 30 carbon atoms.


56. A composition of claim 55 wherein said associative monomer is represented by formulas VII and/or VIIA:

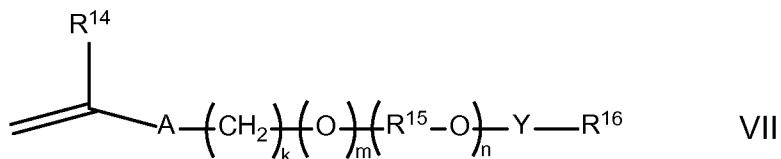

wherein R^{14} is hydrogen or methyl; A is $-\text{CH}_2\text{C}(\text{O})\text{O}-$, $-\text{C}(\text{O})\text{O}-$, $-\text{O}-$, $-\text{CH}_2\text{O}-$, $-\text{NHC}(\text{O})\text{NH}-$, $-\text{C}(\text{O})\text{NH}-$, $-\text{Ar}-(\text{CE}_2)_z-\text{NHC}(\text{O})\text{O}-$, $-\text{Ar}-(\text{CE}_2)_z-\text{NHC}(\text{O})\text{NH}-$, or $-\text{CH}_2\text{CH}_2\text{NHC}(\text{O})-$; Ar is a divalent arylene (e.g., phenylene); E is H or methyl; z is 0 or 1; k is an integer ranging from about 0 to about 30, and m is 0 or 1, with the proviso that when k is 0, m is 0, and when k is in the range of 1 to about 30, m is 1; D represents a vinyl or an allyl moiety; $(\text{R}^{15}-\text{O})_n$ is a polyoxyalkylene moiety, which can be a homopolymer, a random copolymer, or a block copolymer of $\text{C}_2\text{-C}_4$ oxyalkylene units, R^{15} is a divalent alkylene moiety selected from C_2H_4 , C_3H_6 , or C_4H_8 , and combinations thereof; and n is an integer in the range of about 2 to about 150 in one aspect, from about 10 to about 120 in another aspect, and from about 15 to about 60 in a further aspect; Y is $-\text{R}^{15}\text{O}-$, $-\text{R}^{15}\text{NH}-$, $-\text{C}(\text{O})-$, $-\text{C}(\text{O})\text{NH}-$, $-\text{R}^{15}\text{NHC}(\text{O})\text{NH}-$, or $-\text{C}(\text{O})\text{NHC}(\text{O})-$; R^{16} is a substituted or unsubstituted alkyl selected from a $\text{C}_8\text{-C}_{30}$ linear alkyl, a $\text{C}_8\text{-C}_{30}$ branched alkyl, a $\text{C}_8\text{-C}_{30}$ carbocyclic alkyl, a $\text{C}_2\text{-C}_{30}$ alkyl-substituted phenyl, an aralkyl substituted phenyl, and an aryl-substituted $\text{C}_2\text{-C}_{30}$ alkyl; wherein the R^{16} alkyl group, aryl group, phenyl group optionally comprises one or more

substituents selected from the group consisting of a hydroxyl group, an alkoxy group, benzyl group styryl group, and a halogen group.



57. A composition of claim 55 or 56 wherein said associative monomer is represented by formula VIIIB:

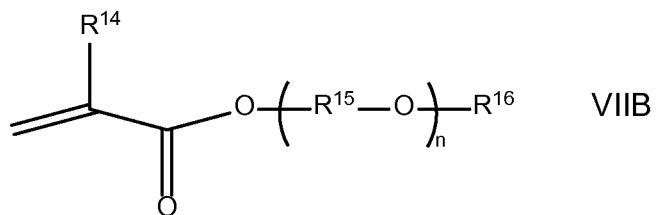

wherein R¹⁴ is hydrogen or methyl; R¹⁵ is a divalent alkylene moiety independently selected from C₂H₄, C₃H₆, and C₄H₈, and n represents an integer ranging from about 10 to about 60, (R¹⁵-O) can be arranged in a random or a block configuration; R¹⁶ is a substituted or unsubstituted alkyl selected from a C₈-C₃₀ linear alkyl, a C₈-C₃₀ branched alkyl, a C₈-C₃₀ carbocyclic alkyl, a C₂-C₃₀ alkyl-substituted phenyl, an aralkyl substituted phenyl, and an aryl-substituted C₂-C₃₀ alkyl, wherein the R¹⁶ alkyl group, aryl group, phenyl group optionally comprises one or more substituents selected from the group consisting of a hydroxyl group, an alkoxy group, benzyl group styryl group, and a halogen group.


58. A composition of claims 53 to 57 wherein said semi-hydrophobic monomer comprises (i) an ethylenically unsaturated end group portion; (ii) a polyoxyalkylene mid-section portion, and (iii) an end group portion selected from hydrogen or a alkyl group containing 1 to 4 carbon atoms.

59. A composition 58 wherein said semi-hydrophobic monomer is selected from at least one monomer represented by formulas VIII and IX:

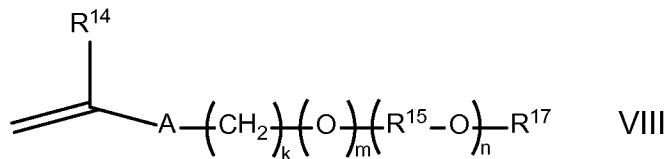

wherein R^{14} is hydrogen or methyl; A is $-\text{CH}_2\text{C}(\text{O})\text{O}-$, $-\text{C}(\text{O})\text{O}-$, $-\text{O}-$, $-\text{CH}_2\text{O}-$, $-\text{NHC}(\text{O})\text{NH}-$, $-\text{C}(\text{O})\text{NH}-$, $-\text{Ar}-(\text{CE}_2)_z-\text{NHC}(\text{O})\text{O}-$, $-\text{Ar}-(\text{CE}_2)_z-\text{NHC}(\text{O})\text{NH}-$, or $-\text{CH}_2\text{CH}_2\text{NHC}(\text{O})-$; Ar is a divalent arylene (e.g., phenylene); E is H or methyl; z is 0 or 1; k is an integer ranging from about 0 to about 30, and m is 0 or 1, with the proviso that when k is 0, m is 0, and when k is in the range of 1 to about 30, m is 1; $(\text{R}^{15}-\text{O})_n$ is a polyoxyalkylene moiety, which can be a homopolymer, a random copolymer, or a block copolymer of $\text{C}_2\text{-C}_4$ oxyalkylene units, R^{15} is a divalent alkylene moiety selected from C_2H_4 , C_3H_6 , or C_4H_8 , and combinations thereof; and n is an integer in the range of about 2 to about 150 in one aspect, from about 5 to about 120 in another aspect, and from about 10 to about 60 in a further aspect; R^{17} is selected from hydrogen and a linear or branched $\text{C}_1\text{-C}_4$ alkyl group; and D represents a vinyl or an allyl moiety.

60. A composition of claims 54 to 59 wherein said semi-hydrophobic monomer is selected from at least one monomer represented by formulas VIIIA and VIIIB:



wherein R^{14} is hydrogen or methyl, and "a" is an integer ranging from 0 or 2 to about 120 in one aspect, from about 5 to about 45 in another aspect, and from

about 10 to about .25 in a further aspect, and "b" is an integer ranging from about 0 or 2 to about 120 in one aspect, from about 5 to about 45 in another aspect, and from about 10 to about .25 in a further aspect, subject to the proviso that "a" and "b" cannot be 0 at the same time.

61. A composition of claim 60 wherein b is 0.

62. A composition of claims 49, 51, 52, or 54 to 61 wherein said associative monomer is selected from lauryl polyethoxylated (meth)acrylate, cetyl polyethoxylated (meth)acrylate, cetearyl polyethoxylated (meth)acrylate, stearyl polyethoxylated (meth)acrylate, arachidyl polyethoxylated (meth)acrylate, behenyl polyethoxylated (meth)acrylate, cerotyl polyethoxylated (meth)acrylate, montanyl polyethoxylated (meth)acrylate, melissyl polyethoxylated (meth)acrylate, where the polyethoxylated portion of the monomer contains about 2 to about 50 ethylene oxide units, and said semi-hydrophobic monomer is selected from methoxy polyethyleneglycol (meth)acrylate or polyethyleneglycol (meth)acrylate, where the polyethoxylated portion of the monomer contains about 2 to about 50 ethylene oxide units.

63. A composition of claims 45 to 62 wherein said crosslinker is selected from a monomer having an average of 3 crosslinkable unsaturated functional groups.

64. A composition of claim 63 wherein said crosslinker is pentaerythritol triallyl ether.

65. A composition of claim 64 wherein said pentaerythritol triallyl ether is present in an amount ranging from about 0.01 to about 0.3 (based on the dry weight of the polymer).

66. A composition of claims 45 to 65 wherein said monomer mixture is polymerized in the presence of a protective colloid.

67. A composition of claims 45 to 66 wherein said monomer mixture is polymerized in the presence of poly(vinyl alcohol).

68. A composition of claims 45 to 67 wherein said emulsion polymer is polymerized in the presence of partially hydrolyzed poly(vinyl alcohol).

69. A composition of claim 68 wherein said partially hydrolyzed poly(vinyl alcohol) is hydrolyzed in the range from about 80 to 90 %.

70. A composition of any of claims 45 to 69 wherein said emulsion polymer is polymerized from a monomer mixture comprising from about 40 to 45 wt.% of hydroxyethyl acrylate, 30 to 50 wt. % of ethyl acrylate, 10 to 20 wt.% of butyl acrylate and from about 1 to about 5 wt.% of at least one associative and/or semi-hydrophobic monomer (based on the weight of the total monomers), and at least one crosslinker.

71. A yield stress fluid composition of any of claims 45 to 70 comprising:

- a) water;
- b) 1 to 5 wt.% at least one nonionic amphiphilic emulsion polymer prepared from a monomer mixture comprising:
 - i) 40 to 50 wt.% of at least one hydroxy(C₁-C₅)alkyl (meth)acrylate monomer (based on the total monomer wt.);
 - ii) 15 to 70 wt.% of at least two different monomers selected from a (C₁-C₅)alkyl (meth)acrylate monomer (based on the total monomer wt.);
 - iii) 0.5 to 5 wt.% of an associative and/or a semi-hydrophobic monomer; and
 - iv) 0.01 to 1 wt.% in one aspect, and 0.1 to 0.3 in another aspect of at least one crosslinker (based on the dry weight of the polymer); and
- c) 6 to 20 wt.% of a surfactant mixture containing an anionic surfactant and an amphoteric surfactant.

72. A yield stress fluid composition of claim 71 wherein said monomer i) is hydroxyethyl methacrylate.

73. A yield stress fluid composition of claim 71 or 72 wherein said monomers ii) are ethyl acrylate and n-butyl acrylate.

74. A yield stress fluid composition of claim 71 to 73 wherein ethyl acrylate is present in an amount ranging from about 35 to about 50 wt.% of the monomer mixture.

75. A yield stress fluid composition of claims 71 to 74 wherein butyl acrylate is present in an amount ranging from about 10 to about 20 wt.% of the monomer mixture.

76. A yield stress fluid of claims 71 to 75 wherein said associative monomer is selected from behenyl polyethoxylated methacrylate.

77. A yield stress fluid of claims 71 to 76 wherein said associative monomer contains 2 to 30 moles of ethoxylation.

78. A yield stress fluid of claims 71 to 77 where said semi hydrophobic monomer is selected from methoxy polyethyleneglycol methacrylate.

79. A yield stress fluid composition of claims 71 to 78 wherein said anionic surfactant contains an average of 1 to 3 moles of ethoxylation in one aspect, or an average of 1 to 2 moles of ethoxylation in another aspect.

80. A yield stress fluid composition of claims 71 to 79 wherein the ratio of said anionic surfactant to said amphoteric surfactant ranges from about 10:1 to about 2:1 (wt./wt.).

81. A yield stress fluid composition of claims 71 to 80 wherein said anionic surfactant is selected from the sodium or ammonium salts of dodecyl sulfate, lauryl sulfate, laureth sulfate, and mixtures thereof.

82. A yield stress fluid composition of claims 71 to 81 wherein said amphoteric surfactant is cocamidopropyl betaine.

83. A composition of claims 1 to 44 wherein said polymer is a dispersion polymer.

84. A composition of claim 83 wherein said polymer is polymerized from 95 to 99.5 wt.% of a combination of at least one vinyl lactam and at least one vinyl ester of a C₁-C₂₂ carboxylic acid, wherein at least 30 wt.% of said monomer combination is selected from a vinyl lactam, 0.05 to 5 wt.% of at least one C₈-C₂₂ alkyl (meth)acrylate, optionally up to 5 wt.% of an associative and/or a semi-hydrophobic monomer (said weight percent is based on the weight of the total monomers), and 0.01 to 1 wt.% of a crosslinking monomer (based on the dry weight of the polymer).

85. A composition of claim 84 wherein said vinyl lactam is N-vinyl pyrrolidone, and said vinyl ester is selected from vinyl formate, vinyl acetate, vinyl propionate, vinyl butyrate, vinyl isobutyrate, vinyl valerate, vinyl hexanoate, vinyl 2-methylhexanate, vinyl 2-ethylhexanoate, vinyl iso-octanoate, vinyl nonanoate, vinyl neodecanoate, vinyl decanoate, vinyl versatate, vinyl laurate, vinyl palmitate, vinyl stearate, and mixtures thereof, and said C₈-C₂₂ alkyl (meth)acrylate is selected from lauryl methacrylate stearyl methacrylate, behenyl methacrylate, and mixtures thereof; and mixtures thereof.

86. A composition of claim 84 or 85 wherein said dispersion polymer is polymerized from a monomer mixture comprising 60 to 90 wt.% of N-vinyl pyrrolidone, 10 to 35 wt.% of at least one vinyl ester selected from vinyl acetate, vinyl propionate, vinyl butyrate, vinyl isobutyrate, vinyl valerate, vinyl hexanoate,

- 99 -



vinyl 2-methylhexanate, vinyl 2-ethylhexanoate, vinyl iso-octanoate, vinyl nonanoate, vinyl neodecanoate, vinyl decanoate, vinyl versatate, vinyl laurate, vinyl palmitate, and vinyl stearate, 0.5 to 5 wt.% of an C₈-C₂₂ alkyl (meth)acrylate selected from lauryl methacrylate, stearyl methacrylate, behenyl methacrylate, and mixtures thereof.

87. A composition of claims 84 to 86 wherein said dispersion polymer is prepared from a monomer mixture comprising N-vinyl pyrrolidone, vinyl acetate, and a C₈-C₂₂ alkyl (meth)acrylate selected from lauryl methacrylate, stearyl methacrylate, behenyl methacrylate, and mixtures thereof; and mixtures thereof.

88. A composition of claims 84 to 87 wherein said monomer mixture further comprises dimethylacrylamide.

89. A composition of claims 84 to 88 wherein said associative monomer comprises (i) an ethylenically unsaturated end group portion; (ii) a polyoxyalkylene mid-section portion, and (iii) a hydrophobic end group portion containing 8 to 30 carbon atoms.


90. A composition of claims 84 to 89 wherein said associative monomer is represented by formulas VII and VIIA:

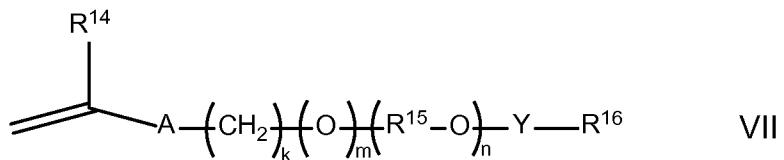

- 100 -

wherein R^{14} is hydrogen or methyl; A is $-CH_2C(O)O-$, $-C(O)O-$, $-O-$, $-CH_2O-$, $-NHC(O)NH-$, $-C(O)NH-$, $-Ar-(CE_2)_z-NHC(O)O-$, $-Ar-(CE_2)_z-NHC(O)NH-$, or $-CH_2CH_2NHC(O)-$; Ar is a divalent arylene (e.g., phenylene); E is H or methyl; z is 0 or 1; k is an integer ranging from about 0 to about 30, and m is 0 or 1, with the proviso that when k is 0, m is 0, and when k is in the range of 1 to about 30, m is 1; D represents a vinyl or an allyl moiety; $(R^{15}-O)_n$ is a polyoxyalkylene moiety, which can be a homopolymer, a random copolymer, or a block copolymer of C_2-C_4 oxyalkylene units, R^{15} is a divalent alkylene moiety selected from C_2H_4 , C_3H_6 , or C_4H_8 , and combinations thereof; and n is an integer in the range of about 2 to about 150 in one aspect, from about 10 to about 120 in another aspect, and from about 15 to about 60 in a further aspect; Y is $-R^{15}O-$, $-R^{15}NH-$, $-C(O)-$, $-C(O)NH-$, $-R^{15}NHC(O)NH-$, or $-C(O)NHC(O)-$; R^{16} is a substituted or unsubstituted alkyl selected from a C_8-C_{30} linear alkyl, a C_8-C_{30} branched alkyl, a C_8-C_{30} carbocyclic alkyl, a C_2-C_{30} alkyl-substituted phenyl, an aralkyl substituted phenyl, and an aryl-substituted C_2-C_{30} alkyl; wherein the R^{16} alkyl group, aryl group, phenyl group optionally comprises one or more substituents selected from the group consisting of a hydroxyl group, an alkoxy group, benzyl group, styryl group, and a halogen group.

91. A composition of claims 84 to 90 wherein said associative monomer is represented by formula VIIA:


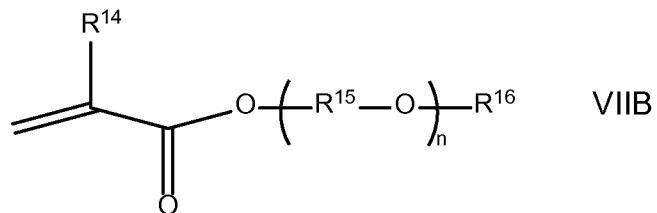


wherein R^{14} is hydrogen or methyl; R^{15} is a divalent alkylene moiety independently selected from C_2H_4 , C_3H_6 , and C_4H_8 , and n represents an integer ranging from about 10 to about 60, $(R^{15}-O)$ can be arranged in a random or a

block configuration; R¹⁶ is a substituted or unsubstituted alkyl selected from a C₈-C₃₀ linear alkyl, a C₈-C₃₀ branched alkyl, a C₈-C₃₀ carbocyclic alkyl, a C₂-C₃₀ alkyl-substituted phenyl, an aralkyl substituted phenyl, and an aryl-substituted C₂-C₃₀ alkyl, wherein the R¹⁶ alkyl group, aryl group, phenyl group optionally comprises one or more substituents selected from the group consisting of a hydroxyl group, an alkoxy group, benzyl group, styryl group, and a halogen group.

92. A composition of claims 84 to 91 wherein said semi-hydrophobic monomer comprises (i) an ethylenically unsaturated end group portion; (ii) a polyoxyalkylene mid-section portion, and (iii) an end group portion selected from hydrogen or a group containing 1 to 4 carbon atoms.



93. A composition of claims 84 to 92 wherein said semi-hydrophobic monomer is selected from at least one monomer represented by formulas VIII and IX:

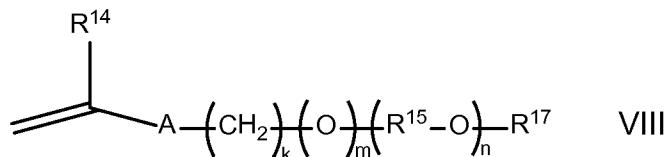

wherein R¹⁴ is hydrogen or methyl; A is -CH₂C(O)O-, -C(O)O-, -O-, -CH₂O-, -NHC(O)NH-, -C(O)NH-, -Ar-(CE₂)_z-NHC(O)O-, -Ar-(CE₂)_z-NHC(O)NH-, or -CH₂CH₂NHC(O)-; Ar is a divalent arylene (e.g., phenylene); E is H or methyl; z is 0 or 1; k is an integer ranging from about 0 to about 30, and m is 0 or 1, with the proviso that when k is 0, m is 0, and when k is in the range of 1 to about 30, m is 1; (R¹⁵-O)_n is a

polyoxyalkylene moiety, which can be a homopolymer, a random copolymer, or a block copolymer of C₂-C₄ oxyalkylene units, R¹⁵ is a divalent alkylene moiety selected from C₂H₄, C₃H₆, or C₄H₈, and combinations thereof; and n is an integer in the range of about 2 to about 150 in one aspect, from about 5 to about 120 in another aspect, and from about 10 to about 60 in a further aspect; R¹⁷ is selected from hydrogen and a linear or branched C₁-C₄ alkyl group (e.g. methyl, ethyl, propyl, iso-propyl, butyl, iso-butyl, and tert-butyl); and D represents a vinyl or an allyl moiety.

94. A composition of claims 84 to 93 wherein said semi-hydrophobic monomer is selected from at least one monomer represented by formulas VIIIA and VIIIB:



wherein R¹⁴ is hydrogen or methyl, and "a" is an integer ranging from 0 or 2 to about 120 in one aspect, from about 5 to about 45 in another aspect, and from about 10 to about .25 in a further aspect, and "b" is an integer ranging from about 0 or 2 to about 120 in one aspect, from about 5 to about 45 in another aspect, and from about 10 to about .25 in a further aspect, subject to the proviso that "a" and "b" cannot be 0 at the same time.

95. A composition of claim 94 wherein b is 0.

96. A composition of claims 84 to 95 wherein said associative monomer is selected from lauryl polyethoxylated (meth)acrylate, cetyl polyethoxylated (meth)acrylate, cetearyl polyethoxylated (meth)acrylate, stearyl polyethoxylated (meth)acrylate, arachidyl polyethoxylated (meth)acrylate, behenyl polyethoxylated (meth)acrylate, cerotyl polyethoxylated (meth)acrylate, montanyl polyethoxylated (meth)acrylate, melissyl polyethoxylated (meth)acrylate, where the polyethoxylated portion of the monomer contains about 2 to about 50

ethylene oxide units, and said semi-hydrophobic monomer is selected from methoxy polyethyleneglycol (meth)acrylate or polyethyleneglycol (meth)acrylate, where the polyethoxylated portion of the monomer contains about 2 to about 50 ethylene oxide units.

97. A composition of claims 84 to 96 wherein said crosslinker is selected from a monomer having an average of 3 crosslinkable unsaturated functional groups.

98. A composition of claim 92 wherein said crosslinker is pentaerythritol triallyl ether.

99. A composition of claims 84 to 98 wherein said dispersion polymer is polymerized in the presence of a steric stabilizer.

100. A composition of claim 99 wherein said steric stabilizer is selected from a copolymer of N-vinyl pyrrolidone/stearyl methacrylate/butyl acrylate, the ester of the reaction product of a C₂₀ to C₂₄ alkyl substituted succinic anhydride and a polyol selected from glycerin and/or a polyglycerol containing 2 to 6 glycerin units, and mixtures thereof.

101. A composition in any of the preceding claims further comprising an electrolyte.

102. A composition of claim 101 wherein said electrolyte is selected from potassium pyrophosphate, potassium tripolyphosphate, sodium or potassium citrate, calcium chloride and calcium bromide, zinc halides, barium chloride calcium nitrate, potassium chloride, sodium chloride, potassium iodide, sodium bromide, and ammonium bromide, alkali metal or ammonium nitrates, and blends thereof.

103. A composition of claim 102 wherein the amount of the electrolyte ranges from about 0.1 to about 4 wt.%, based on the weight of the total composition.

104. A composition of any of claims 45 to 103 further comprising an insoluble material, a particulate material, or combinations thereof.

105. A composition of claim 104 wherein said particulate material is selected from mica, coated mica, pigments, exfoliants, anti-dandruff agents, clay, swellable clay, laponite, microsponges, cosmetic beads, cosmetic microcapsules, flakes, and mixtures thereof.

106. A composition of claim 104 wherein said particulate material is selected from sand, sintered bauxite, glass balls, ceramic materials, polystyrene beads, and mixtures thereof.

107. A composition of claim 104 wherein said insoluble material is selected from gas bubbles, liposomes, silicones, and mixtures thereof.

108. A drilling fluid for use in drilling subterranean formations comprising a yield stress fluid of any of claims 1 to 103.

109. A hydraulic fracturing fluid for use in fracturing subterranean formations comprising a yield stress fluid of any of claim 1 to 103.

110. A hydraulic fracturing fluid of claim 109 further comprising a proppant.

Fig. 1

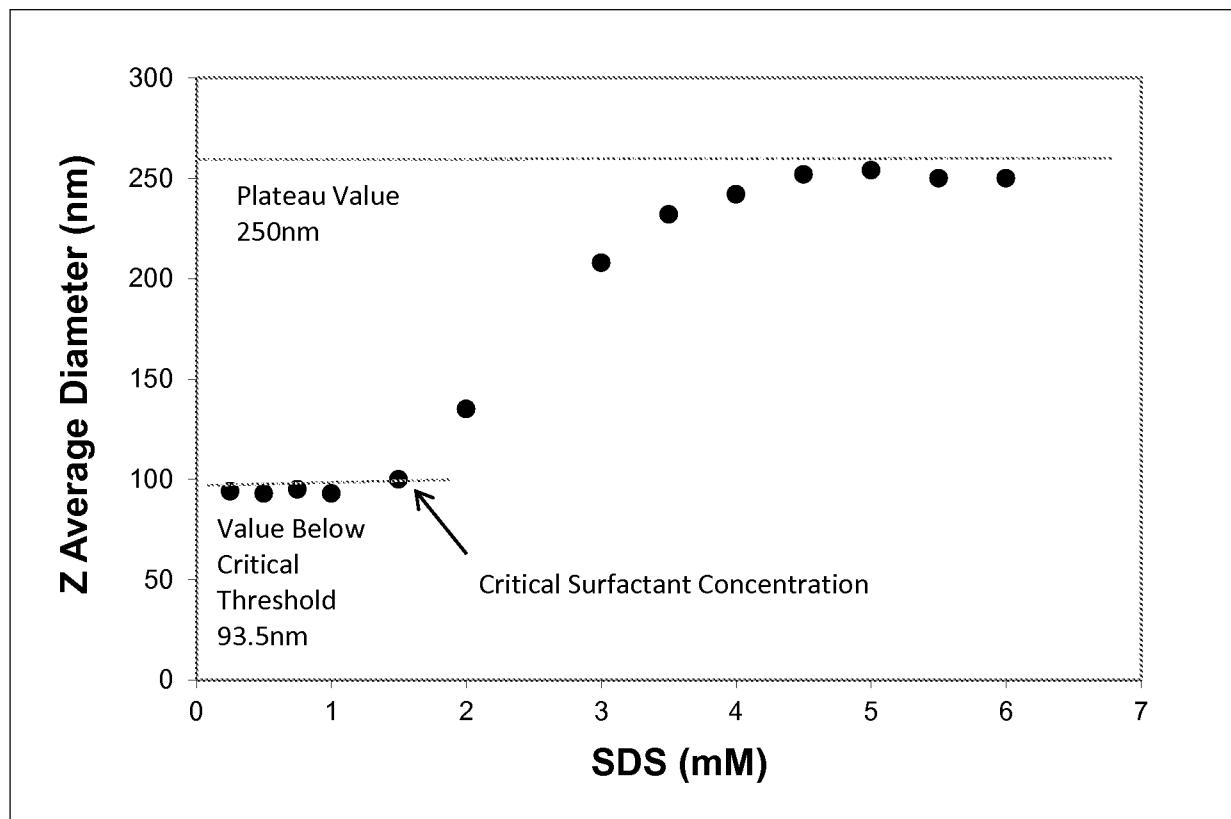


Fig. 2


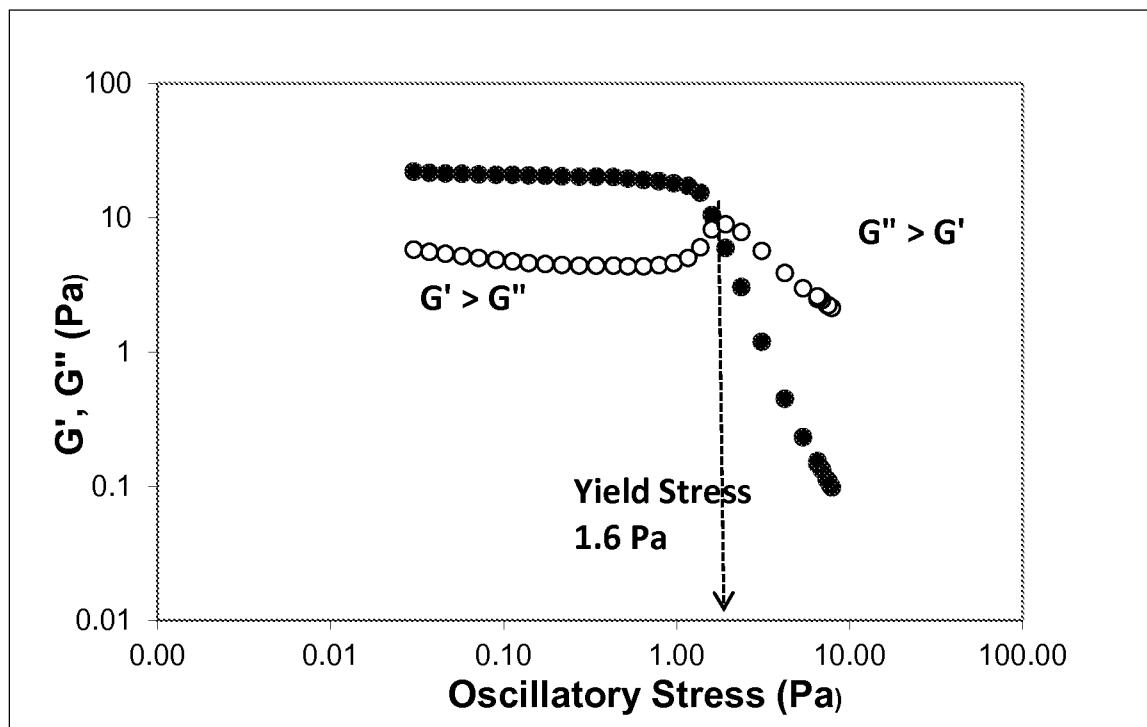


Fig. 3

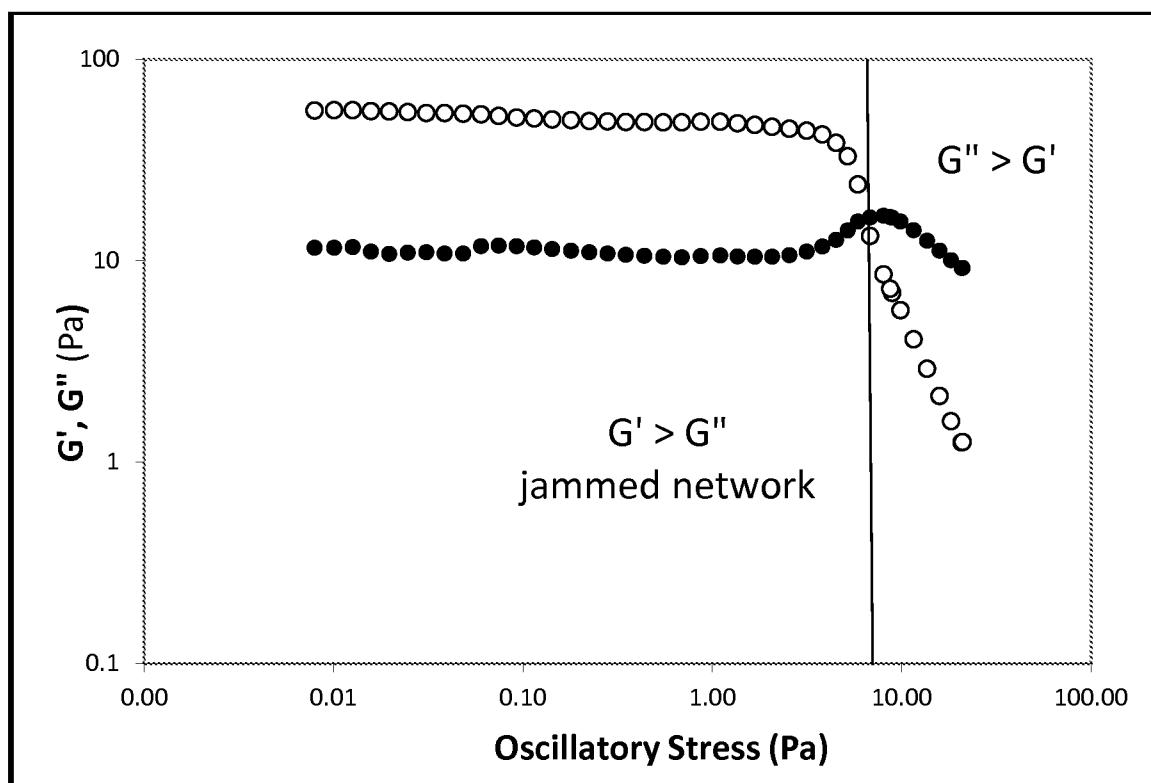

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/055094

A. CLASSIFICATION OF SUBJECT MATTER
INV. C09K8/035 C09K8/60 C09K8/68
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C09K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 384 096 A (SONNABEND LAWRENCE F) 17 May 1983 (1983-05-17) cited in the application column 2, line 3 - column 3, line 2; claims; examples 1-3 ----- EP 0 825 200 A1 (NAT STARCH CHEM INVEST [US]) 25 February 1998 (1998-02-25) claims; examples ----- US 5 770 760 A (ROBINSON FRED [US]) 23 June 1998 (1998-06-23) cited in the application column 2, line 24 - column 4, line 50 column 5, line 15 - line 25 ----- -/-	1-4,11, 12,18, 27,45, 108-110 1,11, 14-30,45 1-7,18, 19,26, 27,45, 108-110 -/-
A		

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 5 February 2013	Date of mailing of the international search report 18/02/2013
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3046	Authorized officer Grittern, Albert

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/055094

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 870 785 A1 (3V SIGMA SPA [IT]) 14 October 1998 (1998-10-14) claims -----	1-110
A	KANEDA I ET AL: "Rheological properties of water swellable microgel polymerized in a confined space", COLLOIDS AND SURFACES. A, PHYSICACHEMICAL AND ENGINEERING ASPECTS, ELSEVIER, AMSTERDAM, NL, vol. 270-271, 1 December 2005 (2005-12-01), pages 163-170, XP027802938, ISSN: 0927-7757 [retrieved on 2005-12-01] the whole document -----	1
A	G.C. MAITLAND: "Oil and gas production", CURRENT OPINION IN COLLOID & INTERFACE SCIENCE, vol. 5, 2000, pages 301-311, XP002691628, page 301 - page 305 -----	1, 108-110

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2012/055094
--

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 4384096	A 17-05-1983	NONE		
EP 0825200	A1 25-02-1998	AU 739012 B2 AU 3415497 A BR 9704366 A CA 2211777 A1 EP 0825200 A1 JP 10121030 A NZ 328554 A		04-10-2001 26-02-1998 20-07-1999 16-02-1998 25-02-1998 12-05-1998 28-01-1999
US 5770760	A 23-06-1998	AT 165104 T CA 2200759 A1 DE 69502067 D1 DE 69502067 T2 DK 705854 T3 EP 0705854 A1 ES 2118514 T3 FI 954670 A JP 4290761 B2 JP H10509467 A NO 953911 A US 5770760 A US 5874495 A WO 9610602 A1 ZA 9508224 A		15-05-1998 11-04-1996 20-05-1998 04-02-1999 09-11-1998 10-04-1996 16-09-1998 04-04-1996 08-07-2009 14-09-1998 09-04-1996 23-06-1998 23-02-1999 11-04-1996 06-02-1997
EP 0870785	A1 14-10-1998	AT 258196 T CA 2234471 A1 DE 69821161 D1 DE 69821161 T2 EP 0870785 A1 ES 2213235 T3 IT MI970811 A1 JP 10324717 A KR 19980081201 A US 6140435 A		15-02-2004 09-10-1998 26-02-2004 02-09-2004 14-10-1998 16-08-2004 09-10-1998 08-12-1998 25-11-1998 31-10-2000