

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 October 2008 (30.10.2008)


PCT

(10) International Publication Number  
**WO 2008/130140 A1**

- (51) International Patent Classification: **H01L 33/00** (2006.01) [KR/KR]; 407-102, Jugong Apt., Unnam-dong, Gwangsan-gu, Gwangju 506-765 (KR).
- (21) International Application Number: PCT/KR2008/002183
- (22) International Filing Date: 17 April 2008 (17.04.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10-2007-0038279 19 April 2007 (19.04.2007) KR
- (71) Applicant (for all designated States except US): **LG INNOTEK CO., LTD** [KR/KR]; 33Fl., LG Twin Tower West, 20 Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721 (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KONG, Sung Min** [KR/KR]; 205-707, Siyeong 1 danji Apt., Woosan-dong, Gwangsan-gu, Gwangju 506-751 (KR). **KIM, Choong Youl** [KR/KR]; 105-2007, Yangsantown, Yongdu-dong, Buk-gu, Gwangju 500-220 (KR). **CHOI, Hee Seok**
- (74) Agent: **HAW, Yong Noke**; 6th Fl., Hyun Juk Bldg., 832-41 Yeoksam-dong, Gangnam-gu, Seoul 135-080 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published: — with international search report

(54) Title: LIGHT EMITTING DEVICE PACKAGE AND LIGHT UNIT HAVING THE SAME

[Fig. 2]

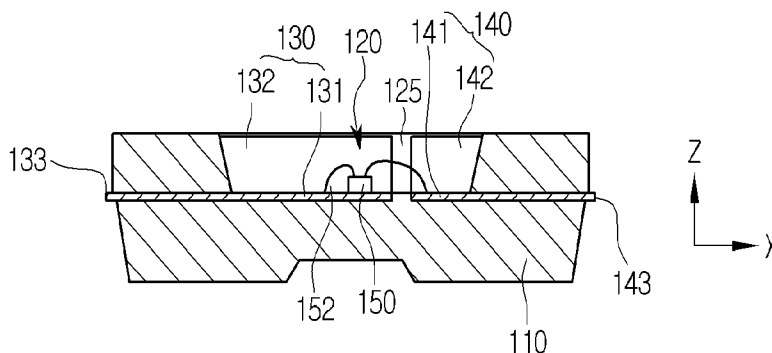

(57) Abstract: Disclosed is an LED package. The LED package comprises a body comprising a cavity at one side thereof, at least one of lead frames comprising a bottom frame and a sidewall frame in the cavity, and a light emitting device electrically connected with the lead frames.

WO 2008/130140 A1

# Description

## LIGHT EMITTING DEVICE PACKAGE AND LIGHT UNIT HAVING THE SAME

### Technical Field

[1] The embodiment relates to an LED (light emitting device) package and a light unit having the same.

[2]

### Background Art

[3] An LED constitutes a light emission source by using GaAs, AlGaAs, GaN, InGaN and InGaAlP-based compound semiconductor materials, thereby producing various colors.

[4] Such characteristics of the LED can be determined by materials, colors, brightness and a brightness range of a compound semiconductor. Further, the LED is provided as a package and is applied to various fields comprising lighting indicators for displaying colors, character indicators, image indicators and the like.

[5]

### Disclosure of Invention

#### Technical Problem

[6] The embodiment provides an LED package, in which a lead frame bent in a multi-step is disposed at a bottom surface and at least one sidewall defining a cavity, and a light unit having the same.

[7] The embodiment provides an LED package, in which at least one of plural lead frames is formed at a bottom surface and both sidewalls defining a cavity, and a light unit having the same.

[8] The embodiment provides an LED package comprising a lead frame, which has sidewalls inclined at a predetermined angle or bent with a predetermined curvature, and a light unit having the same.

[9]

#### Technical Solution

[10] An embodiment provides an LED package comprising; a body comprising a cavity at one side thereof; at least one of lead frames comprising a bottom frame and a sidewall frame in the cavity; and a light emitting device electrically connected with the lead frames.

[11] An embodiment provides an LED package comprising; a body comprising a cavity; a first lead frame comprising a bottom frame and at least one sidewall frame at a first side of the cavity; a second lead frame comprising a bottom frame at a second side of the cavity; and a light emitting device electrically connected with the first and second lead frames.

[12] An embodiment provides a light unit comprising; a light emitting apparatus comprising a plurality of LED packages; an optical guide plate disposed at one side of the light emitting device; and an optical member disposed above and/or below the optical guide plate, wherein the LED package comprises a body comprising a cavity; at least one of lead frames comprising bottom frame and a sidewall frame in the cavity; and a light emitting device electrically connected with the lead frames.

[13]

### **Advantageous Effects**

[14] The embodiment can reduce optical loss in a cavity of an LED package.

[15] The embodiment can improve the light intensity at a center area in a cavity of an LED package.

[16] The embodiment can increase the amount of reflected light in a cavity of an LED package by using a lead frame plated with reflective metal or reflective material.

[17] The embodiment can improve thermal resistance and thermal characteristics of a lead frame of an LED package.

[18]

### **Brief Description of the Drawings**

[19] FIG. 1 is a front view showing an LED package according to an embodiment;

[20] FIG. 2 is a sectional view taken along an X axis of an LED package shown in FIG. 1;

[21] FIG. 3 is a perspective view showing the lead frame of FIG. 1

[22] FIG. 4 is a sectional view taken along a Y axis of the LED package shown in FIG. 1;

[23] FIG. 5 is a sectional view showing an LED package having a lead frame modified according to a first example embodiment;

[24] FIG. 6 is a sectional view showing an LED package having a lead frame modified according to a second example embodiment;

[25] FIGS. 7 to 10 are views showing lead frames modified according to third to sixth example embodiments;

[26] FIG. 11 is a graph showing an angle of a lead frame as a function of light intensity before and after the plating in the LED package of FIG. 4;

[27] FIG. 12 is a graph showing an angle of a lead frame as a function of light velocity (or light amount) before and after the plating in the LED package of FIG. 4; and

[28] FIG. 13 is a perspective view showing a display device using the LED package of FIG. 1.

[29]

### **Best Mode for Carrying Out the Invention**

[30] Hereinafter, an LED package according to an embodiment will be described with reference to the accompanying drawings.

[31] FIG. 1 is a front view showing an LED package according to a first embodiment, FIG. 2 is a sectional view taken along an X axis of the LED package shown in FIG. 1, and FIG. 3 is a perspective view showing the lead frame of FIG. 1.

[32] Referring to FIGS. 1 and 2, the LED package 100 comprises a polygonal shape, such as a rectangular parallelepiped shape or a regular hexahedral shape, and is classified into a side emission type LED package and a top emission type LED package. Further, the LED package 100 can be used as a light source for a backlight unit of an LCD or as a light unit in an illumination field. Hereinafter, a side emission type LED package will be described for convenience of description.

[33] The LED package comprises a body 110 comprising a cavity 120, lead frames 130 and 140, and a light emitting device 150.

[34] The body 110 comprises one selected from the group consisting of PPA (polyphthalamid), PA9T (polyamid9T), liquid crystal polymer and SPS (syndiotactic polystyrene).

[35] The body 110 is formed therein with the cavity 120 comprising a predetermined depth. When a first direction is referred to as an X axis and a second direction is referred to as a Y axis, the length of the body 110 in the X axis direction may be greater than the width of the body 110 in the Y axis direction. However, the scope of the present invention is not limited thereto.

[36] The lead frames 130 and 140 are formed at the upper portion of the body 110 through injection molding. A part of the lead frames 130 and 140 is exposed to the cavity 120 of the body 110.

[37] Referring to FIGS. 1 to 3, the lead frames 130 and 140 comprises bottom frames 131 and 141 and sidewall frames 132 and 142 in the cavity 120, respectively. One end of the bottom frame 131 and one end of the bottom frame 141 may serve as external electrodes 133 and 143 by passing through the body 110 in the X axis direction, respectively. The sidewall frames 132 and 142 are inclined outward from the Y axis,

which is perpendicular to the bottom frames 131 and 141, at a predetermined angle. The external electrodes 133 and 143 can be provided by one of the bottom frames 131 and 141 and the sidewall frames 132 and 142.

- [38] The lead frames 130 and 140 are formed through injection molding using high reflective metals comprising one selected from the group consisting of Fe, Sn, Cr, Zn, Ni, Al, Ag, Au, Cu, and an alloy thereof.
- [39] One of the lead frames 130 and 140, for instance, the lead frame 130 may have a substantially "C" shape in which three sides are bent at a predetermined angle, and the other one of the lead frames 130 and 140, for instance, the lead frame 140 may form the bottom frame 141. Further, at least one of the lead frames 130 and 140, for instance, the lead frame 130 can comprise the bottom frame 131 and at least one of the sidewall frames 132. According to the embodiment, the lead frames 130 and 140 may have shapes different from each other. However, the scope of the present invention is not limited thereto.
- [40] The lead frames 130 and 140 are integrally formed in the cavity 120 and may have lengths different from each other. Further, the lead frames 130 and 140 can be formed with a thickness of  $20\mu\text{m}$  to  $300\mu\text{m}$ .
- [41] A partition 125 serving as a part of the body 110 is formed between the lead frames 130 and 140 to structurally separate the lead frame 130 from the lead frame 140. Thus, the lead frames 130 and 140 serve as electrodes and reflect light.
- [42] Both sides (i.e. left and right sides 121 and 122) defining the cavity 120 in the X direction are inclined at a predetermined angle and serve as a part of the body 110. The partition 125 and the left and right sides 121 and 122, which are disposed in the cavity 120, can be formed together with the cavity 120 when the body 110 is formed.
- [43] The light emitting device 150 is attached to at least one of the lead frames 130 and 140 in the cavity 120, and is connected with the lead frames 130 and 140 through a wire 152. The light emitting device 150 can be mounted on the lead frames 130 and 140 through wire bonding, flip bonding, die bonding and the like.
- [44] Further, the light emitting device 150 is a III-V group compound semiconductor and comprises one of AlGaIn, GaN, InGaAlP and GaAs-based LED chips. Further, a protective device such as a Zener diode can be mounted on the lead frames 130 and 140 in order to protect the light emitting device 150.
- [45] Meanwhile, the LED package 100 can be prepared in the form of a white light emitting device using a blue LED chip and a yellow fluorescent substance (e.g. silicate-based fluorescent substance), orange fluorescent substance, green fluorescent

substance, and red fluorescent substance. Further, the LED package 100 can be prepared in the form of a light source by combining at least one of a red LED chip, a green LED chip, a blue LED chip, a yellow LED chip, a yellow green LED chip and an UV LED chip.

[46] In addition, a resin member (not shown) can be molded in the cavity 120 in order to protect the light emitting device 150. The resin member can use epoxy or silicon having transparent material. If the situation requires, fluorescent substance powder can also be added to the resin member and molded in the cavity 120. Molding solution or additive can be used with the resin member according to the use purpose and environment, and the characteristics of a product. However, the embodiment is not limited thereto. Further, the surface of the resin member has one of a flat shape, a concave lens shape and a convex lens shape.

[47] FIG. 4 is a sectional view taken along a Y axis of the LED package shown in FIG. 1. Hereinafter, the lead frame 130 of the lead frames 130 and 140 will be described as an example. However, it should be noted that the lead frames may not be formed under the same conditions as will be described later.

[48] Referring to FIG. 4, the body 110 has a predetermined height H1, e.g. maximum 1mm. For instance, the sidewall frames 132 of the lead frame 130 has an internal angle  $\theta_1$  of  $30^\circ$ . Further, the sidewall frames 132 can be inclined at the same angle (e.g.  $15^\circ$ ) or at different angles with respect to the axis perpendicular to the bottom frame 131 of the lead frame 130.

[49] The interval D1 between the sidewall frames 132 may vary according to the internal angle  $\theta_1$  between the sidewall frames 132 of the lead frame 130. For instance, the bottom frame 131 of the lead frame 130 has a width W1 of 300um to 310 $\mu$ m.

[50] FIG. 5 is a sectional view showing the LED package comprising a lead frame modified according to a first example embodiment. In describing the above first example embodiment about the lead frame, the same reference numerals are used to designate the same elements of FIG. 4, and a detailed description will be omitted in order to avoid redundancy.

[51] Referring FIG. 5, the height H2 of the body 110 and the width W2 of the bottom frame 131 may be identical to or different from those of FIG. 4, respectively. For instance, an internal angle  $\theta_2$  between the sidewall frames 132 of a lead frame 130A is  $45^\circ$ . Each sidewall frame 132 can be inclined at an angle of  $22.5^\circ$  with respect to the axis perpendicular to the bottom frame 131. As the internal angle  $\theta_2$  between the sidewall frames 132 of the lead frame 130A is increased, an interval D2 ( $D2 > D1$ )

between the sidewall frames 132 can be further widened. The interval D2 between the sidewall frames 132 is widened, so that the surface width of the cavity 120 can be increased.

- [52] FIG. 6 is a sectional view showing the LED package comprising a lead frame modified according to a second example embodiment. In describing the second example embodiment about the lead frame, the same reference numerals are used to designate the same elements of FIG. 4, and a detailed description will be omitted in order to avoid redundancy.
- [53] Referring to FIG. 6, the height H1 of the body 110 and the width W3 of the bottom frame 131 may be identical to or different from those of FIG. 4, respectively. For instance, an internal angle  $\theta_3$  between the sidewall frames 132 of a lead frame 130B is  $60^\circ$ . Each sidewall frame 132 can be inclined at an angle of  $30^\circ$  with respect to the axis perpendicular to the bottom frame 131. As the internal angle  $\theta_3$  between the sidewall frames 132 of the lead frame 130B is increased, an interval D3 ( $D3 > D2 > D1$ ) between the sidewall frames 132 can be further widened.
- [54] FIGS. 7 to 10 are views showing lead frames modified according to third to sixth example embodiments.
- [55] Referring to FIG. 7, the lead frame 130C comprises the bottom frame 131 and sidewall frames 132 bent from the bottom frame 131 at a right angle. In such a case, a width W4 of the bottom frame 131 and an interval D4 between the sidewall frames 132 are  $420\mu\text{m}$ , and a cavity depth H4 of the lead frame 130C is  $300\mu\text{m}$  to  $450\mu\text{m}$ .
- [56] Referring to FIG. 8, the lead frame 130D comprises the bottom frame 131 and one sidewall frame 132 inclined at an angle  $\theta_4$  of  $15^\circ$  with respect to the axis perpendicular to the bottom frame 131. In such a case, a cavity depth H5 of the lead frame 130D is  $338\mu\text{m}$  to  $386\mu\text{m}$  and an interval D5 between the sidewall frames 132 is  $600\mu\text{m}$  to  $626\mu\text{m}$ . For instance, a width W5 of the bottom frame 131 is  $420\mu\text{m}$ .
- [57] Referring FIG. 9, the lead frame 130E comprises the bottom frame 131 and one sidewall frame 132 inclined at an angle  $\theta_5$  of  $30^\circ$  with respect to the axis perpendicular to the bottom frame 131. In such a case, a cavity depth H6 of the lead frame 130E is  $303\mu\text{m}$  to  $346\mu\text{m}$  and an interval D6 between the sidewall frames 132 is  $770\mu\text{m}$  to  $850\mu\text{m}$ . A width W6 of the bottom frame 131 is about  $420\mu\text{m}$  to  $450\mu\text{m}$ .
- [58] Referring to FIG. 10, the lead frame 130F comprises the bottom frame 131 and sidewall frames 132A inclined at a predetermined angle with respect to the axis perpendicular to the bottom frame 131 while being bent with a predetermined curvature. In detail, the sidewall frames 132A are inclined at the predetermined angle and have a

hemispherical shape to efficiently reflect light.

[59] According to the lead frames as described above, when one sidewall frame 132 has an inclination angle of  $15^\circ$  to  $30^\circ$  with respect to the bottom frame, the cavity depth is  $250\mu\text{m}$  to  $700\mu\text{m}$ , and the interval between the sidewall frames  $600\mu\text{m}$  to  $850\mu\text{m}$ , the highest efficiency is obtained. Further, the lead frame, which has high reflective metal or is plated with high reflective metal material, has a reflectivity of 95% or more, and has improved thermal resistance and thermal characteristics. Further, the inclined sidewall frame can improve the light intensity at the center area.

[60] FIG. 11 is a graph showing an angle of the lead frame as a function of light intensity before and after the plating in the LED package of FIG. 4, and FIG. 12 is a graph showing an angle of the lead frame as a function of light velocity (or light amount) before and after the plating in the LED package of FIG. 4. The box plot shown in FIGS. 11 and 12 is obtained using a blue LED having a specification of the same light intensity and the same light velocity. Further, the intensity of light and the velocity of light are measured using the same measurement specimen.

[61] Referring to FIGS. 11 and 12, in the LED package of FIG. 4, the intensities of light of first to fifth LED packages #1 to #5 are measured by changing the internal angle  $\theta_1$  of the lead frame. The first, second, third and fifth LED packages #1, #2, #3 and #5 comprise a lead frame, which is subject to Ag-plating after the bending and punching processes (see A). The fourth LED package #4 comprises a lead frame, which is subject to Ag-plating before the bending and punching processes (see B).

[62] Further, the internal angles of the lead frames of the first to fifth LED packages #1 to #5 are  $0^\circ$ ,  $30^\circ$ ,  $45^\circ$ ,  $55^\circ$ , and  $55^\circ$ , respectively.

[63] FIG. 11 is a graph showing the angle of the lead frame as a function of the light intensity of the LED package, and Table 1 below shows the result.

[64] Table 1

[Table 1]

[Table ]

Lv(mcd)	#1	#2	#3	#4	#5
AVG	138.9	197.0	202.2	166.5	216.3
MIN	114.0	177.9	168.1	143.4	190.8
MAX	154.1	215.4	221.5	183.1	243.6

[65] As shown in FIG. 11 and Table 1, the difference of 1cd (=1000mcd) is generated



according to the angle of the lead frame, after the plating A, and before the plating B. The second LED package #2 has an internal angle greater than that of the first LED package #1 by 30°, and has a light intensity increased by 41.8%. The third LED package #3 has an internal angle greater than that of the second LED package #2 by 15°, and has a light intensity increased by 2.6%. Further, the fifth LED package #5 has an internal angle greater than that of the third LED package #3 by 10°, and has a light intensity increased by 7.0%.

[66] FIG. 12 is a graph showing the angle of the lead frame as a function of the lumen of the LED package, and Table 2 below shows the result.

[67] Table 2

[Table 2]

[Table ]

Lm	#1	#2	#3	#4	#5
AVG	0.389	0.482	0.495	0.431	0.503
MIN	0.360	0.410	0.440	0.400	0.460
MAX	0.420	0.510	0.520	0.460	0.540

[68] As shown in FIG. 12 and Table 2, the difference of lumen is generated according to the angle of the lead frame, after the plating A, and before the plating B. The second, third and fifth LED packages have a light velocity increased by 24%, 26.7% (= 24% + 2.7%) and 28.2% (= 24% + 2.7% + 1.5%) when the internal angle of the lead frame is increased by 30°, 45°, and 55°, respectively.

[69] Referring to FIGS. 11 and 12, the fourth LED package #4 has the pre-plated lead frame and the fifth LED package #5 has the post-plated lead frame. At this time, the fourth and fifth LED packages #4 and #5 have the same internal angles. However, since the lead frame of the fourth LED package #4 is subject to Ag-plating before the bending and punching processes, the Ag plating surface is damaged when bending the lead frame. Thus, the optical efficiency deteriorates.

[70] Accordingly, the LED package shows the optimal light intensity when the lead frame has an internal angle of 30° to 55°. Further, the post plating scheme exhibits optical efficiency higher than the pre-plating scheme. Furthermore, the surface of the lead frame is plated with high reflective metal or high reflective material, so that the lead frame has a reflectivity of 95% or more, and improved thermal resistance and thermal characteristics. In addition, the light intensity at the center area can be improved by the

inclined sidewall frames.

[71] Such a LED package can be applied to an indication field, a display field and the like, and can be provided to a terminal together with a display device.

[72] FIG. 13 is a perspective view showing a display device using the LED package according to the embodiment.

[73] Referring to FIG. 13, the display device 200 comprises a light emitting apparatus 104 comprising a plurality of LED packages 100, a reflective plate 201, a light guide plate 203, an optical sheet 205 and a display panel 207.

[74] The light emitting apparatus 104 comprises the LED packages 100 mounted on a substrate 102. As shown in FIGS. 1 to 3, in the LED package 100, a plurality of lead frames have a structure in which the bottom frames are integrally formed with the sidewall frames thereof while the sidewall frames are being bent from the bottom frames, or can be prepared in the form of the aforementioned example embodiments.

[75] Such a light emitting apparatus 104 corresponds to at least one side of the light guide plate 203, and light emitted from the light emitting apparatus 104 is incident into a lateral side of the light guide plate 203.

[76] The light guide plate 203 guides the incident light over the whole area of the display device 200 and then outputs the light as surface light. Further, a reflective pattern (not shown) can be formed at one side of the light guide plate 203.

[77] The reflective plate 201 is disposed below the light guide plate 203 to reflect light leaked through the light guide plate 203.

[78] The light emitted from the light guide plate 203 is irradiated onto the display panel 207 through the optical sheet 205. The optical sheet 205 comprises at least one of a diffusion sheet (not shown), a horizontal prism sheet (not shown) and a vertical prism sheet (not shown). The diffusion sheet is disposed on the light guide plate 203 to diffuse the incident light. The horizontal and vertical prism sheets are disposed on the diffusion sheet to guide the diffused light toward a display area.

[79] The light emitting apparatus 104, the light guide plate 203 and the optical sheet 205 can be defined as a light unit. The light unit may comprise the reflective plate 201. Further, a part of the elements of the light unit can be received in a structure (not shown) such as a mold frame, a chassis structure or a metal bottom cover.

[80] The display panel 207 serving as a liquid crystal panel comprises two transparent substrates (not shown) and a liquid crystal, and can display information by transmitted light and driving of the liquid crystal. The embodiment is not limited to such a display panel 207. Further, a display panel can be disposed at both sides of the light guide

plate 203.

[81] Such a display device 200 can be applied to a portable terminal such as a cell phone or a PMP, or a computer.

[82] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure.

[83]

### **Industrial Applicability**

[84] The embodiment can reduce optical loss in a cavity of an LED package.

[85] The embodiment can improve the light intensity at a center area in a cavity of an LED package.

[86] The embodiment can increase the amount of reflected light in a cavity of an LED package by using a lead frame plated with reflective metal or reflective material.

[87] The embodiment can improve thermal resistance and thermal characteristics of a lead frame of an LED package.

[88]


## Claims

- [1] An LED package comprising:  
a body comprising a cavity at one side thereof;  
at least one of lead frames comprising a bottom frame and a sidewall frame in the cavity; and  
a light emitting device electrically connected with the lead frames.
- [2] The LED package as claimed in claim 1, wherein the body comprises one selected from the group consisting of PPA (polyphthalamid), PA9T (polyamid 9T), liquid crystal polymer and SPS (syndiotactic polystyrene).
- [3] The LED package as claimed in claim 1, wherein the lead frames are separately disposed at a first side and a second side of the cavity.
- [4] The LED package as claimed in claim 1, wherein at least one of the bottom frames and the sidewall frames of the lead frames extends outward from the body to serve as an electrode.
- [5] The LED package as claimed in claim 1, wherein the sidewall frame of the lead frame is inclined at a predetermined angle or bent with a predetermined curvature.
- [6] The LED package as claimed in claim 1, wherein the lead frames comprise one selected from the group consisting of Fe, Sn, Cr, Zn, Ni, Al, Ag, Au, and Cu and an alloy thereof.
- [7] The LED package as claimed in claim 1, wherein the lead frames comprise Cu material and at least one selected from the group consisting of Au and Al plated on surfaces of the lead frames.
- [8] The LED package as claimed in claim 1, wherein at least one sidewall frame of the lead frame is inclined at an angle of 15° to 30° with respect to an axis perpendicular to the bottom frame.
- [9] The LED package as claimed in claim 1, wherein at least one lead frame comprises both sidewall frames at the both sidewall of the cavity and an interval between the sidewall frames of the lead frame is 600 $\mu$ m to 850 $\mu$ m.
- [10] The LED package as claimed in claim 1, wherein the cavity comprises a depth of 250 $\mu$ m to 700 $\mu$ m.
- [11] The LED package as claimed in claim 1, wherein the bottom frame of the lead frame comprises a width of 300 $\mu$ m to 450 $\mu$ m, and the lead frame has a thickness of 20 $\mu$ m to 300 $\mu$ m.


- [12] The LED package as claimed in claim 1, wherein the light emitting device comprises at least one LED chip comprising a III-V group compound semiconductor.
- [13] An LED package comprising:  
a body comprising a cavity;  
a first lead frame comprising a bottom frame and at least one sidewall frame at a first side of the cavity;  
a second lead frame comprising a bottom frame at a second side of the cavity;  
and  
a light emitting device electrically connected with the first and second lead frames.
- [14] The LED package as claimed in claim 13, wherein the first and second lead frames comprise the bottom frames disposed at a bottom of the cavity and sidewall frames disposed at both sides of the cavity, respectively.
- [15] The LED package as claimed in claim 14, wherein at least one of the first and second lead frames has an internal angle of 30° to 60° between the both sidewall frames.
- [16] The LED package as claimed in claim 13, wherein the light emitting device comprises at least one of a blue LED chip, a red LED chip, a green LED chip, a yellow LED chip, a yellow green LED chip and an UV LED chip, and comprises a resin member formed in the cavity in order to protect the LED chip.
- [17] The LED package as claimed in claim 13, wherein at least one sidewall frame of the first and second lead frames is inclined while being bent with a predetermined curvature.
- [18] The LED package as claimed in claim 13, comprising reflective material plated on surfaces of the first and second lead frames.
- [19] A light unit comprising:  
a light emitting apparatus comprising a plurality of LED packages;  
an optical guide plate disposed at one side of the light emitting device; and  
an optical member disposed above and/or below the optical guide plate,  
wherein the LED package comprises:  
a body comprising a cavity;  
at least one of lead frames comprising a bottom frame and a sidewall frames in the cavity; and  
a light emitting device electrically connected with the lead frames.

- [20] The light unit as claimed in claim 19, wherein at least one of the lead frames has an internal angle of 30° to 60° between the both sidewall frames.


[Fig. 1]

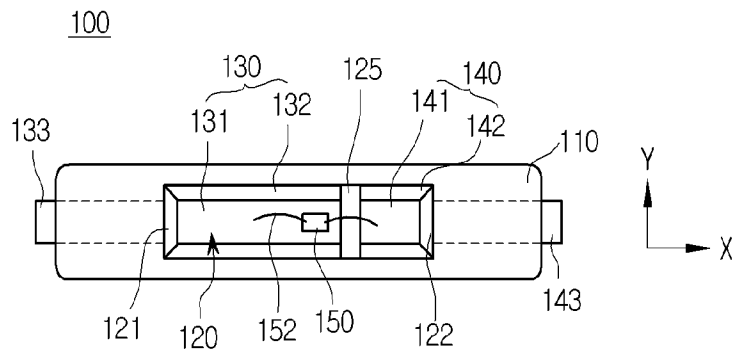


[Fig. 2]

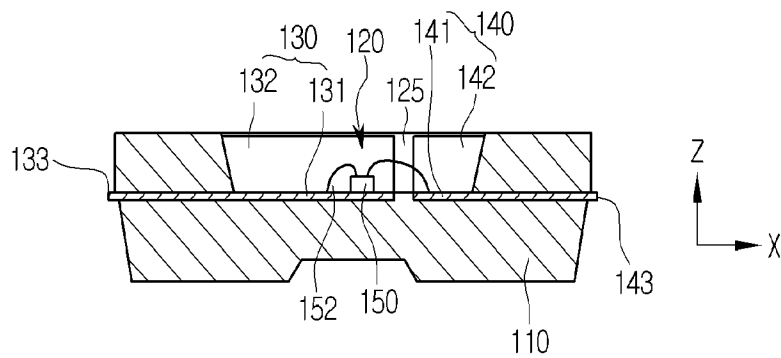


[Fig. 3]

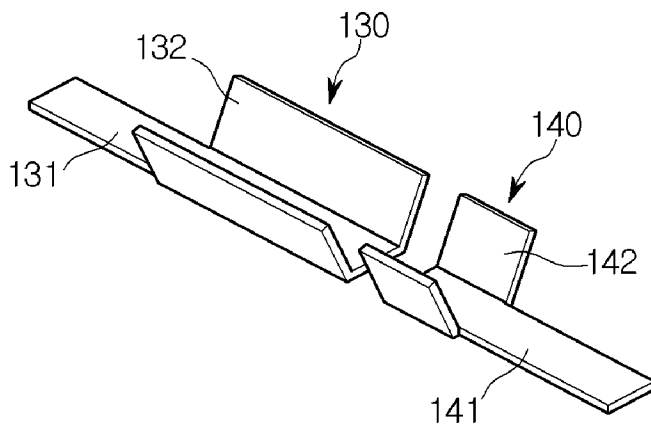


[Fig. 4]

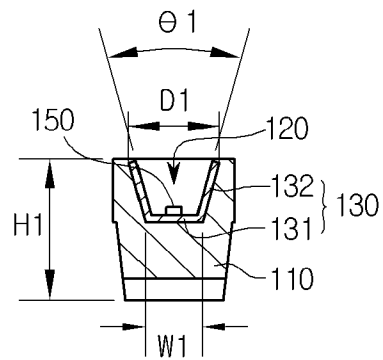


[Fig. 5]

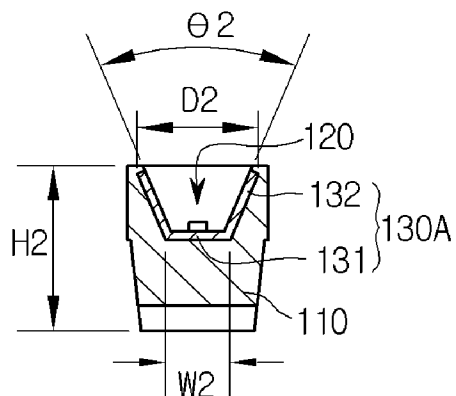


[Fig. 6]

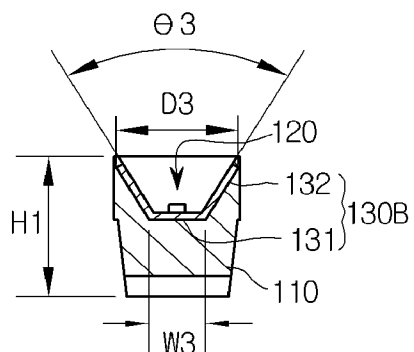


[Fig. 7]

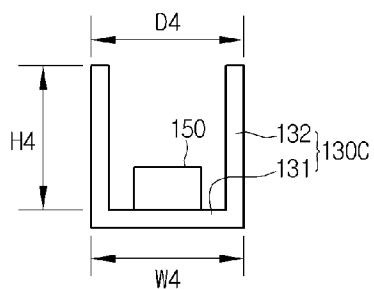

[Fig. 8]

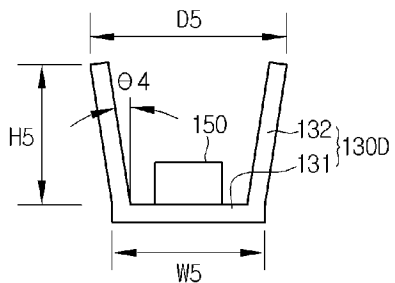


[Fig. 9]

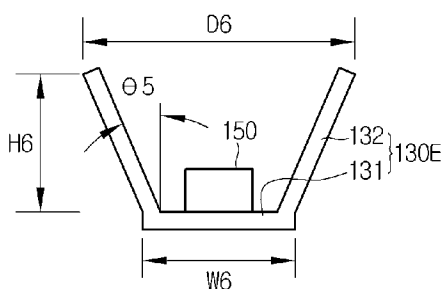





[Fig. 10]

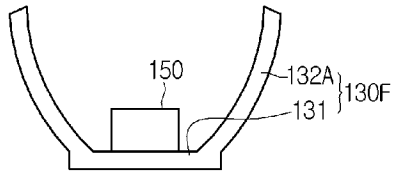


[Fig. 11]

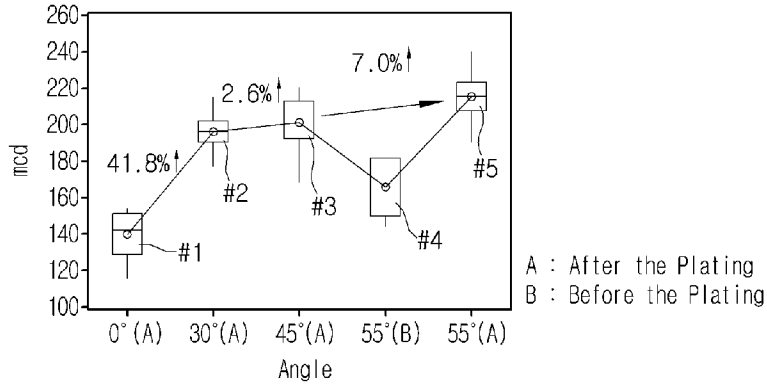

[Fig. 12]

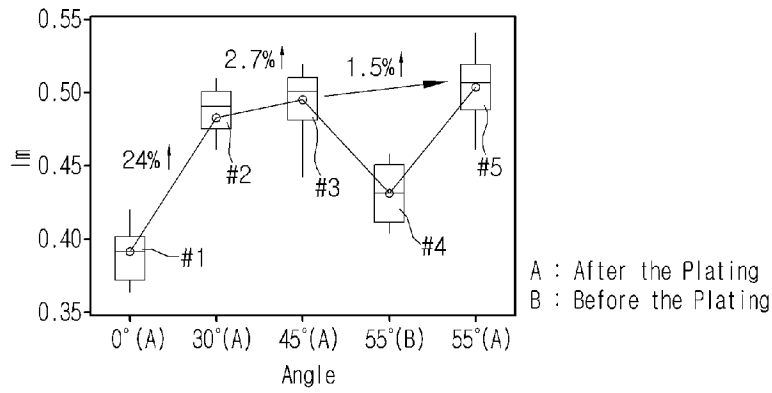

[Fig. 13]

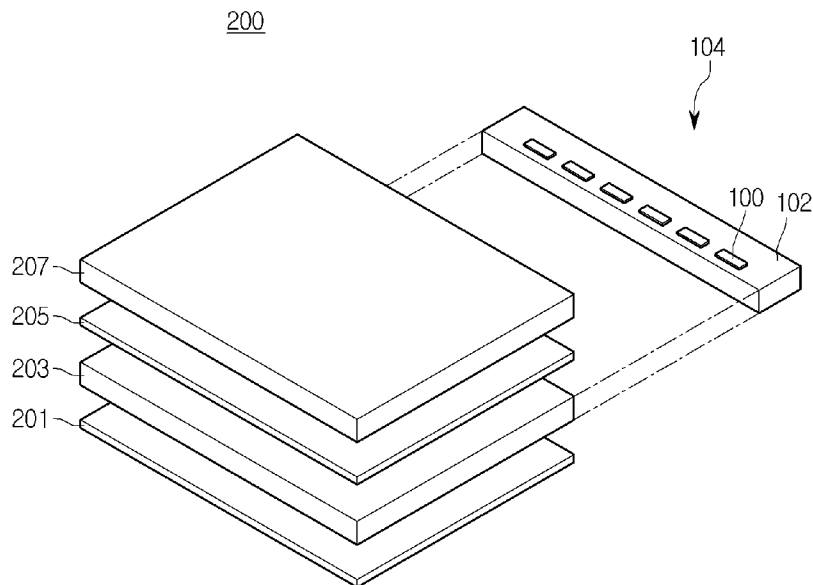

**A. CLASSIFICATION OF SUBJECT MATTER***H01L 33/00(2006.01)i*

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 8 H01L, F21V, G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility models and applications for Utility models since 1975  
Japanese Utility models and applications for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS(KIPO internal) "lead frame", "bottom frame", "side frame"

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	KR 10-2004-0104178 A (SAMSUNG ELECTRO-MECHANICS CO., LTD.) 10 Dec. 2004 See the Abstract; Figure 5	1-20
Y	JP 2002-314142 A (TOYODA GOSEI CO., LTD. & TOSHIBA CO.) 25 Oct. 2002 See the Abstract; Paragraph [0026]-Paragraph [0125]; Figure 10	1-20
Y	JP 2000-183407 A (ROHM CO., LTD.) 30 Jun. 2000 See the Abstract; Figure 9	17
Y	JP 2004-235139 A (MATSUSHITA ELECTRIC IND. CO., LTD.) 19 Aug. 2004 See the Abstract; Figures 4, 5	19-20

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

24 JULY 2008 (24.07.2008)

Date of mailing of the international search report

**24 JULY 2008 (24.07.2008)**

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
Government Complex-Daejeon, 139 Seonsa-ro, Seo-gu,  
Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Jin Hong

Telephone No. 82-42-481-8509



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/KR2008/002183**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 1020040104178 A	10.12.2004	JP 2004-363533 A	24.12.2004
		US 2004-0248332 A1	09.12.2004
		US 6984539 B2	10.01.2006
JP 2002-314142 A	25.10.2002	CN 1380703 A	20.11.2002
		EP 1249873 A2	16.10.2002
		EP 1249873 A3	28.03.2007
		KR 10-2002-0079513 A	19.10.2002
		US 2002-0163302 A1	07.11.2002
		US 2002-163302 A1	07.11.2002
		US 2007-085107 A1	19.04.2007
		US 7176623 B2	13.02.2007
JP 2000-183407 A	30.06.2000	DE 69937137 C0	31.10.2007
		EP 1011151 A2	21.06.2000
		EP 1011151 A3	01.08.2001
		EP 1011151 B1	19.09.2007
		KR 10-2000-0048017 A	25.07.2000
		TW 457520 B	01.10.2001
		US 6355946 B1	12.03.2002
JP 2004-235139 A	19.08.2004	CN 1846318 A	11.10.2006
		EP 1670069 A1	14.06.2006
		KR 10-2006-0063952 A	12.06.2006
		TW 232598 B	11.05.2005
		US 2007-109792 A1	17.05.2007
		WO 2005-031883 A1	07.04.2005