



(51) International Patent Classification:

A23G 1/00 (2006.01) A23G 1/22 (2006.01)
A23G 3/00 (2006.01) A23G 3/02 (2006.01)
A23G 7/00 (2006.01) A23G 7/02 (2006.01)
A23G 1/20 (2006.01)

(21) International Application Number:

PCT/US2012/045196

(22) International Filing Date:

2 July 2012 (02.07.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11172831.7 6 July 2011 (06.07.2011) EP

(71) Applicant (for all designated States except US): **KRAFT
FOODS R & D, INC.** [US/US]; Three Lakes Drive,
Northfield, IL 60093 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **WEERS, Michael**
[DE/DE]; Unterhachinger Str. 89b, 81737 Munich (DE).
GUSTAV, Thorsten [GB/GB]; 37 Church Hill Close, So-
lilhull West Midlands B91 3JB (GB). **OEZMUTLU, Oe-
zlem** [DE/DE]; Waldmuenchnerstrasse 6, 81549 Munich
(DE).

(74) Agents: **KRATZ, Rudy** et al.; Fitch, Even, Tabin & Flan-
nery, 120 S. LaSalle Street, Suite 1600, Chicago, IL 60603
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: METHOD FOR MANUFACTURING A CONFECTIONERY PRODUCT

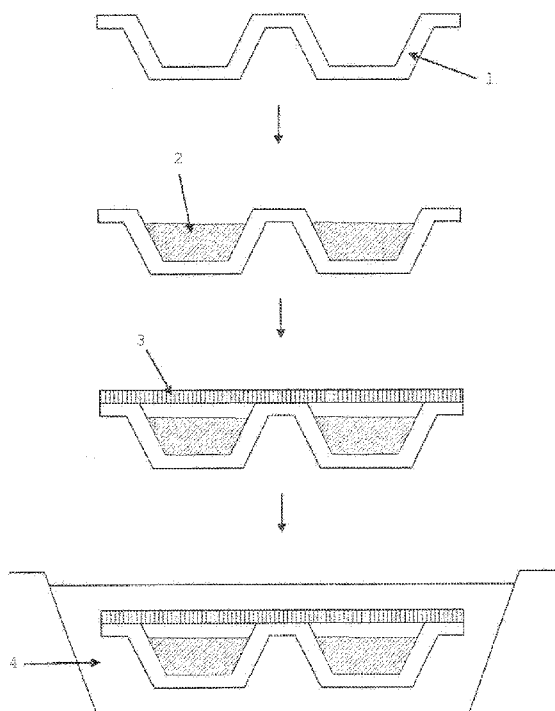

(57) Abstract: The present invention provides method for producing a confectionery product comprising the steps of: (i) sealing an unsolidified confectionery mass inside a primary package which is in direct contact with the confectionery mass; and (ii) immersing the primary package containing the unsolidified confectionery mass into a liquid having a temperature below the solidification temperature of the confectionery mass so as to solidify the confectionery mass; wherein the primary package is impervious to both the confectionery mass and the liquid.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (*Art. 21(3)*)
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (*Rule 48.2(h)*)

Method for Manufacturing a Confectionery Product

5

Technical field

The present invention relates to a method for manufacturing
10 a confectionery product, more particularly a method in
which a confectionery mass is solidified so as to produce a
confectionery product.

Background of the Invention

15

Confections formed from a liquid mass are usually required
to be cooled in order to solidify the mass prior to
packaging. For instance, a moulded or enrobed confection
having an outer chocolate layer is cooled so that the
20 chocolate solidifies and the confection can be handled and
packaged. Cooling of chocolate must be controlled so that
the fat in the chocolate crystallises in the correct form
(usually Form V). If the temperature is too low, "fat
blooming" (formation of large fat crystals on the surface
25 of the confection) may occur and the confection might not
be capable of being easily removed from a mould due to sub-
optimal crystallisation. Low temperatures may also cause
water vapour in the air to condense onto the confection and
cause "sugar blooming" due to dissolution and re-
30 crystallisation of sugar on the surface of the confection.

A confection is typically cooled by passing it through a
tunnel which is divided into zones having different

temperatures, the different temperatures being attained using a series of cooling units. Initial cooling is usually mild, particularly if the confection is enrobed with chocolate. The confection is then passed through the zone
5 having the lowest temperature (e.g. about 13°C) before being warmed slightly prior to exiting the cooler to prevent condensation forming on the confection. It is also necessary to carefully control moisture levels inside the cooler to prevent condensation forming on the confection.

10

The time required to solidify chocolate depends on its composition and quantity. However, it normally takes between 10 and 20 minutes, possibly up to 90 minutes, to obtain a confection having a satisfactory quality using a
15 conventional cooler as described above. As well as this time burden, coolers are expensive in terms of initial investment and maintenance, and coolers occupy a significant amount of floor space. Moreover, it is still necessary to package confections following cooling as well
20 as remove the confections from any mould before packaging.

A further disadvantage of conventional confectionery coolers is that it is difficult to control the cooling process when there is a stoppage in the production line
25 (i.e. movement of the confections through the cooler is halted).

GB-A-2 405 827 discloses a method for producing moulded confections using a cooler along the lines described above.
30 Chocolate shells, fillings and chocolate bases are sequentially solidified by repeatedly passing the mould through a cooling tunnel at a temperature of 10-12°C for at

least 10 minutes (at least 15 minutes in the case of the shells).

It is an object of the present invention to provide an improved method for producing a solidified confectionery product.

Summary of the Invention

A first embodiment of the present invention is a method for producing a confectionery product comprising the steps of:

(i) sealing an unsolidified confectionery mass inside a primary package which is in direct contact with the confectionery mass; and

(ii) immersing the primary package containing the unsolidified confectionery mass into a liquid having a temperature below the solidification temperature of the confectionery mass so as to solidify the confectionery mass;

wherein the primary package is impervious to both the confectionery mass and the liquid.

This method allows the confectionery mass to be solidified more rapidly than using a conventional cooler without deterioration in product quality (i.e. without fat- and sugar-blooming) and without the investment, operation and maintenance costs associated with a cooler. Cooling can be easily controlled by adjusting the temperature of the liquid and the immersion period.

The above method is also advantageous in that the confectionery mass is solidified whilst being sealed within a primary package. This not only avoids the need to apply

such packaging after cooling, but also prevents contamination of the confectionery mass and avoids sugar blooming caused by condensation.

5 **Brief Description of the Drawings**

Figures 1-3: Flow diagrams illustrating particular methods according to the present invention.

10 **Detailed Description of the Invention**

The method of the present invention is described in detail below.

15 The confectionery product is not particularly limited; the confectionery product can, for instance, be a block or tablet (with or without breakable portions), a thin sheet or slice, an individual bite-sized portion or a bar.

20 The confectionery mass deposited into the primary package is unsolidified. This means that the confectionery mass is not fully solidified. The mass can, however, be partially solidified and/or be mixed with solid components (e.g. solid chocolate or nut pieces). Preferably, the
25 confectionery mass is free-flowing under gravity so that it can be easily shaped in the primary package.

The confectionery (i.e. sugar- or sugar substitute-containing) mass can be fat-based, examples of which
30 include chocolate, caramel, toffee and confectionery emulsions. In a particular embodiment, the confectionery mass comprises, or consists of, tempered chocolate, meaning that the chocolate has undergone controlled heating and

cooling so that it contains predominantly Type V fat crystals. Tempering processes are well known. Tempered chocolate provides optimal taste, texture, appearance and "snap".

5

The primary package within which the unsolidified confectionery mass is sealed serves to contain and protect the confectionery mass during immersion in the liquid (hereinafter occasionally referred to as the "cooling liquid"). It is therefore required that the primary package is impervious to the confectionery mass and the liquid under the conditions of immersion in the liquid, i.e. confectionery mass should not leak through the primary package and the liquid should not pass through the package.

15 Use of a primary package which is pervious to the liquid under the immersion conditions can lead to contamination of the confectionery mass. This should be prevented from both a consumer perception and safety point of view.

20 As well as being impervious to the confectionery mass and the cooling liquid, the primary package should enable heat conduction to some extent so that the confectionery mass solidifies whilst immersed in the liquid. This may depend on the thickness of the package and the thickness of the confectionery mass. The primary package suitably has a

25 thermal conductivity of at least 0.1 W/(m.K) .

The primary package may be formed from a polymeric material (i.e. a polymer-containing material) so that the package

30 can be produced without difficulty and the package is impervious to the confectionery mass and the liquid. In one embodiment, the primary package comprises at least one of polyvinyl chloride (PVC), polyethylene terephthalate,

polypropylene, polyamide, polyethylene and copolymers thereof. In a more specific embodiment, the primary package comprises, or consists essentially of, polypropylene.

5 In one embodiment, the primary package comprises a mould portion which causes the confectionery mass to solidify in a predetermined shape. This means that a portion of the primary package has the predetermined shape and does not lose this shape when the package is immersed in the cooling
10 liquid. The package may, for instance, contain a concave portion into which confectionery mass is deposited. The mould portion can comprise a plurality of cavities which are semi-filled or completely filled by the confectionery mass. The cavities may be embossed or engraved in order to
15 form a decorative element on the solidified confectionery mass.

The use of a primary package comprising a mould portion is advantageous in that it avoids the need for de-moulding
20 following solidification of the confectionery mass, thereby avoiding product breakages which commonly occur during de-moulding.

A method which utilises a primary package having a moulded
25 portion according to the embodiment described above is illustrated in Figure 1. In this method, a mould (1) comprising a plurality of cavities (two are visible in Figure 1, but more cavities may be present) is employed as the principal component of the primary package.

30

In an alternative embodiment, the primary package may have no predetermined shape. In particular, the package may be formed from a flexible material (e.g. a polymeric material)

which takes on the shape of at least part of the unsolidified confectionery mass. For this, the mass sealed in the primary package can have a viscosity of $<6 \text{ Pa.s}$ at 40°C and a shear rate of 5 s^{-1} . The primary package may
5 comprise a flexible film of material comprising a single layer or a plurality of layers connected together by lamination or the like. The confectionery mass can be shaped inside the primary package by vibrating the package. Vibration can be used to spread the mass out so that it
10 forms a thin layer which is rapidly solidified when immersed in the liquid.

A method in which the primary package has no predetermined shape is illustrated in Figure 2. In this method, a
15 flexible, open package (5) is (partially) filled with an unsolidified confectionery mass (2). Following sealing, the package is laid horizontally so that the confectionery mass can spread out and the package takes on the shape of the mass. This may be promoted by vibrating the package.

20 The unsolidified confectionery mass typically has a temperature of $26\text{--}31^\circ\text{C}$ when sealed inside the primary package. Accordingly, the mass may have a viscosity of $<10 \text{ Pa.s}$ at 28°C and 5 s^{-1} .

25 The primary package should not be so thick that it does not conduct heat at a sufficient rate, as is the case for conventional moulds. An overly thick primary package is also undesirable in terms of cost, environmental impact and
30 the weight of the confectionery product as sold when the primary package is retained. With this in mind, the primary package may have a maximum wall thickness of 2.5 mm, 1.5 mm, 0.5 mm, 0.1 mm, 0.05 mm or 0.03 mm. The latter four

values are particularly appropriate when the primary package has no predetermined shape so it is sufficiently flexible and allows rapid heat conduction.

5 The unsolidified confectionery material is sealed inside the primary package. In the context of the present invention, "sealed" means that the confectionery mass is contained within the primary package such that the mass does not leak out of the package and the cooling liquid
10 does not pass into the package during solidification. In one embodiment, the primary package is sealed using ultrasound (i.e. by ultrasonic sealing). This involves applying high-frequency ultrasonic acoustic vibrations to the package in order to seal the open parts of the package
15 without heating it. Heating of the package risks damaging the confectionery mass.

The primary package may consist of a plurality of parts which are sealed together once the confectionery mass has
20 been deposited. For instance, in the case that the primary package comprises a mould portion, a second package portion may be laid over the open mould portion once the confectionery mass has been deposited into the mould portion, and the mould portion and the second portion are
25 then sealed together. The second portion can be a single- or multi-layered film. Particular components of the layer(s) are as described above for the primary package as a whole. The second portion does not, however, have to have the same composition as the mould portion.

30

Figure 1 illustrates a method employing a primary package having a plurality of parts. An unsolidified confectionery

mass (2) is sealed inside a primary package consisting of a mould portion (1) and a single-layered film (3).

In an alternative embodiment, the primary package is flexible and a seal is formed between two ends of the package once the confectionery mass has been deposited into the package, thereby enclosing the mass inside the package. This is illustrated in Figure 2. In the method depicted in Figure 2, a seal (6) is formed between the open ends of the flexible package (5).

In order to solidify the confectionery mass, the primary package containing the mass is immersed in a liquid having a temperature below the solidification temperature of the mass. The liquid is not particularly limited, provided that it can be maintained at a temperature below the solidification temperature of the confectionery mass and the liquid does not pass through the primary package. For convenience, the liquid can be water.

The primary package containing the unsolidified confectionery mass is immersed in the liquid to such an extent that the mass solidifies. This generally involves submerging the confectionery mass beneath the surface of the liquid so that the mass solidifies rapidly and evenly. It is not, however, necessary for the entire primary package to be submerged.

The temperature of the liquid should be lower than the solidification temperature of the confectionery mass, i.e. below the temperature at which the confectionery mass in full liquid form begins to solidify. In order to solidify the confectionery mass sufficiently quickly without

reducing the quality of the solidified mass, the liquid can have a temperature of no more than 20°C, 18°C or 16°C, and at least 1°C, 2°C, 3°C, 4°C, 5°C or 10°C. More particularly, the temperature of the liquid may be in the
5 range of 5-16°C or 10-15°C. In the case that the confectionery mass is chocolate, a temperature within these ranges solidifies the chocolate rapidly and produces a stable crystal structure.

10 The immersion period is dependent on the composition and mass of the confectionery mass as well as the distribution of the mass in the primary package and the temperature of the cooling liquid. In general, the primary package is immersed in the liquid for no longer than 5 minutes, more
15 particularly no longer than 2 minutes, in order to solidify the confectionery mass. Such rapid solidification increases the output of the method compared to methods using a conventional cooler. The minimum immersion period necessary for solidification is generally 30 seconds, 45 seconds or 1
20 minute. These values can be freely combined with the aforementioned maximum durations.

It is not necessary that the confectionery mass is completely solidified when it is immersed in the cooling
25 liquid. However, substantial solidification is advantageous in terms of avoiding the need to further cool the mass after immersion. In one embodiment, the confectionery mass is completely solidified during immersion in the cooling liquid.

30

The confectionery mass can be retained in the primary package after solidification so that the solidified mass remains protected and is ready for shipping as it is or for

further packaging (secondary packaging). In one embodiment, a secondary package is formed around the solidified confectionery mass sealed inside the primary package. Examples of the secondary package include paper and
5 cardboard boxes and sleeves, and foil wrappers.

Figure 3 illustrates a particular method according to the present invention. In this method, unsolidified tempered chocolate is first deposited into a primary package
10 comprising a mould portion. The package is sealed (e.g. by ultrasonically 'welding' a polymer film over the mould portion) and subsequently immersed in a liquid having a temperature below the solidification temperature of the chocolate (e.g. 5-16°C). Once the chocolate is
15 substantially or fully solidified, the package is removed from the liquid and a secondary package is formed around the primary package so that the product is ready to be shipped.

20 Examples

The present invention is illustrated by the following Examples.

25 Example 1

25 g of unsolidified tempered Milka® milk chocolate (manufactured by Kraft Foods) at a temperature of 26.7-27.3°C was deposited into three flexible pouches in turn.
30 The pouches were formed from polypropylene, had a thickness of 27 µm and measured 100 × 90 mm. The pouches were heat sealed at 150°C using a Freya sealing machine and placed on a vibration table (vertical frequency = 100 Hz, horizontal

frequency = 100 Hz, amplitude = 3 mm) for 30 seconds to distribute the chocolate evenly inside the pouches. The thickness of the chocolate layers in the pouches following vibration was between 2 mm and 4 mm.

5

The pouches containing the unsolidified chocolate were fully immersed in a water bath. The water had a temperature of 5°C and was gently circulated.

10 The temperature of the chocolate in each of the pouches was monitored using a Testo 735 temperature probe until the temperature of the solidified chocolate reached the temperature of the water or the cooling rate reached zero. It was found that the chocolate took 32 seconds to reach a
15 temperature of 20°C and an average of 4.2 minutes to reach 5°C. The maximum cooling rate was 28°C/minute.

Examples 2-5

20 Chocolate was solidified in the manner described in Example 1, except that the temperature of the water bath was altered, as shown in Table 1 below.

Table 1

25

Example	Water temp. (°C)	Average initial temp. (°C)	Average time to reach 20°C (s)	Average time to reach water temp. (min)	Average maximum cooling rate (°C/min)
1	5	27.5	32	4.2	28
2	8	27.8	32	3.5	21
3	10	27.4	34	2.3	22
4	12	27.5	36	2.3	22

5	14	27.6	35	1.8	20
---	----	------	----	-----	----

The solidified chocolate was stored inside the sealed pouches for 3 months at 16°C. None of the samples displayed a change in appearance over this period (i.e. no fat- or sugar-blooming occurred), despite the low temperatures of the cooling liquids.

The crystallisation properties of the chocolate of Examples 1 and 5 were compared by subjecting the chocolate to differential scanning calorimetry (DSC). This revealed no significant difference between the chocolate as regards melting temperature. However, the average enthalpy of melting of the chocolate solidified in a water bath at 5°C was lower than that solidified at 14°C: 32.05 J/g versus 33.99 J/g. This indicates that the lower cooling rate provided a more stable crystalline structure.

Example 6

25 g of unsolidified tempered Milka® milk chocolate (manufactured by Kraft Foods) at a temperature of 27.5 °C was deposited into an open tablet-form PVC mould measuring 40 × 25 × 10 mm and having a wall thickness of 2.5 mm. The mould contained 24 sub-cavities arranged in 3 rows and 8 columns at its base. The depth of the mould was 10 mm.

The mould was vibrated (vertical frequency = 100 Hz, horizontal frequency = 100 Hz, amplitude = 3 mm) for 30 seconds to smooth the surface of the chocolate. Subsequently, the open top of the mould was heat sealed at 150°C using a cast polypropylene film having a thickness of 27 µm.

The sealed mould containing the unsolidified chocolate was submerged in a water bath having a temperature of 5°C for 116 seconds in order to solidify the chocolate.

5

The chocolate was stored for 3 weeks inside the sealed mould. It was found that the appearance of the chocolate was unchanged over this period, i.e. no fat- or sugar-blooming occurred.

10

Claims

1. A method for producing a confectionery product
5 comprising the steps of:

(i) sealing an unsolidified confectionery mass inside
a primary package which is in direct contact with the
confectionery mass; and

(ii) immersing the primary package containing the
10 unsolidified confectionery mass into a liquid having a
temperature below the solidification temperature of the
confectionery mass so as to solidify the confectionery
mass;

wherein the primary package is impervious to both the
15 confectionery mass and the liquid.

2. A method according to Claim 1, wherein the
confectionery mass comprises tempered chocolate.

20 3. A method according to Claim 1 or Claim 2, wherein the
primary package comprises a polymer.

4. A method according to Claim 3, wherein the primary
package comprises at least one of polyvinyl chloride,
25 polyethylene terephthalate and polypropylene.

5. A method according any preceding claim, wherein the
primary package is sealed in step (i) by ultrasonic sealing
or heat sealing.

30

6. A method according to any preceding claim, wherein the
primary package comprises a mould portion which causes

confectionery mass therein to solidify in a predetermined shape in step (ii).

7. A method according to Claim 6, wherein the mould
5 portion comprises a plurality of cavities which contain the confectionery mass in steps (i) and (ii).

8. A method according to any of Claims 1-5, wherein the
10 primary package has no predetermined shape and is capable of conforming to the shape of at least part of the unsolidified confectionery mass.

9. A method according to Claim 8, wherein the
15 confectionery mass sealed inside the primary package is vibrated so as to shape the mass.

10. A method according to any preceding claim, wherein the
unsolidified confectionery mass sealed in the primary package is formed into a predetermined shape and immersed
20 in the liquid in the predetermined shape.

11. A method according to any preceding claim, wherein the primary package has a maximum wall thickness of 0.5 mm.

25 12. A method according to any preceding claim, wherein the temperature of the liquid in step (ii) is 5-16°C.

13. A method according to Claim 12, wherein the
temperature of the liquid is 10-15°C.


30 14. A method according to any preceding claim, wherein the primary package containing the confectionery mass is

immersed in the liquid for no more than 2 minutes in step (ii).

15. A method according to any preceding claim, comprising
5 the additional step of forming a secondary package around the primary package containing the solidified confectionery mass.


1/3

Figure 1

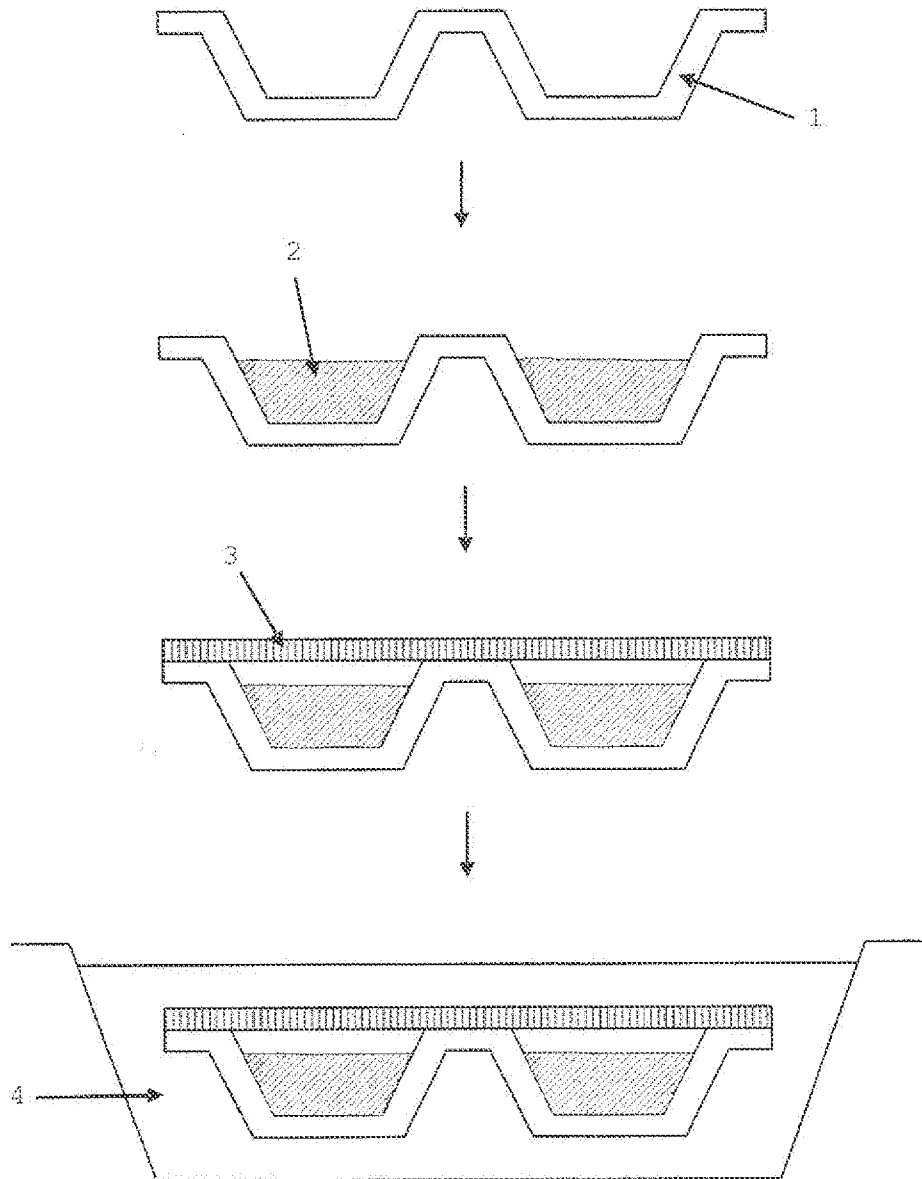


2/3

Figure 2

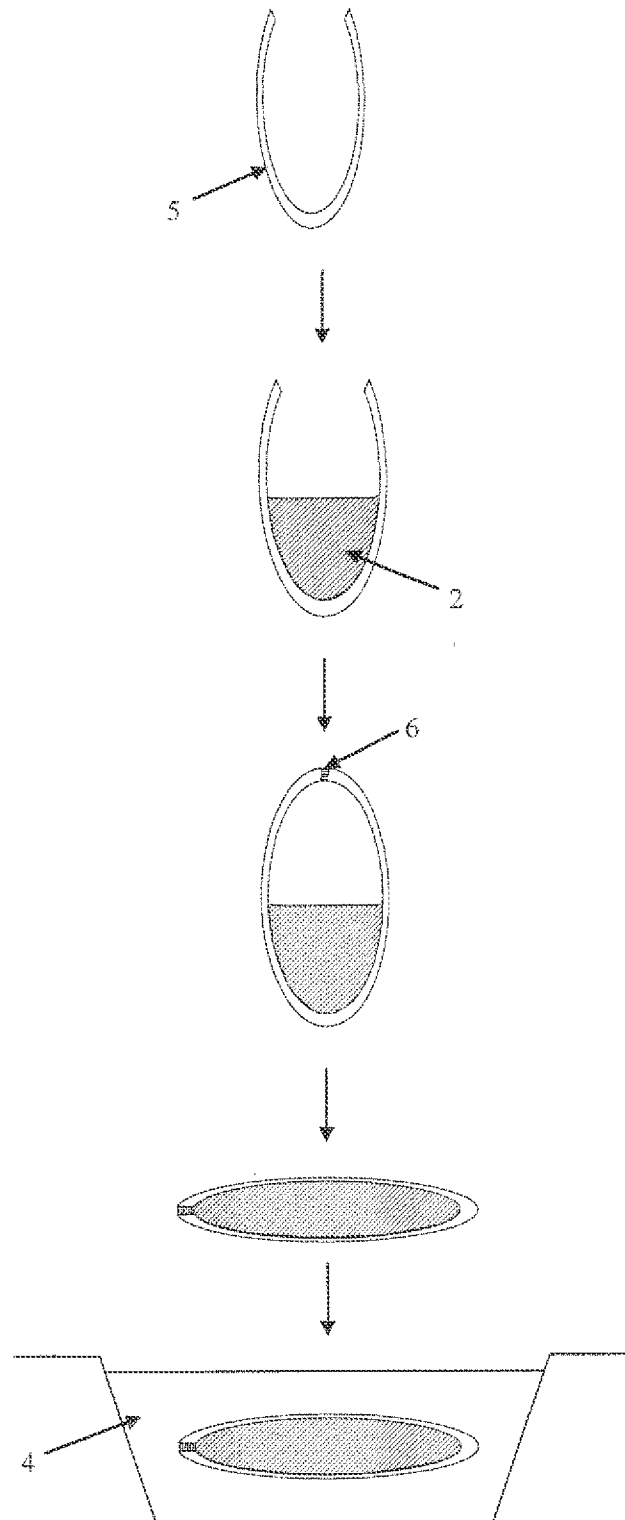

3/3

Figure 3

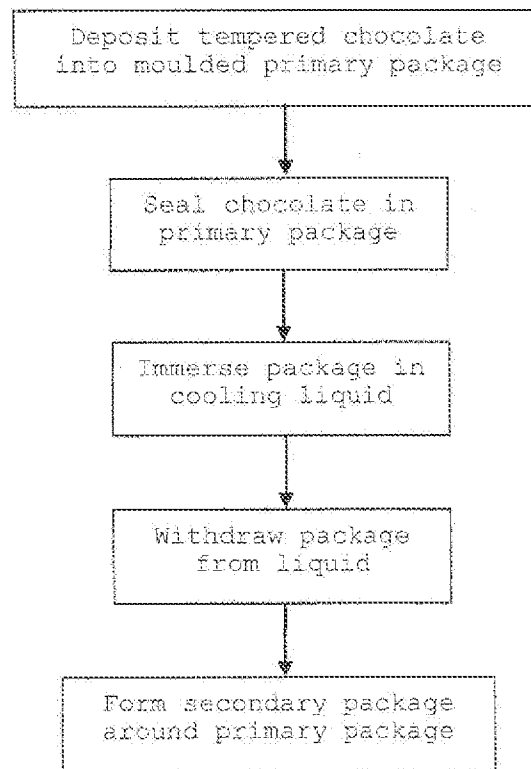

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/045196

A. CLASSIFICATION OF SUBJECT MATTER

INV. A23G1/00 A23G3/00 A23G7/00 A23G1/20 A23G1/22
A23G3/02 A23G7/02

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A23G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data, FSTA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 94/04046 A1 (R W FROOKIES INC [US]) 3 March 1994 (1994-03-03) claims; examples -----	1-15
X	GB 1 128 525 A (MIDLAND COUNTIES DAIRY LTD) 25 September 1968 (1968-09-25) pages 2,3; claims 1,2,6; figures -----	1-15
X	DE 198 30 258 A1 (RITTER KG ALFRED [DE]) 13 January 2000 (2000-01-13) the whole document -----	1-15
X	FR 2 539 670 A1 (CHAUDRONNEES CENTRE SA CONST [FR]) 27 July 1984 (1984-07-27) page 9, line 23; claims; figures ----- -/--	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 November 2012

Date of mailing of the international search report

05/12/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Boddaert, Peter

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/045196

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 609 237 A1 (GARNIER PATRICK [FR]) 8 July 1988 (1988-07-08) claims; figures -----	1-15
X	JP 56 023838 A (SHICHIFUKU SHIYOKUHN KK) 6 March 1981 (1981-03-06) the whole document -----	1-15
X	US 4 104 411 A (POOLER JOHN DENNIS) 1 August 1978 (1978-08-01) columns 1-3; claims; figures -----	1-15
Y	FR 2 801 570 A1 (JACQUOT [FR]) 1 June 2001 (2001-06-01) the whole document -----	1-15
Y	US 5 789 005 A (TABARONI ROBERTO [IT] ET AL) 4 August 1998 (1998-08-04) column 2, lines 42-43; claims; figures -----	1-15
Y	BE 1 017 445 A6 (COPABE NV [BE]) 2 September 2008 (2008-09-02) the whole document -----	1-15
Y	FR 1 587 835 A (SOCIÉTÉ D'ÉTUDES ET FABRICATIONS ALIMENTAIRES) 27 March 1970 (1970-03-27) the whole document -----	1-15
Y	US 2 796 033 A (EDWARD FEINSTEIN) 18 June 1957 (1957-06-18) the whole document -----	1-15
Y	WO 93/21087 A1 (TRANI GIORGIO [IT]) 28 October 1993 (1993-10-28) the whole document -----	1-15
Y	JP 55 023911 A (IZUMI FOOD MACHINERY) 20 February 1980 (1980-02-20) the whole document -----	1-15
Y	GB 645 747 A (MICHAEL NATHANSON; RALPH COHEN; ABE ROSENTHAL) 8 November 1950 (1950-11-08) page 2, column 1 -----	1
Y	JP 2 092261 A (TOPPAN PRINTING CO LTD; ASAHI DENKA KOGYO KK) 3 April 1990 (1990-04-03) abstract -----	1-15
Y	GB 1 214 983 A (RASMUSSEN BEN EDWARD [US]) 9 December 1970 (1970-12-09) the whole document -----	1-15
	----- -/--	

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/045196

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 59 120062 A (USUI KOGYOSHO KK) 11 July 1984 (1984-07-11) the whole document -----	1-15
Y	JP 61 037077 A (TOYO REIKOU KK) 21 February 1986 (1986-02-21) the whole document -----	1-15
Y	JP 2009 136193 A (NAGASHIO KICHINOSUKE) 25 June 2009 (2009-06-25) the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/045196

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9404046	A1	03-03-1994	AU 5009593 A WO 9404046 A1	15-03-1994 03-03-1994
GB 1128525	A	25-09-1968	NONE	
DE 19830258	A1	13-01-2000	NONE	
FR 2539670	A1	27-07-1984	NONE	
FR 2609237	A1	08-07-1988	NONE	
JP 56023838	A	06-03-1981	JP 1104410 C JP 56023838 A JP 56050935 B	16-07-1982 06-03-1981 02-12-1981
US 4104411	A	01-08-1978	NONE	
FR 2801570	A1	01-06-2001	NONE	
US 5789005	A	04-08-1998	AT 227087 T AU 7496394 A BR 9407289 A CA 2169952 A1 CN 1129393 A DE 69431663 D1 DE 69431663 T2 DK 719095 T3 EP 0719095 A1 ES 2185659 T3 FI 960608 A IT 1262654 B JP H09501836 A NO 960752 A US 5789005 A WO 9505749 A1	15-11-2002 21-03-1995 01-10-1996 02-03-1995 21-08-1996 12-12-2002 21-08-2003 03-03-2003 03-07-1996 01-05-2003 09-02-1996 04-07-1996 25-02-1997 23-02-1996 04-08-1998 02-03-1995
BE 1017445	A6	02-09-2008	NONE	
FR 1587835	A	27-03-1970	BE 740230 A DE 1951338 A1 FR 1587835 A IT 942032 B MC 804 A	16-03-1970 23-07-1970 27-03-1970 20-03-1973 30-07-1970
US 2796033	A	18-06-1957	NONE	
WO 9321087	A1	28-10-1993	AT 147358 T DE 69307303 D1 EP 0633861 A1 IT 1268407 B1 WO 9321087 A1	15-01-1997 20-02-1997 18-01-1995 27-02-1997 28-10-1993
JP 55023911	A	20-02-1980	JP 1270421 C JP 55023911 A JP 59039102 B	25-06-1985 20-02-1980 20-09-1984
GB 645747	A	08-11-1950	NONE	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/045196

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2092261	A	03-04-1990	NONE	

GB 1214983	A	09-12-1970	NONE	

JP 59120062	A	11-07-1984	JP 59120062 A	11-07-1984
			JP 61025344 B	14-06-1986

JP 61037077	A	21-02-1986	JP 1649710 C	30-03-1992
			JP 61037077 A	21-02-1986
			JP 63024661 B	21-05-1988

JP 2009136193	A	25-06-2009	NONE	
