

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
09 November 2017 (09.11.2017)



(10) International Publication Number
WO 2017/192591 A9



(51) International Patent Classification:
G07F 11/34 (2006.01)

(21) International Application Number:

PCT/US2017/030643

(22) International Filing Date:

02 May 2017 (02.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/330,731

02 May 2016 (02.05.2016)

US

(71) Applicant: **THE COCA-COLA COMPANY** [US/US];
One Coca-Cola Plaza, Atlanta, GA 30313 (US).

(72) Inventors: **BURNETT, Clayton**; One Coca-Cola Plaza,
Atlanta, GA 30313 (US). **HAWKINS, Alan, Lee**; One Co-
ca-Cola Plaza, Atlanta, GA 30313 (US). **BOYD, John**;
One Coca-Cola Plaza, Atlanta, GA 30313 (US). **NORTH,**
Thomas, G., III; One Coca-Cola Plaza, Atlanta, GA 30313
(US). **FU, Chih-Shang**; One Coca-Cola Plaza, Atlanta, GA
30313 (US).

(74) Agent: **SOLOMON, Gary, B.**; Dentons US LLP, P.O.Box
061080, Wacker Drive Station, Willis Tower, Chicago, IL
60606 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: VENDING MECHANISM

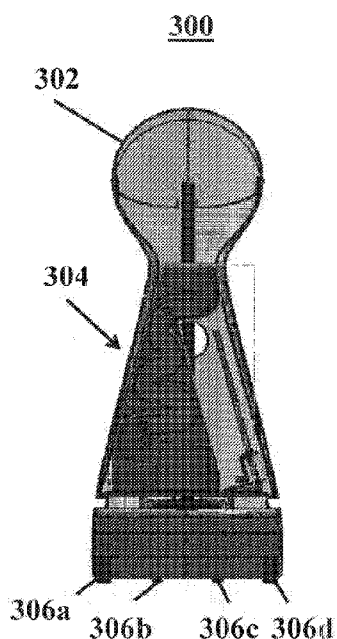


FIG. 3B

(57) Abstract: A system and method of vending product items may include storing product items within a product storage area. A product item may be released from the product storage area. The product item may be hoisted over at least a portion of the product storage area. The hoisted product item may be presented to a user. In one embodiment, the product storage area may be positioned within a vending machine, and the vending machine may be mobile. The vending machine may also be self-propelled. In an embodiment, the vending machine may be moved via a controller being used by an operator. Alternatively, the vending machine may be moved autonomously.

WO 2017/192591 A9

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(48) Date of publication of this corrected version:

04 January 2018 (04.01.2018)

(15) Information about Correction:

see Notice of 04 January 2018 (04.01.2018)

TITLE OF THE INVENTION

VENDING MECHANISM

REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of United States Provisional Application No. 62/330,731, filed May 2, 2016, which is herein incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] Vending machines are equipment used to dispense products, such as foods and beverages, to people who want to conveniently purchase products. Conventional vending machines come in many different designs, but are typically rectangular in shape with rows or columns of product items. As an example, in the event of a beverage company using a vending machine to deliver beverages to customers, one or more beverage type is loaded into the vending machines, and made available for selection by a user for purchase via a user interface.

[0003] Vending machines have a variety of different vending mechanisms, including rows with screw mechanisms for dispensing one product item at a time, columns with screw mechanisms for dispensing one product item at a time, rows with robotic selector arms that select a product item, vertical elevators that lift product items from a bottom position to an upper position to deliver a product item to a user, and so forth. These vending machines are generally fixedly positioned and weigh a significant amount due to the weight of the product items, refrigeration units, and overall mass of the vending machines.

SUMMARY OF THE INVENTION

[0004] To provide for a vending machine that has sufficient product storage space, a product storage area with angled walls having a wider base than top may be utilized. The vending machine may be self-propelled, mobile, and have a robotic (e.g., humanoid, with or without arms) appearance. In one embodiment, the product storage area may include a product storage serpentine that enables product items to be gravitationally guided and into an elevator shaft so that an elevator mechanism inclusive of a cradle or otherwise configured may be used to hoist a product item upward and dispensed into a dispenser area for a user to receive. The product items may be beverages, food products (e.g., snacks), promotional items, tickets, messages, or otherwise, and include containers that have a circular shape so that the product items may roll as a function of gravity within the product storage serpentine.

[0005] One embodiment of a vending machine may include a housing and a product storage area in which product items to be dispensed by the vending machine are stored. An elevator shaft may be positioned adjacent to the product storage area, and have an acute angle relative to a base and towards the product storage area. An elevator member, such as a cradle, may be configured to hoist a product item along the elevator shaft. A drive mechanism, such as a motor, may be configured to cause the elevator member to move from a first position to a second position along the elevator shaft to hoist the product item. An opening may be defined by the housing, and be configured to enable the product item to be received by a user.

[0006] One embodiment of a method of vending product items may include storing product items within a product storage area. A product item may be released from the product storage area. The product item may be hoisted over at least a portion of the product storage area. The hoisted product item may be presented to a user.

[0007] One embodiment of a vending machine may include a product storage area and at least one sensor configured to capture data of a user. The vending machine may further include a processing unit in communication with the sensor(s), and be configured to (i) process the captured data to determine if the user performs a physical action, and, responsive to determining that the user performs a physical action, cause the vending machine to perform an action.

BRIEF DESCRIPTION OF THE FIGURES

[0008] The subject matter that is regarded as the invention is particularly pointed out and distinctly claimed in the claims at the conclusion of the specification. The foregoing and other objects, features, and advantages of the invention are apparent from the following detailed description taken in conjunction with the accompanying drawings in which:

[0009] **FIG. 1A** is an illustration of an illustrative vending machine shaped as a humanoid robot capable of being self-propelled;

[0010] **FIG. 1B** is an alternative embodiment of an illustrative vending machine shaped with a robotic appearance;

[0011] **FIG. 1C** is a schematic of illustrative circuit elements shows the sensors to be in electrical communication with the processing unit;

[0012] **FIG. 1D** is a block diagram inclusive of illustrative software modules that may form part of the software of **FIG. 1C** to enable a user to interface with the vending machine and to operate the vending machine of **FIG. 1B**;

[0013] **FIG. 1E** is an illustrative flow diagram for an illustrative process for providing vending of product items from a vending machine, such as, but not limited to, the vending machine of **FIG. 1B**;

[0014] **FIG. 2A** is an illustration of a front view of an illustrative vending mechanism configured to be positioned within a vending machine, and shaped to maximize space and flow of product items to be dispensed to a user of the vending machine;

[0015] **FIG. 2B** is an illustration of a side view of the vending mechanism of **FIG. 2A**;

[0016] **FIG. 2C** is an illustration of a perspective view of the vending mechanism of **FIG. 2A**;

[0017] **FIG. 2D** is an illustrative of a top view of the vending mechanism of **FIG. 2A**;

[0018] **FIG. 2E** is an illustration of an alternative illustrative embodiment of a vending mechanism configured to dispense multiple product types;

[0019] **FIG. 2F** is an illustration of another illustrative vending mechanism that operates within a vending machine;

[0020] **FIGS. 3A-3D** are illustrations of an illustrative vending machine inclusive of a vending mechanism;

[0021] **FIG. 4** is a flow diagram of an illustrative process for manufacturing a vending machine;

[0022] **FIG. 5** is a flow diagram of an illustrative process for operation of a vending machine;

[0023] **FIG. 6** is a flow diagram of an alternative illustrative process for operation of a vending machine;

[0024] **FIGS. 7A and 7B** are illustrations of an illustrative elevator drive system; and

[0025] **FIG. 8** is an illustration of an alternative illustrative elevator drive system.

DETAILED DESCRIPTION OF THE INVENTION

[0026] With regard to **FIG. 1**, an illustration of an illustrative vending machine **100a** configured in the shape of a humanoid robot capable of being self-propelled is shown. The vending machine **100a**, of course, may have any other shape and/or appearance. The vending machine **100a**, in being self-propelled, may be self-propelled through use of a drive mechanism (not shown), such as a motor, that causes one or more wheel (see **FIG. 3B**) or other elements (e.g., tank tracks) to cause the vending machine **100a** to move along a floor or otherwise. The motor may be an electric motor, such as a direct drive motor, or any other motor or power conversion device, as understood in the art, that causes a wheel or other mechanism to propel the vending machine **100a** forward. Although described as a vending machine, the vending machine **100a** may operate in a dispensing mode to dispense product items without a financial transaction occurring (i.e., provide free products or promotional giveaways). The vending machine **100a** may be used indoors or outdoors, and a drive mechanism and wheels or other elements may be properly sized and powered to accommodate different environments in which the vending machine **100a** may be operated.

[0027] The vending machine **100a**, when shaped as a humanoid, has limited storage capacity for products, such as food or beverage items, within a product storage area (see **FIG. 2A**). As an example, the vending machine **100a** may have a storage capacity of 4-6 beverage cans. The reason for the limited storage capacity is, in part, due to the narrow or tapered body portion **102a**. Other products, such as promotional items (e.g., fast pass to rides), toys, vouchers, stuffed animals, coupons, messages (e.g., jokes), and so on, may also be vended by the vending machine **100a** or **100b** (see **FIG. 1B**), as further described herein. To enable the other products to be more easily dispensable, the products may be placed in a container with at least a portion (e.g., circumference) of the container being circular so that the container can roll due to gravitational forces through the vending machine, as further described herein. Alternative designs may be utilized to provide for the same vertical travel functionality to be possible. For example, carriages on tracks, rails, or otherwise on which products may be placed to be dispensed utilizing gravitational forces may be utilized.

[0028] In addition to the limited capacity, because the body portion **102a** is in the shape of a humanoid body (e.g., chest, stomach, and/or legs), the product storage area has a high center-of-gravity. Thus, to expand product storage capacity and lower the center-of-gravity, the shape of the vending machine **102a** may be altered to be wider at the base, such as shown

in **FIG. 1B**, and include a diagonal elevator shaft to provide an efficient use of space within the body portion **102a**. A dispensing area **104a** located in the center of the body portion **102a** of the vending machine **100a** may enable a user to receive the product items from the vending machine **100a**. In this case, the dispensing area **104a** is circular, has a downward angle (e.g., 45 degrees), and is centrally positioned. However, it should be understood that any shape (e.g., heart shape) and configuration of a dispensing area **104a** may be utilized for providing product items to users. In an alternative embodiment, the dispensing area **104a** may be repositioned to be in another location of the vending machine **100a**. For example, the dispensing area **104a** may be repositioned to be at the head (e.g., mouth) or hand. The vending machine **100a** is shown to include a top portion **106a**, which in this case is a head with a face. If the vending machine **100a** had a different shape, such as a tree, the top portion may have a different shape (e.g., branches and leaves, cartoon character, etc.). So as to maintain a lower center-of-gravity to reduce the risk of the vending machine **100a** tipping over and improving mobility, the top portion **106a** may be lightweight.

[0029] Although not shown, one or more user interface elements (not shown), such as buttons, electronic displays, or otherwise, may be provided on the vending machine **100a** to enable a user to interact with the vending machine **100a** to select and/or pay for products. The user interface may be located anywhere on the vending machine **100a**. In one embodiment, the user interface may be provided or otherwise be available via an electronic device (e.g., smartphone via the Internet), and the vending machine **100a** may include a wireless device that enables the user to interact specifically with the vending machine **100a** to make his or her selection and/or pay for a selected product. Payment may be performed using a credit card, online account (e.g., PayPal®), cash, coins, or any other form of payment locally or remotely.

[0030] With regard to **FIG. 1B**, an alternative embodiment of an illustrative vending machine **100b** is shown. This vending machine **100b** is less humanoid in appearance, and is configured to have a larger storage capacity (e.g., 20+ beverage cans) and a lower center-of-gravity with more product capacity by having a wider lower region **108a** than upper region **108b**. In one embodiment, a product storage area may be positioned within the vending machine **100b**, and the vending machine **100b** may be mobile. The vending machine **100b** may also be self-propelled. In an embodiment, the vending machine **100b** may be moved via a controller, wired or wireless, with a user interface being used by an operator. Alternatively, the vending machine **100b** may be moved autonomously, such as the vending machine **100b**

tracking a wireless device, object, individual, or otherwise using one or more sensors (e.g., image, RF, IR, UV, etc.) and a processing unit to cause movement of the vending machine **100b**.

[0031] The housing **102b**, as shown, is configured to be triangular and symmetric. It should be understood that alternative configurations, such as semi-spherical, stacked spheres or sphere portions (e.g., snowman shape), trapezoidal, or otherwise (e.g., non-symmetric), may be utilized. A dispensing area **104b** is shown to be offset to where a heart may be located, and be positionally more accessible to dispense products stored in the vending machine **100b** due to having an elevator or lift positioned adjacent to or beside the product storage area, as further described herein. The dispensing area **104b** is shown to be circular, but non-circular (e.g., heart shaped) or dynamically shaped (e.g., mouth that opens and closes) configurations may be utilized, as well. A sensor may be located at the dispensing area **104b** to sense that a product item is removed therefrom prior to dispensing another product item.

[0032] In one embodiment, the housing **102b** may be configured to form fit the dispensing area **104b** so that a profile of the housing **102b** is minimized. In such an embodiment, the dispensing area **104b** may be configured without a refrigerator or heater unit so that the product items are maintained at ambient temperature. In an alternative embodiment, a refrigerator unit (not shown) may be positioned within the housing **102b** to maintain a cool temperature, such as desirable for beverages. In yet another embodiment, a heater unit (not shown) may be positioned within the housing **102b** to maintain an elevated temperature, such as desirable for warm food. In yet another embodiment, both a refrigerator unit and heater unit, optionally configured as a single unit, may be positioned within the housing **102b**. Still yet, a refrigerator unit and/or heater unit may be located outside the housing **102b**. If a refrigerator unit and/or heater unit were used, then the housing **102b** and/or dispensing area **104b** may be insulated to maintain a constant temperature. The vending machine **100b** may be configured with a battery (not shown), uninterruptable power supply (not shown), or wall powered.

[0033] A head region **106b** is shown to be representative of a head and face, but in this case, rather than having a humanoid face, face region is shown to be blank (e.g., flat, translucent panel). In alternative embodiments, indicia representative of facial features may be included. Still yet, the face region may be blank or translucent, but include an electronic

display of LEDs behind a translucent panel, LCDs as the panel that forms the face, or any other electronic display for use in displaying images, messages, text, or any other information to provide for entertainment, information, payment, or otherwise. In one embodiment, speakers or any other device for communicating information, entertainment (e.g., music), or feelings (e.g., happy, sad, excited, melancholy, inquisitive, etc.), for example, to the user may be configured as part of the vending machine **100b**. Still yet, the face may provide for a user interface to provide for vending operations (e.g., select product item, pay for product item, etc.). Mechanical buttons or user interface elements may also be available on the vending machine **100b** to cause a product item to be dispensed.

[0034] While the vending machine **100b** does not specifically appear to be a humanoid, certain humanoid functions may be integrated into the vending machine **100b**. As an example, the vending machine **100b** may have a human expression and/or action reading function(s) integrated therein. In order to support the human expression or action reading function, sensors, including at least one of one or more cameras **110**, microphones **112**, presence sensors (e.g., proximity, pressure, contact, ultrasound, light, radar, etc.) sensors **114** and **116** may be utilized. The sensors **114** and **116** may be the same or different types. The cameras **110** may be used to image, either in a static photograph or video, a person engaging with the vending machine **100b**, and operate in a 2D or 3D (stereoscopic) manner. The microphones **112** may be used to listen to audio from a user (e.g., request for a beverage), as well as an operator or handler of the vending machine **100b** (e.g., to listen for verbal or other audible commands).

[0035] A voice recognition system may be configured to recognize a voice of an operator using formant, pitch, cadence, pattern matching, or other analysis, thereby only responding to commands by approved operators. In some embodiments, the sensors **114** may include transmitter/receiver pairs that are capable of (i) transmitting RF or other wavelength signals and (ii) receiving reflected signals from a person in front of or otherwise positioned relative to the vending machine **104**. The sensors **116**, which may also extend along the opposite side of the vending machine **100b**, may include pressure sensors and/or light sensors to sense hands or arms, for example, pressing or covering the sensors **116**. It is noted that the sensors **114** and/or **116** may be positioned at a height and location to image or otherwise sense a child and/or adult so as to identify the category of user of the vending machine **100b**.

[0036] To support the functionality, computer processing may be integrated into the vending machine **100b**. The computer processing may include a processing unit, which may include a general processor, image processor, audio processor, signal processor, and/or any other specialized processing device and/or electronics along with specific algorithms. The processor(s) may be configured to manage sensed signals from one or more sensors and perform image, audio, or other processing. As an example, a “facial emotion expression” (such as smile from a user) may trigger dispensing a product item. An another example, an “emotion action,” such as a hug from a child, may trigger the dispensing of a product item, optionally at a reduced cost or free of charge. That is, a combination of sensing and signal processing may enable operation of the vending machine **100b** to be operated by touch or non-touch by a user to cause some level of consideration to be valued by the vending machine (e.g., verbal “please” and “thank you” is worth \$0.50 discount, verbal password is worth a free beverage, smile is worth \$0.25 discount, speaking “ABCs” is worth \$0.25, waving is worth \$0.25, hug is worth \$0.50, etc.).

[0037] With regard to **FIG. 1C**, a schematic of illustrative circuit elements shows the sensors **112**, **114**, and **116** to be in electrical communication with the processing unit **118**. The processing unit **118**, which may include one or more computer and/or signal processors, executes software **120** that is configured to determine visible, audible, and/or physical, both touch and non-touch, gestures by a user. A touch pad, touch screen, or other device (not shown), may be positioned on the vending machine **100b** may enable a user to provide for gestures, such as drawing a smiley face. In one embodiment, one or more touch sensor (e.g., capacitive sensor, pressure sensor, etc.) or proximity sensor, as understood in the art, may be configured to determine that the user touches one or more portions of the vending machine **100b**. As an example, the vending machine **100b** may be configured to sense via touch and/or proximity sensor(s) in communication with the processing unit **118** that a user shakes a hand, rubs a tummy, pats on the back, or otherwise physically interfaces with the vending machine **100b** in an appropriate manner (e.g., soft or courteous touches as opposed to slapping or hitting).

[0038] One or more electromechanical dispenser drivers **122** may be in communication with the processing unit **118**, and be configured to drive electromechanical devices, such as a gate **124** that is configured to release one or more product items into an elevator shaft such that an elevator drive **126** may lift the product item(s) for dispensing to the user. Again,

rather than using an elevator, alternative electromechanical mechanisms may be utilized to perform the vending function, as further described herein.

[0039] In operation, responsive to one or more of the sensors **116** sensing a user hugging the vending machine **100b** through physical touch or light sensing, sensor signal(s) **128** may be communicated from the sensor(s) **116** to the processing unit **118** for processing. The processing unit **118**, in determining that the user performed a certain action by processing the sensor signals **128**, may provide for a discount or take a particular action (e.g., enable vending, provide free beverage, etc.) along with issuing a command to the electromechanical dispenser drivers **122** that, in response, generate drive signals **132** and **134** that are coordinated to cause the gate **124** to release a product item into the elevator shaft and to cause the elevator drive **126** (e.g., motor) to lift a cradle used to lift the product item to a dispensing area for the user to receive his or her product item. Moreover, the processing unit **120** may cause the vending machine **100b** to generate an audible sound, such as a simple "thank you," "clapping sound," "whistle," or other audible sound, to cause the vending machine to autonomously move, such as spin in a circle, shift side-to-side, move forward and backward, move a "body part," such its head, arm(s), fingers, or otherwise, turn on light(s), display a message, or perform any other action to communicate an emotion, sentiment, notification, or message to the user.

[0040] The processing unit **118** may further be in communication with (i) payment device(s) **136** that enable a user to pay for product items, (ii) motor **138** that may be used for moving the vending machine **100b**, and user interface **140** that enables the vending machine to communicate visually, audibly, or otherwise with the user. In response to a user using one of the payment devices **136**, such as a card reader, near field communication (NFC) device, cash reader, or otherwise, the vending machine may communicate a signal **142** to the processing unit **118** that, in response, determines that sufficient money or credit (e.g., coupon or promotional code) has been tendered. The vending machine **100b** may utilize a wireless link for communicating card information to a remote server to confirm that a credit, debit, or prepaid card of a user has sufficient balance to pay for a product item, as understood in the art.

[0041] Responsive to payment being made, the processing unit **118** may cause the product item to be dispensed and drive the motor **138** with signal **144** to move the vending machine **100b** in a particular pattern, randomly, or otherwise, if desired, to show appreciation

for the purchase. Additionally, the processing unit **118** may communicate a signal **146** to the user interface **140** to display information, play audio, cause a vibration, or perform any other sensory communication of which the user interface is capable. As an example, the user interface **140** may include LEDs at the face **106b** of the vending machine **100b**, and a message, such as "enjoy your drink," may be displayed for the user. In an alternative embodiment, a graphic, image, video, facial expression, or otherwise may be displayed to the face **106b**.

[0042] With regard to **FIG. 1D**, a block diagram inclusive of illustrative software modules **148** that may form part of the software **120** of **FIG. 1C** to enable a user to interface with the vending machine and to operate the vending machine **106b** of **FIG. 1B** is shown. The modules **148** may include a user interface module **150** that supports a user interface, such as a touchscreen, keypads, buttons, or any other user interface elements. A user interaction module **152** may include executing an interactive voice response (IVR) system on the processing unit **118** that enables a user to speak commands to the vending machine **100b**. The commands may include, "purchase a product," "how much does a product cost?" "what flavors are available" or any other user interactive command. Since the vending machine **100b** may be self-propelled, the commands may include movement commands, such as "spin," "dance," "smile," or any other command. In that regard, the processing unit **118** may be configured to drive at least one wheel and/or rotate at least one wheel, thereby self-propelling and driving the vending machine **100b** in one or more directions. A payment module **154** may enable a user to pay for a product item. The payment module **154** may support payment using conventional payment mechanisms, along with supporting discounting or giveaways based on the user interaction.

[0043] The user interaction module **152** may be configured to receive and process images, touch signals, audio signals, or any other signals measured by sensors **112**, **114**, and/or **116**, as described with regard to **FIG. 1B**, and provide a discount amount to the payment module **154** for discounting, setting a price, issuing a free-of-charge product item, or providing any other value by the vending machine. A dispense module **156** may be configured to dispense a product item in response to payment or other value based on the user interaction module **152** determining that the user spoke or gestured an action (e.g., wave, smile, hug, spin, dance, blink, say "hello," say "I like your smile," or speak or gesture anything else) that is determined by the user interaction module **152** to be worth some value.

[0044] With regard to **FIG. 1E**, an illustrative flow diagram for an illustrative process **158** for providing vending of product items from a vending machine, such as, but not limited to, the vending machine of **FIG. 1B** is shown. The process **158** may start at step **160**, where a user interface may be provided to a user to purchase a product item. The user interface may be physically represented on the vending machine (e.g., card reader, bill reader, coin reader, NFC reader, code reader, etc.) or may be embedded within the vending machine (e.g., voice recognition system, scanner, or otherwise). In one embodiment, the user interface may include a wireless feature that may enable a user to use a local (e.g., Bluetooth) or long distance (e.g., mobile network) to purchase a product item from the vending machine. In one embodiment, a network server may receive an order for a product item, and the vending machine may be commanded to dispatch a product item.

[0045] At step **162**, a physical action or words may be identified to provide a discount value and/or payment. In identifying the physical action or words, a camera or other sensor may be used to image or sense physical characteristics and/or motions of a user. A processing unit that performs signal processing, such as image processing, voice recognition, audio recognition, etc., may be used to determine whether the user performs a physical action (e.g., smiles, waves, laughs, says a word or phrase, or performs any other motion or gesture) that merits providing the user with a discount or free product item to offset payment for the product item. The image processing may utilize shape and/or pattern recognition to identify a specific physical action, such as a wave or smile. The vending machine may utilize a timer to determine whether the user performs an action in a predetermined time, such as 5 seconds, and, if the user does not perform a requested action, cancels a potential discount award for the user. In one embodiment, at step **164**, payment or payment balance (e.g., full price minus offset due to performing an action) may optionally be received as a function of discount value. At step **166**, one or more product items may be dispensed by the vending machine, as further described herein.

[0046] With regard to **FIG. 2A**, an illustration of a front view of an illustrative vending mechanism **200a** configured to be positioned within a vending machine, such as a self-propelled vending machine, and shaped to maximize space and flow of products (e.g., food or beverages) to be vended to a user of the vending machine is shown. The vending mechanism **200a** may include a product storage area **202** in which a product storage serpentine **204** traverses. As shown, the product storage area **202** has a triangular shape defined by walls **203a** and **203b** (collectively **203**) in which a bottom area is wider than a top area. The

triangular-like shape (i.e., shape that is not a triangle *per se*, but has certain triangular characteristics) of the product storage area **202** lowers a center-of-gravity of a vending machine in which the vending mechanism **202a** is positioned. Alternative configurations that fit within a housing of the vending machine and provide for high-capacity may be utilized. In one embodiment, the walls **203** may be angled at approximately 75 degrees (e.g., 74-76 degrees). Alternative angles may be utilized, but the higher the angle, the less stable a vending machine will be, and the lower the angle, the wider the vending machine will be so a design tradeoff is to be made based on deployment location criteria.

[0047] Varying the width relative to the height may provide for configurations of the vending mechanism that may increase or decrease the product capacity of the vending machine along with the configuration of the product storage serpentine **204**. A center point (CP) of the product storage area **202** is shown to be above a center-of-gravity (COG), which shows how using a triangular configuration or other expanded lower region for the product storage area **202** lowers the center-of-gravity for the product storage area **202** and a vending machine in which the product storage area **202** is positioned. Although lowering the center-of-gravity in the product storage area **202** reduces the potential for the vending machine in which the vending mechanism from tipping while maximizing storage capacity, it is conceivable that a higher center-of-gravity of the vending mechanism **200a** is possible while still achieving the functionality of maximizing product storage area by including other features in the vending machine to lower the center-of-gravity.

[0048] As shown, the product storage serpentine **204** may have a top opening **206** through which products may be loaded into the product stores serpentine **204**, and the products may be lowered or guided along the product storage serpentine **204** as a function of gravity (i.e., gravitationally guiding or propelling product items along the product storage serpentine **204**). Alternatively, the product storage serpentine **204** may have a closed top without an opening. The product store serpentine **204** may be sized in length, width, and height to accommodate a beverage can (e.g., 12 ounce soda or beer can), bottle (e.g., 20 ounce bottles). For vending non-beverage containers (e.g., food, snacks, promotional items, etc.) or beverage containers with non-circular shapes, a container sized and shaped to fit within the product store serpentine **204** may be used to encapsulate such product items. The product storage serpentine **204** may have rounded or angled corners, and straight sections may have downward (e.g., 3-7 degrees) so that product that is disposed within the product storage serpentine **204** may be gravitationally lowered or guided (e.g., rolled) from top to

bottom to minimize potential of products becoming jammed or otherwise to not automatically pass through an exit **208** from the product storage serpentine **204** into an elevator shaft **210**. The product storage serpentine **204** may have an outer surface **212** that, at least in one portion, contacts or shares a wall **203b** of the product storage area **202**. The wall **203b** may also be a wall that, in part, defines the elevator shaft **210**. The product storage serpentine **204** may extend between the walls **203a** and **203b** to provide maximum capacity for product items disposed therein. To provide for additional capacity, a portion **213** of the product storage serpentine **204** may extend over the elevator shaft **210**. In an embodiment, the product storage area **202** and elevator shaft **210** may be formed as a single, modular unit that can be removed from one vending machine and placed into another vending machine, thereby making assembly and repair easier.

[0049] The elevator shaft **210** may include a base **214** that is normal to wall **203b**, in this case 15 degrees. The base **214** of the elevator shaft **210** may be positioned near the floor, such as ½ inch, of the vending machine. Elevator mechanism(s), including a motor (not shown), elevator screw shaft **216a** and elevator guide shaft **216b**, may be utilized to drive an elevator member, such as a cradle **218**, which is configured to fit and move within the elevator shaft **210**. In operation, a product (not shown) may exit the product store serpentine **204** via the exit **208** to enter into the elevator shaft **210** and onto the cradle **218**. In one embodiment, the cradle **218** may be configured to tilt to accommodate an angular dispensing area (e.g., 45 degree dispensing area). A sensor (not shown) may be used to determine when a product item is in or supported by the cradle **218**, and responsive to the sensor sensing that the cradle **218** does not have a product item, a next dispensing cycle may be performed. Electronics, such as a microprocessor, may be in communication with the sensor and elevator mechanism(s), and be configured to control dispensing operations. The sensor may be a light sensor, weight sensor, contact sensor, proximity sensor, or any other sensor capable of sensing and providing an indication as to whether or not a product item is within the cradle **218**, whether the product storage serpentine **204** is empty or has a certain number of product items remaining, or otherwise. The elevator screw shaft **216a** may drive the cradle **218** upward within the elevator shaft **210** to be released into a product dispensing area (see, for example, **FIG. 1B**). It should be understood that the elevator mechanisms, including the elevator screw shaft **216a**, elevator guide shaft **216b**, and/or cradle **218**, may be any other elevator mechanism(s), such as a belt or other mechanisms, that provide for hoisting or otherwise moving product items to a product dispensing area.

[0050] The elevator shaft **210** has an acute angle relative to a base or floor **219** of the product storage area **202**, and a product item is hoisted diagonally and above at least a portion of the product storage area **202** via the elevator shaft **210**. Other elevator shaft configurations and orientations are possible (e.g., vertical or diagonally away from the product storage area **202**), but having the elevator shaft **210** in the orientation presented, a more compact and stable vending mechanism may be provided. It should also be understood that rather than using the product storage serpentine **204** that may be limited to storing a single product type that multiple product storage serpentes or multiple angled shelves with multiple elevator entryways (see **FIG. 2E**), one at each shelf, may be used to store the same or different product types.

[0051] With regard to **FIG. 2B**, an illustration of a side view of the vending mechanism **200a** of **FIG. 2A** is shown. The elevator screw shaft **216a** and elevator guide shaft **216b** are shown to extend along the elevator shaft **210**. In this embodiment, a common wall **203b** is shared between the product storage area **202** and elevator shaft **210**. Other elevator configurations are envisioned.

[0052] With regard to **FIG. 2C**, an illustration of a perspective view of the vending mechanism **200a** of **FIG. 2A** is shown. The vending mechanism **200a** is shown with the product storage serpentine **204**. A movable stopper member (alternatively known as a gate or dam) **221** may be positioned at the exit **208** of the product storage serpentine **204** that, in an extended position, retains products in the product store serpentine **204**, and, in a retracted position, enables a product to pass through the exit **208** of the product storage serpentine **204**. A processing unit (not shown) in combination with position and/or proximity sensors (not shown) may synchronize the movable stopper member **221** with the position of the cradle **218** to ensure that a product item is released into the cradle **218** and not below the cradle **218**. A base **220** may be used to mount the product storage serpentine **204**. The vending mechanism **200a** is modular in that it may be included in and removed from one or more vending machines. A bracket **222** along with fastening members (not shown) may be used to secure the product storage serpentine **204** to the base **220**. Rather than using fastening members, adhesive or welding may be used to secure the product storage serpentine **204** to the base **220**. Although the elevator shaft is shown without walls other than the wall **203b** of the product storage area **202**. It should be understood that walls that define the elevator shaft may be included or incorporated into a housing of the vending machine. Although not shown, multiple elevator shafts, such as one on each side of the product storage area **202**,

may be utilized to dispense one or more types of product items (e.g., different beverages, beverages and food, beverages and promotional items, etc.). In such a configuration, larger dimensions of the product storage area **202** may be utilized.

[0053] With regard to **FIG. 2D**, an illustrative of a top view of the vending mechanism **200a** of **FIG. 2A** is shown.

[0054] With regard to **FIG. 2E**, an illustration of an alternative illustrative embodiment of a vending mechanism **200b** is shown. In this embodiment, rather than including a product storage serpentine **204** within a product storage area **224** of the vending mechanism **200a** as shown in **FIG. 2A**, angled shelves **226a-226e** (collectively **226**) may be utilized to enable multiple types of product items to be loaded into and dispensed from the vending mechanism **200b**. The use of the angled shelves **226** provides for a more limited number of product items to be dispensed, but supports different product types. It should be understood that the use of shelves for dispensing multiple types of items is illustrative and that alternative configurations of utilizing the product storage area **224** of the vending mechanism **200b** may be possible. For example, multiple product storage serpentine may be used. Irrespective of the configuration of the storage members, in this case angled shelves **226**, utilized for dispensing multiple types of product items, the elevator shaft **228** may include a wall **230** that forms multiple openings or doors **232a-232e** (collectively **232**) that enable product items to exit the product storage area **224** in which the angled shelves **226** are located. As an alternative to using doors **232**, gates, such as those shown in **FIG. 2F**, may be utilized to meter the product items into the elevator shaft **228**. A cradle **234** may be automatically adjusted within the elevator shaft **228** utilizing a controller and elevator mechanism(s) to be positioned from whichever of the doors **232** a product item is to dispensed. It should be understood that rather than using a cradle, other configurations of elevator members configured to hoist or lift a product item may be utilized.

[0055] With regard to **FIG. 2F**, an illustration of another illustrative vending mechanism **200c** that operates within a vending machine **236** is shown. The vending mechanism **200c** may include a first product pathway **238a** and second product pathway **238b** (collectively **238**) positioned on respective sides of the vending machine **236**. Although shown as different lengths, it should be understood that the product pathways **238** may be identical lengths. Moreover, the lengths may extend upwards along each sidewall **240a** and **240b** as much as possible so as to maximize storage capacity of product items **242a** and **242b**

(collectively **242**). In one embodiment, the product items **242a** and **242b** are the same. Alternatively, the product items **242a** and **242b** are different. As an example, the product items **242a** may be cans of a first beverage type, and the product items **242b** may be cans of a second beverage type.

[0056] To dispense the product items **242**, gates **244a** and **244b** that include servos **246a** and **246b** to control cams **248** may be utilized to release the product items **242** into a cradle **250**. The cradle **250** may be hoisted upward via an elevator shaft **252** to a dispensing area **254**. As shown, multiple cams **248** may be utilized for moving each of the product items **242a** and **242b**. It should be understood that alternative number of cams **248** may be utilized. Alternatively, different mechanism(s) may be utilized for metering or moving the product items **242** into the cradle **250**. In one embodiment, an operator may select which of the product items **242a** or **242b** to deliver. Alternatively, the user may select which of the product items **242a** or **242b** to deliver to the user by performing an action (e.g., performing a physical action, such as raising a left or right hand, shaking a left or right hand of vending machine **236**, moving left or right, or otherwise).

[0057] With regard to **FIGS. 3A-3D**, illustrations of an illustrative vending machine **300** inclusive of a housing **302** and vending mechanism **304** is shown. The vending machine **300** is shown to include wheels **306a-306d** (collectively **306**) that may be driven by a drive mechanism (not shown), such as a motor. The four wheels **306** include (i) two wheels **306b** and **306c** in the front and (ii) two wheels **306a** and **306d** in the rear of the vending machine **300**. Alternative number of wheels and configurations may be utilized to enable the vending machine to be mobile or self-propelled. In one embodiment, a first motor (not shown) may drive the rear wheels **306a** and **306d**, and a second motor (not shown) may control angles of the front wheels **306b** and **306c**. The vending machine **300** may be locally controlled by a wired controller, remotely controlled by a local wireless channel (e.g., Wi-Fi®, Bluetooth®, RF, or any other short range communications path), or remotely controlled by a wireless communications channel, such as a mobile communications channel. A controller may be configured to cause the vending machine **300** to move and travel in a desired direction. The controller may be a specialized electronic device or a mobile electronic device, such as a mobile telephone, configured with a mobile app executed by the mobile electronic device that communicates with the vending machine **300** to control motion and, optionally, operation of the vending machine **300**.

[0058] With regard to **FIGS. 7A** and **7B**, illustrations of an illustrative elevator drive system **700** are shown. The elevator drive system **700** is shown to include a guide rail **702** that is fixedly mounted within a vending machine (see, for example, vending machine **236** of **FIG. 2F**) to provide stability for lifting and dispensing a product item **703**. A carriage **704** may be configured to support a cradle **706** on which the product item **703** is supported to be dispensed. A belt **708** may be utilized to provide vertical or any other directional motion for the carriage **704**, where the carriage **704** is connected to the belt **708** via belt/carriage, connectors **710**. The belt **708** may be engaged to pulleys **712a** and **712b** that allow for the belt to move upwards and downwards by a causing rotation of the pulley **712a**, as understood in the art. The motor **714** may be a low RPM motor that is driven in one direction to lift the product item **703** for dispensing, and reversed to lower the cradle for receiving a next product item to be dispensed. The motor **714** may be any type of motor, including a direct drive motor, electromechanical motor, hydraulic motor, pneumatic motor, or any other motor, as understood in the art.

[0059] With regard to **FIG. 8**, an illustration of an alternative illustrative elevator drive system **800** is shown. A guide rail **802** may be fixedly positioned within a vending machine, such as vending machine **236** of **FIG. 2F**, to provide stability for lifting and dispensing a product item **803**, in this case, a beverage can. The guide rail **802** may be secured to the vending machine via mounting brackets **804a** and **804b** along with fastening members **806a** and **806b**, such as screws, bolts, or otherwise. Alternative hardware or fastening configurations (e.g., welds, adhesives, etc.) may be utilized to fixedly positioned the guide rail **802** in the vending machine. A carriage **808** may be slidably engaged to the guide rail **802** via a carriage connector **810**. A cradle **812** may be connected to the carriage **808** via a cradle/carriage connector **813**.

[0060] To provide for vertical or angular motion of the cradle **812**, a lead screw **814**, as understood in the art, may be supported by bearings **816a** and **816b** that enables the lead screw **814** to be rotated. A ball nut **818** may be configured to convert rotational motion of the lead screw **814** into linear motion to move the cradle **812** carrying the product item **803** from a first position to a second position to dispense the product item **803**. An attachment member or portion of the ball nut **818** may be configured to attach the ball nut **818** to the carriage **808**, as shown. A motor **822** may be coupled to the lead screw **814** via a coupler **824**, thereby causing rotation of the motor **822** to drive the lead screw **814**. A mounting bracket **826** may be configured to mount the motor to the mounting bracket **804b**. Alternative mounting

configurations for the motor **822** may be utilized. The motor **822** may be electromechanical, as understood in the art. Alternatively, the motor **822** may utilize any other motor type, such as hydraulic, pneumatic, or otherwise. Utilizing the elevator drive system **800** with a direct drive configuration with the lead screw **814** eliminates the use of the elevator drive system **700** with the belt **708** of the **FIG. 7**. Although the elevator drive systems of **FIGS. 7** and **8** provide for belt and screw drive mechanisms, it should be understood that alternative drive mechanisms may be utilized to move a product item from a first position to a second position for dispensing the product item from a mobile or fixed-position vending machine.

[0061] With regard to **FIG. 4**, a flow diagram of an illustrative process for manufacturing a vending machine is shown. The process **400** may start at step **402**, where the product storage area having walls that define an area with a center-of-gravity below a center point of the height of the product storage area is formed. In one embodiment, the walls are aligned at acute angles. As an example, the walls may have an approximately 75 degree acute angle relative to a floor of the product storage area. In one embodiment, the walls are separated at a distance that enables a product item to pass between the walls. The closest point of the walls may be formed by a top of one wall relative to a point along a second wall (see **FIG. 2A**, for example). At step **404**, a product pathway, such as a storage serpentine, with outer edges that extend to the walls of the product storage area may be formed. If the product pathway is a product storage serpentine, the product storage serpentine may wind between the walls such that the outer edges of the product storage serpentine extends between the walls that define the product storage area. The product storage serpentine may have rounded or angled corners, and each of the straight sections may have a downward slope so that product items within the product storage serpentine are gravitationally directed downward through the product storage serpentine. In one embodiment, the slope of a straight areas of the product storage serpentine may range from approximately 3 degrees to approximately 7 degrees. It should be understood, however, that alternative downward slope and angles may be utilized to enable product items to gravitationally flow through the product storage serpentine.

[0062] At step **406**, the product storage serpentine may be positioned within the product storage area. In positioning the product storage serpentine within the product storage area, fastening members and/or adhesives may be utilized to secure the product storage serpentine within the product storage area. At step **408**, a hoisting mechanism that enables a product item that is output from the product storage serpentine into an elevator shaft external from and extending along a wall of the product storage area may be configured. In one

embodiment, the hoisting mechanism may include an elevator screw shaft, an elevator guide shaft, and a cradle that contacts or engages a product item that exits from the product storage serpentine and hoists the product item along the elevator shaft and outside of a wall of the product storage area. At step **410**, the product storage area with the product storage serpentine and elevator shaft may be configured within a housing inclusive of a dispensing area for a user to receive the product item. The dispensing area may include an opening defined by the housing and include a catch or receiver region, such as a basket, into which a product item may be positioned after being released from the elevator shaft.

[0063] With regard to **FIG. 5**, a flow diagram of an illustrative process **500** for operation of a vending machine is shown. The process **500** may start at step **502**, where a product storage area may be filled with product items (e.g., individual packages of products that may be individually dispensed to a user). The product storage area may have a center-of-gravity below a halfway vertical point of the product storage area. At step **504**, a product item may be released from the product storage area into an elevator shaft inclusive of a hoisting mechanism. At step **506**, the product item may be hoisted to a dispensing area for a user to receive the product item. In hoisting the product item, the product item may be hoisted diagonally along an outside of the product storage area.

[0064] With regard to **FIG. 6**, a flow diagram of an alternative illustrative process **600** for operation of a vending machine is shown. The process **600** may start at step **602**, where product items may be stored in a product storage area. The product storage area may have a center-of-gravity below a halfway vertical point of the product storage area. At step **604**, a product item may be released from the product storage area. In one embodiment, the product item is released into an elevator shaft inclusive of a hoisting mechanism. At step **606**, the product item may be hoisted over at least a portion of the product storage area. In hoisting the product item, the product item may be hoisted diagonally along an outside of the product storage area. At step **608**, the hoisted product item may be presented to a user for taking away from the vending machine. The hoisting mechanism may be synchronized with a metering device that enables and disables product items to be released from the product storage area into the elevator shaft such that an elevator member of the hoisting mechanism is at or below an entranceway of the elevator shaft to receive the product item to be hoisted.

[0065] The foregoing method descriptions and flow diagrams are provided merely as illustrative examples and are not intended to require or imply that the steps of the various

embodiments must be performed in the order presented. The steps in the foregoing embodiments may be performed in any order. Words such as “then,” “next,” etc., are not intended to limit the order of the steps; these words are simply used to guide the reader through the description of the methods. Although process flow diagrams may describe the operations as a sequential process, many of the operations can be performed in parallel or concurrently. In addition, the order of the operations may be rearranged. A process may correspond to a method, a function, a procedure, a subroutine, a subprogram, etc. When a process corresponds to a function, its termination may correspond to a return of the function to the calling function or the main function.

[0066] The various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the embodiments disclosed herein may be implemented as electronic hardware, computer software, or combinations of both. To clearly illustrate this interchangeability of hardware and software, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality. Whether such functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation decisions should not be interpreted as causing a departure from the scope of the present invention.

[0067] The preceding description of the disclosed embodiments is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without departing from the spirit or scope of the invention. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the following claims and the principles and novel features disclosed herein.

[0068] While various aspects and embodiments have been disclosed, other aspects and embodiments are contemplated. The various aspects and embodiments disclosed are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

CLAIMS

1. A vending machine, comprising:
 - a housing;
 - a product storage area in which product items to be dispensed by the vending machine are stored;
 - an elevator shaft positioned adjacent to said product storage area, and having an acute angle relative to a base and towards said product storage area;
 - an elevator member configured to hoist a product item along said elevator shaft;
 - a drive mechanism configured to cause said elevator member to move from a first position to a second position along the elevator shaft to hoist the product item;
 - and
 - an opening defined by the housing, and configured to enable the hoisted product item to be received by a user.
2. The vending machine according to claim 1, further comprising a product storage serpentine disposed within said product storage area, and having an exit at said elevator shaft, said product storage serpentine further configured to enable the product items to be gravitationally guided through said product storage area and inserted into an opening of said elevator shaft.
3. The vending machine according to claim 2, wherein said product storage serpentine is configured to support multiple sizes of product items.
4. The vending machine according to claim 2, wherein a bottom portion of said product storage serpentine has an angle that causes a product item with a circular perimeter to roll toward the opening of said elevator shaft.
5. The vending machine according to claim 2, wherein at least a portion of said product storage serpentine extends above a top surface of said elevator shaft.
6. The vending machine according to claim 1, wherein said product storage area and said elevator shaft share a common wall.
7. The vending machine according to claim 1, wherein said housing includes a left wall, a right wall, and a bottom surface, the left and right walls having acute angles relative to the bottom surface.

8. The vending machine according to claim 7, wherein said product storage area includes a left wall, a right wall, and a bottom surface, the left and right walls having acute angles relative to the bottom surface.
9. The vending machine according to claim 8, wherein the acute angles are approximately 75 degrees.
10. The vending machine according to claim 1, further comprising:
 - a plurality of wheels; and
 - a drive mechanism configured to rotate at least one of the wheels to cause a vending machine to be self-propelled.
11. A method of vending product items, said method comprising:
 - storing product items within a product storage area;
 - releasing a product item from the product storage area;
 - hoisting the product item over at least a portion of the product storage area; and
 - presenting the hoisted product item to a user.
12. The method according to claim 11, wherein hoisting the product item includes hoisting the product item diagonally.
13. The method according to claim 11, further comprising gravitationally guiding the product items through the product storage area.
14. The method according to claim 13, further comprising:
 - gravitationally guiding a first product item having a first configuration; and
 - gravitationally guiding a second product item having a second configuration.
15. The method according to claim 13, further comprising enabling gravity to cause a product item to roll toward an entryway of an elevator shaft.
16. The method according to claim 13, wherein guiding the product items includes guiding the product items over at least a portion of the elevator shaft.
17. The method according to claim 11, wherein storing the product items includes storing the product items in an area that shares a common wall with the elevator shaft.
18. The method according to claim 11, further comprising self-propelling the product storage area along a floor.

19. A vending machine, comprising:
 - a product storage area;
 - at least one sensor configured to capture data of a user; and
 - a processing unit in communication with said at least one sensor, and configured to:
 - process the captured data to determine if the user performs a physical action;
 - and
 - responsive to determining that the user performs a physical action, cause the vending machine to perform an action.
20. The vending machine according to claim 19, wherein said at least one sensor includes an image sensor.
21. The vending machine according to claim 20, wherein said processing unit is further configured to determine that the user smiles.
22. The vending machine according to claim 19, wherein said at least one sensor includes an audio sensor, and wherein said processing unit is configured to determine that the user makes an audible sound.
23. The vending machine according to claim 22, wherein the audible sound is at least one word.
24. The vending machine according to claim 19, wherein said at least one sensor includes a pressure sensor.
25. The vending machine according to claim 24, wherein said processing unit is configured to determine that the user hugs the vending machine.
26. The vending machine according to claim 19, wherein the action includes dispensing a product item stored in the product storage area to the user.
27. The vending machine according to claim 19, wherein the action includes discounting cost of a product item stored in the product storage area.

28. The vending machine according to claim 19, further comprising:
a motor; and
a plurality of wheels, at least one of the wheels being driven by said motor, and
wherein said processing unit is further configured to drive said motor to self-propel the vending machine.
29. The vending machine according to claim 28, wherein the action includes spinning.

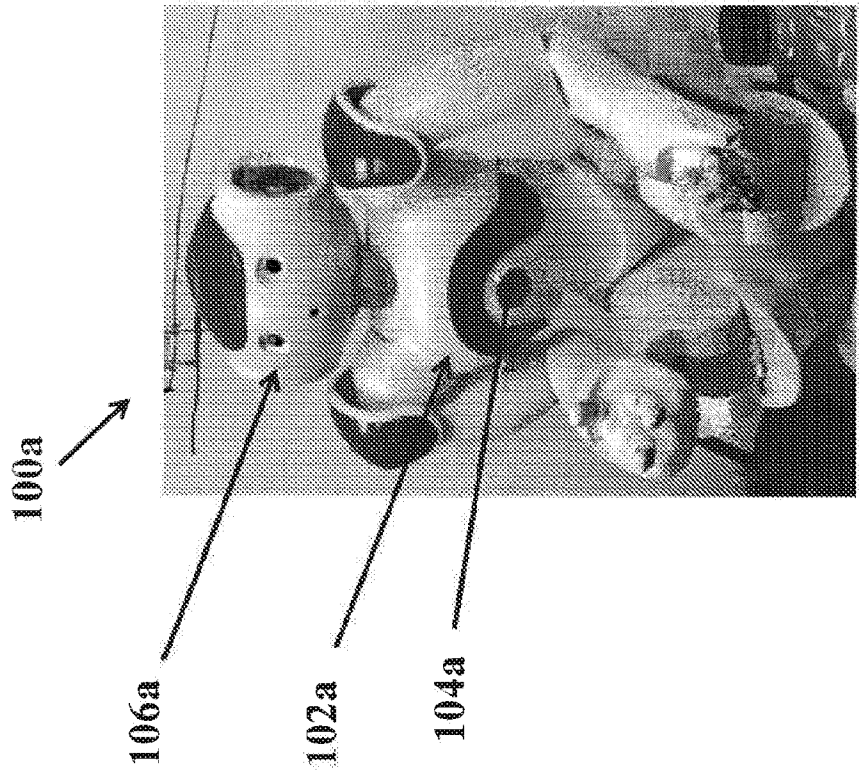


FIG. 1A

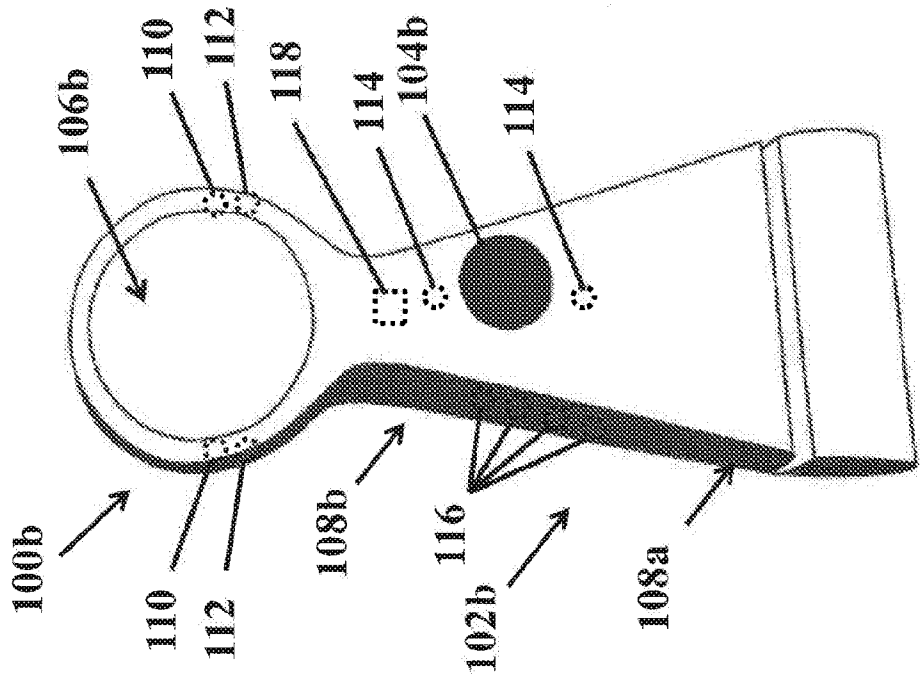


FIG. 1B

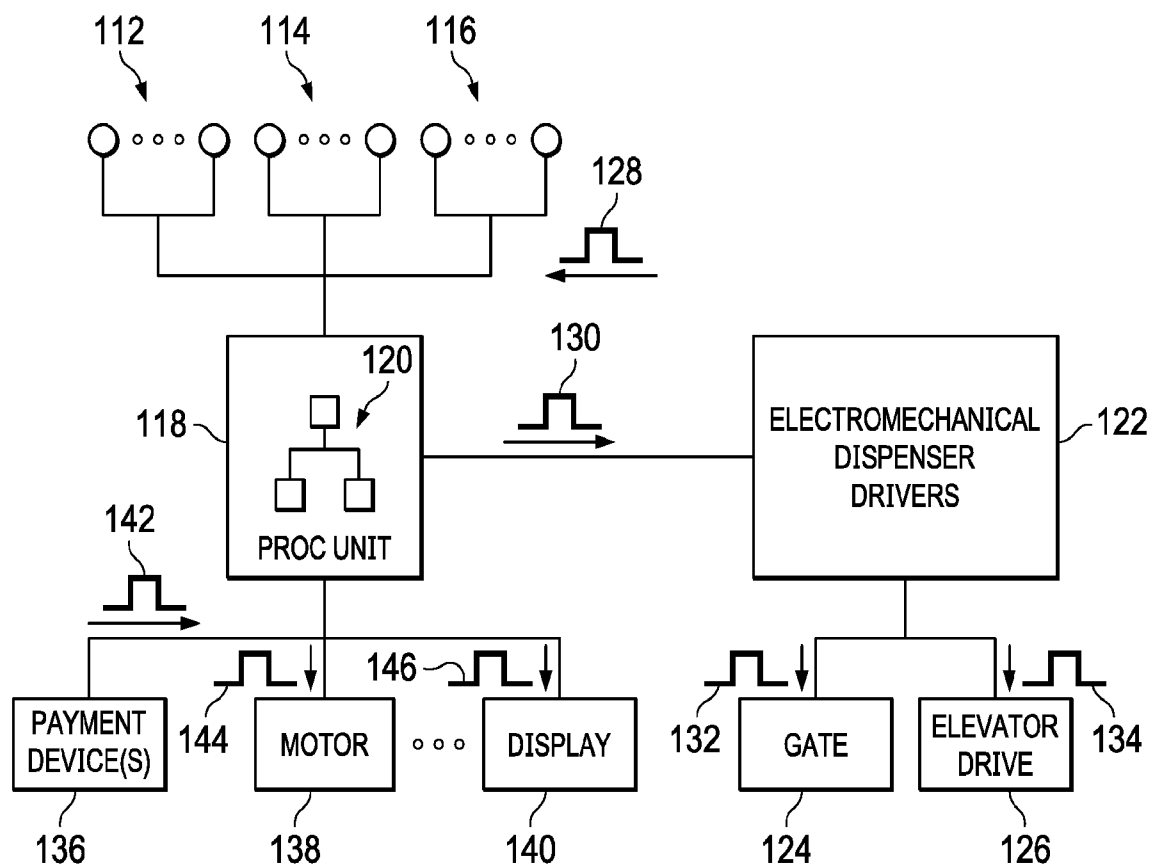


FIG. 1C

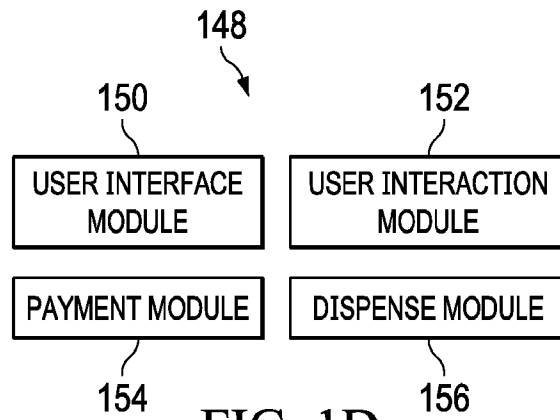


FIG. 1D

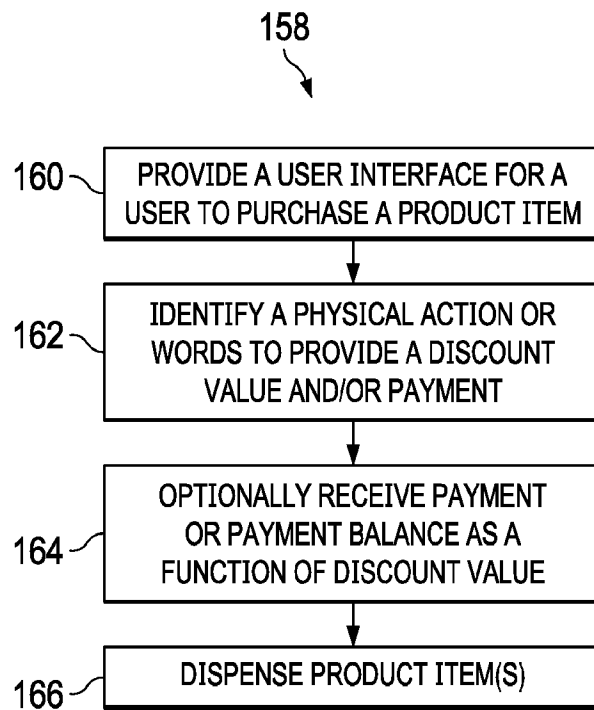
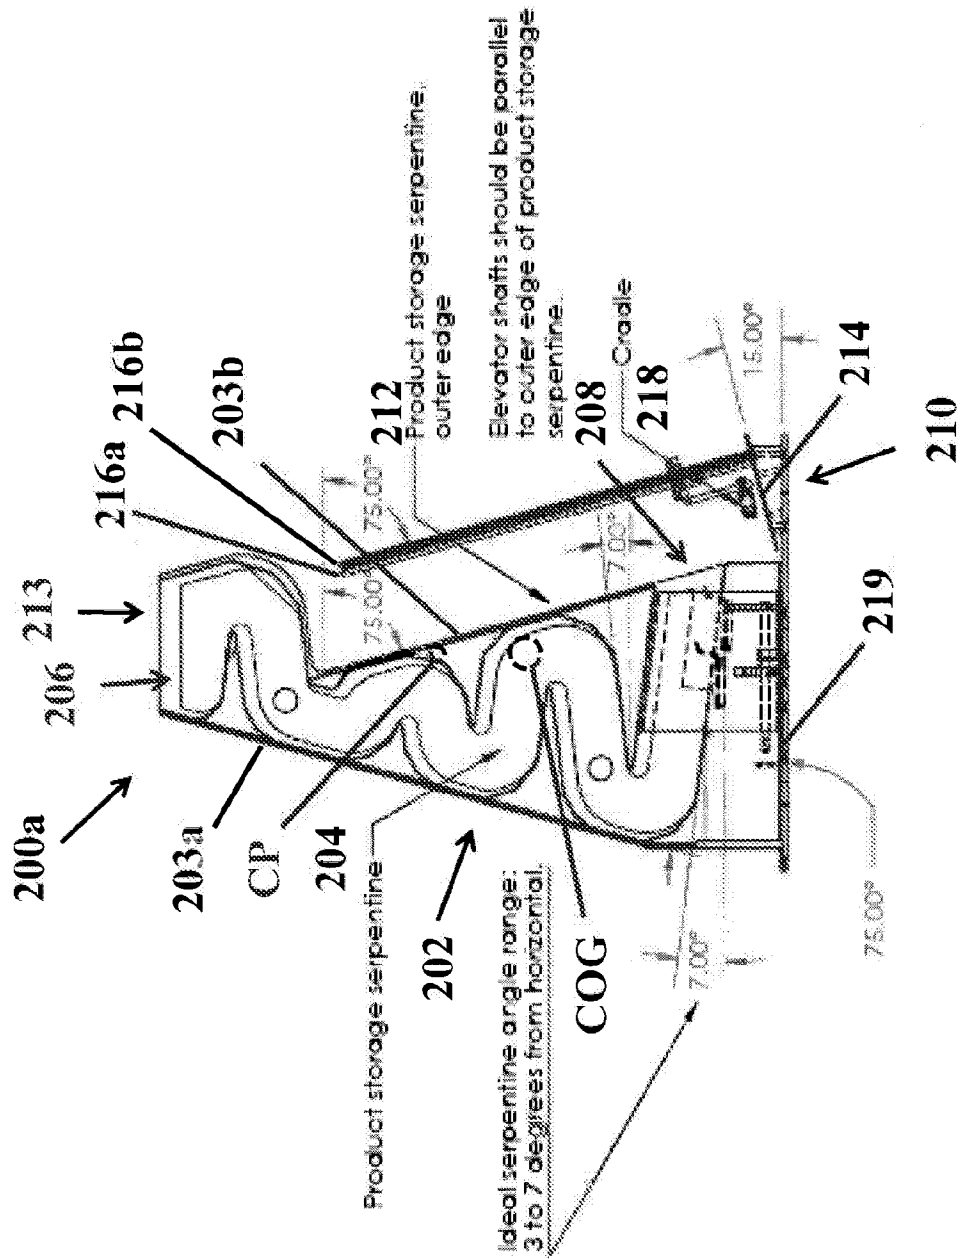
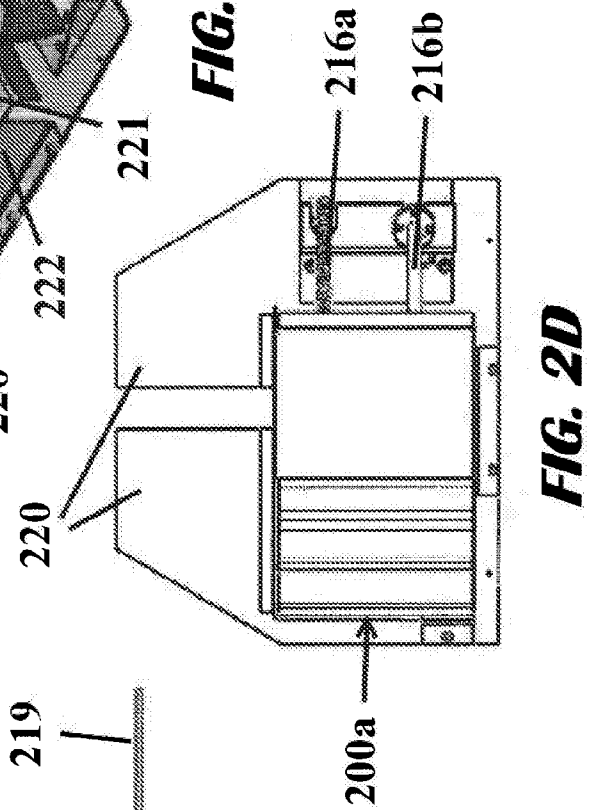
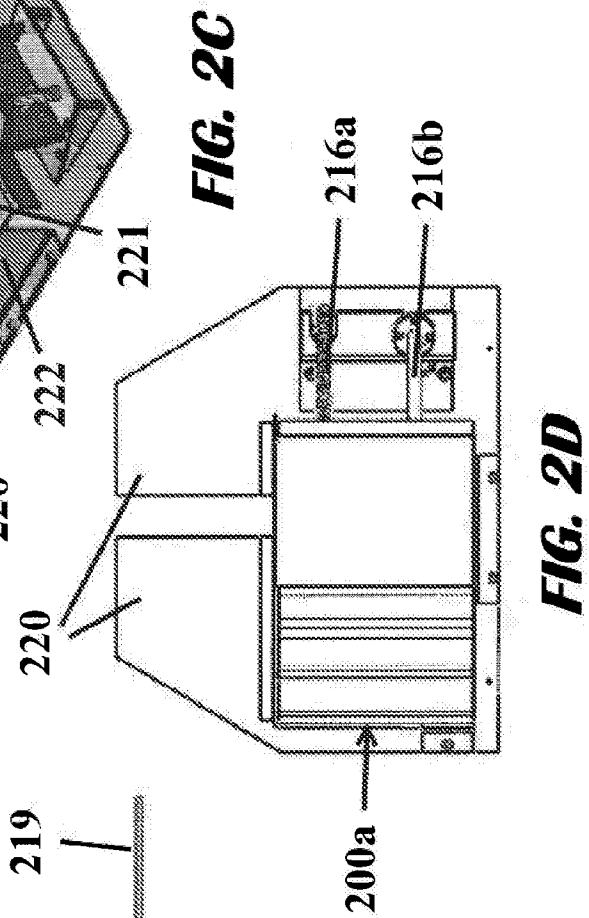
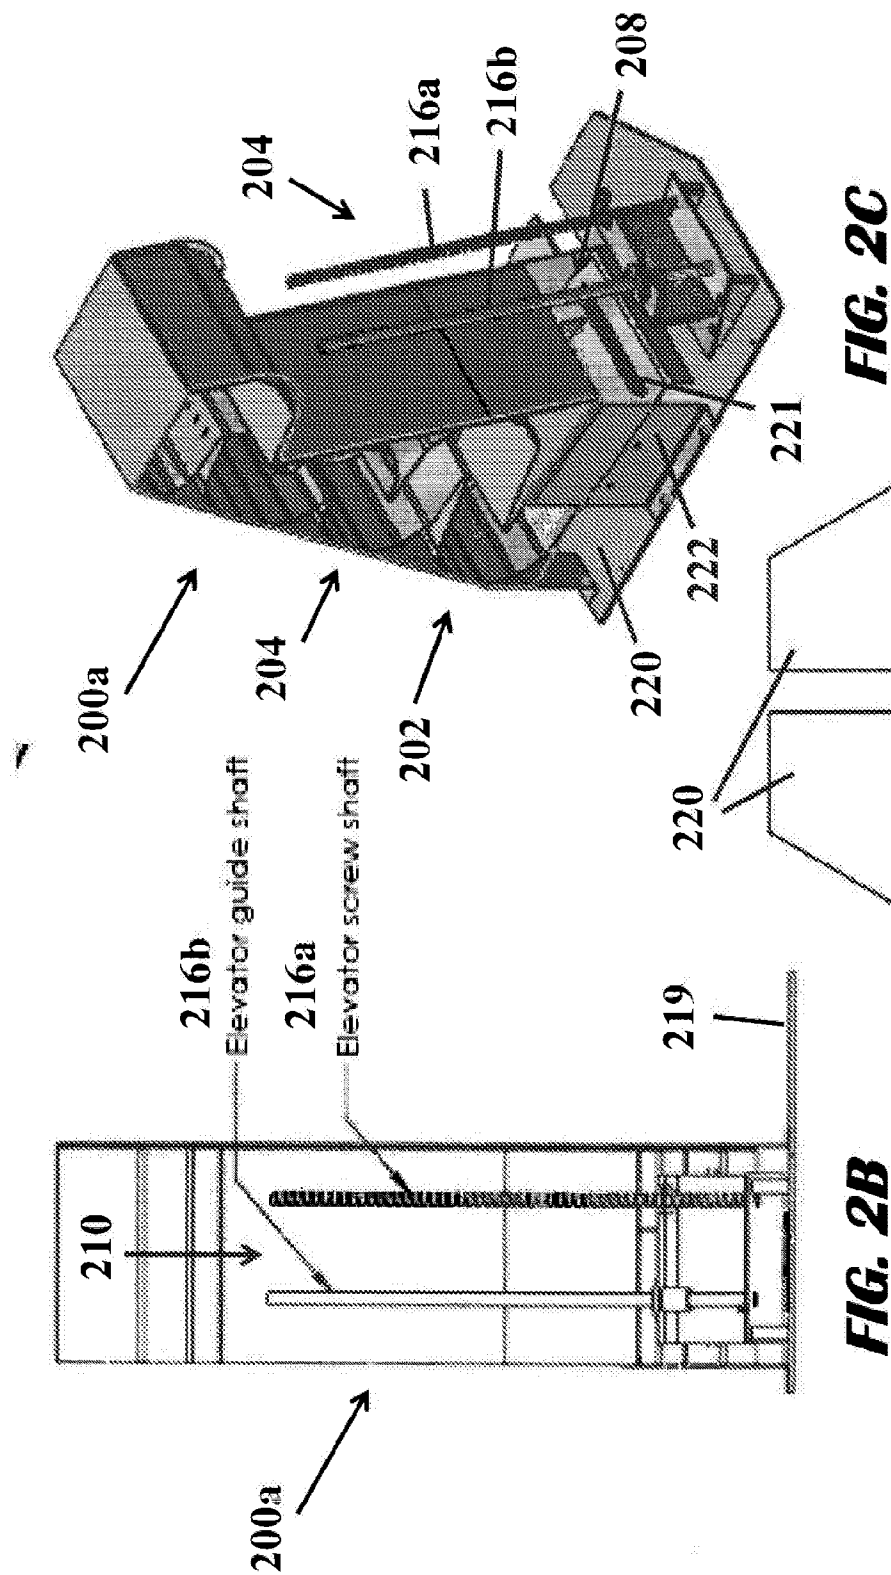


FIG. 1E

**FIG. 2A**



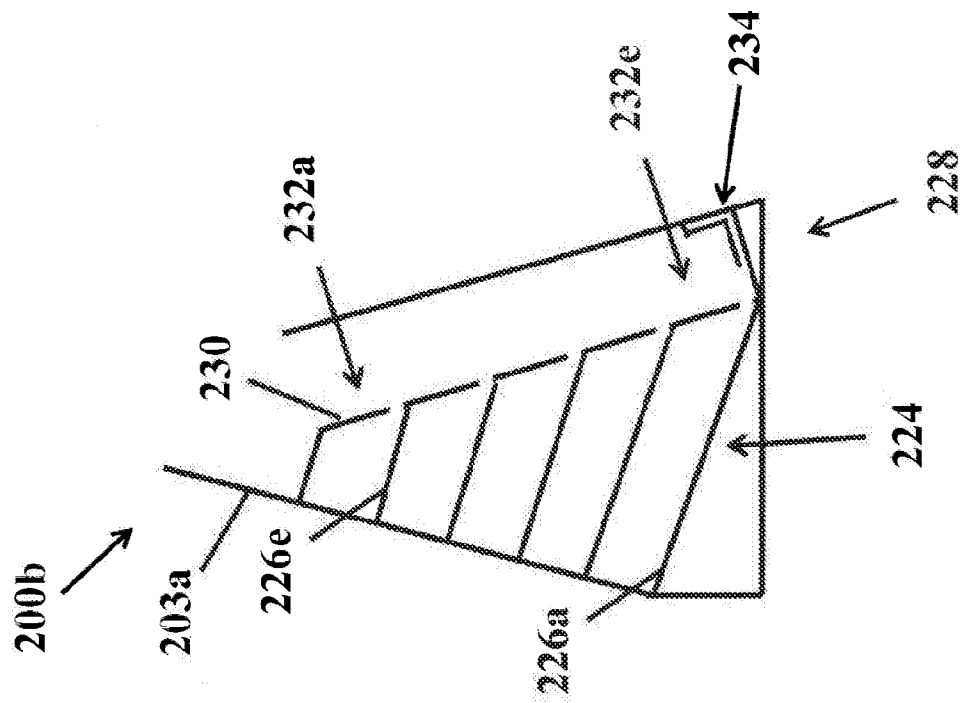


FIG. 2E

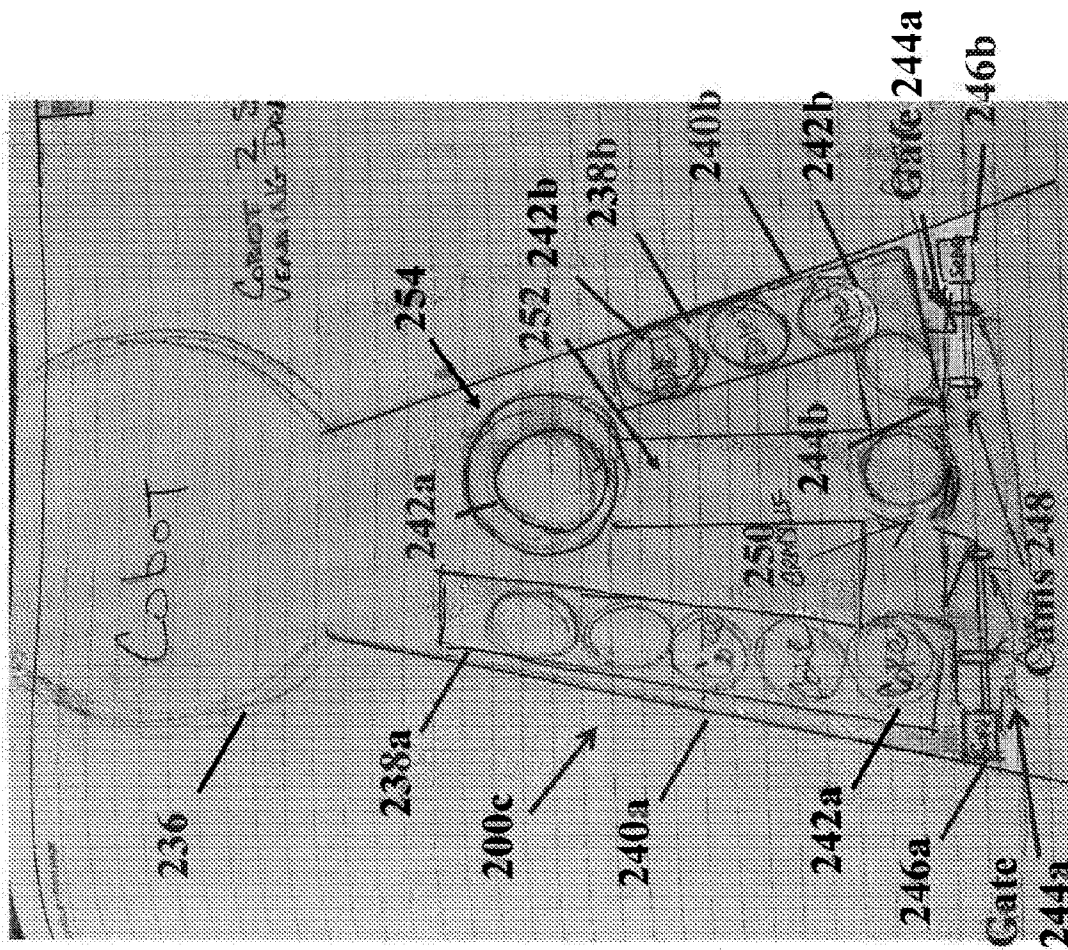


FIG. 2F

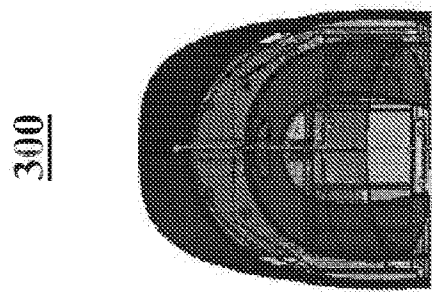


FIG. 3D

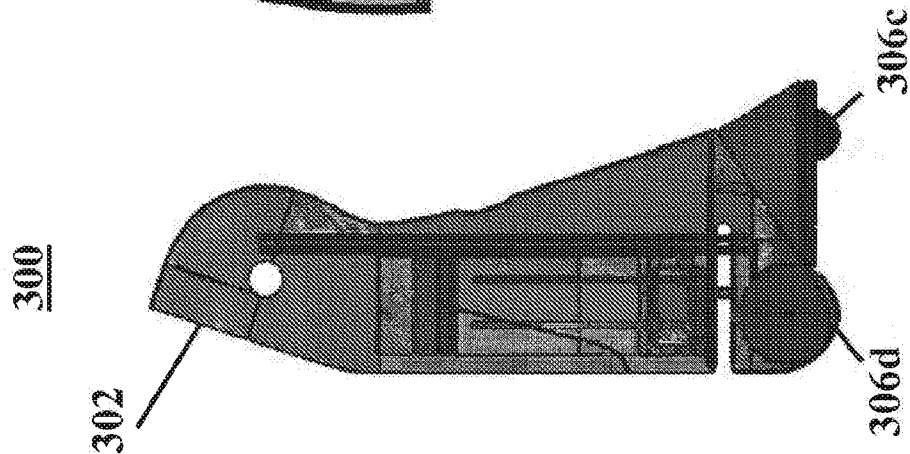


FIG. 3C

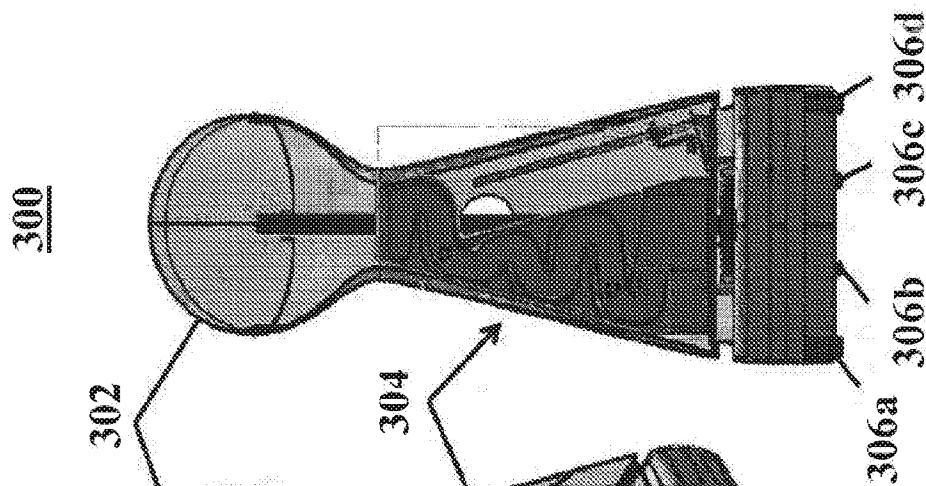


FIG. 3B

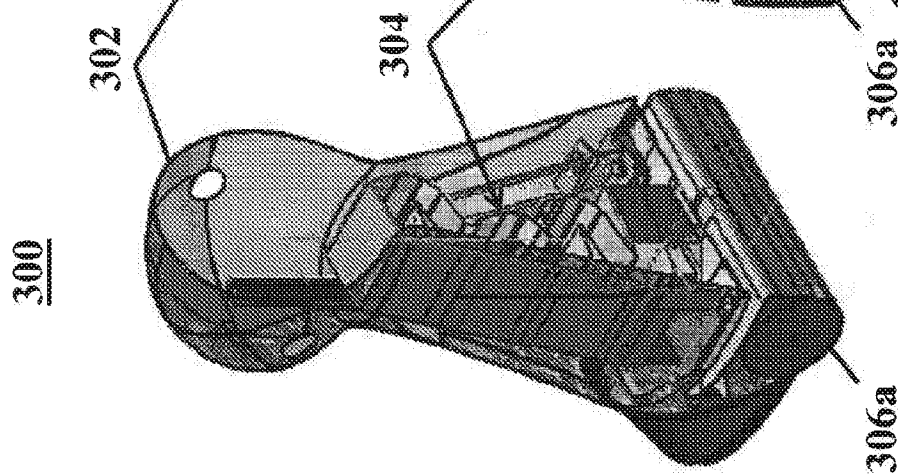


FIG. 3A

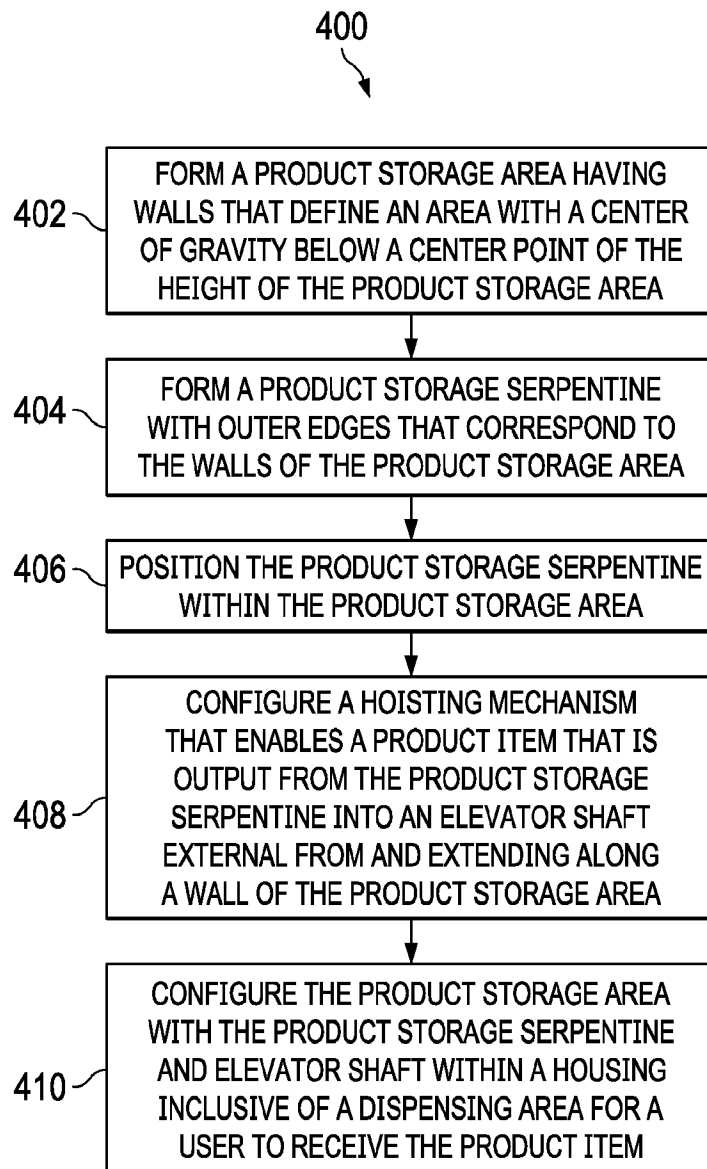


FIG. 4

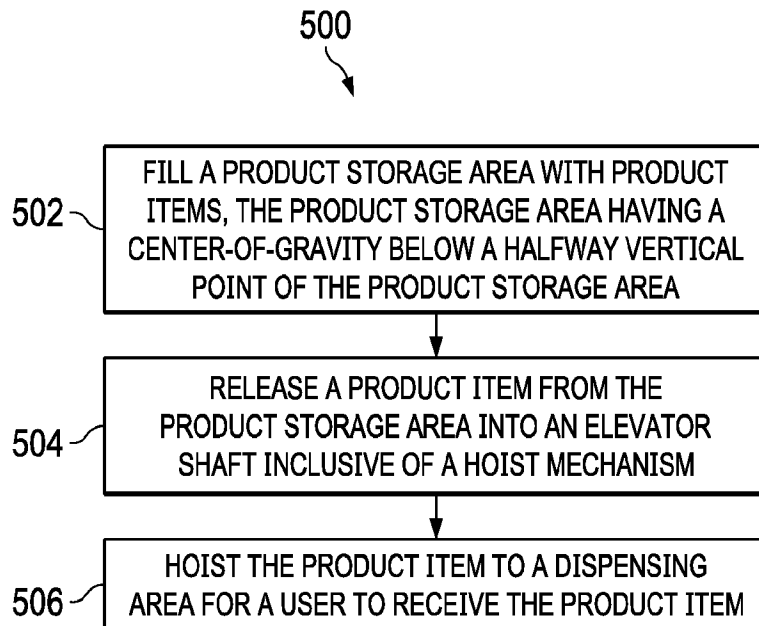


FIG. 5

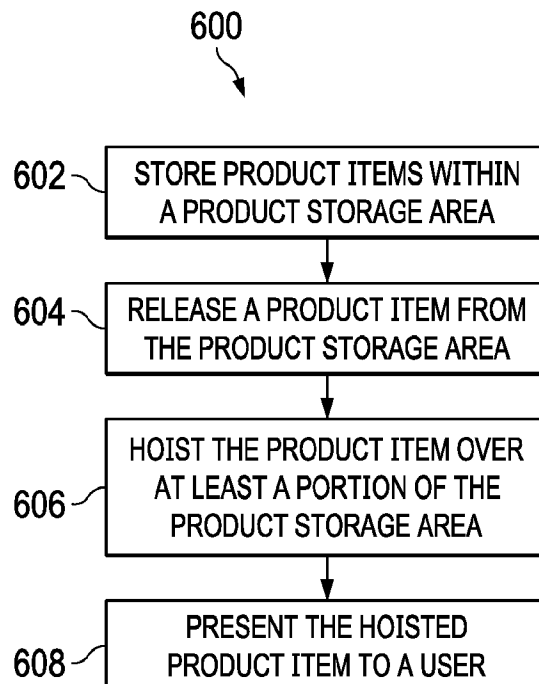


FIG. 6

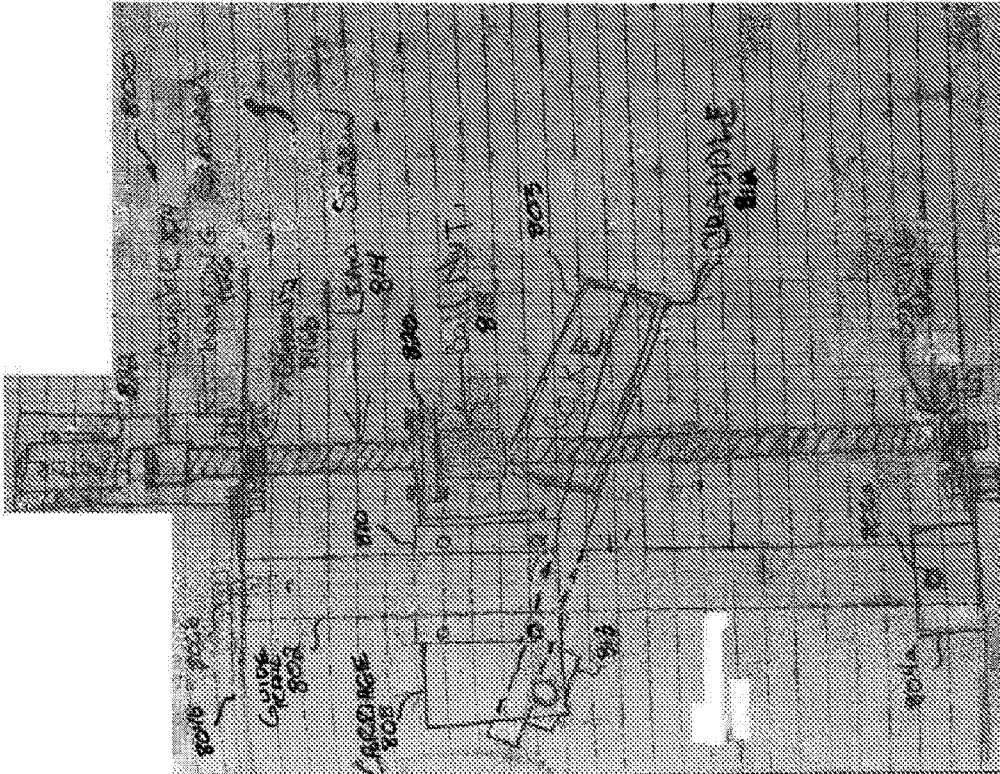


FIG. 8

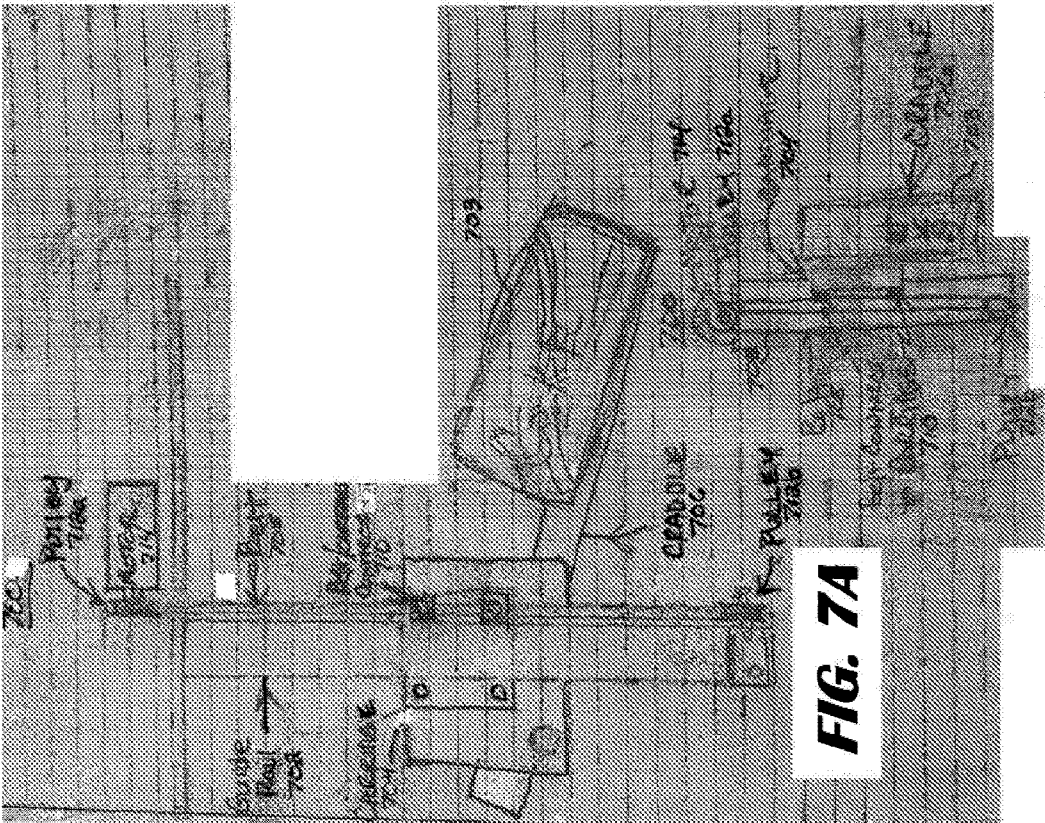


FIG. 7B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 17/30643

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G07F 11/34 (2017.01)

CPC - G07F 11/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History Document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History Document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3,141,571 A (MOORE) 21 July 1964 (21.07.1964) entire document	1-6
--		-----
Y		7-10
Y	WO 2004/017268 A2 (DIAGEO IRELAND) 26 February 2004 (26.02.2004) entire document	7-9
Y	US 2002/0125263 A1 (CREDLE jr et al) 12 September 2002 (12.09.2002) entire document	10
A	US 3,348,733 A (JOHNSON) 24 October 1967 (24.10.1967) entire document	1-10
A	EP 2 679 940 A2 (FUTURINOV) 01 January 2014 (01.01.2014) entire document	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

01 July 2017

Date of mailing of the international search report

13 SEP 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 17/30643

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:
--SEE EXTRA SHEET--

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-10

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 17/30643

•-Continuation of: Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)-•-

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I: Claims 1-10, directed to a vending machine including an elevator shaft, an elevator member, a drive mechanism, and an opening.

Group II: Claims 11-18 directed to a method of vending product items including releasing a product item from the product storage area.

Group III: Claims 19-29 directed to a vending machine including at least one sensor and a processing unit.

The inventions listed as Groups I-III do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons:

SPECIAL TECHNICAL FEATURES

The invention of Group I includes the special technical feature of

- a housing;
- a product storage;
- an elevator shaft;
- an elevator member configured to hoist a product item along said elevator shaft;
- a drive mechanism configured to cause said elevator member to move from a first position to a second position along the elevator shaft to hoist the product item; and
- an opening defined by the housing, and configured to enable the hoisted product item to be received by a user;

not required by the claims of Groups II and III.

The invention of Group II includes the special technical feature of method of vending product items, said method comprising:

- releasing a product item from the product storage area;

not required by the claims of Groups I and III.

The invention of Group III includes the special technical feature of a

- at least one sensor configured to capture data of a user; and
- a processing unit in communication with said at least one sensor;

not required by the claims of Groups I and II.

COMMON TECHNICAL FEATURES

Groups I-III share the common technical features of vending product items comprising a product storage area. However, this shared technical feature does not represent a contribution over prior art as being anticipated by US 3,141,571 A to Moore (hereinafter referred to as Moore), which discloses vending product items (A) comprising a product storage area (interior of housing 10).

Groups I and III share the common technical feature of a vending machine. However, this shared technical feature does not represent a contribution over prior art as being anticipated by US 3,141,571 A to Moore (hereinafter referred to as Moore), which discloses a vending machine (Col. 1, Lines 9-13; Fig. 1).

As the common technical features were known in the art at the time of the invention, these cannot be considered special technical feature that would otherwise unify the groups.

Therefore, Groups I-III lack unity under PCT Rule 13 because they do not share a same or corresponding special technical feature.