



(51) International Patent Classification:

H01R 13/52 (2006.01) *H01R 13/514* (2006.01)
A41D 13/00 (2006.01) *H01R 13/703* (2006.01)
H01R 11/16 (2006.01) *H02G 15/013* (2006.01)

(21) International Application Number:

PCT/CA2013/000221

(22) International Filing Date:

12 March 2013 (12.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/611,944 16 March 2012 (16.03.2012) US

(71) Applicant: **CARRÉ TECHNOLOGIES INC.** [CA/CA];
5795, avenue de Gaspé, 3e étage, bureau 218, Montréal,
Québec H2S 2X3 (CA).

(72) Inventors: **FOURNIER, Pierre-Alexandre**; 24, avenue
Shamrock, suite 211, Montréal, Québec H2S 1A4 (CA).
ROY, Jean-François; 324, rue Villerey, Sherbrooke,
Québec H2R 1 G7 (CA). **ROBILLARD, Charles**; 1215,
rue Dutchy, Saint-Lazare, Québec J7T 1Z9 (CA).
GAGNON, Stephan; 360, rue Champlain, Rosemère,
Québec J7A 3X8 (CA).

(74) Agents: **BEAUCHESNE, Sandra** et al.; BCF LLP, 1100
René-Lévesque Blvd. West, 25th Floor, Montréal, Québec
H3B 5C9 (CA).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: WASHABLE INTELLIGENT GARMENT AND COMPONENTS THEREOF

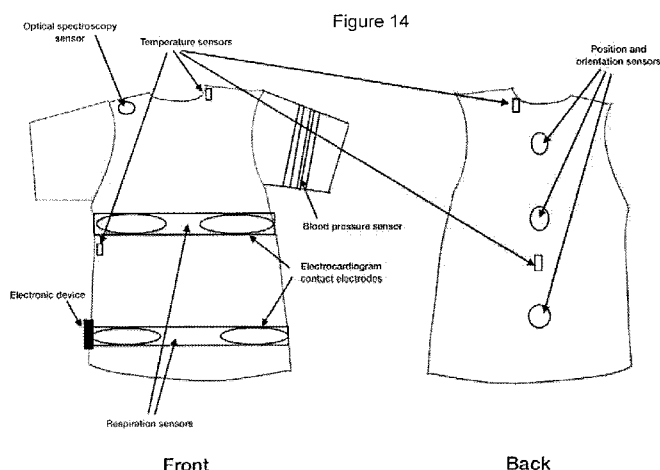

(57) Abstract: The present relates to a washable interconnection patch, a connection assembly, and an intelligent washable garment equipped therewith. The patch receives and interconnects wires to a cable. The patch comprises two matching pieces interlocking to together so as to define there between two opposite apertures. One of the apertures is adapted to receive and hold the wires, and the other aperture is adapted to receive and hold the cable. One of the two matching pieces defines on an interior face a channel to interconnect the wires to the cables. The connection assembly comprises a male connector and a female connector. The male connector defines a series of independent connection points along a length thereof. The female connector is adapted to receive the male connector, and defines along a length of an inner surface thereof a series of contact points. When the male connector is inserted within the female connector, the connection points and the contact points are aligned and in contact together.

WASHABLE INTELLIGENT GARMENT AND COMPONENTS THEREOF

[0001] The present relates to a washable interconnection patch, a male-female connector assembly, and a washable intelligent garment equipped with such a washable interconnection patch and male-female connector assembly.

BACKGROUND

[0002] Physiological sensors have long been known and widely used for medical and health related applications. Various physiological sensors embedded in textile or garments, sometimes called portable or wearable sensors, have been described before in publications and patents (Portable Blood Pressure, Patent number: 4889132, Filing date: Sep 26, 1986 Issue date: Dec 26, 1989; Portable device for sensing cardiac function, Patent number: 4928690, Filing date: Apr 25, 1988, Issue date: May 29, 1990). The term “wearable sensors” is now commonly used to describe a variety of body-worn sensors to monitor activity, environmental data, body signals, biometrics, health related signals, and other types of data.

[0003] Electrocardiogram (ECG) electrodes made of conductive textile, conductive polymer, metal and other materials used in wearable sensors have been described in patents such as (Textile-based electrode, Patent number: 7970451, Filing date: Dec 31, 2008, Issue date: Jun 28, 2011).

[0004] Textile-based Respiratory Inductive Plethysmography sensors have been described in patents such as (Method and apparatus for monitoring respiration, Patent number: 4308872 Issue date: Jan 5, 1982).

[0005] Multi-parameter wearable connected personal monitoring systems (Zephyr Technology' BioHarness, Qinetiq's Traintrak, Weartech's GOW, Nuubo's nECG) are already available on the market.

[0006] However, the single or multi-parameter systems known in the industry use clip buttons made of conductive material for connecting the textile sensors to an electronic module. These clip buttons limit the number and types of interconnections available between the electronic module and the textile sensors.

[0007] Connectivity is a domain with many technological challenges to the manufacturer of e-textile solutions, intelligent garments, wearable sensors, and multi-parameter wearable connected personal monitoring systems. There is thus a need for improved connectivity solutions, and for garments equipped with such connectivity solutions.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] In the appended drawings:

[0009] Figure 1 is a schematic representation of an interconnection patch that can be assembled in a garment, with a textile-covered cable and a washable male connector.

[0010] Figure 2a is a top view of a washable interconnection patch adapted for electrical and optical interconnections.

[0011] Figure 2b is a top view of the washable interconnection patch showing wire interconnections inside the patch before encapsulation.

[0012] Figure 3 is a cross-sectional side view of a male and female washable connector, showing spring-loaded electrical pins in contact with a printed circuit board of the male connector.

[0013] Figure 4 is a cross-sectional view of the male and female connector, showing a curve (called “ski” or “banana”) in the printed circuit board of the male

connector, allowing the spring-loaded electrical pins to be put in compression without applying a side force on the pin of the female connector while inserting.

[0014] Figure 5 is a cross-sectional view of the female connector, without the spring-loaded electrical pins.

[0015] Figure 6 is a view of the male connector assembled with a cable segment, inserted in the female connector.

[0016] Figure 7 is a side view of the male connector with the spring-loaded pins in contact with the printed circuit board conductive pads.

[0017] Figure 8 is a side view of the printed circuit board (PCB) of the male connector showing the curve that pushes the spring-loaded pins during insertion.

[0018] Figure 8a is a bottom view of the PCB of the male connector showing circular electrical contacts.

[0019] Figure 8b is a top view of the PCB of the male connector showing rectangular contacts for soldering and printed wires.

[0020] Figure 9 is a cross-sectional view of the female connector made with standard spring-loaded contacts embedded in a plastic component and aligned with an aperture shaped like a cylinder to host the male connector.

[0021] Figure 10 is a bottom view of the plastic component of the female connector showing the shape and apertures ready to host a row of spring-loaded contacts.

[0022] Figure 11 is a view of the male connector and a cable segment

inserted in the side of the female connector of a small electronic device.

[0023] Figure 12 is Hexoskin garment with a male connector. The garment illustrated has conductive textile electrodes and textile-based respiratory inductive plethysmography sensors connected to the interconnection patch with flexible and elastic wires.

[0024] Figure 13 shows garments that use the present patch and connection system to connect textiles sensors for heart and breathing monitoring to an electronic device with an accelerometer and a Bluetooth wireless connection. The electronic device also contains analog and digital filters and amplifiers, a microprocessor device, solid-state memory storage, sensor circuits, power management circuits, buttons, and other circuits.

[0025] Figure 14 shows a garment with electrical and optical sensors that use the present system to connect textiles, electrical, thermal, and optical sensors for cardiac monitoring, breathing monitoring, blood pressure monitoring, skin temperature and core temperature monitoring to an electronic device with position sensors and a wireless data connection.

[0026] Figure 15 shows a device that includes a female connector, connected to a cable with a right-angle male connector. The device has a button that can be used to record an event, initiate wireless pairing using a protocol like Bluetooth, or reset the device. In this example, the device has 3 light emitting diodes used to communicate with users.

[0027] Figure 16 shows a diagram of sensor front-end electronic module that can have the electronic device to process the analog physiological data, digitize the analog value using an analog to digital converter, and processing the physiological data using a CPU.

[0028] Figure 17 shows a diagram of how the device can be used to record the physiological signals from the body sensors and transmit it first to any connected computing device that can be used to interpret the signals or an Internet gateway, and then to a distant computing and storage system.

[0029] Figure 18 shows a diagram of functional components used in the electronic device.

[0030] Figure 19 shows a diagram of a physiological data processing flow, in this case the data coming from the electrocardiogram sensor.

DETAILED DESCRIPTION

[0031] The foregoing and other features of the present garment and components thereof will become more apparent upon reading of the following non-restrictive description of examples of implementation thereof, given by way of illustration only with reference to the accompanying drawings.

[0032] Connectivity is a domain with many technological challenges for designers and manufacturers of e-textile solutions, intelligent garments, wearable sensors, and multi-parameter wearable connected personal monitoring systems.

[0033] In an aspect, the present specification describes a washable electronic male-female connector. The male connector is designed to be attached to a washable and/or wearable sensor system (as exemplary shown in Figure 1) and comprises a cable, which may be covered with textile, and an interconnection patch where many electric and/or optical wires can be connected to the cable as exemplary shown in Figure 2a and 2b. The male connector may further comprise strain relief components.

[0034] The male connector and its components can be made of various

materials. In one example, the patch and strain relief components may be made of any of the following material: silicone, rubber, or another flexible material over-molded over the cable. The cable may be made of many color-coded electrical wires, bundled together using a textile fabric knitted around the wires. The male connector and strain relief components may be made using over-molded resin. In one example electrical interconnections between wires coming from the garment and the wires in the cable are made using a small open crimp or a crimp tube (as exemplary shown in Figure 2b, and the interconnection is sealed using silicone, rubber, or any other sealing material compatible with the over-molded patch.

[0035] The interconnection patch can be made using a manufacturing process that does not require heating, for example crimps and/or glue and/or silicone with low curing temperature, which has among its advantages the benefit of reducing the risk to deteriorate or destroy heat sensitive textiles that can be used in a garment.

[0036] In a particular embodiment, the male connector is designed with a small curve at one of its longitudinal extremity to be adapted to lower spring-loaded contacts during insertion in the female connector (see Figures 4 and 8). In one example, the male connector is made of a printed circuit board shaped like a ski (see Figure 8), electronic contacts with the female connector being made when engaged with conductors printed at the bottom of the ski-shaped circuit board (Figure 8a), while the wires are soldered on the top of the circuit board (Figure 8b) before it is over-molded to become the male connector and the strain relief for the wires and cable connected to the washable interconnection patch. The strain relief (Figure 11) can also be made at a right angle (Figure 15) to make the cable follow the side of the device and reduce the space needed for the cable and device in a pocket on the garment. For example, the circuit board and cable may be overmolded in one piece to create the male connector. The strain relief is then the part of the connector attaching the cable to the plastic shell of the male connector to avoid putting tension on the soldered connection between the wires and the circuit board.

[0037] In a further embodiment, the electrical contacts on the male connector are plated with gold or another conductive material not affected by oxydation or degradation caused by air, light, water, soap, enzymes or other chemical or biological products.

[0038] The female connector may comprise spring-loaded contacts that are lined up along an aperture shaped like a cylinder (see Figures 4 and 9). The aperture is asymmetric to facilitate the alignment of the contacts with the contacts of the male connector (see Figure 3). The female connector can be made as one piece including the spring-loaded contacts, or two pieces including for example one row of spring-loaded connectors and an injection molded plastic piece defining an asymmetric aperture (see Figure 10).

[0039] Electric and/or optic connection between the male and female connectors is completed upon complete engagement of the male connector within the female connector, which permits the contacts of the male connector to be aligned with the spring-loaded contacts of the female connector (see Figure 7).

[0040] The device starts recording the physiological signals automatically from the sensors upon complete connection of the male connector within the female connector, and stops recording when the male connector is removed from the female connector. This feature simplifies the use of the recording device and reduces power consumption from the battery when the device is not connected.

[0041] An example of use of the present male-female connector and the present interconnection patch are wearable physiological monitoring garments as shown in Figures 12 and 13.

[0042] Reference is now made to Figure 14, which depicts another exemplary use of the present system, where an upper-body garment is equipped with physiological sensors to measure body activity and state with a recording,

processing and transmitting wearable device that connects to physiological sensors. The garment is embedded with electrodes for electrocardiogram (ECG) or electromyogram (EMG) recordings, thermal sensors for skin temperature monitoring, multidimensional acceleration and position sensors for position and movement monitoring, microphone for heart and lung auscultation, inductance plethysmography sensors to measure changes in volume of the upper body, optical sensors for body spectrophotometry, and a blood pressure sensor on the left arm of the garment. This wearable physiological sensor system provides enhanced users' mobility compared to previous systems, allows simultaneous recording of all the aforementioned signals, allows simultaneous encoding and wireless transmission of all the aforementioned signals, allows automatic processing, analysis, and modeling of all the aforementioned signals, is less vulnerable to position and motion artifacts hence capable of producing high quality signals during sleep, running, exercising and other normal activities. The sensor system, including the present male-female connector, and the interconnection patch, is thus washable in a regular domestic washing machine. Any electronic device may be connected to the garment using the present male-female connector. The electronic device may thus be located in a pocket designed for carrying. The electronic device can communicate with mobile phones and computer devices using a wireless or wired communication protocol. When used with low height profile embedded sensors, the present system makes it possible to wear the garment during sleep, physical activity, and in other contexts.

[0043] In one example, the electronic device is further equipped with a button that can be used to record an event, initiate wireless pairing using a protocol like Bluetooth, or reset the device. In this example shown in Figure 15, the device has 3 light emitting diodes used to communicate with users, for example to confirm to a wearer of the garment that the garment is connected, the electronic device is connected using a wireless link, a state of a battery of the electronic device, any malfunction or any other information the electronic device must communicate to the user. The electronic device may contain several analog and digital circuits to record and process the physiological signals as shown on Figure 16. The electronic device

can further implement all the normal functions of a computing device as shown on Figure 18. The device can be connected to other computing and networking devices using a wired or wireless protocol as shown on Figure 17, and can use another computing or networking device to communicate with a remote server, a distance storage system, or a distance computing system, which can provide automatic physiological data analysis services and help with the interpretation of physiological signals. For example, such an automatic physiological data analysis can be constructed using a stack of simple processing units to achieve a high-level understanding of the original physiological signal, such as detailed cardiac activity shown on Figure 19, symptoms, and pathologies.

[0044] Although the present interconnection patch, male-female connector and washable intelligent garment have been described in the foregoing description by way of illustrative embodiments thereof, these embodiments can be modified at will, within the scope of the appended claims without departing from the spirit and nature of the appended claims.

What is claimed is:

1. A washable interconnection patch for receiving and interconnecting wires to a cable, the patch comprising:

two matching pieces interlocking together so as to define therebetween two opposite apertures, one of the apertures being adapted to receive and hold the wires and the other aperture being adapted to receive and hold the cable, one of the two matching pieces defining on an interior face a channel to interconnect the wires to the cables.

2. The patch of claim 1, wherein one of the two matching pieces further comprises a fastening member for fastening the interlocked matching pieces to a fabric.

3. The patch of claim 1, wherein the two matching pieces are further adapted to be filled with a sealant.

4. A connection assembly comprising:
a male connector, the male connector defining a series of independent connection points along a length thereof; and
a female connector adapted to receive the male connector, the female connector defining along a length of an inner surface thereof a series of contact points,
whereby when the male connector is inserted within the female connector, the connection points and the contact points are aligned and in contact together.

5. The assembly of claim 4, wherein:
the male connector's cross section is shaped like a C and the connection points are located in a concave section thereof; and
an entry of the female connector is C-shaped.

6. The assembly of claim 4 wherein:

The male connector comprises electrical contacts plated with gold or another conductive material.

7. The assembly of claim 5, wherein the series of independent connection points of the male connector are part of a printed circuit board.
8. The assembly of claim 6, wherein the male connector further comprises a resilient means to press the connection points of the male connector against the contact points of the female connector when the male connector is inserted into the female connector.
9. The assembly of claim 4, wherein the connection points and contact points are electrical points.
10. The assembly of claim 4, wherein the male connector is adapted for use in a washable garment.
11. An intelligent washable garment, the garment comprising:
 - a plurality of sensors, each of the sensors having a corresponding cable;
 - an electronic device for receiving signals generated by the plurality of sensors, the electronic device comprising:
 - a casing;
 - a connection assembly comprising a male connector and a female connector, the male connector defining a series of independent connection points along a length thereof, each of the connection points being electrically connected to one of the cables of the sensors, the female connector being adapted to receive the male connector, the female connector defining along a length of an inner surface thereof a series of contact points, wherein when the male connector is inserted within the female connector, the connection points and the contact points are aligned and in contact together and the signals received by the male connector from the sensors are transferred to the female connector; and

a processing unit in electrical communication with the female connector for processing the signals received by the female connector.

12. The processing unit of claim 11 capable of recording physiological signals automatically.

13. The processing unit of claim 12 wherein the device starts recording the physiological signals automatically from the sensors upon complete connection of the male connector within the female connector, and stops recording when the male connector is removed from the female connector.

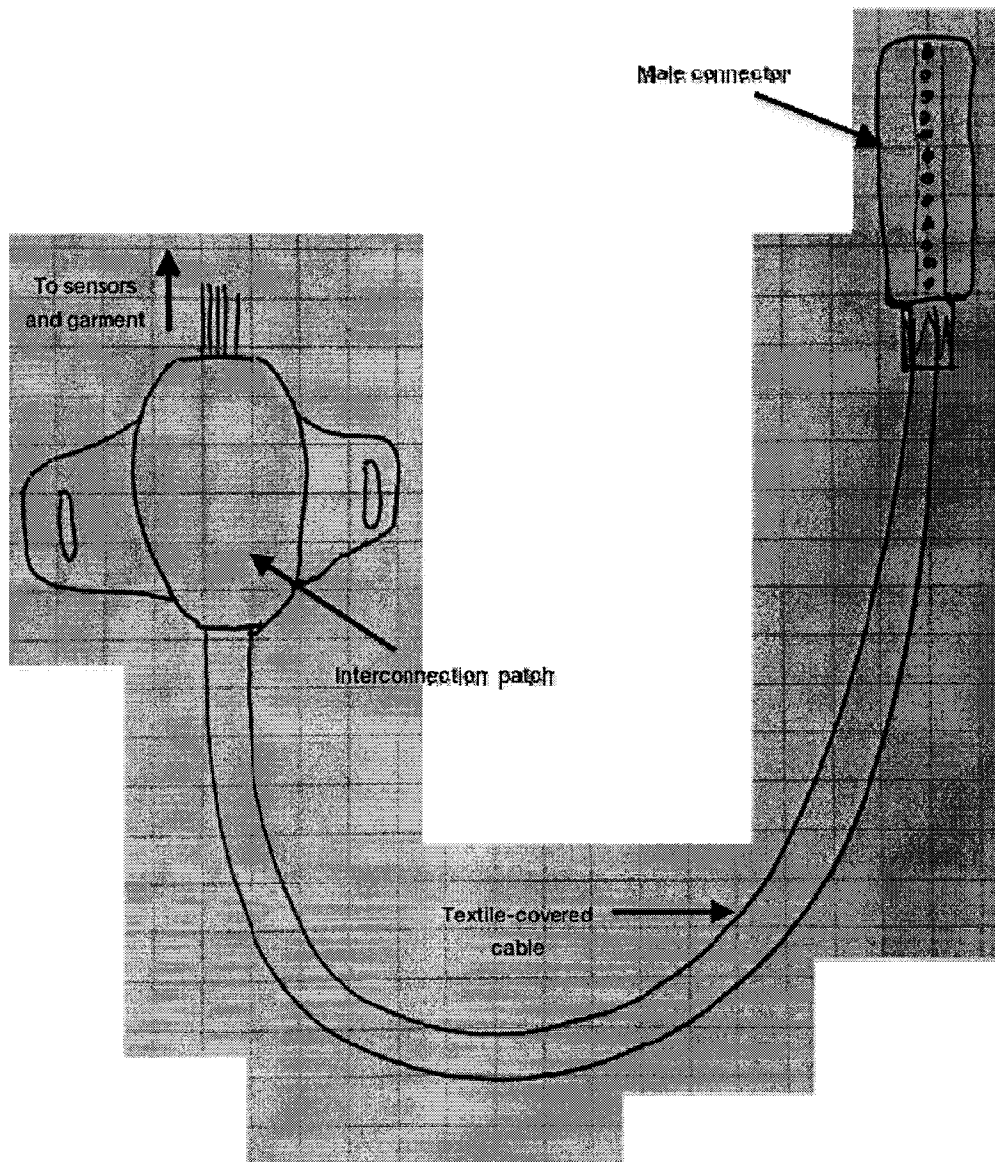


Figure 1

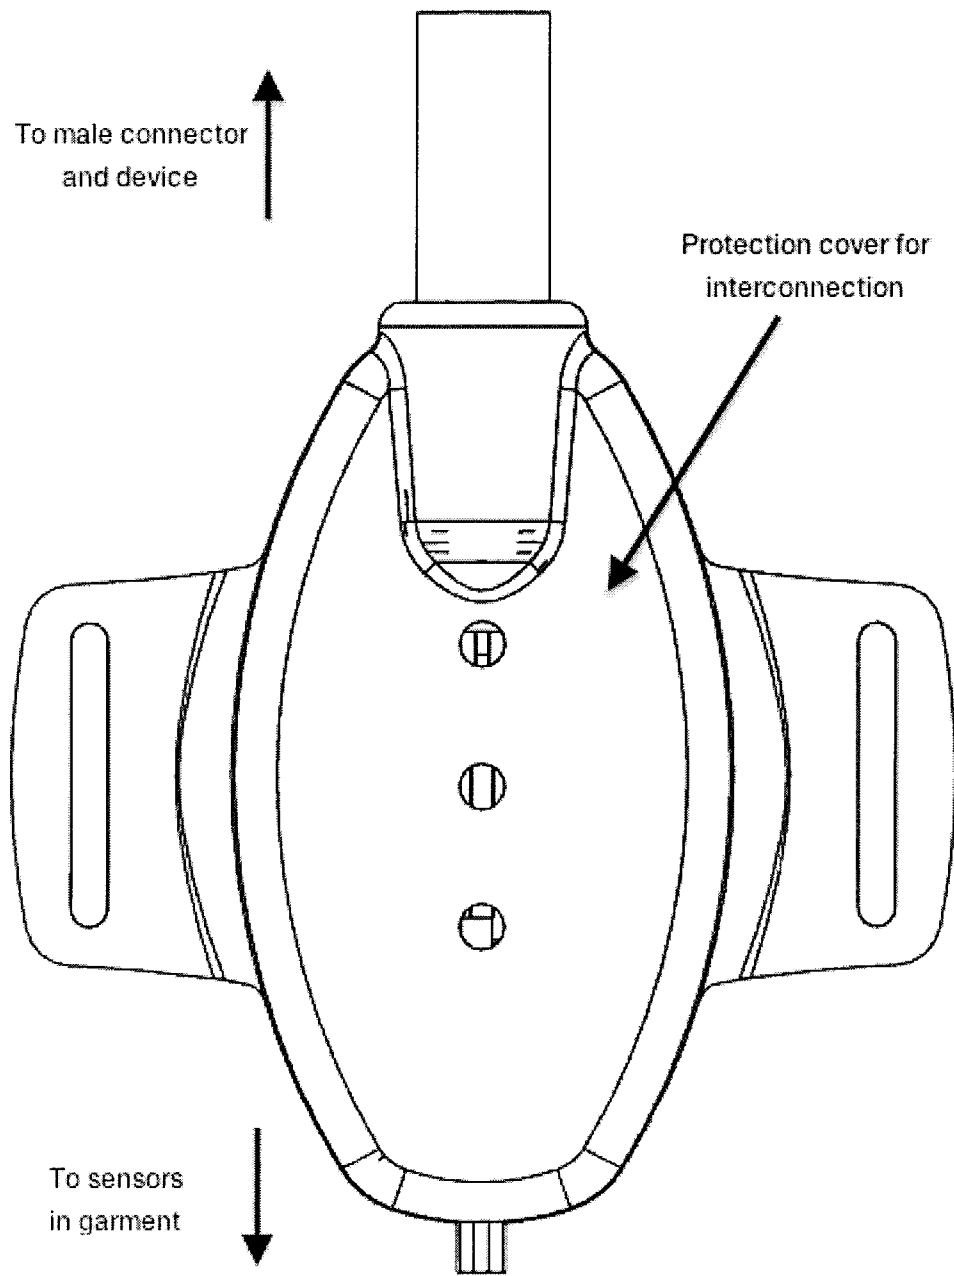


Figure 2a

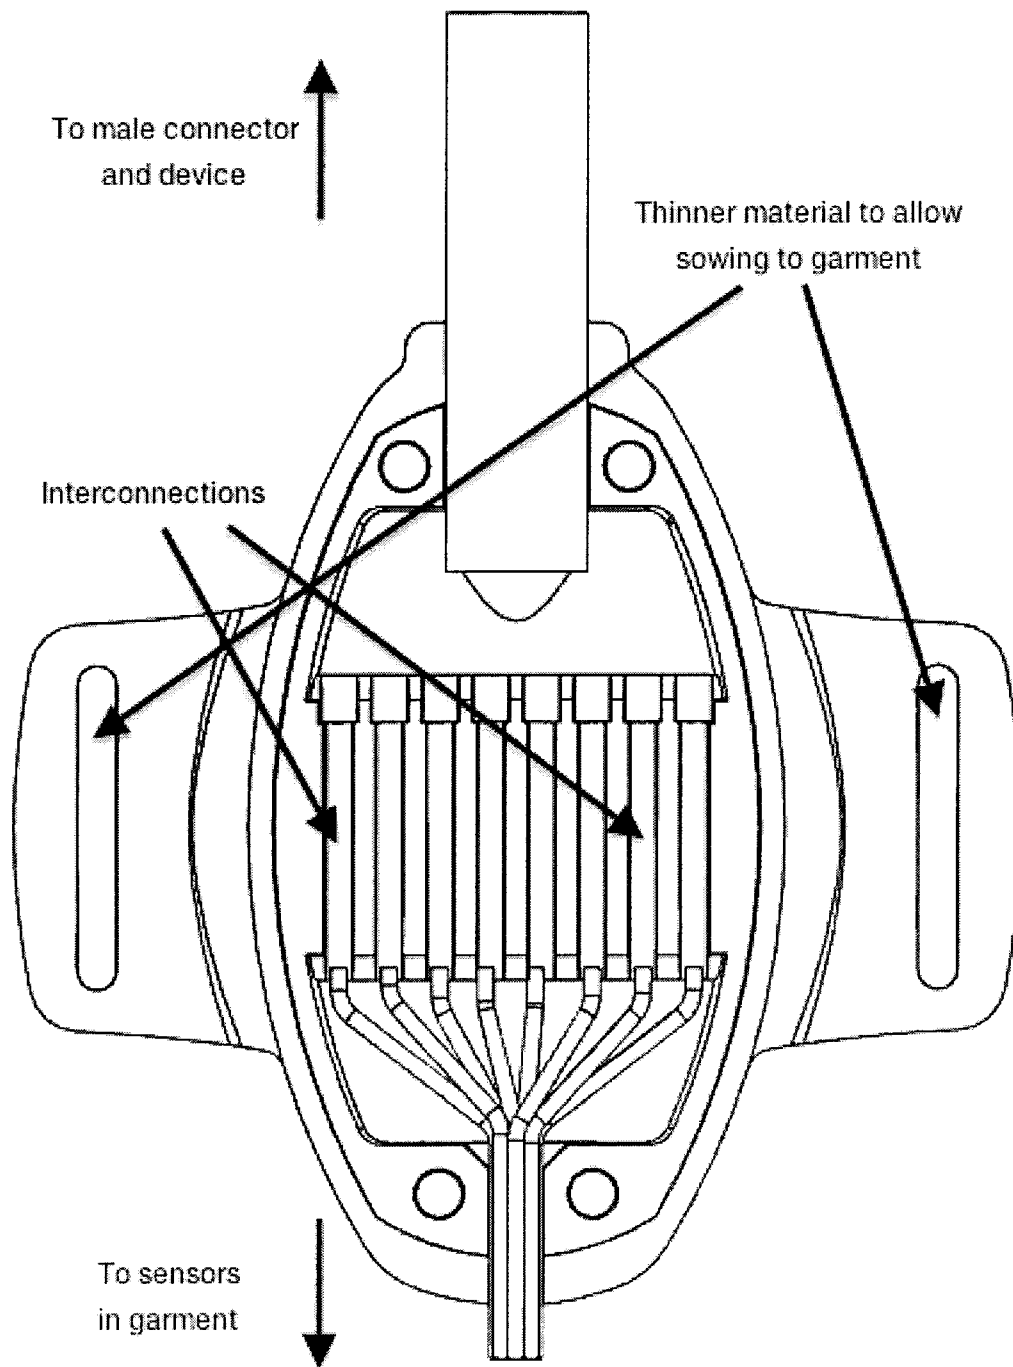


Figure 2b

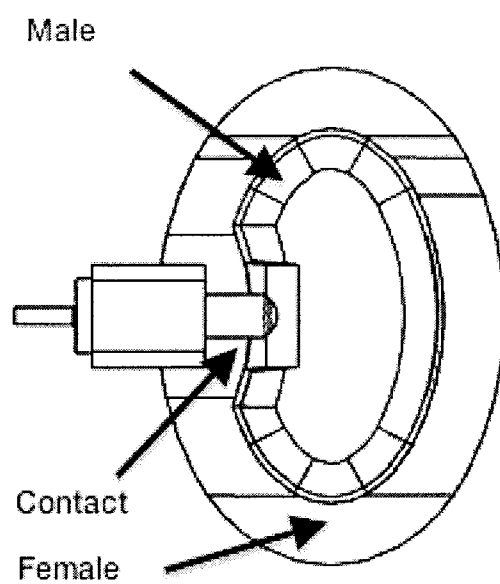


Figure 3

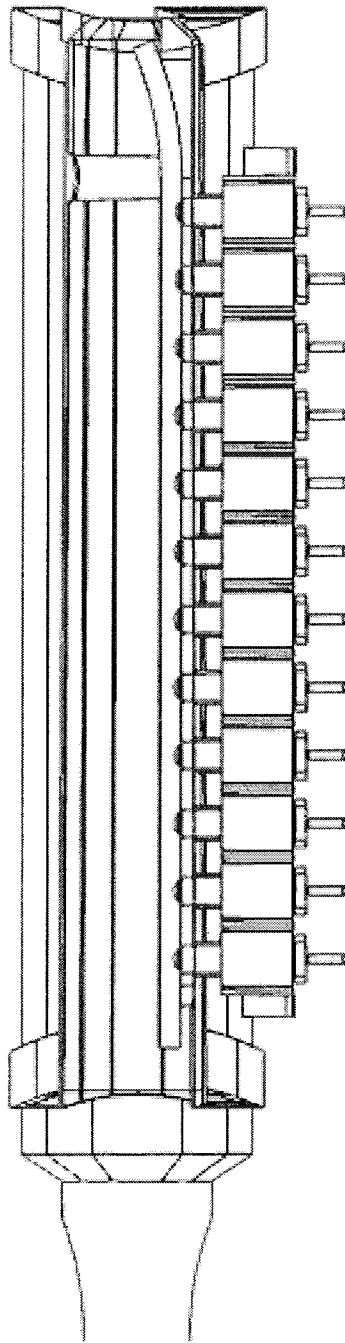


Figure 4

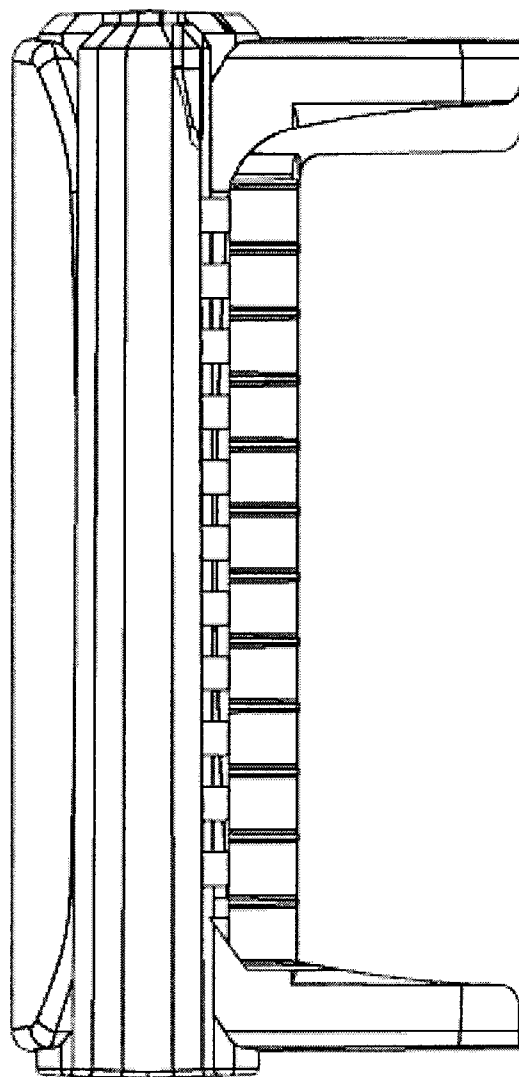


Figure 5

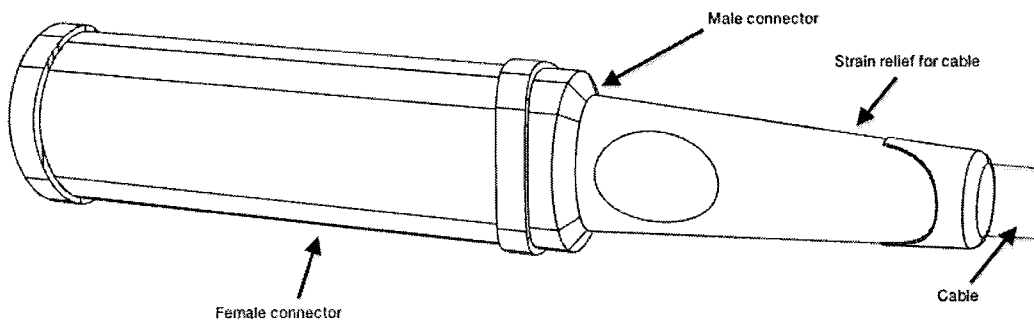


Figure 6

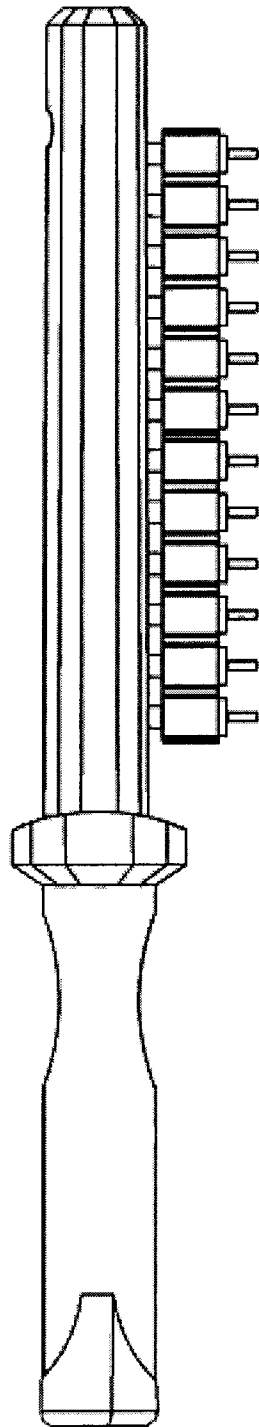


Figure 7

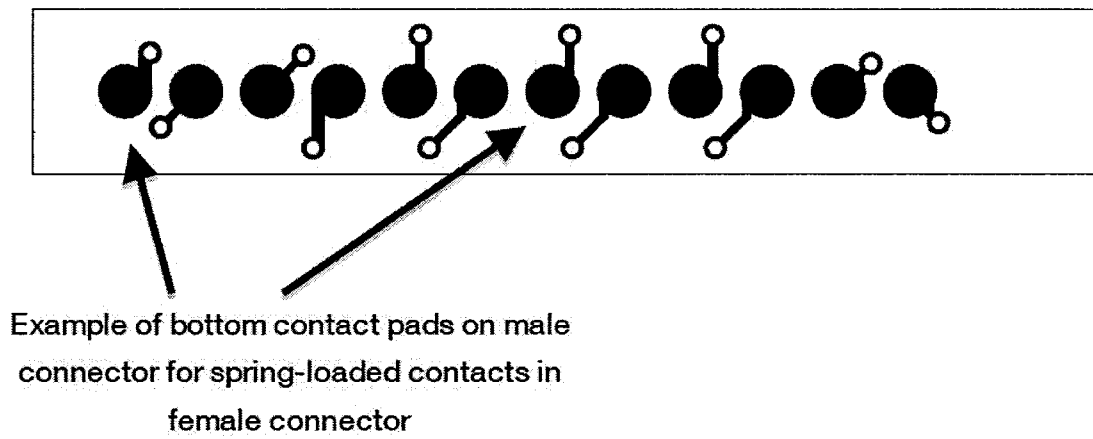


Figure 8 A

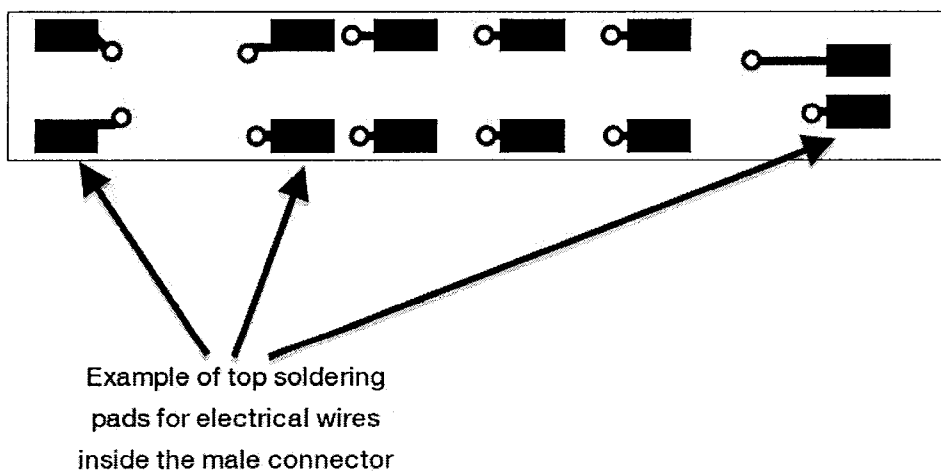


Figure 8 B

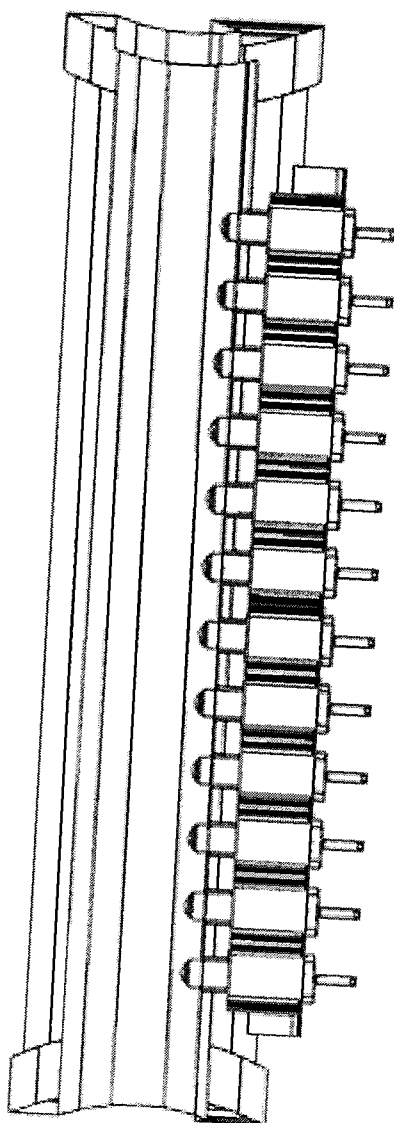


Figure 9

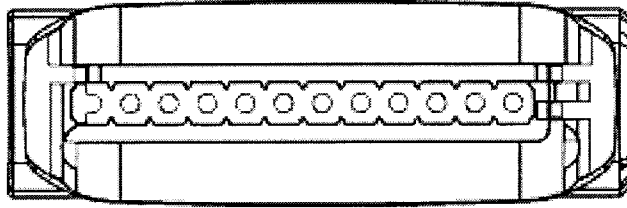


Figure 10

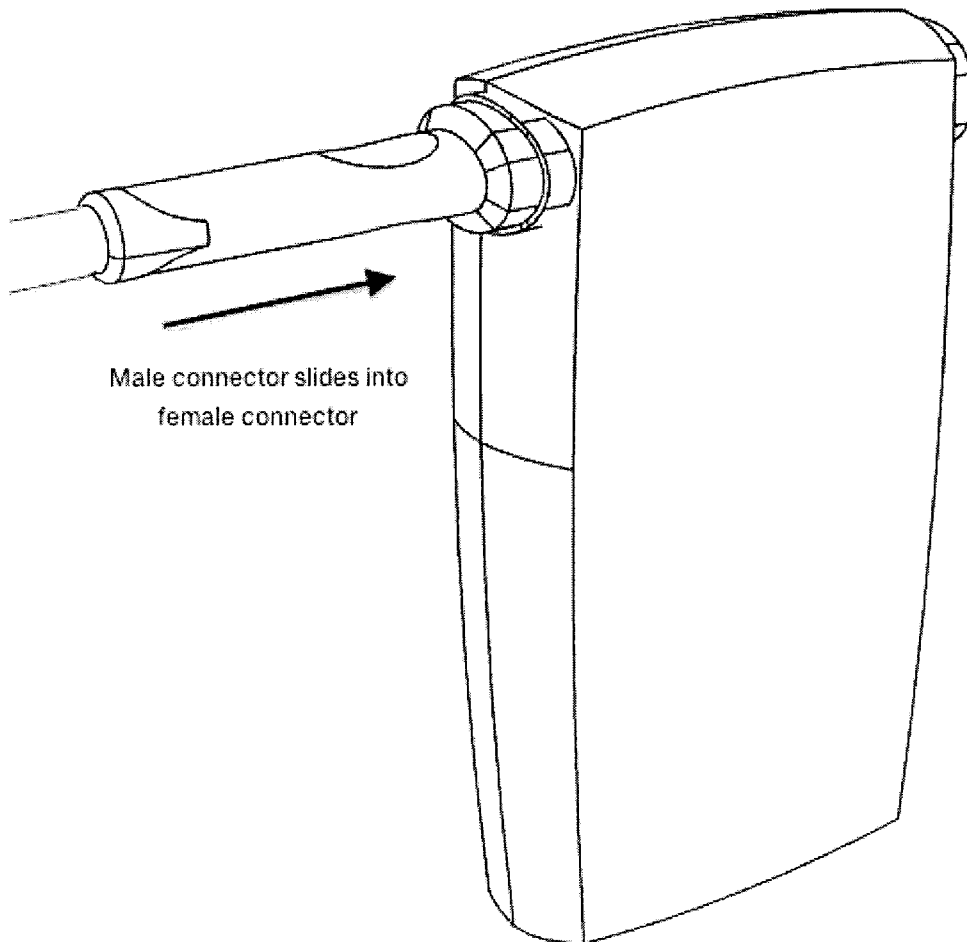


Figure 11

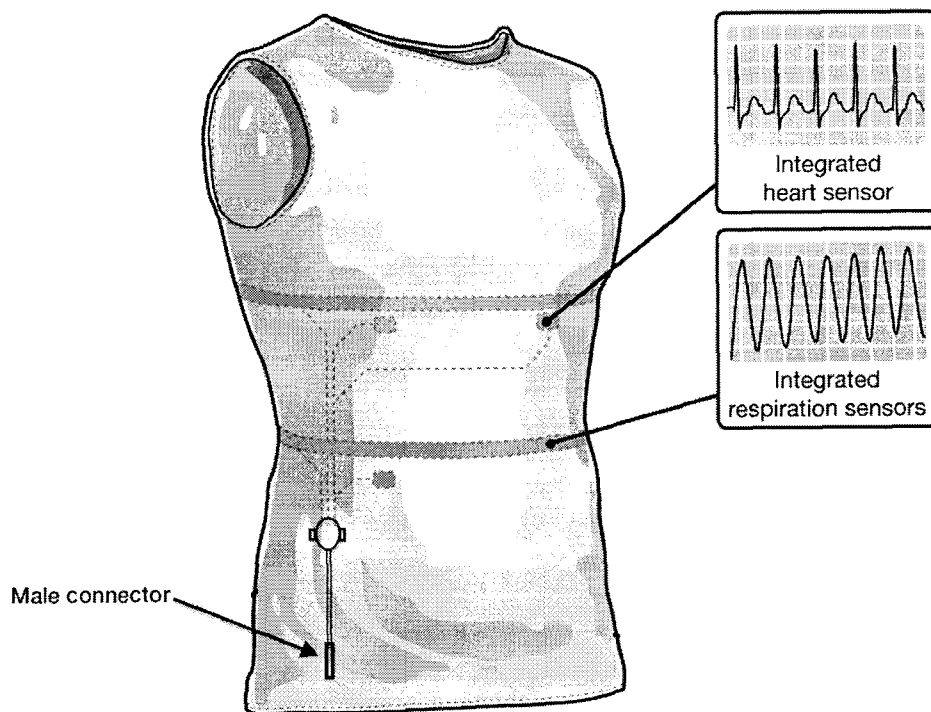


Figure 12

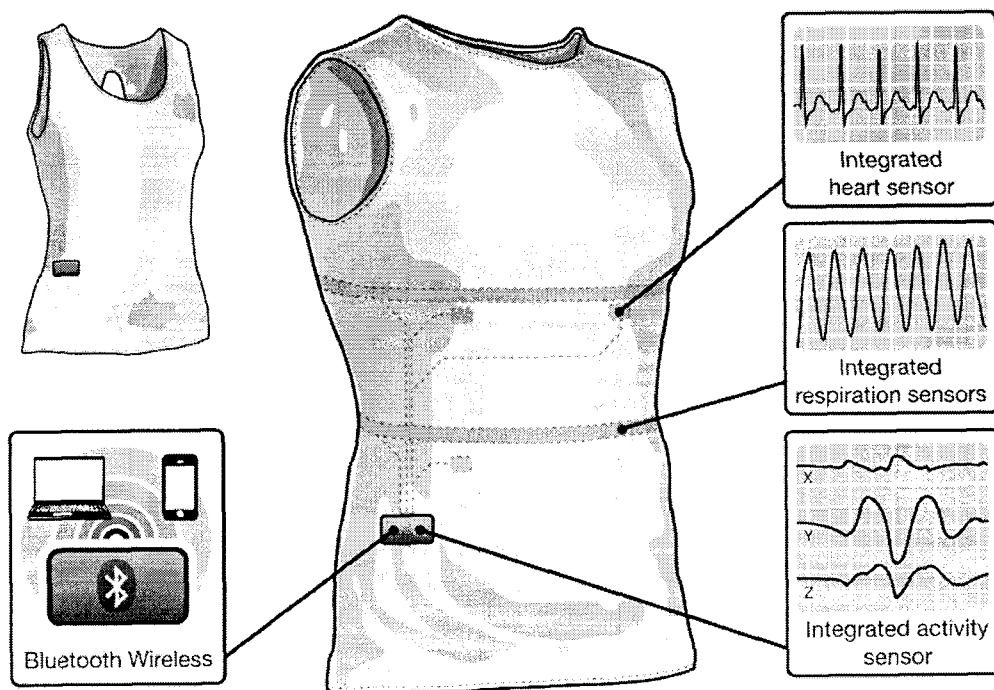


Figure 13

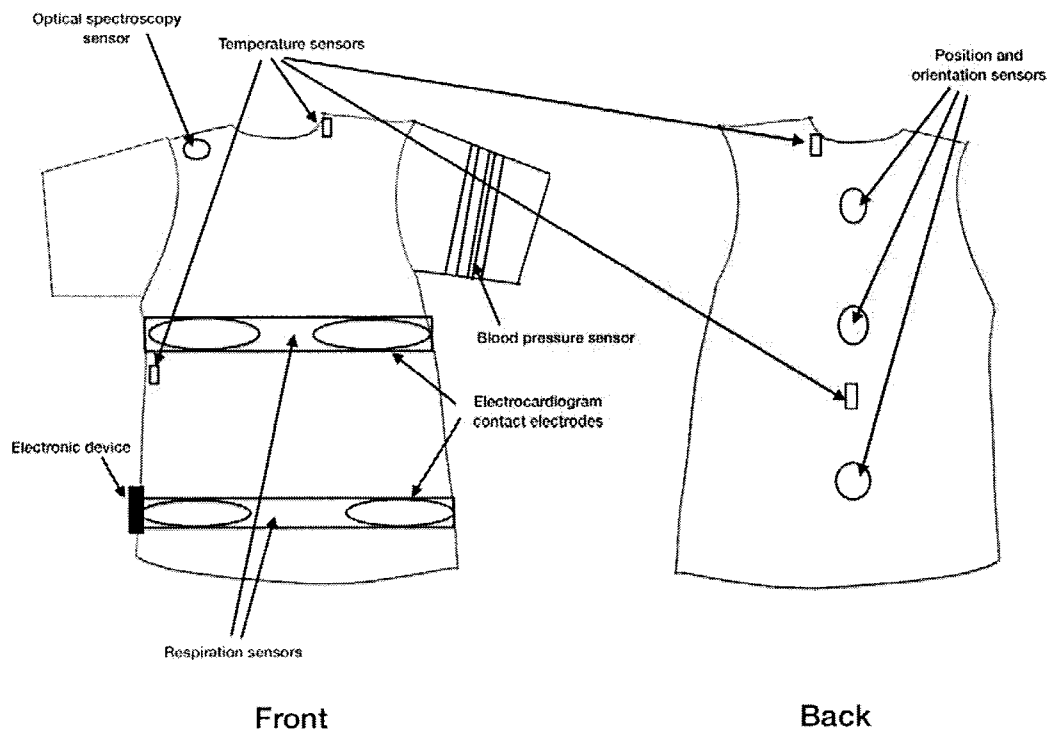


Figure 14

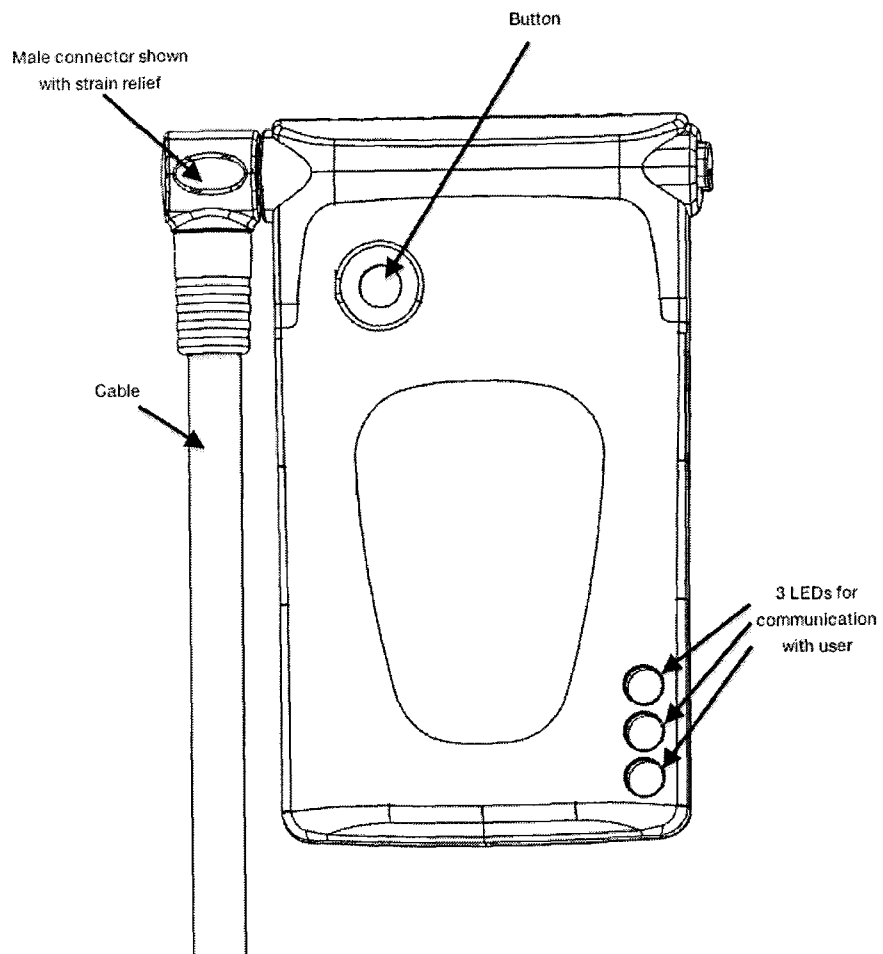


Figure 15

Sensor Stack

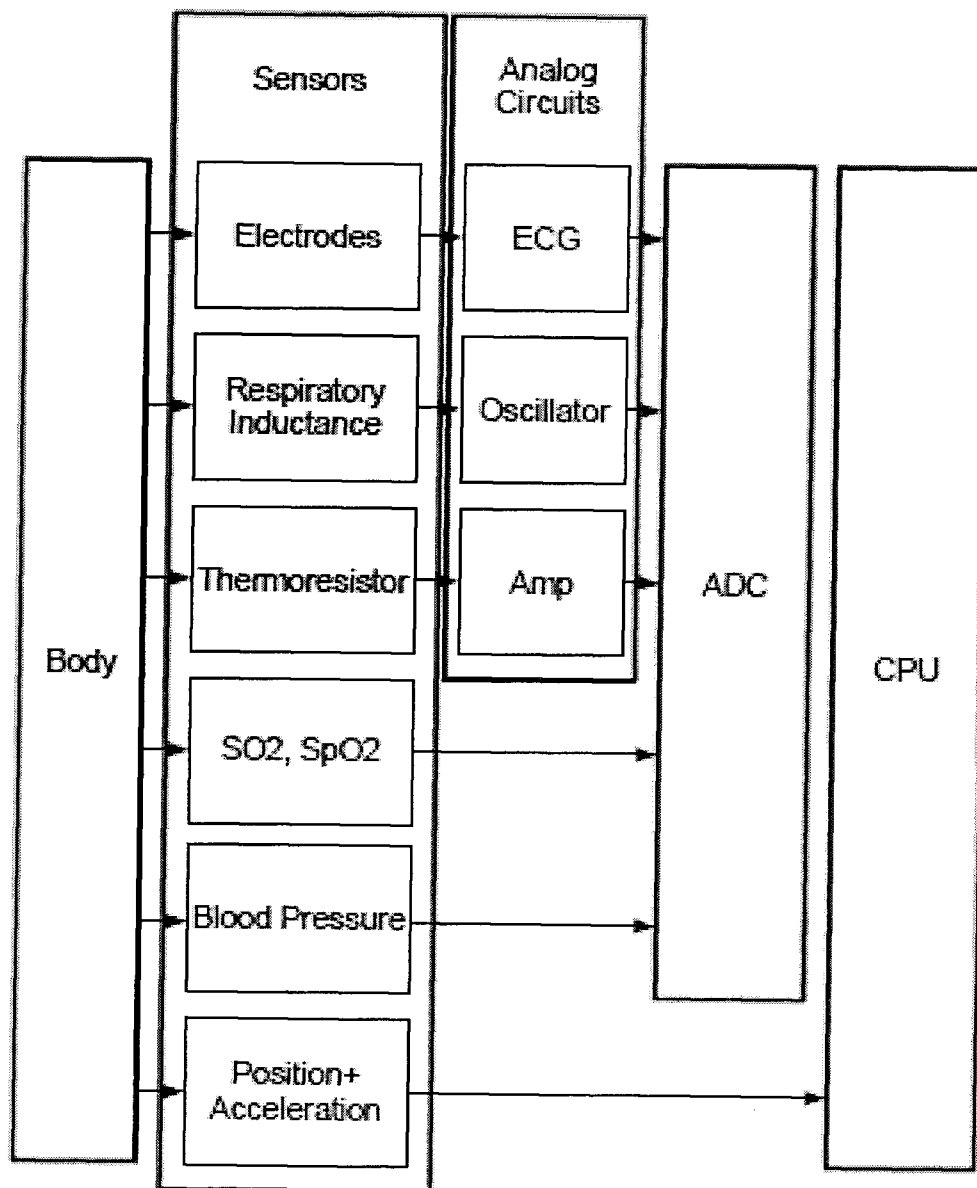


Figure 16

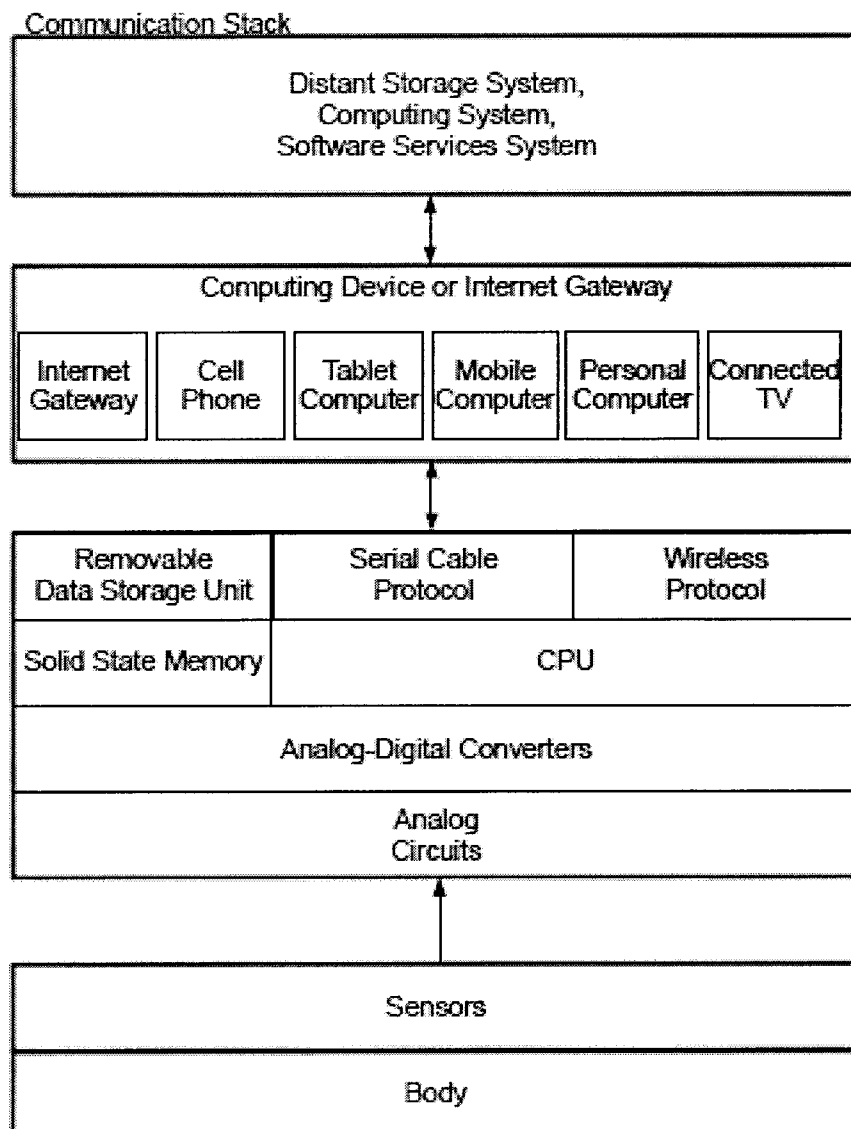


Figure 17

Removable Data Storage Unit	Wireless Components, Antenna	Power Management	
Solid State Memory	Serial Protocol Components, Connector	Rechargeable Battery	
CPU / Analog-Digital Converters			
Electrocardiogram	Respiratory Inductance Plethysmograph	Thermistors Amplification	Position/ Acceleration Sensors
Connector to garment sensors			

Figure 18

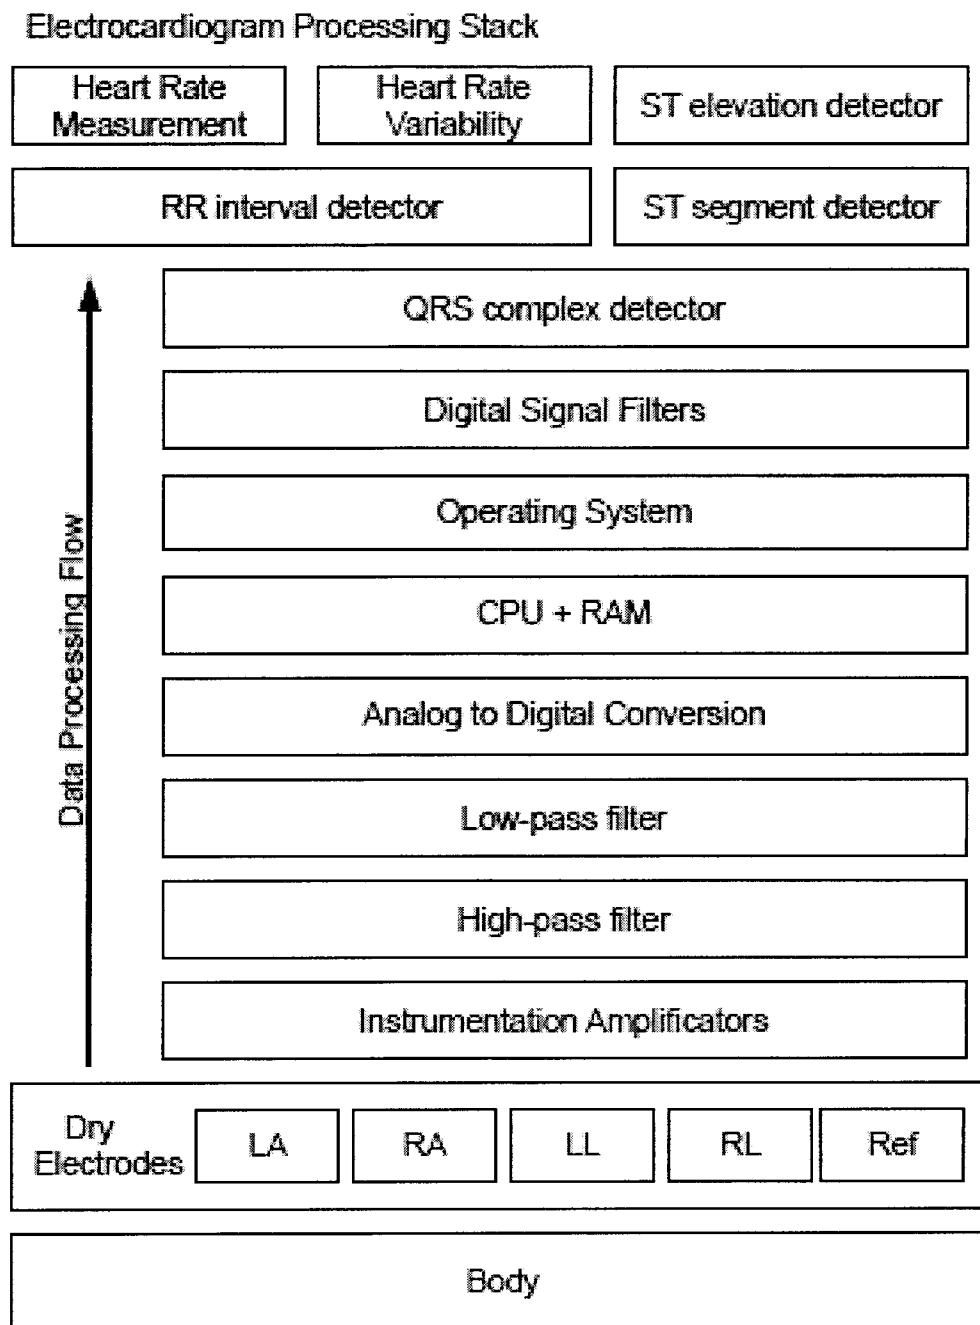


Figure 19

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2013/000221

A. CLASSIFICATION OF SUBJECT MATTER

IPC: **H01R 13/52** (2006.01) , **A41D 13/00** (2006.01) , **H01R 11/16** (2006.01) , **H01R 13/514** (2006.01) , **H01R 13/703** (2006.01) , **H02G 15/013** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01R 13/52 (2006.01) , **A41D 13/00** (2006.01) , **H01R 11/16** (2006.01) , **H01R 13/514** (2006.01) , **H01R 13/703** (2006.01) , **H02G 15/013** (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)

Databases: Epoque (English full text database), Canadian Patents Database

Search terms: connector, sensor, seal, male, female, inline, c-shaped, garment, washable

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US6305962 (Maher, T. et al.) 23 October 2001 (23-10-2001)	4-9
-----	*Figs. 9A-9C, col. 11, lines 25-53*	-----
Y		10-13
Y	US2008015454 (Gal, Y.) 17 January 2008 (17-01-2008)	10-13
	Fig. 1A	
A	US6645008 (Massey, P. et al.) 11 July 2002 (11-07-2002)	1-3
	Figs. 3-10	
A	US2005054941 Ting, J. et al.) 10 March 2005 (10-03-2005)	4-13
	Figs. 6 and 18	
A	WO2012160123 (Broedsgaard, D.) 29 November 2012 (29-11-2012)	4-13
	Figs. 16-18	
A	US2008064964 (Nagata, S. et al.) 13 March 2008 (13-03-2008)	4-13
	Figs. 5A and 5B	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

29 May 2013 (29-05-2013)

Date of mailing of the international search report

31 May 2013 (31-05-2013)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9
Facsimile No.: 001-819-953-2476

Authorized officer

Jim Triantafillou (819) 934-4268

INTERNATIONAL SEARCH REPORTInternational application No.
PCT/CA2013/000221**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons :

1. ☐ Claim Nos. :
 because they relate to subject matter not required to be searched by this Authority, namely :

2. ☐ Claim Nos. :
 because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically :

3. ☐ Claim Nos. :
 because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows :

Group A (Claims 1-3): A washable interconnection patch for interconnecting wires to a cable.

Group B (Claims 4-13): A washable garment including a connection assembly with male and female connectors.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos. :
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos. :

Remark on Protest ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2013/000221

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US6305962B1	23 October 2001 (23-10-2001)	AU3490200A WO0049684A1 WO0049684A9	04 September 2000 (04-09-2000) 24 August 2000 (24-08-2000) 27 September 2001 (27-09-2001)
US2008015454A1	17 January 2008 (17-01-2008)	AU2005286769A1 AU2006342788A1 CA2580246A1 CA2625267A1 EP1791467A2 EP1791467A4 EP1791467B1 EP1940287A2 EP1940287A4 EP1940287B1 JP2008513152A JP2009518057A US2006122528A1 US8034001B2 US2012071793A1 WO2006034291A2 WO2006034291A3 WO2007126435A2 WO2007126435A3	30 March 2006 (30-03-2006) 08 November 2007 (08-11-2007) 30 March 2006 (30-03-2006) 08 November 2007 (08-11-2007) 06 June 2007 (06-06-2007) 21 April 2010 (21-04-2010) 27 March 2013 (27-03-2013) 09 July 2008 (09-07-2008) 14 April 2010 (14-04-2010) 19 September 2012 (19-09-2012) 01 May 2008 (01-05-2008) 07 May 2009 (07-05-2009) 08 June 2006 (08-06-2006) 11 October 2011 (11-10-2011) 22 March 2012 (22-03-2012) 30 March 2006 (30-03-2006) 12 October 2006 (12-10-2006) 08 November 2007 (08-11-2007) 20 March 2008 (20-03-2008)
US6645008B2	11 November 2003 (11-11-2003)	EP1352452A1 GB0100774D0 JP2004518323A JP3993104B2 US2002089399A1 WO02056425A1	15 October 2003 (15-10-2003) 21 February 2001 (21-02-2001) 17 June 2004 (17-06-2004) 17 October 2007 (17-10-2007) 11 July 2002 (11-07-2002) 18 July 2002 (18-07-2002)
US2005054941A1	10 March 2005 (10-03-2005)	AU2004277381A1 AU2004277381B2 AU2008203307A1 AU2008203307B2 AU2010212423A1 AU2010212423B2 CA2689267A1 EP1659940A2 EP1659940A4 EP2150171A1 US7559902B2 US2007299325A1 US2010041974A1 WO2005032447A2 WO2005032447A3 WO2008153786A1	14 April 2005 (14-04-2005) 24 April 2008 (24-04-2008) 14 August 2008 (14-08-2008) 20 May 2010 (20-05-2010) 09 September 2010 (09-09-2010) 20 September 2012 (20-09-2012) 18 December 2008 (18-12-2008) 31 May 2006 (31-05-2006) 07 March 2012 (07-03-2012) 10 February 2010 (10-02-2010) 14 July 2009 (14-07-2009) 27 December 2007 (27-12-2007) 18 February 2010 (18-02-2010) 14 April 2005 (14-04-2005) 09 March 2006 (09-03-2006) 18 December 2008 (18-12-2008)
WO2012160123A1	29 November 2012 (29-11-2012)	None	
US2008064964A1	13 March 2008 (13-03-2008)	CN1933777A CN1933777B EP1731094A1 EP1731094A4 EP2324764A2 EP2324764A3 JP4698582B2 JP2011098214A WO2005089645A1	21 March 2007 (21-03-2007) 22 September 2010 (22-09-2010) 13 December 2006 (13-12-2006) 29 July 2009 (29-07-2009) 25 May 2011 (25-05-2011) 18 January 2012 (18-01-2012) 08 June 2011 (08-06-2011) 19 May 2011 (19-05-2011) 29 September 2005 (29-09-2005)