




|                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>(86) Date de dépôt PCT/PCT Filing Date: 2015/07/10</p> <p>(87) Date publication PCT/PCT Publication Date: 2016/02/11</p> <p>(45) Date de délivrance/Issue Date: 2018/12/04</p> <p>(85) Entrée phase nationale/National Entry: 2016/12/22</p> <p>(86) N° demande PCT/PCT Application No.: US 2015/040025</p> <p>(87) N° publication PCT/PCT Publication No.: 2016/022252</p> <p>(30) Priorité/Priority: 2014/08/08 (US62/035,282)</p> | <p>(51) Cl.Int./Int.Cl. <i>E21B 43/26</i> (2006.01),<br/><i>E21B 33/138</i> (2006.01), <i>E21B 43/117</i> (2006.01),<br/><i>E21B 43/119</i> (2006.01), <i>E21B 43/267</i> (2006.01)</p> <p>(72) Inventeurs/Inventors:<br/>TOLMAN, RANDY C., US;<br/>ENTCHEV, PAVLIN B., NO;<br/>MORROW, TIMOTHY I., US</p> <p>(73) Propriétaire/Owner:<br/>EXXONMOBIL UPSTREAM RESEARCH COMPANY,<br/>US</p> <p>(74) Agent: BORDEN LADNER GERVAIS LLP</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

(54) Titre : PROCÉDES DE STIMULATION DE FRACTURE DE PLUSIEURS ZONES D'UN Puits  
(54) Title: METHODS FOR MULTI-ZONE FRACTURE STIMULATION OF A WELL

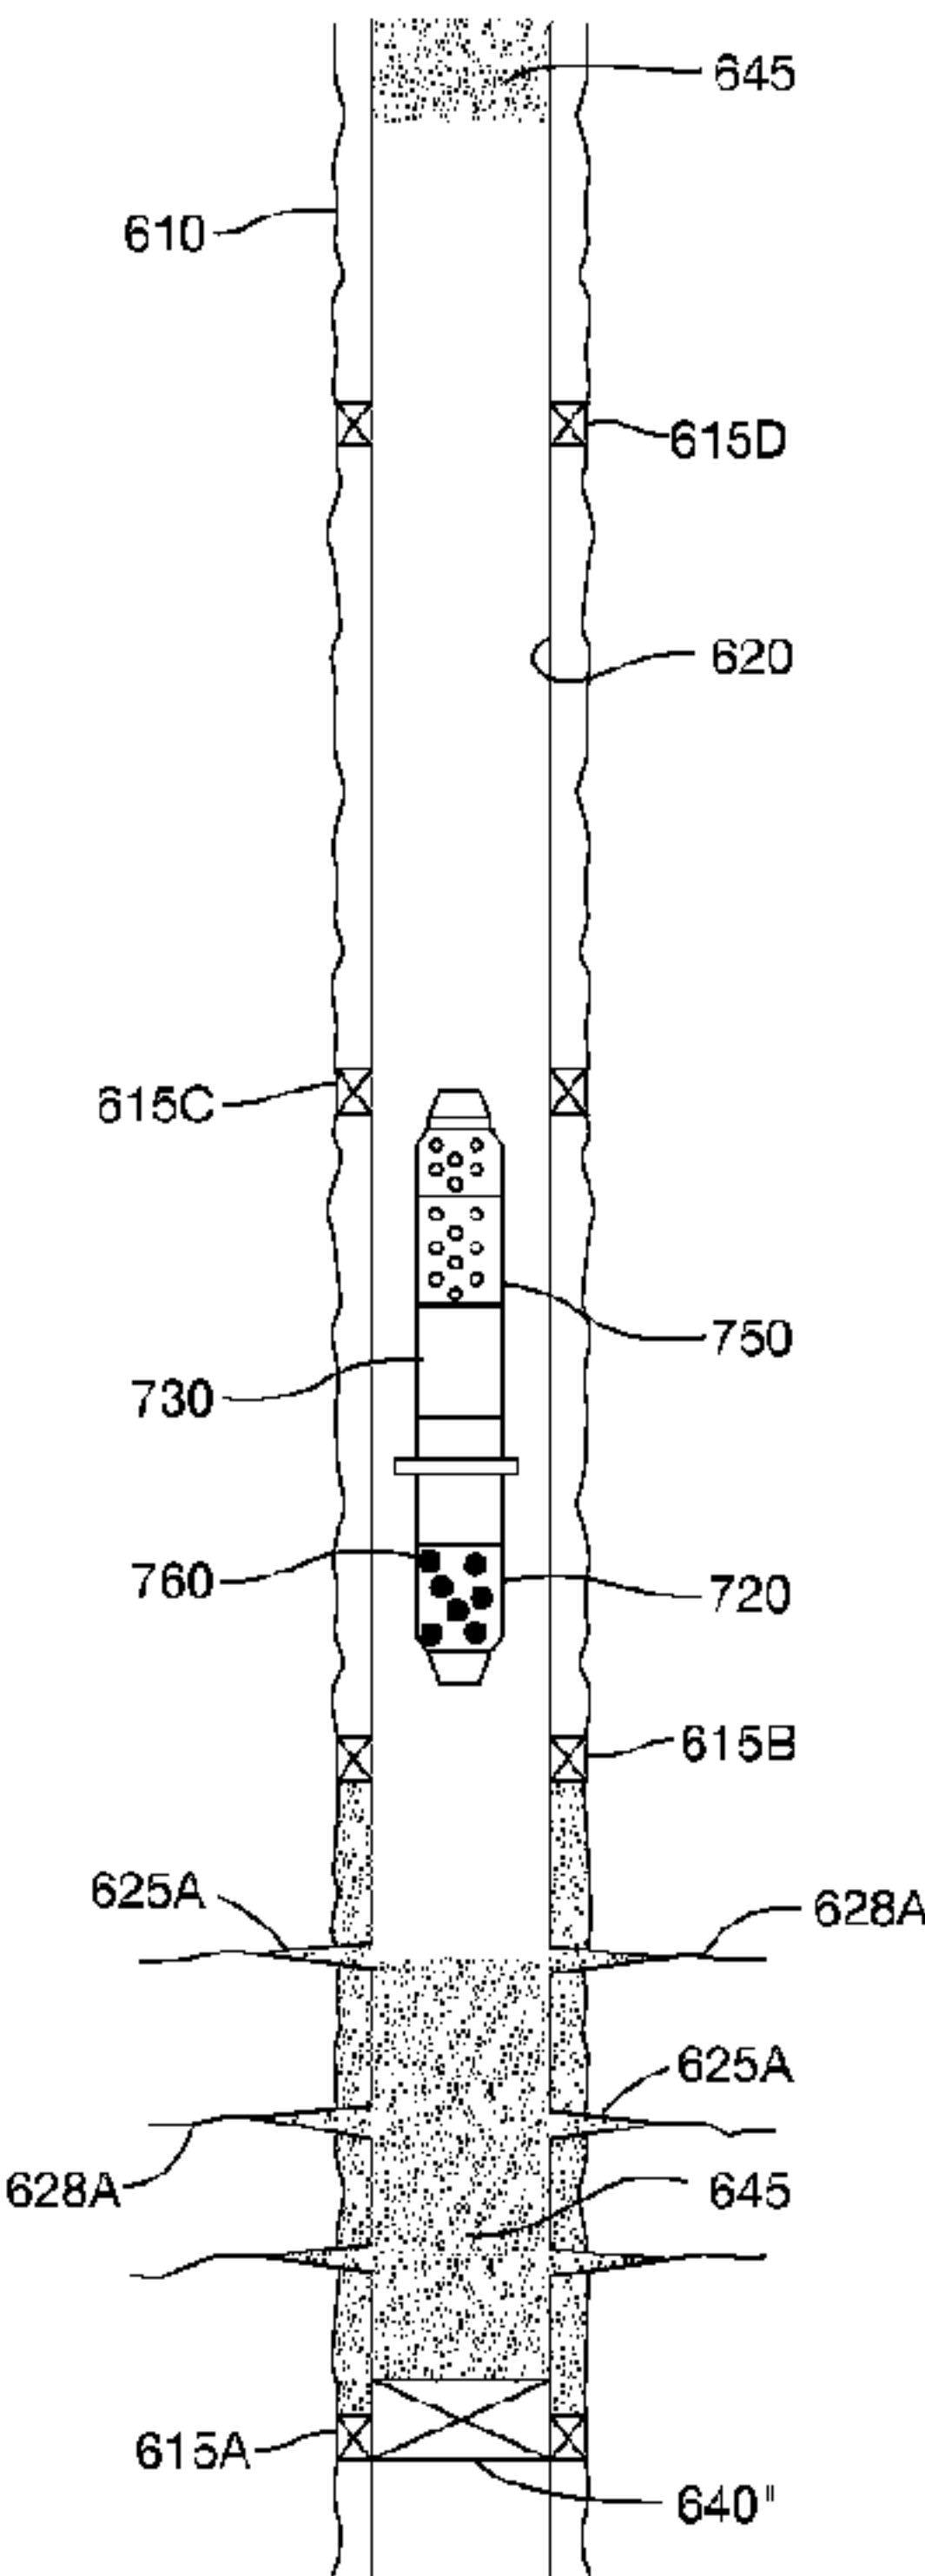

(57) **Abrégé/Abstract:**  
A completion assembly designed to perforate a section of casing along a wellbore, comprises a perforating gun, a canister, and a locator device. The canister contains ball sealers that are dimensioned to seal perforations, while the locator device is a casing collar locator that senses the location of the assembly within the wellbore based on the spacing of casing collars. The completion assembly also includes an on-board controller configured to send an actuation signal to the perforating gun to cause one or more detonators to fire when the locator has recognized a selected location of the completion assembly, thereby perforating the casing, and to release the ball sealers from the canister. Methods for seamlessly perforating and fracturing multiple zones along a wellbore are also provided, using a select-fire perforating gun.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 February 2016 (11.02.2016)

(10) International Publication Number  
**WO 2016/022252 A1**

## (51) International Patent Classification:

*E21B 43/117* (2006.01) *E21B 43/267* (2006.01)  
*E21B 43/119* (2006.01) *E21B 33/138* (2006.01)  
*E21B 43/26* (2006.01)

(71) Applicant (for all designated States except US): **EXXON-MOBIL UPSTREAM RESEARCH COMPANY** [US/US]; Corp-urc-sw359, P.O. Box 2189, Houston, TX 77252-2189 (US).

## (21) International Application Number:

PCT/US2015/040025

## (72) Inventors; and

(71) Applicants (for US only): **TOLMAN, Randy, C.** [US/US]; 25625 Richards Road, Spring, TX 77386 (US). **ENTCHEV, Pavlin, R.** [US/NO]; Solliveien 21 C, N-4020 Stavanger (NO). **MORROW, Timothy, I.** [US/US]; 9806 Moonscape View, Humble, TX 77396 (US).

## (22) International Filing Date:

10 July 2015 (10.07.2015)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

62/035,282 8 August 2014 (08.08.2014) US

(74) Agents: **JAMES, Ricky, F.** et al.; Exxonmobil Upstream Research Company, Corp-urc-sw359, P.O. Box 2189, Houston, TX 77252-2189 (US).

[Continued on next page]

(54) Title: METHODS FOR MULTI-ZONE FRACTURE STIMULATION OF A WELL

(57) Abstract: A completion assembly designed to perforate a section of casing along a wellbore, comprises a perforating gun, a canister, and a locator device. The canister contains ball sealers that are dimensioned to seal perforations, while the locator device is a casing collar locator that senses the location of the assembly within the wellbore based on the spacing of casing collars. The completion assembly also includes an on-board controller configured to send an actuation signal to the perforating gun to cause one or more detonators to fire when the locator has recognized a selected location of the completion assembly, thereby perforating the casing, and to release the ball sealers from the canister. Methods for seamlessly perforating and fracturing multiple zones along a wellbore are also provided, using a select-fire perforating gun.

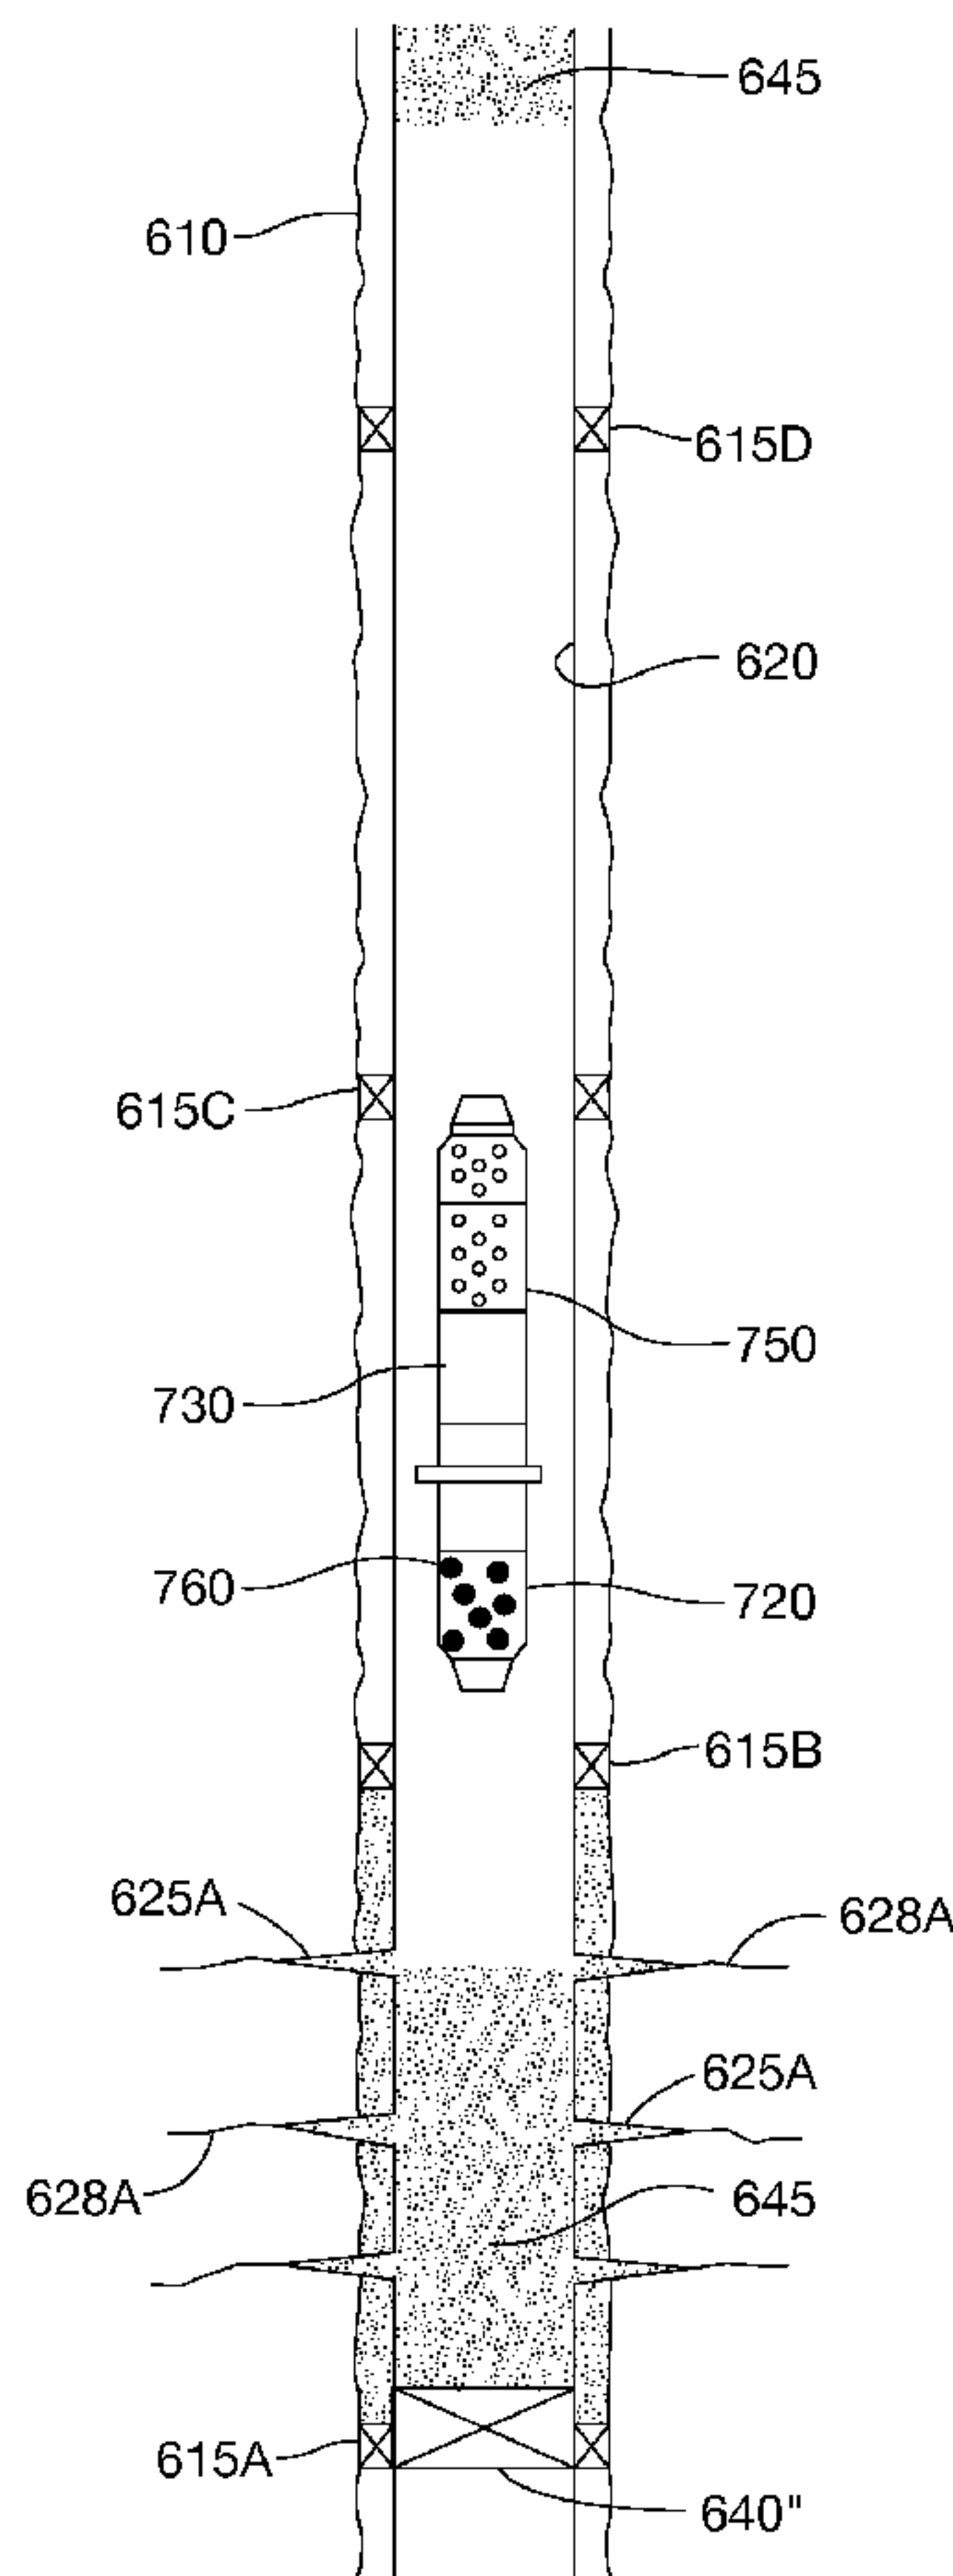


FIG. 6D

WO 2016/022252 A1

WO 2016/022252 A1



**(81) Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

## **METHODS FOR MULTI-ZONE FRACTURE STIMULATION OF A WELL**

[0001]

### **BACKGROUND OF THE INVENTION**

[0002] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present disclosure. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

#### **Field of the Invention**

[0003] This invention relates generally to the field of wellbore operations. More specifically, the invention relates to completion processes wherein multiple zones of a formation are fractured along a wellbore in a seamless manner.

#### **General Discussion of Technology**

[0004] In the drilling of oil and gas wells, a wellbore is formed using a drill bit that is urged downwardly at a lower end of a drill string. After drilling to a predetermined depth, the drill string and bit are removed and the wellbore is lined with a string of casing. An annular area is thus formed between the string of casing and the surrounding formations.

[0005] A cementing operation is typically conducted in order to fill or “squeeze” the annular area with columns of cement. The combination of cement and casing strengthens the wellbore and facilitates the zonal isolation of the formations behind the casing.

[0006] It is common to place several strings of casing having progressively smaller outer diameters into the wellbore. A first string may be referred to as surface casing. The surface casing serves to isolate and protect the shallower, fresh water-bearing aquifers from

contamination by any other wellbore fluids. Accordingly, this casing string is almost always cemented entirely back to the surface.

**[0007]** The process of drilling and then cementing progressively smaller strings of casing is repeated several times until the well has reached total depth. In some instances, the final string of casing is a liner, that is, a string of casing that is not tied back to the surface. The final string of casing, referred to as a production casing, is also typically cemented into place. In some completions, the production casing (or liner) has swell packers spaced across the productive interval. This creates compartments between the swell packers for isolation of zones and specific stimulation treatments.

**[0008]** As part of the completion process, the production casing is perforated at a desired level. This means that lateral holes are shot through the casing and the cement column surrounding the casing. The perforations allow reservoir fluids to flow into the wellbore. Thereafter, the formation is typically fractured. In the case of swell packers or individual compartments, the perforating gun penetrates the casing, allowing reservoir fluids to flow from the rock formation into the wellbore along an individual zone.

**[0009]** Hydraulic fracturing consists of injecting water with friction reducers or viscous fluids (usually shear thinning, non-Newtonian gels or emulsions) into a formation at such high pressures and rates that the reservoir rock parts and forms a network of fractures. The fracturing fluid is typically mixed with a proppant material such as sand, ceramic beads, or other granular materials. The proppant serves to hold the fracture(s) open after the hydraulic pressures are released. In the case of so-called “tight” or unconventional formations, the combination of fractures and injected proppant substantially increases the flow capacity of the treated reservoir.

**[0010]** In order to further stimulate the formation and to clean the near-wellbore regions downhole, an operator may choose to “acidize” the formations. This is done by injecting an acid solution down the wellbore and through the perforations. The use of an acidizing solution is particularly beneficial when the formation comprises carbonate rock. In operation, the completion company injects a concentrated formic acid or other acidic composition into the wellbore, and directs the fluid into selected zones of interest. The acid helps to dissolve carbonate material, thereby opening up porous channels through which hydrocarbon fluids may flow into the wellbore. In addition, the acid helps to dissolve drilling mud that may have invaded the formation.

**[0011]** Application of hydraulic fracturing and acid stimulation as described above is a routine part of petroleum industry operations as applied to individual hydrocarbon-producing

formations (or “pay zones”). Such pay zones may represent up to about 60 meters (100 feet) of gross, vertical thickness of subterranean formation. More recently, wells are being completed through a producing formation horizontally, with the horizontal portion extending possibly 5,000, 10,000 or even 15,000 feet.

[0012] When there are multiple or layered formations to be hydraulically fractured, or a very thick hydrocarbon-bearing formation (over about 40 meters, or 131 feet), or where an extended-reach horizontal well is being completed, then more complex treatment techniques are required to obtain treatment of the entire target formation. In this respect, the operating company must isolate various zones or sections to ensure that each separate zone is not only perforated, but adequately fractured and treated. In this way the operator is sure that fracturing fluid and proppant are being injected through each set of perforations and into each zone of interest to effectively increase the flow capacity at each desired depth.

[0013] The isolation of various zones for pre-production treatment requires that the intervals be treated in stages. This, in turn, involves the use of so-called diversion methods. In petroleum industry terminology, “diversion” means that injected fluid is diverted from entering one set of perforations so that the fluid primarily enters only one selected zone of interest. Where multiple zones of interest are to be perforated, this requires that multiple stages of diversion be carried out.

[0014] In order to isolate selected zones of interest, various diversion techniques may be employed within the wellbore. Known diversion techniques include the use of:

- Mechanical devices such as bridge plugs, packers, down-hole valves, sliding sleeves (known as “frac sleeves”), and baffle/plug combinations;
- Ball sealers;
- Particulates such as sand, ceramic material, proppant, salt, waxes, resins, or other compounds;
- Chemical systems such as viscosified fluids, gelled fluids, foams, or other chemically formulated fluids; and
- Limited entry methods.

[0015] These and other methods for temporarily blocking the flow of fluids into or out of a given set of perforations are described more fully in U.S. Pat. No. 6,394,184 entitled “Method and Apparatus for Stimulation of Multiple Formation Intervals.” The ‘184 patent issued in 2002.

[0016] The ‘184 patent also discloses various techniques for running a bottom hole assembly (“BHA”) into a wellbore, and then creating fluid communication between the wellbore and

various zones of interest. In most embodiments, the BHA includes various perforating guns having associated charges. In most embodiments, the BHA is deployed in the wellbore by means of a wireline extending from the surface. The wireline provides electrical signals to the surface for depth control. It also provides electrical signals to the perforating guns for detonation. The electrical signals allow the operator to cause the charges to detonate, at the correct depth or zone, thereby forming perforations.

**[0017]** The BHA also includes a set of mechanically actuated, axial position locking devices, or slips. The slips are actuated through a “continuous J” mechanism by cycling the axial load between compression and tension. In this way, the slips are re-settable.

**[0018]** The BHA further includes an inflatable packer or other sealing mechanism. The packer is actuated by application of a slight compressive load after the slips are set within the casing. Along with the slips, the packer is resettable so that the BHA may be moved to different depths or locations along the wellbore so as to isolate perforations along selected zones of interest.

**[0019]** Each of the various embodiments for a BHA disclosed in the ‘184 patent includes a means for deploying the assembly into the wellbore, and then translating the assembly up and down the wellbore. Such translation means include a string of coiled tubing, conventional jointed tubing, a wireline, an electric line or a tractor system attached directly to the BHA. In any instance, the purpose of the bottom hole assembly is to allow the operator to perforate the casing along various zones of interest, and then sequentially isolate the respective zones of interest so that fracturing fluid may be injected into the zones of interest in the same trip.

**[0020]** The bottom hole assembly and the formation treating processes disclosed in the ‘184 patent help to expedite the well completion process. In this respect, the operator is able to selectively set the slips and the packer for perforation and subsequent formation treatment. The operator is able to set the BHA at a first location, fracture or otherwise stimulate a formation, release the BHA, and move it to a new level along the wellbore, all without removing the BHA from the wellbore between stages.

**[0021]** The bottom hole assembly and the formation treating processes disclosed in the ‘184 patent represent a valuable advance in the art of well completion processes. This process is named "Annular Coiled Tubing FRActuring (ACT-Frac). The ACT-Frac process allows the operator to more effectively stimulate multi-layer hydrocarbon formations at substantially reduced cost compared to previous completion methods.

[0022] However, as with previously-known well completion processes, the ACT-Frac process requires the use of expensive surface equipment. Such equipment may include a snubbing unit or a lubricator, which may extend as much as 75 feet above the wellhead. In this respect, the snubbing unit or the lubricator must be of a length greater than the length of the perforating gun assembly (or other tool string) to allow the perforating gun assembly to be safely deployed and removed from the wellbore under pressure. An illustrative lubricator and associated crane arm, wellhead and wellbore are shown in Figure 1 of co-pending patent application U.S. Patent Publ. No. 2013/0255939.

[0023] To avoid the need for a long snubbing unit, it is desirable to fracture the multi-zone formation without the use of a long tool string. Further, it is desirable to complete the well in a multi-zone formation using autonomous perforating guns and ball sealers. Alternatively, it is desirable to perforate a well along multiple zones in a seamless manner using a perforating gun having multiple charges, and using ball sealers.

### **SUMMARY OF THE INVENTION**

[0024] The assemblies described herein have various benefits in the conducting of oil and gas exploration and production activities.

[0025] A completion assembly for autonomously perforating a section of casing in a wellbore is first disclosed. The assembly is an elongated tool that is configured to be released into a wellbore that has one or more strings of casing placed therein.

[0026] The completion assembly includes a perforating gun. The perforating gun includes one or more sets of charges that fire upon receiving a detonation signal.

[0027] The completion assembly further includes a canister. The canister holds a plurality of ball sealers, each of which is dimensioned to seal perforations. In one aspect, the canister is also a fluid container that holds a fluid along with the ball sealers.

[0028] The completion assembly next includes a casing collar locator. The casing collar locator is used to sense the location of the perforating gun within the wellbore based on the spacing of casing collars. The casing collar locator identifies collars by detecting magnetic anomalies along a casing wall.

[0029] The completion assembly further includes an on-board controller. Preferably, the on-board controller is part of an electronics module comprising onboard memory and built-in logic. The on-board controller is configured to send a first actuation signal to the canister to release the ball sealers when the locator has recognized a first selected location of the completion assembly. The on-board controller is further configured to send a second

actuation signal to the perforating gun to cause one or more detonators to fire when the locator has recognized a second selected location of the completion assembly. In this way, the casing is perforated at the second selected location.

**[0030]** Preferably, the first and second actuation signals are the same signal. When the completion assembly has reached the first selected location, the signal causes a “cap” to be fired. This ignites a primer cord, which in turn shoots the perforating gun and also releases the ball sealers. The charge is designed to fragment the entire tool assembly into the smallest pieces possible. Hence, ball sealers are released as part of the fragmentation.

**[0031]** The first location and the second location may be different locations. In this instance, the controller is programmed to send the first actuation signal before the second actuation signal. Alternatively, the first location and the second location may be substantially the same location. In this instance, the controller is programmed to send the first actuation signal and the second actuation signal at substantially the same times.

**[0032]** Preferably, the canister is fabricated from a friable material. The canister is then designed to self-destruct in response to the second actuation signal sent to the perforating gun. Alternatively, the canister is designed to self-destruct in response to the first actuation signal such that destruction of the canister causes the release of the ball sealers.

**[0033]** In one aspect, the assembly additionally includes a battery pack. The battery pack provides power to the locator and the on-board controller. In this way, the completion assembly may be released from the surface without need of an electric line.

**[0034]** The assembly may also include a safety system. The safety system is a multi-gated system that prevents premature activation of the perforating gun. In this respect, the safety system comprises control circuitry having one or more electrical switches that are independently operated in response to separate conditions before permitting the second actuation signal to reach the tool.

**[0035]** It is observed that the perforating gun, the canister, the locator, and the on-board controller are together dimensioned and arranged to be deployed in the wellbore as an autonomous unit. In this application, “autonomous unit” means that the assembly is not immediately controlled from the surface. Stated another way, the tool assembly does not rely upon a signal from the surface to know when to activate the tool. Preferably, the tool assembly is released into the wellbore without a working line. The tool assembly either falls gravitationally into the wellbore, or is pumped downhole. However, a non-electric working line such as slickline may optionally be employed.

[0036] A method for perforating multiple zones along a wellbore is also provided herein. The wellbore has been completed with one or more strings of casing.

[0037] The method first includes releasing a first completion assembly into the wellbore. The first completion assembly is designed in accordance with the completion assembly for autonomously perforating a section of casing as described above. In this respect, the assembly includes a perforating gun, a canister containing a plurality of ball sealers, a casing collar locator, and an on-board computer. The on-board controller is configured to send an actuation signal that ultimately causes the perforating gun to fire when the completion assembly has reached a selected location. In this way, the casing is perforated along a second zone in the wellbore. Firing of the perforating gun also preferably is accompanied by a destruction of the entire assembly. This causes the canister to simultaneously release the ball sealers into the wellbore. The ball sealers fall into the wellbore and seal perforations existing in a first zone below the second zone.

[0038] The perforating gun, the canister, the locator, and the on-board controller are together dimensioned and arranged to be deployed in the wellbore as a first autonomous unit.

[0039] The method also includes pumping a fracturing fluid into the wellbore behind the completion assembly. The method then includes further pumping the fracturing fluid through the perforations in the second zone, thereby creating fractures in a surrounding formation. Preferably, the fracturing fluid comprises a proppant such as sand.

[0040] In one aspect, the fracturing fluid begins to be pumped into the wellbore before the first actuation signal is sent to the canister of the first completion assembly. This expedites the completion process.

[0041] In one embodiment, the method also includes the steps of:

- releasing a second completion assembly into the wellbore;
- sealing the perforations in the second zone using ball sealers;
- pumping a fracturing fluid into the wellbore behind the second completion assembly;
- perforating a third zone above the second zone; and
- further pumping the fracturing fluid through the perforations in the third zone, thereby creating additional fractures in a surrounding formation.

[0042] In this instance, the second completion assembly also includes a perforating gun, a canister containing a plurality of ball sealers that are dimensioned to seal perforations, a casing collar locator for sensing the location of the perforating gun within the wellbore based

on the spacing of casing collars along the wellbore, and an on-board controller. Here, the on-board computer is configured to (i) send a first actuation signal to the canister to release the ball sealers when the locator has recognized a third selected location of the completion assembly, wherein the ball sealers then seal perforations existing in the second zone below the third selected location, and (ii) send a second actuation signal to the perforating gun to cause one or more detonators to fire when the locator has recognized a fourth selected location of the completion assembly, thereby perforating the casing at the fourth selected location as a third zone.

**[0043]** Preferably, the fracturing fluid begins to be pumped into the wellbore before the first actuation signal is sent to the canister of the second completion assembly. Preferably, the canister of each of the first and second completion assemblies is fabricated from a friable material. The canisters are then designed to self-destruct in response to the second actuation signal sent to the respective perforating guns. Alternatively, the canisters are designed to self-destruct in response to the first actuation signals such that destruction of the respective canisters causes the release of the respective ball sealers.

**[0044]** In one embodiment of the method, the method further comprises placing a plug in the wellbore below the first zone before releasing the first completion assembly.

**[0045]** In one arrangement, a packer (or swell packer) resides between the first zone and the second zone. This serves to seal an annular region between the casing and a surrounding earth formation. The process of pumping proppant through the perforations formed in the first zone creates a sand pack in the annular region below the packer.

**[0046]** A separate method for perforating multiple zones along a wellbore is also provided herein. The wellbore has again been completed with one or more strings of casing. This second method involves the use of an electric line.

**[0047]** The method first includes lowering a first perforating gun into the wellbore. The gun is lowered on a wireline. The method then includes the following steps:

- sending an electrical signal down the wireline to detonate charges associated with the first perforating gun, thereby perforating the casing at a first zone;
- pumping a fracturing fluid into the wellbore a first time behind and past the first perforating gun;
- further pumping the fracturing fluid through the perforations in the first zone, thereby creating fractures in a surrounding earth formation along the first zone;

- releasing ball sealers into the wellbore after beginning to pump the fracturing fluid into the wellbore the first time, thereby sealing the perforations in the first zone;
- perforating the casing at a second zone that is above the first zone;
- pumping a fracturing fluid into the wellbore through the perforations in the second zone, thereby creating additional fractures in the surrounding earth formation along the second zone; and
- releasing ball sealers into the wellbore after beginning to pump the fracturing fluid into the wellbore the second time, thereby sealing the perforations in the second zone.

**[0048]** Preferably, the fracturing fluid comprises a proppant such as sand.

**[0049]** In one aspect, perforating the casing at a second zone comprises lowering a second perforating gun into the wellbore on a wireline, and then sending an electrical signal down the wireline to detonate charges associated with the second perforating gun, thereby perforating the casing at the second zone. In another aspect, the first perforating gun comprises at least a first set of charges and a second set of charges. The first perforating zone is perforated using the first set of charges. In this instance, perforating the casing at a second zone comprises pulling the wireline, thereby raising the first perforating gun in the wellbore to the second zone, and then sending an electrical signal down the wireline to detonate the second set of charges, thereby perforating the casing at the second zone. Preferably, select fire perforating guns are employed that allow a string of independent guns to be run into the well on the wireline. Ten to 15 guns may be run on a single trip.

**[0050]** In one embodiment, the method further comprises dropping a ball into the wellbore after perforating the casing at the second zone and removing the wireline, and then applying hydraulic pressure in the wellbore. This causes a fracturing sleeve located in the wellbore in a third zone that is above the second zone to open. The method then includes pumping a fracturing fluid into the wellbore a third time through the fracturing sleeve, thereby creating fractures in the surrounding earth formation along the third zone.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0051]** So that the present inventions can be better understood, certain drawings, charts, graphs and/or flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and are therefore not to be considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0052] Figures 1A through 1F present a series of side views of a lower portion of a wellbore. The wellbore is undergoing a completion procedure that uses perforating guns and ball sealers in stages. This is a known procedure.

[0053] Figure 1A presents a wellbore having been lined with a string of production casing. Annular packers are placed along the wellbore to isolate selected subsurface zones. The zones are identified as “A,” “B” and “C.”

[0054] Figure 1B shows Zone A having been perforated. Further, fractures have been formed in the subsurface formation along Zone A using any known hydraulic fracturing technique.

[0055] Figure 1C shows that a plug has been set adjacent a packer intermediate Zones A and B. Further, a perforating gun is shown forming perforations along Zone B.

[0056] Figure 1D shows that a fracturing fluid being pumped into the wellbore, with artificial fractures being induced in the subsurface formation along Zone B.

[0057] Figure 1E shows that ball sealers have been dropped into the wellbore, thereby sealing perforations along Zone B. Further, a perforating gun is now indicated along Zone C. The casing along Zone C has been perforated.

[0058] Figure 1F shows fracturing fluid being pumped into the wellbore. Artificial fractures have been induced in the subsurface formation along Zone C.

[0059] Figures 2A through 2F present a series of side views of a lower portion of a wellbore. The wellbore is undergoing a completion procedure that uses perforating guns and plugs in stages. This is a known procedure.

[0060] Figure 2A presents a wellbore having been lined with a string of production casing. Annular packers are placed along the wellbore to isolate selected subsurface zones. The zones are identified as “A,” “B” and “C.”

[0061] Figure 2B shows Zone A having been perforated using a perforating gun. A plug has been run into the wellbore with the perforating gun.

[0062] Figure 2C shows that fractures have been formed in the subsurface formation along Zone A using a fracturing fluid. Proppant is seen residing now in an annular region along Zone A.

[0063] Figure 2D shows that a second plug has been set adjacent a packer intermediate Zones B and C. Further, a perforating gun is shown forming perforations along Zone B.

[0064] Figure 2E shows that fracturing fluid being pumped into the wellbore, with artificial fractures being induced in the subsurface formation along Zone B.

[0065] Figure 2F shows that a third plug has been set adjacent a packer intermediate Zones B and C. Further, a perforating gun is shown forming perforations along Zone C.

[0066] Figures 3A through 3F present a series of side views of a lower portion of a wellbore. The wellbore is undergoing a completion procedure that uses perforating guns, fracturing sleeves and dropped balls, in stages. This is a known procedure.

[0067] Figure 3A presents a wellbore having been lined with a string of production casing. Annular packers are placed along the wellbore to isolate selected subsurface zones. The zones are identified as “A,” “B” and “C.”

[0068] Figure 3B shows that a ball has been dropped onto a fracturing sleeve in Zone A.

[0069] Figure 3C shows that hydraulic pressure has been applied to open the fracturing sleeve in Zone A by pumping a fracturing fluid into the wellbore. Further, fractures are being induced in the subsurface formation along Zone A. Proppant is seen residing now in an annular region along Zone A.

[0070] Figure 3D shows that a second ball has been dropped. The ball has landed on a fracturing sleeve in Zone B.

[0071] Figure 3E shows that hydraulic pressure has been applied to open the fracturing sleeve in Zone B by pumping a fracturing fluid into the wellbore. Further, fractures are being induced in the subsurface formation along Zone B. Proppant is seen residing now in an annular region along Zone B.

[0072] Figure 3F shows that a third ball has been dropped. The ball has landed on a fracturing sleeve in Zone C. Zone C is ready for treatment.

[0073] Figures 4A through 4F present a series of side views of a lower portion of a wellbore. The wellbore is undergoing a completion procedure that uses perforating guns and ball sealers in a novel, seamless procedure.

[0074] Figure 4A presents a wellbore having been lined with a string of production casing. Annular packers are placed along the wellbore to isolate selected subsurface zones. The zones are again identified as “A,” “B” and “C.”

[0075] Figure 4B shows Zone A having received a perforating gun. A plug has been run into the wellbore with the perforating gun. Zone A has been perforated.

[0076] Figure 4C shows that fractures are being formed in the subsurface formation along Zone A using a fracturing fluid. Proppant is seen residing now in an annular region along Zone A. Additionally, ball sealers and a perforating gun are being simultaneously run into the wellbore in anticipation of treating Zone B.

[0077] Figure 4D shows that the perforating gun of Figure 4C has been placed along Zone B. Fractures have been formed in Zone B. Simultaneously, a fracturing fluid is being pumped into the wellbore behind the perforating gun.

[0078] Figure 4E shows that the fracturing fluid of Figure 4D is now being pumped through perforations formed in Zone B. Artificial fractures are being induced along Zone B. Simultaneously, ball sealers have been dropped into the wellbore above the fracturing fluid.

[0079] Figure 4F shows fracturing fluid having been pumped through the perforations along Zone B. The ball sealers from Figure 4E are placed along the perforations. Behind the ball sealers, and after removal of the wireline, a ball has been dropped onto a fracturing sleeve along Zone C, with new fracturing fluid being pumped behind the ball.

[0080] Figure 4G shows the fracturing sleeve having been opened. Fracturing fluid is now being pumped through the sleeve to induce artificial fractures along Zone C. Simultaneously, ball sealers have been dropped into the wellbore behind the fracturing fluid.

[0081] Figure 4H shows the ball sealers of Figure 4G having landed on the fracturing sleeve to provide a seal. Additionally, a new fracturing gun is being lowered into the wellbore to form fractures along a zone above Zone C.

[0082] Figure 5 is a schematic view of a portion of a horizontal wellbore. Zones A, B and C are shown along the wellbore, with each zone having ten sub-zones separated by annular packers. The zones, or sets of sub-zones, are separated by fracture sleeves.

[0083] Figures 6A through 6F present a series of side views of a lower portion of a wellbore. The wellbore is undergoing a completion procedure that uses autonomous completion assemblies and ball sealers in a novel seamless procedure.

[0084] Figure 6A presents a wellbore having been lined with a string of production casing. Annular packers are placed along the wellbore to isolate selected subsurface zones. The zones are identified as "A," "B" and "C." An autonomous perforating gun has been dropped into the wellbore.

[0085] Figure 6B shows Zone A having received the autonomous perforating gun. The perforating gun includes a plug as part of a perforating assembly. The plug has been set autonomously adjacent a packer below Zone A.

[0086] Figure 6C shows Zone A having been perforated. The autonomous perforating gun has disintegrated and is no longer visible. Simultaneously, a fracturing fluid is being pumped into the wellbore, with a new autonomous perforating gun being released into the wellbore behind the fracturing fluid.

[0087] Figure 6D shows the fracturing fluid having been pumped through the perforations in Zone A. Artificial fractures have been induced in the subsurface formation along Zone A. Simultaneously, the autonomous perforating gun of Figure 6C has fallen to a location along Zone B.

[0088] Figure 6E shows that ball sealers have landed in the perforations along Zone A. Additionally, the perforating gun of Figure 6D has fired, creating fractures along Zone B. A new fracturing fluid is now being pumped in the wellbore in anticipation of treating Zone B. The perforating gun of Figure 6D has disintegrated.

[0089] Figure 6F shows the fracturing fluid of Figure 6E now being pumped into the perforations along Zone B. Artificial fractures are being formed along Zone B. Simultaneously, a new autonomous fracturing gun has been released into the wellbore in anticipation of creating perforations along Zone C.

[0090] Figure 7 is a side view of an autonomous completion assembly of the present invention, in one embodiment. The completion assembly is used for perforating a zone along a wellbore without being electrically tethered to or receiving wired instructions immediately from the surface..

[0091] Figure 8 schematically illustrates a multi-gated safety system for an autonomous wellbore tool, in one embodiment.

[0092] Figures 9A and 9B are a single flow chart showing steps for a method of perforating multiple zones along a wellbore, in one embodiment. The method uses the autonomous completion assembly of Figure 7 and ball sealers in a seamless manner.

[0093] Figures 10A and 10B are a single flow chart showing steps for a method of perforating multiple zones along a wellbore, in an alternate embodiment. The method uses a perforating gun run into a wellbore on a wireline, and separate ball sealers, in a seamless manner.

## **DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS**

### **Definitions**

[0094] As used herein, the term “hydrocarbon” refers to an organic compound that includes primarily, if not exclusively, the elements hydrogen and carbon. Hydrocarbons may also include other elements, such as, but not limited to, halogens, metallic elements, nitrogen, oxygen, and/or sulfur. Hydrocarbons generally fall into two classes: aliphatic, or straight chain hydrocarbons, and cyclic, or closed ring hydrocarbons, including cyclic terpenes. Examples of hydrocarbon-containing materials include any form of natural gas, oil, coal, and bitumen that can be used as a fuel or upgraded into a fuel.

**[0095]** As used herein, the term “hydrocarbon fluids” refers to a hydrocarbon or mixtures of hydrocarbons that are gases or liquids. For example, hydrocarbon fluids may include a hydrocarbon or mixtures of hydrocarbons that are gases or liquids at formation conditions, at processing conditions or at ambient conditions (15° C to 20° C and 1 atm pressure). Hydrocarbon fluids may include, for example, oil, natural gas, coalbed methane, shale oil, pyrolysis oil, pyrolysis gas, a pyrolysis product of coal, and other hydrocarbons that are in a gaseous or liquid state.

**[0096]** As used herein, the terms “produced fluids” and “production fluids” refer to liquids and/or gases removed from a subsurface formation, including, for example, an organic-rich rock formation. Produced fluids may include both hydrocarbon fluids and non-hydrocarbon fluids. Production fluids may include, but are not limited to, oil, natural gas, pyrolyzed shale oil, synthesis gas, a pyrolysis product of coal, carbon dioxide, hydrogen sulfide and water (including steam).

**[0097]** As used herein, the term “fluid” refers to gases, liquids, and combinations of gases and liquids, as well as to combinations of gases and solids, combinations of liquids and solids, and combinations of gases, liquids, and solids.

**[0098]** As used herein, the term “gas” refers to a fluid that is in its vapor phase at 1 atm and 15° C.

**[0099]** As used herein, the term “oil” refers to a hydrocarbon fluid containing primarily a mixture of condensable hydrocarbons.

**[00100]** As used herein, the term “subsurface” refers to geologic strata occurring below the earth's surface.

**[00101]** As used herein, the term “formation” refers to any definable subsurface region. The formation may contain one or more hydrocarbon-containing layers, one or more non-hydrocarbon containing layers, an overburden, and/or an underburden of any geologic formation.

**[00102]** The terms “zone” or “zone of interest” refers to a portion of a formation containing hydrocarbons. Alternatively, the formation may be a water-bearing interval.

**[00103]** For purposes of the present patent, the term “production casing” includes a liner string or any other tubular body fixed in a wellbore along a zone of interest, which may or may not extend to the surface.

**[00104]** The term “friable” means any material that is easily crumbled, powderized, or broken into very small pieces. The term “friable” includes frangible materials such as ceramic.

[00105] As used herein, the term “wellbore” refers to a hole in the subsurface made by drilling or insertion of a conduit into the subsurface. A wellbore may have a substantially circular cross section, or other cross-sectional shapes. As used herein, the term “well,” when referring to an opening in the formation, may be used interchangeably with the term “wellbore.”

## DESCRIPTION OF SELECTED SPECIFIC EMBODIMENTS

[00106] The inventions are described herein in connection with certain specific embodiments. However, to the extent that the following detailed description is specific to a particular embodiment or a particular use, such is intended to be illustrative only and is not to be construed as limiting the scope of the inventions.

[00107] Wellbore completions in unconventional reservoirs are increasing in length. Whether such wellbores are vertical or horizontal, such wells require the placement of multiple perforation sets and multiple fractures. Known completions, in turn, require the addition of downhole hardware which increases the expense, complexity and risk of such completions.

[00108] Several techniques are known for fracturing multiple zones along an extended wellbore incident to hydrocarbon production operations. One such technique recently developed involves the use of perforating guns and ball sealers run in stages.

[00109] **Figures 1A through 1F** present a series of side views of a lower portion of an extended wellbore **100**. The wellbore **100** is undergoing a completion procedure that uses perforating guns **150** and ball sealers **160** in stages.

[00110] First, **Figure 1A** introduces the wellbore **100**. The wellbore **100** is lined with a string of production casing **120**. The production casing **120** defines a long series of pipe joints that are threadedly coupled, end-to-end. The production casing **120** provides a bore **105** for the transport of fluids into the wellbore **100** and out of the wellbore **100**.

[00111] The production casing **120** resides within a surrounding subsurface formation **110**. Annular packers are placed along the casing **120** to isolate selected subsurface zones. Three illustrative zones are shown in the **Figure 1** series, identified as “**A**,” “**B**” and “**C**.” The packers, in turn, are designated as **115A**, **115B**, **115C** and **115D**, and are generally placed intermediate the zones.

[00112] It is desirable to perforate and fracture the formation along each of **Zones A, B** and **C**. **Figure 1B** shows **Zone A** having been perforated. Perforations **125A** are placed by detonating charges associated with a perforating gun **150**. Further, fractures **128A** have been

formed in the subsurface formation **110** along **Zone A**. The fractures **128A** are formed using any known hydraulic fracturing technique.

[00113] It is observed that in connection with the formation of the fractures **128A**, a hydraulic fluid **145** having a proppant is used. The proppant is typically sand, and is used to keep the fractures **128A** open after hydraulic pressure is released from the formation **110**. It is also observed that after the injection of the hydraulic fluid **145**, a thin annular gravel pack is left in the region formed between the casing **120** and the surrounding formation **110**. This is seen between packers **115A** and **115B**. The gravel pack beneficially supports the surrounding formation **110** and helps keep fines from invading the bore **105**.

[00114] As a next step, **Zone B** is fractured. This is shown in **Figure 1C**. **Figure 1C** shows that a plug **140** has been set adjacent the packer **115B** intermediate **Zones A** and **B**. Further, the perforating gun **150** has been placed along **Zone B**. Additional charges associated with the perforating gun **150** are detonated, producing perforations **125B**.

[00115] Next, **Figure 1D** shows that a fracturing fluid **145** is being pumped into the bore **105**. Artificial fractures **128B** are being formed in the subsurface formation **110** along **Zone B**. In addition, a new perforating gun **150** has been lowered into the wellbore **100** and placed along **Zone C**.

[00116] **Figure 1E** shows a next step in the completion of the multi-zone wellbore **100**. In **Figure 1E**, ball sealers **160** have been dropped into the wellbore and have landed along **Zone B**. The ball sealers **160** seal the perforations **125B** along **Zone B**.

[00117] It is also observed in **Figure 1E** that the perforating gun **150** has been raised in the wellbore **100** up to **Zone C**. Remaining charges associated with the perforating gun **150** are detonated, producing new perforations **125C**. After perforating, a fracturing fluid **145** is pumped into the bore **105** behind the perforating gun **150**.

[00118] Finally, **Figure 1F** shows the fracturing fluid **145** being pumped further into the wellbore **100**. Specifically, the fracturing fluid **145** is pumped through the new perforations **125C** along **Zone C**. Artificial fractures **128C** have been induced in the subsurface formation **120** along **Zone C**.

[00119] Of interest, a new perforating gun **150** is visible in **Figure 1F**. The new perforating gun **150** has been lowered into position along a next zone above **Zone C**.

[00120] The multi-zone completion procedure of **Figures 1A** through **1F** is known as the “Just-In-Time” perforating process. The Just-In-Time perforating process represents a highly efficient method in that a fracturing fluid may be run into the wellbore with a perforating gun in the hole. As soon as the perfs are shot and fractures are formed, ball sealers are dropped.

When the ball sealers seat on the perforations, a gun is shot at the next zone. These steps are repeated until all guns are spent. A new plug **140** is set and the process begins again.

**[00121]** The Just-In-Time perforating process requires low flush volumes and offers the ability to manage screen-outs along the zones. However, it does require that multiple plugs be drilled out in an extended well.

**[00122]** An alternate completion procedure that has been used is the traditional “Plug and Perf” technique. This is illustrated in **Figures 2A** through **2F**. The **Figure 2** drawings present a series of side views of a lower portion of a wellbore **200**. The wellbore **200** is undergoing a completion procedure that uses perforating plugs **240** and guns **250** in stages.

**[00123]** **Figure 2A** presents a wellbore **200** that has been lined with a string of production casing **220**. Annular packers **215A**, **215B**, **215C**, **215D** are placed along the wellbore **200** to isolate selected subsurface zones. The zones are identified as “A,” “B” and “C.”

**[00124]** First, **Figure 2A** introduces the wellbore **200**. The wellbore **200** is identical to the wellbore **100** of **Figure 1A**. The wellbore **200** is lined with a string of production casing **220**. The production casing **220** provides a bore **205** for the transport of fluids into the wellbore **200** and out of the wellbore **200**.

**[00125]** The production casing **220** resides within a surrounding subsurface formation **210**. Annular packers are again placed along the casing **220** to isolate selected subsurface zones, identified as “A,” “B” and “C.” The packers, in turn, are designated as **215A**, **215B**, **215C** and **215D**.

**[00126]** In order to complete the wellbore **200**, **Zones A**, **B** and **C** are each perforated. In **Figure 2B**, a perforating gun **250** has been run into the bore **205**. The gun **250** has been placed along **Zone A**. Perforations **225A** have been formed in the production casing **120** by detonating charges associated with the perforating gun **250**.

**[00127]** Along with the perforating gun **250**, a plug **240A** has been set. In practice, the plug **240A** is typically run into the bore **205** at the lower end of the perforating gun on the wireline **255**. In other words, the plug **240A** and the gun **250** are run into the wellbore **200** together before the charges are detonated.

**[00128]** Next, a fracturing fluid **245** is injected into the newly-formed perforations **225A**. The fracturing fluid **245**, with proppant, is injected under pressure in order to flow through the perforations **225A** and into the formation **210**. In this way, artificial fractures **228A** are formed.

[00129] **Figure 2C** shows that fractures **228A** have been formed in the subsurface formation **210** along **Zone A**. Proppant is now seen residing in an annular region along **Zone A**. Thus, something of a gravel pack is formed.

[00130] In the completion method of the **Figure 2** drawings, the process of perforating and fracturing along **Zone A** is repeated in connection with **Zones B** and **C**. **Figure 2D** shows that a second perforating gun **250** and a second plug **240B** having been run into the wellbore **200**. The gun **250** is placed along **Zone B** while the plug **240B** is set adjacent packer **215B**. Further, charges associated with the perforating gun **250** have been detonated, forming new perforations **225B** along **Zone B**.

[00131] Next, a fracturing fluid **245** is injected into the newly-formed perforations **225B**. The fracturing fluid **245**, with proppant, is injected under pressure in order to flow through the perforations **225B** and into the formation **210**. In this way, and as shown in **Figure 2E**, new artificial fractures **228A** are formed.

[00132] The “Plug and Perf” process is repeated for **Zone C**. **Figure 2F** shows that a third perforating gun **250** has been lowered into the bore **205** adjacent **Zone C**, and a third plug **240C** have been set adjacent a packer intermediate **Zones B** and **C**. Further, the perforating gun **250** is shown forming perforations along **Zone C**. It is understood that fractures (not shown) are then created in the subsurface formation **210** along **Zone C** using a fracturing fluid (also not shown).

[00133] In order to perforate multiple zones, the “Plug and Perf” process requires the use of many separate plugs. Those plugs, in turn, must be drilled out before production operations may commence. Further, the “Plug and Perf” process requires large flush volumes and high cost related to screen-out. At the same time, the process is popular because it enjoys a low hardware risk.

[00134] Yet another completion procedure that has been used involves the placement of multiple fracturing sleeves (or “frac sleeves”) along the production casing. This is known as “Ball and Sleeve” completion. The Ball and Sleeve technique is illustrated in **Figures 3A** through **3F**. The **Figure 3** drawings present a series of side views of a lower portion of a wellbore **300**. The wellbore **300** is undergoing a completion procedure that uses frac sleeves **321** in stages.

[00135] First, **Figure 3A** introduces the wellbore **300**. The wellbore **300** is identical to the wellbore **100** of **Figure 1A**. The wellbore **300** is lined with a string of production casing **320** that provides a bore **305** for the transport of fluids into and out of the wellbore **300**. Annular

packers **315A**, **315B**, **315C**, **315D** are placed along the casing **320** to isolate selected subsurface zones. The zones are identified as “**A**,” “**B**” and “**C**.”

[00136] In the completion processes shown in the **Figure 1** and the **Figure 2** series, each of **Zones A**, **B** and **C** is sequentially perforated. However, in the completion process of the **Figure 3** series, frac sleeves **321A**, **321B**, **321C** are used. The frac sleeves **321A**, **321B**, **321C** are sequentially opened using balls **323A**, **323B**, **323C**.

[00137] Looking now at **Figure 3B**, it can be seen that frac sleeve **321A** has been placed along **Zone A**. A ball **323A** has been dropped into the wellbore **300** and landed onto the frac sleeve **321A**.

[00138] **Figure 3C** shows that hydraulic pressure has been applied to open the fracturing sleeve **321A**. This is done by pumping a fracturing fluid **345** into the bore **305**. As shown in **Figure 3C**, the fracturing fluid **345** flows through the frac sleeve **321A**, into the annular region between the production casing **320** and the surrounding subsurface formation **310**, and into the formation **310** itself. Fractures are being induced in the subsurface formation **310** along **Zone A**. Additionally, proppant is seen now residing in the annular region along **Zone A**.

[00139] In the completion method of the **Figure 3** drawings, the process of opening a sleeve and fracturing along **Zone A** is repeated in connection with **Zones B** and **C**. **Figure 2D** shows that a second ball **323B** has been dropped into the wellbore **300** and landed on a sleeve **321B**. The sleeve **321B** resides along **Zone B**.

[00140] **Figure 3E** shows that hydraulic pressure has been applied to open the fracturing sleeve **321B**. This is done by pumping a fracturing fluid **345** into the wellbore **300**. Fractures are being induced in the subsurface formation **310** along **Zone B**. Proppant is seen residing now in an annular region along **Zone B**.

[00141] The “Ball and Sleeve” process is repeated for **Zone C**. **Figure 3F** shows that a third ball **323C** has been dropped into the bore **305**. The ball **323C** has landed onto the frac sleeve **321C** adjacent **Zone C**. It is understood that fractures (not shown) are then created in the subsurface formation **310** along **Zone C**.

[00142] The use of the sleeves **321A**, **321B**, **321C** as shown in the **Figure** series reduces the flush volumes needed for completion. This, in turn, reduces the environmental impact. At the same time, in order to fracture multiple zones, the “Ball and Sleeve” process requires the use of many separate sleeves. Those of ordinary skill in the art will understand that each successive sleeve moving down the wellbore has a smaller inner diameter for the ball seat.

This requires later drill-out of at least some of the sleeves for completion. Further, the use of multiple sleeves creates a higher hardware risk and a higher risk of screen-out.

**[00143]** It is observed that in some extended wells being completed today, as many as 15 frac sleeves may be employed. As longer completions are designed, up to 30 frac sleeves may be considered. Moving from 15 to 30 frac sleeves more than doubles the risk of failure due to mechanical failure of a ball seat, premature failure of shear pins holding a sleeve, or failure of a ball itself.

**[00144]** Completions that involve multiple plugs also carry a risk. Each plug must be carefully located adjacent a packer. As well length grows, more plugs are used. The Plug and Perf technique (shown in the **Figure 2** series) requires repeated wireline runs for each stage, with each stage representing about 300 feet of net pay. This requires that up to 29 frac plugs be installed for 30 stage treatments for a 10,000 foot horizontal section. Drill out of all of the plugs is cost prohibitive, and in some cases 10 or more plugs may be left in the well.

**[00145]** As the need for “pinpoint stimulation” has gained recognition, the number of stages may increase in the future for a given well length. However, experience with single zone stimulation has shown that as the wellbore is divided into smaller treated segments, the risk of “screen out” increases. This means that the chance of pumping into easily treatable rock decreases. Recovery from screen-out upset for a frac-sleeve-only completion is very costly and usually involves well intervention and removal (i.e., destruction) of the hardware placed in the well during drilling operations.

**[00146]** In addition to the compounding complication of extended-length multi-zone completions, drill out or clean out of the hardware is required after completion. This is because the ever-decreasing sleeve size to the end of the wellbore will not accommodate most logging tools or entry of a 2-3/8” EUE upset tubing working string for cleanout or other activities. Thus, sleeves and seats and other devices must be milled / drilled out. In addition, much of the applied technology reduces the working ID of casing, limiting intervention with coiled or jointed tubing strings.

**[00147]** In addition to these issues, each of the above completion techniques requires multiple “stops” in the operation to “re-tool.” Therefore, it is desirable to modify the procedures presented in the processes of the **Figure 1** series, the **Figure 2** series and the **Figure 3** series to increase the efficiency of multi-zone fracture operations by making the operation more seamless. Further, it is desirable to modify the procedures presented in the processes of the **Figure 1** series, the **Figure 2** series and the **Figure 3** series to both reduce the hardware risk and reduce the time and expense incident to drill-out.

[00148] Two separate methods are presented in response. The first method uses perforating guns that are lowered into the wellbore. The guns are then raised using a wireline for the perforating of multiple zones sequentially. The second method employs a series of autonomous completion assemblies, with each assembly having a perforating gun. Separate assemblies are released into the wellbore sequentially for perforating separate zones. In each method, multiple zones are perforated and fractured without a stopping of wellbore operations.

[00149] The first method is demonstrated in **Figures 4A** through **4F**. The **Figure 4** drawings present a series of side views of a lower portion of a wellbore **400**. The wellbore **400** is undergoing a completion procedure that uses a series of perforating guns **450** and ball sealers **460** in a novel, seamless process.

[00150] First, **Figure 4A** introduces the wellbore **400**. The wellbore **400** is identical to the wellbore **100** of **Figure 1A**. The wellbore **400** is lined with a string of production casing **420**. The production casing **420** provides a bore **405** for the transport of fluids into and out of the wellbore **400**.

[00151] The production casing **420** resides within a surrounding subsurface formation **410**. Annular packers **415A**, **415B**, **415C**, **415D** are again placed along the casing **220** to isolate selected subsurface zones, identified as “**A**,” “**B**” and “**C**.” The packers, in turn, are designated as **415A**, **415B**, **415C** and **415D**.

[00152] In order to complete the wellbore **400**, **Zones A**, **B** and **C** are each perforated. In **Figure 4B**, a perforating gun **450** has been run into the bore **405**. The gun **450** has been placed along **Zone A**. Perforations **425A** have been formed in the production casing **420** by detonating charges associated with the perforating gun **450**.

[00153] The perforating gun **450** may be a select fire gun that fires, for example, 16 shots. The gun **450** has associated charges that detonate in order to cause shots to be fired from the gun **450** into the surrounding production casing **420**. Typically, the perforating gun **420** contains a string of shaped charges distributed along the length of the gun **420** and oriented according to desired specifications. However, in the gun **450**, the charges are not connected to a single detonating cord to ensure simultaneous detonation of all charges; instead, a series of cords, such as four cords, is provided to allow sequential signals. Examples of suitable perforating guns include the Frac Gun™ from Schlumberger, and the G-Force® from Halliburton.

[00154] Along with the perforating gun **450**, a plug **440A** has been set. In practice, the plug **440A** is typically run into the bore **405** at the lower end of the perforating gun **450** on a

wireline **455**. In other words, the plug **440A** and the gun **450** are run into the wellbore **400** together before the charges are detonated.

[00155] Next, a fracturing fluid **445** is injected into the newly-formed perforations **425A**. The fracturing fluid **445**, with proppant, is injected under pressure in order to flow through the perforations **425A** and into the formation **410**. In this way, artificial fractures **428A** are formed.

[00156] **Figure 4C** shows that fractures **428A** have been formed in the subsurface formation **410** along **Zone A**. Proppant is now seen residing in an annular region along **Zone A**. Thus, something of a gravel pack is formed as fracturing fluid **445** is injected.

[00157] Of interest, the multi-zone fracturing of the **Figure 4** series of drawings is seamless. This means that preparations for fracturing a next zone are already under way while a present zone is being fractured. In the view of **Figure 4C**, the perforating gun **450** has been raised up to **Zone B**. Additionally, ball sealers **460** have been dropped into the bore **405**.

[00158] In the completion method of the **Figure 4** drawings, the process of perforating and fracturing along **Zone A** is repeated in connection with **Zones B** and **C**. **Figure 4D** shows that charges associated with the perforating gun **450** have been detonated, forming perforations **425B** along **Zone B**. At the same time, the ball sealers **460** have plugged the perforations **425A** along **Zone A**. For this reason, there is beneficially no need for setting a new plug adjacent packer **415B**.

[00159] Next, fracturing fluid **445** is injected into the newly-formed perforations **425B**. The fracturing fluid **445**, with proppant, is injected under pressure in order to flow through the perforations **425B** and into the formation **410**. In this way, and as shown in **Figure 4E**, new artificial fractures **428A** are formed. At the same time, a new set of ball sealers **460** has been released into the bore **405**.

[00160] It is noted that at some point the charges in the perforating gun **450** will be spent. In one embodiment of the method of the **Figure 4** series, charges are shot until the gun **450** reaches a frac sleeve along the casing **420**. In **Figure 4E**, an illustrative frac sleeve **421C** is shown along **Zone C**. The frac sleeve **421C** is in its closed position.

[00161] **Figure 4F** shows that ball sealers **460** have been placed in the perforations **425B** along **Zone B**. In addition, a ball **423C** has been dropped into the bore **405** and landed on the frac sleeve **421C**. Further, fracturing fluid **445** is being pumped through the perforations along **Zone B**. The fracturing fluid **445** is pumped into the wellbore **400** behind the ball

**423C**, which in turn is dropped behind the ball sealers **460**. In this way, no stoppage of operations occurs.

[00162] It is observed that in a horizontal well, the last sleeve would need to stay open to allow for pump down of the ball **423C**. This is because the well would have no injectivity as all perforations would be covered with ball sealers **460**. It is also noted that in order to drop or pump the ball **423C** down the wellbore **400**, the wireline **455** and perforating gun **450** must be removed from the bore **405**.

[00163] As a next step in the operation, the frac sleeve **421C** is opened. **Figure 4G** shows the fracturing sleeve **421C** having been opened. This is done by pumping a fracturing fluid **445** into the wellbore **400** under pressure. As the sleeve **421C** opens, fracturing fluid **445** flows through the sleeve **421C**, into the annular region between the production casing **420** and the surrounding subsurface formation **410**, and into the formation **410** itself. Fractures **428C** are being induced in the subsurface formation **410** along **Zone C**. Additionally, proppant is seen now residing in the annular region along **Zone C**.

[00164] In accordance with the seamless nature of the operation, ball sealers **460C** have been dropped in the wellbore **400** behind the fracturing fluid **445**. These ball sealers **460C** are dimensioned to plug the frac sleeve **421C** after fractures **428C** have been formed along **Zone C**.

[00165] Moving to the next drawing, **Figure 4H** shows the ball sealers **460C** of **Figure 4G** having landed on the fracturing sleeve **421C**. This seals the fracturing sleeve **421C** from future fluid injections. Additionally, a new fracturing gun **450** is being lowered into the wellbore **400** on a wireline (not shown) to form fractures along a zone above **Zone C**. Thus, multiple additional zones may be perforated and fractured using the same gun **450** until those charges are spent and a next frac sleeve is encountered.

[00166] The multi-zone fracturing process of the **Figure 4** series allows multiple zones along a wellbore to be perforated while using only a few frac sleeves. **Figure 5** is a schematic view of a portion of a wellbore **500**. Here, **Zones 5A, 5B and 5C** are shown along the wellbore **500**. Each of **Zones 5A, 5B and 5C** is separated by a frac sleeve. In the illustrative arrangement of **Figure 5**, the wellbore **500** is completed horizontally, with frac sleeves **540'** and **540''** being shown.

[00167] Each of **Zones 5A, 5B and 5C** illustratively contains about ten sub-zones. Each sub-zone, in turn, is separated by a packer **515**. The sub-zones in **Figure 5** are analogous to **Zones A, B or C** in **Figure 4A**. Likewise, packers **515** are analogous to packers **415A, 415B**

or **415C** of **Figure 4A**, and frac sleeves **540'** and **540''** are analogous to frac sleeve **421C** of **Figure 4A**.

[00168] In the arrangement of **Figure 5**, it is proposed that a single perforating gun **450** would shoot ten sub-zones. The perforating gun **450** would then be pulled from the wellbore **500**, and a ball would be landed on a frac sleeve **540'**. This would allow the operator to perforate, plug and fracture multiple sub-zones without stopping operations.

[00169] It is understood that the number of sub-zones is preferably correlated to the number of zones that can be sequentially shot using a single perforating gun. It is also understood that the operator will have to stop the perforating / sealing / fracturing process momentarily when it is time to change guns and drop the sealing ball on a next frac sleeve, such as sleeve **540'**. The frac sleeves **540''**, **540'** are spaced along the wellbore **500** based on the number of independent perforating guns on the wireline perforating tool.

[00170] The second method mentioned above for fracturing multiple zones along an extended-length wellbore employs a series of autonomous completion assemblies, with each assembly having a perforating gun. Separate assemblies are released into the wellbore sequentially for perforating separate zones.

[00171] **Figures 6A** through **6F** present a series of side views of a lower portion of a wellbore **600**. The wellbore **600** is undergoing a completion procedure that uses autonomous completion assemblies **700** in a novel seamless procedure. Of interest, the completion assemblies **700** each include a perforating gun portion **750** and a canister **720** portion (seen best in **Figure 6D**). The canister **720** holds a plurality of ball sealers **760**. The ball sealers **760** are released from the canister **720** shortly before or simultaneously with charges being detonated by the perforating gun **750**.

[00172] Referring first to **Figure 6A**, **Figure 6A** presents a portion of an extended-length wellbore **600**. The wellbore **600** is identical to the wellbore **100** of **Figure 1A**. The wellbore **600** is lined with a string of production casing **620**. The production casing **620** provides a bore **605** for the transport of fluids into and out of the wellbore **600** during completion operations.

[00173] The production casing **620** resides within a surrounding subsurface formation **610**. Annular packers are again placed along the casing **620** to isolate selected subsurface zones, identified as "A," "B" and "C." The packers are designated as **615A**, **615B**, **615C**, and **615D**.

[00174] In order to complete the wellbore **600**, **Zones A, B** and **C** are each perforated. In **Figure 6B**, a perforating gun **650** has been released into the bore **605** for the purpose of perforating **Zone A**. In one aspect, the perforating gun **650** may be run into the wellbore

using a wireline (not shown). In this arrangement, the wireline **455** and connected perforating gun **450** and plug **440A** of **Figure 4B** may be used. However, it is preferred, as shown in **Figures 6A** and **6B**, that the perforating gun **650** be part of an autonomous assembly **670**.

**[00175]** The autonomous perforating assembly **670** is designed to be released into the wellbore **600** and to be self-actuating. In this respect, the assembly does not require a wireline and need not otherwise be mechanically tethered or electronically connected to equipment external to the wellbore. The delivery method may include gravity, pumping, and tractor delivery.

**[00176]** The autonomous assembly **670** first includes a casing collar locator **632**. The locator **632** measures magnetic flux as the assembly **670** falls through the wellbore **600**. Anomalies in magnetic flux are interpreted as casing collars residing along the length of the casing string **620**. The assembly **670** is aware of its location in the wellbore **600** by counting collars along the casing string **620** as the assembly **670** moves downward through the wellbore **600**.

**[00177]** The assembly **670** also includes a plug body **640**. The plug body **640** defines an elastomeric sealing element. The sealing element is mechanically expanded in response to a shift in a sleeve or other means as is known in the art for mechanically or hydraulically set tools. In one embodiment, the plug body **640** is actuated by squeezing the sealing element using a sleeve or sliding ring; in another aspect, the plug body **640** is actuated by forcing the sealing element outwardly along wedges (not shown).

**[00178]** In the view of **Figure 6A**, the plug body **640** is in its run-in position, indicated as **640'**. However, when actuated the plug body **640** expands into a set position, indicated in **Figure 6B** as **640''**.

**[00179]** The autonomous assembly **670** also includes an on-board controller **634**. The on-board controller **634** is programmed to send at least two signals. A first signal is sent to the plug body **640** when the assembly **670** has reached a selected location along the wellbore **600**. In the case of **Figure 6B**, that location is a depth that is adjacent to the packer **615A**, or that is otherwise somewhere along **Zone A**. A second signal is sent to the perforating gun **650** after the plug **640A** has been set.

**[00180]** It is observed that the autonomous assembly **670** preferably includes a small set of slips **635**. The slips **635** ride outwardly from the assembly **670** along wedges (not shown) spaced radially around the assembly **670**. The slips **635** may be urged outwardly along the wedges in response to a shift in a sleeve or other means as is known in the art. The slips **670**

extend radially to “bite” into the casing **620** when actuated. Examples of existing plugs with suitable slip designs are the Smith Copperhead Drillable Bridge Plug and the Halliburton Fas Drill® Frac Plug. In this manner, the assembly **670** is secured in position. In this instance, the first signal that is sent to the plug **640A** is also used to actuate the slips **635**.

[00181] Applicant has previously caused to be filed a patent application entitled “Autonomous Downhole Conveyance System.” That application published at U.S. Patent Publ. No. 2013/0248174. That application provided details concerning the actuation of slips and an associated plug for an autonomous downhole assembly.

[00182] In **Figure 6A**, the autonomous assembly **670** is shown in its run-in (or pre-actuated) position. In this position, the slips **635'** and the plug **640'** are in their run-in position. The assembly **670** in its pre-actuated position is falling in the wellbore **600** according to arrow “**I**.”

[00183] **Figure 6B** shows the autonomous assembly **670** having reached its destination. The on-board controller **634** has sent a signal causing the slips **635''** and the associated plug **640''** to move into their set (or actuated) position. The slips **635''** and plug **640''** are set along the production casing **620** at a location adjacent packer **615A**.

[00184] **Figure 6C** shows **Zone A** having been perforated. The perforating gun **650** has disintegrated and is no longer visible. Simultaneously, or immediately thereafter, a fracturing fluid **645** is being pumped into the wellbore **600**, with a new autonomous completion assembly **700** being released into the wellbore **600** behind the fracturing fluid **645**. A leading tip **715** of the assembly **700** is visible in **Figure 6C**.

[00185] **Figure 7** is a side view of the autonomous completion assembly **700** of **Figure 6C** (and **Figure 6D**), in one embodiment. The completion assembly **700** is used for perforating a zone along a wellbore without being tethered to or receiving wired instructions from the surface.

[00186] As with the autonomous perforating assembly **670** of **Figure 6B**, the autonomous completion assembly **700** includes a perforating gun **750**. In the arrangement of **Figure 7**, the assembly **700** includes two separate perforating guns, indicated at **750'** and **750''**. This reserves the ability of the assembly to fire separate sets of charges in response to separate activation signals.

[00187] The autonomous assembly **700** defines an elongated body having a leading end **715** and a trailing end **705**. The assembly **700** is preferably fabricated from a material that is

frangible. In this respect, it is designed to disintegrate when charges associated with the perforating guns **750** are detonated.

**[00188]** The assembly **700** also includes a casing collar locator **740**, known in the industry as a “CCL.” The CCL senses the location of the casing collars as it moves down the casing string **620**. While **Figure 7** presents the position locator **740** as a CCL for sensing casing collars, it is understood that other sensing arrangements may be employed in the completion assembly **700**. For example, the position locator may be a radio frequency detector, and the sensed objects may be radio frequency identification tags, or “RFID” devices. In this arrangement, the tags may be placed along the inner diameters of selected casing joints, and the position locator will define an RFID antenna/reader that detects the RFID tags.

**[00189]** The CCL **740** measures magnetic flux as the assembly **700** falls through the wellbore **600**. Anomalies in magnetic flux are interpreted as casing collars residing along the length of the casing string **620**. The assembly **700** is aware of its location in the wellbore **600** by counting collars along the casing string **620** as the assembly **700** moves downward through the wellbore **600**.

**[00190]** The autonomous assembly **700** also includes a canister **720**. The canister **720** is configured to hold a plurality of ball sealers **760**. In one embodiment, the canister **720** additionally holds a treating fluid such as an acid or a resin..

**[00191]** The autonomous assembly **700** also includes an on-board controller **730**. The on-board controller **730** is programmed to send at least two signals. A first signal is sent to the canister **720** when the assembly **670** has reached a selected location along the wellbore **600**. That signal causes the ball sealers **760** to be released. This may be done, for example, by opening a valve. A second signal is sent to the perforating gun **750**.

**[00192]** The autonomous assembly **700** may also include a power supply **735**. The power supply **735** may be, for example, one or more lithium batteries, or battery pack. The power supply **735** will reside in a housing along with the on-board controller **730**. The perforating gun **750**, the location device **740**, the on-board controller **730** and the battery pack **735** are together dimensioned and arranged to be deployed in a wellbore as an autonomous unit.

**[00193]** Referring now to **Figure 6D**, **Figure 6D** shows the fracturing fluid **645** having been pumped through the perforations in **Zone A**. Artificial fractures **628A** have been induced in the subsurface formation **610** along **Zone A**. Simultaneously, the autonomous completion assembly **700** of **Figure 6C** has fallen to a location along **Zone B**. The assembly **700** is in position to fire a new set of perforations, seamlessly.

[00194] It is again observed that the assembly **700** is designed to be frangible. Thus, after the firing step in **Figure 6D**, the assembly **700** will no longer be visible. A new completion assembly will be dropped for **Zone B**.

[00195] **Figure 6E** shows a next step in a multi-zone completion process. Here, the ball sealers **760** from the assembly **700** of **Figure 6D** (that is no longer present) have landed in the perforations **625A** along **Zone A**. Additionally, the perforating gun **700** of **Figure 6D** has fired, creating fractures **625B** along **Zone B**. A new fracturing fluid **645** is now being pumped in the wellbore **600** in anticipation of treating **Zone B**.

[00196] **Figure 6F** shows the fracturing fluid **645** of **Figure 6E** now being pumped into the perforations **625B** along **Zone B**. Artificial fractures **628B** are being formed along **Zone B**. Simultaneously, a new autonomous completion assembly **700** has been released into the wellbore **600** in anticipation of creating perforations along **Zone C**.

[00197] It can be seen that the completion assembly **700** allows for the perforation and fracturing of multiple zones along a wellbore without requiring work stoppage to pull or to change out tools. The completion assembly **700** is autonomous, meaning that it is not electrically controlled from the surface for receiving activation signals.

[00198] The completion assembly **700** is preferably equipped with a special tool-locating algorithm. The algorithm allows the tool to accurately track casing collars en route to a selected location downhole. U.S. Patent Appl. No. 13/989,726 filed on December 27, 2010 discloses a method of actuating a downhole tool in a wellbore, published as U.S. Patent Publ. No. 2013/0255939, entitled "Method for Automatic Control and Positioning of Autonomous Downhole Tools".

[00199] U.S. Patent Publ. No. 2013/0255939 discloses and discusses the tool-locating algorithm. According to that disclosure, the operator will first acquire a CCL data set from the wellbore. This is preferably done using a traditional casing collar locator. The casing collar locator is run into a wellbore on a wireline or electric line to detect magnetic anomalies along the casing string. The CCL data set correlates continuously recorded magnetic signals with measured depth. More specifically, the depths of casing collars may be determined based on the length and speed of the wireline pulling a CCL logging device. In this way, a first CCL log for the wellbore is formed.

[00200] The application also includes selecting a location within the wellbore for actuation of an actuatable tool. In the completion assembly **700**, two separate actuatable tools are provided. These are the canister that releases ball sealers, and the perforating gun that detonates charges.

[00201] In practice, the first CCL log is downloaded into a processor. The processor is part of the on-board controller **730**. The on-board controller **730** processes the depth signals generated by the casing collar locator **740**. In one aspect, the on-board controller **730** compares the generated signals from the position locator **740** with a pre-determined physical signature obtained for wellbore objects from the prior CCL log.

[00202] The on-board controller **730** is programmed to continuously record magnetic signals as the autonomous tool **700** traverses the casing collars. In this way, a second CCL log is formed. The processor, or on-board controller **730**, transforms the recorded magnetic signals of the second CCL log by applying a moving windowed statistical analysis. Further, the processor incrementally compares the transformed second CCL log with the first CCL log during deployment of the downhole tool to correlate values indicative of casing collar locations. This is preferably done through a pattern matching algorithm. The algorithm correlates individual peaks or even groups of peaks representing casing collar locations. In addition, the processor is programmed to recognize the selected location in the wellbore, and then send an activation signal to the actuatable wellbore device or tool when the processor has recognized the selected location.

[00203] In some instances, the operator may have access to a wellbore diagram providing exact information concerning the spacing of downhole markers such as the casing collars. The on-board controller **216** may then be programmed to count the casing collars, thereby determining the location of the tool as it moves downwardly in the wellbore.

[00204] In some instances, the production casing **620** may be pre-designed to have so-called short joints, that is, selected joints that are only, for example, 15 feet, or 20 feet, in length, as opposed to the “standard” length selected by the operator for completing a well, such as 30 feet. In this event, the on-board controller **730** may use the non-uniform spacing provided by the short joints as a means of checking or confirming a location in the wellbore as the completion assembly **700** moves through the casing **620**.

[00205] In one embodiment, the method further comprises transforming the CCL data set for the first CCL log. This also is done by applying a moving windowed statistical analysis. The first CCL log is downloaded into the processor as a first transformed CCL log. In this embodiment, the processor incrementally compares the second transformed CCL log with the first transformed CCL log to correlate values indicative of casing collar locations.

[00206] In one embodiment, the algorithm interacts with an on-board accelerometer. An accelerometer is a device that measures acceleration experienced during a freefall. An accelerometer may include multi-axis capability to detect magnitude and direction of the

acceleration as a vector quantity. When in communication with analytical software, the accelerometer allows the position of an object to be confirmed.

[00207] Additional details for the tool-locating algorithm are disclosed in U.S. Patent Publ. No. 2013/0255939, referenced above.

[00208] It is also desirable with the autonomous completion assembly **700** to include various safety features that prevent the premature actuation or firing of the perforating guns **750'**, **750''**. These are in addition to the locator device **730** and the on-board controller **740** described above. Preferably, each autonomous completion assembly **700** utilizes at least two, and preferably at least three, safety gates or “barriers” that must be satisfied before the perforating gun **750** may be armed.

[00209] **Figure 8** schematically illustrates a multi-gated safety system **800** for an autonomous wellbore tool, in one embodiment. In the safety system **800** of **Figure 8**, five separate gates are provided. The gates are indicated at **810**, **820**, **830**, **840**, and **850**. Each of these illustrative gates **810**, **820**, **830**, **840**, **850** represents a condition that must be satisfied in order for detonation charges **712** to be activated. Stated another way, the gated safety system **800** keeps detonators **716** inactive while the completion assembly **700** and its perforating guns **850'**, **850''** are at the surface or is in transit to a well site.

[00210] Using the gates **810**, **820**, **830**, **840**, **850**, electrical current to detonators **716** is initially shunted to prevent detonation of charges **712** caused by stray currents. In this respect, electrically actuated explosive devices can be susceptible to detonation by stray electrical signals. These may include radio signals, static electricity, or lightning strikes. After the assembly is launched, the gates are removed. This is done by un-shunting the detonator by operating an electrical switch, and by further closing electrical switches one by one until an activation signal may pass through the safety circuit and the detonators **716** are active.

[00211] In **Figure 8**, a perforating gun is seen schematically at **750**. The perforating gun **750** includes a plurality of shaped charges **712**. The charges **712** are distributed along the length of the gun **850**. The charges **712** are ignited in response to an electrical signal delivered from a controller **816** through electrical lines **835** and to the detonators **716**. The lines **835** are bundled into a sheath **814** for delivery to the perforating gun **750** and the detonators **716**. Optionally, the electrical lines (shown at **835**) are pulled from inside the completion assembly **700** as a safety precaution until the assembly **700** is delivered to a well site.

[00212] The detonators **716** receive an electrical current from a firing capacitor **866**. The detonators **716** then deliver heat to the primer cord, which in turn fires the charges **712** to create the perforations. Electrical current to the detonators **716** is initially shunted to prevent detonation from stray currents. In this respect, electrically actuated explosive devices can be susceptible to detonation by stray electrical signals. These may include radio signals, static electricity, or lightning strikes. After the assembly **700** is launched, the gates are removed. This is done by un-shunting the detonators **716** by operating an initial electrical switch (seen at gate **810**), and by further closing electrical switches one by one until an activation signal may pass through the safety circuit **800** and the detonators **716** are active.

[00213] In the arrangement of **Figure 8**, two physical shunt wires **835** are provided. Initially, the wires **835** are connected across the detonators **716**. This connection is external to the perforating gun assembly **700**. Wires **835** are visible from the outside of the assembly **700**. When the assembly **700** is delivered to the well site, the shunt wires **835** are disconnected from one another and are connected to the detonators **716** and to the circuitry making up the safety system **800**.

[00214] In operation, a detonation battery **860** is provided for the perforating gun **750**. At the appropriate time, the detonation battery **860** delivers an electrical charge to a firing capacitor **866**. The firing capacitor **866** then sends a strong electrical signal through one or more electrical lines **835**. The lines **835** terminate at the detonators **716** within the perforating gun **750**. The electrical signal generates resistive heat, which causes a detonation cord (not shown) to burn. The heating rapidly travels to the shaped charges **712** along the perforating gun **750**.

[00215] In order to prevent premature actuation, and as noted above, a series of gates is provided. U.S. Publ. No. 2013/0248174 describes a perforating gun assembly being released from a wellhead. That application was filed on 23 May 2011, and is entitled "Safety System for Autonomous Downhole Tool."

[00216] Without duplicating that full discussion, the gates are generally:

- A first gate **810**, which is an optional pull tab mechanically removed by the crew at the well site;
- A second gate **820**, which is a timed relay switch that shunts the electrical connections to the detonators **716** at all times unless a predetermined time value is exceeded;

- A third gate **830**, which is based upon one or more pressure-sensitive switches;
- A fourth gate **840**, which is an electronics module containing digital logic that determines the location of the gun assembly **700** as it traverses the wellbore by processing magnetic readings to identify probable casing collar locations, and compare those locations with a previously-downloaded (and, optionally algorithmically processed) casing collar log; and
- A fifth gate **850**, which relates to the installation of a battery pack **854**, meaning that the battery pack is not installed to power the controller of the fourth gate **840** until after the completion assembly **700** is at or near the well site. Without the controller, the firing capacitor cannot deliver electrical signals through the wires **835** and the detonators **716** cannot be armed.

[00217] In a related embodiment, the completion assembly **700** may include a button or other user interface that allows an operator to manually “arm” the perforating gun **750**. The user interface is in electrical communication with a timer within the on-board controller **730**. For example, the timer might be 2 minutes. This means that the perforating gun **750** cannot fire for 2 minutes from the time of arming. Here, the operator must remember to manually arm the perforating gun **750** before releasing the assembly into the wellbore **600**.

[00218] Preferably, the safety system **800** is also programmed or designed to de-activate the detonators **716** in the case that detonation does not occur within a specified period of time. For instance, if the detonators **716** have not caused the charges **712** to fire after 55 minutes, the electrical switch representing the second gate **820** is opened, thereby preventing the relay **836** from changing state from shunting the detonators **716** to connecting the detonators **716** to the firing capacitor **866**. This feature enables the safe retrieval of the gun assembly **700** utilizing standard fishing operations. In any instance, a control signal is provided through dashed line **816** for operating the switch of the second gate **820**.

[00219] The electronics module of the fourth gate **840** consists of an onboard memory **842** and built-in logic **844**, together forming the controller. The electronics module provides a digital safety barrier based on logic and predetermined values of various tool events. Such events may include tool depth, tool speed, tool travel time, and downhole markers. Downhole markers may be Casing Collar Locator (CCL) signals caused by collars and pup joints intentionally (or unintentionally) placed in the completion string.

[00220] In the arrangement of **Figure 8**, a signal **818** is sent when the launch switch representing the first gate **810** is closed. The signal **818** informs the controller to begin computing tool depth in accordance with its operational algorithm. The controller includes a

detonator control **842**. At the appropriate depth, the detonator control **842** sends a first signal **844'** to the detonator power supply **860**. In one aspect, the detonator power supply **860** is turned on a predetermined number of minutes, such as three minutes, after the completion assembly **700** is launched.

[00221] It is noted that in an electrically powered perforating gun, a strong electrical charge is needed to ignite the detonators **816**. The power supply (or battery) **860** itself will not deliver that charge; therefore, the power supply **860** is used to charge the firing capacitor **866**. This process typically takes about two minutes. Once the firing capacitor **866** is charged, the current lines **835** may carry the strong charge to the detonators **816**. Line **874** is provided as a power line.

[00222] The controller of the fourth gate **840** also includes a fire control **822**. The fire control **822** is part of the logic. For example, the program or digital logic representing the fourth gate **840** locates the perforating zone by matching a reference casing collar log using real time casing collar information acquired as the tool drops down the well. When the perforating gun assembly **700** reaches the appropriate depth, a firing signal **824** is sent.

[00223] The fire control **822** is connected to a 2-pole Form C fire relay **836**. The fire relay **836** is controlled through a command signal shown at **824**. The fire relay **836** is in a shunting of detonators **716** (or safe) state until activated by the fire control **822**, and until the command path **824** through the second gate **820** is available. In their safe state, the fire relay **836** disconnects the up-stream power supply **860** and shunts down-stream detonators **816**. The relay **836** is activated upon command **824** from the fire control **822**.

[00224] As an alternative to any of gates **810**, **820**, **830** or **850**, a vertical position indicator may be used as a safety check. This means that the on-board controller **730** will not provide a signal to the perforating gun **750** to fire until the vertical position indicator confirms that the completion assembly **700** is oriented in a substantially vertical orientation, e.g., within five degrees of vertical. For example, the vertical position indicator may be a mercury tube that is in electrical communication with the on-board controller. Of course, this safety feature only works where the wellbore **600** is being perforated or the tool **700** is being actuated along a substantially vertical zone of interest. Thus, this type of safety check is not shown in **Figure 8**.

[00225] In yet another alternative, a safety check may be utilized that involves a velocity calculation. In this instance, the perforating gun assembly **700** may include a second locator device spaced some distance below the original locator device. As the assembly **700** travels

across casing collars, signals generated by the second and the original locator devices are timed. The velocity of the assembly is determined by the following equation:

$$D / (T_2 - T_0)$$

Where:  $T_0$  = Time stamp of the detected signal from the original locator device;

$T_2$  = Time stamp of the detected signal from a second locator device;

and

$D$  = Distance between the original and second locator devices.

[00226] Use of such a velocity calculation ensures both a depth and the present movement of the perforating gun assembly before the firing sequence can be initiated.

[00227] In operation, the battery pack (Gate 5) is installed into the perforating gun **750**. The gun **750** is then released into the wellbore. The ring removal (Gate 1) triggers a pressure-activated switch (Gate 2) rated to remove the detonator shunt at a predetermined pressure value. In addition, the ring removal (Gate 1) activates a timed relay switch (Gate 3) that removes another detonator shunt once the pre-set time expires. At this point, the detonators **716** are ready to fire and await the activation signal from the control system (the Gate 4 electronics module). The electronics module monitors the depth of the gun assembly **700**. After the completion assembly **700** has traveled to a pre-programmed depth, the electronics logic (Gate 4) sends a signal that closes a mechanical relay and initiates detonation.

[00228] Additional features of the circuit **800** for the multi-gated safety system are disclosed in the referenced U.S. Patent Publ. No. 2013/0248174.

[00229] **Figures 9A and 9B** represent a flow chart showing steps for a method **900** of perforating multiple zones along a wellbore, in one embodiment. The method **900** uses the autonomous completion assembly **700** of **Figure 7** for multi-zone fracturing in a seamless manner.

[00230] The method **900** first includes releasing a first completion assembly into the wellbore. This is shown at Box **910**. The first completion assembly is designed in accordance with the completion assembly for autonomously perforating a section of casing as described above, in its various embodiments. In this respect, the assembly includes a perforating gun, a canister containing a plurality of ball sealers, a casing collar locator, and an on-board controller. A battery pack may be included to power the on-board controller. The

perforating gun, the canister, the locator, and the on-board controller are together dimensioned and arranged to be deployed in the wellbore as a first autonomous unit.

**[00231]** The method **900** also includes pumping a fracturing fluid into the wellbore. This is provided at Box **915**. The fluid is pumped behind the first completion assembly.

**[00232]** The method **900** next includes detonating charges associated with the perforating gun of the first completion assembly. This is shown at Box **920**. The charges detonate in response to an actuation signal from the on-board controller when the locator has recognized a selected location of the completion assembly. More specifically, the signal causes a “cap” to be fired, which ignites (or heats) a primer cord, which in turn fires the perforating gun. In this way, the casing is perforated at the selected location as a second zone.

**[00233]** The method **900** additionally includes releasing a plurality of ball sealers from the canister. This is indicated at Box **925**. The ball sealers are also released in response to an actuation signal sent by the on-board controller when the locator has recognized a selected location of the completion assembly. Preferably, firing of the perforating guns is accompanied by a complete fragmentation of the completion assembly, causing the ball sealers to be released. The charge is designed to fragment the entire tool assembly into the smallest pieces possible. The ball sealers fall down the wellbore and then seal perforations existing in a first zone below the selected location.

**[00234]** In one aspect, releasing the ball sealers of Box **920** also causes a fluid to be released. The fluid may be an acid such as hydrochloric or fluoric acid. Alternatively, the acid may be a pre-cursor. Alternatively still, the fluid may be a diverter such as a polymer.

**[00235]** In another aspect, a fluid container is provided in the completion assembly. The fluid container comprises a valve having at least one port. The valve is configured to open the at least one port in response to a signal sent from the on-board controller. Alternatively, the fluid is released when the assembly is fragmented.

**[00236]** The method **900** also includes further pumping the fracturing fluid through the perforations in the second zone. This is provided at Box **930**. The fracturing fluid is pumped under pressure in order to creating artificial fractures in a surrounding formation. Preferably, the fracturing fluid comprises a proppant such as sand.

**[00237]** In one embodiment of the method **900**, the method **900** further comprises placing a plug in the wellbore below the first zone. This is given at Box **935**. The plug is placed before fracturing fluid is pumped in the step of Box **915**. Placing the plug in the step of Box **935** preferably includes actuating a set of slips associated with the plug.

**[00238]** In one aspect, the plug comprises a plug body having an expandable sealing element that is part of an autonomous perforating gun assembly. The autonomous perforating gun assembly has an on-board controller configured to (i) send a first actuation signal that causes the sealing element to expand when the locator has recognized the first selected location of the completion assembly, and (ii) send a second actuation signal to the perforating gun to cause detonators to fire after the plug body has seated, thereby perforating the casing along the first zone.

**[00239]** In another aspect, the expanded sealing element lands on a baffle along the wellbore at or below the first zone. Alternatively, the autonomous perforating gun assembly includes a set of slips that is actuated in response to the first signal.

**[00240]** In one embodiment, the method **900** also includes the steps of:

- releasing a second completion assembly into the wellbore (shown at Box **940**);
- pumping a fracturing fluid into the wellbore behind the second completion assembly (shown at Box **945**);
- detonating charges associated with the second perforating gun along a third zone above the second zone, thereby perforating the casing along the third zone (shown at Box **950**);
- releasing ball sealers from the second completion assembly to seal perforations along the second zone (shown at Box **955**); and
- further pumping the fracturing fluid through the perforations in the third zone, thereby creating additional fractures in a surrounding formation (shown at Box **960**).

**[00241]** In this instance, the second completion assembly also includes a perforating gun, a canister containing a plurality of ball sealers that are dimensioned to seal perforations, a casing collar locator for sensing the location of the perforating gun within the wellbore based on the spacing of casing collars along the wellbore, and an on-board controller. Here, the on-board computer is configured to send an actuation signal to operatively fire the perforating gun when the locator has recognized a selected location of the completion assembly (Box **950**), thereby perforating the casing at a third zone above the second zone. The actuation signal may also cause the canister to release the ball sealers, wherein the ball sealers then seal perforations existing in the second zone (Box **955**).

**[00242]** It is preferred that the casing collar locator and the on-board controller operate with software in accordance with the locating algorithm discussed above. Specifically, the

algorithm preferably employs a windowed statistical analysis for interpreting and converting magnetic signals generated by the casing collar locator. In one aspect, the on-board controller compares the generated signals with a pre-determined physical signature obtained for the wellbore objects. For example, a CCL log may be run before deploying the autonomous tool in order to determine the spacing of the casing collars. The corresponding depths of the casing collars may be determined based on the speed of the wireline that pulled the CCL logging device.

**[00243]** Preferably, the fracturing fluid begins to be pumped into the wellbore before the first actuation signal is sent to the canister of the second completion assembly. Preferably, the canister of each of the first and second completion assemblies is fabricated from a friable material such as ceramic. The canisters are then designed to self-destruct in response to the second actuation signal sent to the respective perforating guns. Alternatively, the canisters are designed to self-destruct in response to the first actuation signals such that destruction of the respective canisters causes the release of the respective ball sealers.

**[00244]** In one arrangement, the signal that releases the ball sealers involves opening a valve. Optionally, the canister holds a fluid such that opening the valve also releases the fluid before or simultaneously with detonating the charges.

**[00245]** In another arrangement, a packer resides between the first zone and the second zone. This serves to seal an annular region between the casing and a surrounding earth formation. The process of pumping proppant through the perforations formed in the various zone creates a sand pack in the annular region.

**[00246]** Finally, it is noted that the steps of Boxes **910** through **930**, or the steps of Boxes **940** through **960**, may be repeated to perforate and fracture a fourth zone above the third zone.

**[00247]** **Figures 10A** and **10B** represent a flow chart showing steps for a method **1000** of perforating multiple zones along a wellbore, in an alternate embodiment. The method **1000** uses a perforating gun run into a wellbore on a wireline, and separate ball sealers for multi-zone fracturing in a seamless manner.

**[00248]** The method **1000** first includes lowering a first perforating gun into the wellbore. This is shown in Box **1010**. The gun is lowered on a wireline.

**[00249]** The method **1000** next includes sending an electrical signal down the wireline to detonate charges associated with the first perforating gun. This is provided in **Box 1015**. The result is that perforations are formed in the casing along a first zone.

[00250] The method **1000** also includes pumping a fracturing fluid into the wellbore a first time. This is seen at Box **1020**. The fluid is pumped behind the first perforating assembly. Preferably, the fracturing fluid comprises a proppant such as sand.

[00251] The method **1000** then includes further pumping the fracturing fluid through the perforations in the first zone. This is indicated at Box **1025**. Pumping the fracturing fluid under pressure causes artificial fractures to form in a surrounding earth formation along the first zone.

[00252] The method **1000** additionally includes spooling the wireline in order to raise the first perforating gun up to a second zone. This is seen at Box **1030**. The second zone resides above the first zone.

[00253] The method **1000** also includes releasing ball sealers into the wellbore. This is provided at Box **1035**. The releasing step of Box **1035** is conducted after beginning to pump the fracturing fluid into the wellbore the first time. The result is that perforations in the first zone are sealed by the ball sealers.

[00254] The method **1000** then includes perforating the casing at a second zone that is above the first zone. This is shown at Box **1040**. Perforating the casing is done by sending an electrical signal down the wireline to detonate charges associated with the first perforating gun.

[00255] In one embodiment of the method **1000**, the method **1000** further comprises placing a plug in the wellbore below the first zone. This is given at Box **1045**. The plug may be attached to the first perforating gun and is placed before the first perforating gun is fired (per Box **1025**).

[00256] The method **1000** next provides pumping a fracturing fluid into the wellbore a second time. This is seen at Box **1050** in **Figure 10B**. The fluid is pumped into the wellbore behind the first perforating gun. Preferably, the fracturing fluid comprises a proppant such as sand.

[00257] The method **1000** then comprises further pumping the fracturing fluid into the wellbore through the perforations in the second zone. This is provided at Box **1055**. Pumping the fracturing fluid in under pressure creates additional fractures in the surrounding earth formation along the second zone.

[00258] The method **1000** also provides releasing ball sealers into the wellbore. This indicated at Box **1065**. The releasing step of Box **1065** is conducted after beginning to pump the fracturing fluid into the wellbore the second time. The ball sealers are dimensioned to seal the perforations in the second zone.

[00259] In **Figure 10B**, it can be seen that the step of **Box 1060** provides for lowering a second perforating gun into the wellbore on a wireline. The method **1000** then includes sending an electrical signal down the wireline to detonate charges associated with the second perforating gun. This is shown in **Box 1070**. In this way, perforations are created in the casing at the second zone. This perforating step **1070** uses the second of a series of guns on the string in a procedure known as select-fire perforating.

[00260] It is observed that the steps of **Boxes 1010** through **1040** may be repeated here in order to perforate and fracture additional zones above the second zone using the same perforating gun in a seamless manner. However, it is understood that the charges of the first perforating gun will be spent after two or three or even ten cycles. In the illustrative flow chart of **Figures 10A** and **10B**, it is assumed that the perforating gun that has been lowered into the wellbore in the step of **Box 1010** has actually already perforated multiple zones below the first zone. In any event, it is eventually necessary for the operator to pull the wireline and the first perforating gun from the wellbore. This is shown at **Box 1075**.

[00261] After the wireline and the first perforating gun are removed, a ball is dropped into the wellbore. This is given at **Box 1080**. The method **1000** then includes applying hydraulic pressure in the wellbore. This is shown at **Box 1085**. The application of hydraulic pressure causes a fracturing sleeve located in the wellbore in a third zone that is above the second zone to slide into its open position.

[00262] Once the frac sleeve is opened, the method **1000** includes pumping a fracturing fluid into the wellbore a third time through the fracturing sleeve. This is shown at **Box 1090**. Preferably, the steps of **Boxes 1085** and **1090** are the same actions. In any event, the hydraulic pressure also creates fractures in the surrounding earth formation along the third zone.

[00263] The steps of **Boxes 1010** through **1025** may be repeated to perforate and fracture additional zones above the third zone. This is indicated at **Box 1095**.

[00264] While it will be apparent that the inventions herein described are well calculated to achieve the benefits and advantages set forth above, it will be appreciated that the inventions are susceptible to modification, variation and change without departing from the spirit thereof.

## CLAIMS:

1. An elongated completion assembly for autonomously perforating a section of casing in a wellbore, comprising:
  - a perforating gun;
  - a canister containing a plurality of ball sealers that are dimensioned to seal perforations;
  - a casing collar locator for sensing the location of the perforating gun within the wellbore based on the spacing of casing collars along the wellbore; and
  - an on-board controller configured to send a first actuation signal to the perforating gun to cause one or more detonators to fire when the locator has recognized a selected location of the completion assembly along the wellbore, thereby perforating the casing at a second zone, and to release the ball sealers from the canister for sealing perforations at a first zone below the second zone;wherein the perforating gun, the canister, the locator, and the on-board controller are together dimensioned and arranged to be deployed in the wellbore as an autonomous unit,
  - wherein the canister is a fluid container, and
  - wherein the actuation signal further causes a fluid to be released from the fluid container along with the ball sealers.
2. The completion assembly of claim 1, wherein:
  - the canister is fabricated from a friable material; and
  - the ball sealers are released in response to fragmentation of the canister.
3. The completion assembly of claim 1 or 2, wherein:
  - the completion assembly is designed to self-destruct in response to the first actuation signal sent to the perforating gun, or in response to a separate second actuation signal.

4. The completion assembly of any one of claims 1 to 3, wherein:
  - the casing collar locator comprises a pair of sensing devices spaced apart along the delivery assembly as lower and upper sensing devices;
  - the controller comprises a clock that determines time that elapses between sensing by the lower sensing device and sensing by the upper sensing device as the delivery assembly traverses across a casing collar; and
  - the delivery assembly is programmed to determine delivery assembly velocity at a given time based on the distance between the lower and upper sensing devices, divided by the elapsed time between sensing.
5. The completion assembly of claim 4, wherein a position of the completion assembly at the selected location along the wellbore is confirmed by a combination of (i) location of the delivery assembly relative to the collars as sensed by either the lower or the upper sensing device, and (ii) velocity of the delivery assembly as computed by the controller as a function of time.
6. The completion assembly of any one of claims 1 to 5, further comprising:
  - a battery pack; and
  - a multi-gate safety system for preventing premature activation of the perforating gun, the safety system comprising control circuitry having one or more electrical switches that are independently operated in response to separate conditions before permitting the actuation signal to reach the tool.
7. The completion assembly of any one of claims 1 to 6, wherein the ball sealers are fabricated from a dissolvable material.
8. The completion assembly of any one of claims 1 to 7, wherein the fluid comprises an acid or a polymer.

9. The completion assembly of any one of claims 1 to 8, wherein:  
the fluid container comprises a valve having at least one port, with the valve being configured to open the at least one port in response to the actuation signal sent from the on-board controller.
10. The completion assembly of any one of claims 1 to 9, further comprising:  
a battery pack; and  
a multi-gate safety system electrically engaged with the on-board controller for preventing premature activation of the perforating gun, the safety system comprising control circuitry having one or more electrical switches that are independently operated in response to separate conditions before permitting the actuation signal to reach the tool.
11. The completion assembly according to any one of claims 1 to 9, used in a method for perforating multiple zones along a wellbore, the wellbore having been completed with one or more strings of casing, comprising:  
releasing a first completion assembly into the wellbore, the first completion assembly comprising:  
a perforating gun;  
a canister containing a plurality of ball sealers that are dimensioned to seal perforations;  
a casing collar locator for sensing the location of the perforating gun within the wellbore based on the spacing of casing collars along the wellbore; and  
an on-board controller configured to send a first actuation signal to the perforating gun to cause one or more detonators to fire when the locator has recognized a first selected location of the completion assembly along the wellbore, thereby perforating the casing at a second zone, and to release ball sealers from the canister; and  
wherein the perforating gun, the canister, the locator, and the on-board controller are together dimensioned and arranged to be deployed in the wellbore as a first autonomous unit;

pumping a fracturing fluid into the wellbore behind the first completion assembly;  
sealing perforations in a first zone below the second zone using the ball sealers released from the first completion assembly; and

further pumping the fracturing fluid through the perforations in the second zone, thereby creating fractures in a surrounding formation.

12. The method of claim 11, further comprising:

releasing a second completion assembly into the wellbore after releasing the first completion assembly, the second completion assembly also comprising:

a perforating gun;

a canister containing a plurality of ball sealers that are dimensioned to seal perforations;

a casing collar locator for sensing the location of the perforating gun within the wellbore based on the spacing of casing collars along the wellbore; and

an on-board controller configured to send a first actuation signal to the perforating gun to cause one or more detonators to fire when the locator has recognized a second selected location of the completion assembly along the wellbore, thereby perforating the casing at a third zone above the second zone, and to release ball sealers from the canister; and

wherein the perforating gun, the canister, the locator, and the on-board controller of the second completion assembly are together dimensioned and arranged to be deployed in the wellbore as an autonomous unit;

pumping a fracturing fluid into the wellbore behind the second completion assembly;  
sealing perforations in the second using the ball sealers released from the second completion assembly; and

further pumping the fracturing fluid through the perforations in the third zone, thereby creating additional fractures in a surrounding formation.

13. The method of claim 12, wherein:

the second completion assembly is fabricated from a friable material; and

the ball sealers of the second completion assembly are released in response to fragmentation of the canister.

14. The method of claim 12 or 13, wherein the fracturing fluid comprises a proppant.

15. The method of any one of claims 11 to 14, wherein:

the first completion assembly is designed to self-destruct in response to the first actuation signal sent to the perforating gun of the first completion assembly, or in response to a separate second actuation signal; and

the fracturing fluid begins to be pumped into the wellbore behind the first completion assembly before the first actuation signal is sent.

16. The method of any one of claims 12 to 15, wherein:

the second completion assembly is designed to self-destruct in response to the first actuation signal sent to the perforating gun of the second completion assembly, or in response to a separate second actuation signal.

17. The method of any one of claims 12 to 16, wherein the fracturing fluid begins to be pumped into the wellbore behind the second completion assembly before the first actuation signal is sent to the canister of the second completion assembly.

18. The method of any one of claims 11 to 17, further comprising:

placing a plug in the wellbore adjacent to or below the first zone before releasing the first completion assembly;

and wherein:

the plug comprises a plug body having an expandable sealing element that is part of an autonomous perforating gun assembly; and

the autonomous perforating gun assembly further comprises a perforating gun, a casing collar locator, and an on-board controller configured to:

(i) send a first actuation signal that causes the sealing element to expand when the locator has recognized the first selected location of the completion assembly, and

(ii) send a second actuation signal to the perforating gun to cause detonators to fire after the plug body has seated, thereby perforating the casing along the first zone.

19. The method of any one of claims 11 to 18, wherein:

the fracturing fluid comprises a proppant having sand;

a packer resides between the first zone and the second zone, thereby sealing an annular region between the casing and a surrounding earth formation; and

the process of pumping proppant through the perforations formed in the first zone creates a sand pack in the annular region.

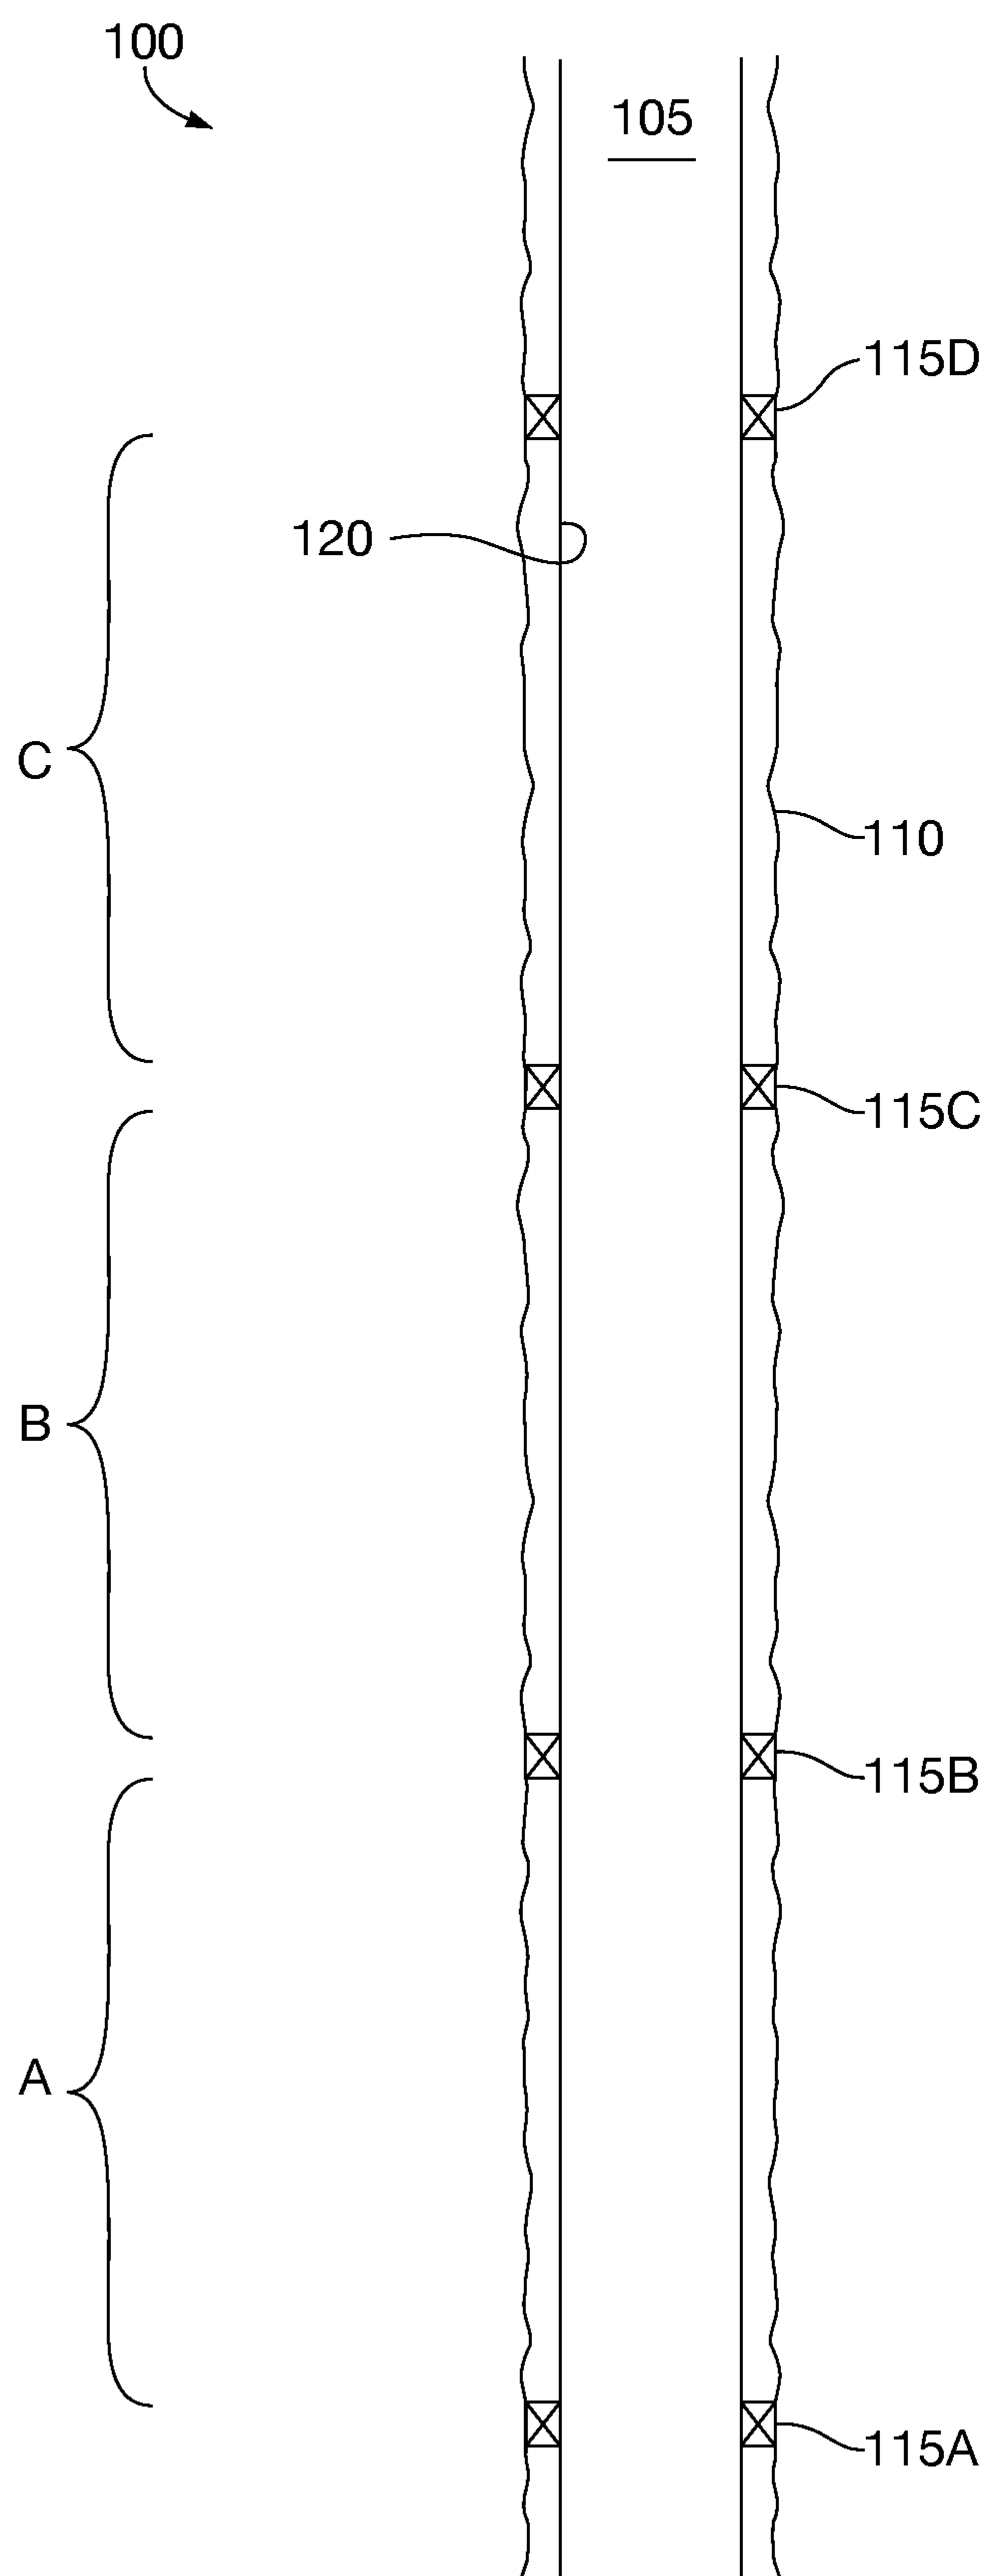


FIG. 1A

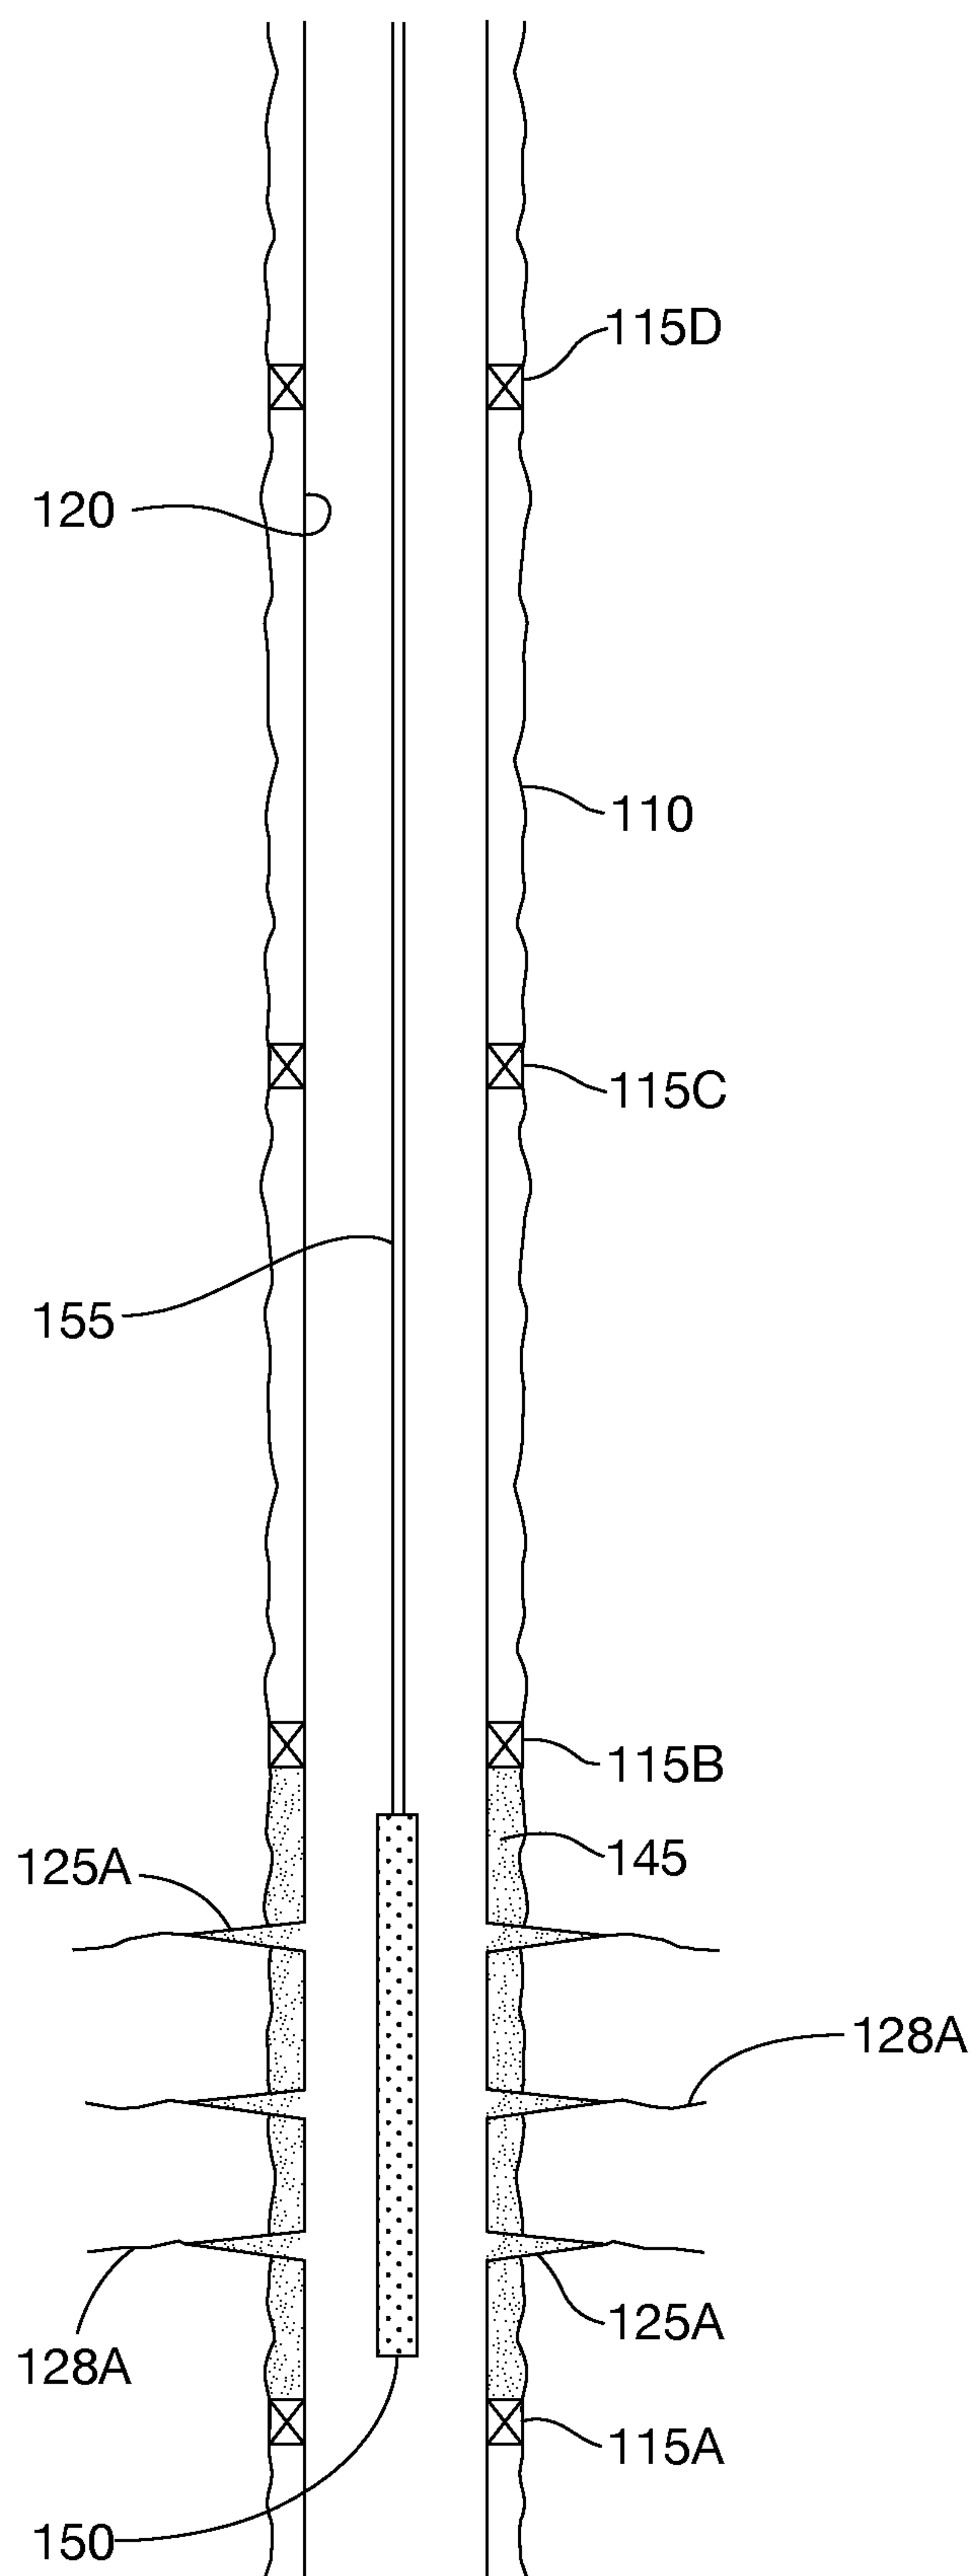


FIG. 1B

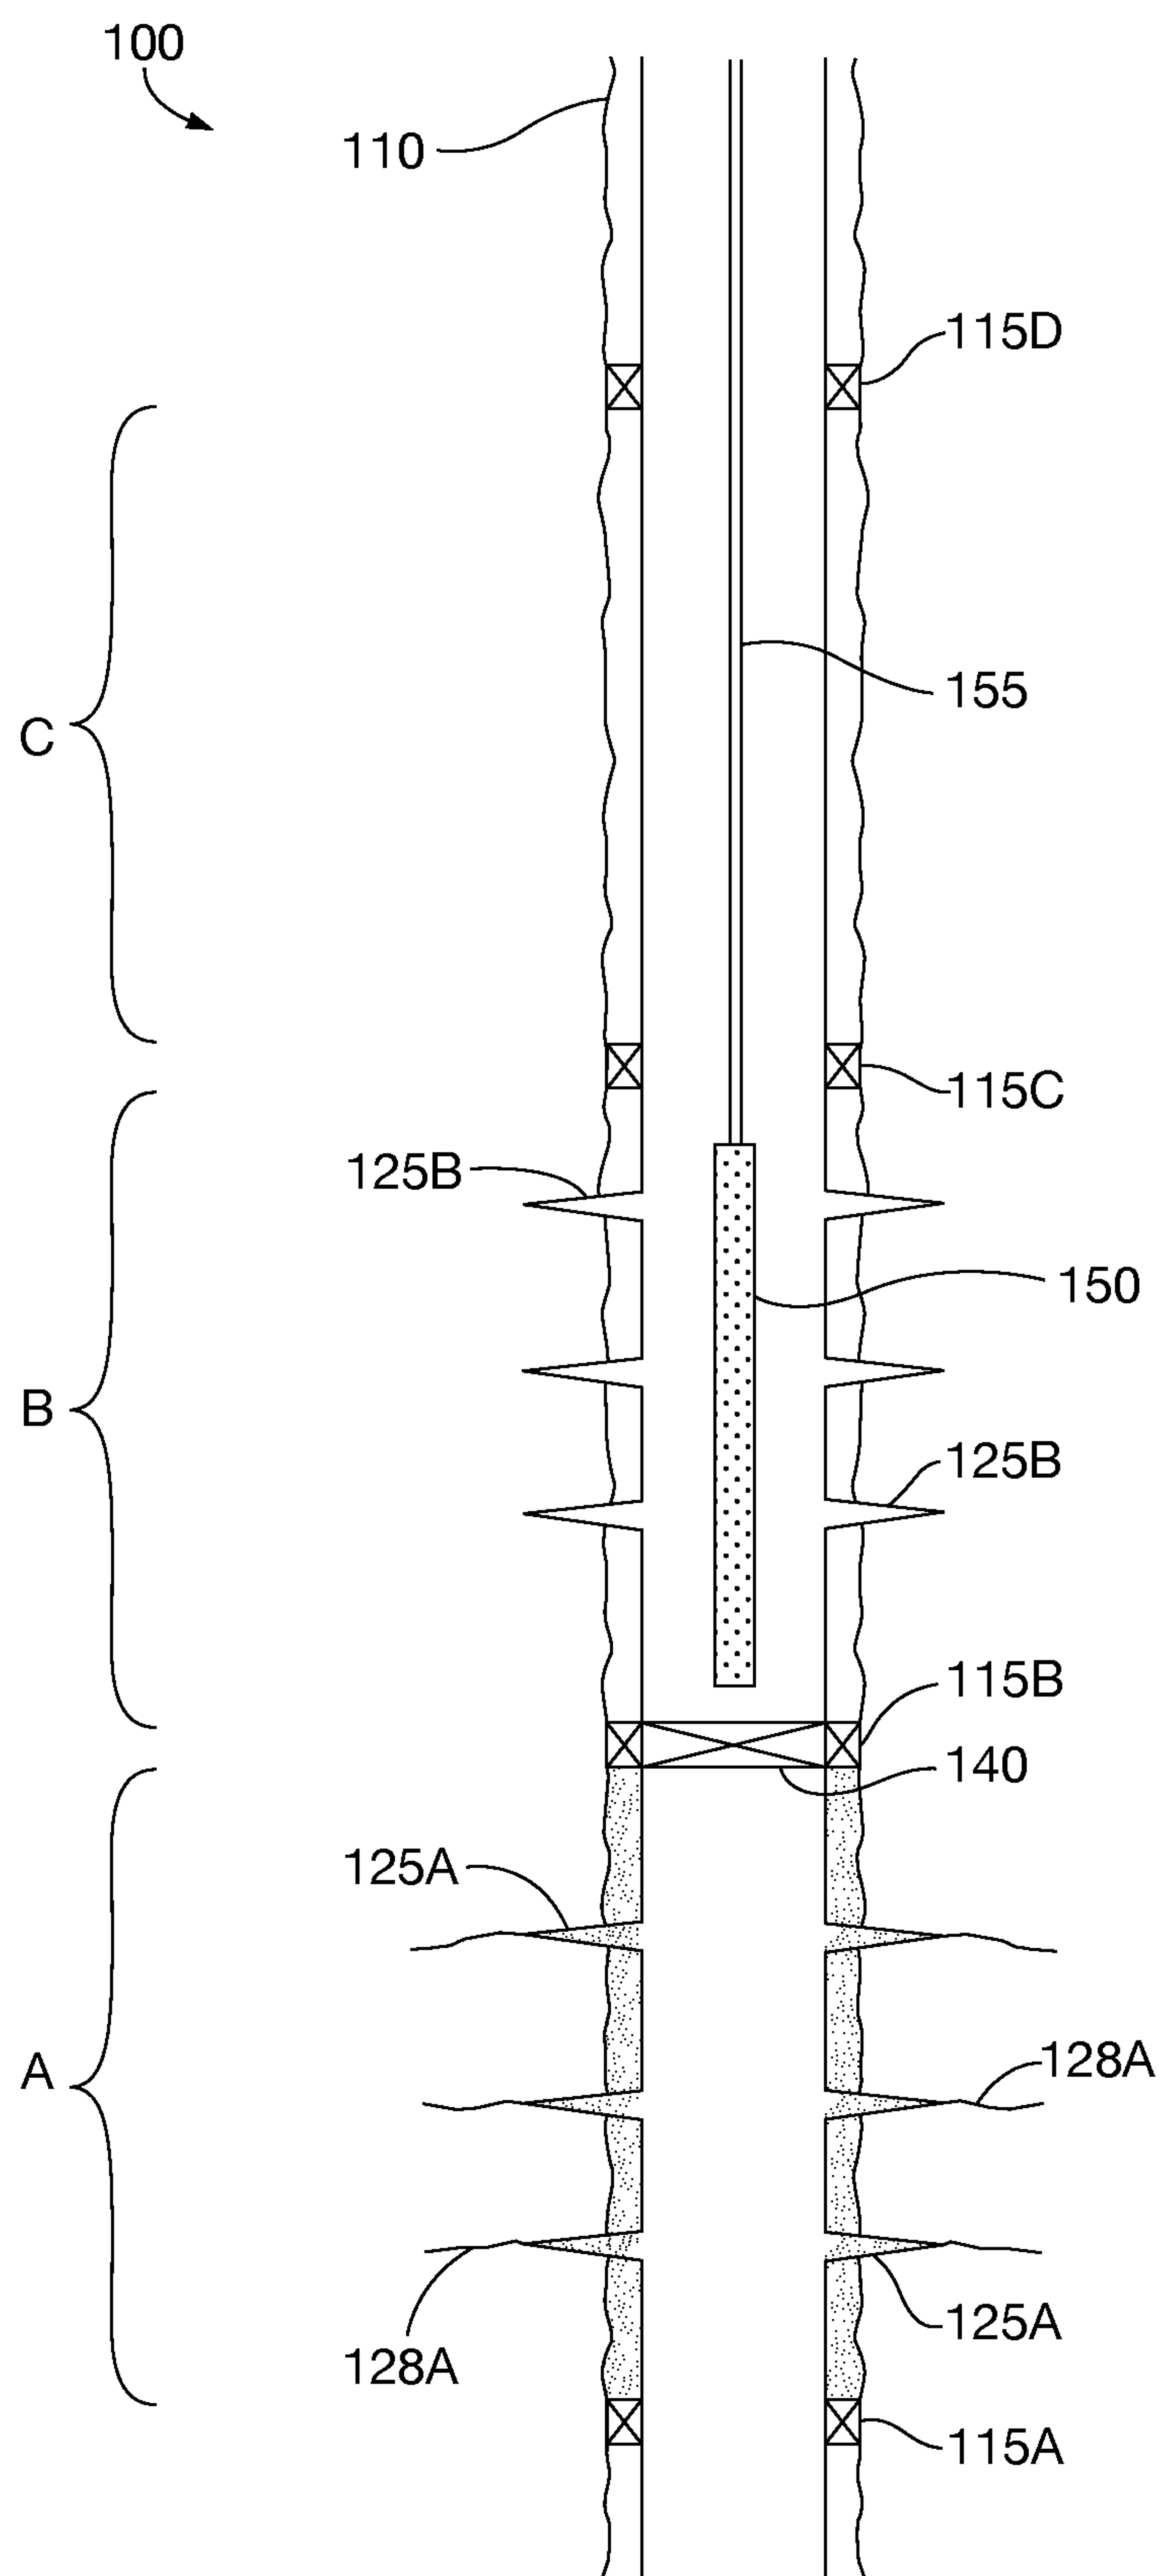


FIG. 1C

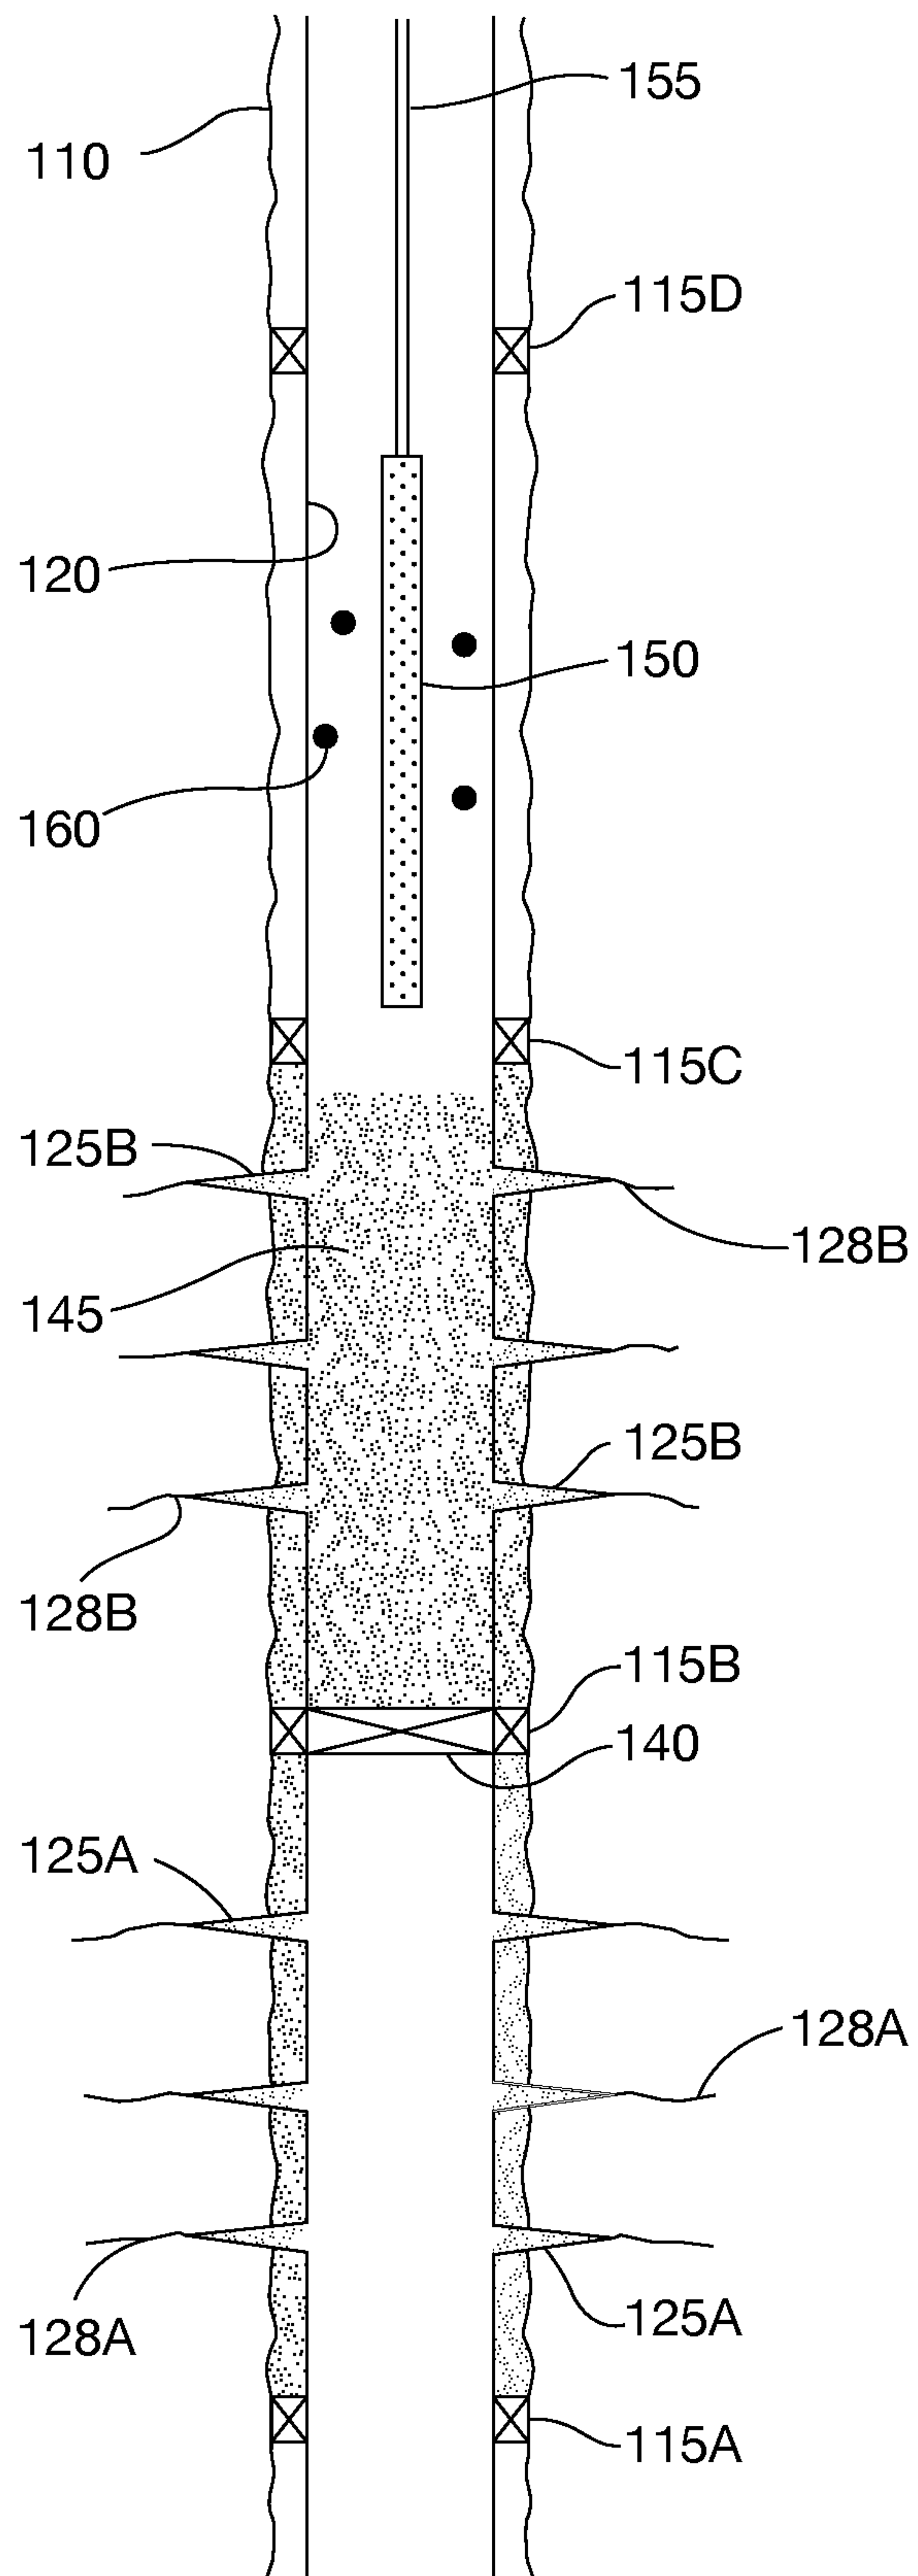


FIG. 1D

3/23

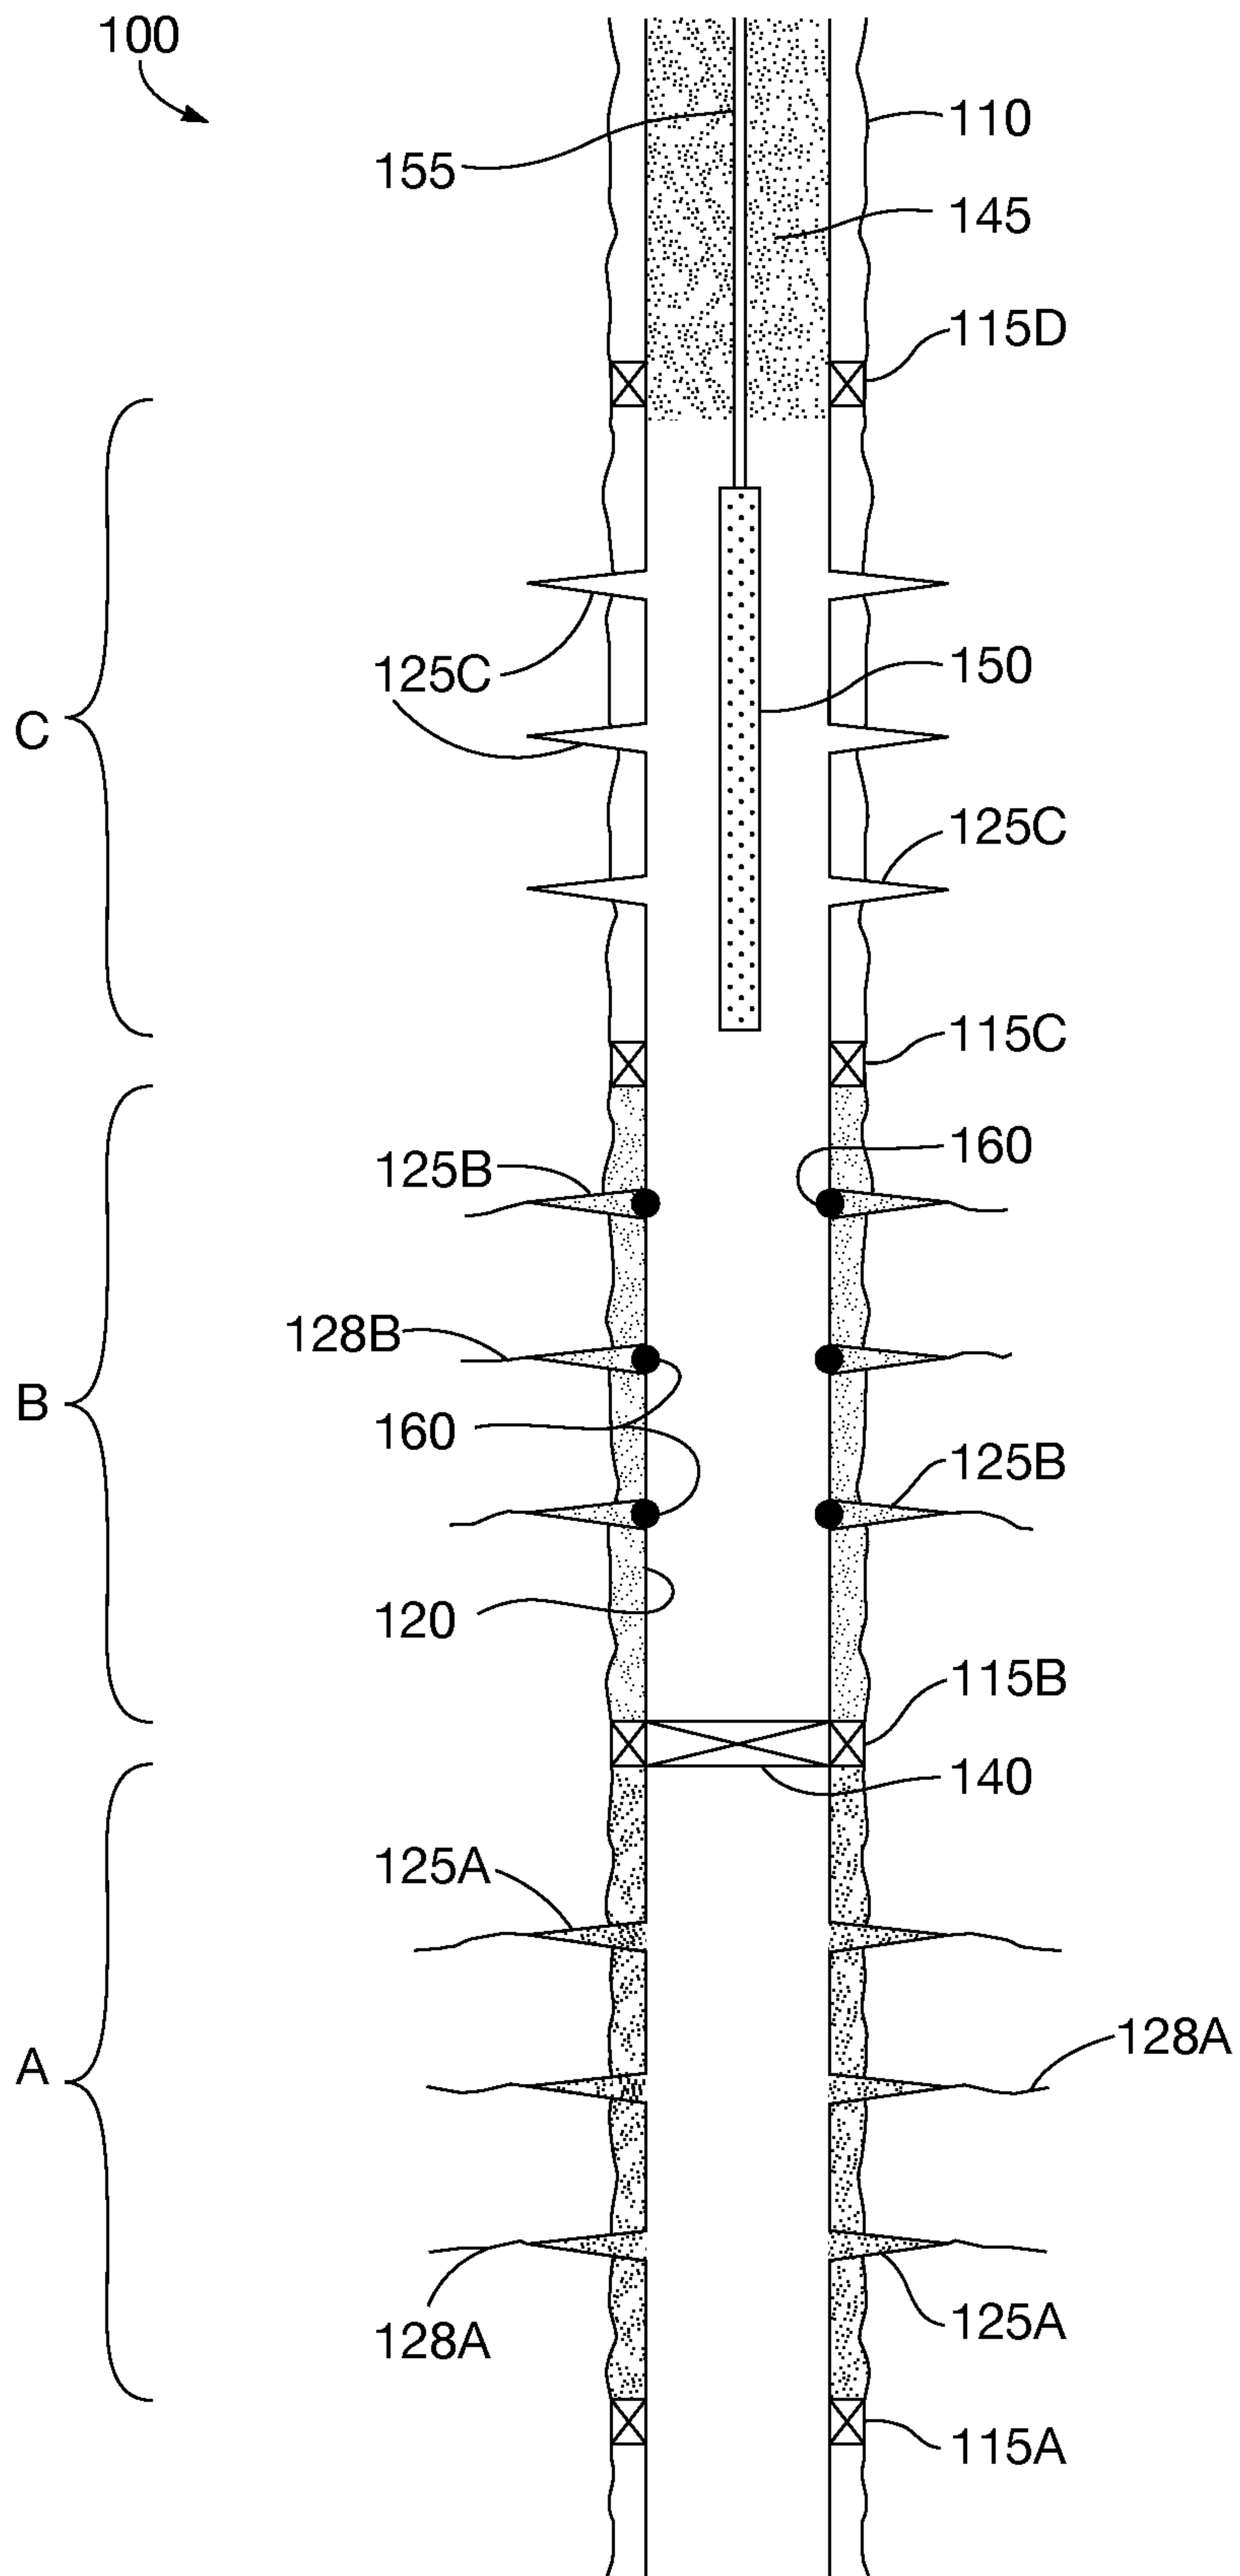


FIG. 1E

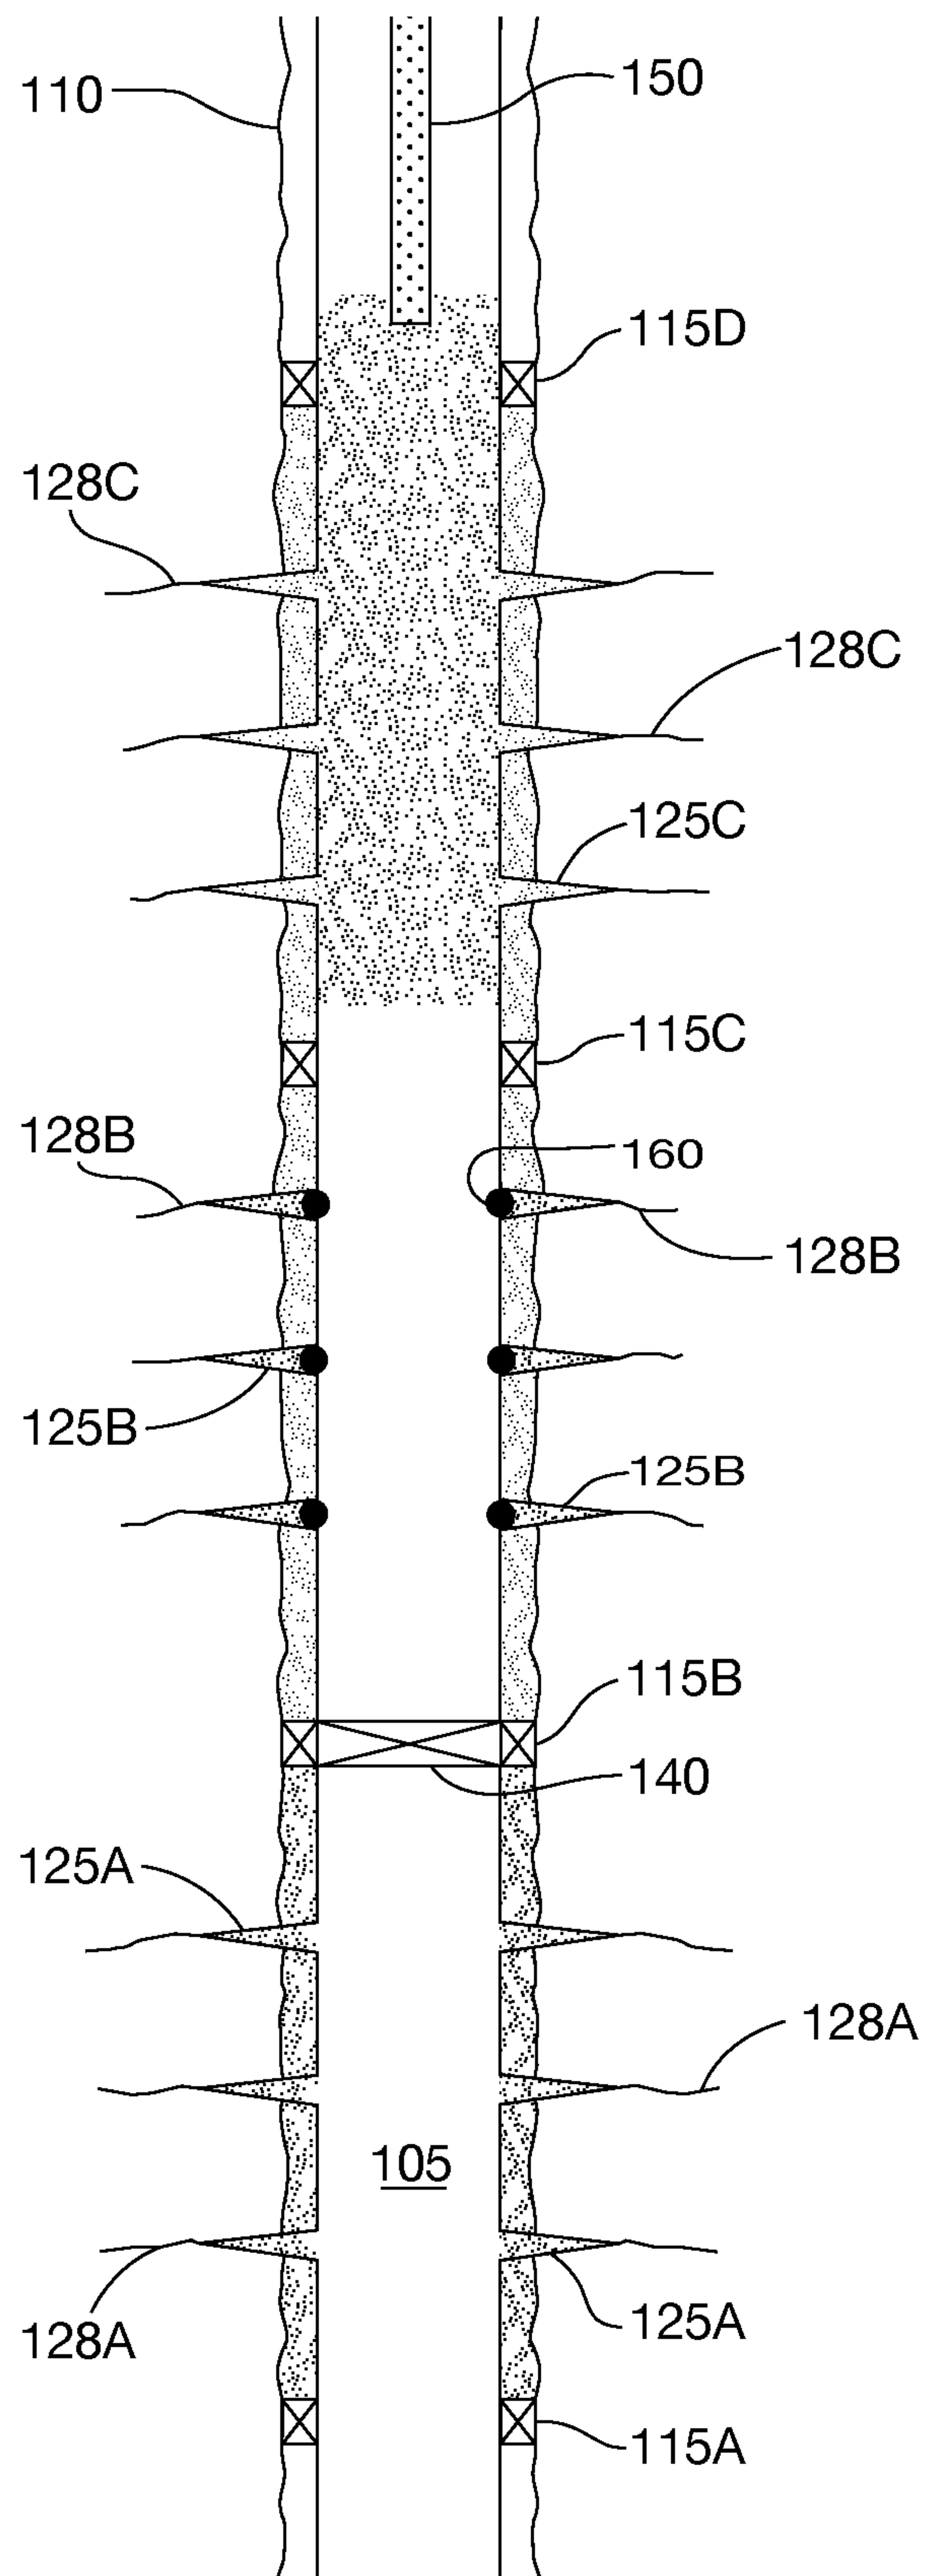


FIG. 1F

4/23

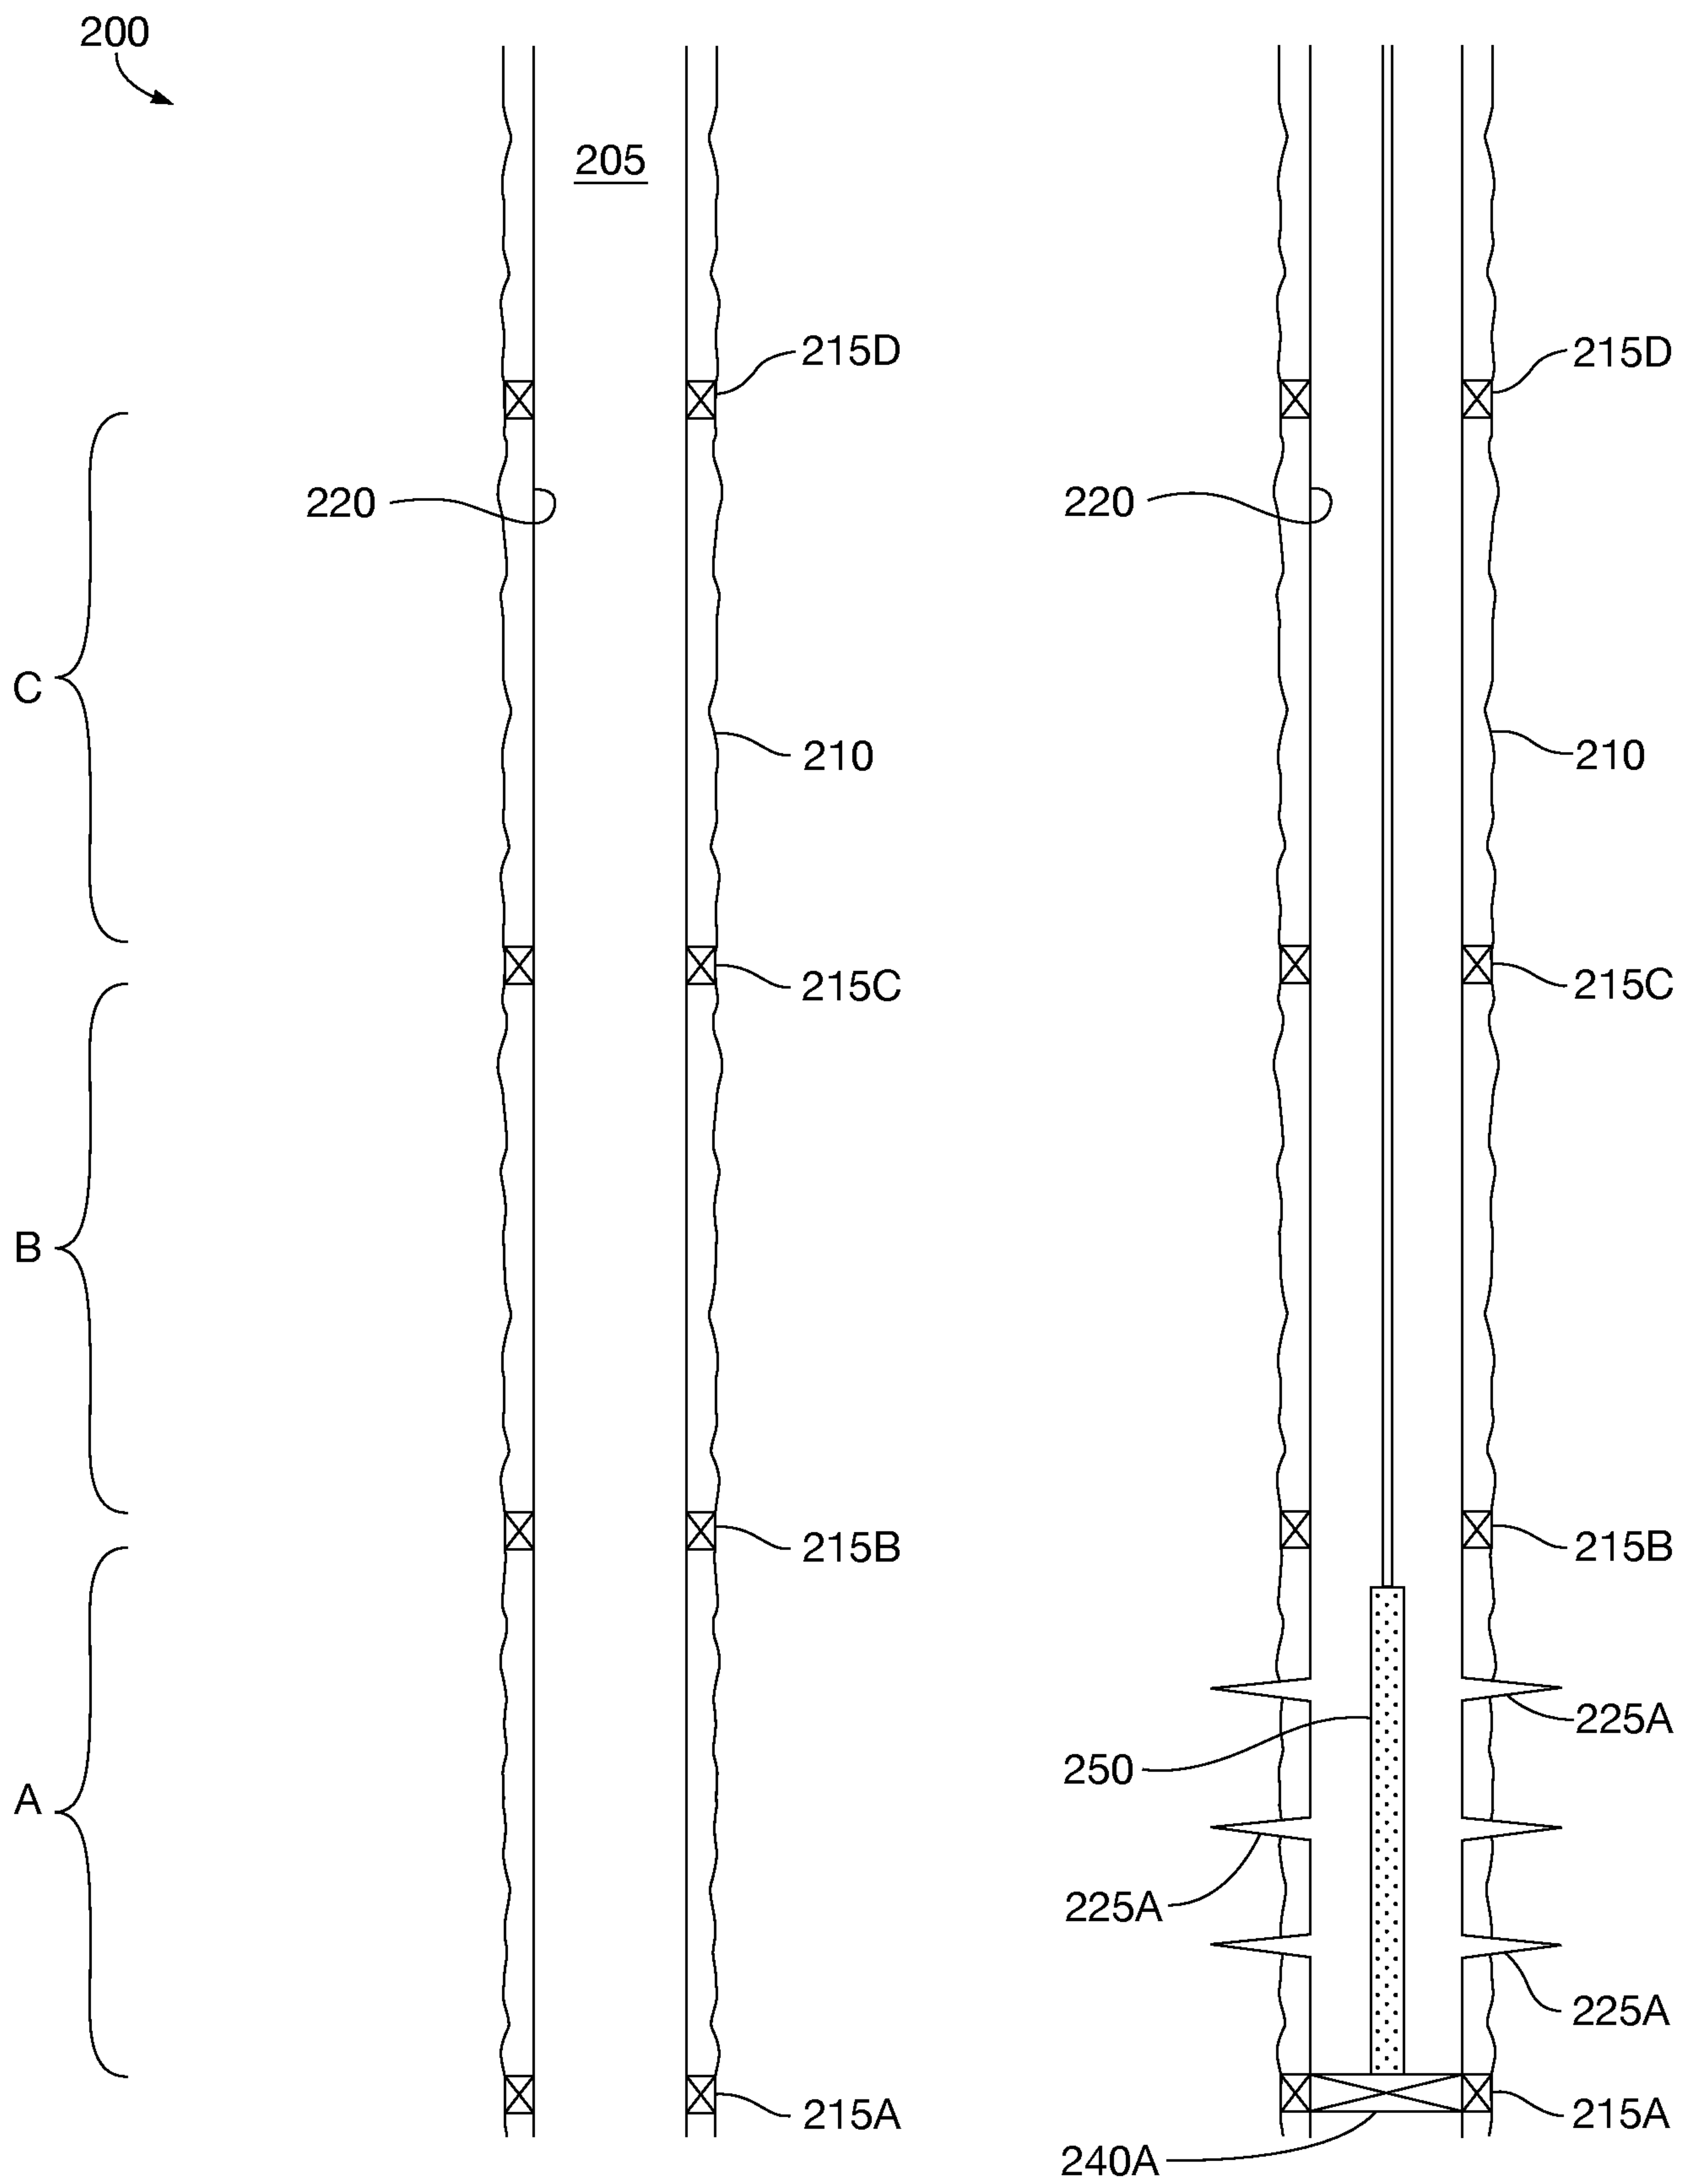


FIG. 2A

FIG. 2B

5/23

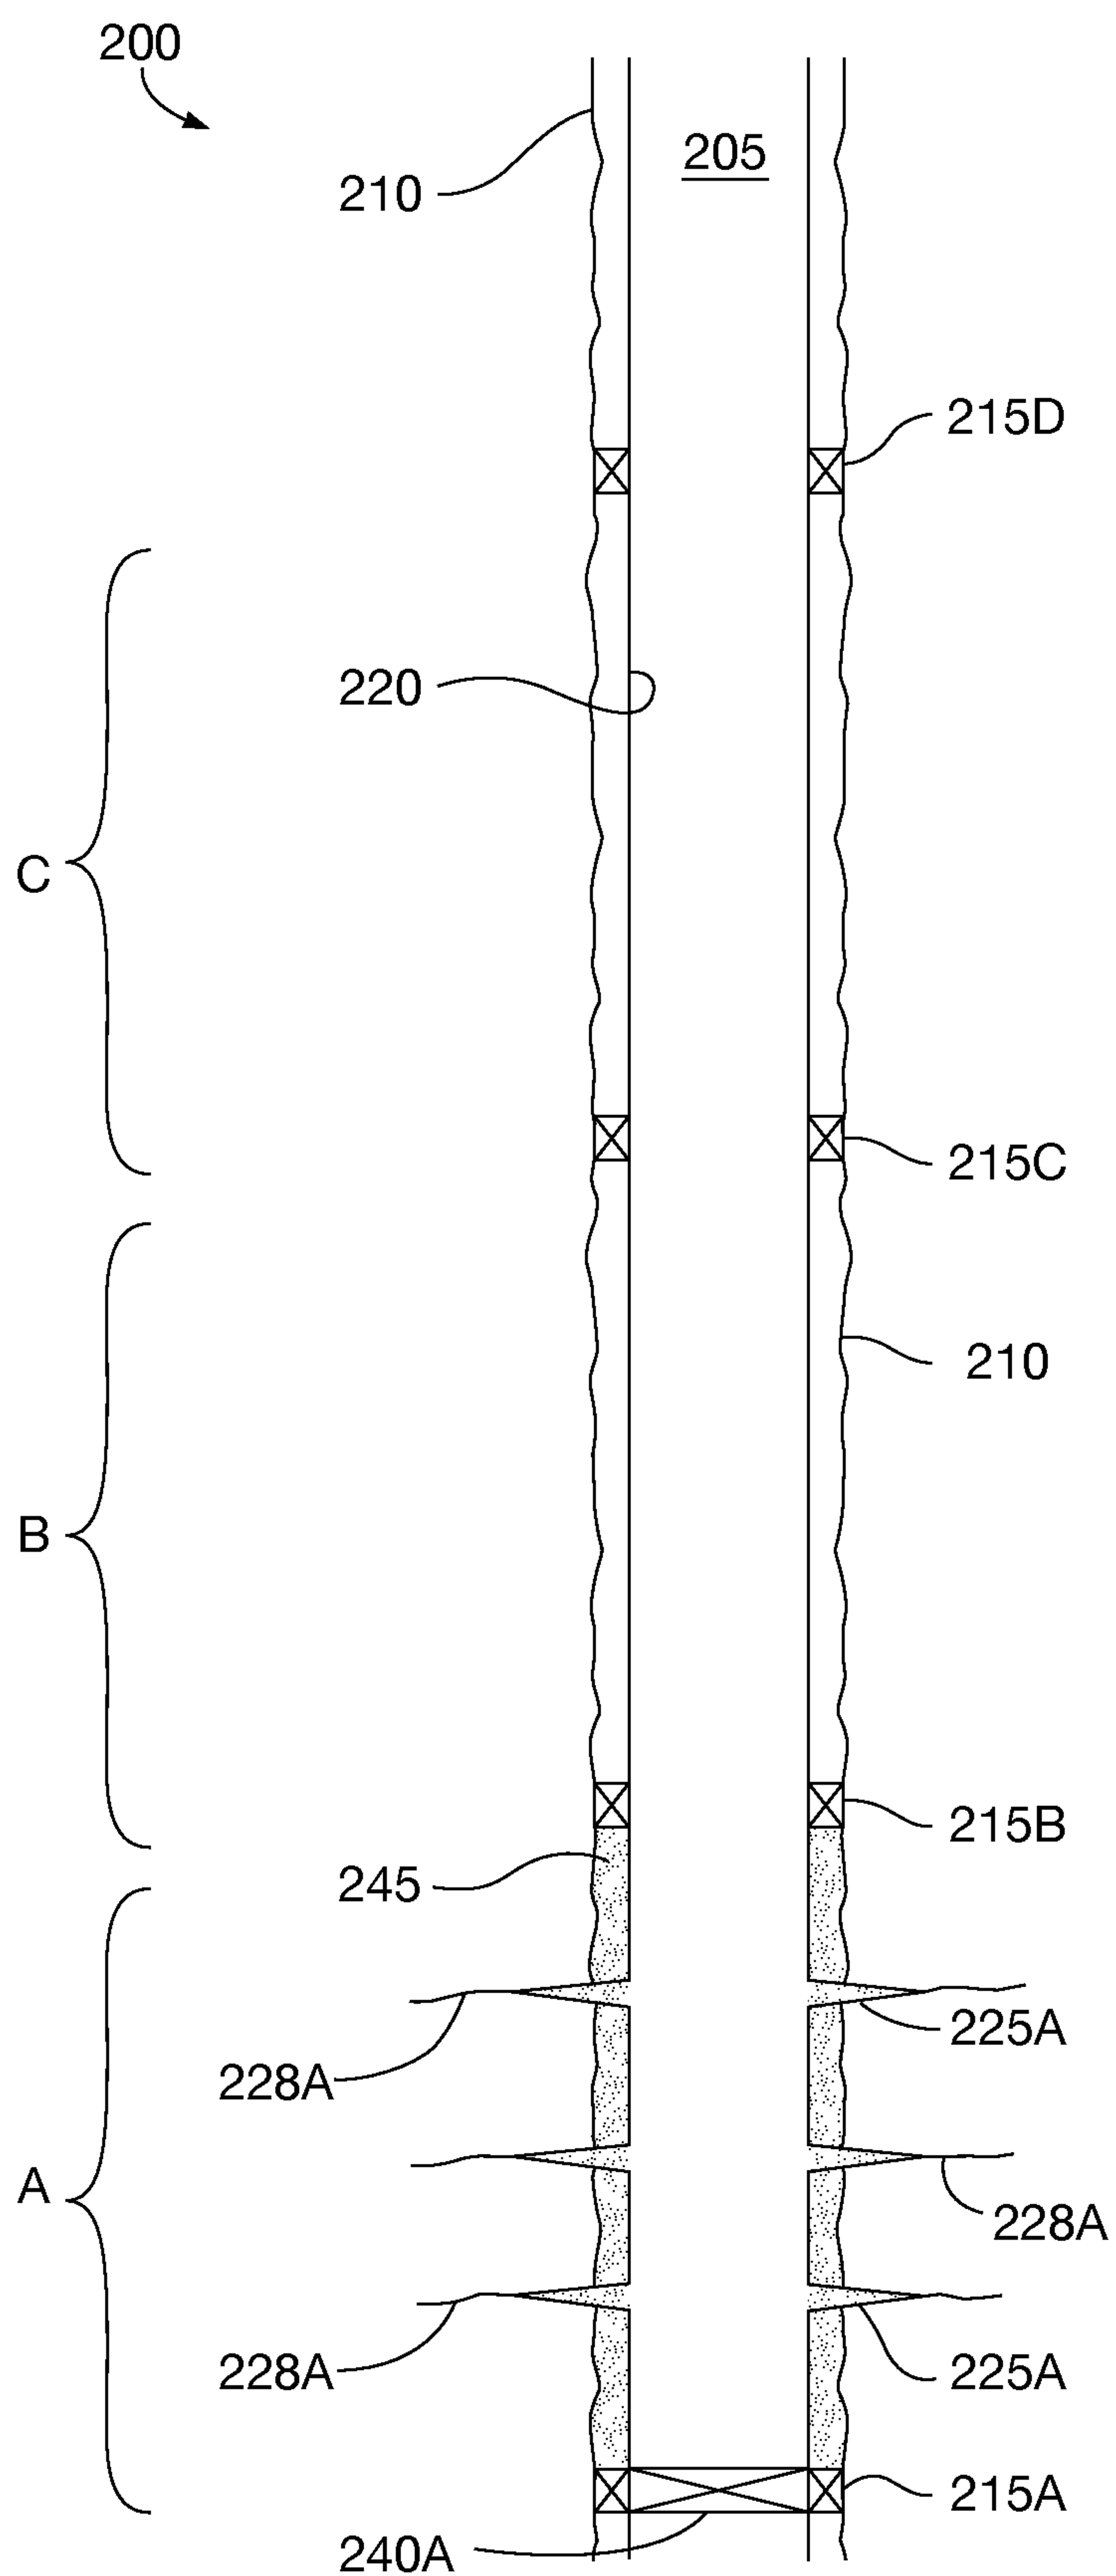


FIG. 2C

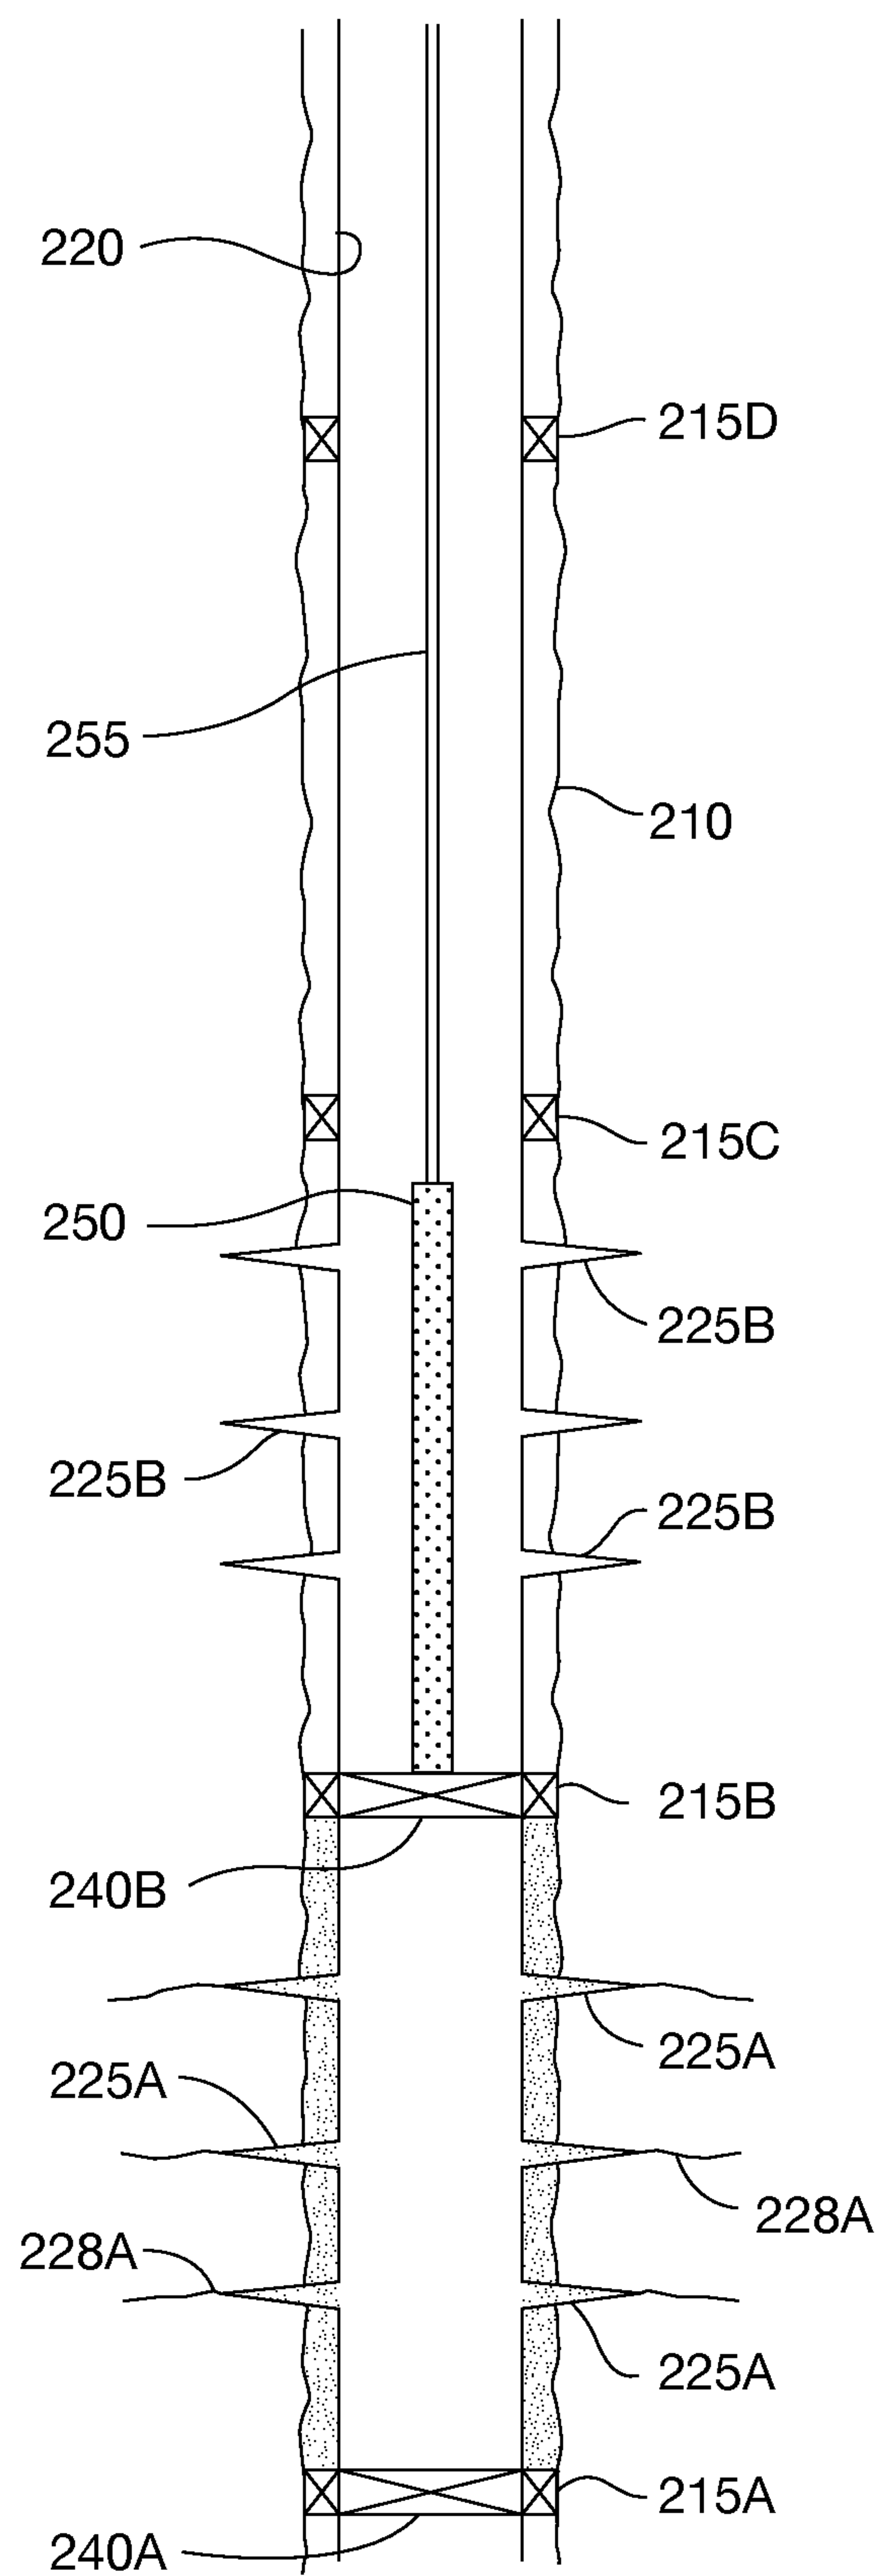


FIG. 2D

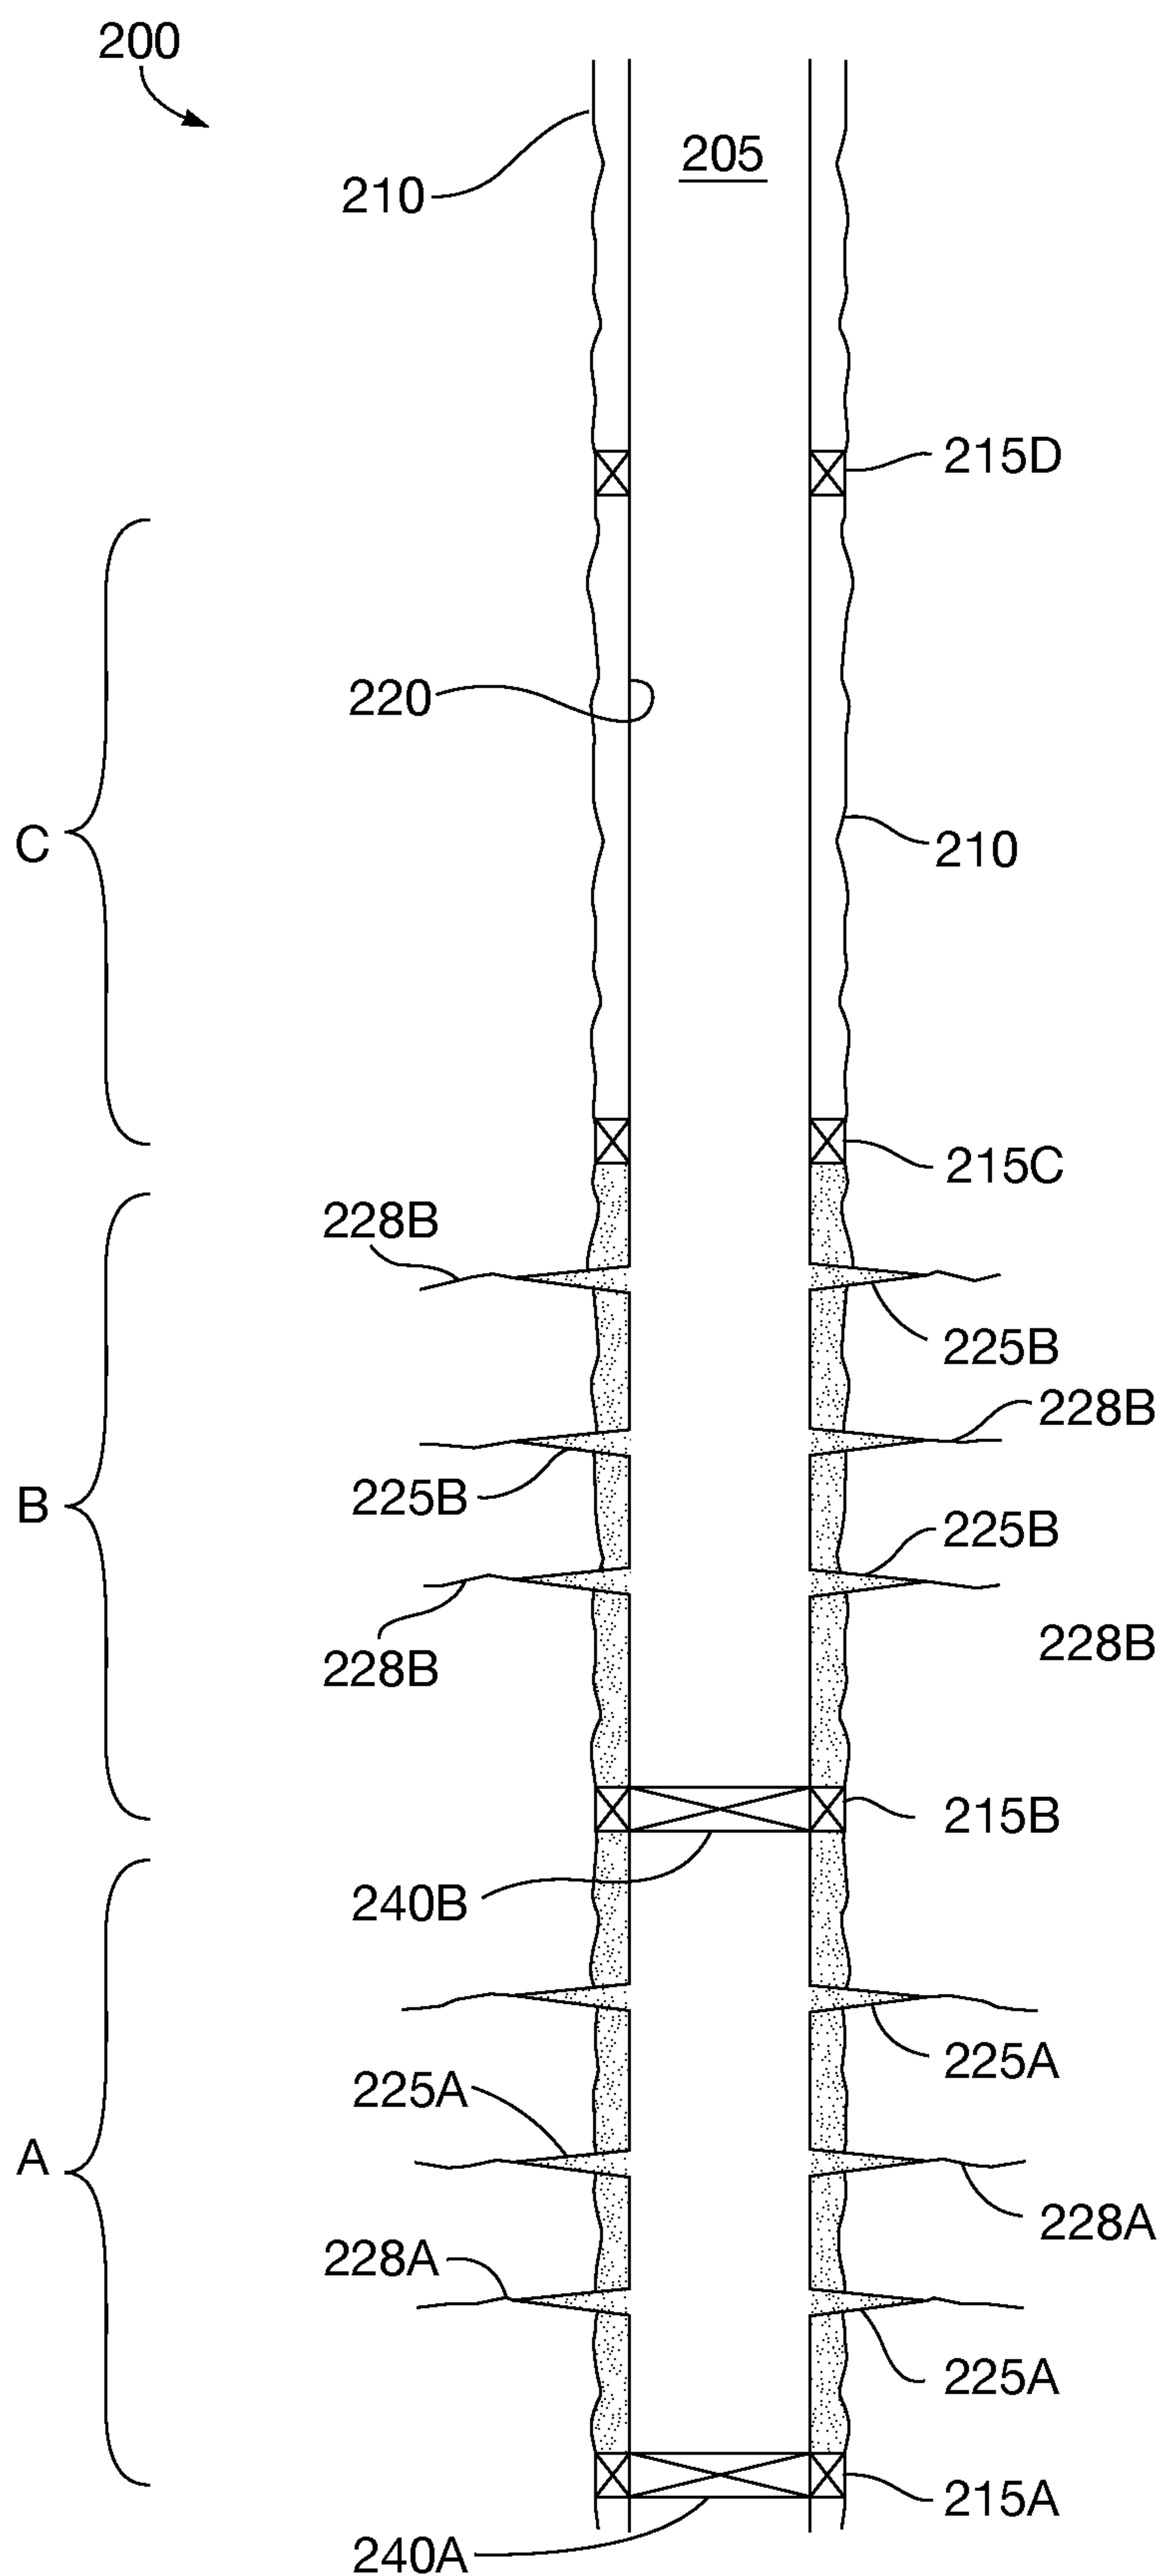


FIG. 2E

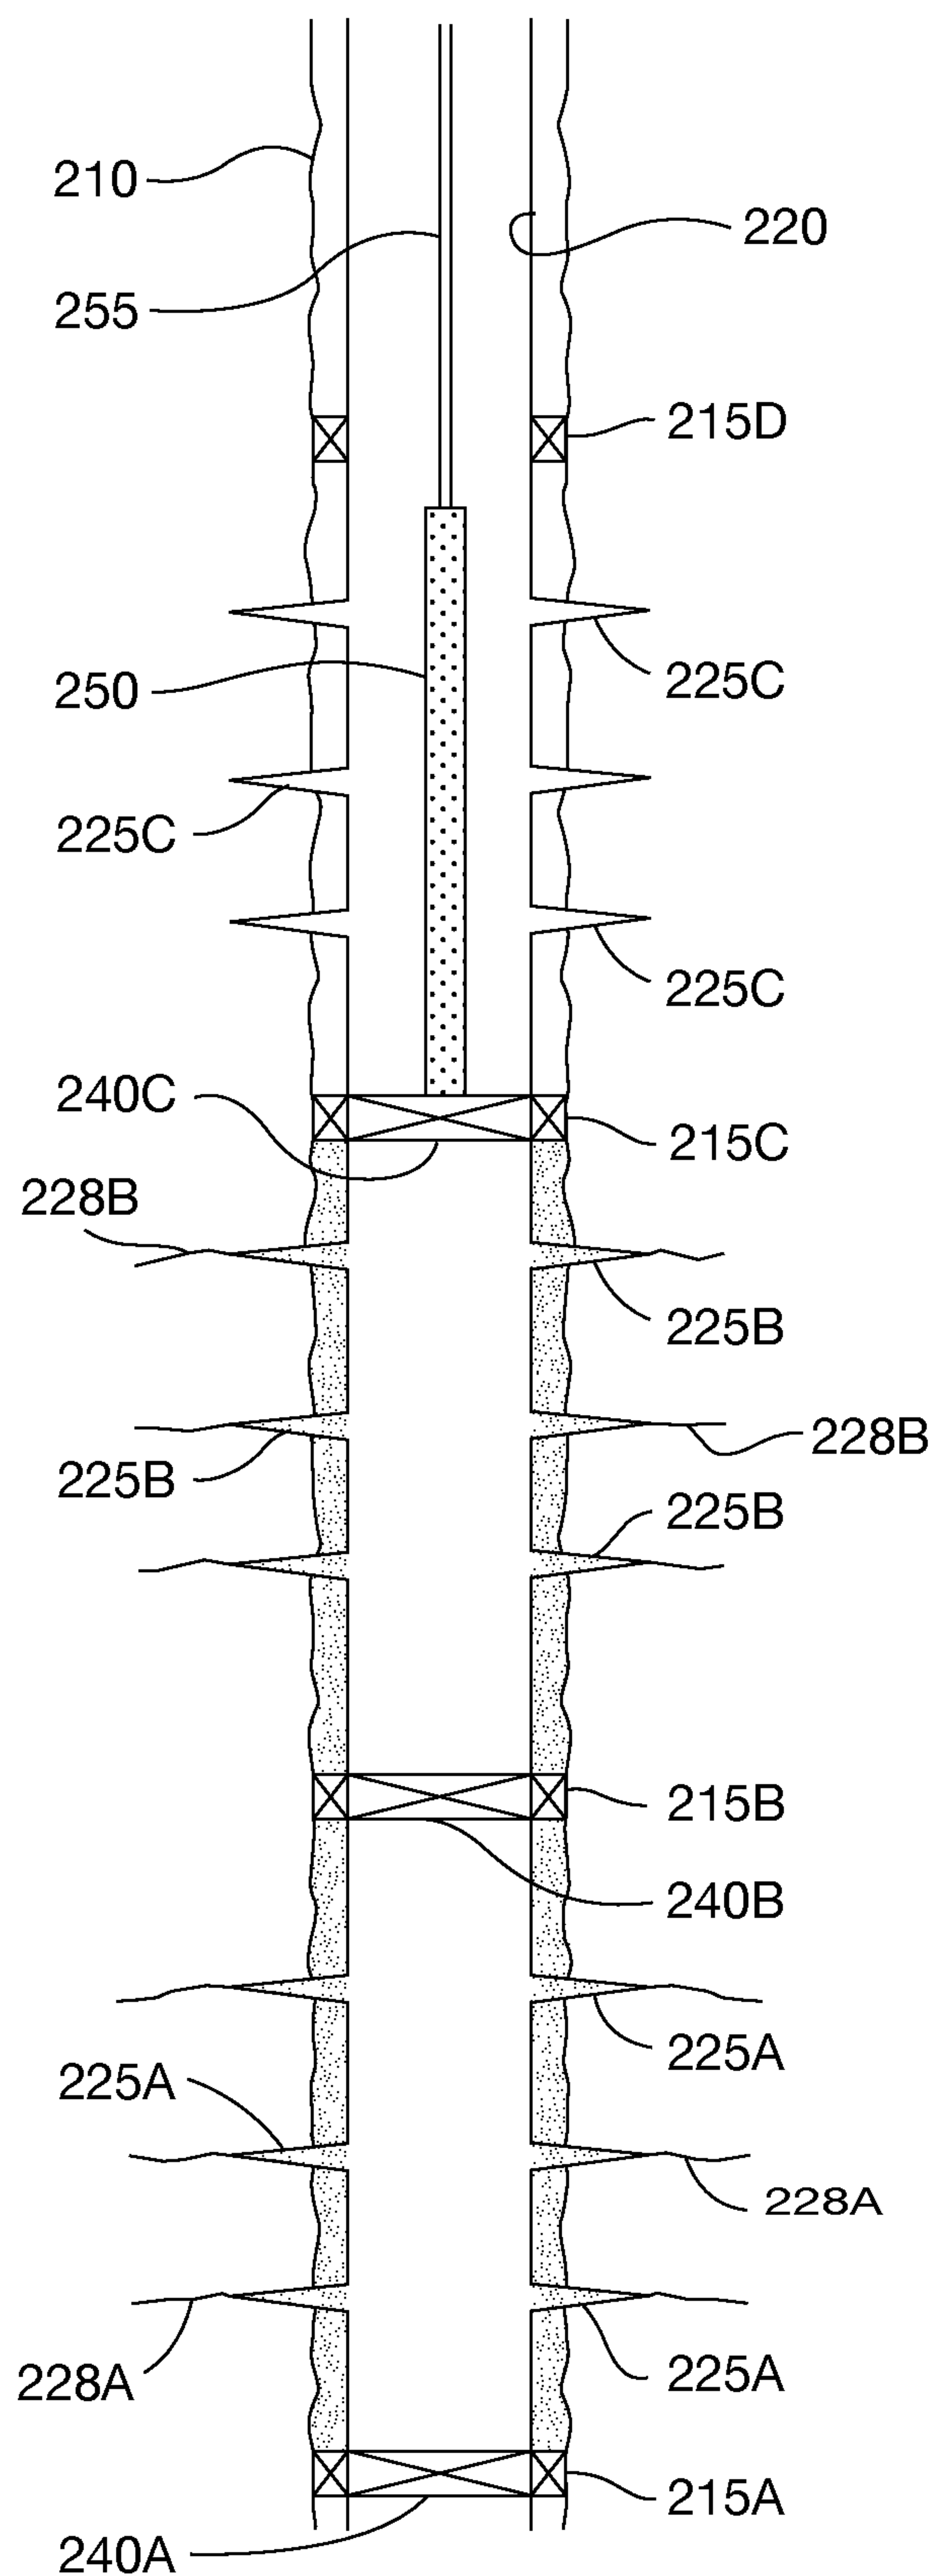


FIG. 2F

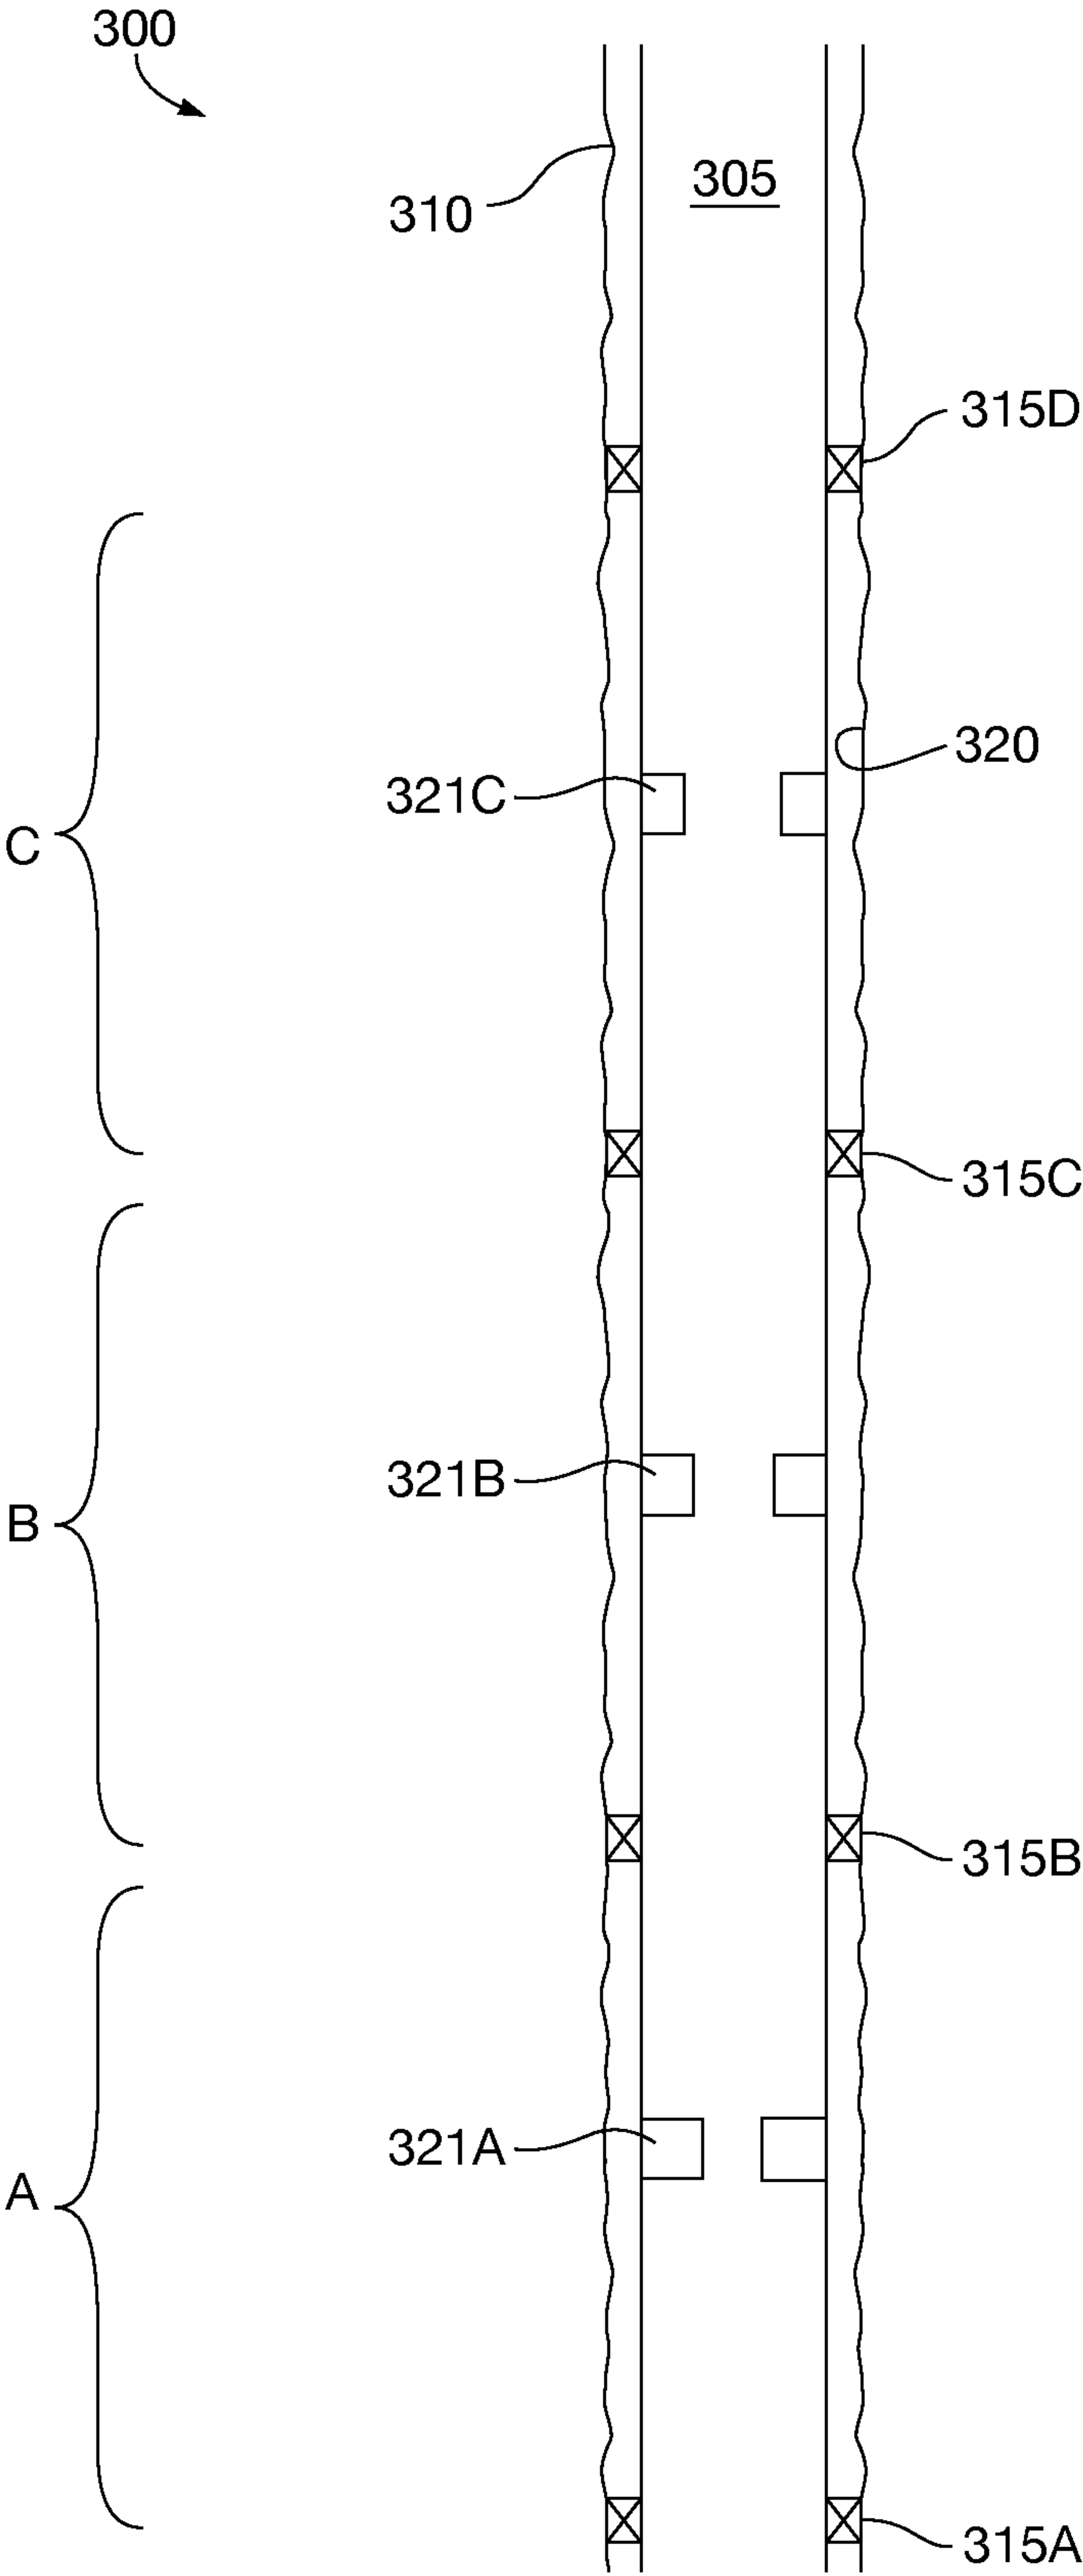


FIG. 3A

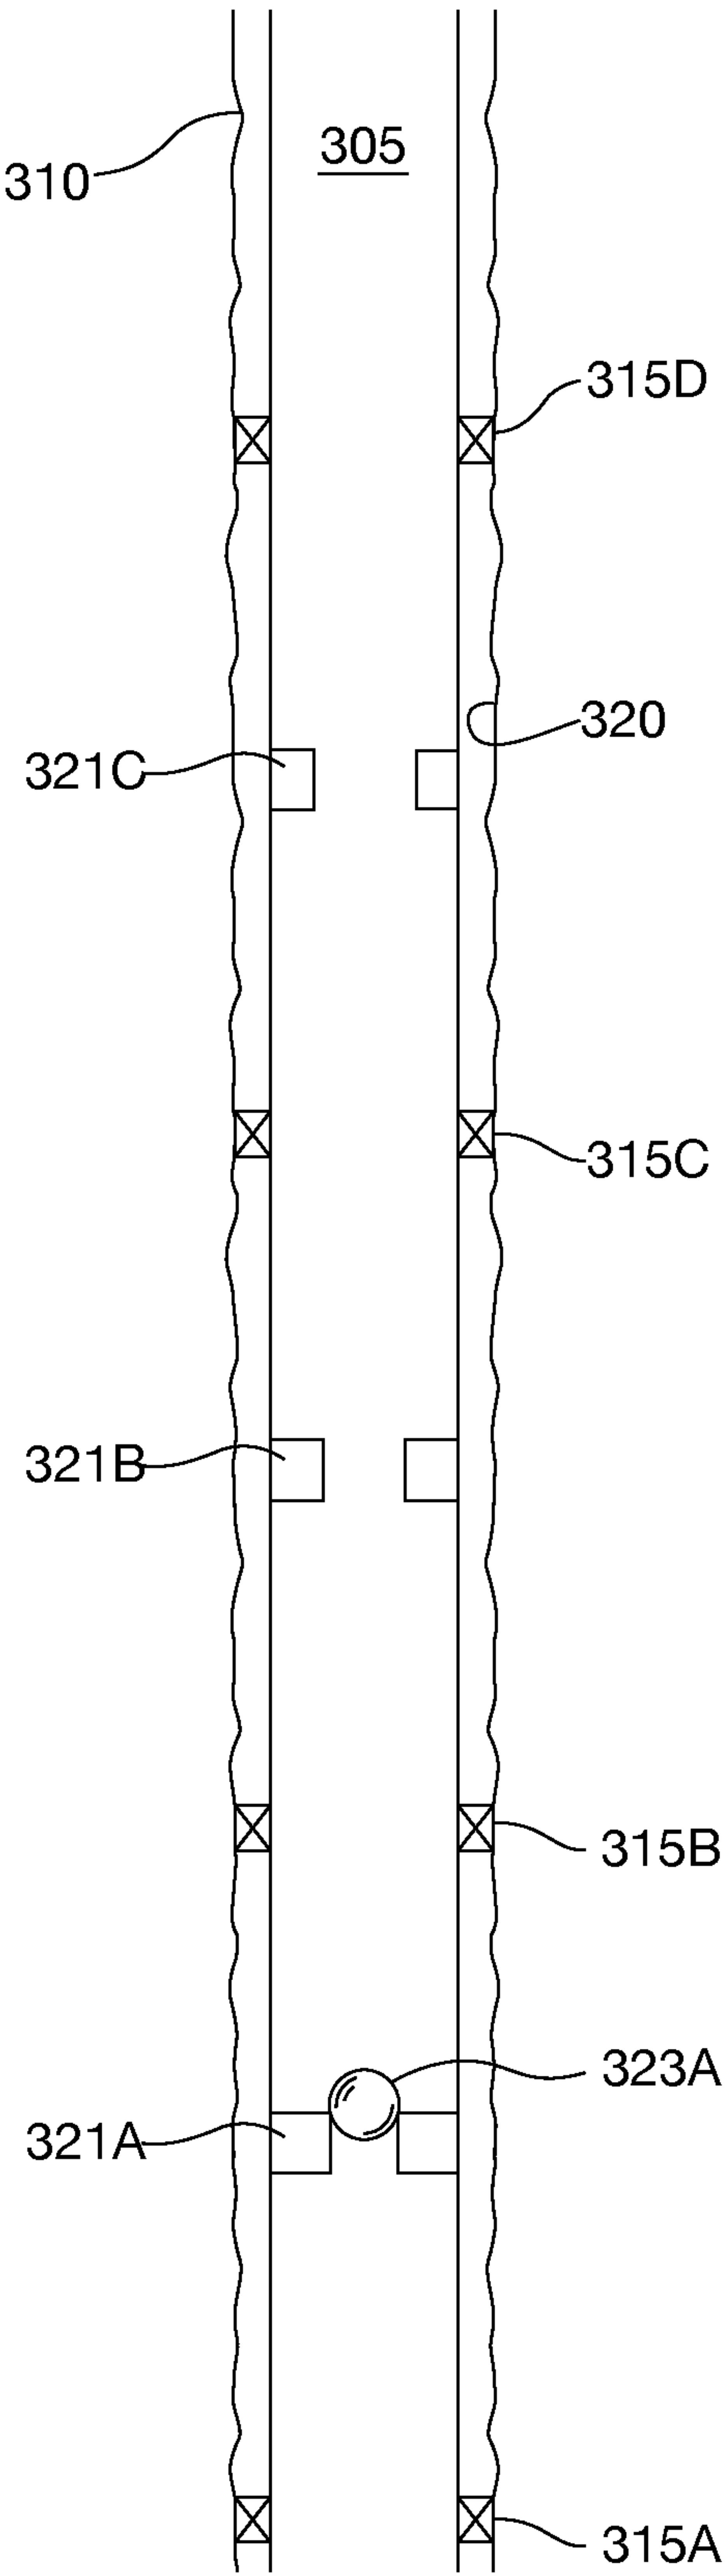


FIG. 3B

8/23

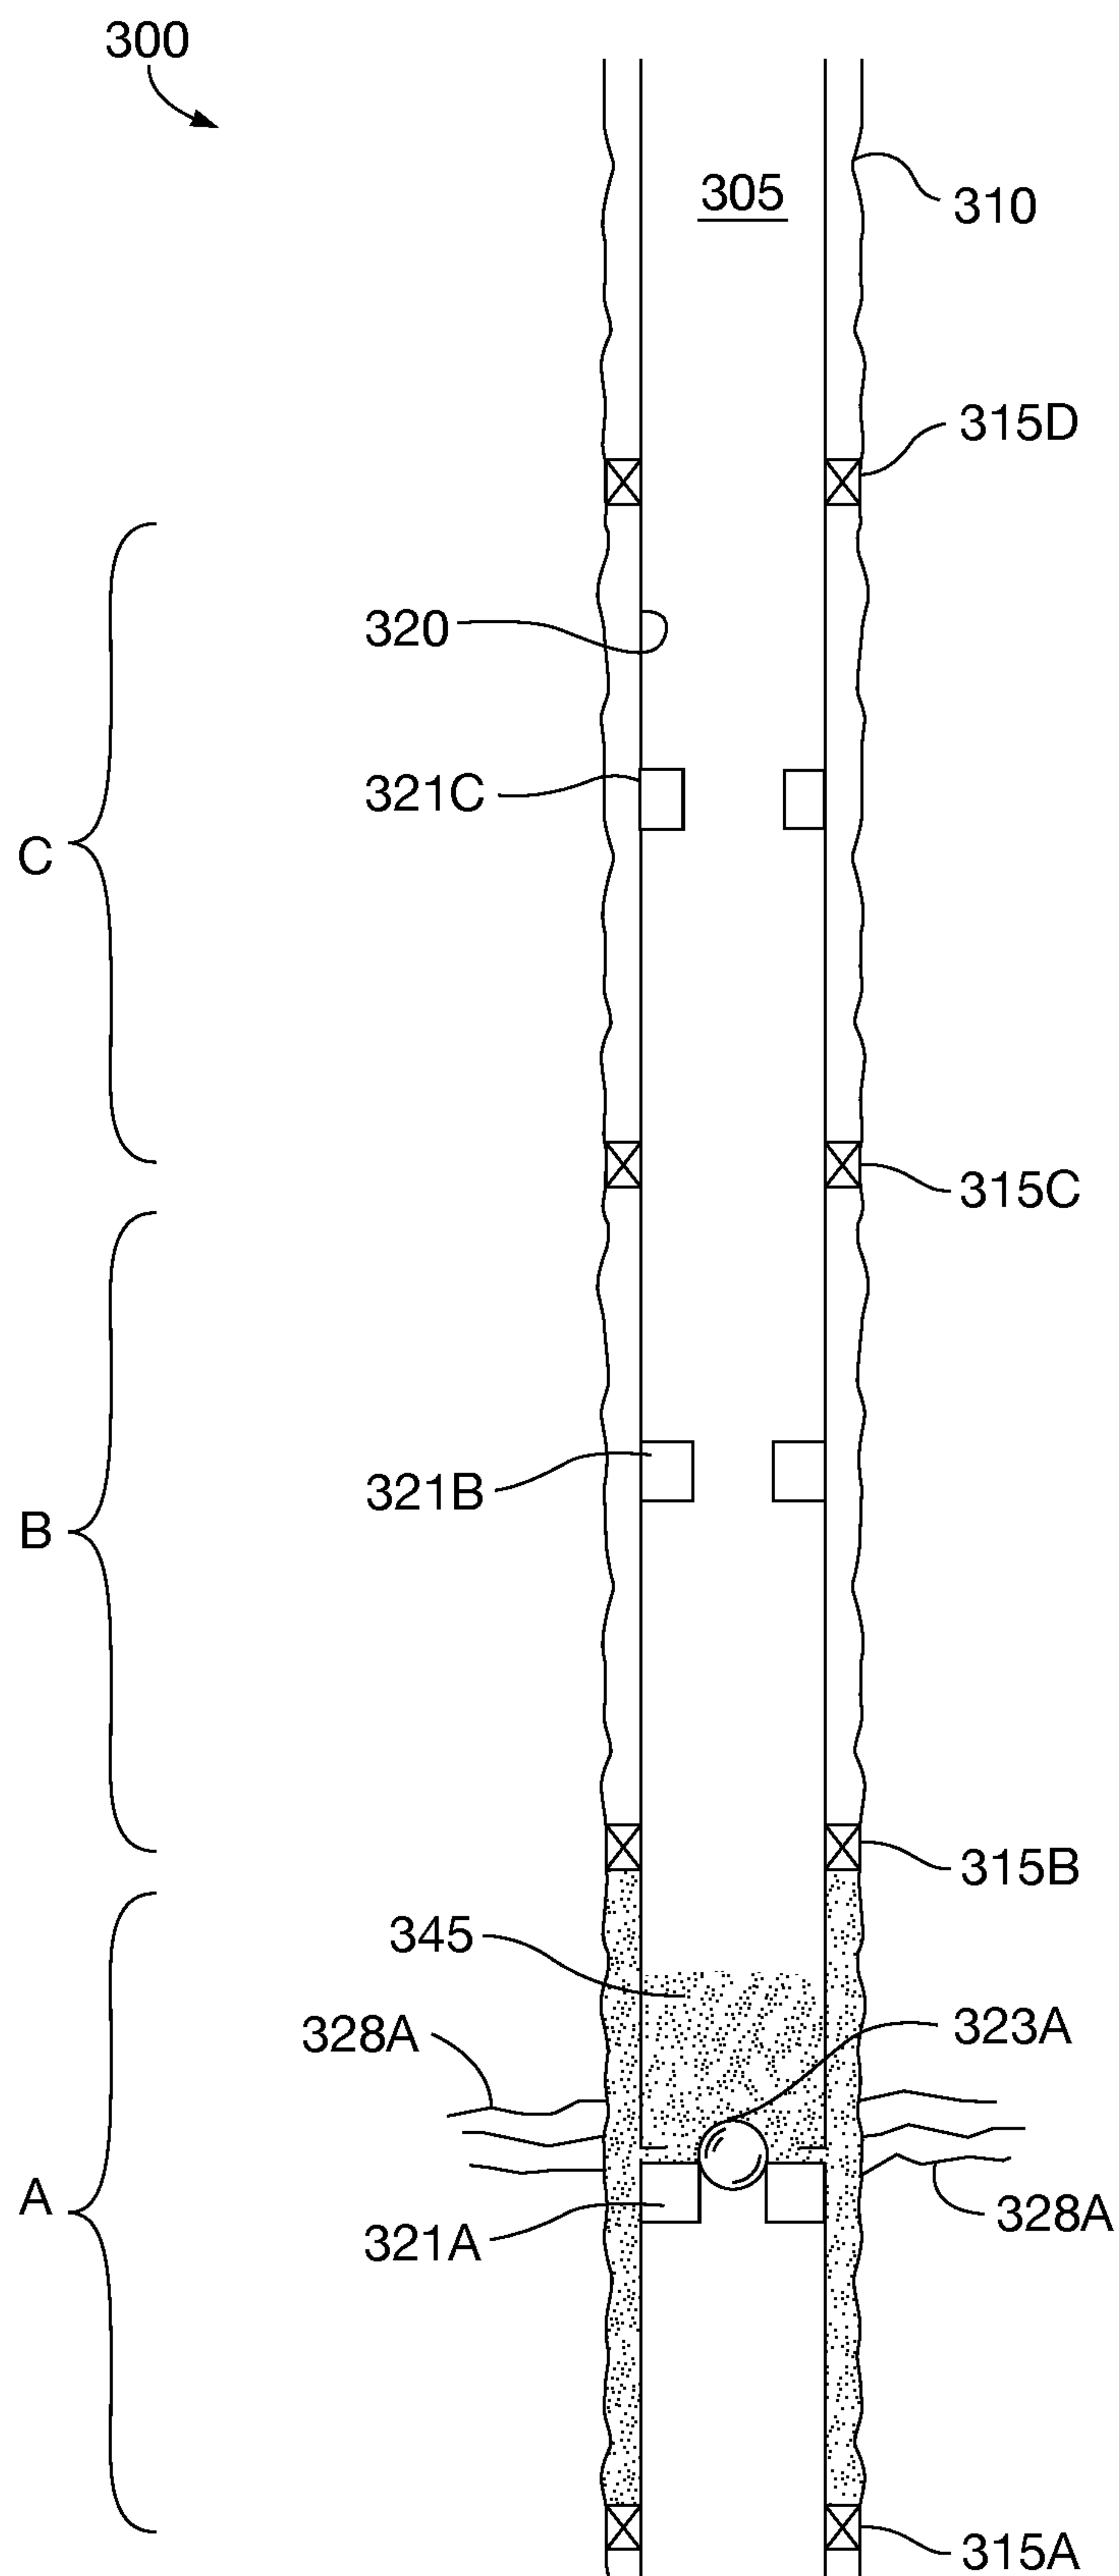


FIG. 3C

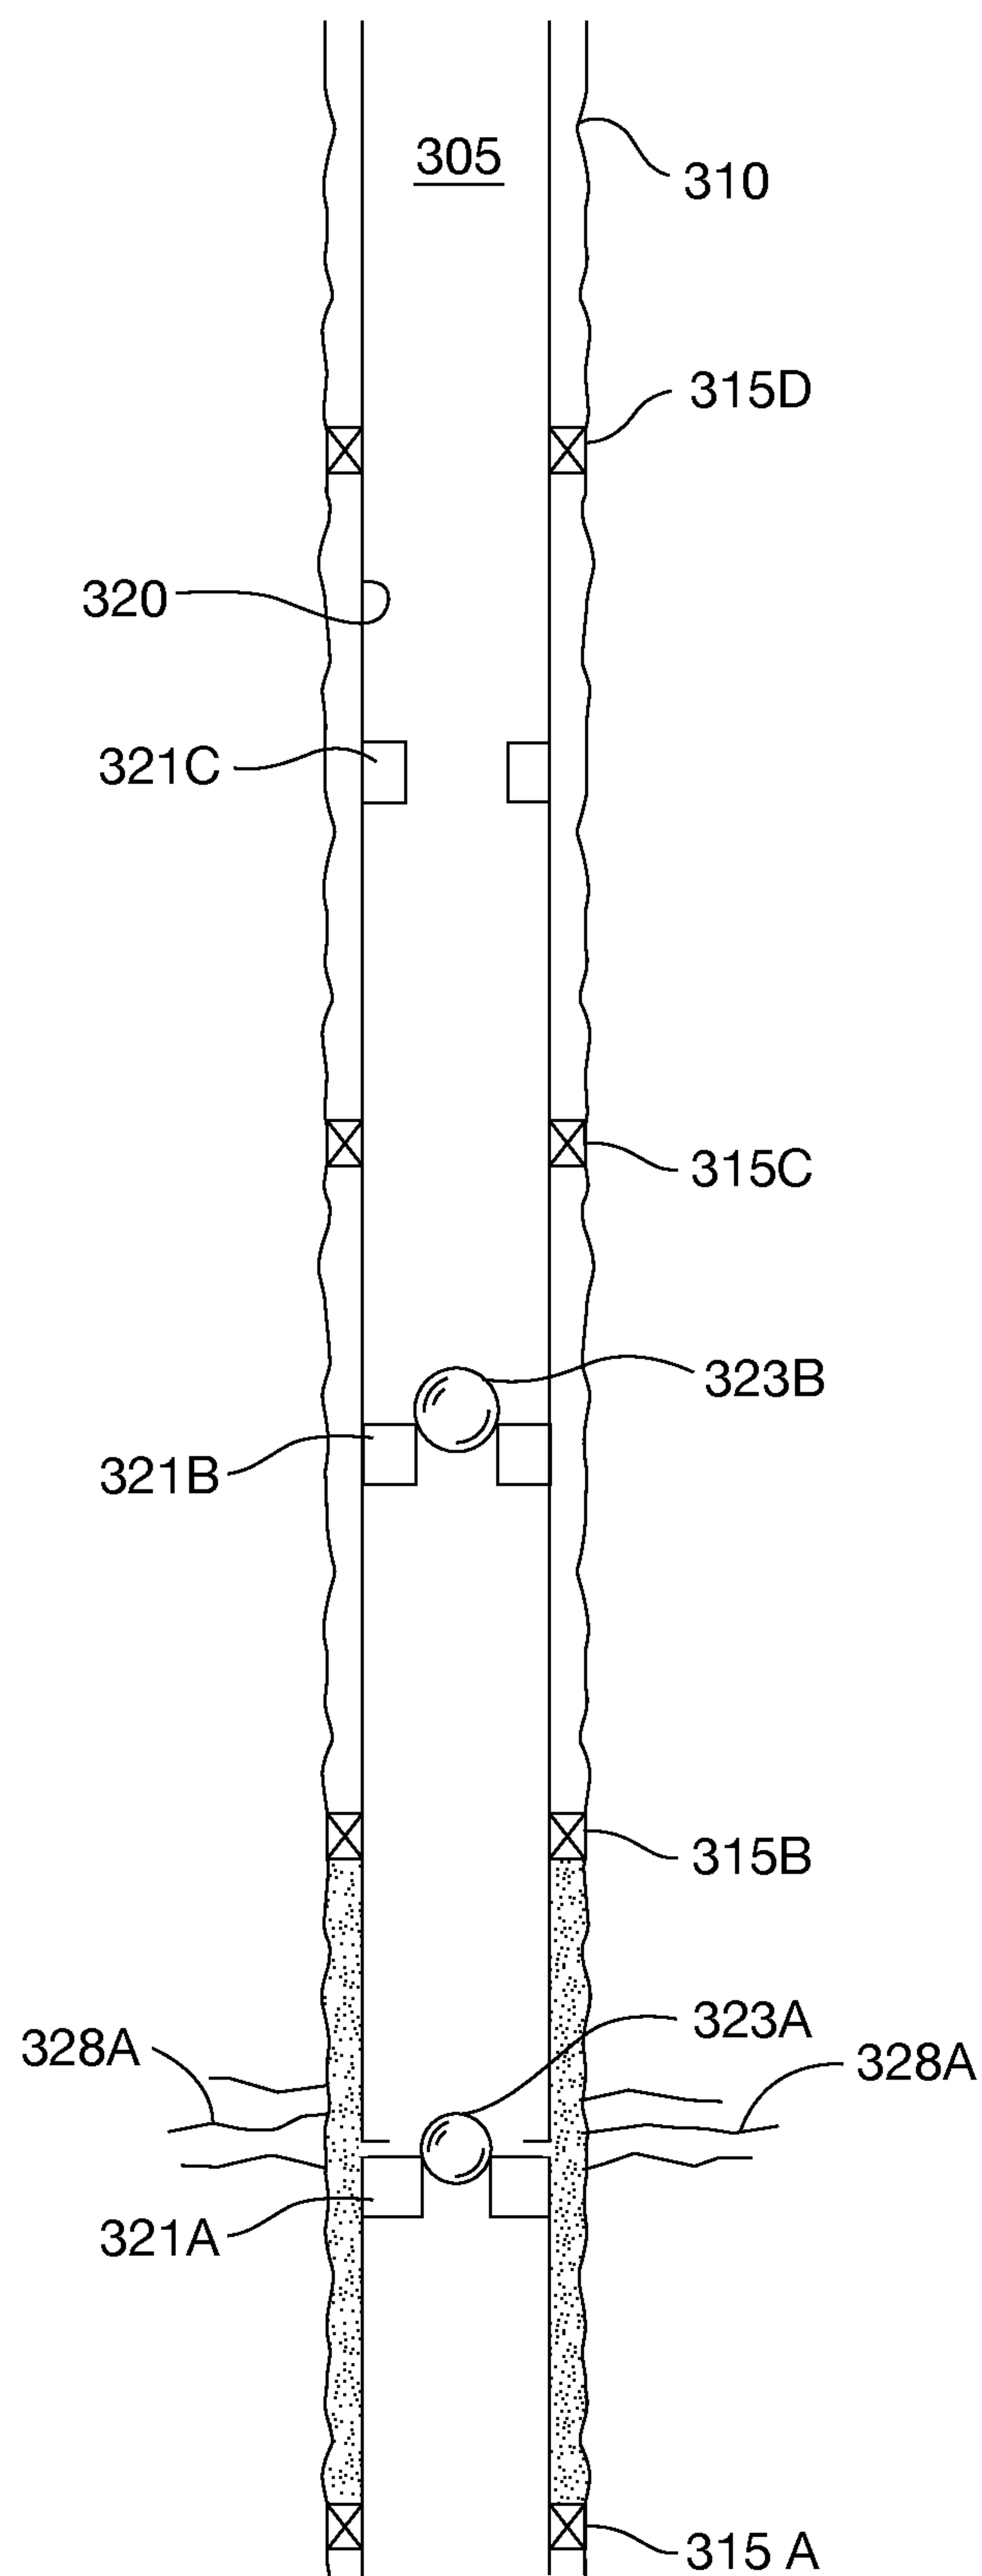


FIG. 3D

9/23

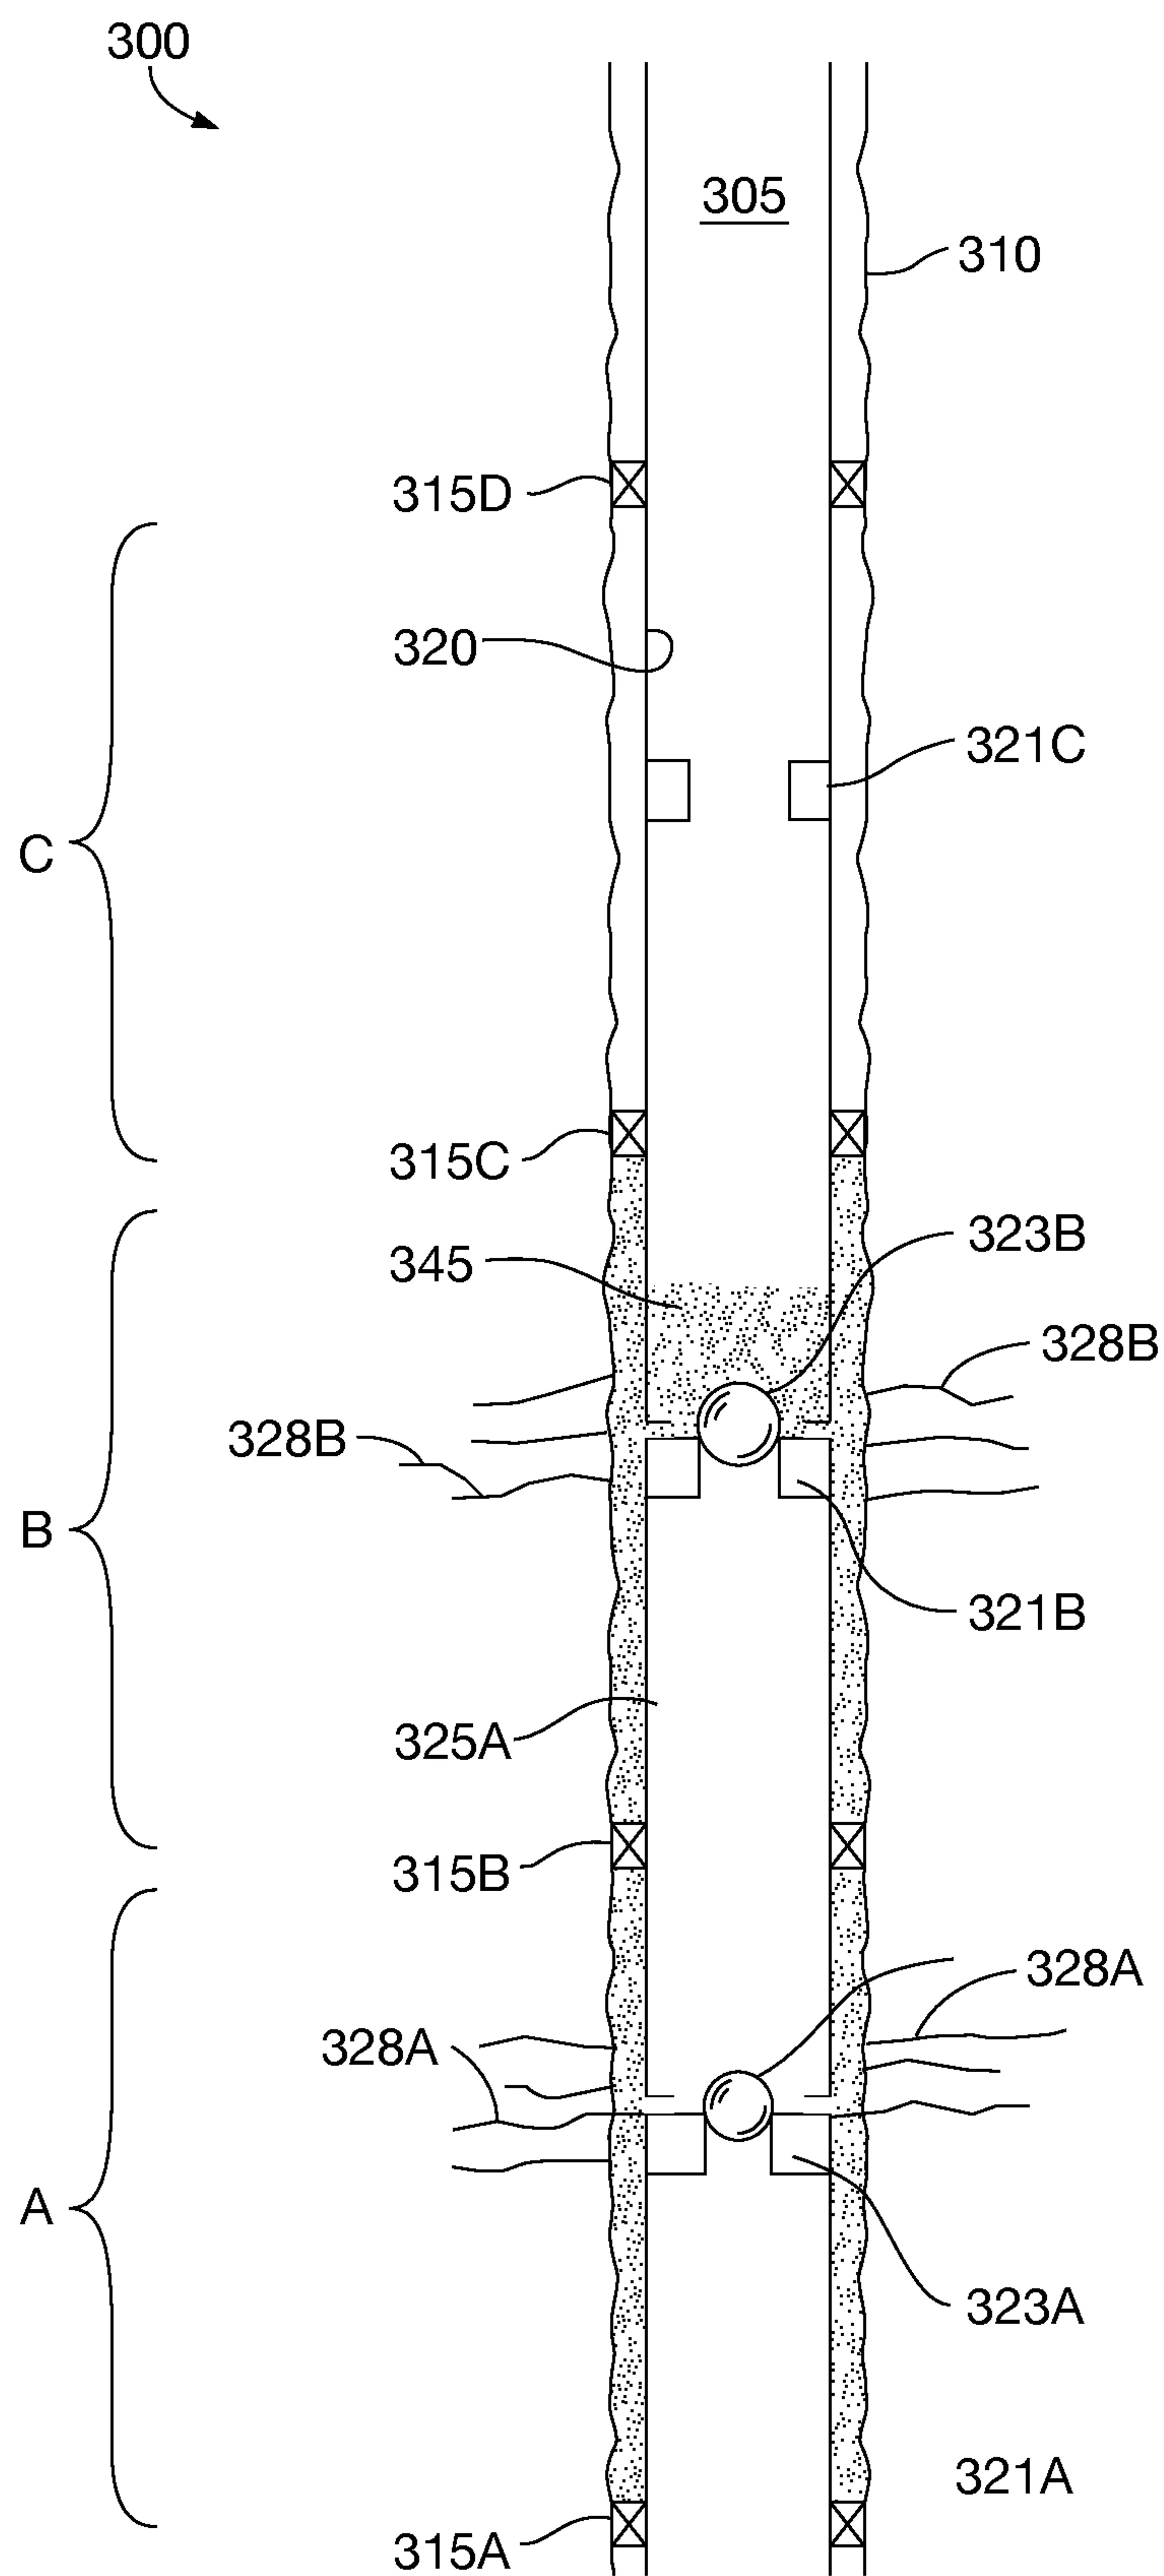


FIG. 3E

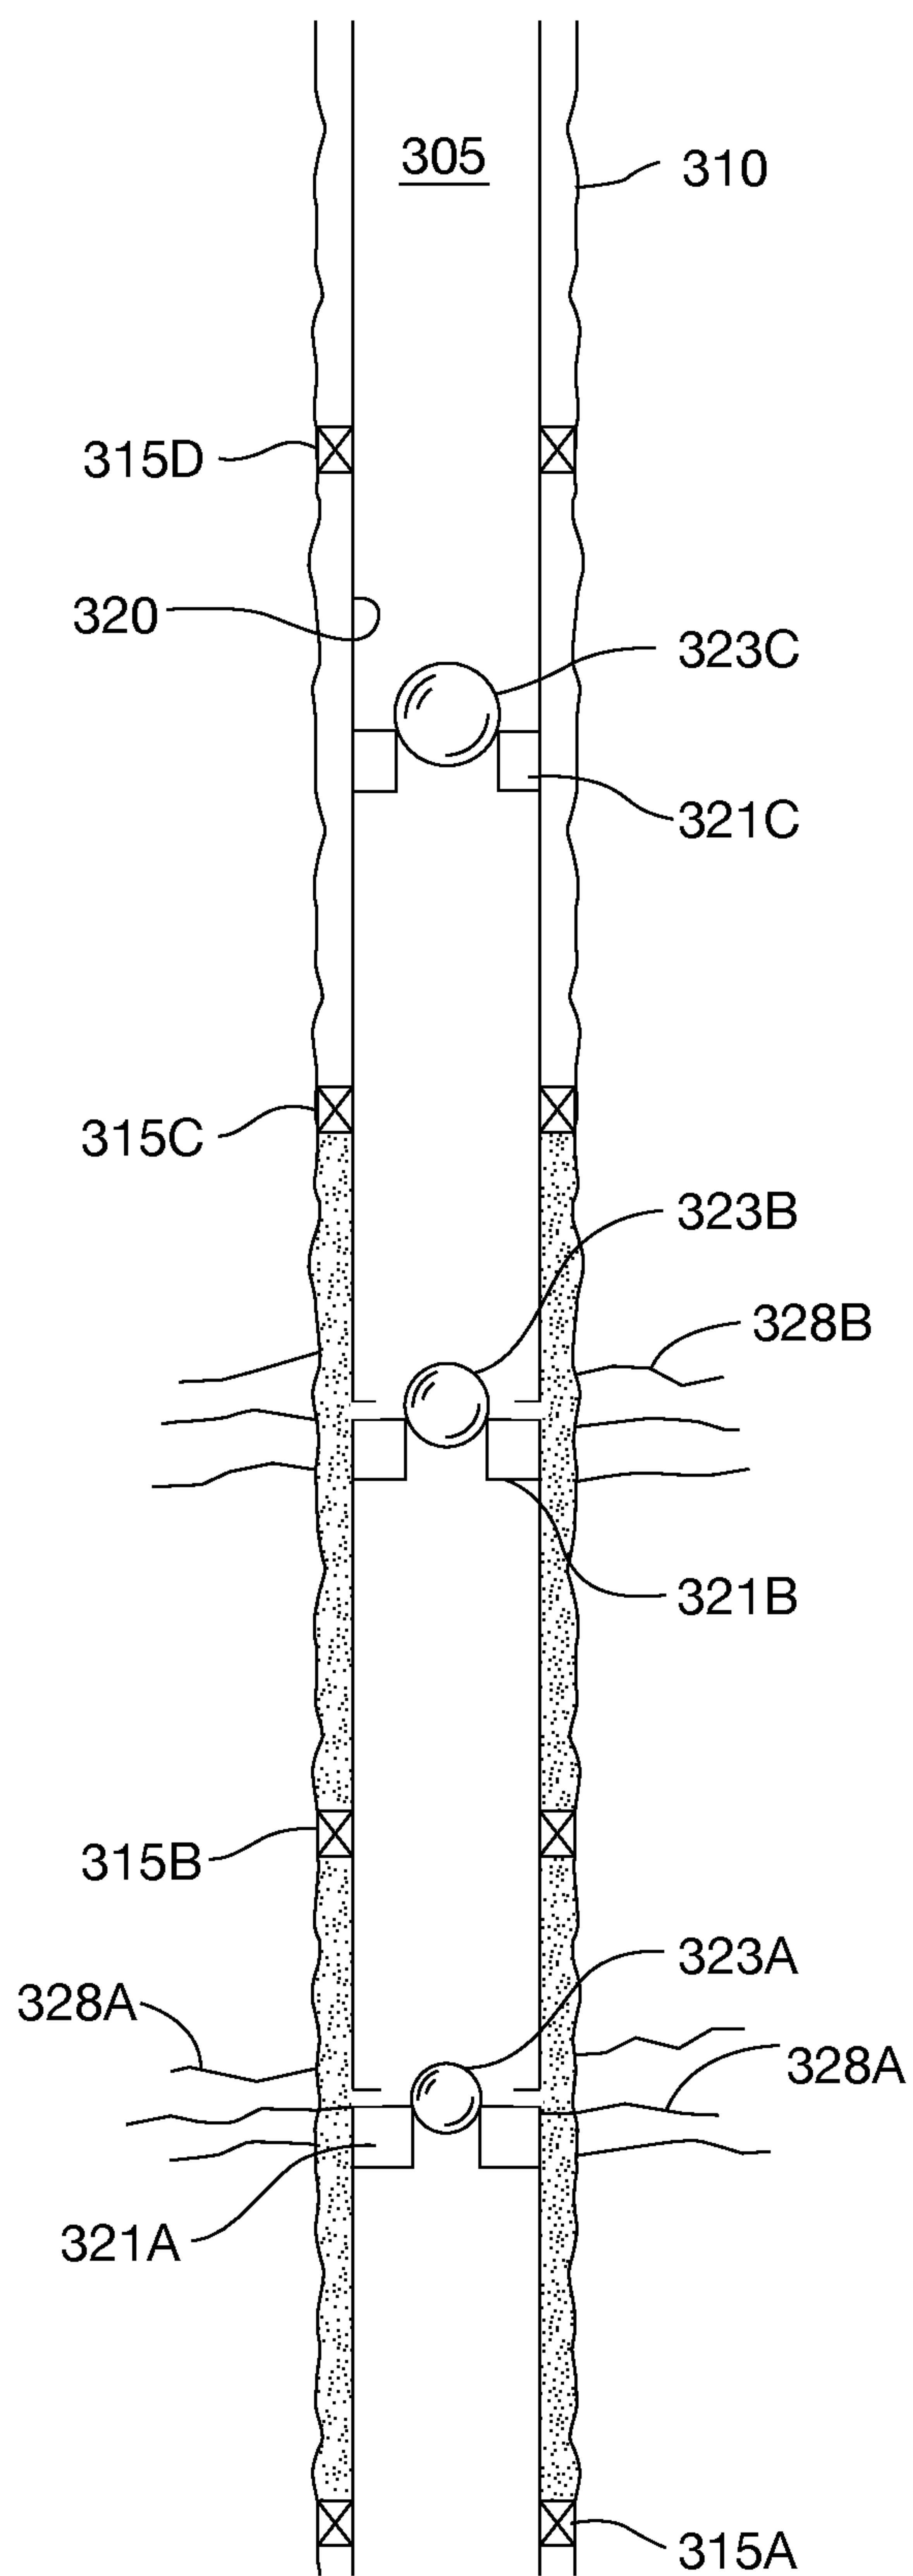


FIG. 3F

10/23

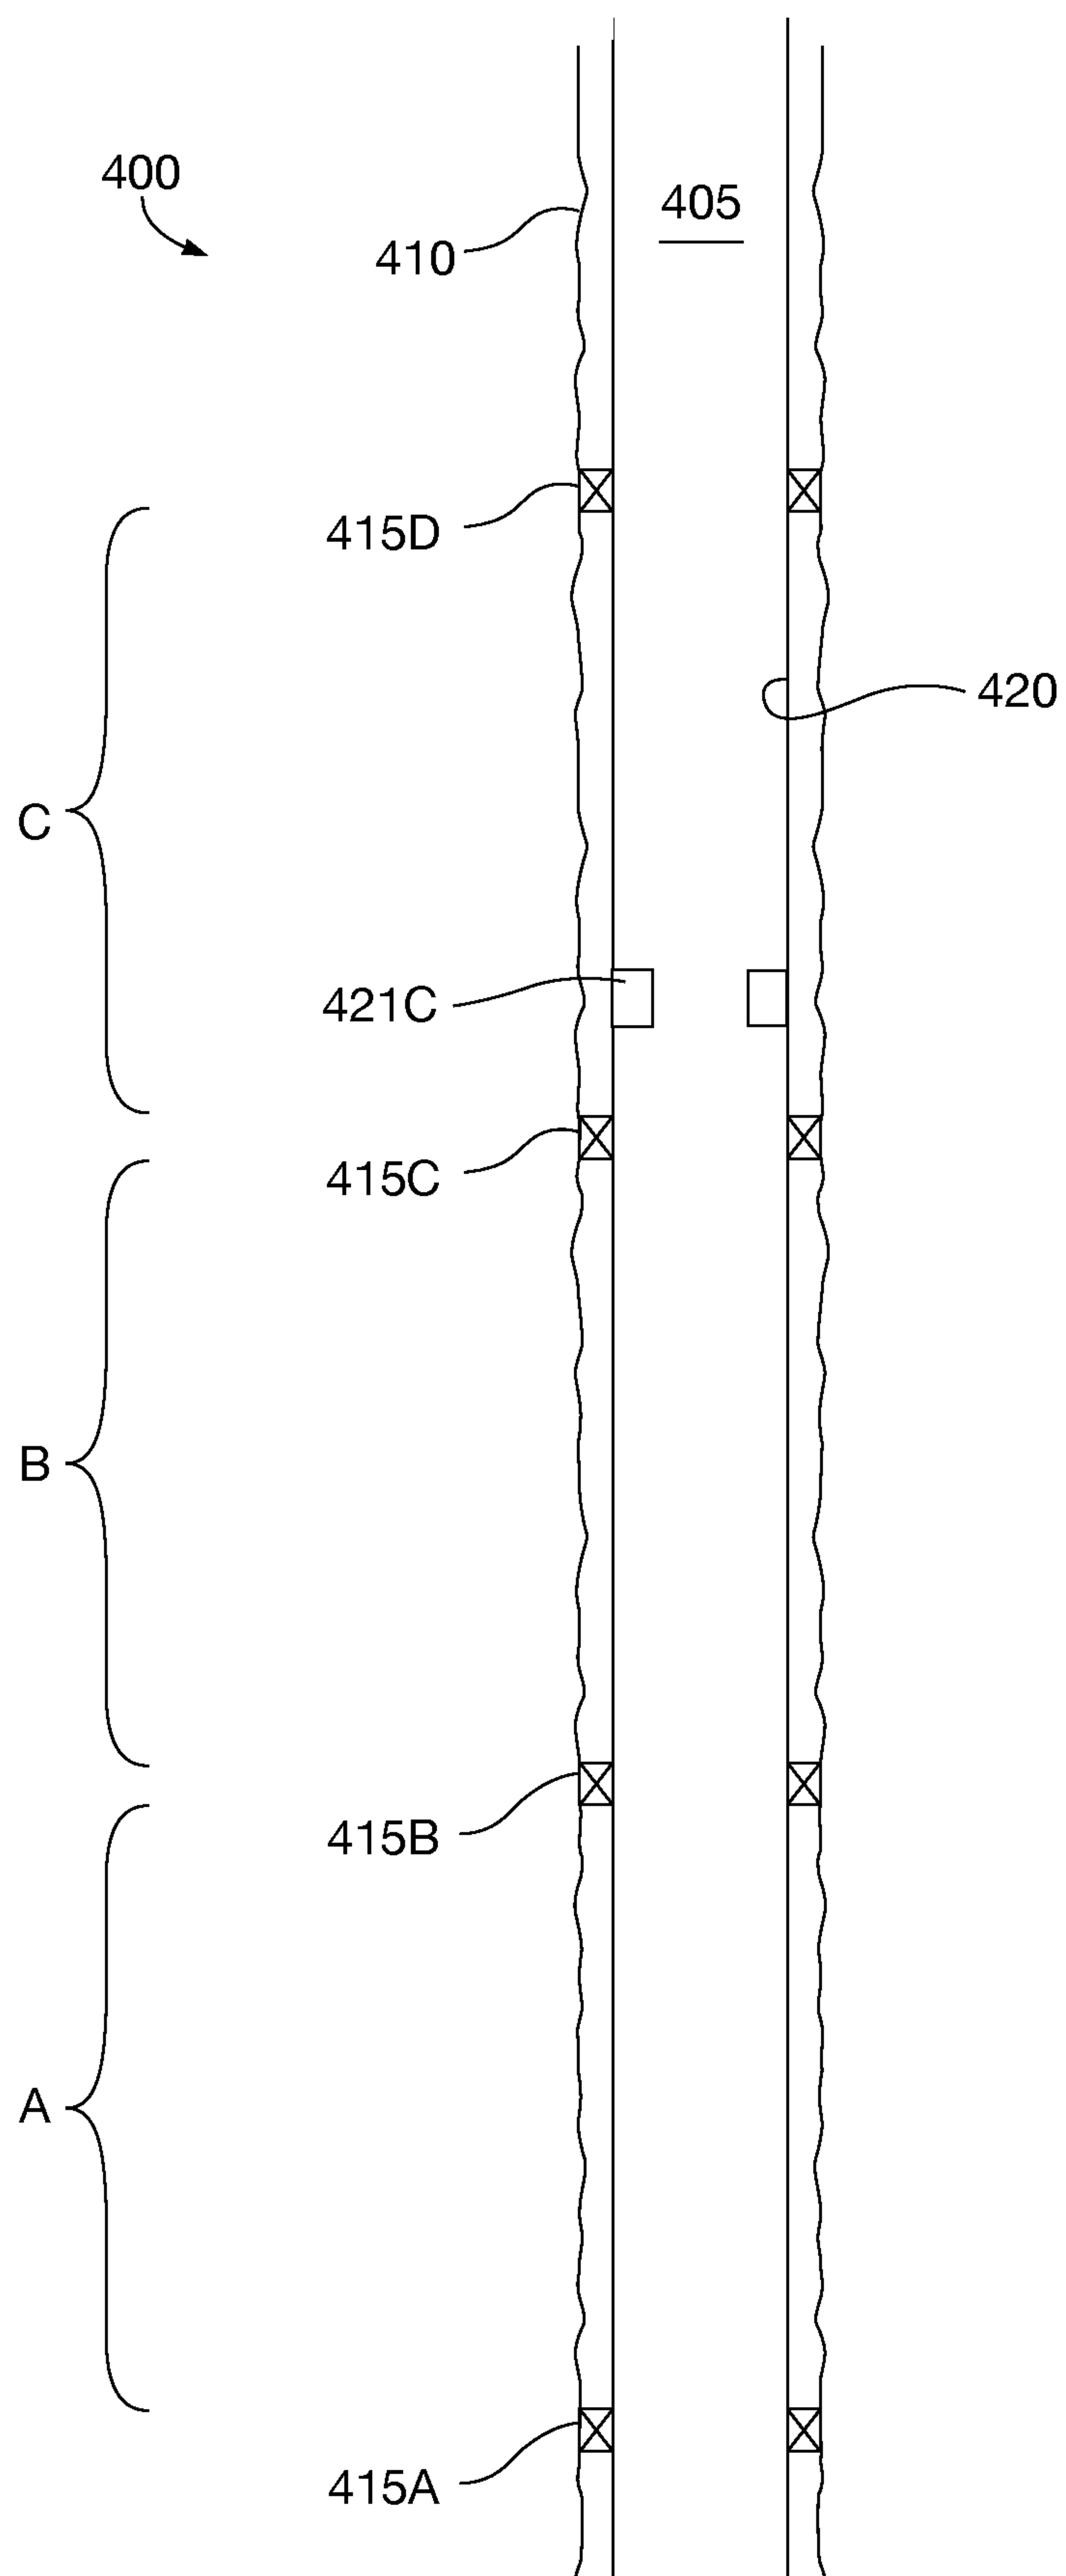


FIG. 4A

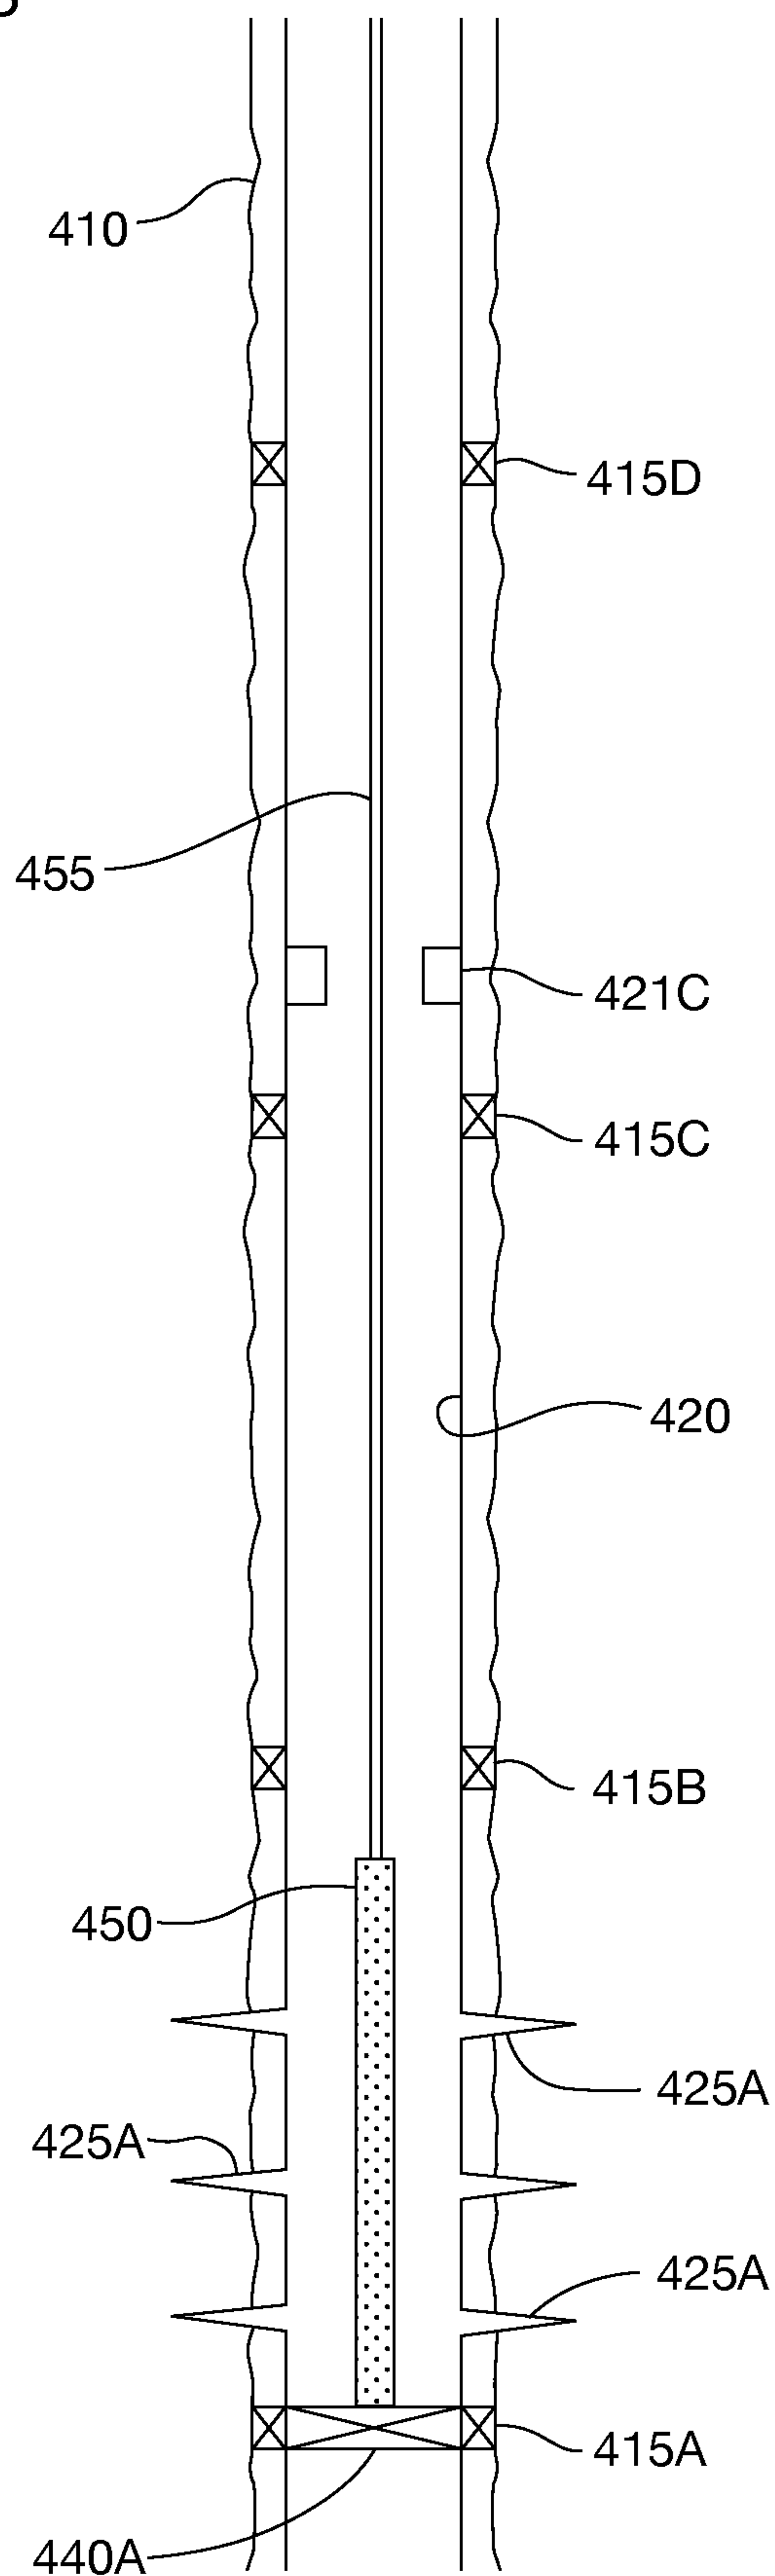


FIG. 4B

11/23

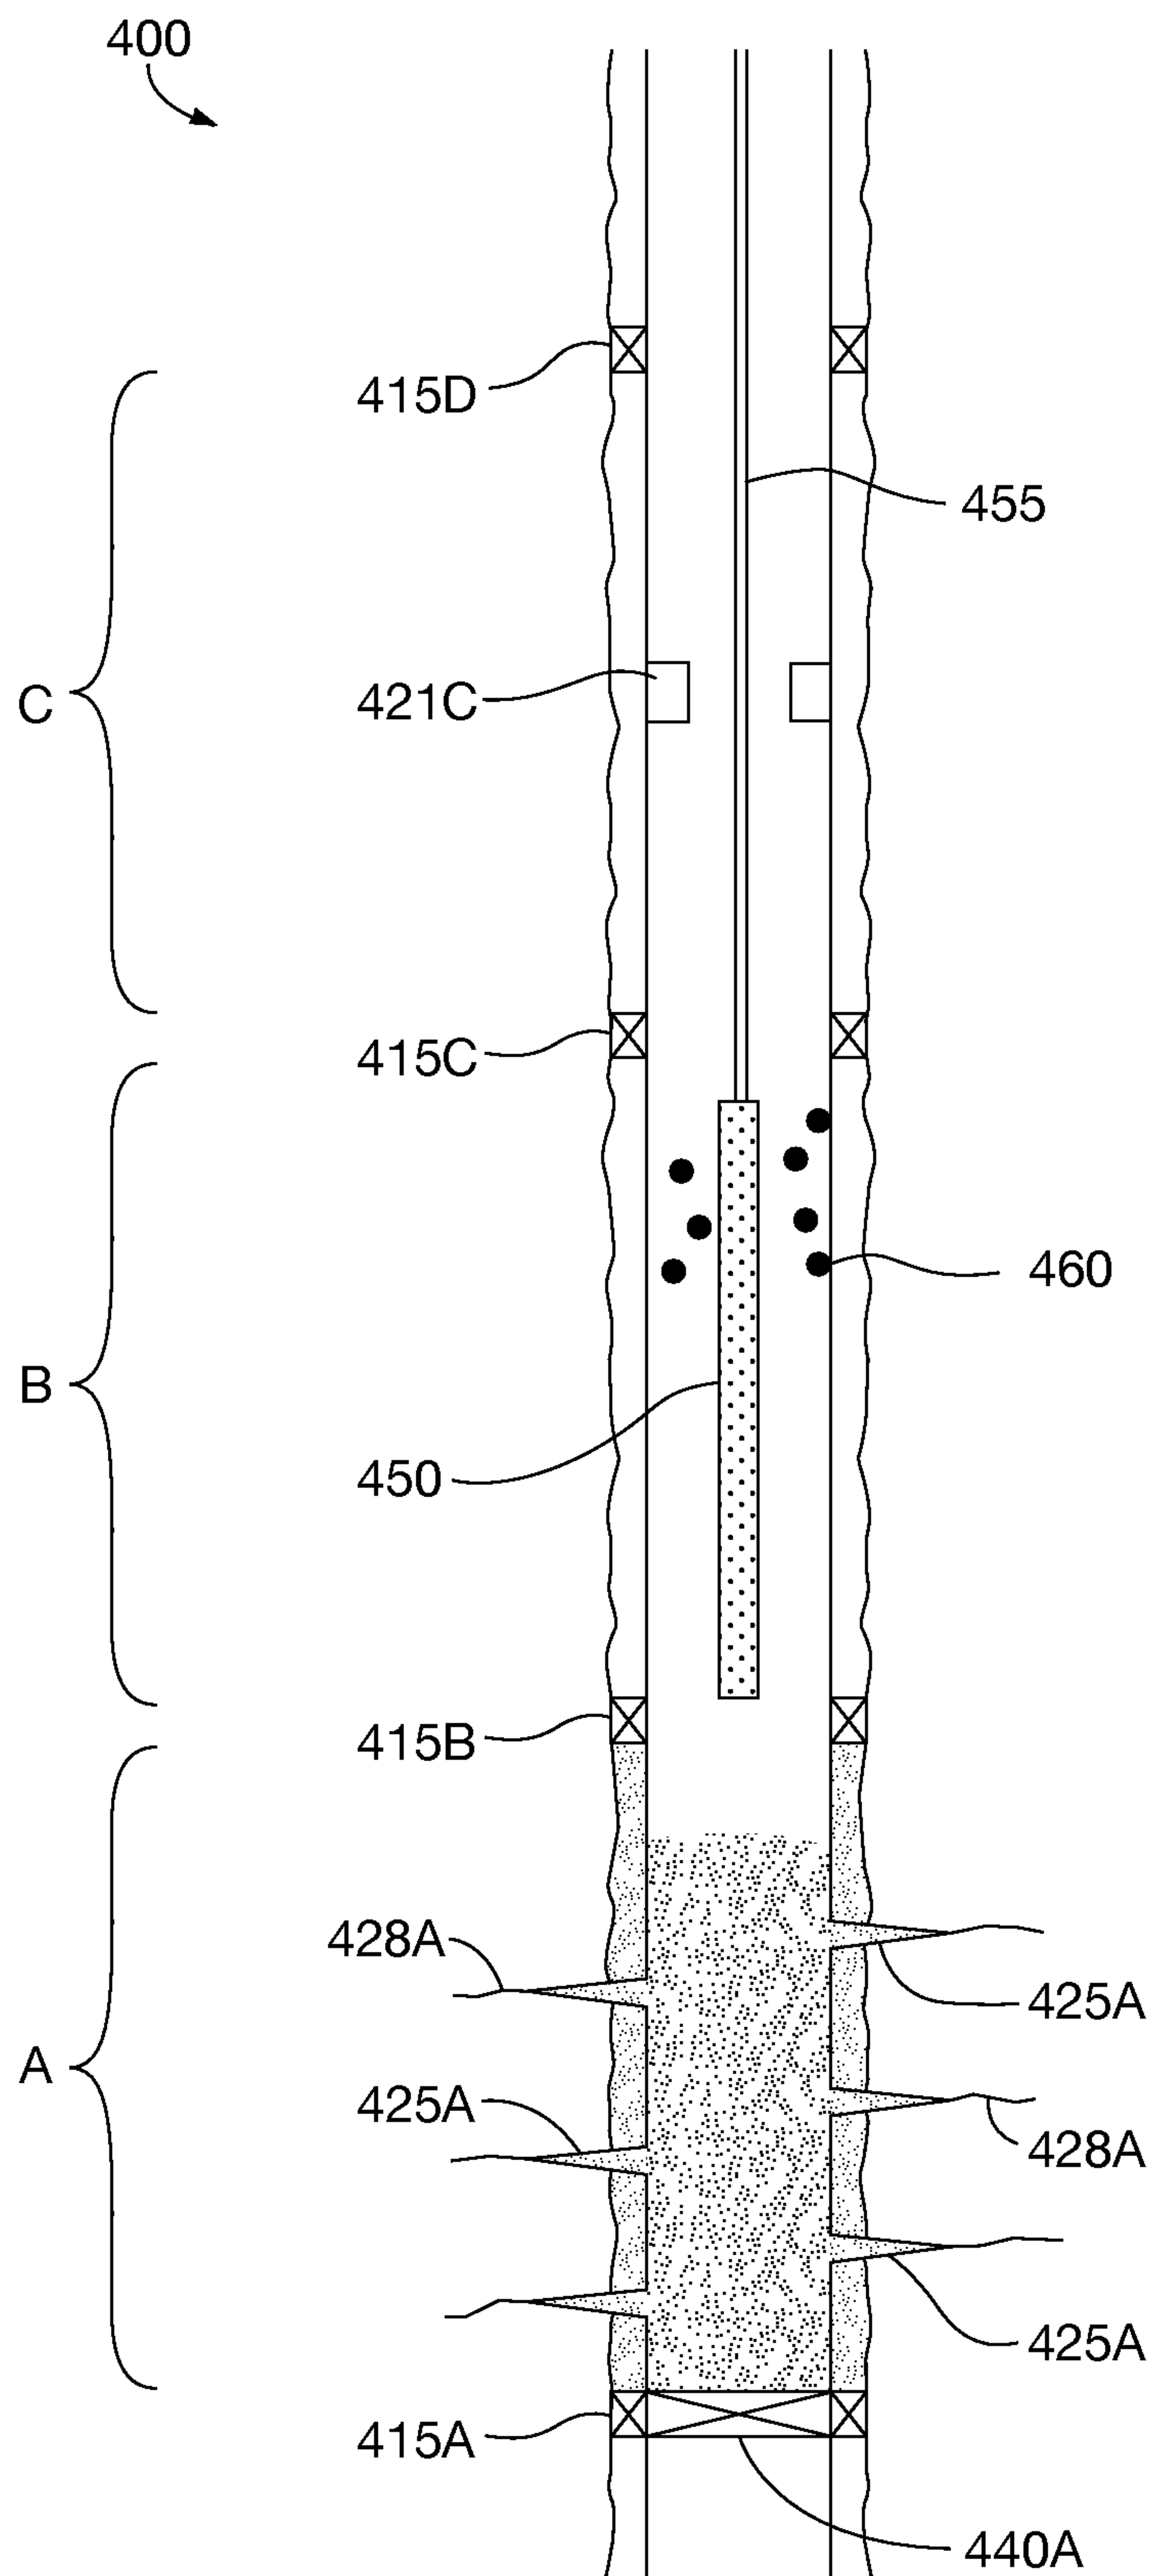


FIG. 4C

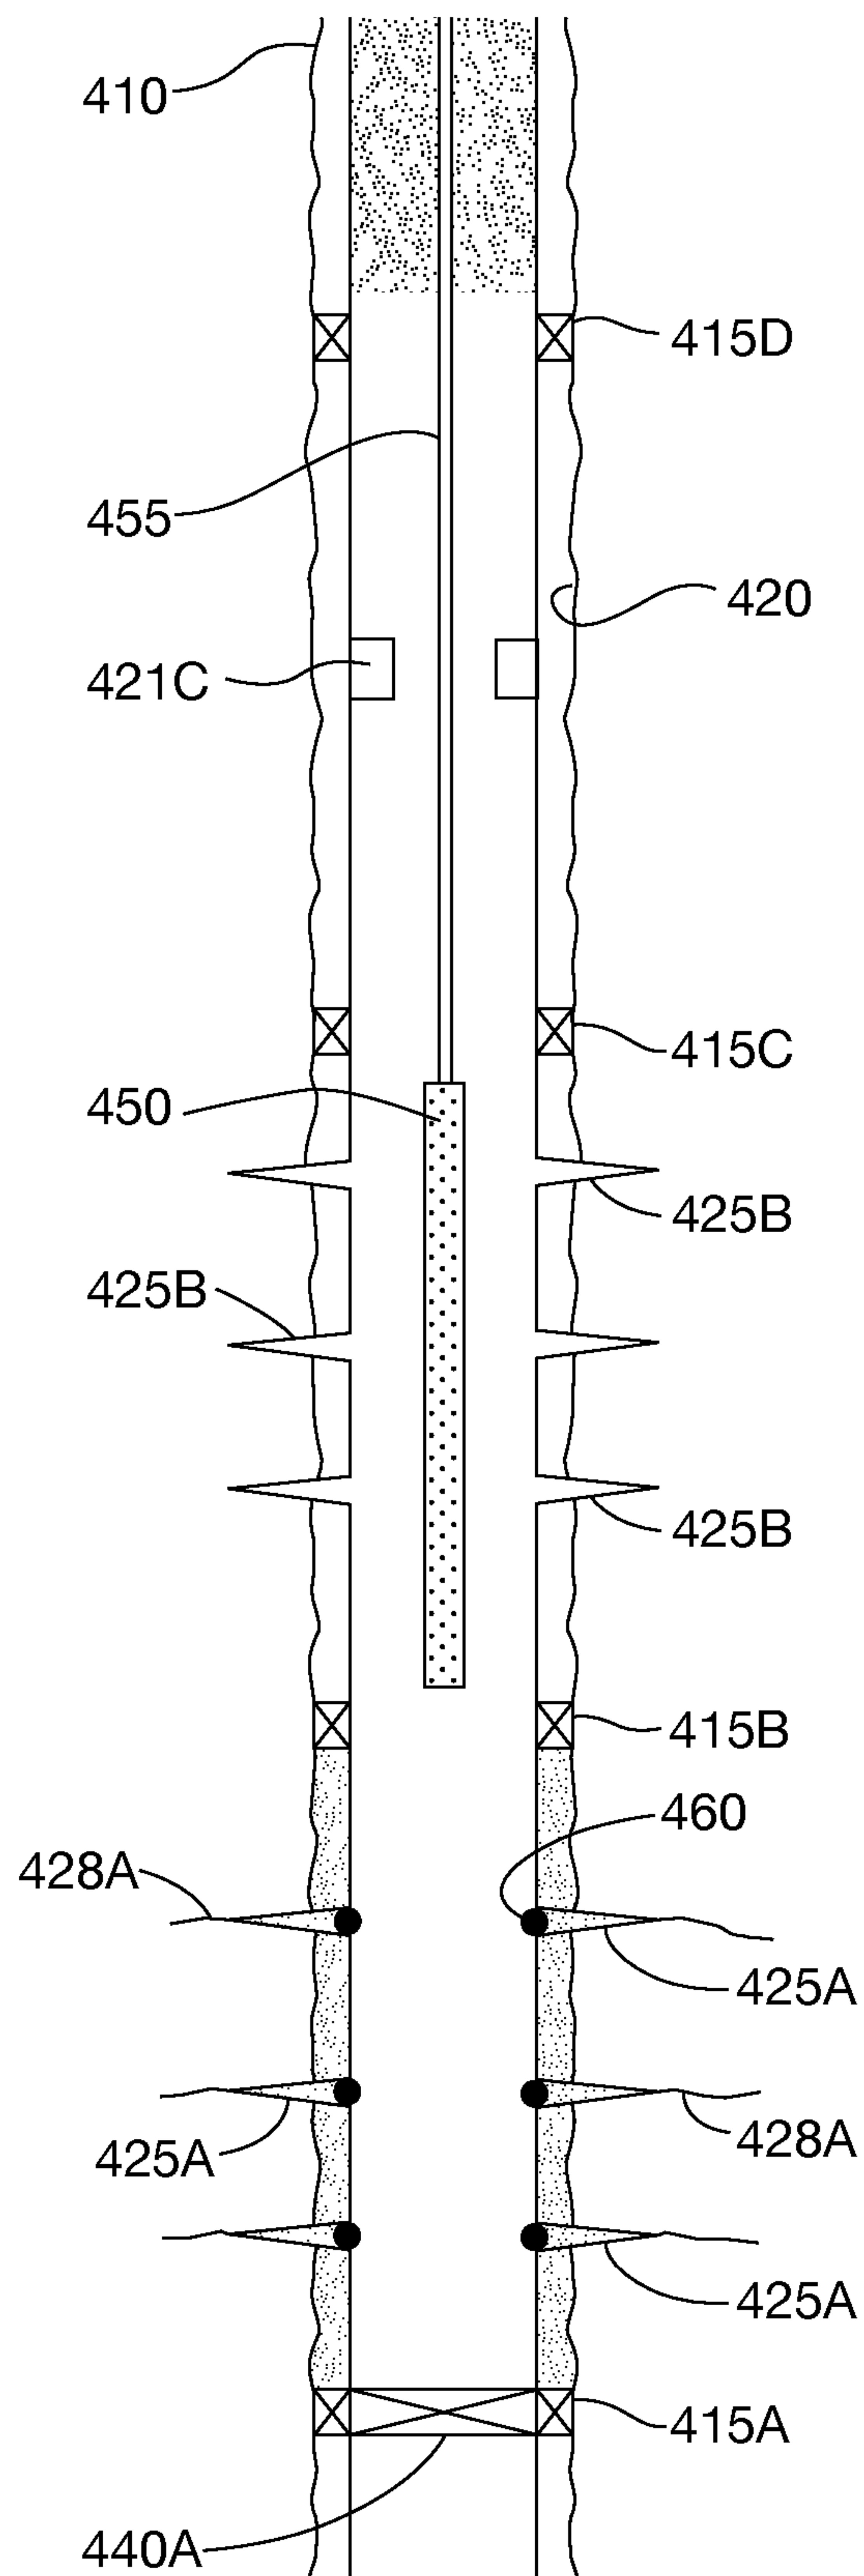


FIG. 4D

12/23

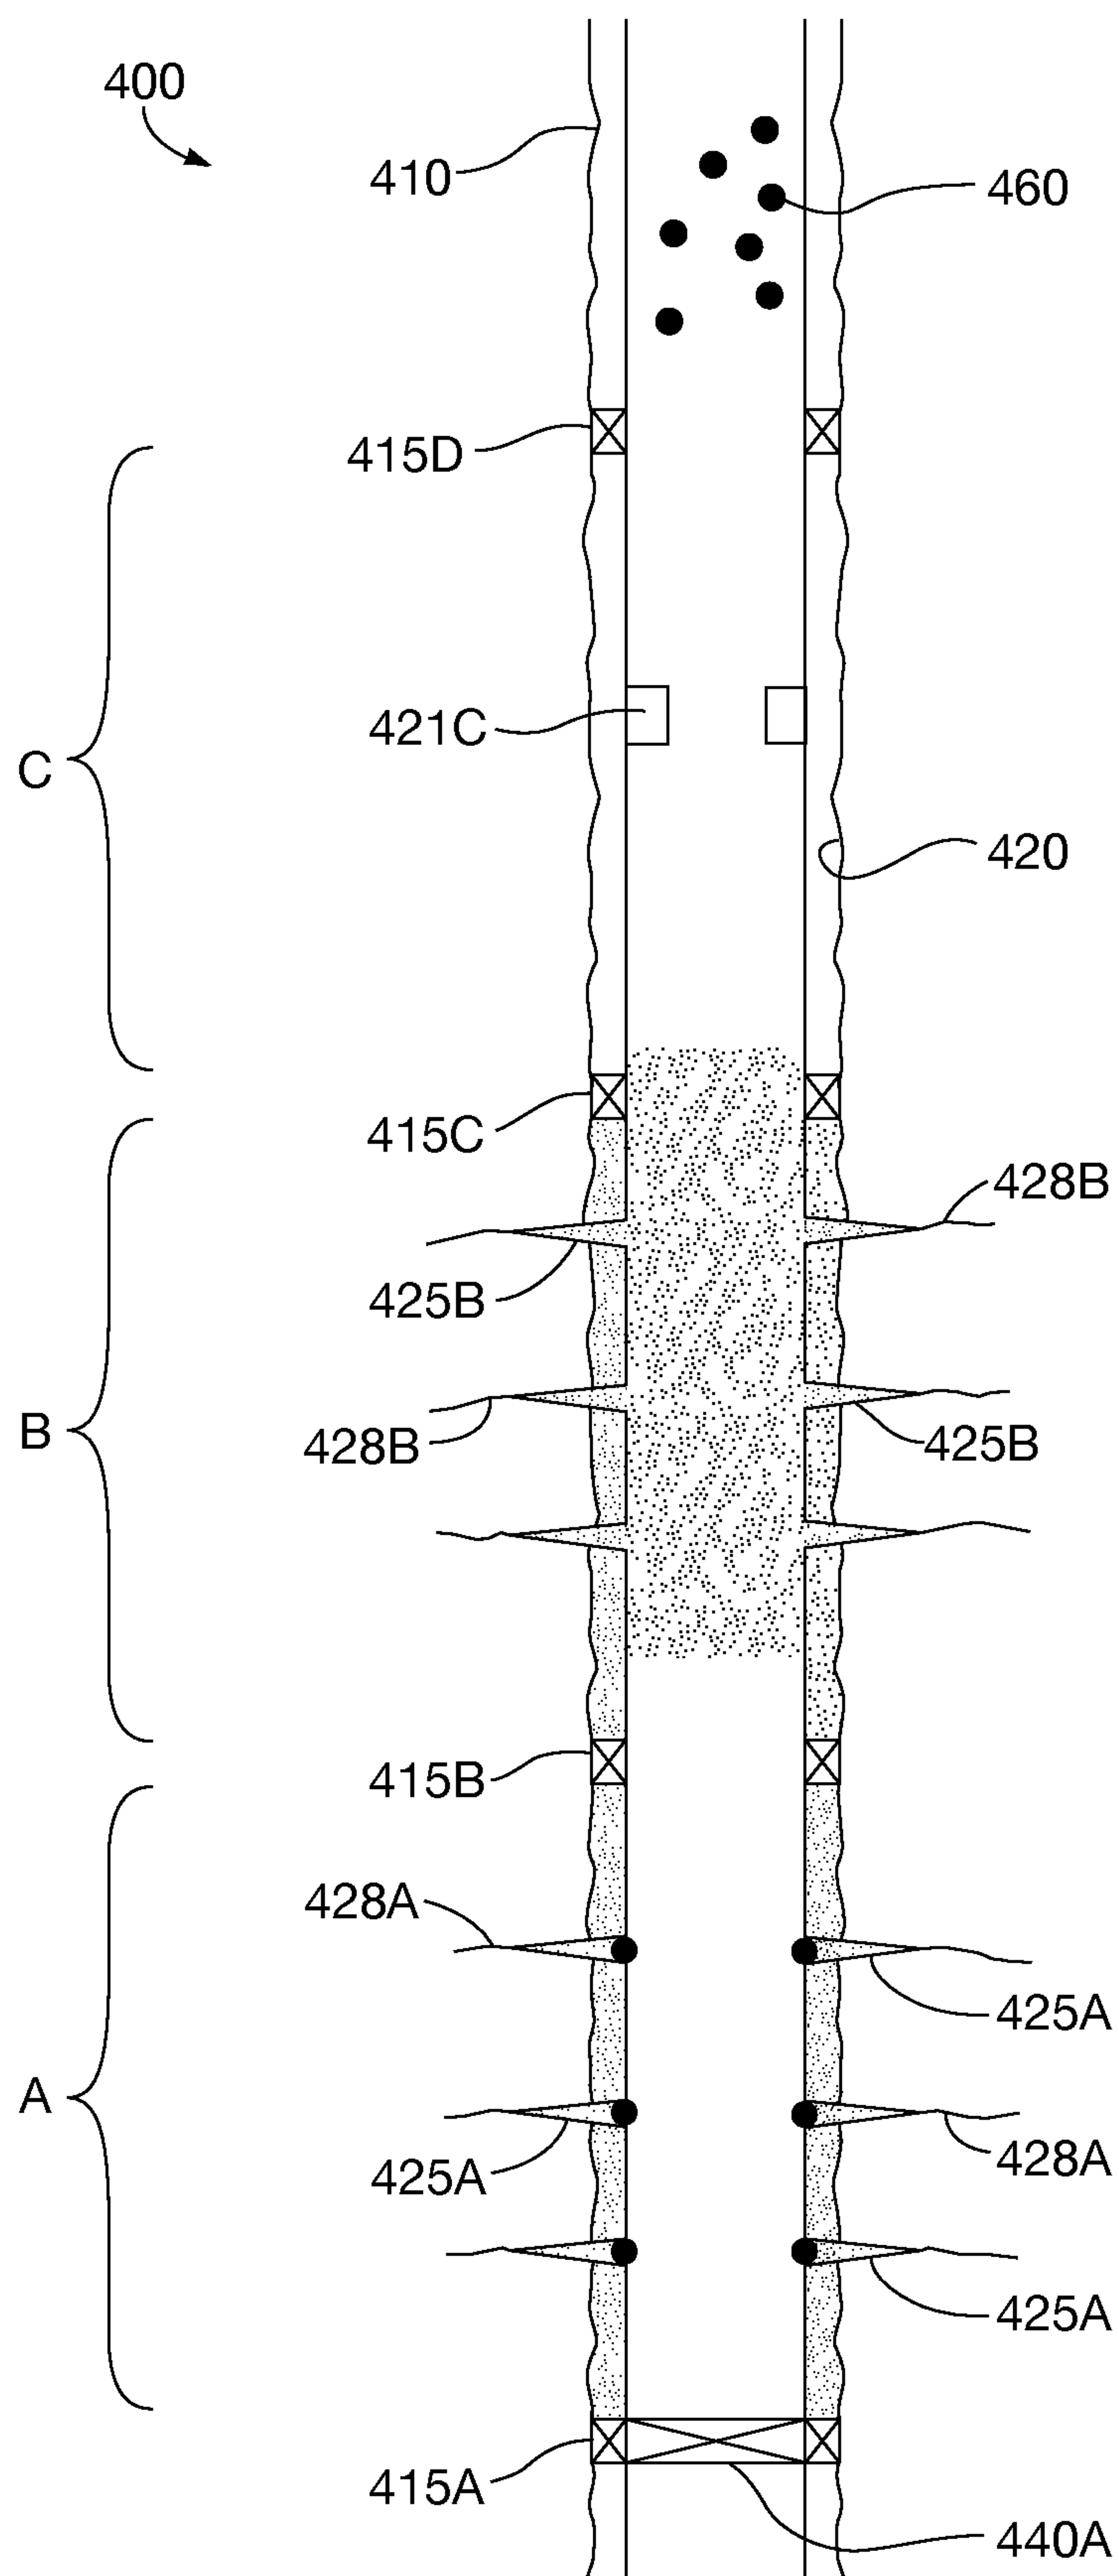


FIG. 4E

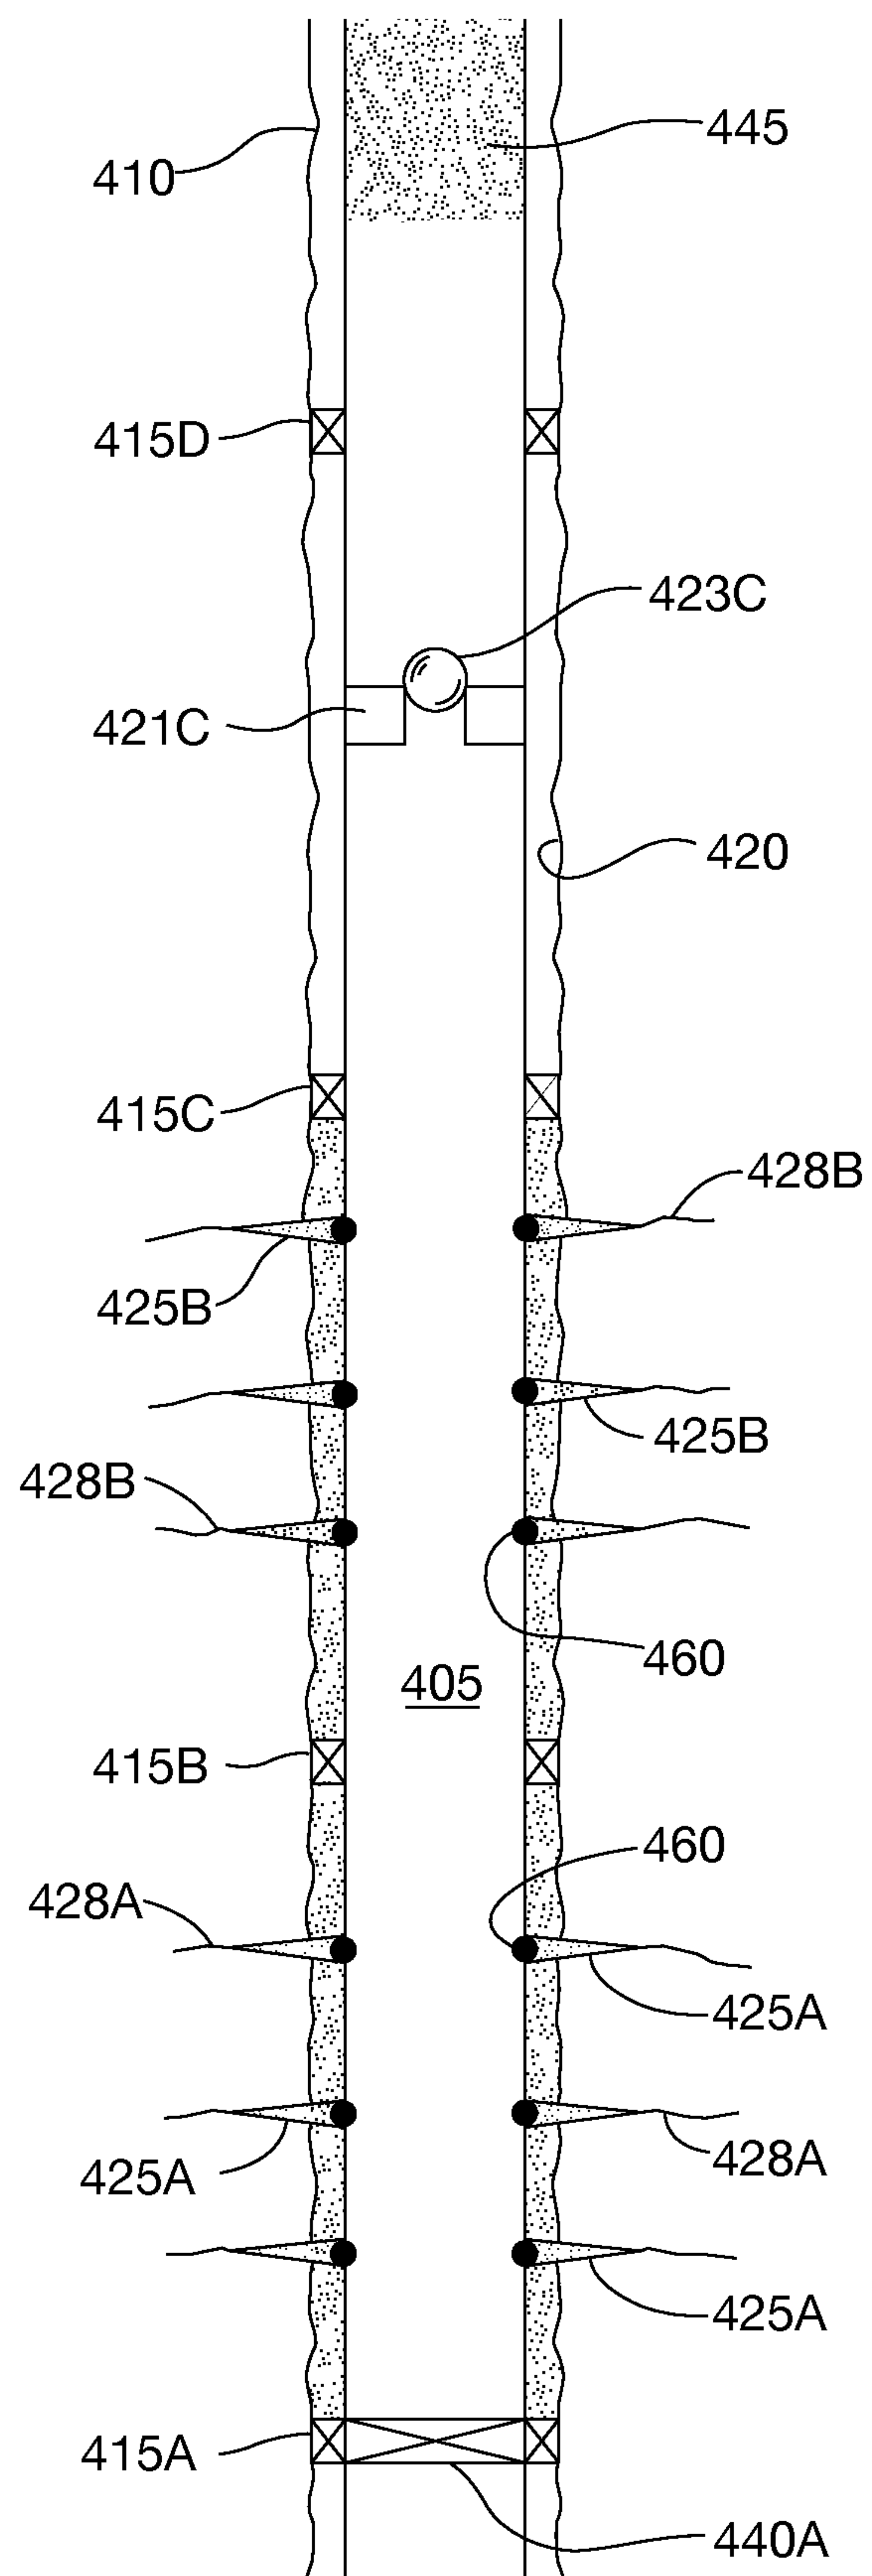


FIG. 4F

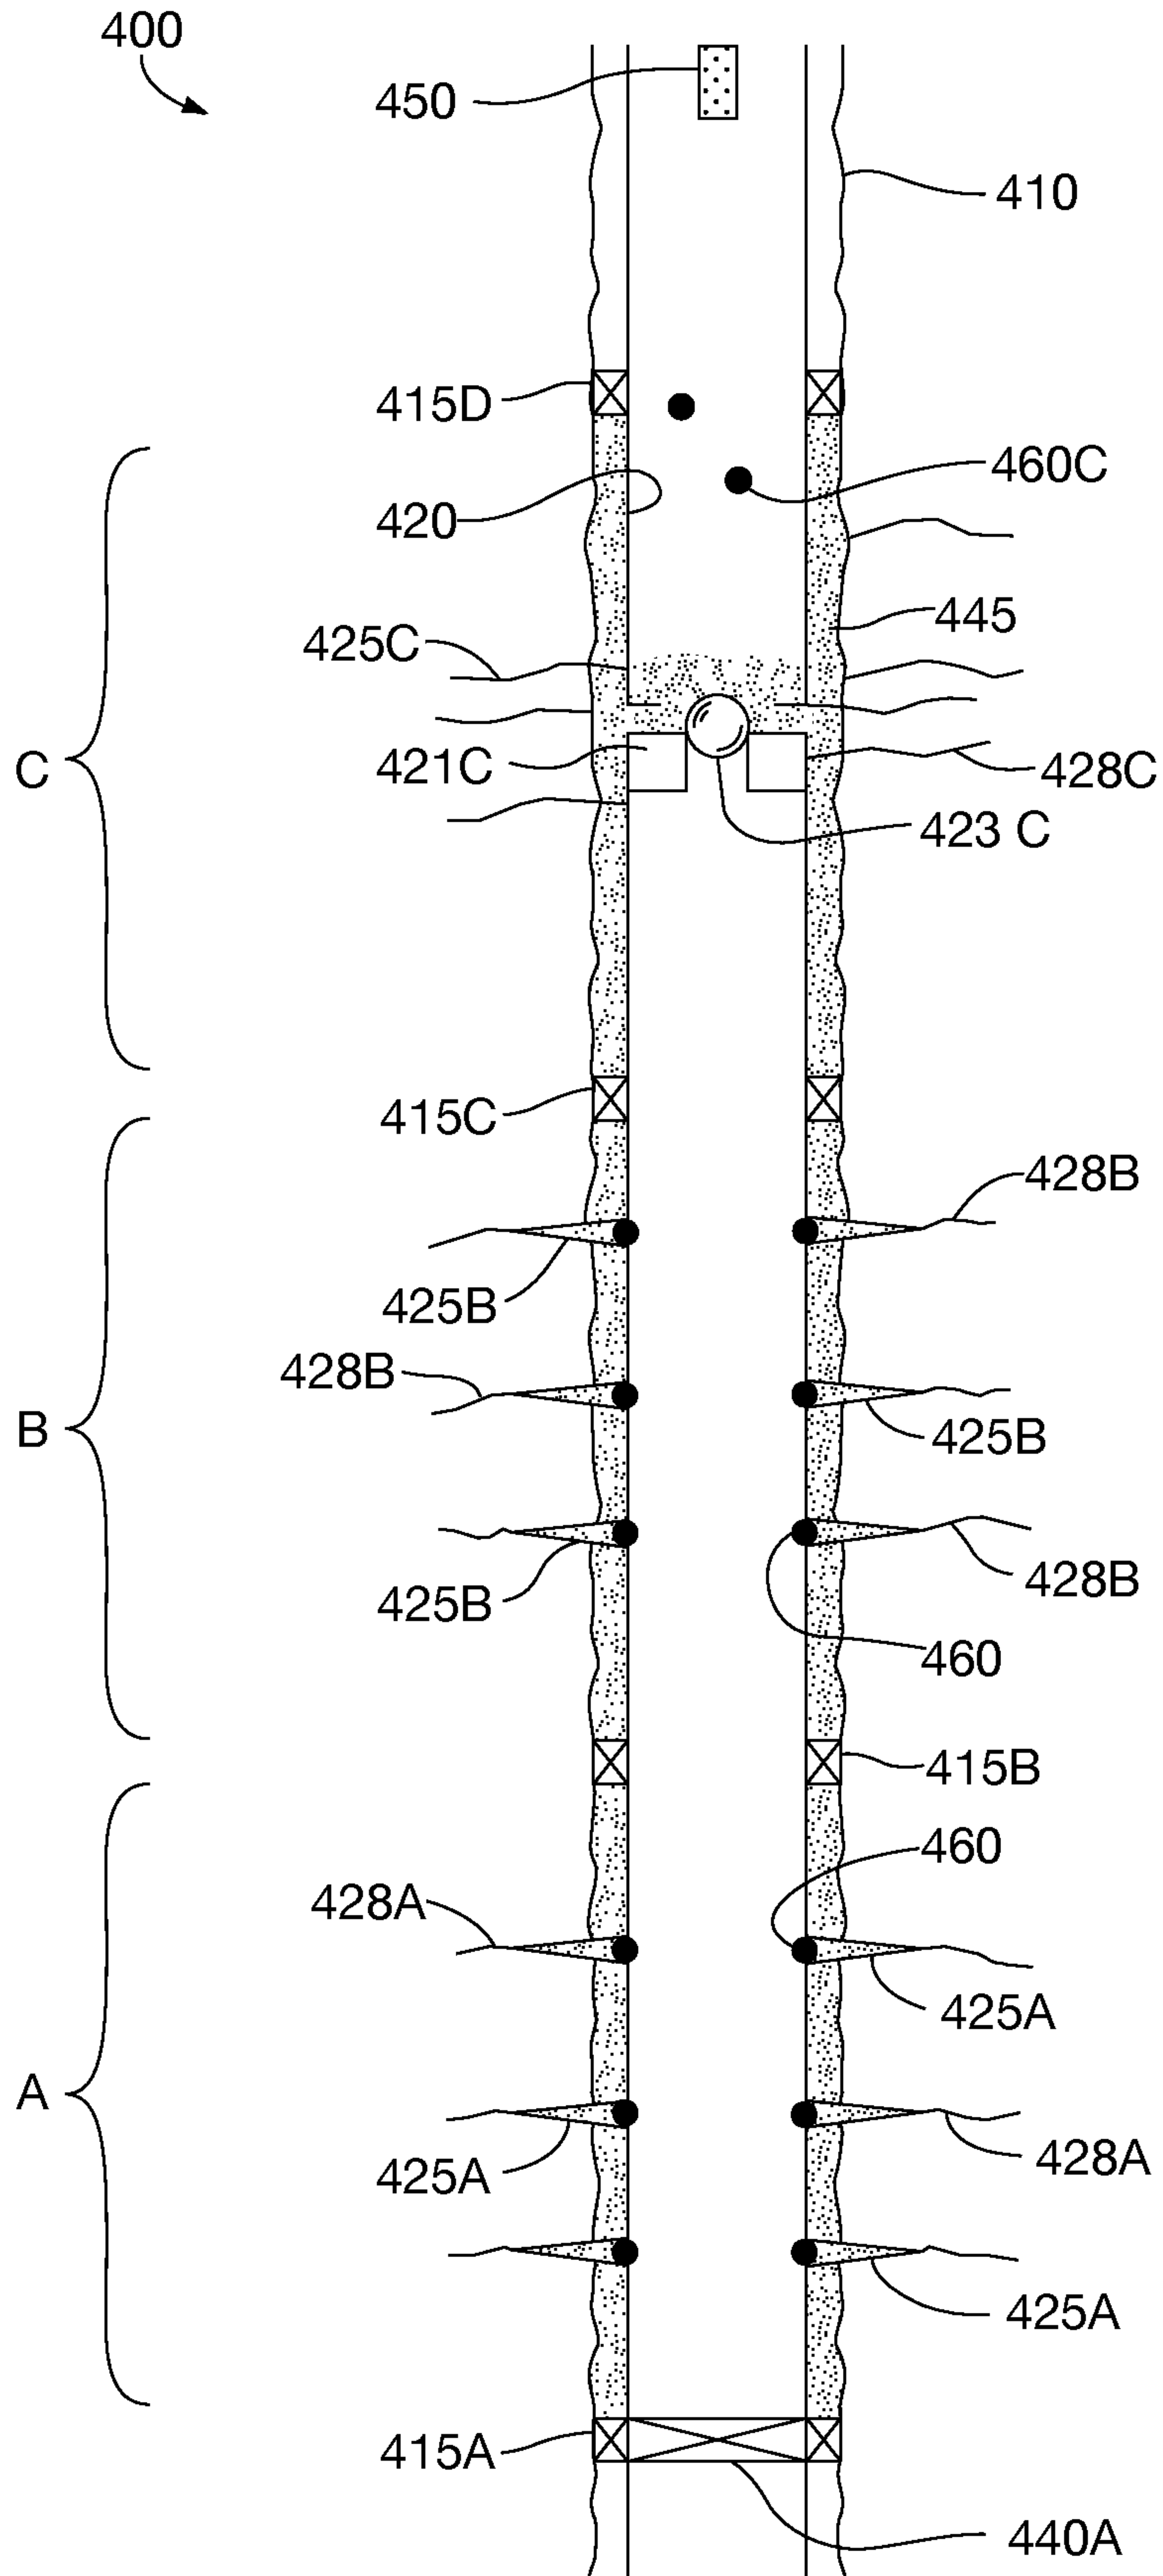


FIG. 4G


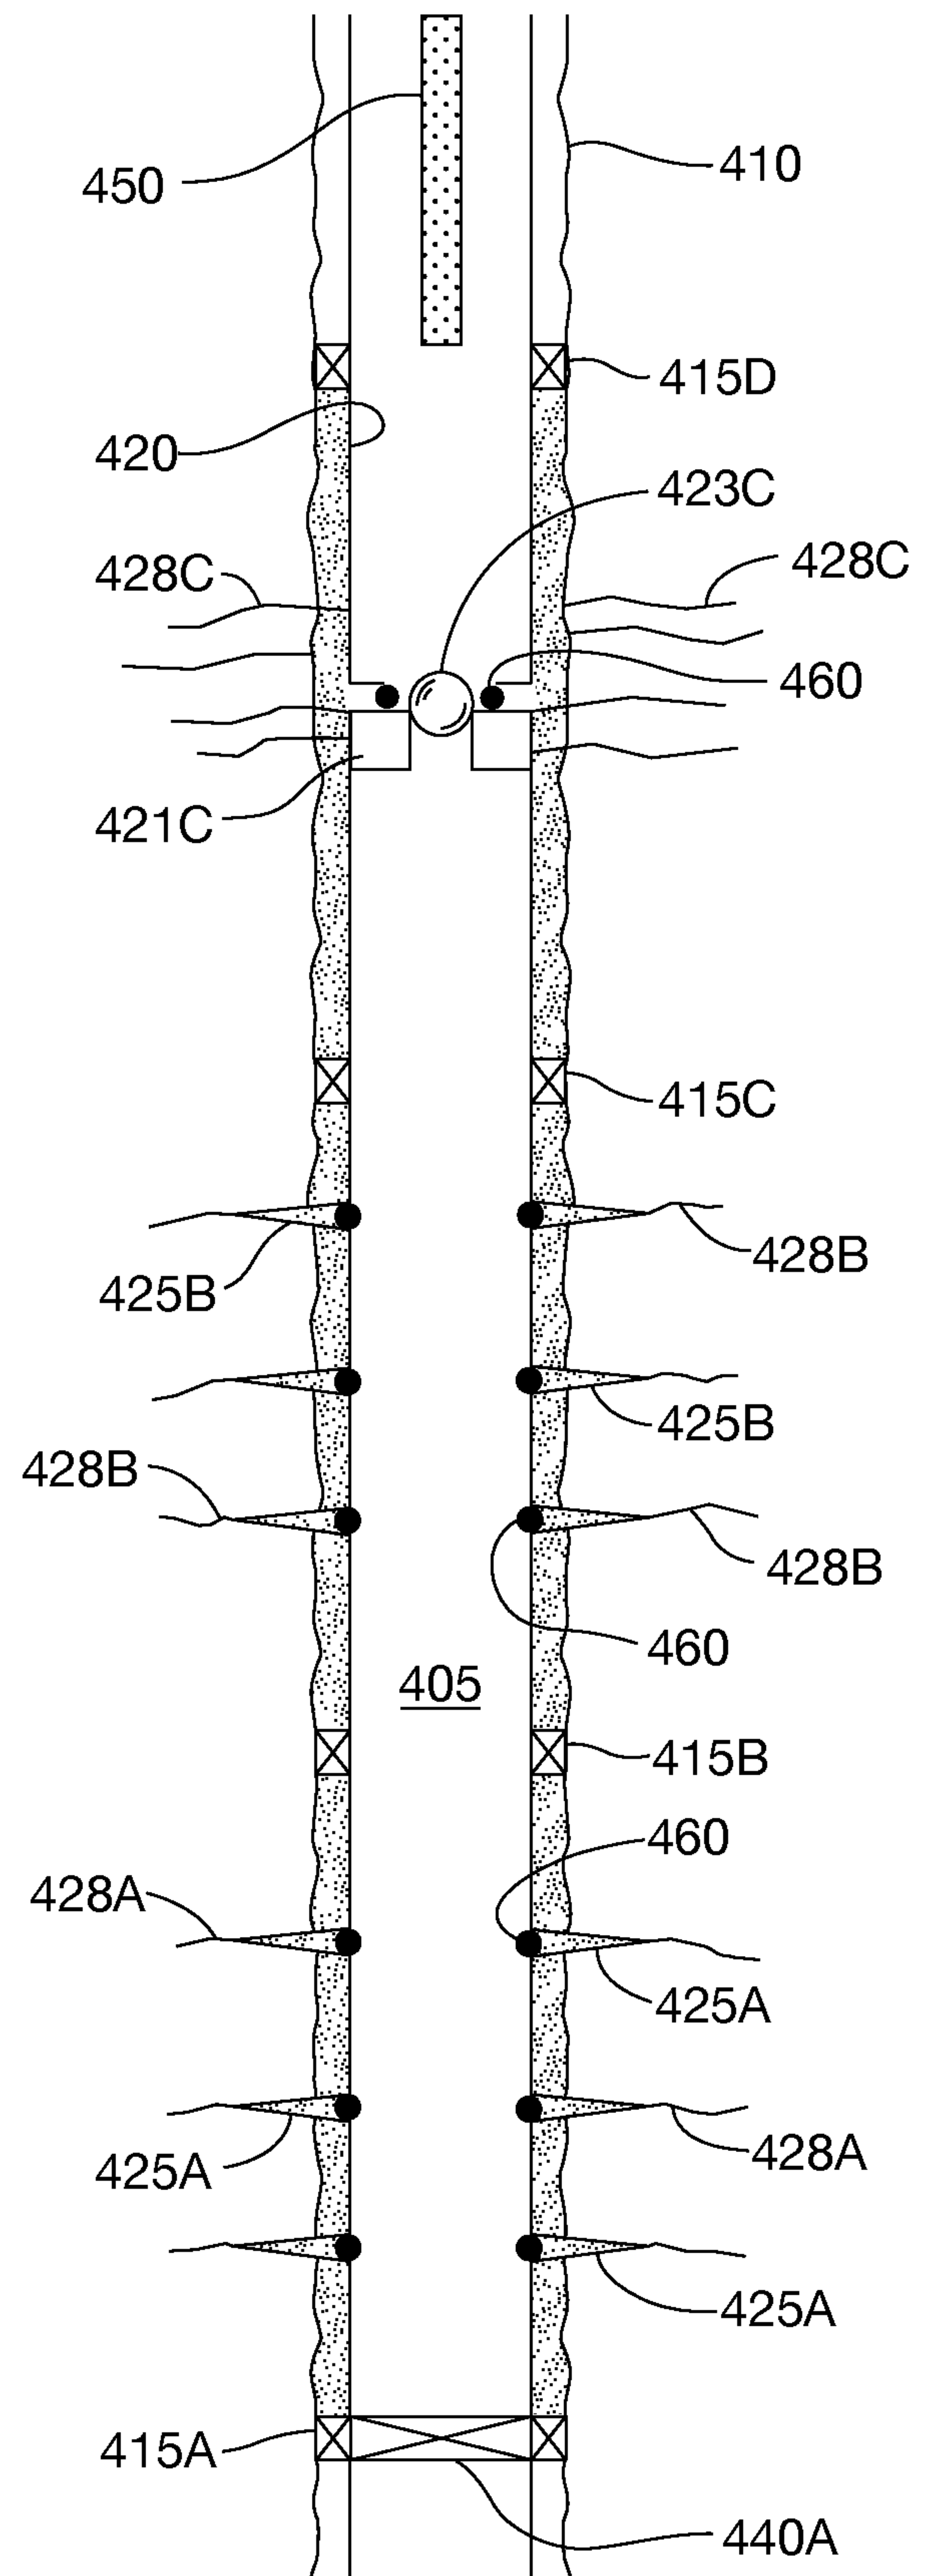


FIG. 4H

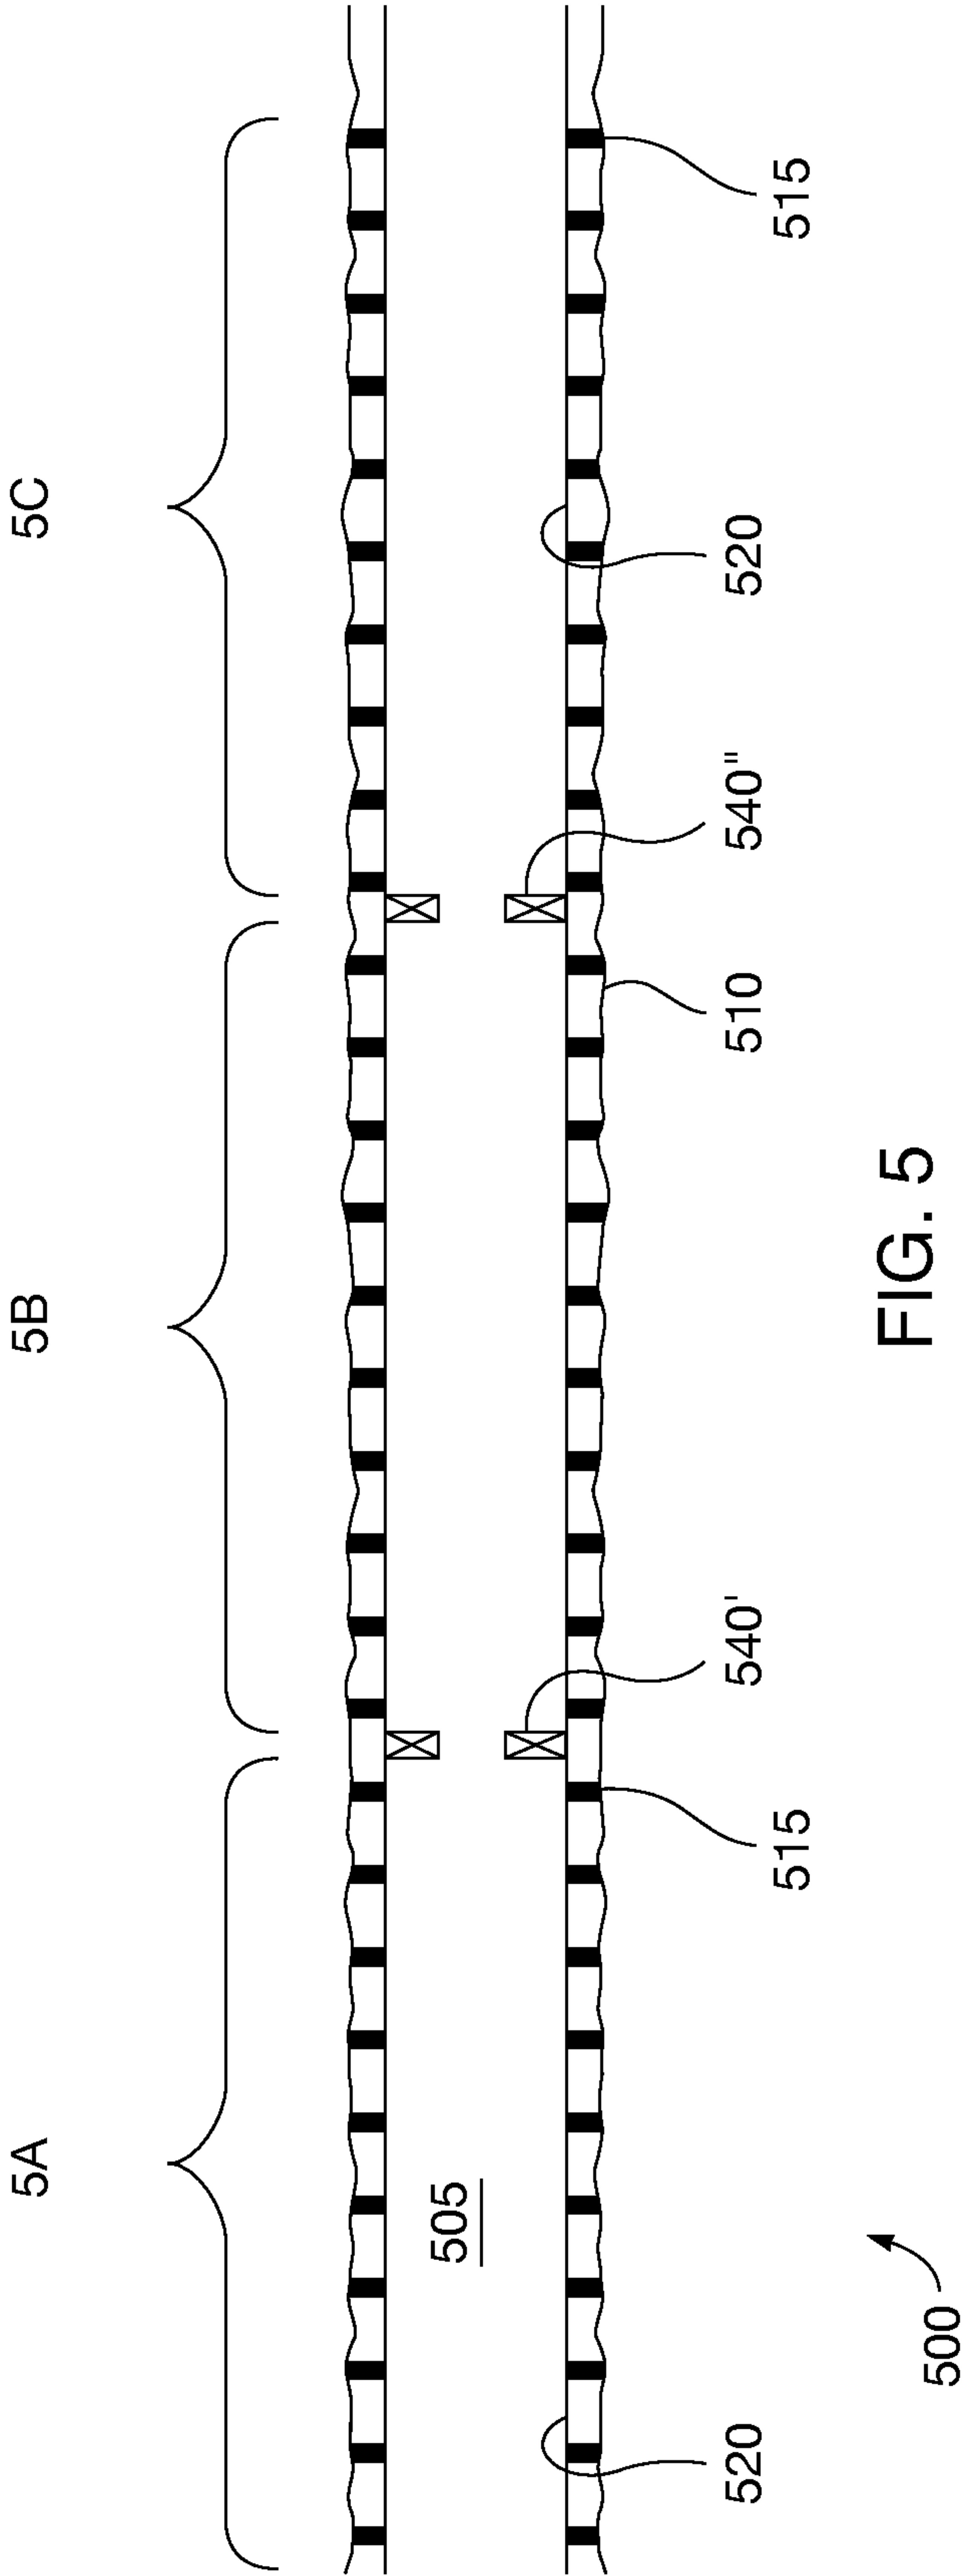

15/23

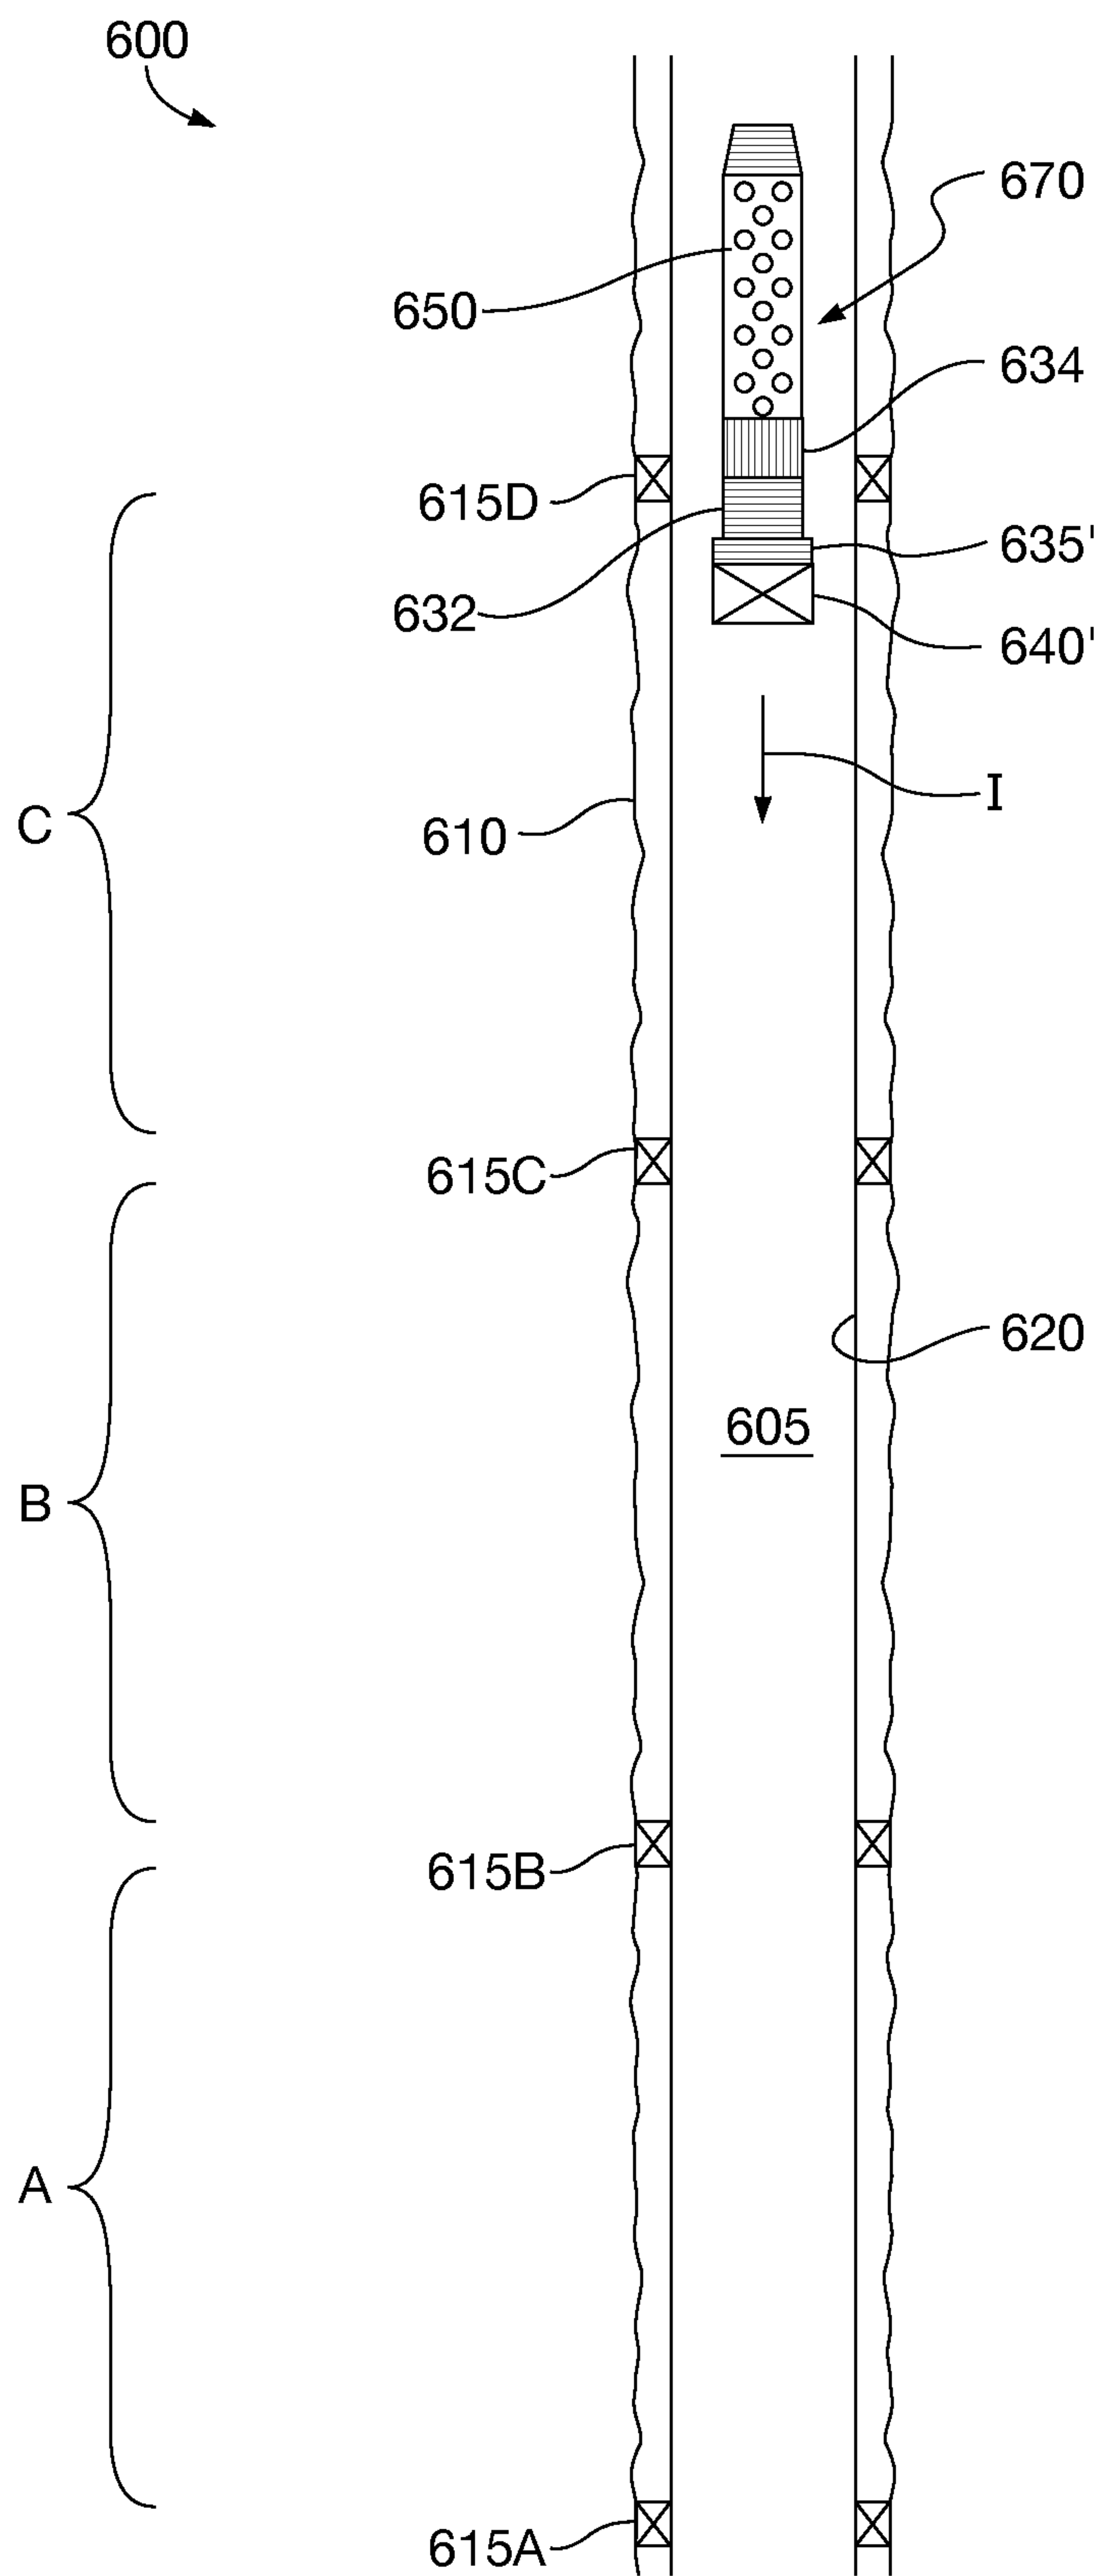


FIG. 6A

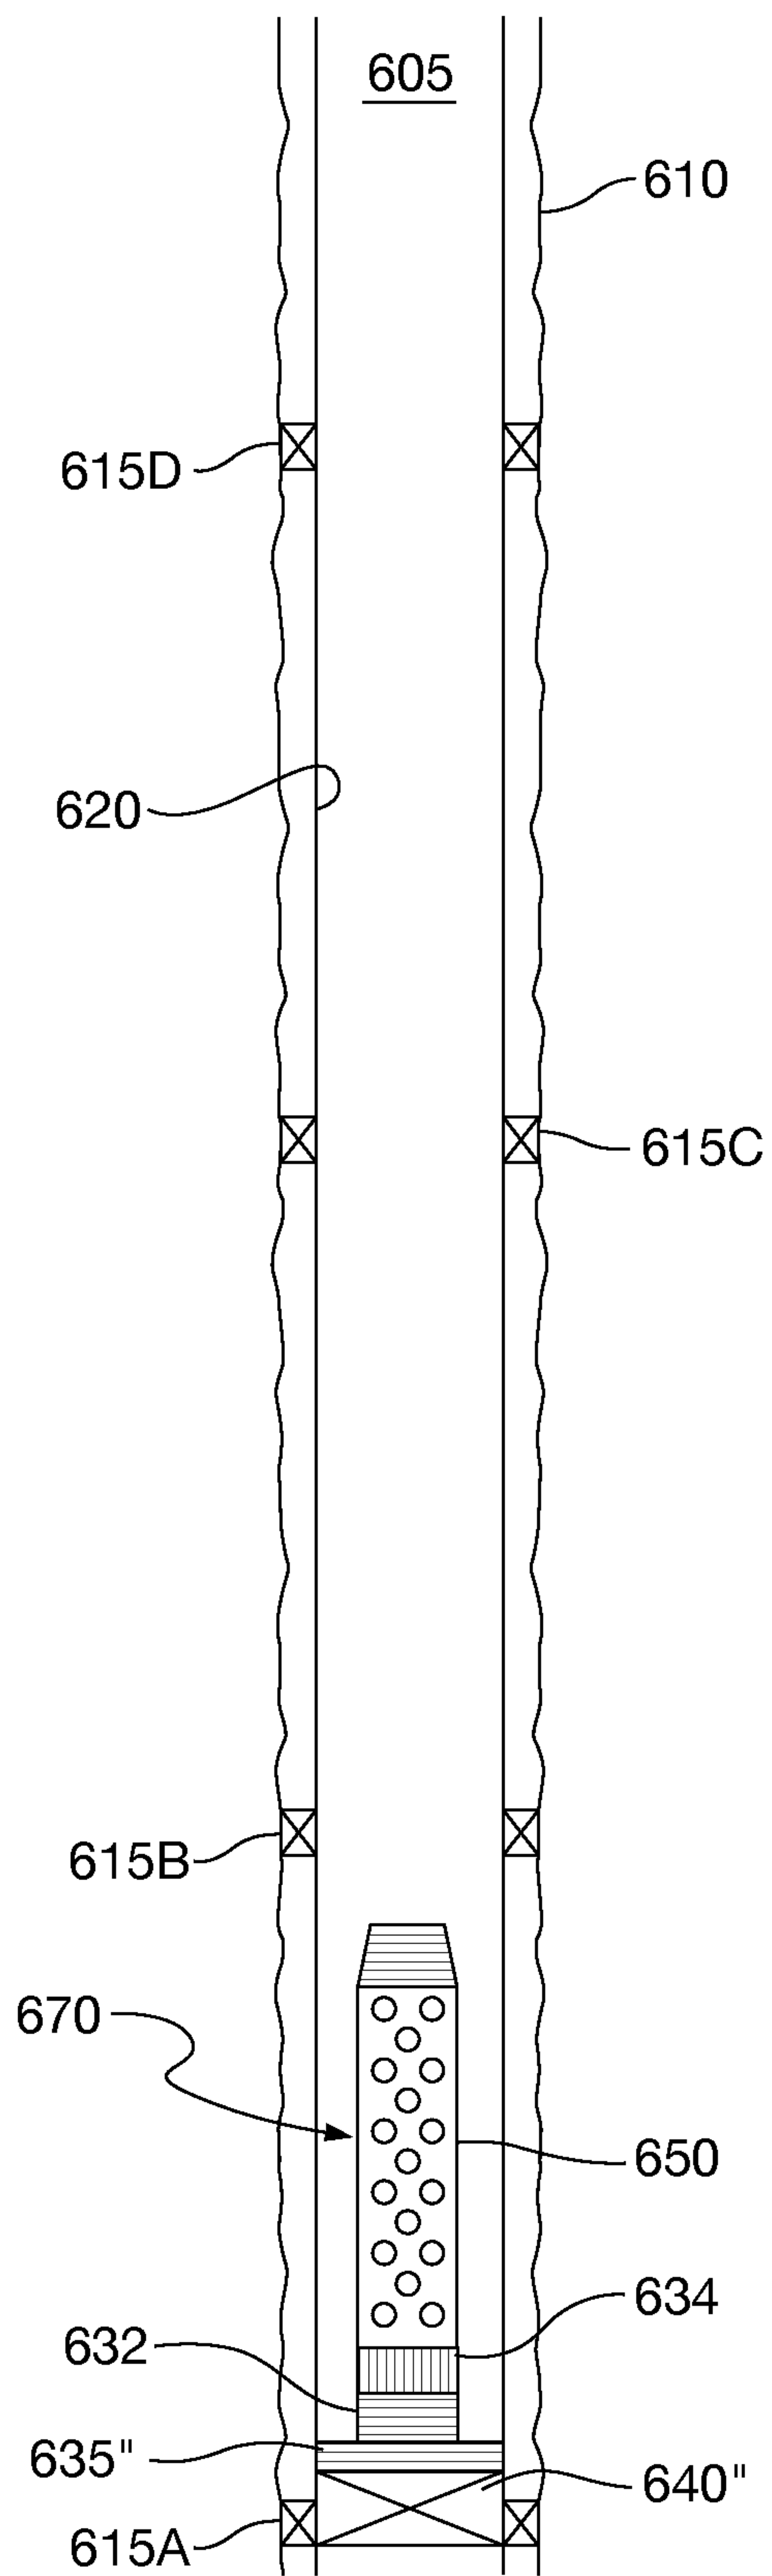


FIG. 6B

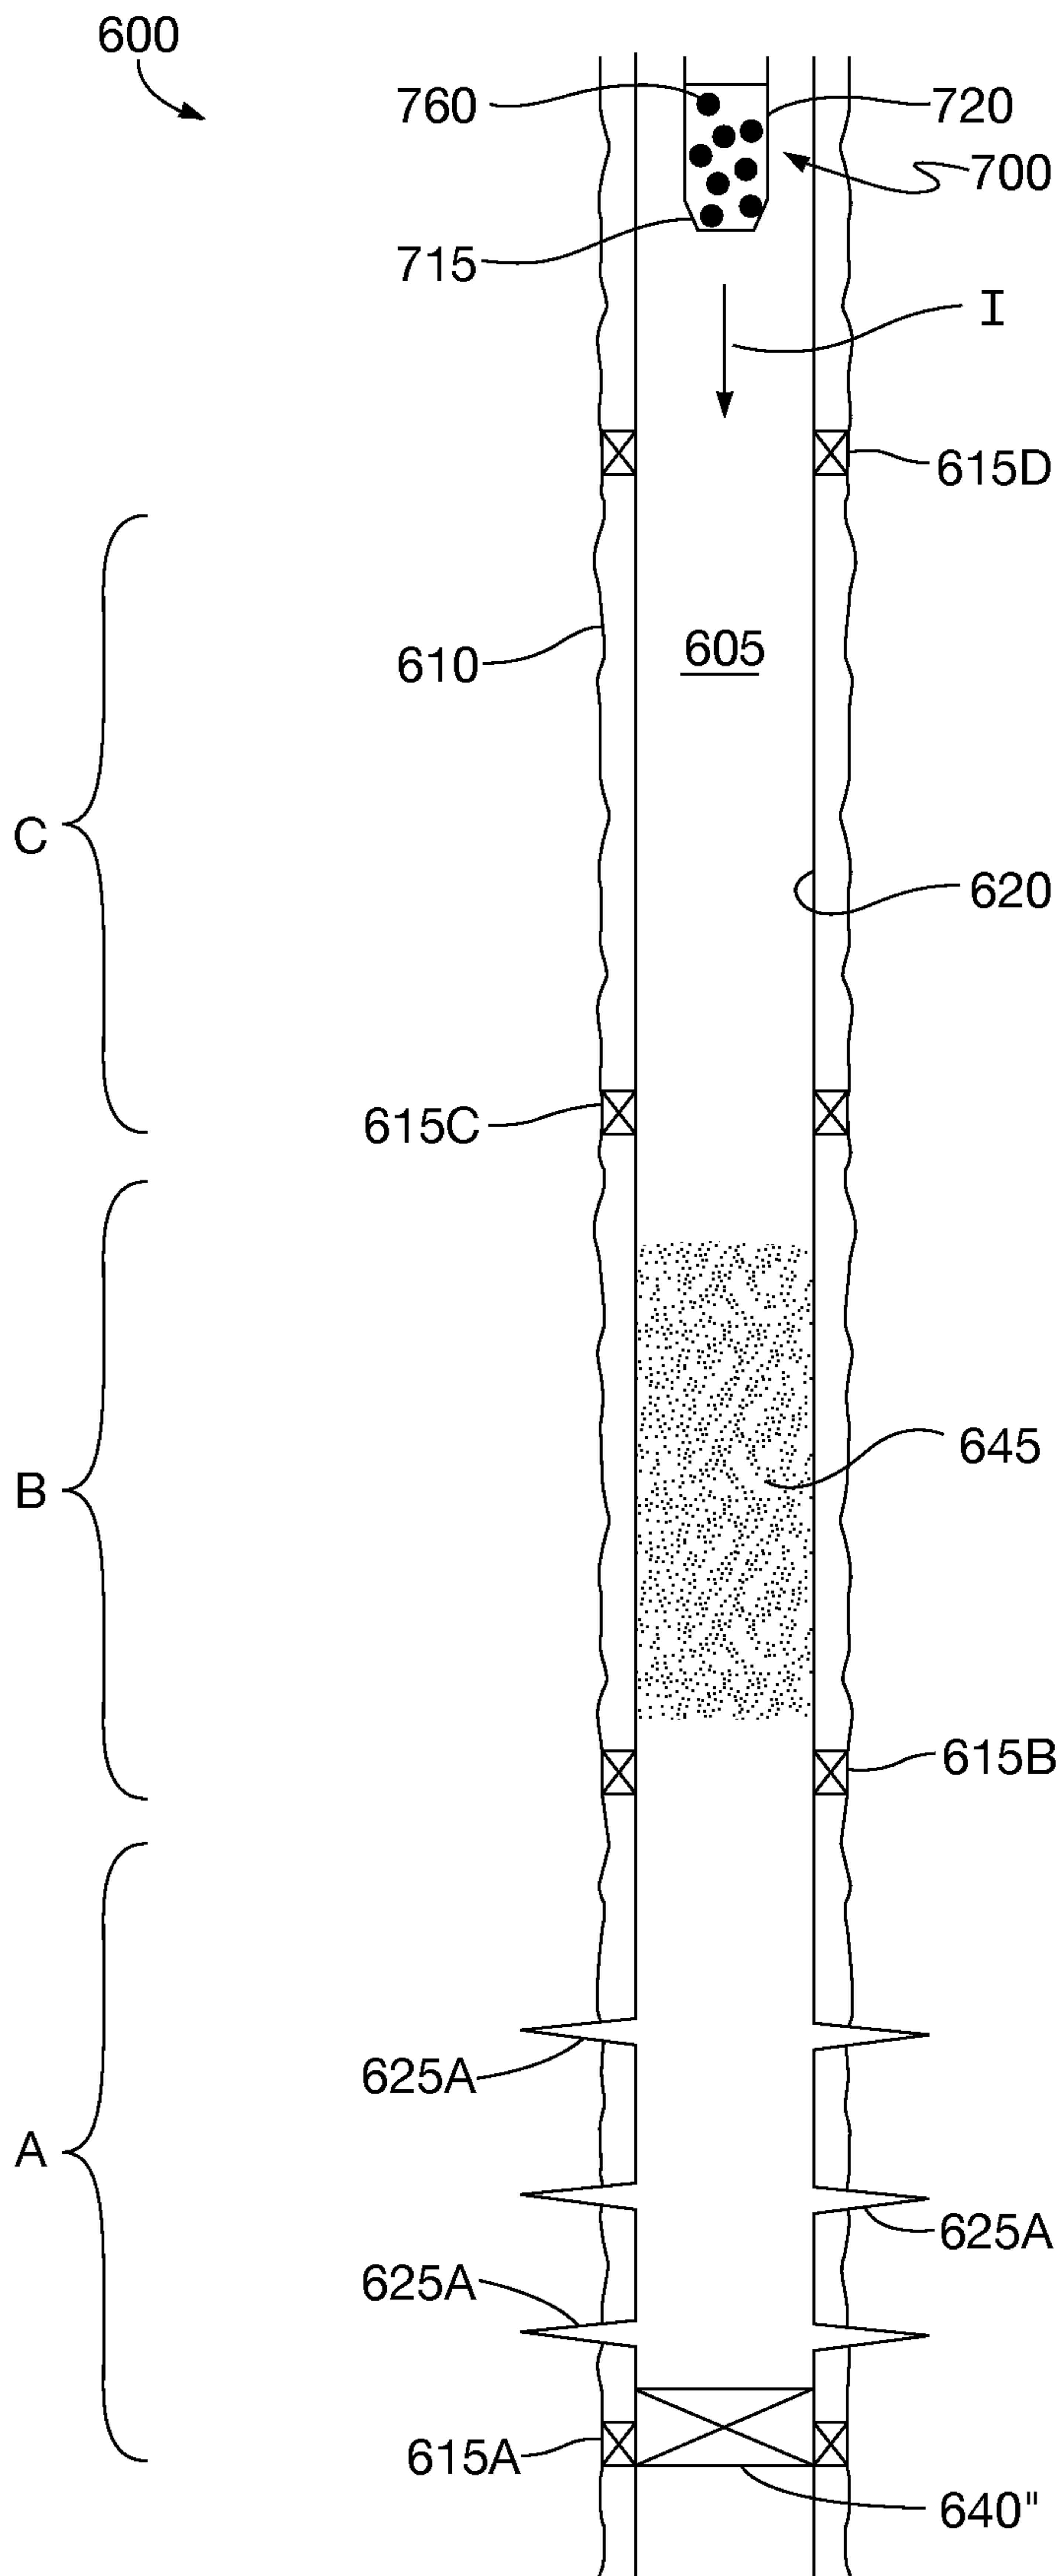


FIG. 6C

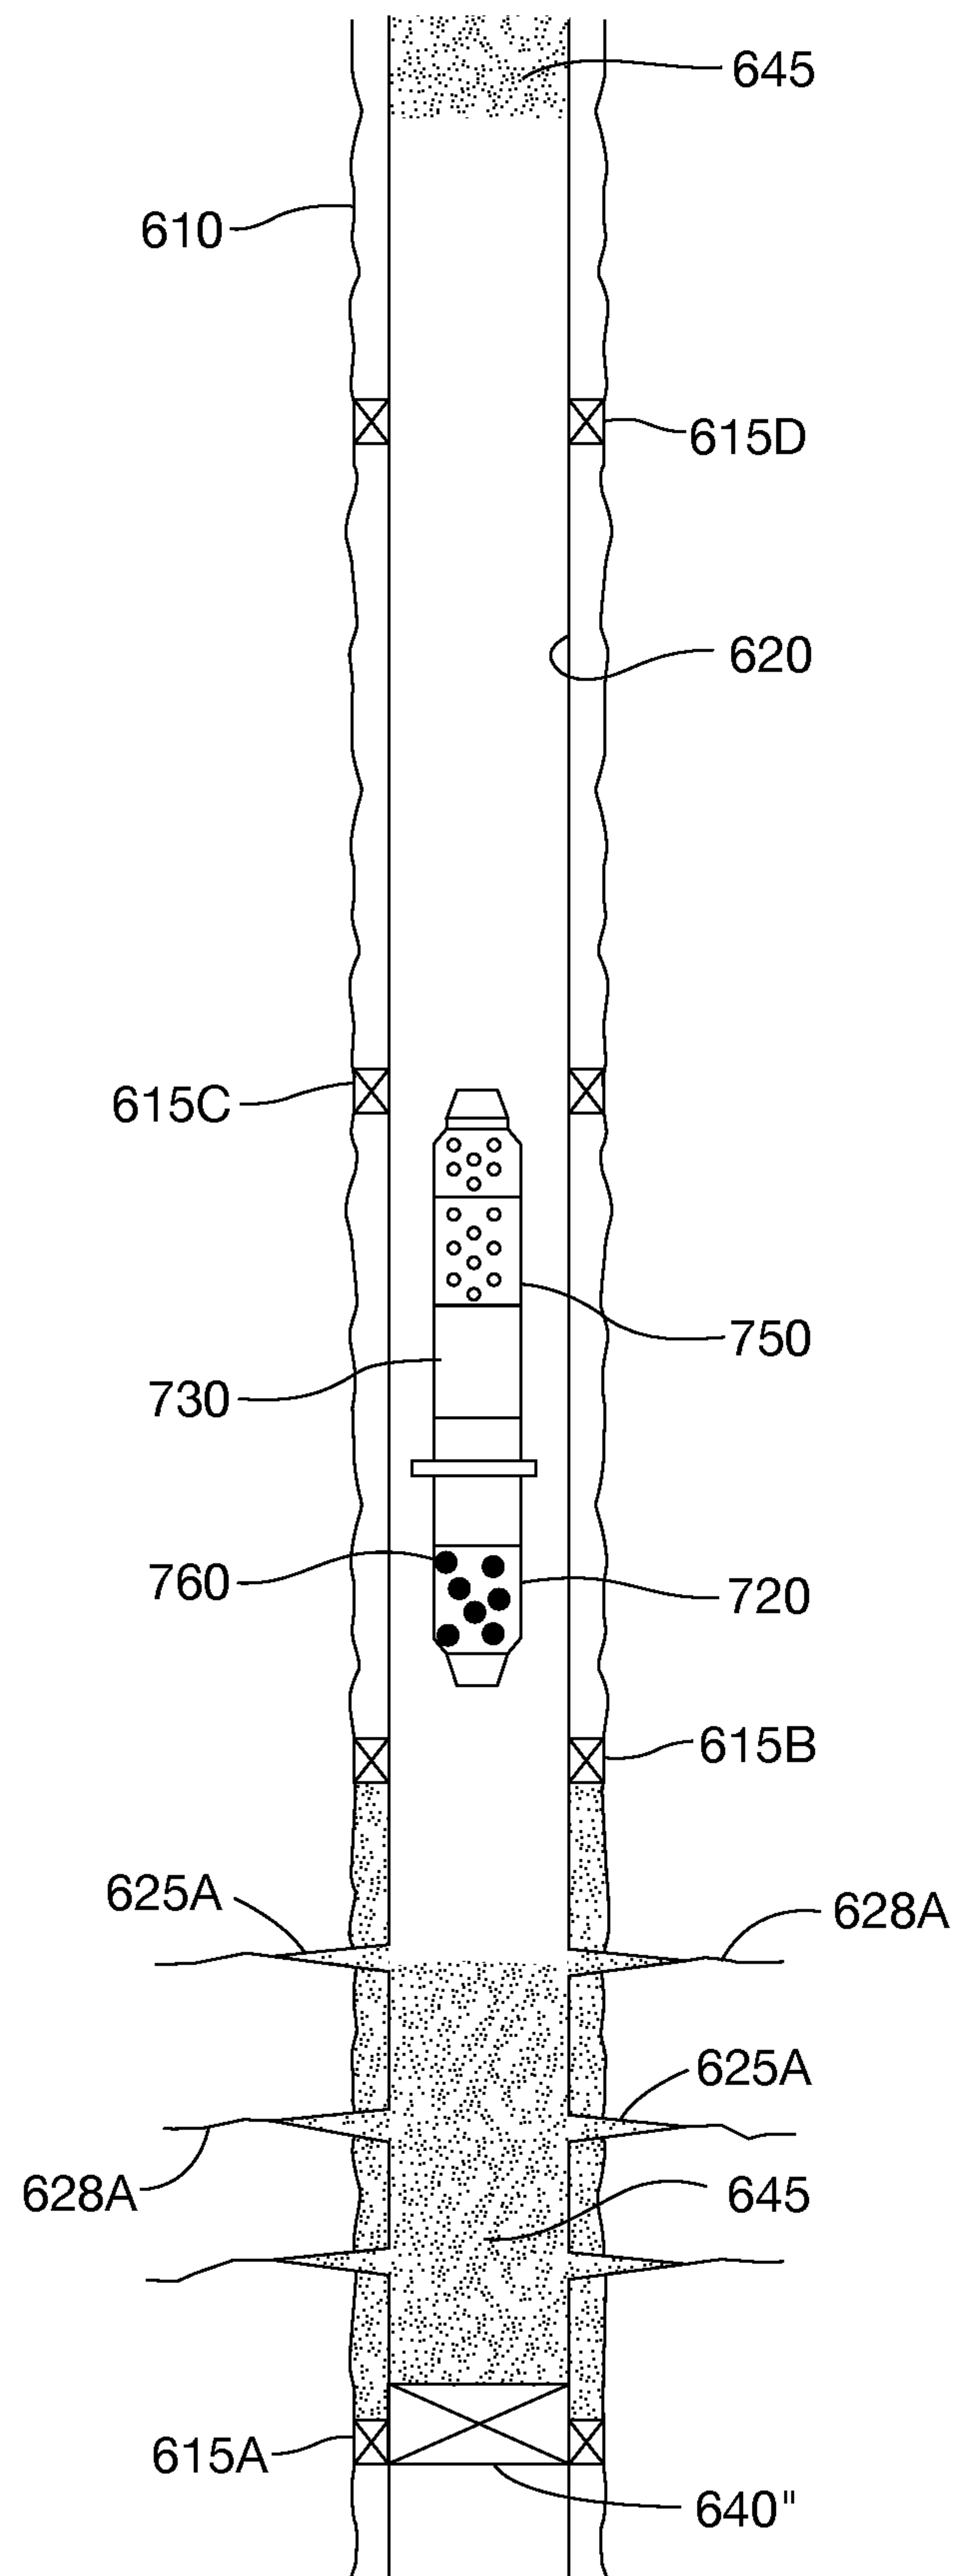


FIG. 6D

17/23

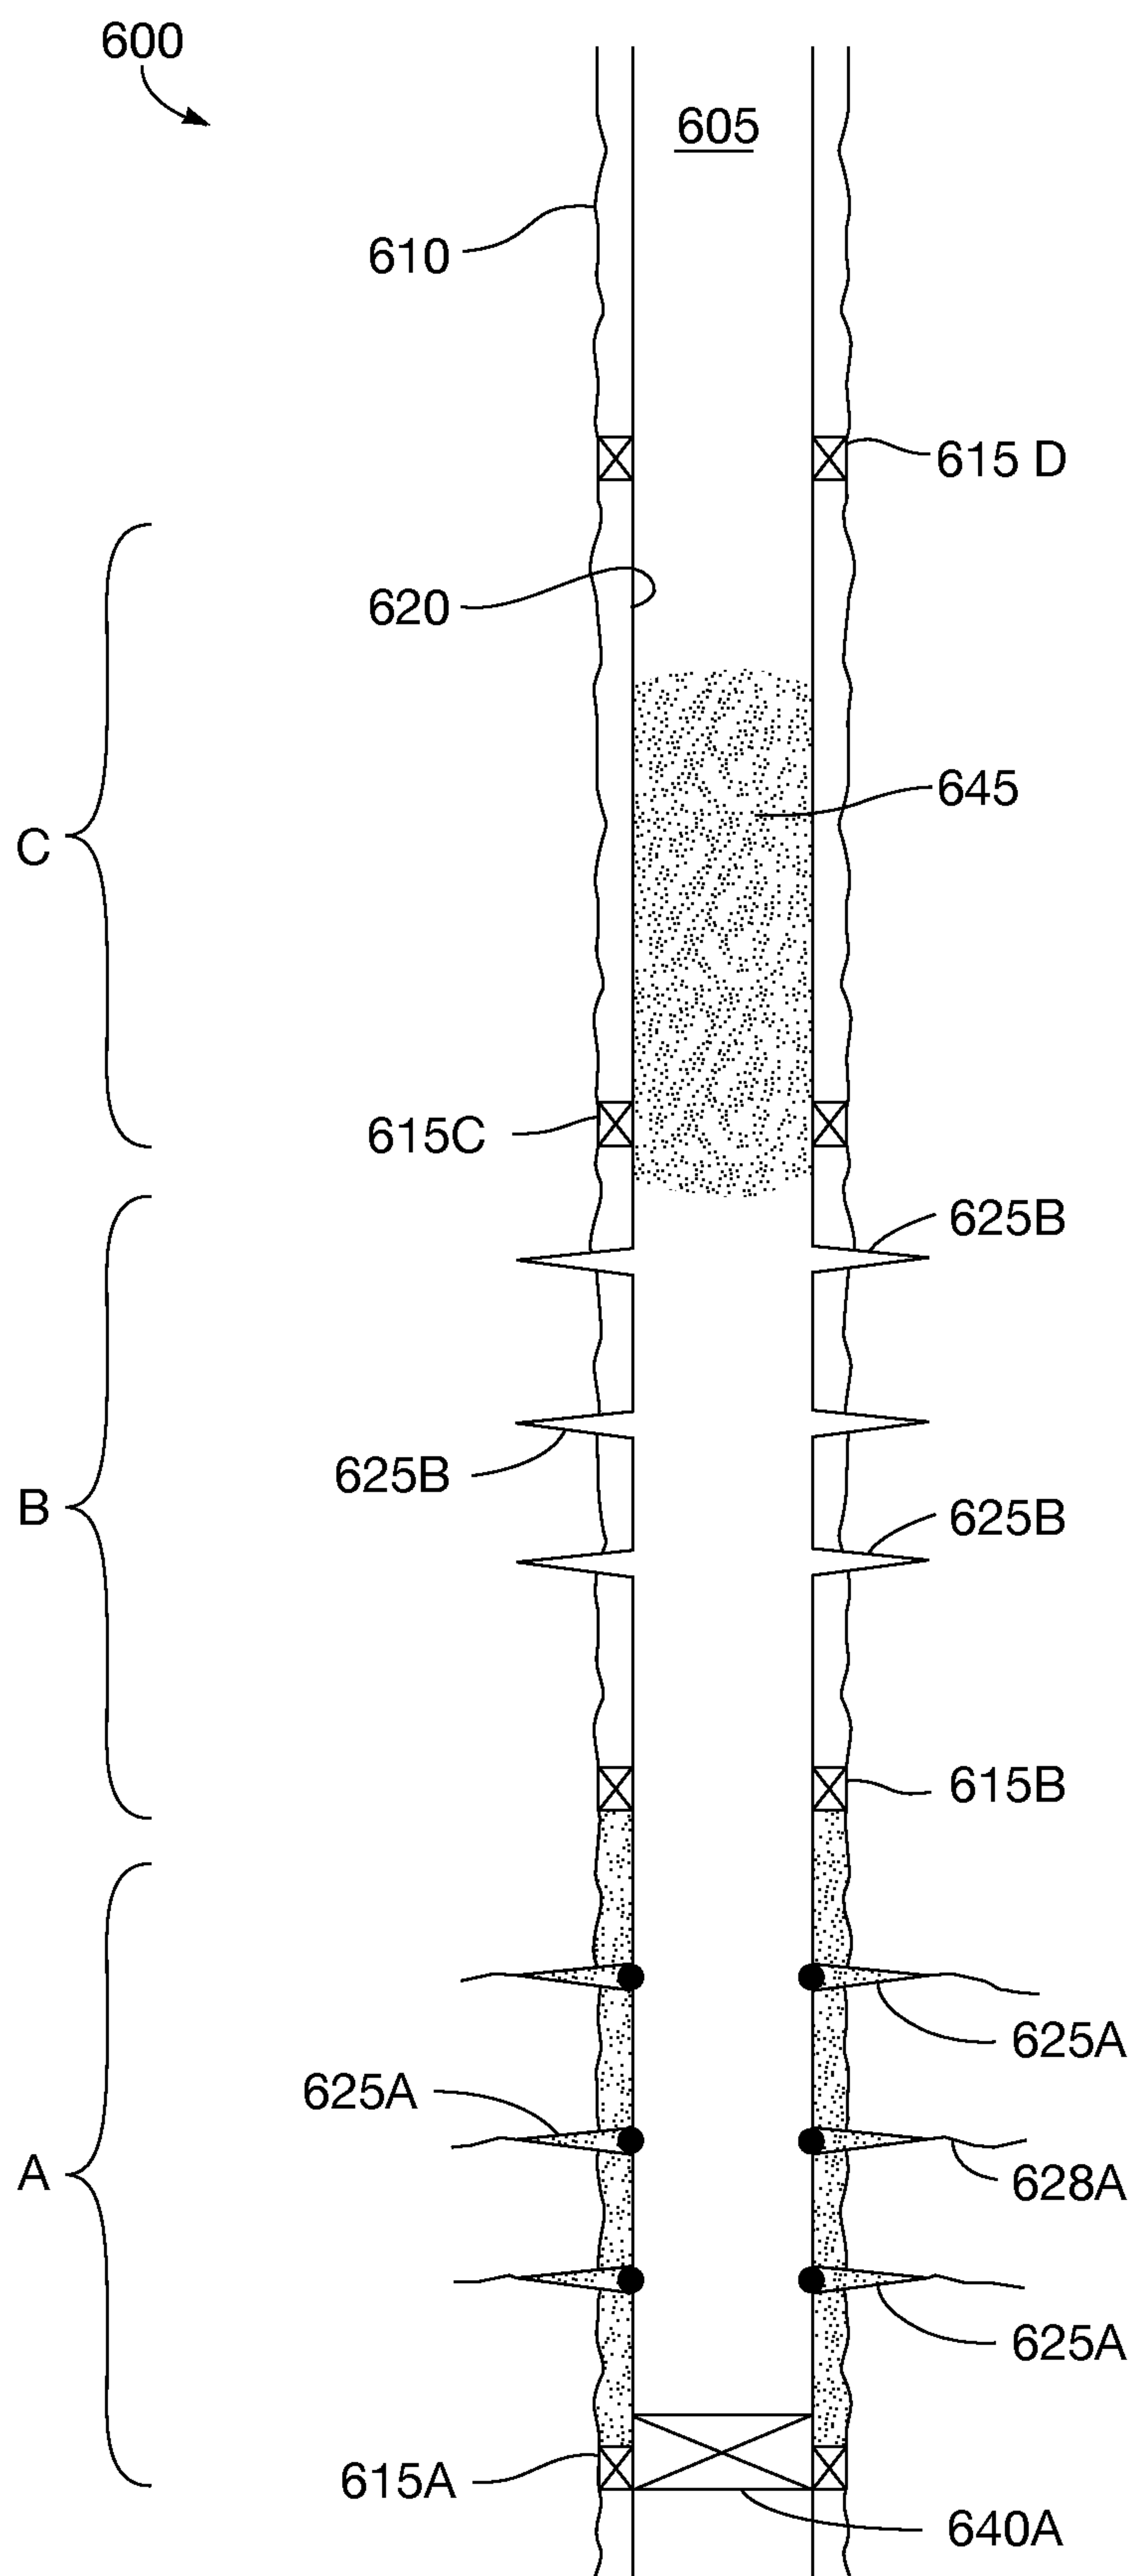


FIG. 6E

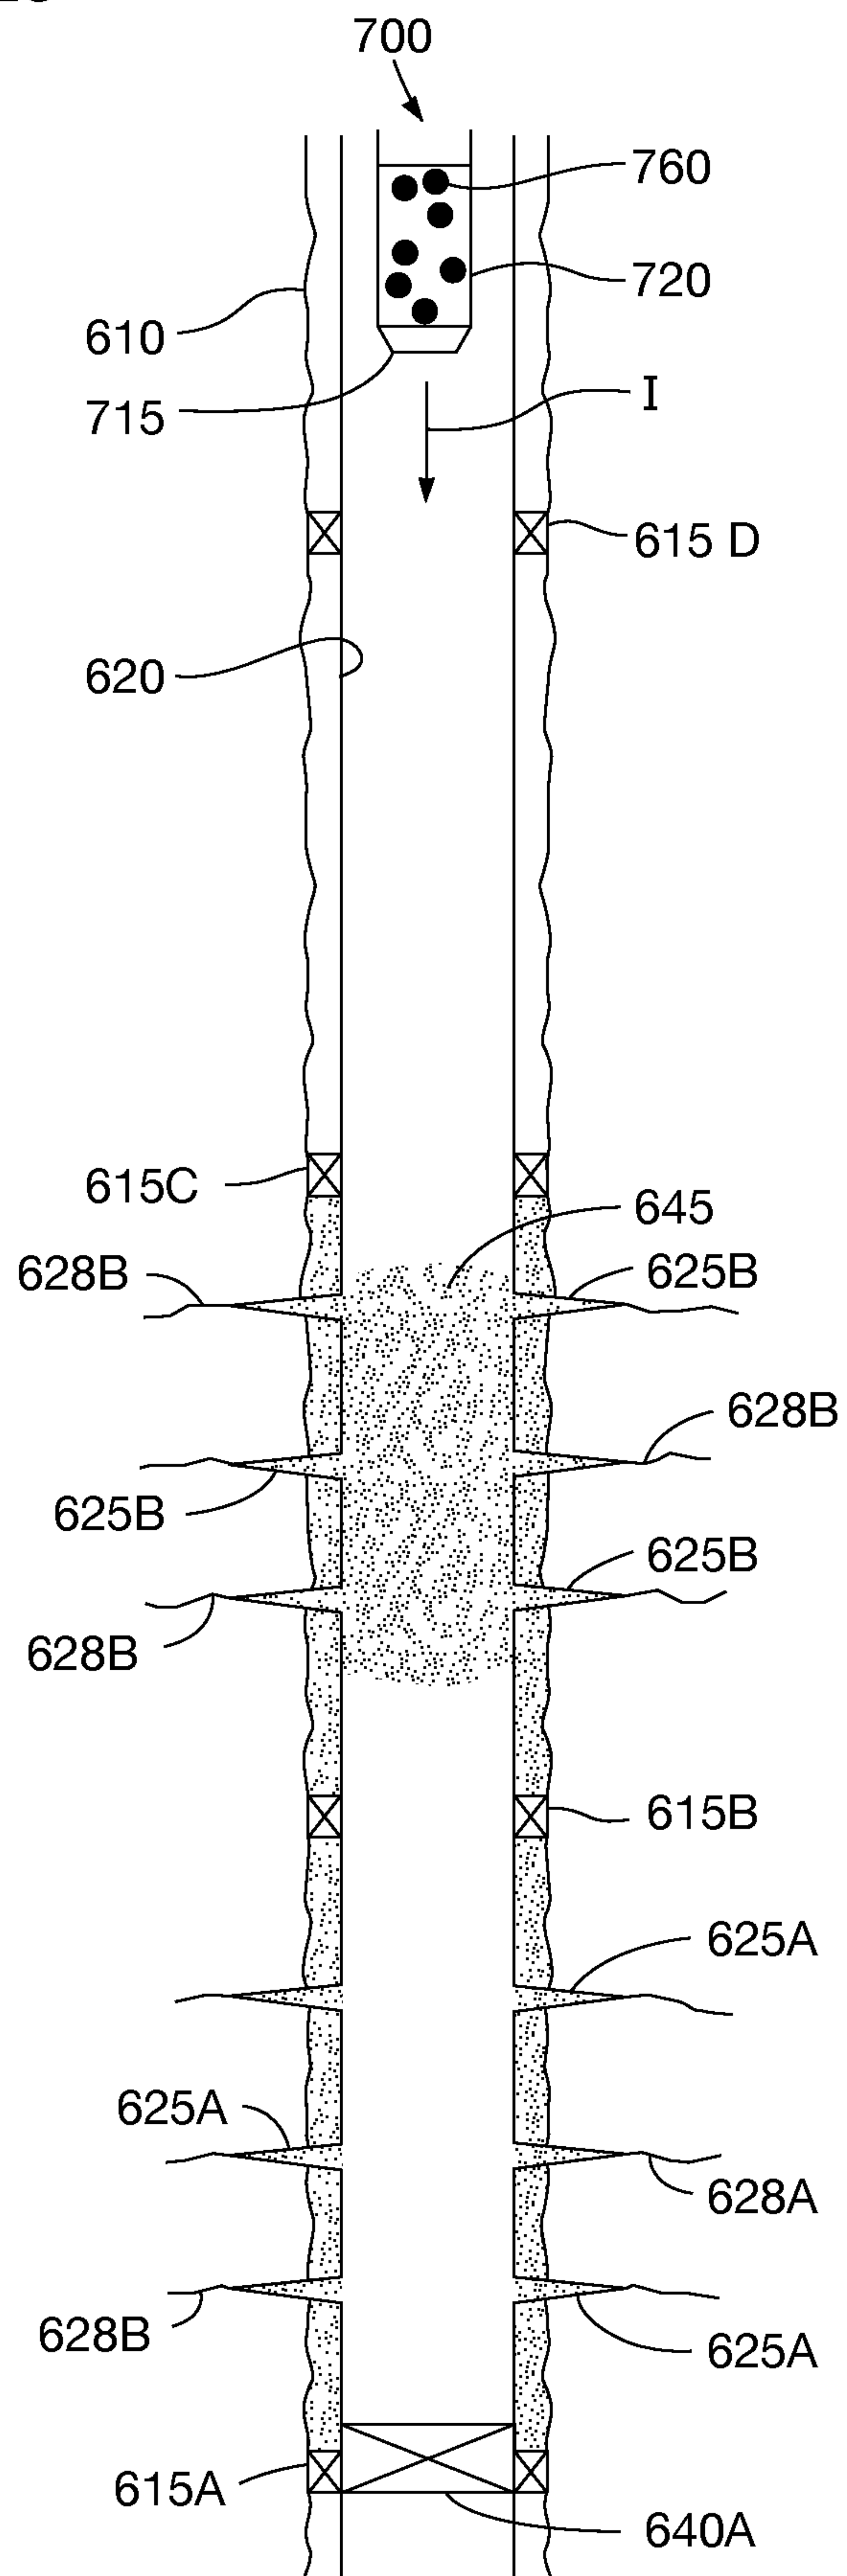


FIG. 6F

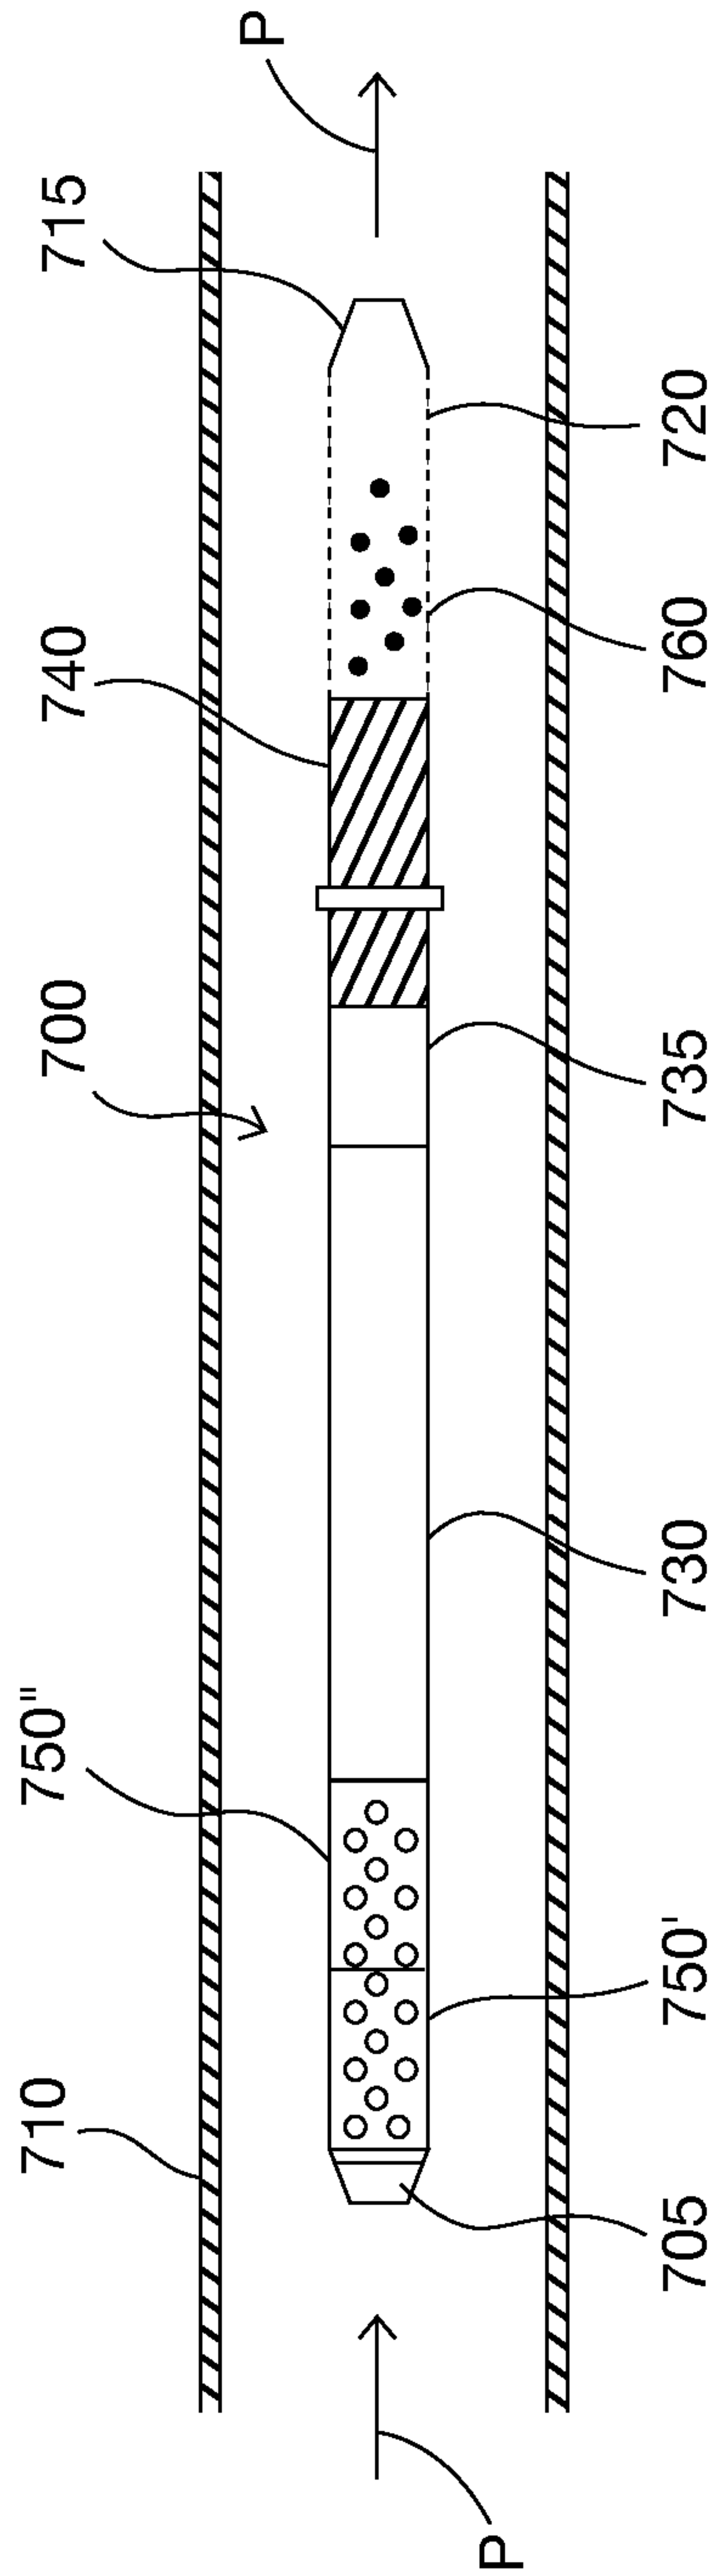


FIG. 7

19/23

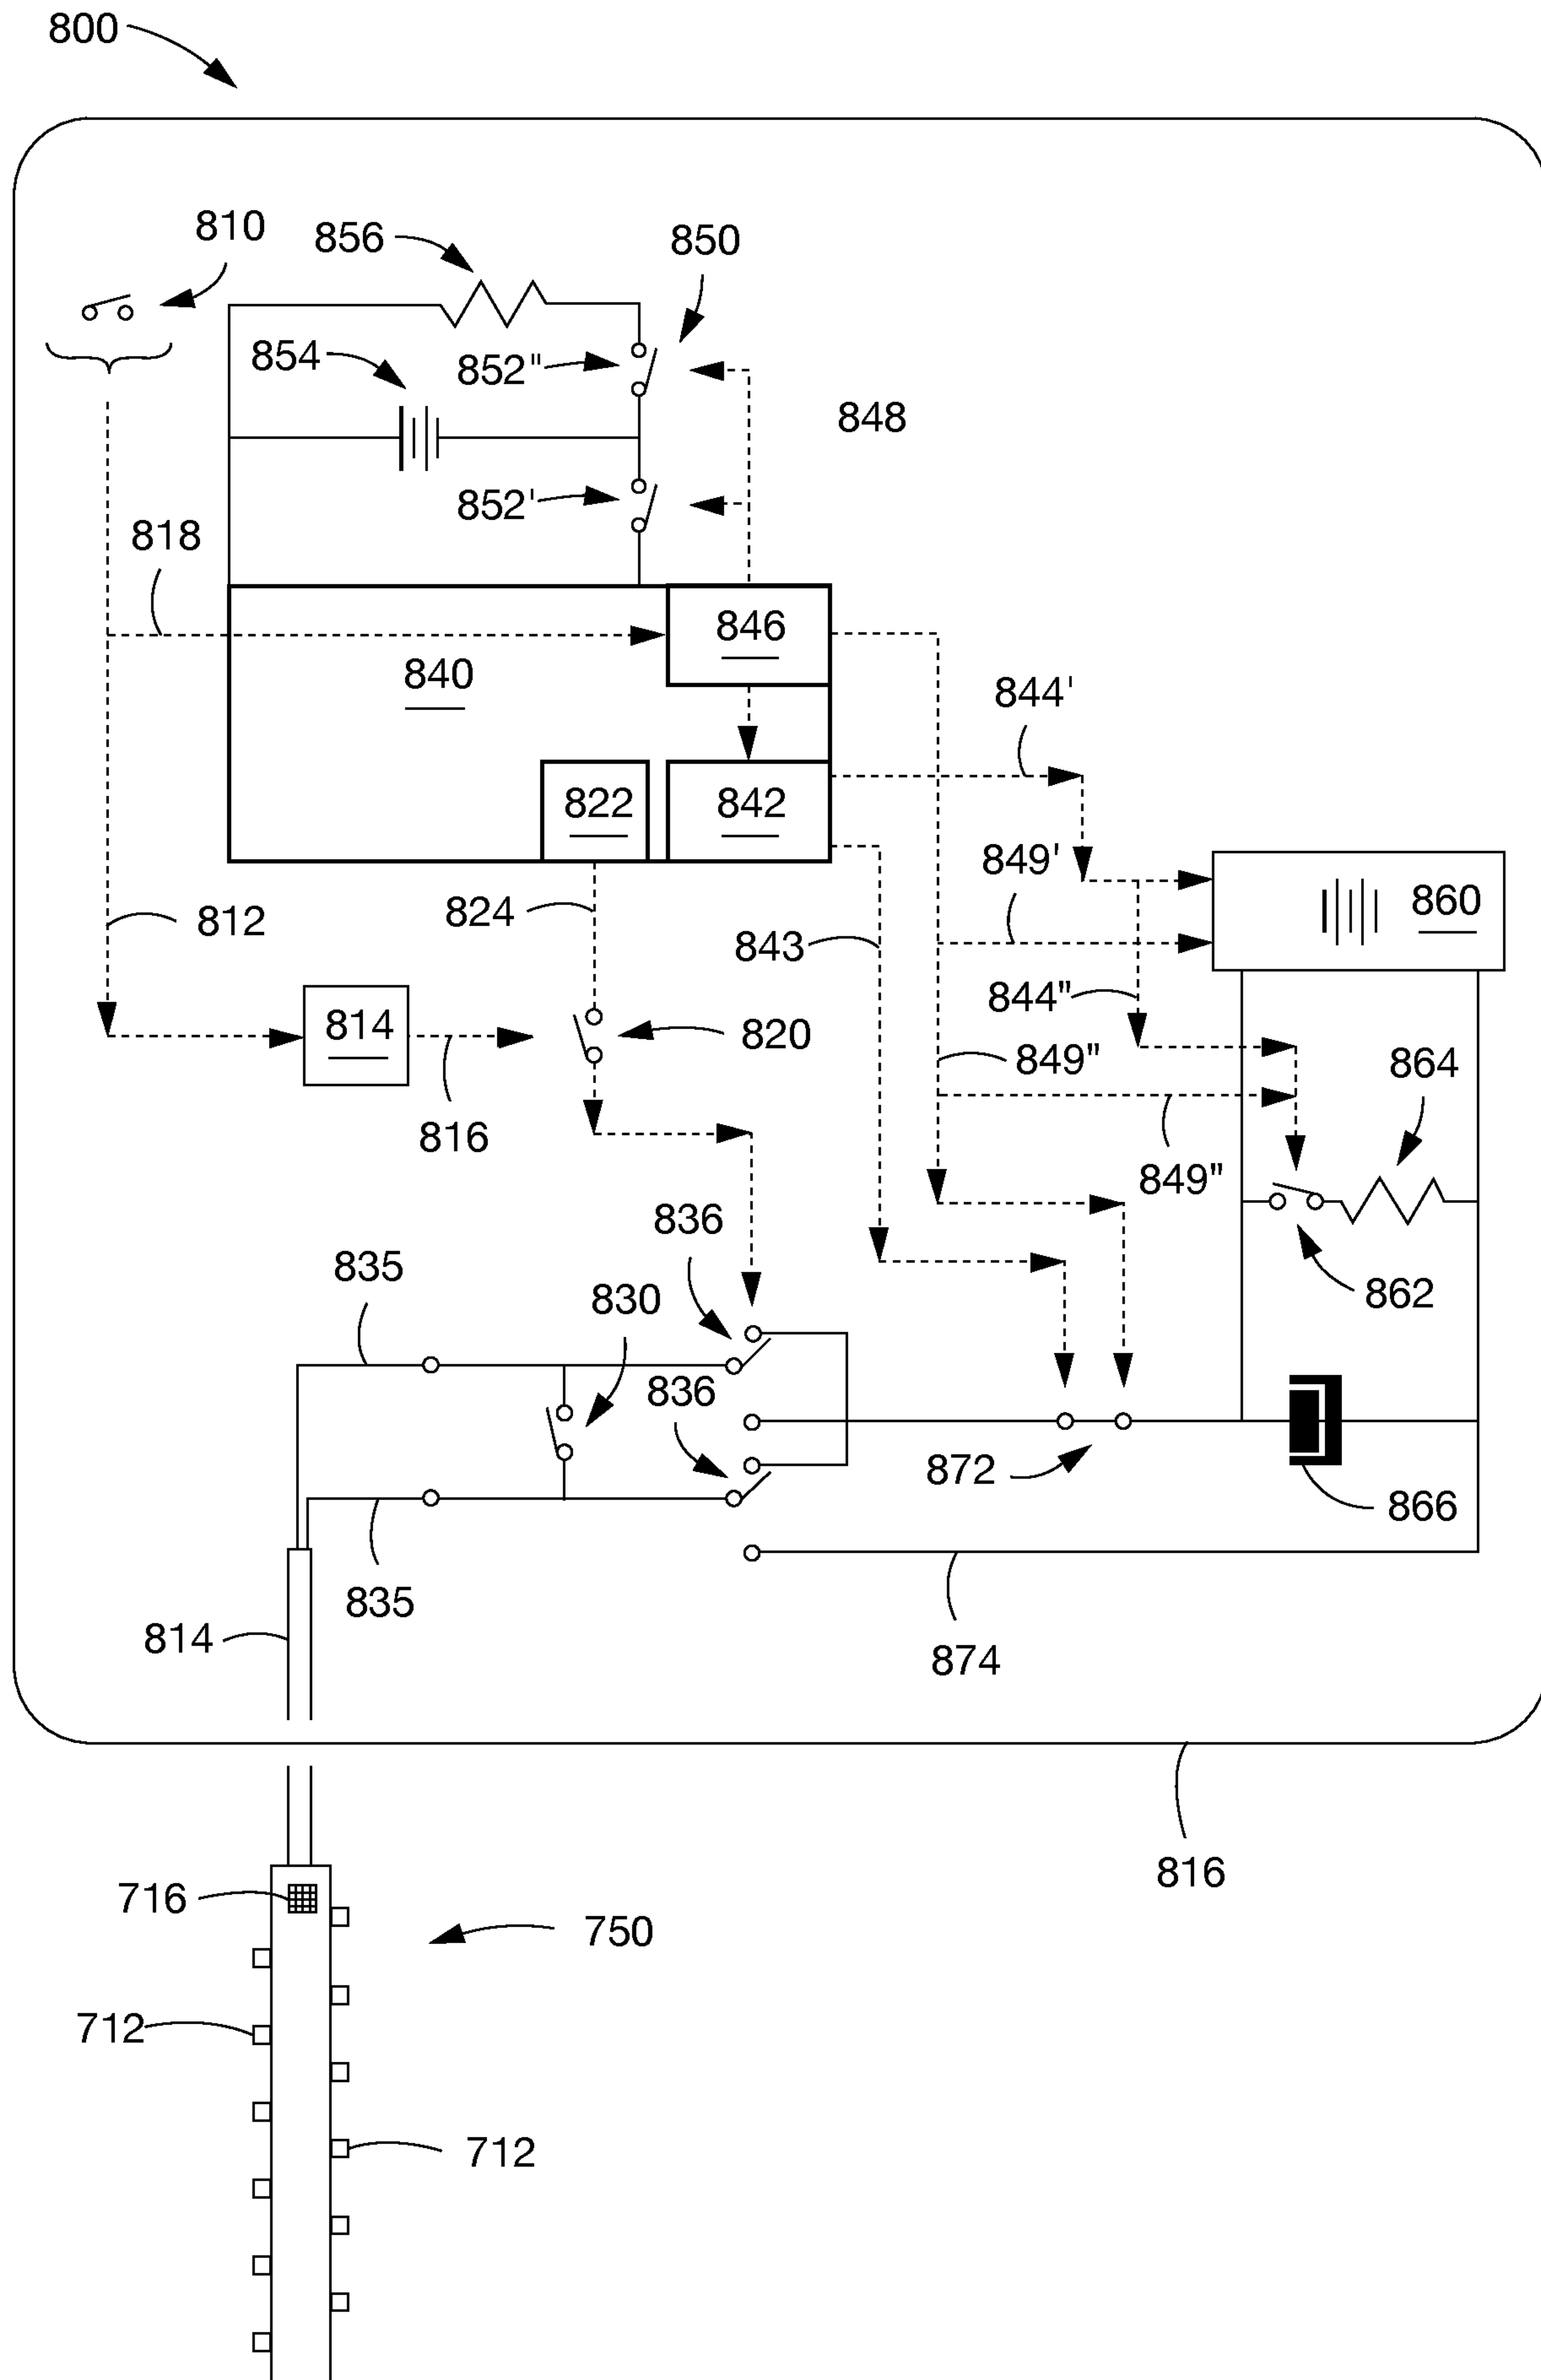


FIG. 8

20/23

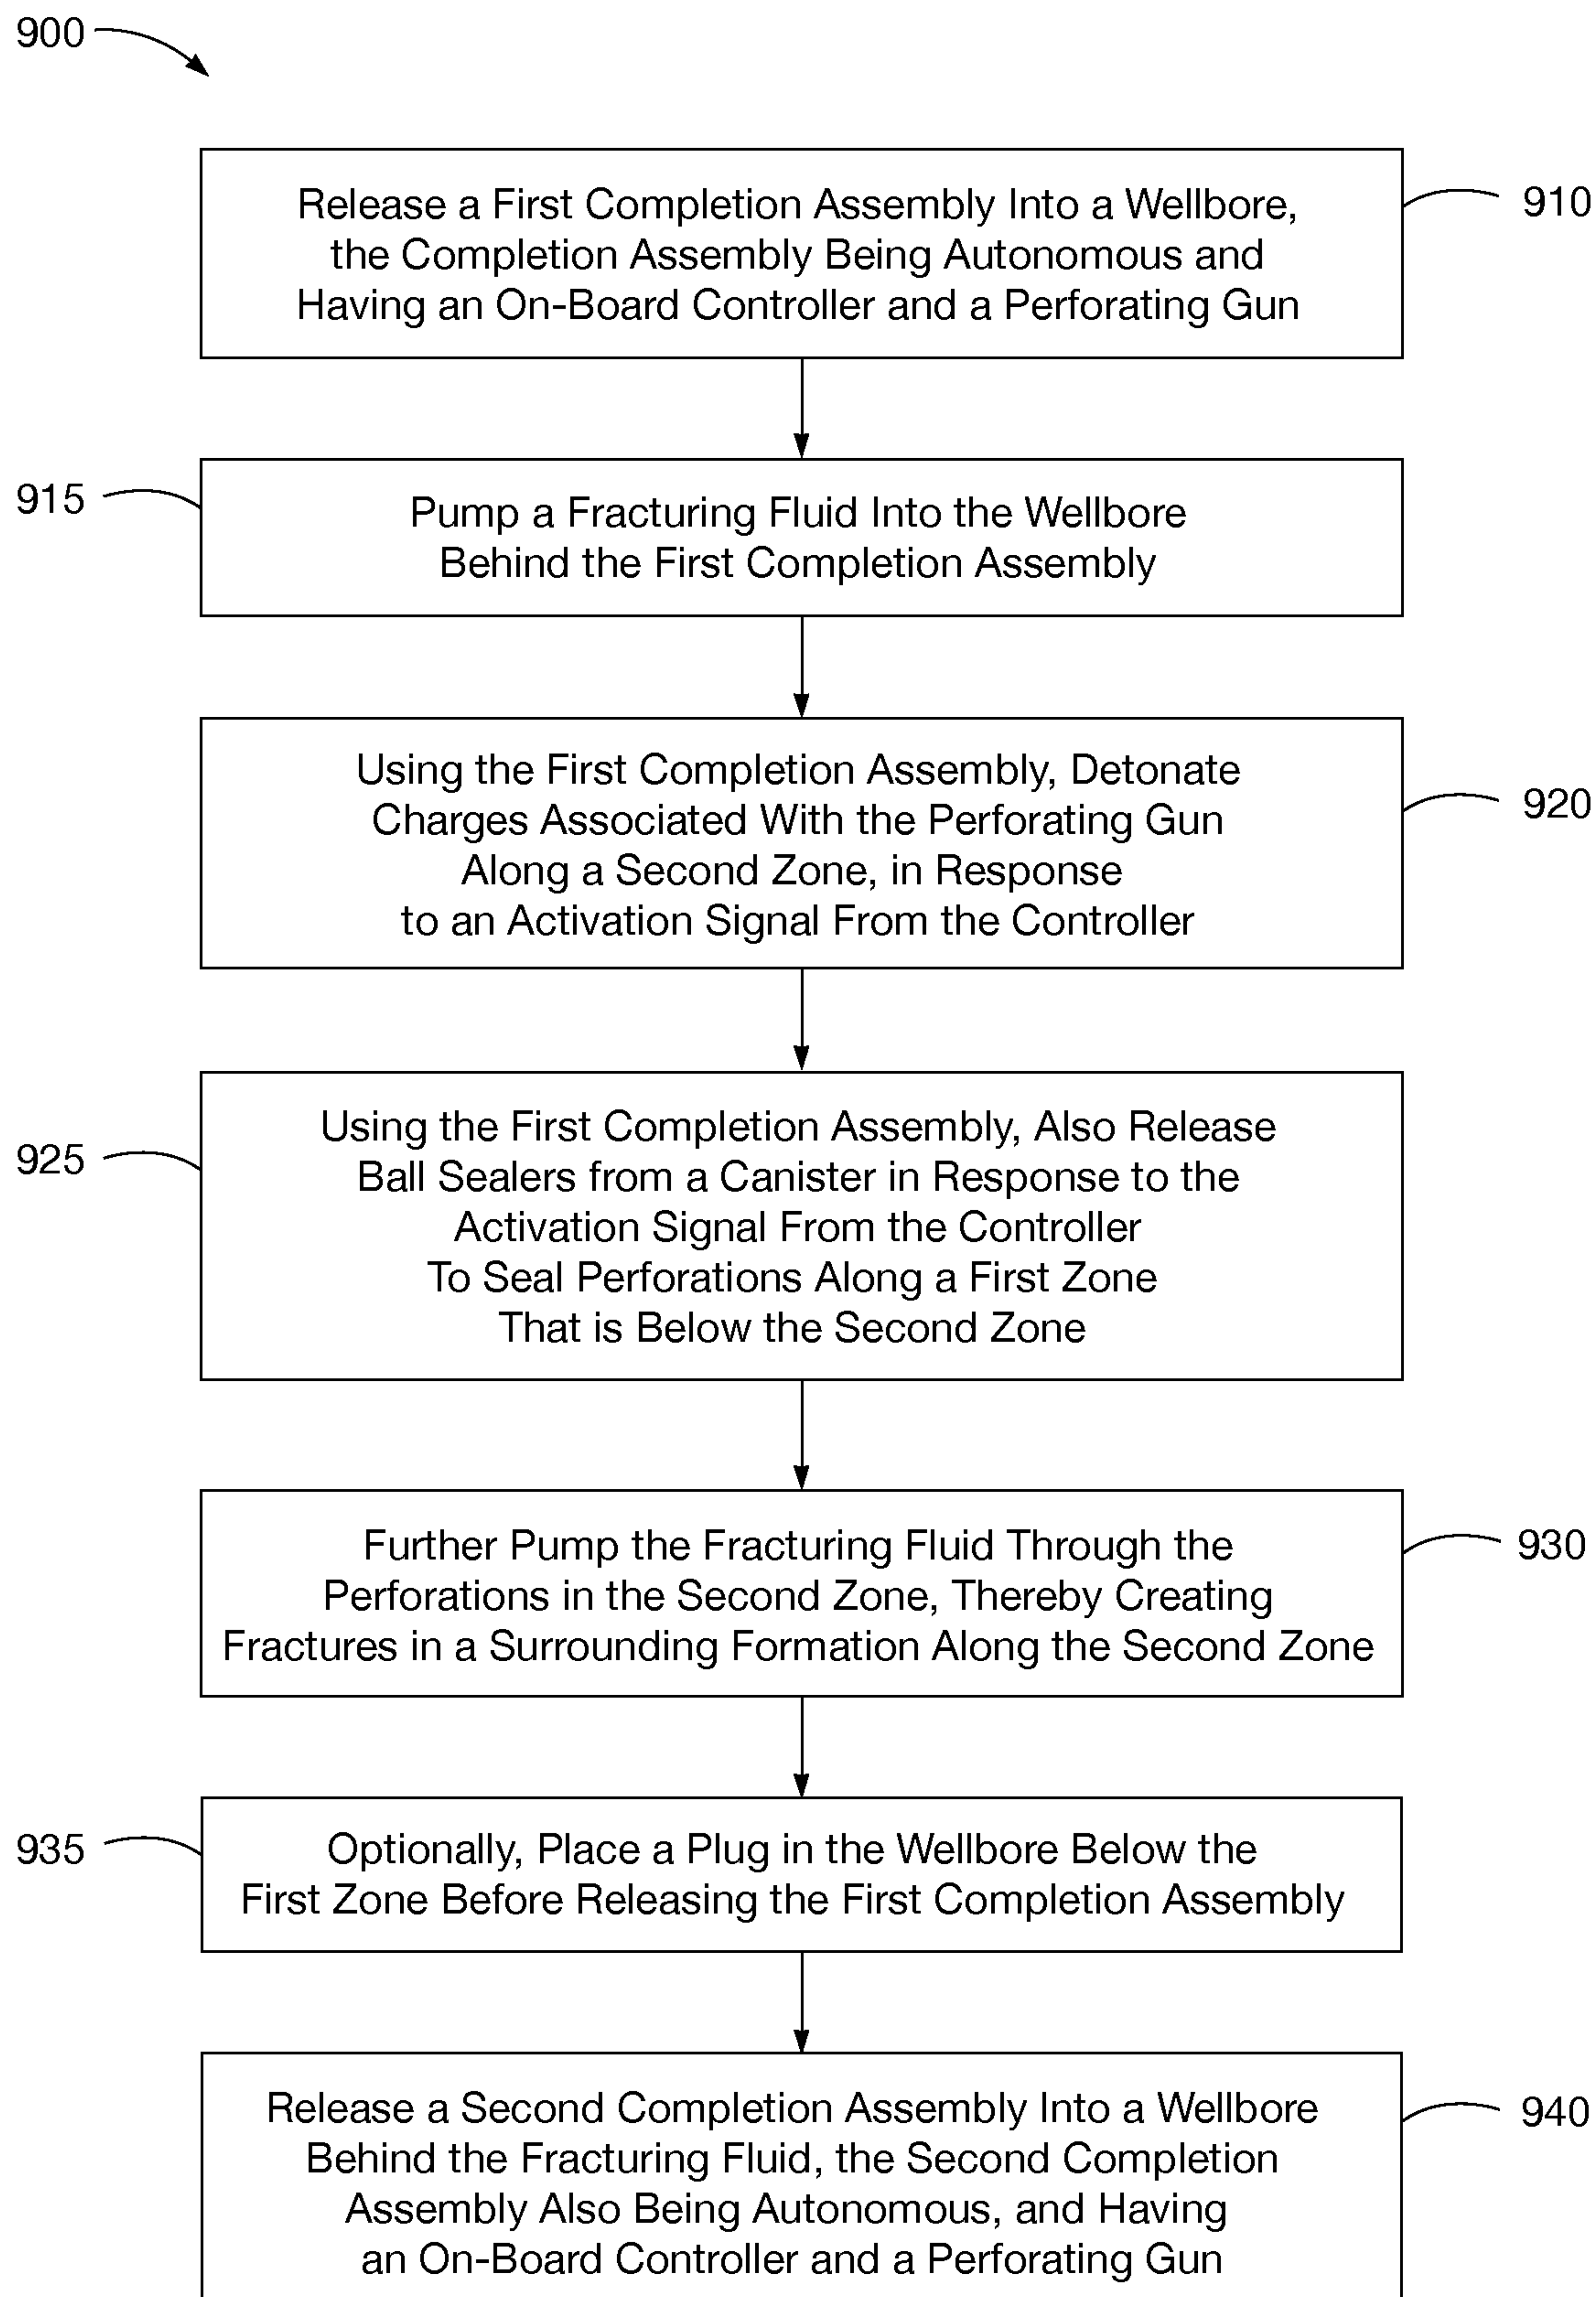


FIG. 9A

21/23

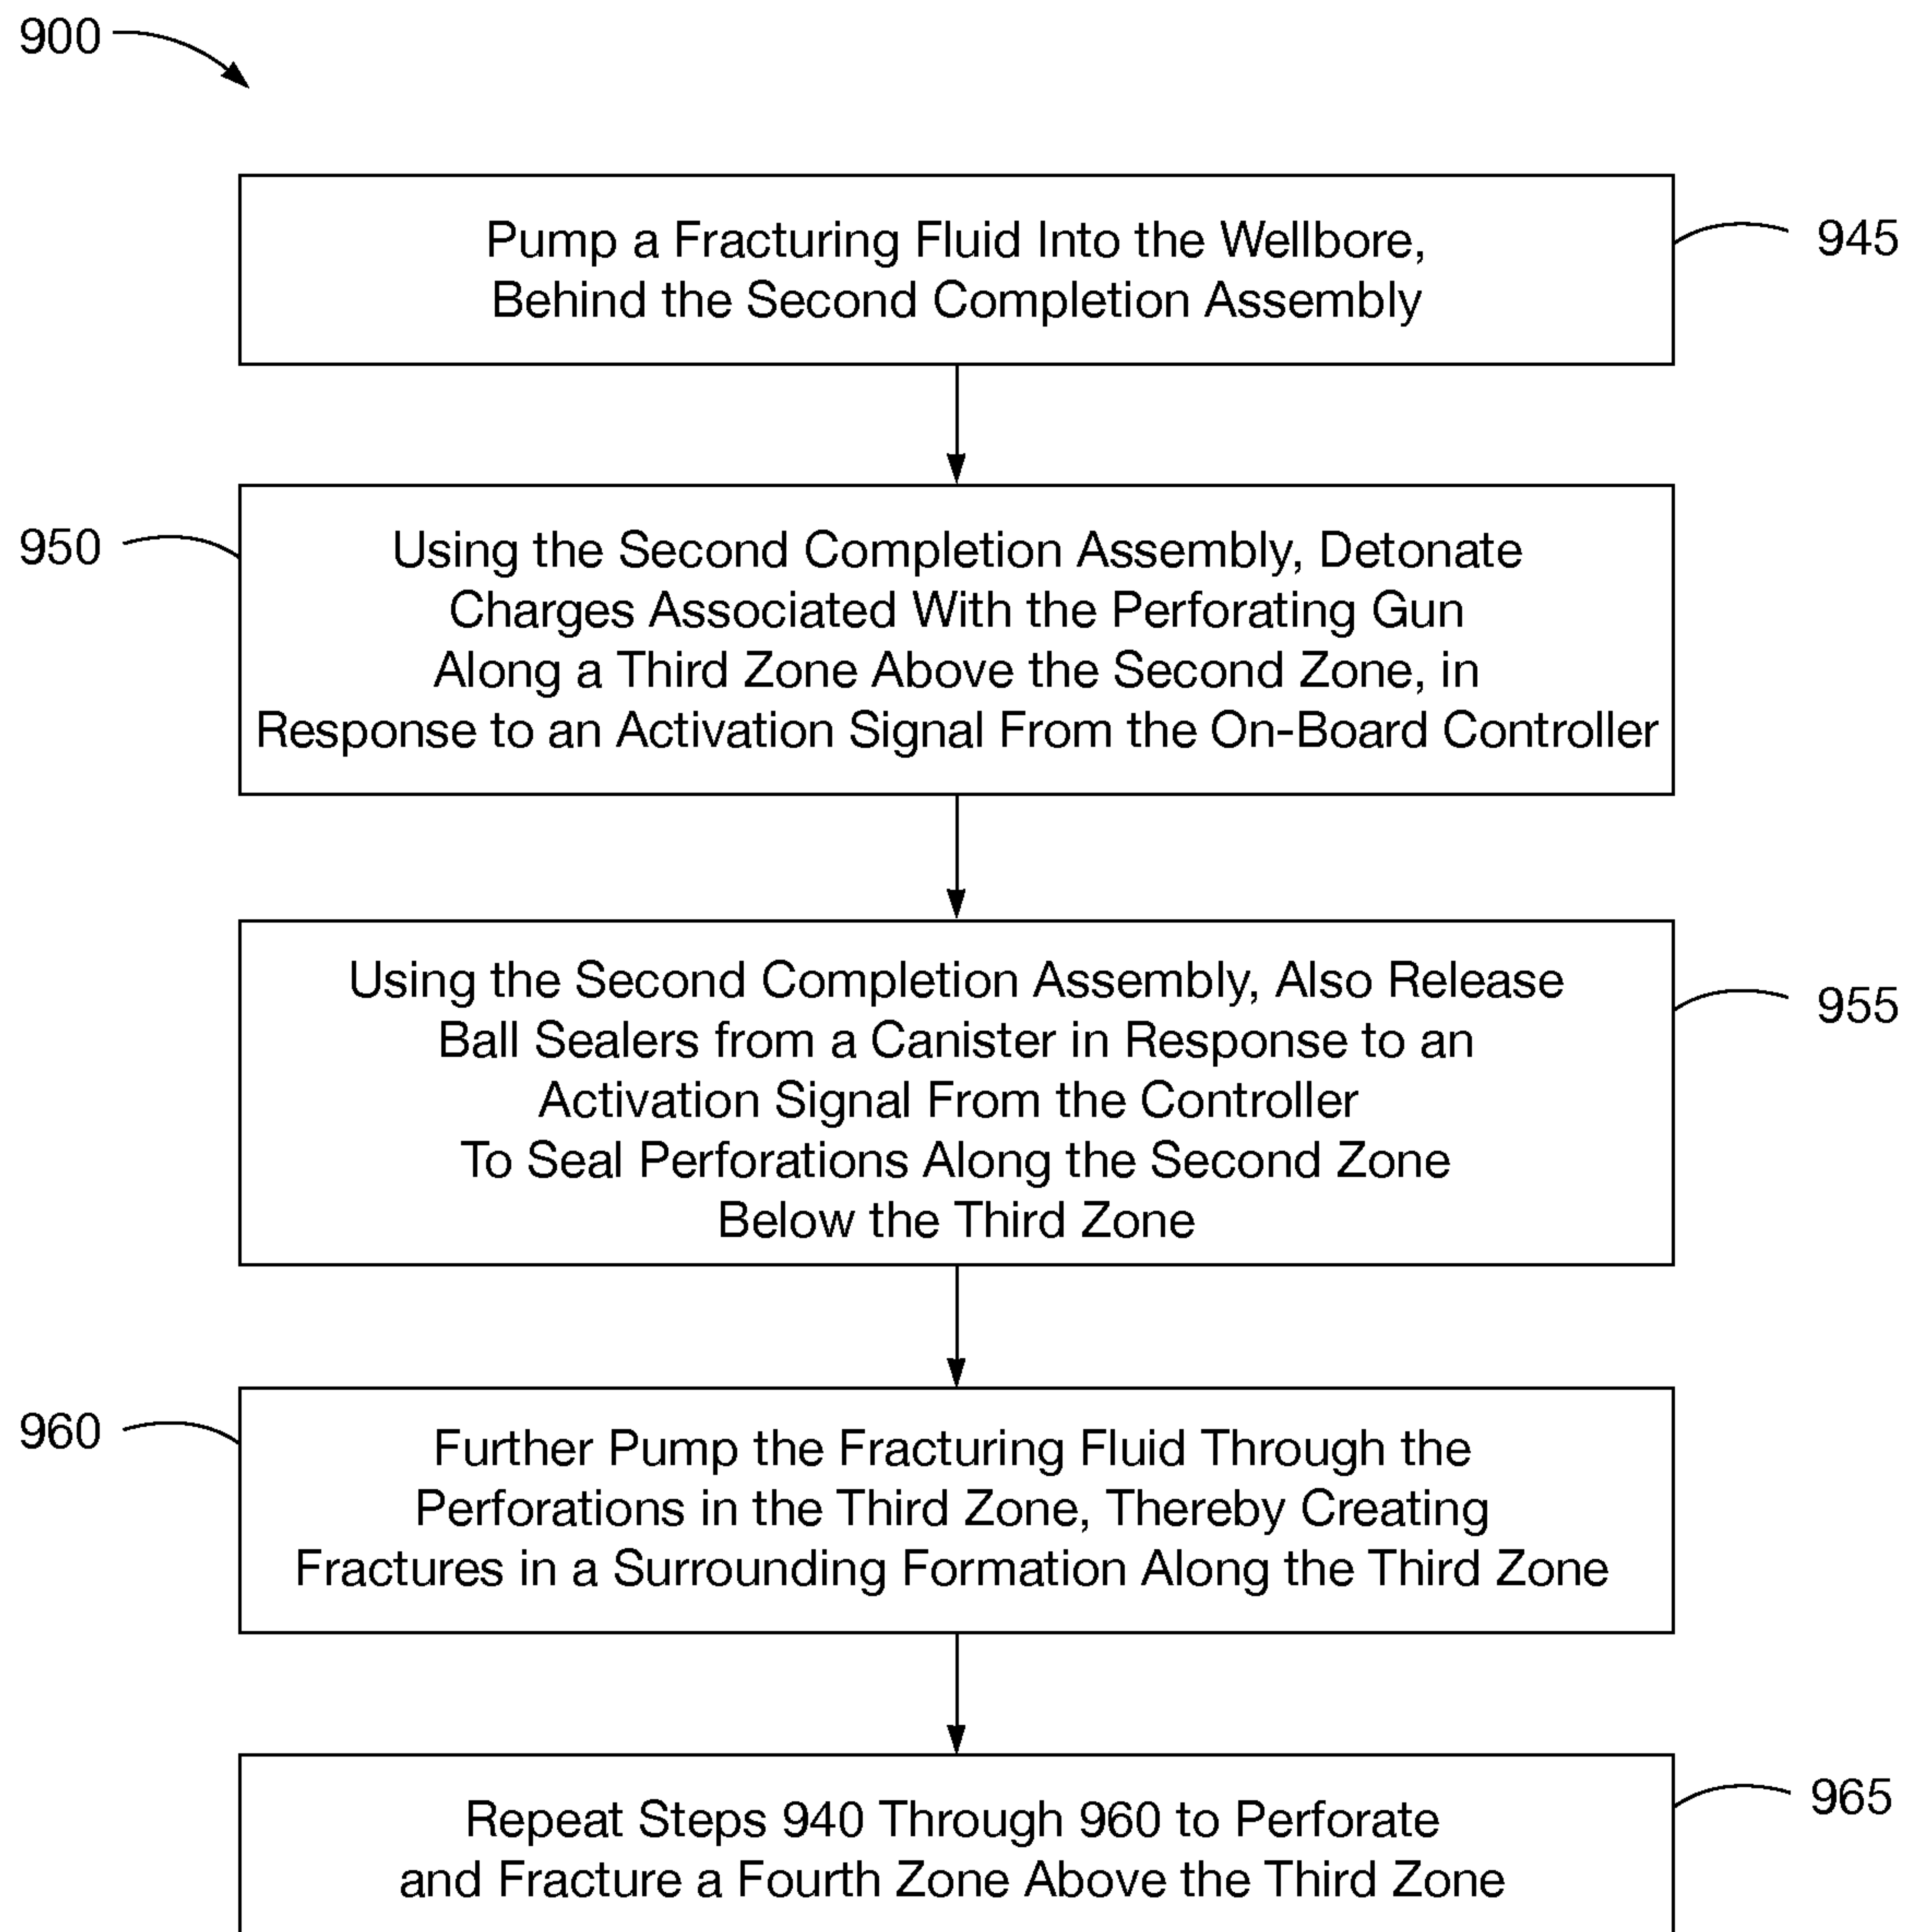


FIG. 9B

22/23

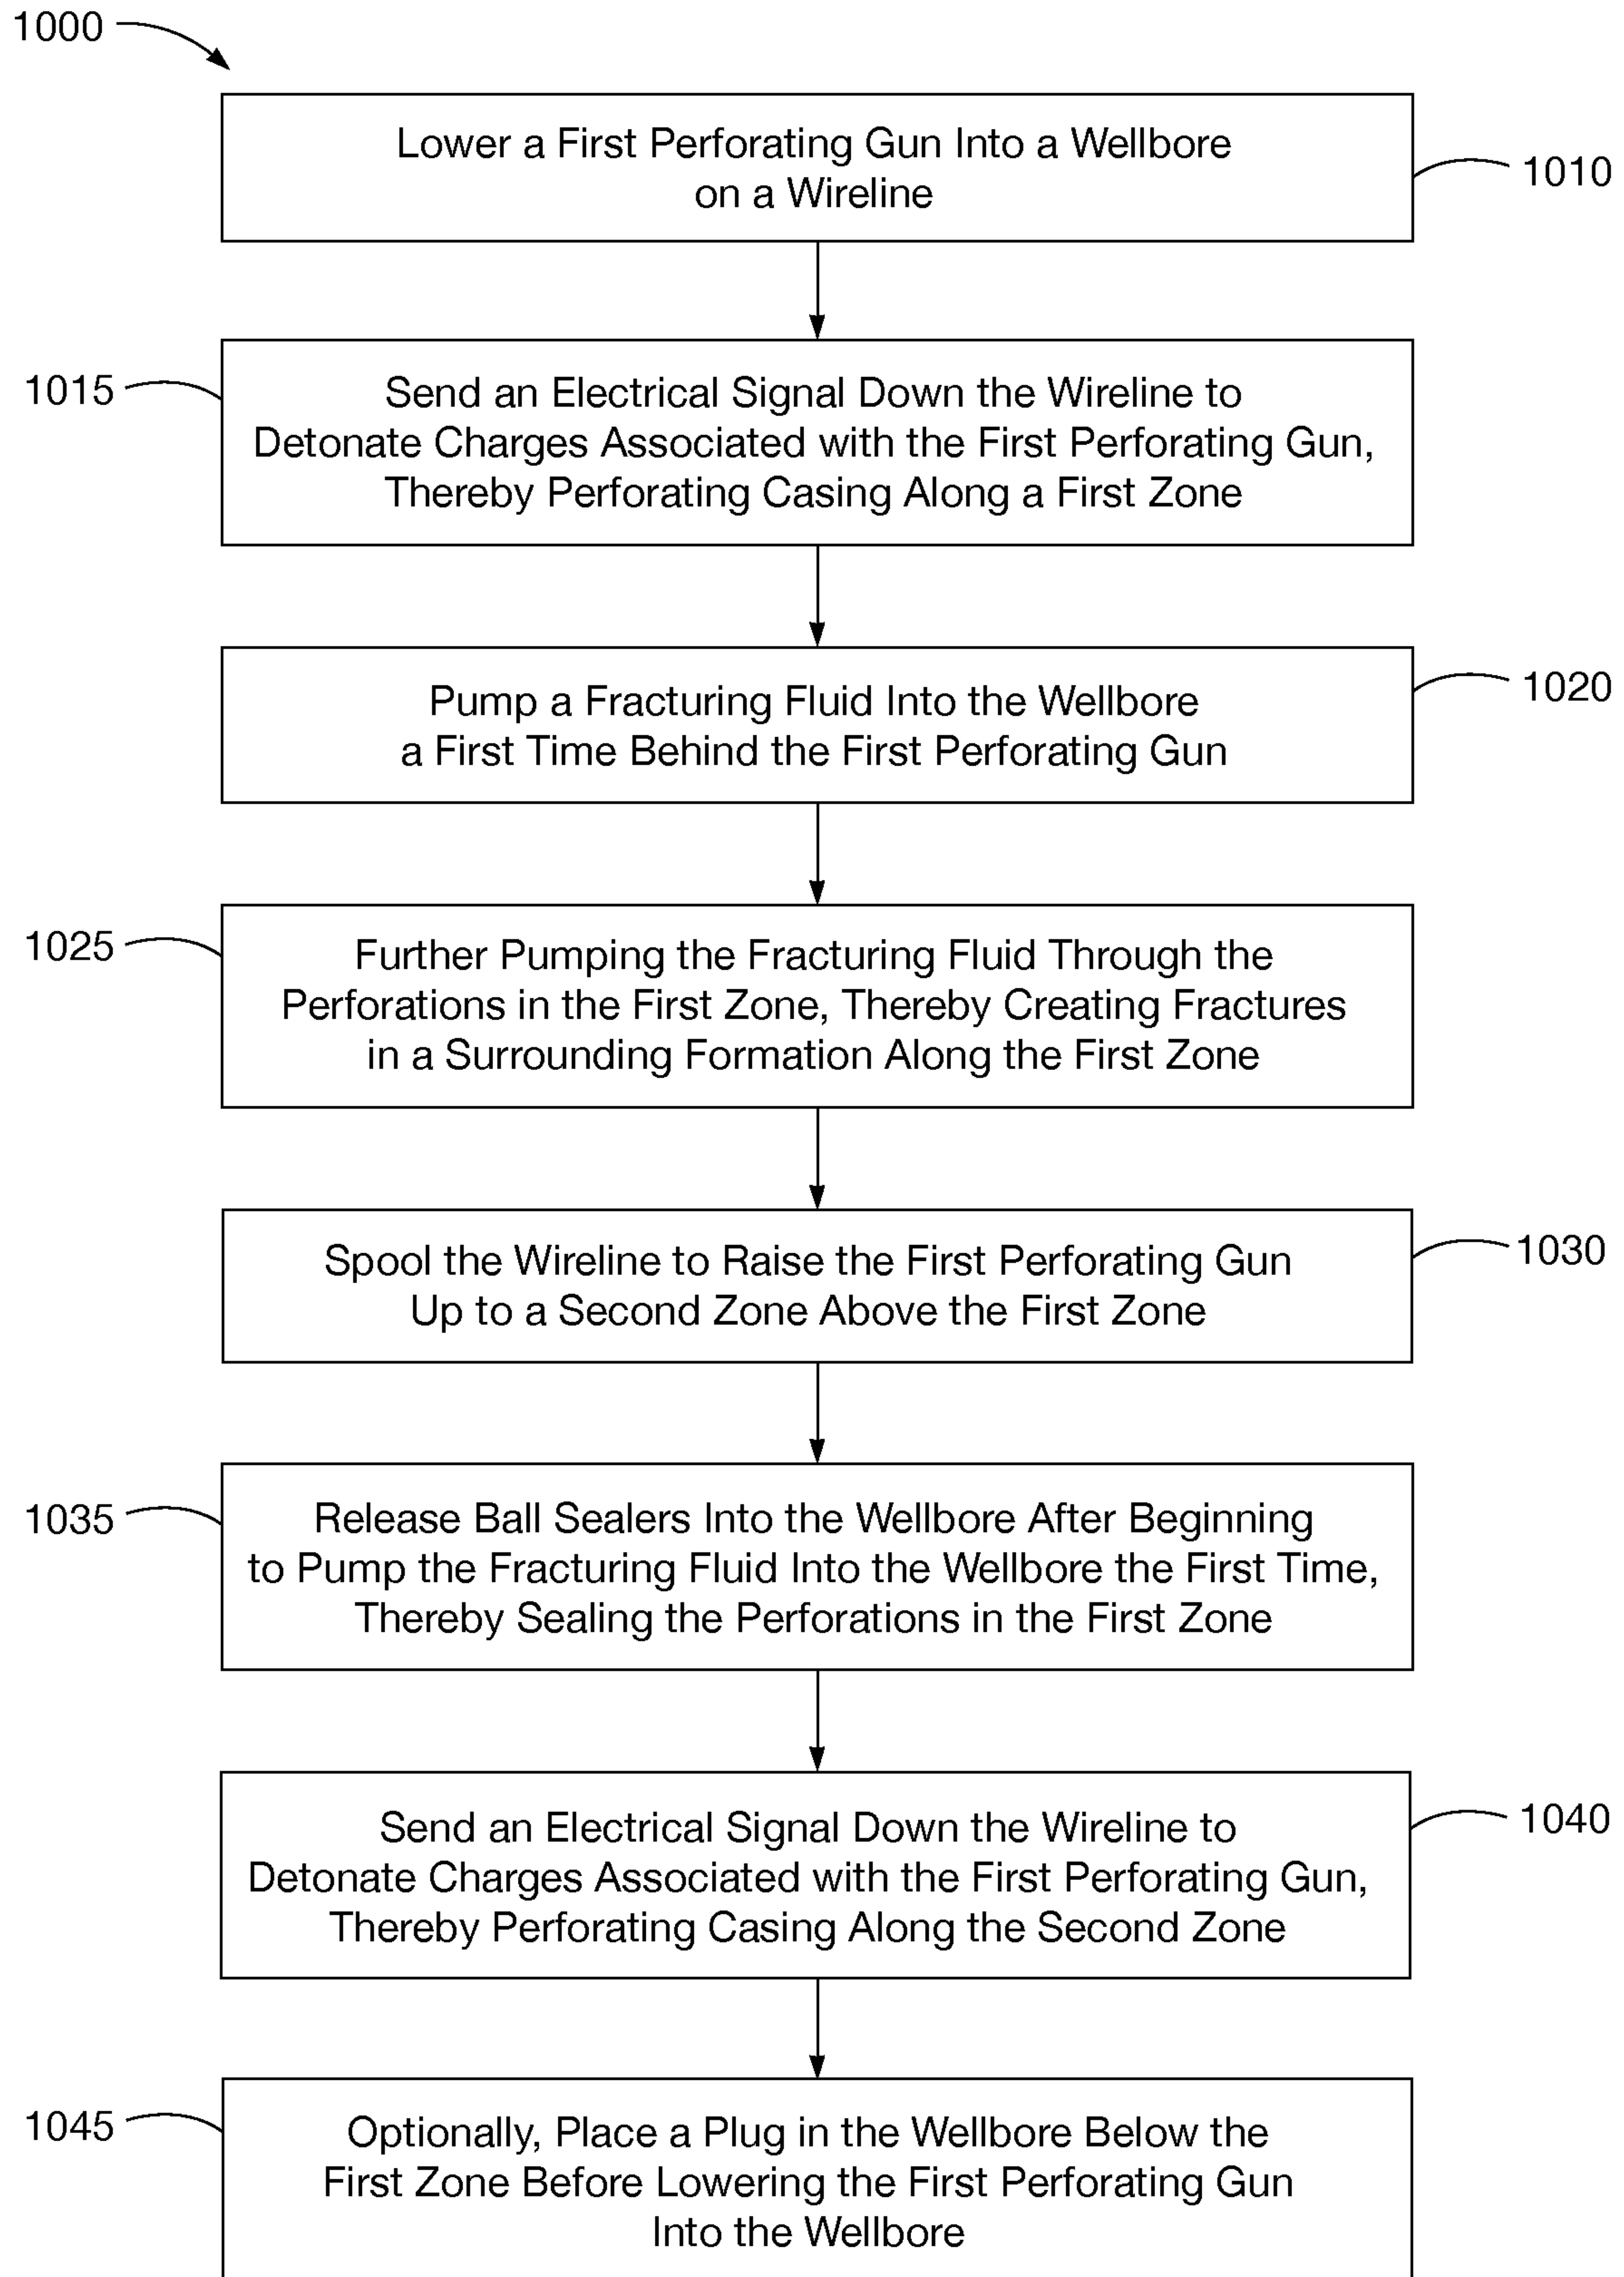


FIG. 10A

23/23

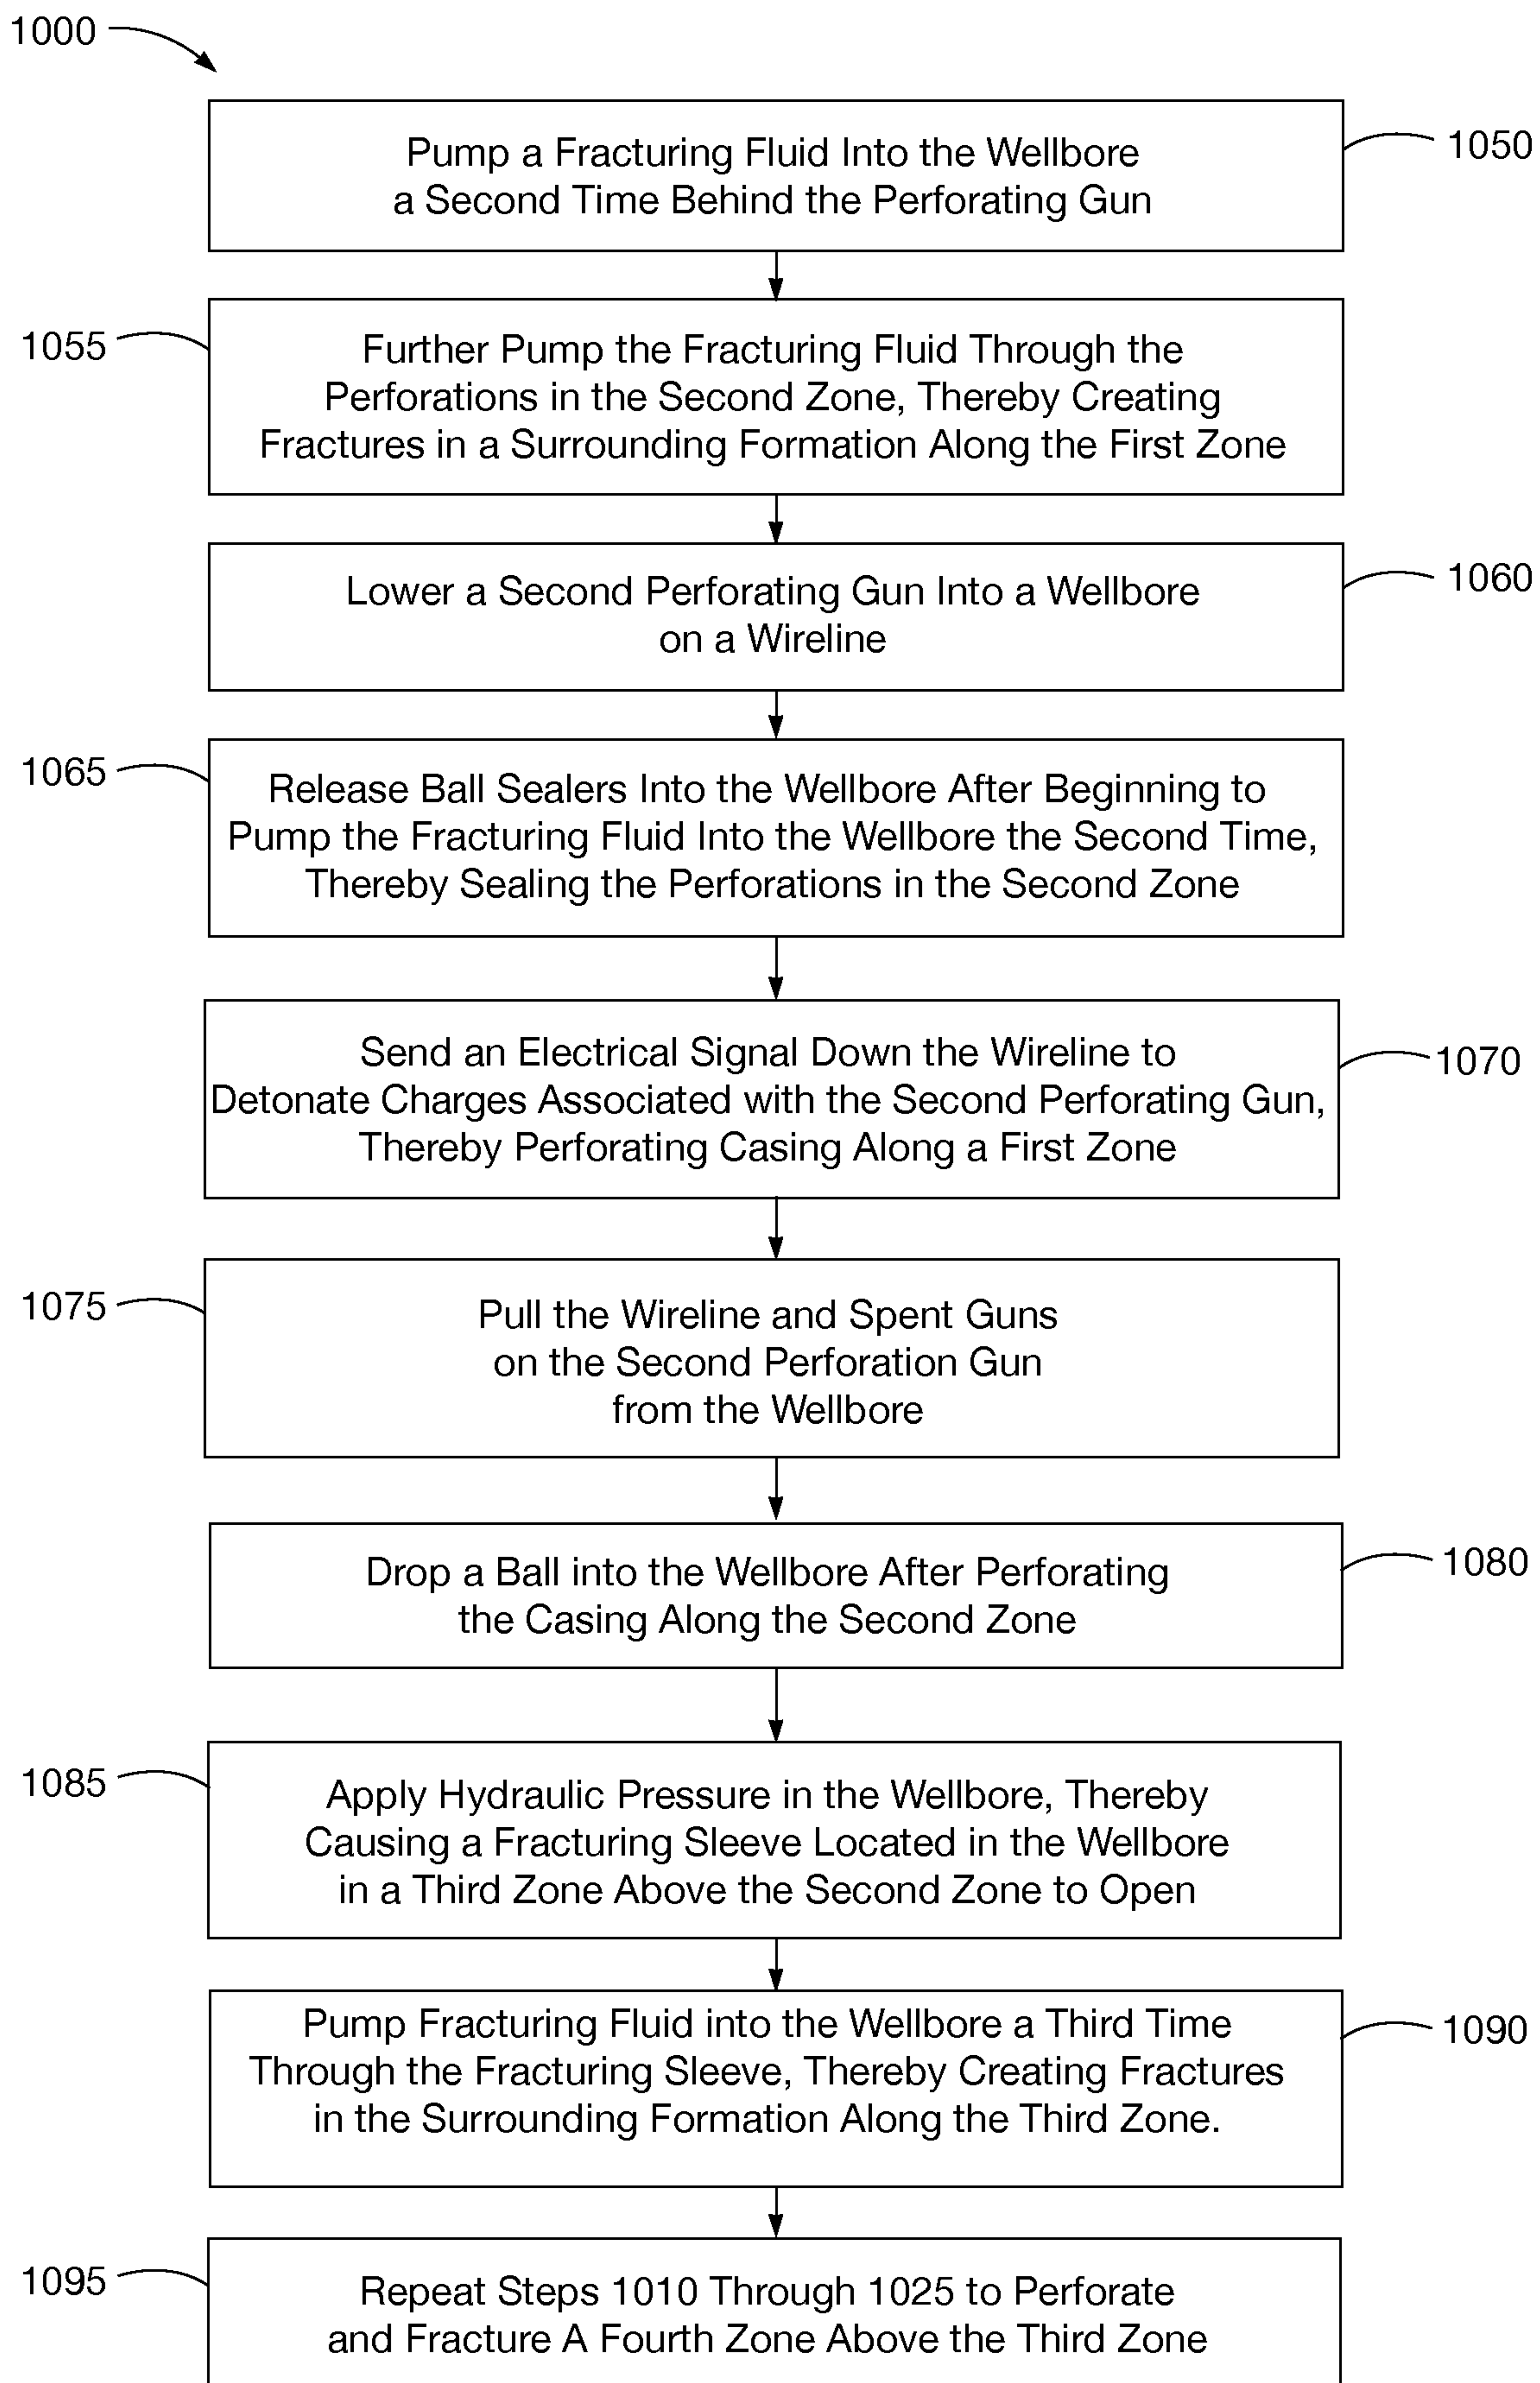


FIG. 10B

