

(51) International Patent Classification:
G01L 5/24 (2006.01) **B25B 23/14** (2006.01)(21) International Application Number:
PCT/SE2009/000470(22) International Filing Date:
22 October 2009 (22.10.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0802247-7 22 October 2008 (22.10.2008) SE
0802379-8 12 November 2008 (12.11.2008) SE(71) Applicant (for all designated States except US): **ATLAS COPCO TOOLS AB** [SE/SE]; S-105 23 Stockholm (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CARLIN, Carl-Gustaf** [SE/SE]; Flåhackebäcken 60, S-135 33 Tyresö (SE).(74) Agent: **BEKS, Axel**; c/o Atlas Copco Tools AB, S-105 23 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A TEST METHOD AND TOOL FOR TESTING FASTENED FASTENERS

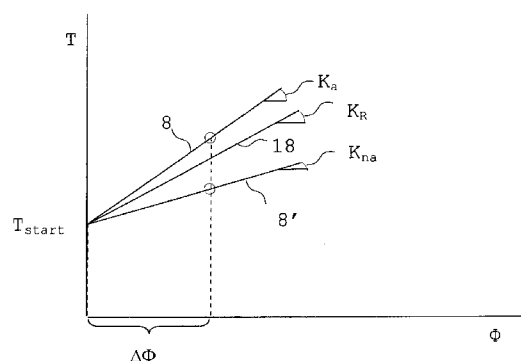


Fig 2

(57) Abstract: A screw fastener testing method for verifying the status of a previously tightened screw fastener as regards installed torque (T) and actual torque growth per angle of rotation ($dT/d\Phi$) properties including the following steps • applying an increasing tightening torque on the fastener, • measuring the torque magnitude (T) at the start of rotation of the fastener, • measuring the rotational movement (Φ) of the fastener after said start of rotation, • calculating the torque growth per angle of rotation ($dT/d\Phi$) for a certain predetermined test interval of rotation ($\Delta\Phi$) from said start of rotation, • comparing the torque magnitude (T) indicated during rotation and the calculated torque growth per angle of rotation ($dT/d\Phi$) during said test interval ($\Delta\Phi$) of rotation with predetermined reference values (T_{start} , K_R) or (T_E , K_P), respectively, characteristic for the actual fastener when tightened to a desired target torque level, and approving or disapproving the fastener status in view of said reference values.

A test method and tool for testing fastened fasteners

FIELD OF THE INVENTION

The invention concerns a screw fastener testing methods for verifying that joint comprising a tightened screw fastener has been correctly in a tightened to either a point below yield according to a first method, or to a point beyond yield according to a second testing method. The invention also concerns a corresponding screw fastener testing tool.

BACKGROUND OF THE INVENTION

Screw fastener joining of machine elements in practice results in subjecting the machine elements to a clamping force effectuated by one or more individual screw fasteners. The magnitude of the clamping force is dependent on screw fastener dimensions and to what extent the individual screw fastener is tightened, whereby typically reaching of a predetermined tightening torque shuts off the screw tightening tool.

A particular problem is encountered in connection with using screw fasteners for fastening of rigid machine elements such as e.g. rigid steel plates, to each other. The reason for this is that in such cases it might be the case that at the moment of screw driver shut down, because of reached target torque, the fastener is not sufficiently tightened for the machine elements to be fastened tightly against each other. Instead, in the region of the tightened screw fastener, there exists a certain play between the

rigid plates because of lack of contact between them in that position. Screw fasteners tightened in such a way are problematic, since they are likely to prematurely break from fatigue due to the fact that a fluctuating load will be taken up by the fastener rather than reducing the clamp load between the parts.

In order to remedy this problem, it has been suggested to position shim elements between the metal plates in order to bridge the play. This method is, however inexact, unreliable and also labour intensive.

Another problem with previously known screw tightening systems is that friction occurring between surfaces of the screw fastener varies considerably, whereby the same shut off torque can lead to great variation of clamping force between different screw fasteners. Since the clamping force typically is realised to vary by 35%, a screw fastener is typically tightened to only part of its capacity, as an example not more than 60% of the theoretical capacity in production screw tightening. This means that the screw fastener has to be over-dimensioned to reach a predetermined clamping force.

As a remedy to this problem it has been suggested to tighten screw fasteners to a point beyond the yielding point, (i.e. where plastic deformation occurs). Hereby the advantage is achieved that 100% of the screw fastener capacity can be used. The clamping force also then typically only varies with the hardening of the material in the screw fastener, which gives smaller variations.

The problem is now to verify that the point beyond the yielding point has been reached. For that purpose different methods have been developed, wherein, the tightening tool includes a measuring gauge in order to secure tightening quality. Another solution is to measure permanent elongation of the screw fastener after loosening it which, however, can give erroneous results since the results depend on the accuracy of a test screw. This method is also labour intensive. Another method is ultra sound measuring.

AIM AND MOST IMPORTANT FEATURES OF THE INVENTION

The invention aims to provide a method and a device that can at least reduce problems of the prior art and to provide a method and tool that can be used easily also by not specially trained operators and that can be used for quick testing of readily tightened screw fasteners with high accuracy without loosening the screw.

These aims are obtained according to the invention through the features of the characterizing portions of the independent claims.

Hereby it can be unequivocally verified that firstly a screw fastener has been tightened correctly and that the machine elements, such as metal plates forming a joint, have been correctly clamped tightly against each other and secondly that a screw fastener has been tightened to a point beyond the yielding point.

The screw fastener can be subjected to a test interval with a rotational movement $\Delta\Phi$ by means of a motor with transmission or simply by having the tool arranged with a sufficiently long handle portion for applying the rotational movement by the hand of the operator. The tool hereby includes a processing unit having circuitry and/or software for measuring angle and relative angle by which the fastener is rotated.

The torque, T , applied to the already tightened screw fastener, and the value of the derivative thereof, $dT/d\Phi$, are measured by the tool during the test interval of rotational movement $\Delta\Phi$, which is a common operation for both methods, and wherein measured torque value, T , is compared with different stored values, dependent on which test method is chosen.

In accordance with the first test method, the measured torque value T , is compared with a stored torque value, (T_{start}), for example corresponding to a medium region of the elastic deformation range for the tightened screw fastener, or corresponding to the intended torque level of the screw fastener to be tested. Further, measured or calculated $dT/d\Phi$ value is compared with at least one stored $dT/d\Phi$ value, K_R , which is related and close to (preferably just slightly below) the $dT/d\Phi$ value in the elastic deformation range for the tightened screw fastener. The tightened screw fastener is approved if measured or calculated $dT/d\Phi$ is equal to or above K_R . Hereby incorrectly tightened screw fasteners related to machine elements with play between the elements are not approved,

since it has been revealed that $dT/d\Phi$ for such screw fasteners is noticeably lower than the typical $dT/d\Phi$ value in the elastic deformation range.

In accordance with the second method the measured torque value T , is compared with at least one stored torque value, T_E , corresponding to a region or preferably upper region of said elastic deformation range for the tightened screw fastener and measured or calculated $dT/d\Phi$ value is compared with at least one stored $dT/d\Phi$ value, K_P , which is related to a lower plastic deformation range for the tightened screw fastener and clearly below a value for $dT/d\Phi$, K_E , in an elastic deformation range for the tightened screw fastener. The tightened screw fastener is approved if measured T exceeds T_E , and measured or calculated $dT/d\Phi$ is below K_P .

The screw fastener testing method according to the invention can be provided through a specific testing tool, for example a testing tool having features resembling an ordinary manually operated lever arm tightening tool but having the capability to derive T into $dT/d\Phi$ as a function of rotation angle Φ . According to the invention, the testing method can also be carried out in a modified screw tightening tool being equipped for performing a screw fastener testing mode thus being switchable between functioning as a fastener tightening tool and a fastener testing tool.

Further features and advantages are obtained in respect of the rest of the claims and will appear from the following detailed description.

BRIEF DESCRIPTION OF DRAWINGS

The invention will now be described in greater detail at the background of embodiments and with reference to the annexed drawings, wherein

Figs. 1a and 1b in different use illustrate a screw fastener testing tool according to the invention,

Fig. 2 is a diagram over torque as a function of rotational angle for a screw fastener to be tested according to the first method according to the invention,

Fig. 3 is a diagram over torque as a function of rotational angle for a screw fastener to be tested according to the second method according to the invention, and

Fig. 4 is a diagram over $dT/d\Phi$ as a function of rotational angle for a screw fastener to be tested according to the second method according to the invention, and

Fig. 5 is a block diagram over the first method according to the invention.

Fig. 6 is a block diagram the second method according to the invention.

DETAILED DESCRIPTION OF EMBODIMENTS

The tool according to Figs. 1a and 1b is provided with a driving head 2 which includes wrenching means. The

wrenching means is actuated by a motor and a transmission (not shown) being included in the body of the tool 1. As an alternative, the tool 1 does not include a motor or a transmission. In that case it is solely operated by hand power.

In connection with the head 2 there is an engagement socket 3 for the engagement with the head of a screw fastener 4 to be tested. The tool further includes a handle portion 5 and a handle grip 6. Reference numeral 7 indicates a display capable of displaying measured torque, performed rotation angle and further parameters to be explained below. In Fig 1b, elements to be screwed together over a contact face 29 are indicated with 27 and 28.

A processing unit (CPU) 30 is included in the tool and includes circuitry and/or software for parameter measuring, processing measured values, storing significant T, and K values for fasteners and applications, comparing unit(s) for comparing measured values with stored values and output unit(s) for emitting signals relating to result of comparison(s) by the comparing unit(s). 20 indicates a (e.g. green) lamp for emitting an approve signal and 21 indicates a (e.g. red) lamp for emitting a non approve signal.

In Fig. 2 is illustrated torque (T) as a function of rotational angle (Φ). In respect of a typical screw fastener, the curve reaches a relatively linear range corresponding to an area of elastic deformation of the fastener. This is well known to the person skilled in the

art and will therefore not be discussed further here. The diagram illustrates that a screw fastener is provided with an increasing torque level, in order to rotate the screw fastener with test interval angle, $\Delta\Phi$. The line 18 represents a $dT/d\Phi$ value, K_R , equal to and above which the screw fastener is approved and below which the screw fastener is not approved. The curve 8 represents an approved screw fastener where $dT/d\Phi$ is K_a which is a greater value than K_R . The curve 8' represents a not approved screw fastener where $dT/d\Phi$ is K_{na} which is a lower value than K_R . It could be mentioned that in respect of a screw fastener according to curve 8', the torque growth relates mainly to deformation under displacement of the elements to be tightened by the screw fastener, which typically is a noticeably lower value than K_R .

According to the invention, and in order to verify if a screw fastener is correctly tightened, the testing tool 1 in Fig. 1a and 1b is applied to the respective fastener and drawn until the fastener starts to rotate. The start of rotation should, in order to be approved, relate to the intended installed torque level during previous tightening, T_{start} , which as an example can be 60 Nm for a screw fastener of a certain dimension. The screw fastener is thus rotated an test interval with angle $\Delta\Phi$, see Fig. 2, whereby measured or calculated $dT/d\Phi$ value is compared with a stored $dT/d\Phi$ value, K_R . The tightened screw fastener is approved if measured T is equal or above T_{start} and the calculated $dT/d\Phi$ is equal to or above K_R . As an additional condition it is also preferably controlled that the torque value T is below a maximal torque value, T_{max} , the exceeding

of which could jeopardize the integrity of the screw fastener. $\Delta\Phi$ is a test interval and is measured to be enough for reaching a secure diagnosis for the screw fastener. The interval could be a predetermined interval, and lies typically between 2-10 degrees.

The values K_R and T_{start} are conveniently stored in a memory being included in the CPU of the tool 1 in Figs. 1a and 1b, and the progression of the testing method can be signalled on the display 7 as a graph or as digits. In a more simple variant, the tool 1 can be provided solely with indicating LED:s, such as the lamps 20 and 21, for example signalling green light or red light for indicating if a screw fastener is approved or not approved.

In Fig. 3 the curve 18' illustrates torque (T) as a function of rotational angle (Φ). In respect of a typical screw fastener, the curve reaches a relatively linear range corresponding to an area of elastic deformation of the fastener. In an upper region of the curve 18' the yielding point is reached and thereupon plastic deformation of the screw fastener occurs. This is well known to the person skilled in the art and will therefore not be discussed further here.

In an upper area of the elastic range of the torque curve, a point T_E is identified, which is safely still within the elastic range but preferably at an upper region thereof. In the plastic deformation range, a point T_P is identified which is safely within the plastic deformation range but also safely below a break load for the fastener.

In Fig. 4 the curve 9 illustrates $dT/d\Phi$ as a function of Φ , wherein the corresponding points are identified: K_E corresponding to T_E for the curve 18' and K_P corresponding to T_P .

Typically, T_E , T_P and K_E are chosen based on tests on relevant fasteners in relevant applications. T_E , T_P and K_E can also be calculated based on experience and available data about similar fasteners and similar applications.

According to the invention, and in order to verify if a screw fastener is correctly tightened, the testing tool 1 in Fig. 1a and 1b is applied to the respective fastener and rotated the test interval angle $\Delta\Phi$, see Fig. 3, whereupon, on the one hand measured torque value T is compared with the stored torque value T_E and on the other hand measured or calculated $dT/d\Phi$ value is compared with at least one stored $dT/d\Phi$ value, K_P and preferably also with K_E . The tightened screw fastener is approved if measured or calculated $dT/d\Phi$ is below K_P and measured T exceeds T_E .

From the Figs. 3 and 4 is also apparent that T_P and K_P correspond to a rotational angle Φ_2 , whereas T_E and K_E corresponds to a rotational angle Φ_1 . $\Delta\Phi$ is a calculated value which is between a calculated starting point for the plastic range in Fig. 3 and ending in the region just passed Φ_2 . A typical value for $\Delta\Phi$ is within the range 2-20°.

The values K_P , K_E , T_P , T_E and T_{\max} are conveniently stored in a memory being included in the CPU 30 of the tool 1 in Figs. 1a and 1b and the progression of the testing method can be signalled on the display 7 as a graph or as digits. In a more simple variant, the tool 1 can be provided solely with indicating LED:s, such as the lamps 20 and 21, for example signalling green light or red light for indicating if a screw fastener is approved or not approved.

In Fig. 5 a sequence according to the first method is illustrated, wherein

- position 10 indicates start of the sequence,
 - position 11 indicates starting the tool and applying the gripping head thereof onto a fastener to be tested,
 - position 12 indicates applying of a torque to the already tightened screw, while measuring torque value T and comparing it with a stored torque value T_{start} corresponding to a predetermined start torque. When T_{start} has been reached, the sequence is passed on to position 13, otherwise the sequence is passed on to position 15 and a not approved signal is emitted, whereupon the sequence is ended in position 16.
- in position 13 the screw fastener is rotated a test interval or predetermined angle $\Delta\phi$ and $dT/d\phi$ is measured or calculated and compared with a stored $dT/d\phi$ value, K_R . If measured or calculated $dT/d\phi$ value is not above K_R the sequence is passed on to position 15 wherein a not approved signal is emitted, whereupon the sequence is ended in position 16. If measured or calculated $dT/d\phi$ is equal to or above K_R , the sequence

is passed on to position 14 for emitting an approve signal, whereupon the sequence is terminated in position 16.

In Fig. 6 a sequence according to the second method is illustrated, wherein

- position 10' indicates start of the sequence,
- position 11' indicates starting the tool and applying the gripping head thereof onto a fastener to be tested,
- position 12' indicates rotating the tool a test interval or predetermined angle $\Delta\Phi$, while measuring the needed torque level
- in position 13' measured or calculated $dT/d\Phi$ is compared with one stored derivative $dT/d\Phi$ value and if measured or calculated value is not below K_p the sequence is passed on to position 15' wherein a not approved signal is emitted, whereupon the sequence is ended in position 17'. If measured or calculated $dT/d\Phi$ is below K_p , the sequence is passed on to position 14 wherein measured torque value T is compared with stored torque value T_E . If measured T does not exceed T_E the sequence is passed on to position 15' and a not approved signal is emitted, whereupon the sequence is terminated in position 17'. If measured T exceeds T_E the sequence is passed on to position 16' for emitting an approve signal whereupon the sequence is terminated in position 17'.

The invention can be modified within the scope of the following claims.

The tool includes the following functional units: a device for subjecting the tightened screw fastener to a rotational movement which can be a motor or simply a handle operated by hand. A device for measuring the torque can be a common sensor known in the art of screw drivers. A device for measuring or calculating the value of the derivative of the torque, $dT/d\Phi$, can be circuitry processing signals from a torque sensor and an angle counter. An evaluation device is conveniently realised as software in the CPU 30. First and second comparing units are simple logical components well known in the art.

The measured or calculated $dT/d\Phi$ value can be easily obtained by creating the derivative from measured torque and rotational angle. This is per se within the knowledge of the person skilled in the art.

It is preferred that screw fastener approval and/or non approval is followed by the tool emitting a particular visual or audible signal indicating the result from the evaluation device. As an alternative, the result can be viewed simply as digits or a curve on the tool display.

The CPU can be arranged outside the very tool and communicate with the tool over cable or wireless.

The tool can advantageously be equipped with a second memory and/or be connectable to central circuitry and

central memory means for storing approve and not approved data for individual fasteners for documentation purposes.

The screw fastener testing method according to the invention can be provided through a specific testing tool, for example a testing tool having features resembling an ordinary manually operated lever arm tightening tool but having the capability to derive T into $dT/d\Phi$ as a function of rotation angle $\Delta\Phi$. The tool can preferably also be equipped with a switching means to enable the operator to choose between the two testing methods. According to the invention, the testing method can also be carried out in a modified screw tightening tool being equipped for performing a screw fastener testing mode thus being switchable between functioning as a fastener tightening tool and a fastener testing tool.

Claims

1. A screw fastener testing method for verifying the status of a previously tightened screw fastener as regards installed torque (T) and actual torque growth per angle of rotation ($dT/d\Phi$) properties,

c h a r a c t e r i z e d by the following steps

- applying an increasing tightening torque on the fastener, in order to rotate said fastener, for accomplishing a test interval of rotation ($\Delta\Phi$),
- measuring the torque magnitude (T) during said test interval of rotation ($\Delta\Phi$),
- measuring the rotational movement (Φ) of the fastener during said test interval of rotation ($\Delta\Phi$),
- calculating the torque growth per angle of rotation ($dT/d\Phi$) for said test interval of rotation ($\Delta\Phi$),
- comparing the torque magnitude (T) and the calculated torque growth per angle of rotation ($dT/d\Phi$) during said test interval ($\Delta\Phi$) of rotation with predetermined reference values ($T_{start}, K_R ; T_E, K_P$), respectively, characteristic for the actual fastener when tightened to a desired target torque level, and approving or disapproving the fastener status in view of said reference values ($T_{start}, K_R ; T_E, K_P$).

2. Testing method according to claim 1, wherein said predetermined reference values ($T_{start}, K_R ; T_E, K_P$) comprise approved intervals of said indicated torque magnitude (T)

and said indicated torque growth per angle of rotation ($dT/d\Phi$).

3. Testing method according to claims 1 or 2, wherein the test interval ($\Delta\Phi$) has a value in the range of 2-10°.

4. Testing method according to any one of the claims 1-3 **characterized in** that screw fastener status results, approval or non approval, are indicated to the operator by emitting a visual or audible signals.

5. A screw fastener testing tool for verifying the status of a previously tightened screw fastener as regards installed torque (T) and actual torque growth per angle of rotation ($dT/d\Phi$) properties,
c h a r a c t e r i z e d b y

- a device for applying increasing tightening torque on the fastener, in order to rotate said fastener, for accomplishing a test interval of rotation ($\Delta\Phi$),
- a device for measuring the torque magnitude (T) during said test interval of rotation ($\Delta\Phi$),
- a device for measuring the rotational movement (Φ) of the fastener during said test interval of rotation ($\Delta\Phi$),
- a device for calculating the torque growth per angle of rotation ($dT/d\Phi$) for said test interval ($\Delta\Phi$) of rotation,
- a comparing unit for comparing the measured torque magnitude (T) and the calculated torque growth per angle of rotation ($dT/d\Phi$) during said test interval

($\Delta\Phi$) of rotation with predetermined reference values ($T_{\text{start}}, K_R ; T_E, K_P$), respectively, characteristic for the actual fastener when tightened to a desired target torque level, and approving or disapproving the fastener status in view of said reference values ($T_{\text{start}}, K_R ; T_E, K_P$).

6. Testing tool according to claim 5, wherein said predetermined reference values ($T_{\text{start}}, K_R ; T_E, K_P$) comprise approved intervals of said indicated torque magnitude (T) and said indicated torque growth per angle of rotation ($dT/d\Phi$).

7. Testing tool according to claims 5 or 6, wherein the test interval ($\Delta\Phi$) has a value in the range of 2-10°.

8. Testing tool according to any one of the claims 5-7 **characterized in** that screw fastener approval and/or non approval is followed by the tool emitting a visual or audible signal indicating the result from the comparing unit.

9. Testing tool according to any of the claims 5-8, **characterized in** that it includes a motor and a transmission device for subjecting the tightened screw fastener to a rotational movement.

1 / 4

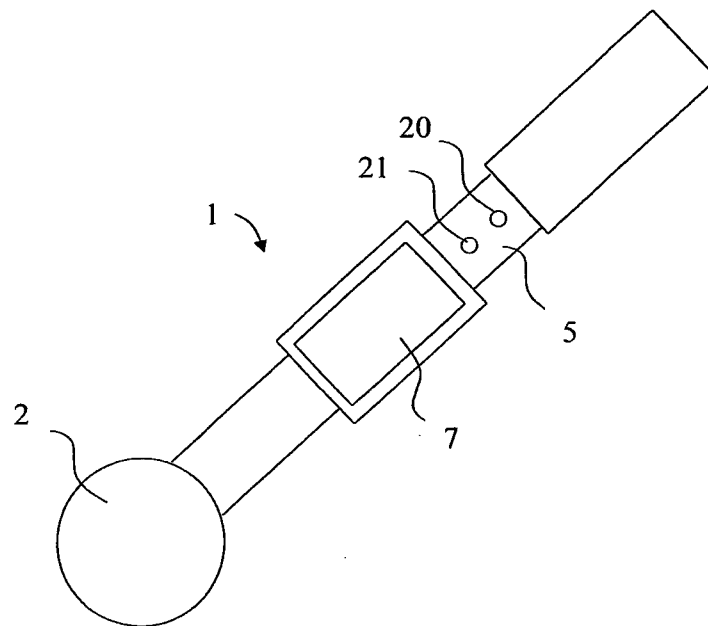


Fig 1a

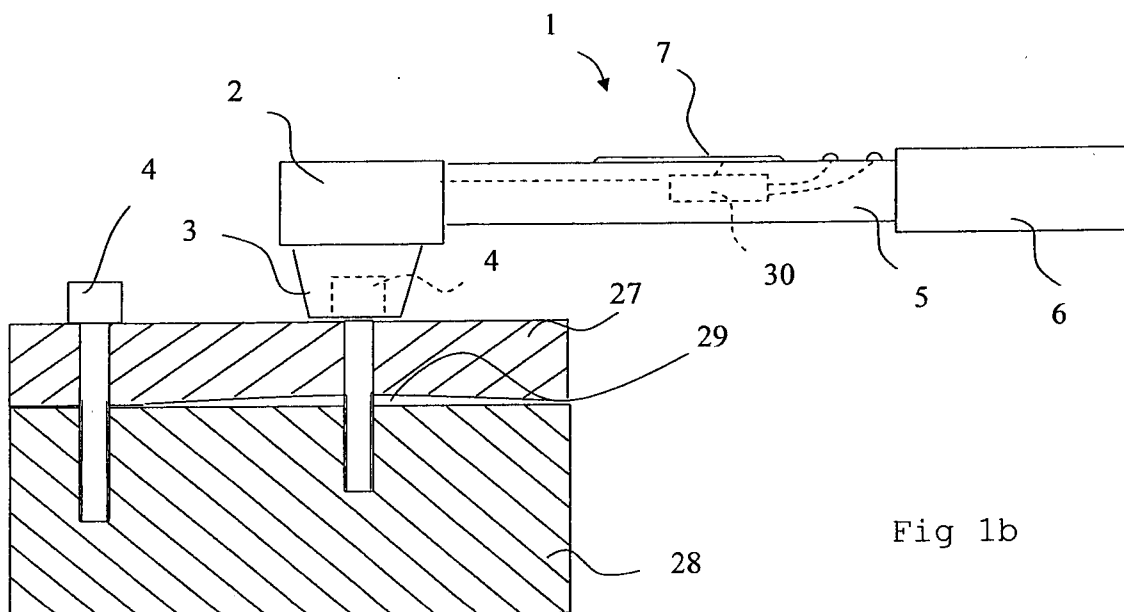


Fig 1b

2/4

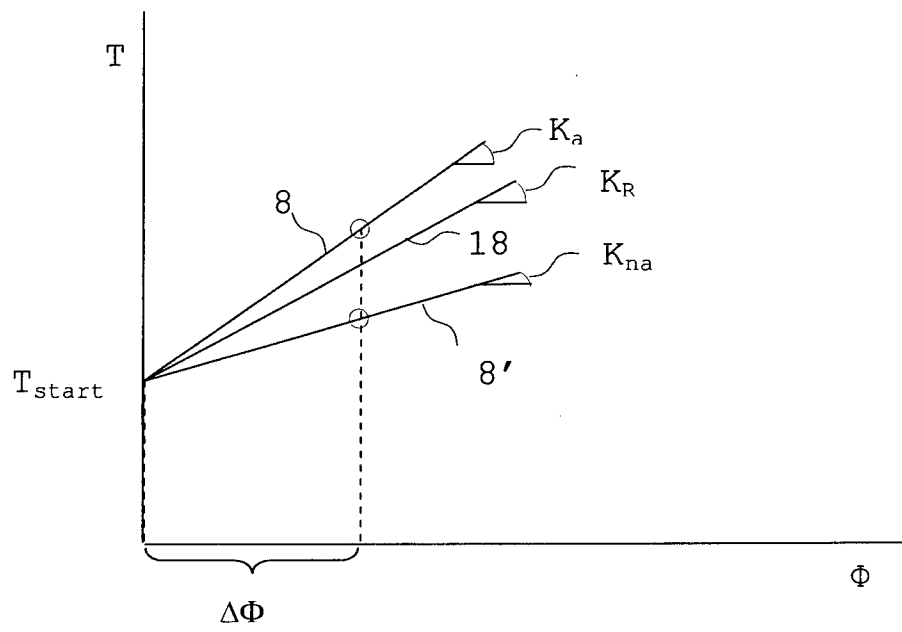


Fig 2

3/4

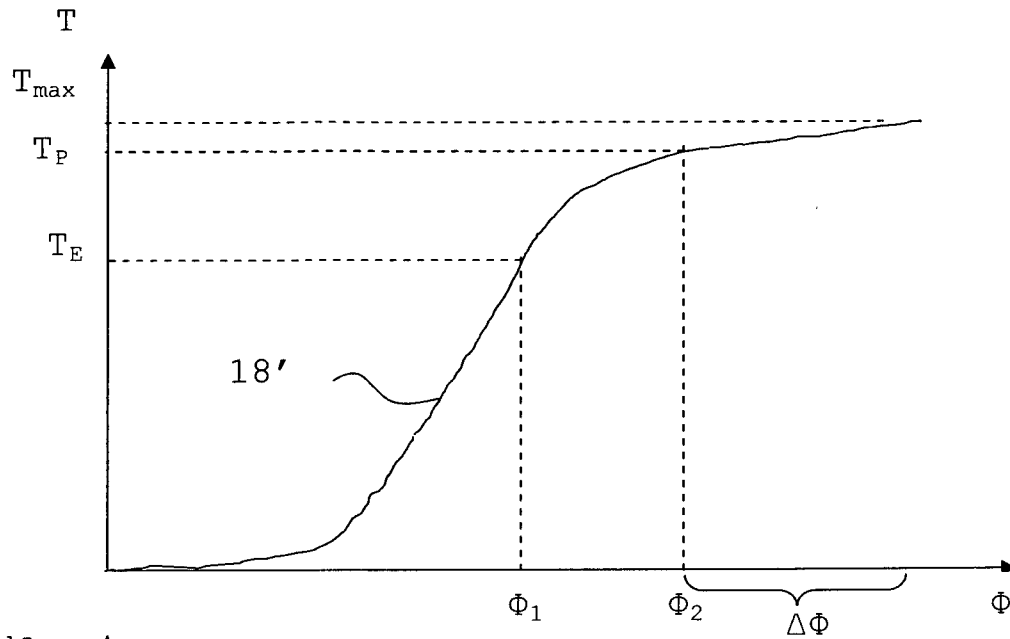


Fig 3

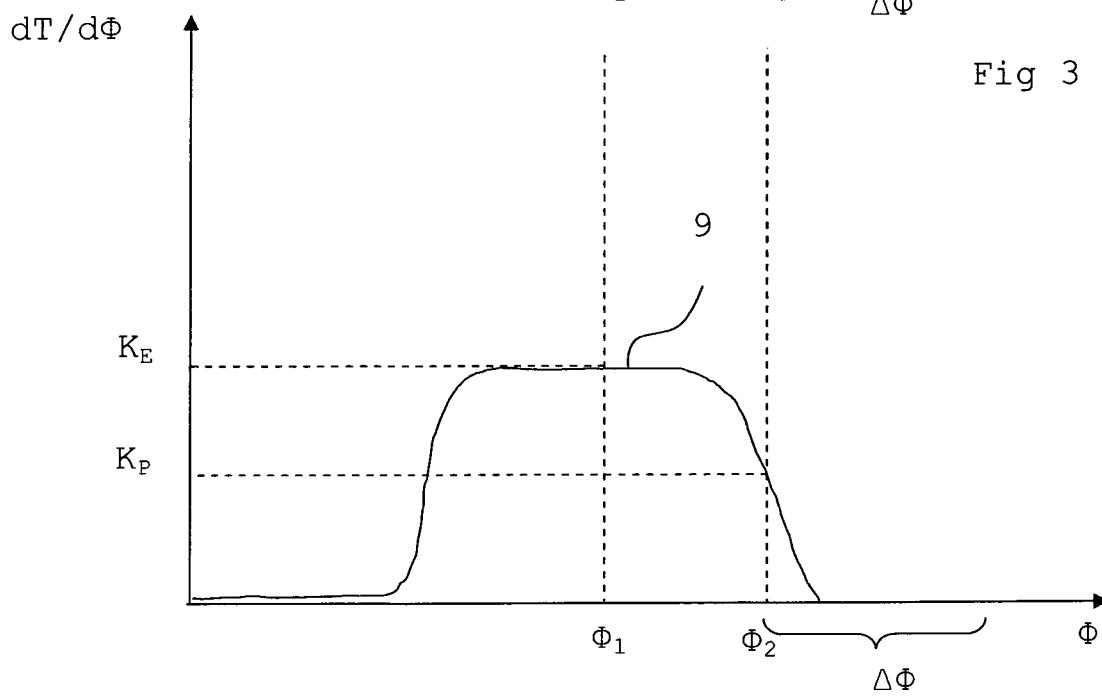


Fig 4

4/4

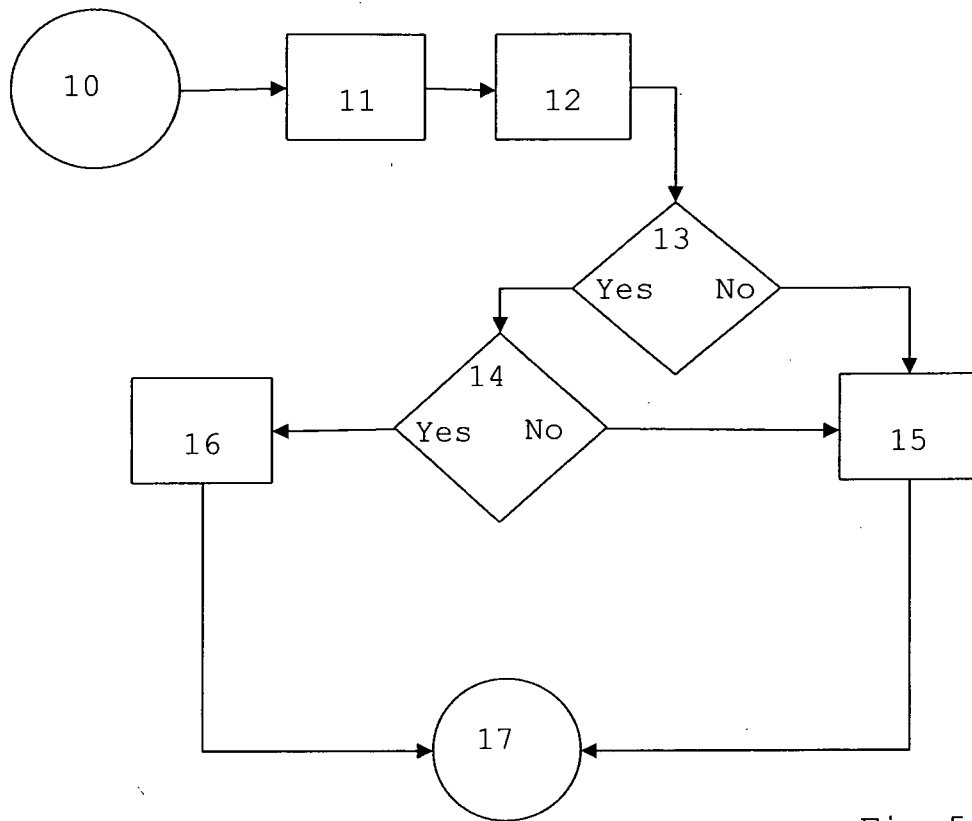


Fig 5

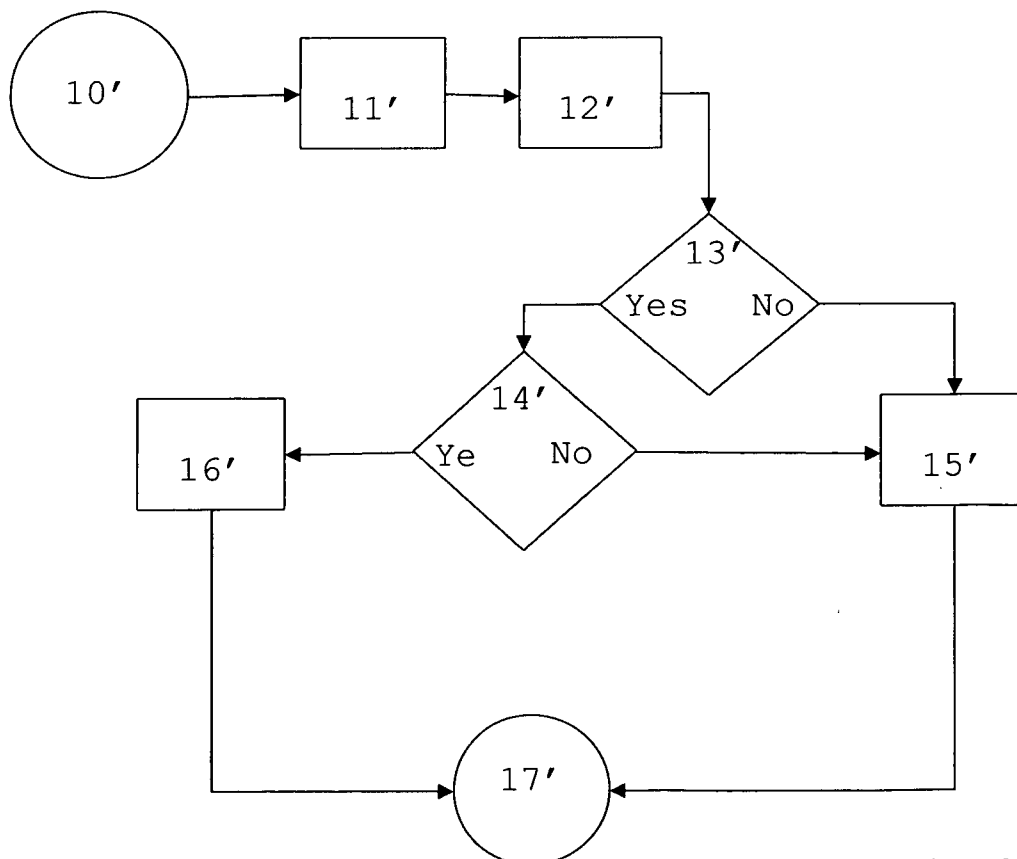


Fig 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2009/000470

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B25B, G01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 4118595 A1 (SCHATZ GMBH), 10 December 1992 (10.12.1992), figure 2, abstract --	1-9
A	US 4244095 A (S. ESHGHY), 13 January 1981 (13.01.1981), abstract --	1-9
A	US 4316512 A (I.E. KIBBLEWHITE ET AL), 23 February 1982 (23.02.1982), abstract --	1-9
A	US 4106176 A (E.E. RICE ET AL), 15 August 1978 (15.08.1978), figure 1, abstract --	1-9

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 January 2010

Date of mailing of the international search report

11-02-2010

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Lars Jakobsson / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2009/000470

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3693726 A (R. HÖRNIG ET AL), 26 Sept 1972 (26.09.1972), figures 1,2, abstract --	1-9
A	US 3982419 A (J.T. BOYS), 28 Sept 1976 (28.09.1976), figures 1,5, abstract -- -----	1-9

International patent classification (IPC)**G01L 5/24** (2006.01)**B25B 23/14** (2006.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se (English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se (Swedish version)

Use the application number as username. The password is
CYGBEQAZQN.

Paper copies can be ordered at a cost of 50 SEK per copy from
PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE2009/000470

DE	4118595	A1	10/12/1992	EP	0587653 A,B	08/01/1997
				ES	2096759 T	16/03/1997
				WO	9221483 A	10/12/1992
<hr/>						
US	4244095	A	13/01/1981	NONE		
<hr/>						
US	4316512	A	23/02/1982	AU	533695 B	08/12/1983
				AU	5719980 A	09/10/1980
				BR	8001997 A	25/11/1980
				CA	1155525 A	18/10/1983
				DE	3012734 A,C	16/03/1989
				ES	8104933 A	01/08/1981
				ES	8204633 A	16/08/1982
				FR	2452997 A,B	07/03/1986
				GB	2048494 A,B	25/05/1983
				IT	1143129 B	22/10/1986
				JP	55164483 A	22/12/1980
				MX	151493 A	04/12/1984
				SE	458181 B,C	29/06/1989
				SE	8002505 A,L	05/10/1980
				ZA	8001998 A	29/04/1981
<hr/>						
US	4106176	A	15/08/1978	CA	1097772 A	17/03/1981
				DE	2813565 A,C	28/04/1988
				FR	2386393 A	03/11/1978
				GB	1575872 A	01/10/1980
				IT	1095106 B	10/08/1985
				JP	1465295 C	10/11/1988
				JP	53125700 A	02/11/1978
				JP	61044635 B	03/10/1986
				SE	440869 B	26/08/1985
				SE	7802939 A	07/10/1978
<hr/>						
US	3693726	A	26/09/1972	NONE		
<hr/>						
US	3982419	A	28/09/1976	NONE		
<hr/>						