

COMMONWEALTH of AUSTRALIA

PATENTS ACT 1952

592271

APPLICATION FOR A STANDARD PATENT

~~I~~  
We

NINTENDO CO., LTD. of,  
60, Fukuine Kamitakamatsu-cho,  
Higashiyama-ku, Kyoto,  
JAPAN.



hereby apply for the grant of a Standard Patent for an invention entitled:

"FRONT LOADING APPARATUS FOR A MEMORY  
CARTRIDGE UTILIZED FOR A DATA PROCESSING MACHINE".

which is described in the accompanying ~~provisional~~  
complete specification.

Details of basic application(s):—

<u>Number</u>	<u>Convention Country</u>	<u>Date</u>
190372/1985	JAPAN	28 August, 1985

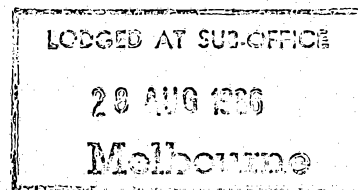

APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED 20.10.89

The address for service is care of DAVIES & COLLISON, Patent Attorneys, of 1 Little  
Collins Street, Melbourne, in the State of Victoria, Commonwealth of Australia.

Dated this 28th day of August, 1986

*H. M. Rimington*

To: THE COMMISSIONER OF PATENTS

(a member of the firm of DAVIES &  
COLLISON for and on behalf of the Applicant).

Davies & Collison, Melbourne and Canberra.

COMMONWEALTH OF AUSTRALIA  
PATENTS ACT 1952  
DECLARATION IN SUPPORT OF CONVENTION OR  
NON-CONVENTION APPLICATION FOR A PATENT

In support of the Application made for a patent for an invention  
entitled: "FRONT LOADING APPARATUS"

Insert title of invention.

Insert full name(s) and address(es)  
of declarant(s) being the appli-  
cant(s) or person(s) authorized to  
sign on behalf of an applicant  
company.

I  
W&K Hiroshi Yamauchi of,  
Nintendo Co., Ltd., of,  
60, Fukuine Kamitakamatsu-cho,  
Higashiyama-ku, Kyoto,  
JAPAN.

Cross out whichever of paragraphs  
1(a) or 1(b) does not apply

1(a) relates to application made  
by individual(s)

1(b) relates to application made  
by company; insert name of  
applicant company.

do solemnly and sincerely declare as follows:-

1. (a) ~~I am~~ the applicant ~~for the patent~~  
~~We are~~

or (b) I am authorized by

NINTENDO CO., LTD.

Cross out whichever of paragraphs  
2(a) or 2(b) does not apply

2(a) relates to application made  
by inventor(s)

2(b) relates to application made  
by company(s) or person(s) who  
are not inventor(s); insert full  
name(s) and address(es) of inven-  
tors.

the applicant..... for the patent to make this declaration on ~~its~~ <sup>their</sup> behalf.

2. (a) ~~I am~~ the actual inventor ~~of the invention~~  
~~We are~~

or (b) Masayuki YUKAWA of, 147-17, Yodoshimozu-cho,  
Fushimi-ku, Kyoto, JAPAN.

~~is~~ the actual inventor..... of the invention and the facts upon which the applicant.....  
~~are~~  
~~is~~ entitled to make the application are as follows:-  
~~are~~

State manner in which applicant(s)  
derive title from inventor(s)

The actual inventor has assigned  
the invention to the said applicant.

Cross out paragraphs 3 and 4  
for non-convention applications.  
For convention applications,  
insert basic country(s) followed  
by date(s) and basic applicant(s).

3. The basic application..... as defined by Section 141 of the Act <sup>was</sup> ~~were~~ made  
in ..... JAPAN..... on the ..... 28 August, 1985  
by ..... NINTENDO CO., LTD.  
in ..... on the .....  
by .....  
in ..... on the .....  
by .....


4. The basic application..... referred to in paragraph 3 of this Declaration <sup>was</sup> ~~were~~  
the first application..... made in a Convention country in respect of the invention the subject  
of the application.

Insert place and date of signature.

Declared at Kyoto this 4th day of September, 1986.

Signature of declarant(s) (no  
attestation required)

Note: Initial all alterations.

  
Hiroshi Yamauchi

DAVIES & COLLISON, MELBOURNE and CANBERRA.

**(12) PATENT ABRIDGMENT (11) Document No. AU-B-62040/86**  
**(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 592272**

**(Modified Examination)**

(54) Title  
**FRONT LOADING APPARATUS**

International Patent Classification(s)  
(51)<sup>4</sup> **H01R 013/70 H05K 007/10 H01R 013/629**

(21) Application No. : **62040/86** (22) Application Date : **28.08.86**

(30) Priority Data

(31) Number (32) Date (33) Country  
**60-190372 28.08.85 JP JAPAN**

(43) Publication Date : **05.03.87**

(44) Publication Date of Accepted Application : **04.01.90**

(71) Applicant(s)  
**NINTENDO CO. LTD.**

(72) Inventor(s)  
**MASAYUKI YUKAWA**

(74) Attorney or Agent  
**DAVIES & COLLISON, MELBOURNE**

(57) Claim

1. A front loading electronic gaming device adapted for use with a memory cartridge containing a first printed circuit board that has a first plurality of electrical contacts spaced along one board edge, said apparatus comprising:

a main unit having a front and rear and containing a second printed circuit board having a second plurality of electrical contacts;

a frame structure mounted to the main unit;

a cartridge tray pivotally mounted to said frame structure for a rotation within a predetermined angular range between a cartridge loading and a cartridge operating position, and having an opening at one end located at the front of the main unit and adapted to slideably receive the cartridge when the tray is in said cartridge loading position;

means biasing said cartridge tray toward said cartridge loading position;

releasable means attached to the frame for locking said cartridge tray in said cartridge operating position; and

an edge connector mounted within said main unit, said edge connector including a connector housing having upper and lower parallel elongated openings adapted to receive the first and second printed circuit boards, respectively, and a plurality of spring electrodes disposed within said connector housing for providing electrical interconnection between the first and second pluralities of electrical contacts of the first and second printed circuit boards, respectively, said spring electrodes having an offset configuration adapted for relatively low insertion force entry of the contacts of the first printed circuit board when said cartridge tray is in the cartridge loading position and being resiliently movable into positive electrical engagement with the contacts of the first printed circuit board as it is rotated with said cartridge tray into said operating position.

592272

COMMONWEALTH OF AUSTRALIA

PATENT ACT 1952

COMPLETE SPECIFICATION

(Original)

FOR OFFICE USE

Class

Int. Class

Application Number:  
Lodged:

62040/86

Complete Specification Lodged:  
Accepted:  
Published:

Priority:

Related Art:

This document contains the  
amendments made under  
Section 49 and is correct for  
printing.

Name of Applicant: NINTENDO CO., LTD.

Address of Applicant: 60, Fukuine Kamitakamatsu-cho,  
Higashiyama-ku, Kyoto,  
JAPAN.

Actual Inventor(s): Masayuki YUKAWA



Address for Service: DAVIES & COLLISON, Patent Attorneys,  
1 Little Collins Street, Melbourne, 3000.

Complete Specification for the invention entitled:

"FRONT LOADING APPARATUS FOR A MEMORY  
CARTRIDGE UTILIZED FOR A DATA PROCESSING MACHINE".

The following statement is a full description of this invention,  
including the best method of performing it known to us :-

## TITLE OF THE INVENTION

A front loading apparatus

## BACKGROUND OF THE INVENTION

### Field of the Invention

5       The present invention relates to a front loading apparatus. More specifically, the present invention relates to a front loading apparatus of a memory cartridge which can be utilized for data processing apparatuses such as home TV game machines and personal computers which perform processing  
10 based on the contents of a memory cartridge being loaded and unloaded freely.

### Description of the Prior Art

      In the data processing apparatuses as described above, a memory cartridge or a memory cassette is used which accommo-  
15 dates a non-volatile memory such as a ROM which stores various programs and data therein. Such a memory cartridge is constituted so as to be able to be loaded in or unloaded from the loading apparatus.

      One example of the conventional memory cartridge and the  
20 loading apparatus which loads it is disclosed, for example, in the U.S. Patent No. 4,095,791 issued on June 20, 1978 or the like.

      In this prior art, most of the memory cartridge is

exposed out of the loading apparatus, and therefore a printed circuit board built in the memory cartridge acts as a sort of antenna, and accordingly this has a problem that spurious radiation is likely to be produced. Also, in the conventional loading apparatus, the edge of the above-described printed circuit board is press-inserted into a connector when inserting the memory cartridge, and therefore a connecting electrode formed on the edge is abraded easily, and thereby when loading and unloading are repeated frequently, metallic plating of the connecting electrode is worn off, resulting in a poor contact of the connector with the cartridge. Furthermore, the conventional apparatus requires a strong force to press-insert or pull the printed circuit board of the memory cartridge into or off the connector, and accordingly no little child can easily load or unload the memory cartridge.

#### SUMMARY OF THE INVENTION

Therefore, a principal object of the present invention is to provide a novel front loading apparatus of a memory cartridge.

Another object of the present invention is to provide a front loading apparatus capable of reducing spurious radiation.

Still another object of the present invention is to

provide a front loading apparatus capable of suppressing abrasion of a connecting electrode formed on the edge portion of a printed circuit board of a memory cartridge.

Still another object of the present invention is to  
5 provide a front loading apparatus capable of easily loading or unloading a memory cartridge.

To be brief, the present invention is of a front loading apparatus for loading a cartridge wherein a memory is mounted on a printed circuit board built therein and the edge portion  
10 of the printed circuit board is exposed, comprising a holding member which is formed so as to be able to insert or pull out the memory cartridge through an inlet port formed at the front end thereof and can hold the memory cartridge in the state that the whole of the memory cartridge is inserted, a  
15 supporting member for supporting the holding member by journaling the rear end part of the holding member so that the holding member can rotate within a certain angle range as viewed from the side thereof, a spring means for rotating the holding member upward with the part supported by the  
20 supporting member centered by elastically energizing the holding member, a connector which is installed near the rear end of the holding member and can face the edge of the printed circuit board of the cartridge when the memory cartridge is inserted, and a locking mechanism for locking  
25 the holding member to the supporting member when the memory



cartridge is inserted into the holding member and the holding member is rotated downward against the spring means.

When the front end part of the holding member is rotated upward and is positioned at the top dead center, the memory  
5 cartridge can be inserted into the holding member from the obliquely upper front of the loading apparatus. After the memory cartridge is inserted, the printed circuit board is inserted into the connector. Then, by pressing the cartridge and the front end part of the holding member from the upper  
10 side, the holding member is rotated downward. In this state, the holding member is locked by the locking mechanism in the state of being kept in a predetermined positional relation with the supporting member. At this time, the surface of the edge of the printed circuit board of the memory cartridge is  
15 pushed against the connector, and a connecting electrode formed on the edge surface is press-contacted with a connecting electrode of the connector, and thereby the both electrodes are connected electrically.

In accordance with the present invention, the memory  
20 cartridge is loaded in the state that the whole thereof is inserted into the front loading apparatus, and therefore spurious radiation can be reduced to a great extent. Also, the connecting electrode of the printed circuit board of the memory cartridge and the connecting electrode of the con-  
25 nector are connected electrically by pressure-contact rather

than by press-in, and therefore not only a strong force is not required for loading or unloading the memory cartridge, but also the loading or unloading of the memory cartridge becomes very easy. In addition, abrasion or peel-off of the metallic plated portion of the connecting electrode of the printed circuit board of the memory cartridge can be suppressed to a great extent, and thereby elongation of the service life of the memory cartridge can be realized.

These objects and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the embodiments of the present invention when taken in conjunction with accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1A and Fig. 1B are perspective views showing one example of a memory cartridge which can be loaded in a loading apparatus in accordance with the present invention.

Fig. 2 is a perspective view showing a home TV game machine as one example of a data processing apparatus wherein a front loading apparatus is incorporated in accordance with the present invention.

Fig. 3 is a perspective view showing one embodiment in accordance with the present invention.

Fig. 4 is a plan view of Fig. 3 embodiment.

Fig. 5 is a partly broken front view of Fig. 3 embodiment.

Fig. 6 is a side view of Fig. 3 embodiment.

Fig. 7 is a cross-sectional view taken along line VII-5 VII in Fig. 3.

Fig. 8 is a front view showing a major portion of a locking mechanism of Fig. 3 embodiment.

Fig. 9 is an illustrative view showing a state of accommodating Fig. 3 embodiment in the home TV game machine 10 main unit as illustrated in Fig. 2.

Fig. 10 is a cross-sectional view showing a connector portion in detail.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1A and Fig. 1B are perspective views showing one 15 example of a cartridge which can be loaded in or unloaded from a front loading apparatus in accordance with the present invention. A cartridge 20 comprises a case 21, and this case 21 is constituted with an upper half 21a and a lower half 21b. A rectangular opening 23 is formed at a front side of 20 the case 21 in the direction of insertion (direction shown by an arrow in Fig. 1A), and a tip of a printed circuit board 24 accommodated in the case 21 is exposed inside the opening 23. In the case 21, a memory such as a ROM or a RAM is mounted on the printed circuit board 24 although not illustrated. If

this cartridge 20 is employed for a video game apparatus, game programs, character data and the like will be stored in advance in such a memory.

The cartridge 20 is inserted into a game machine main unit 10 as described later (Fig. 2) in the direction shown by the arrow in Fig. 1A with the upper half 21a thereof turned upward, that is, in the state as shown in Fig. 1A. Then, in the vicinity of the front side of the case 21 in the direction of insertion, stepped portions 22 and 22' are formed at the both sides thereof. By these stepped portions 22 and 22', the front side of the case 21 in the direction of insertion is formed in a narrow width and a portion of the case behind it is formed in a wide width. These stepped portions 22 and 22' act as stoppers for defining the amount of insertion of the cartridge 20, that is, the case 21 into the loading apparatus at a constant. A concave part 26a is formed at the rear end of the upper half 21a of the case 21 in the direction of insertion, and a concave part 26b is formed at the position of the lower half 21b corresponding to the concave part 26a. These concave parts 26a and 26b act as pinch portions in taking the cartridge 20 out of the game machine main unit 10 (Fig. 2). For this purpose, these concave parts 26a and 26b are desirably formed in a size large enough to be pinched by human fingers.

The concave part 26b of the lower half 21b also plays a

role of inhibiting the normal loading of a cartridge other than an authentic or genuine one in the loading apparatus. To be detailed, the concave part 26b of the lower half 21b enables loading of only such an authentic cartridge that a  
5 concave part of a certain depth is formed at a position or part equivalent to the concave part 26b and checks a normal loading of a false cartridge having a shape other than this shape in cooperation with a cylindrical protrusion 328 as shown in Fig. 6 as described later. In addition, in the  
10 illustrated example, the concave part 26b serves also as a pinch portion, and therefore the area of the concave portion is formed considerably larger than the area of the tip of the cylindrical protrusion 328. However, the concave part 26b may be a small concave part or a through-hole wherethrough  
15 this protrusion 328 can be inserted or pulled out.

As is well understood from Fig. 1B, tapered portions or chamfered portions 25 and 25' having a certain incline are formed at both side ends of the bottom surface of the lower half 21b. These chamfered portions 25 and 25' are for pre-  
20 venting so-called "reverse insertion" that the cartridge 20 is loaded in a reverse fashion. Then, edge portions having a different shape from that of these chamfered portions 25 and 25' are formed at both sides of the top surface of the upper half 21a.

25 Such a cartridge 20 is inserted into the game machine

main unit 10 as shown in Fig. 2. This main unit 10 comprises a case 11 which is formed by a conductive material such as metal. However, the case 11 may be formed by a non-conductive material such as plastics. A lid 12 is supported at the front end part of the top surface of the case 11 in a manner capable of opening and closing. Then, in the case 11, a front loading apparatus 30 is mounted which is described later in detail in reference to Fig. 3 through Fig. 8.

Jacks 13 and 14 are installed on the front surface of the case 11, and a controller (not illustrated) operated by an operator for game is connected by these jacks 13 and 14. Also, on the lower part of the front surface of the case 11, a power switch 15, a light emitting diode 16 for indicating turn-on of this power switch 15 and a reset switch 17 are installed. Furthermore, on the right side surface of the case 11, an external terminal for sound signal 18 and an external terminal for video signal 19 for giving signals to an image displaying apparatus, for example, a CRT (not illustrated) from this main unit 10.

The front loading apparatus 30 comprises a frame 31 which is fixed in the case 11 (Fig. 2), for example, by screws through spacers 38 as shown in Fig. 9. The frame 31 is formed by a conductive material such as metal, being connected to the ground potential. However, the frame 31 may be formed by a non-conductive material such as plastics.

As shown in Fig. 3, the frame 31 has a front wall 311 formed on the front surface thereof and side walls 312 and 313 formed on the both sides thereof, and these side walls 312 and 313 are connected with each other by connecting parts 314 and 315 at the end parts thereof in the direction of depth (rear end parts). Between these connecting parts 314 and 315, a slender opening 316 is formed in a manner of extending in the horizontal direction so that an opening 372 at the upper side of a connector 37 can be inserted therein.

10 Vicinities of the rear end parts of the side walls 312 and 313 are bent inward so as to form L-shaped stepped portions 317 and 318. Also, brim parts 319 and 320 are formed on the outer surfaces of the side walls 312 and 313, and mounting holes 319a and 320a for fixing this frame 31 in the case 11 as illustrated in Fig. 9 are formed in these brim parts 319 and 320.

Top-opened cylindrical spring shoe parts 321 and 322 as well understood from Fig. 4 and Fig. 5 are formed on the outer surface of nearly central parts of the side walls 312 and 313 in the direction of insertion of the memory cartridge 20. In front of these spring shoe parts 321 and 322, engaging grooves 323 and 324 (Fig. 4) for defining the rotary angle range of a tray 33 as described later (Fig. 6) are formed on the inner surfaces of the side walls 312 and 313.

25 These engaging grooves 323 and 324 are formed in a manner of

extending to the position about two-thirds of the height thereof from the bottom ends of the side walls 312 and 313.

Then, shaft holes 325 (Fig. 3 and Fig. 6) wherethrough a shaft for rotatably supporting the tray 33 penetrates are formed respectively in the vicinities of the stepped portions 317 and 318 of the side walls 312 and 313, and at these positions, grooves 326 extending from the top end of the side walls 312 and 313 to the shaft holes 325 are formed. Thus, in the frame 31, the tray 33 for holding the inserted cartridge 20 is supported by the shaft (not illustrated) penetrating through the shaft hole 325 so as to be able to rotate from the state of Fig. 7 to the state of Fig. 9. The front opening of the tray 33, that is, the port for inserting the cartridge 20 is located at the position of the lid 12 of the main unit 10 as described above, and accordingly the cartridge 20 can be inserted into the tray 33 can be pulled out therethrough.

The tray 33 is formed by a conductive material such as metal. However, the tray 33 may be formed by a non-conductive material such as plastics. The tray 33 comprises a bottom plate 331 and side walls 332 and 333 formed at both sides of the bottom plate 331. The shape and area of the part of the bottom plate 331 defined by the side walls 332 and 333 are selected to be nearly equal to the outside shape and area of the cartridge 20 loaded therein. This means that



the tray 33 is constituted so that the whole of the cartridge 20, according, the case 21 can be accommodated or held in the space formed at the upper part thereof. Protruding rods 334 and 335 having a triangular cross-section are fixed to corner portions formed by jointing the bottom plate 331 and the side walls 332 and 333. The incline angles of these protruding rods 334 and 335 to the bottom plate 331 correspond to the incline angles of the above-described chamfered portions 25 and 25' of the cartridge 20 (Fig. 1B). Accordingly, the surfaces of these protruding rods 334 and 335 act as contacting surfaces with the chamfered portions 25 and 25'. This means that the "reverse insertion" of the cartridge 20 is prevented by the chamfered portions 25 and 25' and the protruding rods 334 and 335.

15 Protruding rods 336 and 337 having a rectangular or circular arc cross-section are disposed in a manner of extending in the insertion direction of the memory cartridge 20 on the top surface of the bottom plate 331 of the tray 33 in the vicinity of the side end part thereof. These protruding rods 336 and 337 serve to reduce the contact resistance by preventing the back surface of the cartridge 20 inserted into the tray 33, that is, the surface of the lower half 12b from face-contacting with the bottom plate 331. Also, these protruding rods 336 and 337 act as reinforcing members of the bottom plate 331. This means that space for

inserting the cartridge 20 can be secured enough by these protruding rods 336 and 337 even if some extend of warping takes place on the bottom plate 331 in the direction of depth thereof.

5       Stepped portions 338 and 339 corresponding to the side walls 312 and 313 of the frame 31 are formed at the rear end portions of the side walls 332 and 333 of the tray 33. These stepped portions 338 and 339 engage with the stepped portions 22 and 22' of the cartridge 20 to define the amount of  
10 insertion of the cartridge 20 at a constant value.

As is well understood from Fig. 3 and Fig. 4, protrusions protruding inside 341, 342, 343 and 344 are formed at the top ends of the side walls 332 and 333 of the tray 33. A gap from the bottom end surfaces of these protrusions 341 -  
15 344 to the top end surface of the protrusions 336 and 337 is selected nearly equal to or a little larger than the thickness of the case 21 of the cartridge 20. Accordingly, the cartridge 20 is inserted between the protruding rods 336 and 337 and the protrusions 341 - 344. Then, the protrusions 341  
20 - 344 play a role of preventing the cartridge 20 from coming upward off the tray 33 when rotating the tray 33 downward in the state that the cartridge 20 is inserted as described later.

A reinforcing plate 345 composed, for example, of metal 25 of the like is mounted on a pair of protrusions 341 and 342

in front. This reinforcing plate 345 connects the side walls 332 and 333 to prevent the bottom plate 331 from warping. Also, if the cartridge 20 is inserted in the state that the tray 33 is pushed-in downward, the reinforcing plate 345 strikes against the front of the cartridge 20, and therefore insertion of the cartridge 20 in such a state can be checked.

If the reinforcing plate 345 is composed of a conductive material and is connected electrically to the frame 31, the reinforcing plate 345 acts also as a discharging means for 10 discharging charges charged on the case 21 in inserting the cartridge 20. This means that when the cartridge 20 is inserted into the tray 33, the surface of the upper half 21a of the case 21 is brought in contact with the reinforcing plate 345. Then, the charges stored on the case 21 are 15 discharged to the potential of the frame 31, that is, the ground potential through this reinforcing plate 345. Accordingly, electric bombardment onto electronic components (not illustrated) mounted on the printed circuit board 24 in the case 21 is prevented, and these electronic components are 20 protected effectively from static electricity.

At the top end parts of the side walls 332 and 333 of the tray 33, spring stop pieces 346 and 347 are formed in an outside-protruded manner at the positions of the spring shoe parts 321 and 322 installed on the side walls 312 and 313 of 25 the frame 31. Coil springs 348 are held respectively in the

spring shoe parts 321 and 322 by these spring stop pieces 346 and 347. As described above, the tray 33 is supported by the shaft (not illustrated) penetrating through the shaft holes 325 so as to be rotatable around this shaft, and therefore 5 normally the tray 33 is elastically energized upward by these coil springs 348. Then, engaging protrusions 350 and 351 (Fig. 6 and Fig. 9) for defining the upper limit of upward rotation of the tray 33 by the springs 348 are formed on the outer surfaces of the side walls 332 and 333 facing the 10 engaging grooves 323 and 324 formed on the inner surfaces of the side walls 312 and 313 of the frame 31. The state that the tray 33 is rotated to the upward limit is a state that the cartridge 20 can be inserted into or pulled off the tray 33.

15 At the front end of the bottom plate 331 of the tray 33, a stepped portion 352 is formed in a manner of stepping down the bottom plate 331, and a through-hole 353 is formed at a predetermined position of this stepped portion 352. Inside the front wall 311 of the frame 31, a holding plate 327 is 20 formed under the stepped portion 352 thereof. A cylindrical protrusion 328 is formed in an upright fashion at a predetermined position on this holding plate 327. The outer diameter of the cylindrical protrusion 328 is a little smaller than the inner diameter of the through-hole 353. Also, 25 the height of the cylindrical protrusion 328 is selected so

that the top end thereof protrudes beyond the top surface of the bottom plate 331 by a length equivalent to the depth of the concave part 26b (Fig. 1B) of the lower half 21b. Then, the cylindrical protrusion 328 is formed at the position 5 where it faces the concave part 26b when the cartridge 20 is inserted into the tray 33. Accordingly, the tray 33 is allowed to rotate downward until the concave face of the concave part 26b contacts with the top end of the cylindrical protrusion 328. Thereby, the normal loading of the cartridge 10 20 is made possible. If a cartridge whereon no concave part 26b is formed is inserted, the top end of the cylindrical protrusion 328 contacts with the back surface of the cartridge, and thereby the downward rotation of the tray 33 is checked. Thus, the cylindrical protrusion 328 plays a 15 role of inhibiting loading of a cartridge of a shape other than predetermined, that is, a false cartridge in cooperation with the concave part 26b of the lower half 21b.

Furthermore, a locking mechanism 36 is installed in association with the front wall 311 of the frame 31 and the 20 stepped portion 352 of the bottom plate 331 of the tray 33. This locking mechanism 36 is installed on the front wall 311 as shown in Fig. 7 and Fig. 8, and comprises a key mechanism 36a equivalent to a key and a cam mechanism 36b which is installed under the stepped portion 352 of the front end of 25 the bottom plate 331 of the tray 33 and is equivalent to a

lock.

As shown in Fig. 7, the key mechanism 36a comprises an engaging groove 361 formed on the back side of the front wall 311, and a plate spring 362 is fixed to this engaging groove 361. Then, a hook-shaped or U-shaped hook pin 363 is energized to the cam mechanism 36b side by this plate spring 362. Furthermore, a holding piece 364 supports the top end of the hook pin 363 in a fixed fashion and the bottom end thereof in a manner capable of swinging.

As shown in Fig. 8, the cam mechanism 36b comprises a heart-shaped groove 365 which is a little wider than the thickness of the above-mentioned hook pin 363 and is formed in a heart shape as a whole at somewhat upper portion from the center thereof. An engaging protrusion 366 is formed by an island part surrounded by this heart-shaped groove 365. Also, a groove 367 is formed which extends downward from the bottom end of the heart-shaped groove 365, and a trumpet-shaped groove 368 is formed at a further lower position from this groove 367.

Normally the tray 33 is kept in the state as shown in Fig. 9 by the coil spring 348. Then, when the cartridge 20 is loaded, it is inserted into the space which is defined by the bottom plate 331 and the side walls 332 and 333 of the tray 31 in the state that the front end thereof is lifted upward. Thereafter, this tray 33 is pushed down against the

spring force of the coil spring 348. At this time, since the top end of the hook pin 363 is supported in a fixed fashion by the holding piece 363, the cam mechanism 36b is guided by the bottom end of the hook pin 363, the trumpet-shaped groove 5 368, the groove 367 and the heart-shaped groove 365 on the right of the engaging protrusion 366. This means that the cam mechanism 36b displaces so that the bottom end of the hook pin 363 moves in the heart-shaped groove 365 and depicts a locus as shown by a dash-dot line in Fig. 8, and accord-  
10 ingly, the bottom end of the hook pin 363 is brought to the position of a point P1 as shown in Fig. 8. Thereafter, when the pushing pressure from the upside of the tray 33 is weakened, this tray 33 is restored upward by an elastic force of the coil spring 348. Then, the bottom end of the hook pin  
15 363 engages with a U-shaped concave part of the top side of the engaging protrusion 366, that is, a portion as shown by a pP2 in Fig. 8, and thereby the tray 33 is locked. This means that the tray 33 holds the downward-pushed state as illustrated in Fig. 7.

20 On the other hand, when the cartridge 20 is taken out, the tray 33 in the state of Fig. 7 is pushed downward again. Then, a point P3 (Fig. 8) of the heart-shaped groove 365 reaches the bottom end of the hook pin 363. With weakening the pushing pressure from the upper side of the tray 33, the  
25 bottom end of the hook pin 363 moves along the heart-shaped

groove 365 on the left of the engaging protrusions 336, the groove 367 and the trumpet-shaped groove 368, being brought to the bottom end of this trumpet-shaped groove 368. This means that the bottom end of the hook pin 363 moves so as to  
5 depict a locus as shown by a dotted line in Fig. 8, and thereby the locked state of the tray 33 is released.

As is described above, in the cam-system locking mechanism 36 of this embodiment, the tray 33 is locked by a first push, and the locking thereof is released by a second push to  
10 restore to the normal state. However, it is possible of course that such a locking mechanism is constituted with a lever or the like, and the lock by the lever is released in interlocking with an operation of an eject button (not illustrated).

15 As shown in Fig. 3, an opening 372 of the connector 37 is engaged with the opening 316 of the rear end of the frame 31. The connector 37 comprises a case 371 which has a U-shaped side surface as shown in Fig. 9 and is oblong when viewed from the front, and in front of this case 371, the  
20 above-described two openings 372 and 373 are formed up and down with an interval kept. As is well understood from Fig. 10, the edge portions of the printed circuit board 24 of the cartridge 20 and a printed circuit board 39 of the game machine main unit 10 are inserted respectively into these  
25 openings 372 and 373, and these printed circuit boards 24 and



39 are connected electrically.

To be described in further detail, as shown in Fig. 9 and Fig. 10, the front end of the top side of the case 371 protrudes forward beyond the front end of the bottom side 5 thereof, and accordingly, the opening 372 is located forward from the opening 373. Then, the printed circuit board 24 of the caridge 20 is inserted obliquely into the opening 372. For this purpose, the tip of a top-side open end 376a defining the opening 372 is bent inward in a slant fashion. On 10 the other hand, the tip of a bottom-side opening end 376b defining the opening 373 is bent in a nearly horizontal fashion.

A large number of pairs of spring electrodes 378 and 379 having a U-shaped side cross-section are accommodated in the 15 case 371. These spring electrodes 378 and 379 are arranged respectively in the direction of width of this connector 37 with a constant interval kept in a manner of plural pairs. Grooves or partitions (not illustrated) are preferably formed on the inner surface of the case 371 to dispose such spring 20 electrodes 378 and 379 at a constant interval. Then, the respective bottom-side open ends of the spring electrodes 378 and 379 are bent inward in a U-shaped fashion, being formed as contact parts 378b and 379b facing each other.

Also, the top-side open end of the spring electrode 379 25 is bent inward in a U-shaped fashion to form a contact part

378a, and the top-side open end of the spring electrode 378 is bent outward in a V-shaped fashion in the vicinity of the opening 372, and the tip thereof is further folded back in a V-shaped fashion, thereby a contact part 379a is formed.

5 These contact parts 378a and 379a are located so as to shift from each other in the direction of insertion of the printed circuit board 24 as shown by an arrow A, and an interval equal to or somewhat larger than the thickness of the printed circuit board 24 is created between the both when viewed from

10 an obliquely upper position where the cartridge 20 is inserted. Then, a stopper 381 for defining the depth of the printed circuit board 24 is formed at a position which is deeper than and under the contact part 378a. The reason why the contact parts 378a and 379a are disposed in the direction  
15 of insertion of the printed circuit board 24 with an interval kept in such a manner is to facilitate the loading of the printed circuit board 24, that is, the cartridge 20.

To be detailed, when the cartridge 20 is loaded, the printed circuit board 24, that is, the cartridge 20 is  
20 inserted until the tip of the printed circuit board 24 of the cartridge 20 strikes against the stopper protrusion 381, and thereafter the front end of the printed circuit board 24 is pushed downward against the coil spring 348 to a position where the printed circuit board 24 becomes parallel with the  
25 printed circuit board 39 with the contact part 379a acting as

a fulcrum, and thereby connecting electrodes (not illustrated) formed on one or both surfaces of the edge portion of the printed circuit board 24 are brought in pressure-contact with the contact part 378a and/or 379a. This means that in accordance with the present embodiment the printed circuit board 24 of the cartridge 20 is not required to be press-inserted into the electrodes 378 and 379 of the connector 37.

When a game is performed using the game machine main unit 10 (Fig. 2), first the sound external terminal 18 and the video external terminal 19 are connected to a CRT (not illustrated) such as a home TV set. Thereafter, the lid 12 is opened, and the cartridge 20 is inserted into the tray 33 with the lower half 23b thereof positioned downward (Fig. 7). At this time, the stepped portions 22 and 22' of the cartridge 20 engage with the stepped portions 338 and 339 of the tray 33, and thereby the amount of insertion of the cartridge 20 is defined. However, the whole of the cartridge 20 is put on the tray 33. Then, the top-side opening 372 of the case 371 of the connector 37, that is, the whole of the top-side open end 376a engages with the inside of the opening 23 (Fig. 1A) of the case 21 of the cartridge 20. As shown in Fig. 10, this is not the normal state of loading of the printed circuit board 24 of the cartridge 20, but the printed circuit board 24 of the cartridge 20 has a predetermined incline angle, for example, an incline angle of about  $10^{\circ}$

with respect to the printed circuit board 39 of the game machine unit 10, and therefore the spring electrodes 378 and/or 379 and the connecting electrode of the printed circuit board 24 are not in the state of complete contact.

5 Subsequently, the cartridge 20, that is, the tray 33 is pushed down from the upper side. At this time, when a pre-determined-shaped, that is, authentic cartridge has been inserted, the tray 33 is pushed downward, and the locking mechanism 36 locks the tray 33 to the frame 31 in the hori-  
10 zontal state as described in reference to Fig. 8. Accordingly, as described previously, the connecting electrodes of the printed circuit board 24 are brought in press-contact with those corresponding to the spring electrodes 378 and/or 379 in the top-side opening 372 of the connector 37, and  
15 these are put in the state of complete contact, being connected electrically. Thereafter, the lid 12 (Fig. 2) is closed, and the game can be performed using a controller (not illustrated).

When a cartridge wherein no concave part 26b (Fig. 1B)  
20 is formed, that is, a false cartridge is inserted on the tray 33, the tray 33 cannot be pushed downward because the cylindrical protrusion 328 (Fig. 6) strikes against the back surface of the cartridge, and thereby the false cartridge cannot be loaded.

25 When the game ends, or when another kind of game is

intended to be performed in the middle of the game, the lid 12 is opened and the front end portion of the memory cartridge 20 has only to be pushed downward. Then, the locked state by the locking mechanism 36 is released, and the tray 5 33 is rotated upward by the coil spring 348 to restore to the state as shown in Fig. 9. Then, the user pinches the concave parts 26a and 26b of the memory cartridge 20 by fingers, taking the memory cartridge 20 out of the loading apparatus 30, that is, the game machine main unit 10.

10 Although the present invention has been described and illustrated in detail, it is clearly understood that the same is by way of illustration and example only and is not to be taken by way of limitation, the spirit and scope of the present invention being limited only by the terms of the 15 appended claim.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A front loading apparatus for loading a memory cartridge wherein a memory is mounted on a printed circuit board built in a case and an edge portion of said printed circuit board is exposed out of said case, comprising:

5 a holding member which is formed in a manner that said memory cartridge can be inserted in or pulled out through an inlet port formed at the front end thereof, and can hold said memory cartridge in the state that the whole of said case is inserted,

10 a supporting member for supporting said holding member by journaling the rear end portion of said holding member in a manner that said holding member can rotate within a certain angle range as viewed from the side thereof,

15 a spring means for rotating the front end of said holding member upward with the portion journaled by said supporting member centered, and

20 a locking mechanism for locking said holding member in the state that said holding member has a predetermined positional relation to said supporting member when said holding member is rotated downward against said spring means.

2. A front loading apparatus in accordance with claim 1, which further comprises a connector which is installed in the vicinity of the rear end of said holding member, and is disposed at a position associated with the edge portion of

the printed circuit board of said memory cartridge when said memory cartridge is inserted into said holding member, and has connecting electrodes which can be press-contacted with connecting electrodes formed at said edge portion when said  
5 holding member is rotated downward in the state that said memory cartridge is inserted.

3. A front loading apparatus in accordance with claim 2, wherein said holding member includes a bottom plate having a size and shape approximate to the size and shape of said case  
10 of said memory cartridge and side walls formed at both side ends of said bottom plate, and said side walls form a space wherein said memory cartridge can be inserted in cooperation with said bottom plate.

4. A front loading apparatus in accordance with claim 3,  
15 which further comprises a defining means for defining the top surface of said space formed by said bottom plate and said side walls.

5. A front loading apparatus in accordance with claim 4,  
20 wherein said defining means includes connecting members which connects the top ends of said side walls.

6. A front loading apparatus in accordance with claim 4, which further comprises a friction reducing means for reducing friction when said case of said memory cartridge is inserted into said space.

25 7. A front loading apparatus in accordance with claim 6,

wherein said friction reducing means is formed on the upper surface of said bottom plate and comprises a protruding rod extending in said direction of insertion of the memory cartridge.

5 8. A front loading apparatus in accordance with claim 3, wherein said case of said memory cartridge is formed in a peculiar shape as viewed in said direction of insertion, further comprising a shape defining means which is formed in said space of said holding member and defines a formation  
10 responding to the shape of said case.

9. A front loading apparatus in accordance with claim 8, wherein said shape defining means includes a corner defining means formed at the corner portion of said space as viewed in said direction of insertion.

15 10. A front loading apparatus in accordance with claim 9, wherein said corner defining means includes a protrusion installed at said corner formed by jointing said bottom plate and said side walls of said holding member.

11. A front loading apparatus in accordance with claim 10,  
20 wherein said corner defining means includes a protruding rod formed at said corner in a manner of extending in said direction of insertion of the cartridge.

12. A front loading apparatus in accordance with claim 3, wherein said supporting member includes a frame surrounding  
25 the periphery of said holding member.



13. A front loading apparatus in accordance with claim 1, wherein said locking means includes a first member installed in associated with said holding member and a second member which is installed in association with said supporting member, and engages with said first member when said holding member is rotated downward.

14. A front loading apparatus in accordance with claim 13, wherein said second member includes a hooking part which can hook said first member at two different positions of the upper part and the lower part of said holding member.

15. A front loading apparatus in accordance with claim 14, wherein said first member includes a protrusion, and said second member includes a groove wherewith said protrusion engages and a position defining means for defining the position so that said protrusion is hooked stably at said two positions of said groove.

16. A front loading apparatus in accordance with claim 14, wherein said position defining means includes a heart-shaped island wherearound said groove is formed.

17. A front loading apparatus substantially as hereinbefore described with reference to the drawings.

18. The steps or features disclosed herein or any combination thereof.

DATED this 28th day of August, 1986.

NINTENDO CO., LTD.

By its Patent Attorneys

DAVIES & COLLISON

FIG. 1A

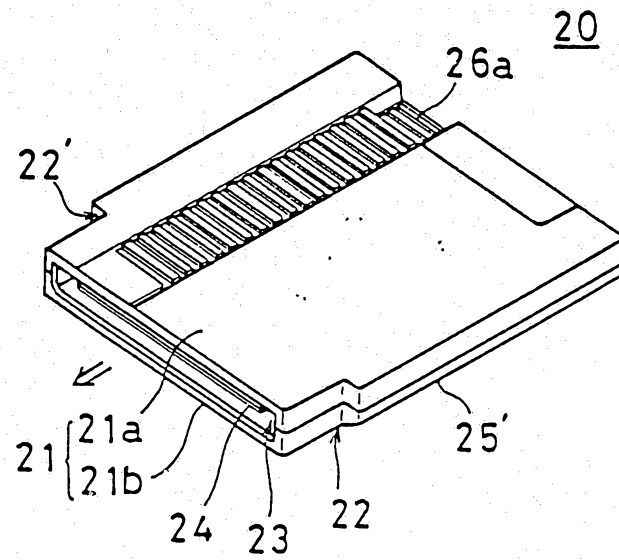


FIG. 1B

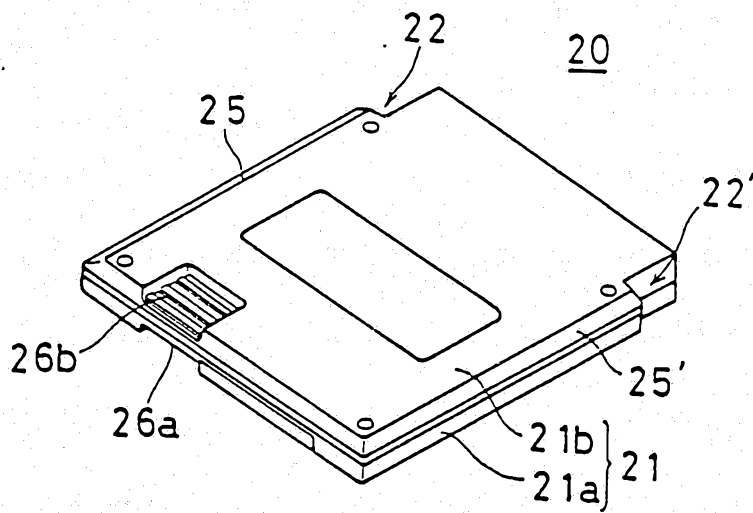


FIG. 2


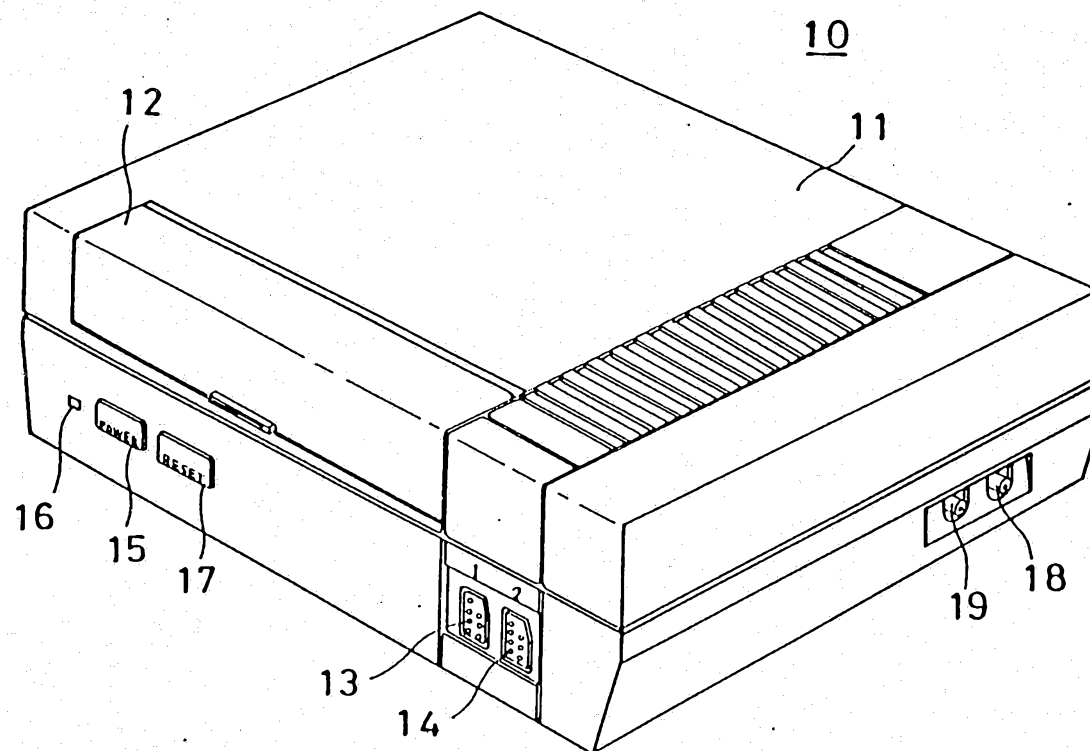


FIG. 3

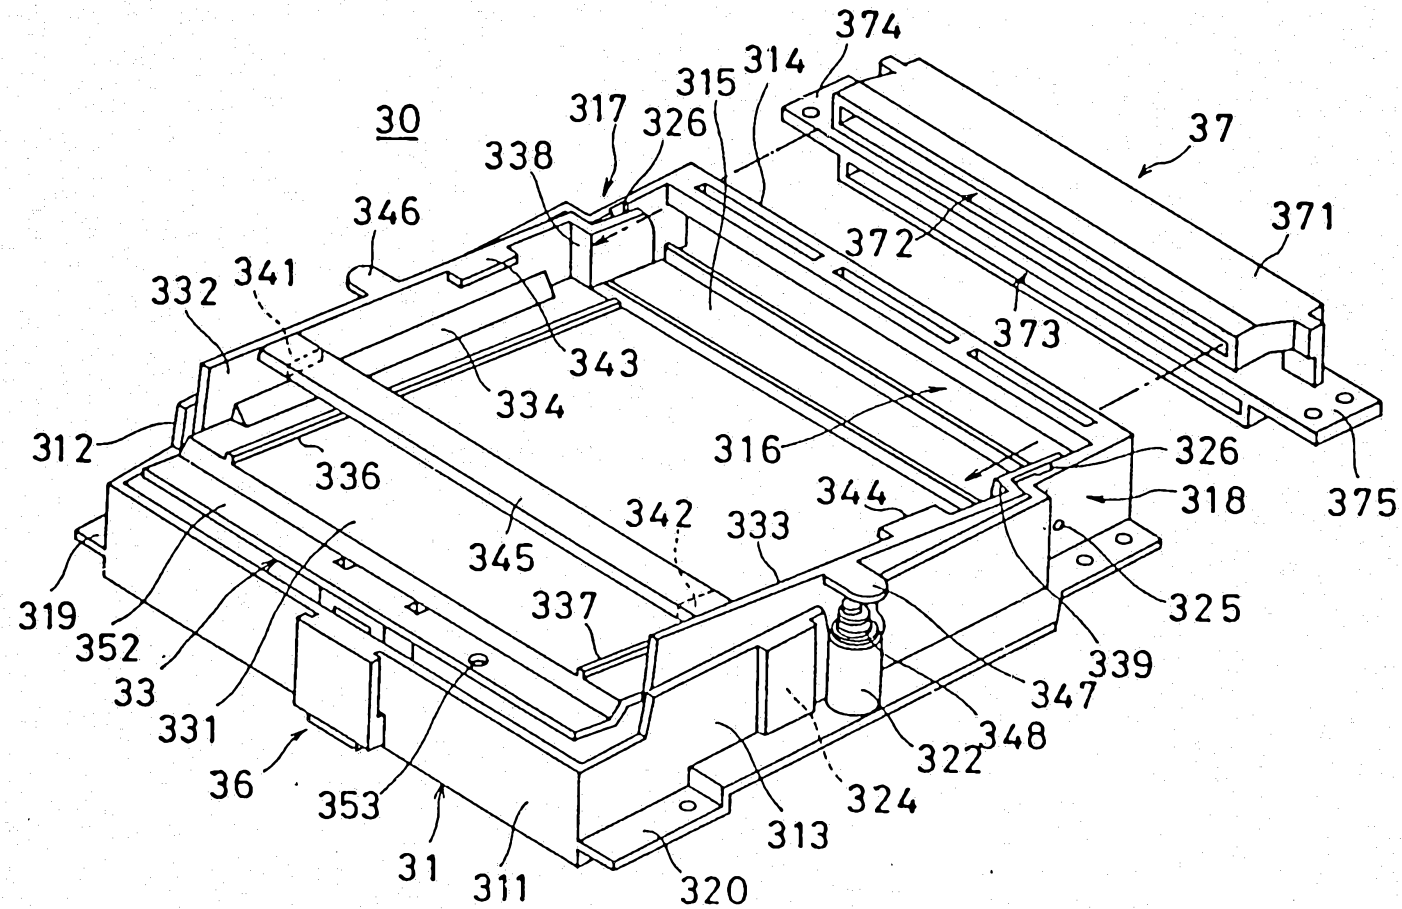

62040/86



FIG. 6

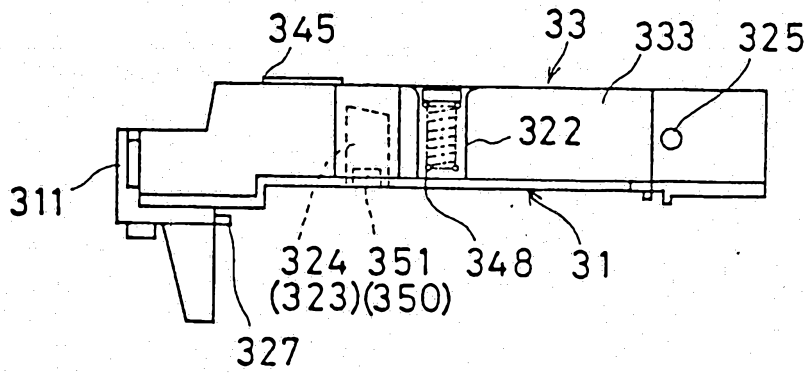


FIG. 7

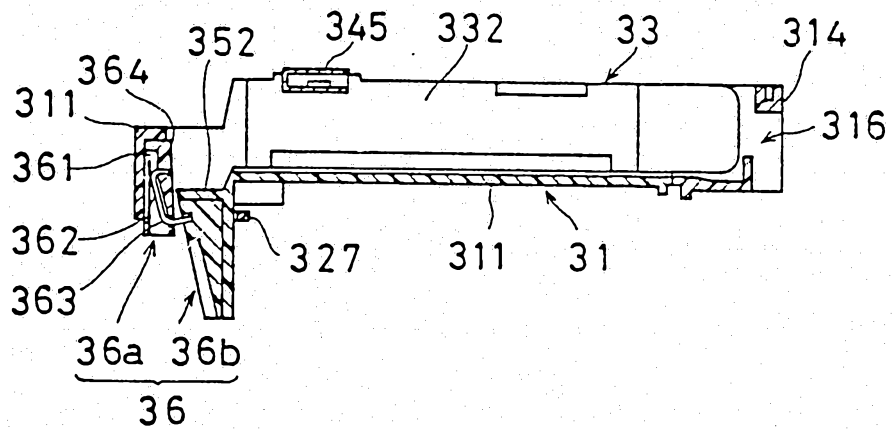


FIG. 8

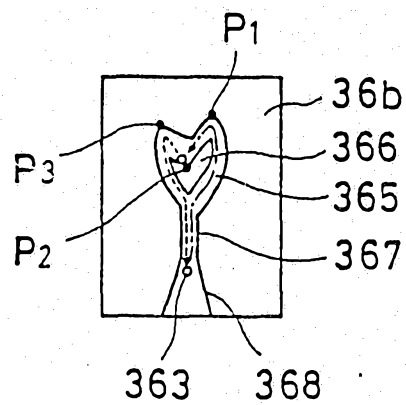


FIG. 9

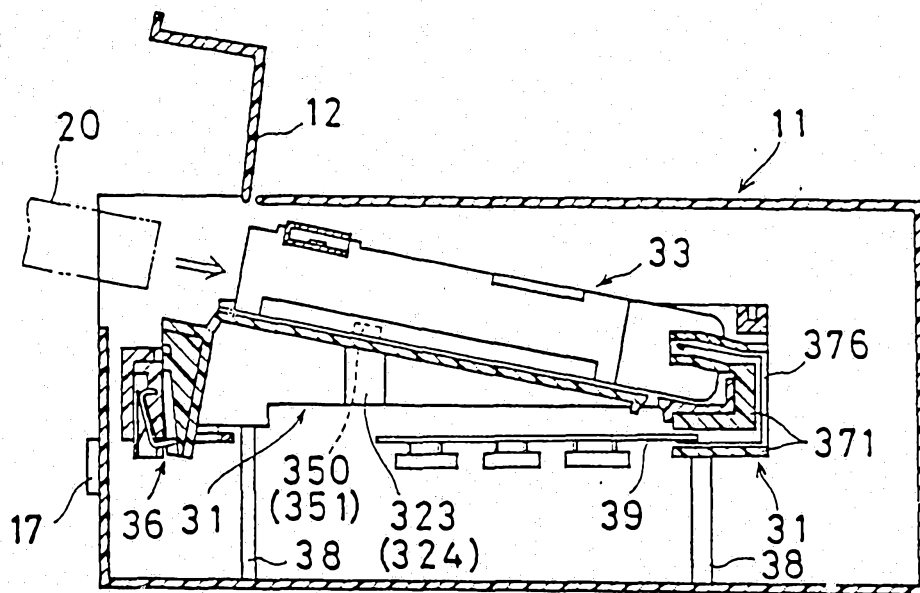


FIG. 10

