



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 433 453 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.06.2004 Bulletin 2004/27

(51) Int Cl.7: **A61H 1/00, A61H 37/00**

(21) Application number: **03029806.1**

(22) Date of filing: **23.12.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(72) Inventors:
• **Furuie, Yoshiya
Hyogo (JP)**
• **Koma, Toshiki
Hyogo (JP)**
• **Kan, Yuji
Hyogo (JP)**

(30) Priority: **26.12.2002 JP 2002375982**

(71) Applicant: **Sanyo Electric Co., Ltd.
Moriguchi-shi, Osaka (JP)**


(74) Representative: **Wagner, Bernhard Peter
ter Meer Steinmeister & Partner GbR
Mauerkircherstrasse 45
81679 München (DE)**

(54) **Massage machine**

(57) The invention provides a massage machine comprising a massage unit which itself can be pushed out relative to a backrest to thereby enable therapeutic fingers to be pushed out by a great amount. The massage machine comprises a backrest (12) provided on a chair for the person to be massaged to sit in, and a mas-

sage unit (20) reciprocatingly movable upward and downward longitudinally of the backrest (12) and having a pair of therapeutic fingers (30),(30) projecting from the backrest (12). The machine further comprises a pushing-out mechanism (60) for moving the massage unit (20) forward or rearward relative to the backrest (12).

FIG. 1

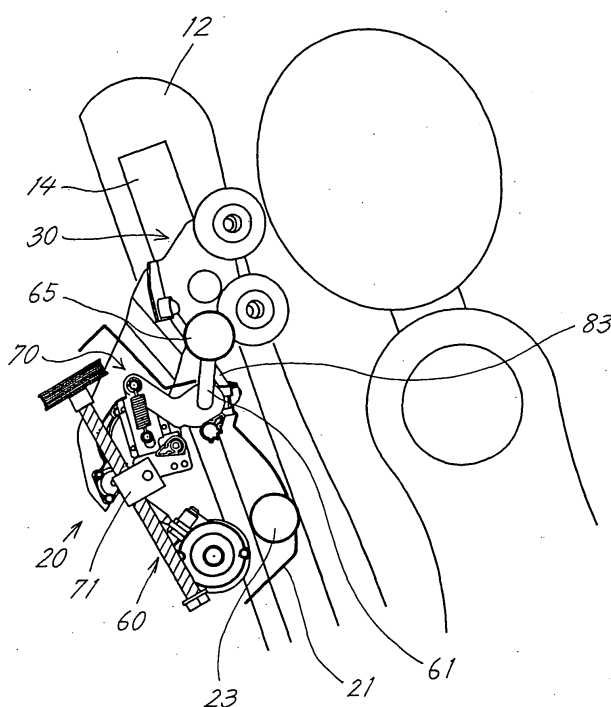

EP 1 433 453 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to massage machines of the chair type wherein a massage unit itself is tiltable and which are adapted to give an effective massage by pushing out therapeutic fingers from the backrest of a chair by tilting the massage unit.

BACKGROUND OF THE INVENTION

[0002] Massage machines of the chair type are available which have a chair for a person to sit in to have his or her neck, shoulders, back or waist massaged.

[0003] The chair-type massage machine comprises a massage unit provided inside the backrest of the chair and movable upward and downward. The massage unit has a pair of opposite therapeutic fingers projecting from the backrest.

[0004] The machine massages the person to be treated by moving the therapeutic fingers three-dimensionally leftward, rightward, upward, downward, forward and rearward.

[0005] The person is given a massage by the therapeutic fingers as slightly projected from the backrest. Accordingly, the fingers fail to reach the upper portions of the shoulders.

[0006] Massage machines are available wherein therapeutic fingers are positionable as pushed out forward from the usual massaging position and adapted to reach the upper portions of the shoulders of the person to be treated so as to produce an enhanced massage effect [see, for example, the publication of JP-A No. 1988-145656 (column 5, lines 1 to 19 and FIG. 5)].

[0007] With such conventional massage machines, the massage unit remains unmoved forward or rearward, and the therapeutic fingers only are pushed out forward. The amount of pushing out is therefore limited, and difficulties are encountered in ensuring a great amount of pushing out.

[0008] Further when the fingers are pushed out, the tapping or kneading function is partly limited.

[0009] An object of the present invention is to provide a massage machine of the chair type comprising a massage unit which itself can be pushed out relative to the backrest so as to enable therapeutic fingers to be pushed out by an increased amount.

SUMMARY OF THE INVENTION

[0010] To solve the above problems, the present invention provides a massage machine comprising a backrest provided on a chair for the person to be massaged to sit in, and a massage unit reciprocatingly movable upward and downward longitudinally of the backrest and having a pair of therapeutic fingers projecting from the backrest. The machine further comprises a

pushing-out mechanism for moving the massage unit forward or rearward relative to the backrest.

[0011] When the massage unit itself of the chair-type massage machine of the present invention is moved forward or rearward by the pushing-out mechanism, the therapeutic fingers are pushed out forward greatly. When the massage unit is pushed out with the therapeutic fingers positioned in the rear of the shoulders, the fingers satisfactorily reach the upper portions of the shoulders to effectively give a kneading or tapping massage to the upper portions of the shoulders.

[0012] Furthermore, a finger-pressure massage can be given by pushing out the massage unit itself by the pushing-out mechanism, with the therapeutic fingers in contact with the back, waist or the like.

[0013] Additionally, a very effective massage can also be performed by adjusting the amount of pushing-out of the massage unit and thereby varying the intensity of the contact (strong or weak contact) of the therapeutic fingers with the person to be massaged.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

FIG. 1 is a sectional view of a backrest of a massage machine of the chair type;

FIG. 2 is a sectional view of the backrest with a massage unit and therapeutic fingers pushed out forward;

FIG. 3 is a rear view of the massage unit;

FIG. 4 is a perspective view of the massage unit as it is seen obliquely from behind on the right side thereof;

FIG. 5 is a perspective view showing the main components of the massage unit as separated from the machine;

FIG. 6 is a perspective view of the massage unit as it is seen obliquely from behind on the left side thereof; and

FIG. 7 is a sectional view showing the main components of the massage unit as separated from the machine.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0015] The massage machine of the chair type of the invention has a backrest 12 connected as by a frame to the rear end of a seat for the person to be massaged to sit in so as to be tiltable and positionable in place. The backrest 12 is covered with a fabric, cushion or the like.

Inside Construction of the Backrest

[0016] As shown in FIGS. 1 and 2, the backrest 12 is provided inside thereof with a pair of opposite guide rails 14 extending upward or downward in parallel longitudinally.

nally of the backrest 12. The guide rails 14, 14 are each in the form of a channel and arranged with their grooves opposed to each other. The opening side of each rail 14 has a rack 16 (see FIG. 3). The massage unit 20 to be described later is upwardly or downwardly movably mounted on the guide rails 14, 14.

[0017] With reference to FIGS. 1 to 3, the massage unit 20 has four rollers 23, 23, 65, 65 projecting from a main chassis 21 and fitting in the guide rails 14, 14 and is thereby made movable upward or downward. All components of the massage unit 20 are mounted on the main chassis 21.

[0018] The main chassis 21 has rear and side openings and is fixedly provided at its center with longitudinal subchassis 22, 22 as spaced apart as shown in FIGS. 3 and 4.

[0019] The lower rollers 23, 23 are fitted to opposite ends of a up-and-down rotating shaft 24 extending through lower portions of the subchassis 22, 22 transversely of the machine and projecting from opposite sides of the main chassis 21. Fixedly mounted on the rotating shaft 24 inwardly of the respective rollers 23, 23 are gears 25, 25 meshing with the racks 16, 16 of the guide rails 14, 14. The rotating shaft 24 is coupled to an up-and-down motor 26 via a reduction device 27. The gears 25, 25 meshing with the racks 16, 16 are rotated by driving the motor 26, moving the massage unit 20 upward or downward along the guide rails 14, 14. The combination of pulleys and a belt, or of a worm and worm wheel is usable to provide the reduction device 27. The belt reeved around the pulleys of the reduction device 27 is not shown in FIG. 4.

Construction of Therapeutic Fingers, and Kneading and Tapping Mechanisms

[0020] With reference to FIGS. 3 to 5, therapeutic fingers 30, 30 for massaging the person to be treated are coupled to a kneading shaft 40 supported by the subchassis 22, 22 generally centrally thereof and to a tapping shaft 50 supported below the kneading shaft 40. As shown in FIGS. 3 and 4, the kneading shaft 40 and the tapping shaft 50 are coupled to a kneading motor 41 and a tapping motor 51 mounted on the main chassis 21, by way of reduction devices 42, 52, respectively. The combination of pulleys and a belt, or of a worm and worm wheel is usable to provide the reduction device 42 between the kneading shaft 40 and the kneading motor 41. The belt reeved around the pulleys of each of the reduction devices 42, 52 is not shown in FIG. 4.

[0021] With reference to FIGS. 4 and 5, the therapeutic fingers 30, 30 each comprise a pivotal lever 33 supported as inclined and positioned eccentrically on the kneading shaft 40 and projecting forward through a hole 21a formed in a front wall of the main chassis 21, a massage arm 32 pivoted to the forward end of the pivotal lever 33 and bent at an obtuse angle at the midportion thereof, and kneading balls 31, 31a supported respec-

tively at the upper and lower ends of the arm 32.

[0022] As shown in FIGS. 4 and 5, eccentric cams 53, 53 which are out of phase with each other by 180 degrees are supported on the tapping shaft 50. Each of the cams 53, 53 is connected by a rod 55 to a universal joint 54 attached to the rear end of the pivotal lever 33 which end is positioned toward the kneading shaft 40.

[0023] The pivotal levers 33, 33 are supported as inclined on the kneading shaft 40 and connected to rods 45, 45 and prevented from rotating, so that when the kneading shaft 40 is rotated, the forward ends of the pivotal levers 33, 33 move leftward and rightward. This movement pivotally moves the massage arms 32, 32 leftward and rightward, reciprocatingly moving the upper kneading balls 31, 31, as well as the lower kneading balls 31a, 31a, toward or away from each other repeatedly for a kneading operation.

[0024] When the tapping motor 51 rotates, the rods 55, 55 eccentrically connected to the shaft 50 cause the therapeutic fingers 30, 30 to move upward and downward reciprocatingly for a tapping operation.

Pushing-out Mechanism 60

[0025] The massage unit 20 is provided with a pushing-out mechanism 60 for moving the unit 20 forward or rearward as shown in FIGS. 1 and 2. The pushing-out mechanism 60 comprises, for example, a crank mechanism 61 and a link mechanism 70 as will be described below.

[0026] With reference to FIGS. 5 and 6, the crank mechanism 61 comprises a crankshaft 62 disposed in front of the kneading shaft 40, and crankpins 64, 64 (see FIG. 5) rotatably carrying the upper rollers 65, 65 (see FIG. 6) thereon and connected to the crankshaft 62 by crank arms 63, 63. The crankpins 64, 64 are positioned eccentrically relative to the crankshaft 62, so that when the crankshaft 62 is rotated, the crankpins 64 revolve about the crankshaft 62. With the illustrated embodiment, the crankshaft 62, the crank arms 63, 63 and crankpins 64, 64 are provided by a single metal rod, and the crankshaft 62 is supported on bearings 62a, 62a by the main chassis 21 as shown in FIG. 5.

[0027] With reference to FIG. 3, the subchassis 22 is provided at upper and lower portions thereof with support pieces 22a, 22a each having a bearing 22b. As shown in FIGS. 3, 4 and 6, a tilting threaded screw rod 67 is supported by the bearings 22b, 22b. The tilting screw rod 67 has an upper end coupled to a pushing-out motor 69 by way of a reduction device 68 comprising pulleys and a belt (not shown in FIG. 4).

[0028] A nut 71 is screw-thread engagement with the threaded portion of the screw rod 67. The nut 71 can be made from a resin. As shown in FIGS. 6 and 7, the link mechanism 70 is connected to the resin nut 71. The link mechanism 70 can be composed of a link 72 and a link piece 78.

[0029] The link 72 will be described below with refer-

ence to an example of link 72 comprising a first link piece 73 and a second link piece 75 which are slidable relative to each other so as to be contractable longitudinally thereof.

[0030] The first link piece 73 is pivoted to the resin nut 71 and tiltable forward or rearward. A slide pin 74 projects from the first link piece 73 in the vicinity of a base end thereof.

[0031] The second link piece 75 comprises a pair of members holding the first link piece 73 therebetween and each having a slot 76 extending longitudinally thereof. The slots 76 of the second link piece 75 have slidably fitted therein the slide pin 74 of the first link piece 73.

[0032] Further as shown in FIG. 6, the second link piece 75 has a pin 75a projecting from the forward end thereof. A spring 77 extends between and is engaged with the slide pin 74 and the pin 75a. The spring 77 biases the second link piece 75 toward the resin nut 71. When free of any load, the second link piece 75 is pulled closest to the resin nut 71 by the spring 77.

[0033] The link piece 78, i. e. , third link piece 78, is supported by the pin 75a of the second link piece 75. The third link piece 78 is bent forward at its midportion and has one end secured to the crankshaft 62.

[0034] When the resin nut 71 is positioned at an upper portion of the tilting screw rod 67, the third link piece 78 is pulled toward the second link piece 75, bringing the massage unit 20 (main chassis 21) to the most retracted position (see FIG. 1).

[0035] When the resin nut 71 is moved down from this position as shown in FIG. 7 (toward the direction of arrow A in FIG. 7) by rotating the tilting screw rod 67, the second link piece 75 pulls down the portion of the third link piece 78 engaging with the piece 75, rotating the third link piece 78 about the crankshaft 62. Since the third link piece 78 is secured to the crankshaft 62, the crankshaft 62 rotates with the third link piece 78.

[0036] The crankpins 64, 64 at the opposite ends of the crankshaft 62 are movable only along the guide rails 14, 14 by the rollers 65, 65 and are unable to move forward or rearward, so that the rotation of the crankshaft 62 tilts the massage unit 20 about the up-and-down rotating shaft 24. With the rotating shaft 24 provided below the massage unit 20, the tilting of the unit 20 pushes out the therapeutic fingers 30, 30 forward as shown in FIG. 2 (as indicated by the arrow B in FIG. 7).

[0037] By pushing out the fingers 30, 30 at the position of the shoulders of the person to be massaged, the fingers 30, 30 reach the upper portions of the shoulders. The upper portions of the shoulders of the person can be effectively massaged by driving the kneading motor 41 and/or the tapping motor 51 in this state.

[0038] When the fingers 30, 30 as positioned at a level lower than the shoulders of the person, i. e. , at the position of the back or waist, are pushed out, the back or waist of the person can be massaged with the pressure of the fingers. Further a rolling massage can be given with the fingers 30, 30 pressed against the person to be

treated with a great force, by driving the up-and-down motor 26 to move the massage unit 20 upward and downward.

[0039] When the tilting screw rod 67 is reversely rotated in the state shown in FIG. 2, the resin nut 71 moves upward to conversely retract the massage unit 20 and pull back the fingers 30, 30 inwardly of the backrest (see FIG. 1). In the retracted state, a massage can be given in the same manner as conventionally.

[0040] The amount of pushing-out of the massage unit 20 is controllable by rotating the tilting screw rod 67, namely by adjusting the position of the resin nut 71 relative to the screw rod 67. The maximum amount of pushing-out is also controllable by altering the length of the crank arms 63, 63.

[0041] The amount of pushing-out of the massage unit 20 is detectable by pushing-out sensor means 79. As the sensor means 79, for example, a variable resistor 79 is disposed in contact with the third link piece 78 as shown in FIG. 6 to measure variations in the resistance value involved in the angle of rotation of the third link piece 78 by the resistor 79.

[0042] The crankshaft 62, which rotates with the third link piece 78, may be provided with the pushing-out sensor means 79.

Other Embodiment of Link Mechanism 70

[0043] With the foregoing embodiment, the resin nut 71 is connected to the crankshaft 62 by the link mechanism 70 which comprises the link 72 wherein the second link piece 75 is biased by a spring and slidable relative to the first link piece 73, and the third link piece 78 coupled to the link 72. The first link piece 73 and the second link piece 75 are made slidable relative to each other so as to render the therapeutic fingers 30, 30 (massage unit 20), as pushed out forward, slightly retractable when subjected to a force from the front. Consequently, when the person to be massaged forces his or her back against the backrest 12 with the fingers 30, 30 pushed out, a great rearward force acts on the fingers 30, 30 to retract the massage unit 20. This removes the pain to be otherwise given to the person.

[0044] If the above effect need not be produced, the third link piece 78 may be coupled directly to the resin nut 71 by a single piece of link 72 instead of providing separate pieces for use as the first link piece 73 and the second link piece 75.

[0045] Since the amount of sliding movement of the second link piece 75 relative to the first link piece 73 corresponds to the force to be applied to the therapeutic fingers 30, 30, means 79a can also be provided for detecting the particular part of the body of the person to be massaged with which the fingers 30, 30 are in contact, based on the amount of sliding movement of the second link piece 75. In this case, the amount of sliding movement is detectable by a variable resistor 79a or the like which is provided for the first link piece 73 so as to

be in contact with the second link piece 75 as shown in FIG. 6.

[0046] When the fingers 30, 30 out of contact with the person to be massaged are brought into contact with the shoulders of the person to be massaged, by lowering the message unit 20 from a position above the backrest 12, an upward force will act on the fingers 30, 30.

[0047] As a result, the second link piece 75 slidably moves upward against the force of the spring 77. The amount of sliding movement of the second link piece 75 is detected by the variable resistor 79a. The value of detection indicates that the position of the shoulders of the person.

Arm Lock Mechanism 80

[0048] The pushing-out mechanism 60 described can be provided with an arm lock mechanism 80 for causing the fingers 30, 30 to project forward with the pushing-out of the message unit 20.

[0049] With reference to FIG. 7, the arm lock mechanism 80 comprises arm lock rod 83, 83 each of which couples the bent portion of the message arm 32 to the crankshaft 62 by universal joint 81, 82. The universal joint 82 for the crankshaft 62 is provided at such a position that when the message unit 20 is in the most projected position (see FIG. 2), the upper kneading ball 31 on the message arm 32 can be pushed out to the foremost position.

[0050] As the message unit 20 is pushed out as described above by rotating the crankshaft 62, the universal joint 82 rotates with the rotation of the shaft 62, pushing the arm lock rod 83 upward while tilting the rod. As a result, the arm lock rod 83 rotates the message arm 32 forward, causing the upper kneading ball 31 to project forward relative to the main chassis 21 from a state in which the upper and lower kneading balls 31, 31a are generally in parallel to the backrest 12.

[0051] In addition to the pushing-out of the message unit 20 by the pushing-out mechanism 60 described, the kneading ball 31 is thus pushed out greatly to the upper portion of the shoulder to massage the shoulder effectively.

[0052] A message can be given by kneading and/or tapping with the upper kneading balls 31 thus projected, by rotating the kneading shaft 40 and/or the tapping shaft 50 in this state.

[0053] When the above operation is performed with the therapeutic fingers 30, 30 in bearing contact with the back or waist of the person to be massaged, a finger-pressure massage can also be given by the upper kneading balls 31.

[0054] Further when the message unit 20 is retracted by rotating the crankshaft 62 reversely, each universal joint 82 pulls the arm lock rod 83 downward conversely to the above movement. As a result, the arm lock rod 83 rotates the message arm 32 rearward to return the upper and lower kneading balls 31, 31a to the position

generally in parallel to the backrest 12 for the balls to perform a massage in the usual manner.

[0055] Apparently, the present invention can be modified or altered by one skilled in the art without departing from the spirit of the invention, and such modifications are included within the scope of the invention as set forth in the appended claims.

10 Claims

1. A message machine comprising a backrest (12) provided on a chair for the person to be massaged to sit in, and a message unit (20) reciprocally movable upward and downward longitudinally of the backrest (12) and having a pair of therapeutic fingers (30),(30) projecting from the backrest (12), the message machine being **characterized in that** the machine comprises a pushing-out mechanism (60) for moving the message unit (20) forward or rearward relative to the backrest (12).
2. The message machine according to claim 1 wherein the pushing-out mechanism (60) tilts the message unit (20) to thereby tilt the therapeutic fingers (30),(30).
3. The message machine according to claim 1 or 2 wherein the pushing-out mechanism (60) comprises a crank mechanism (61).
4. The message machine according to claim 3 wherein the backrest (12) is provided inside thereof with guide rails (14),(14) along the backrest (12), and the message unit (20) is provided at upper and lower portions thereof with respective rollers (65),(23) fitting in each of the guide rails (14),(14), one pair of upper or lower rollers (65),(65) being movable forward or rearward by the crank mechanism (61) relative to the message unit (20) to thereby tilt the message unit (20).
5. The message machine according to claim 4 wherein the crank mechanism (61) comprises crankpins (64),(64) rotatably carrying the rollers (65),(65) thereon, and a crankshaft (62) supporting the crankpins (64),(64) in an eccentric position, and the rollers (65),(65) are moved forward or rearward relative to the message unit (20) by rotating the crankshaft (62) to thereby tilt the message unit (20).
6. The message machine according to claim 5 wherein the message unit (20) comprises a nut (71) movable upward or downward within the message unit (20) by the thrust of a screw, and the nut (71) is connected to the crankshaft (62) by a link mechanism (70) comprising a link (72) and a link piece (78) for converting the upward or downward movement of the

nut (71) to the rotation of the crankshaft (62) to thereby move the rollers (65), (65) forward or rearward relative to the massage unit (20) and tilt the massage unit (20).

5

7. The massage machine according to claim 5 or 6 which comprises pushing-out sensor means (79) for detecting the amount of pushing-out of the massage unit (20), and the sensor means (79) measures the angle of rotation of the crankshaft (62) or the link piece (78) to thereby detect the amount of pushing-out of the massage unit (20).

10

15

20

25

30

35

40

45

50

55

FIG. 1

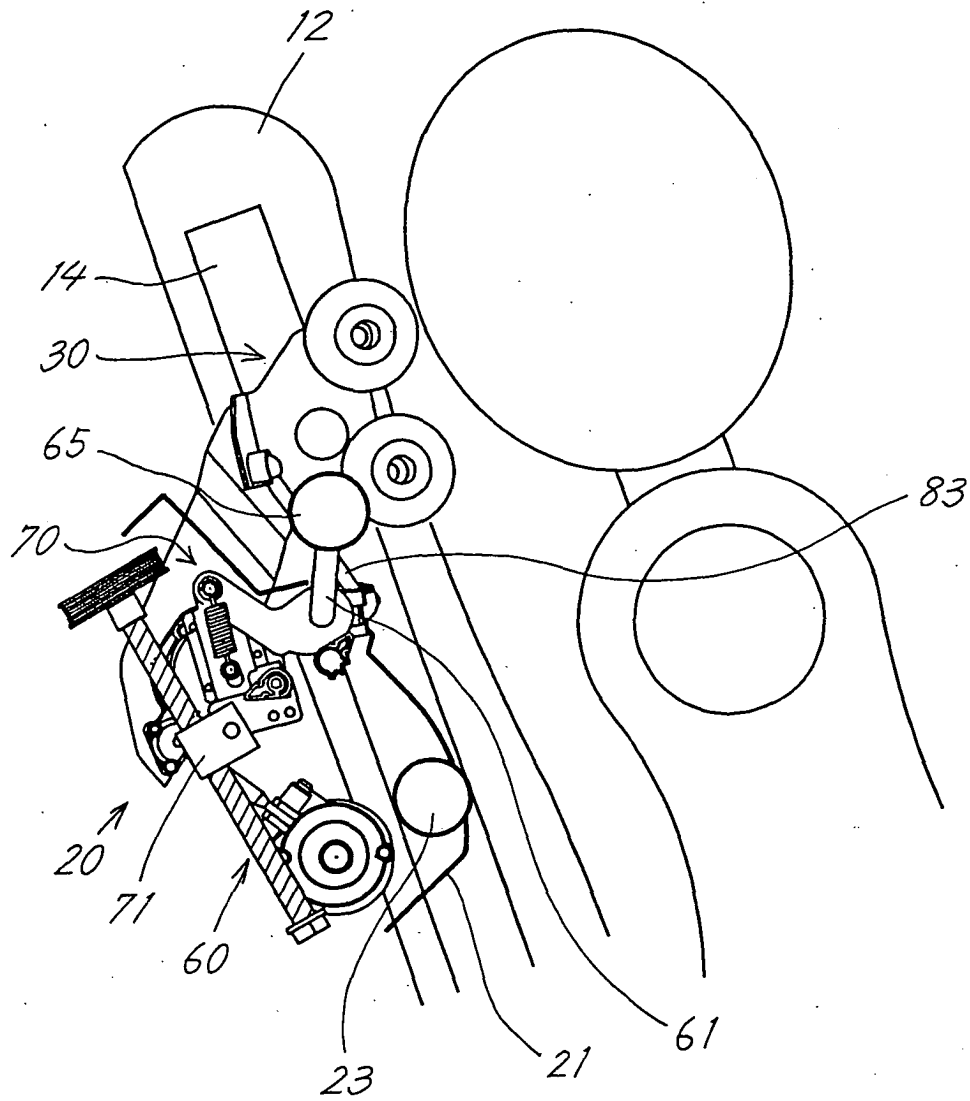


FIG. 2

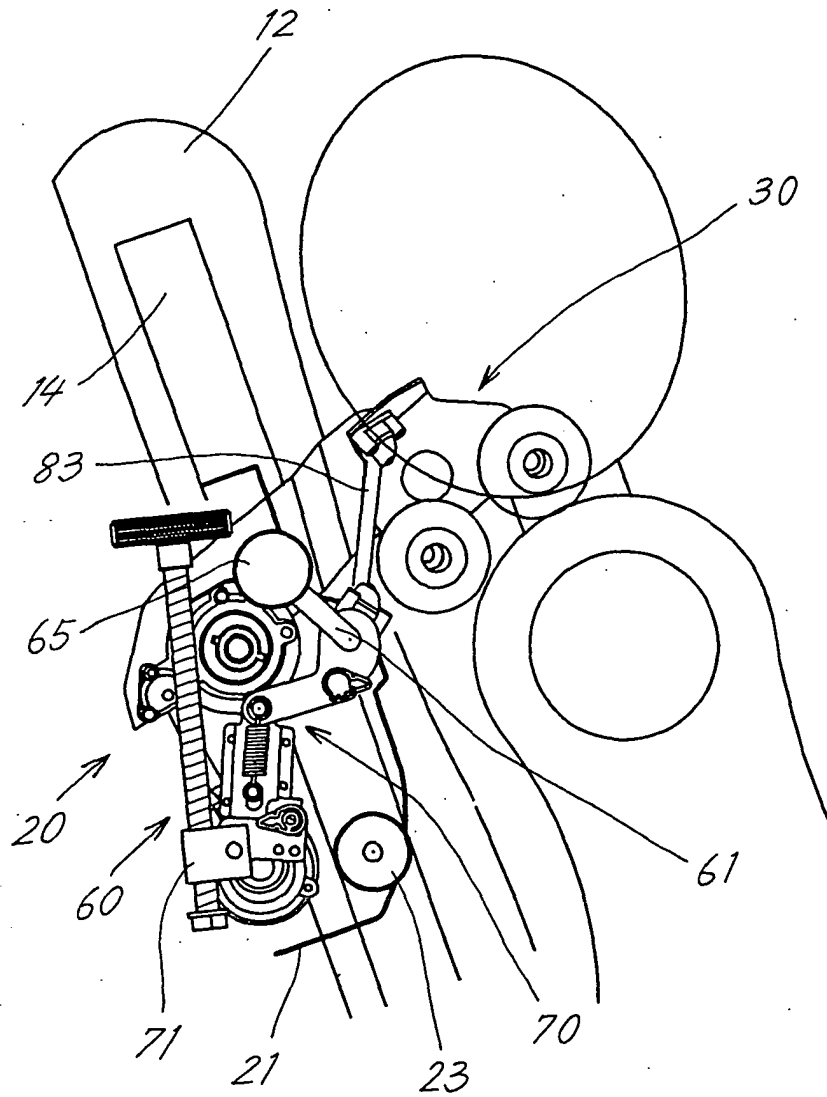


FIG. 3

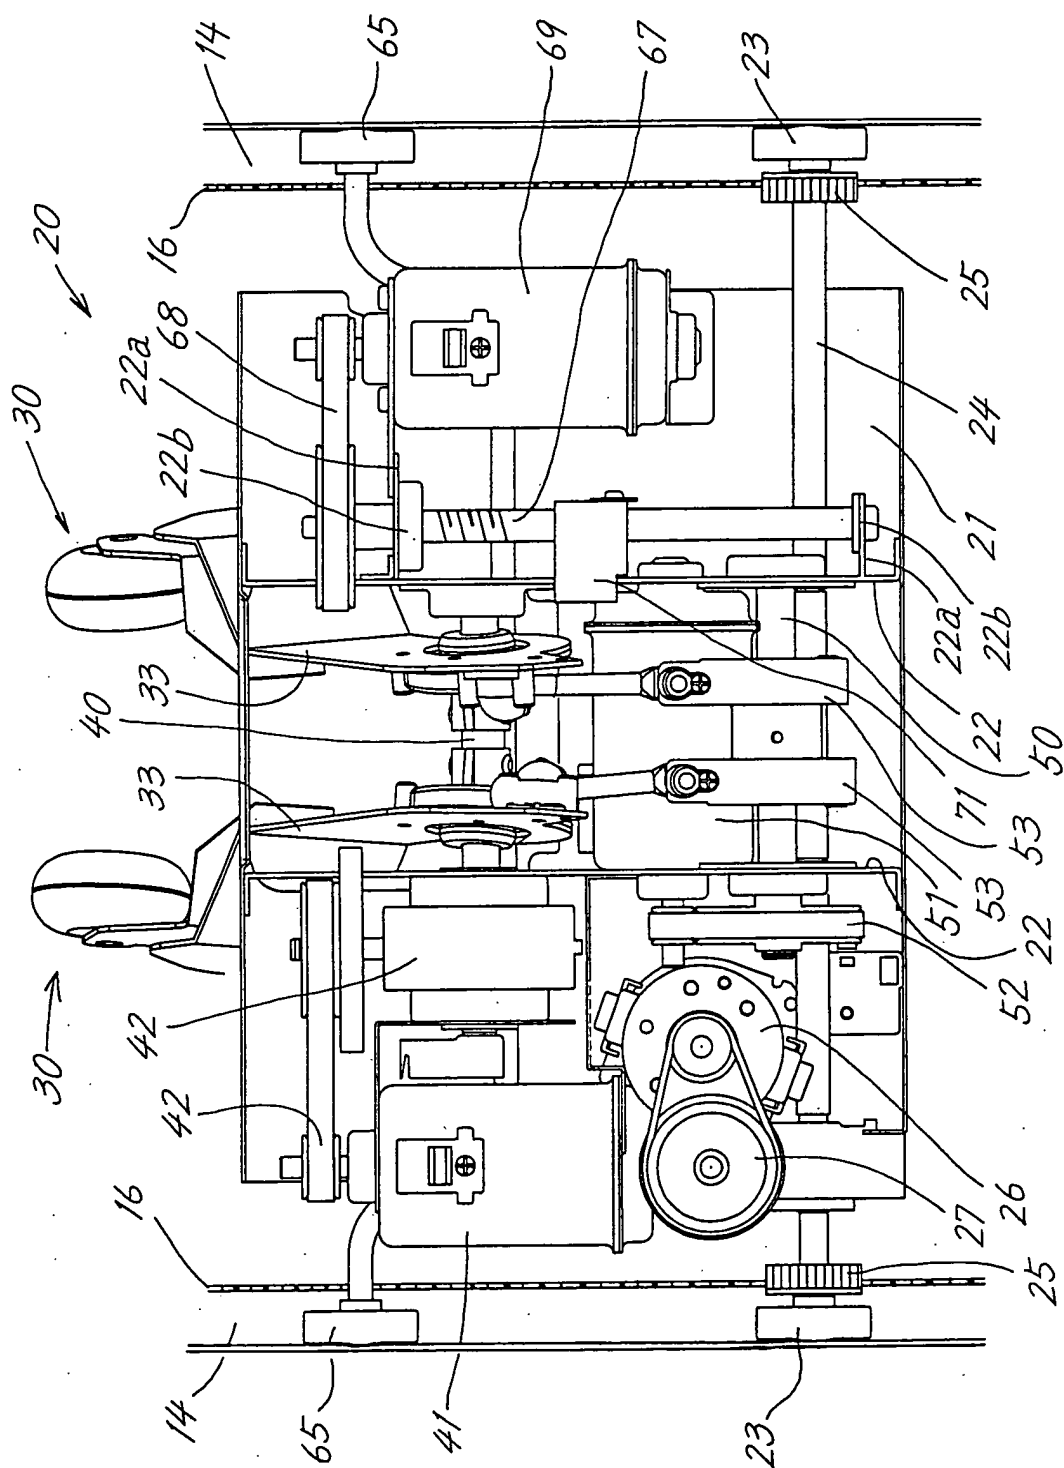


FIG. 4

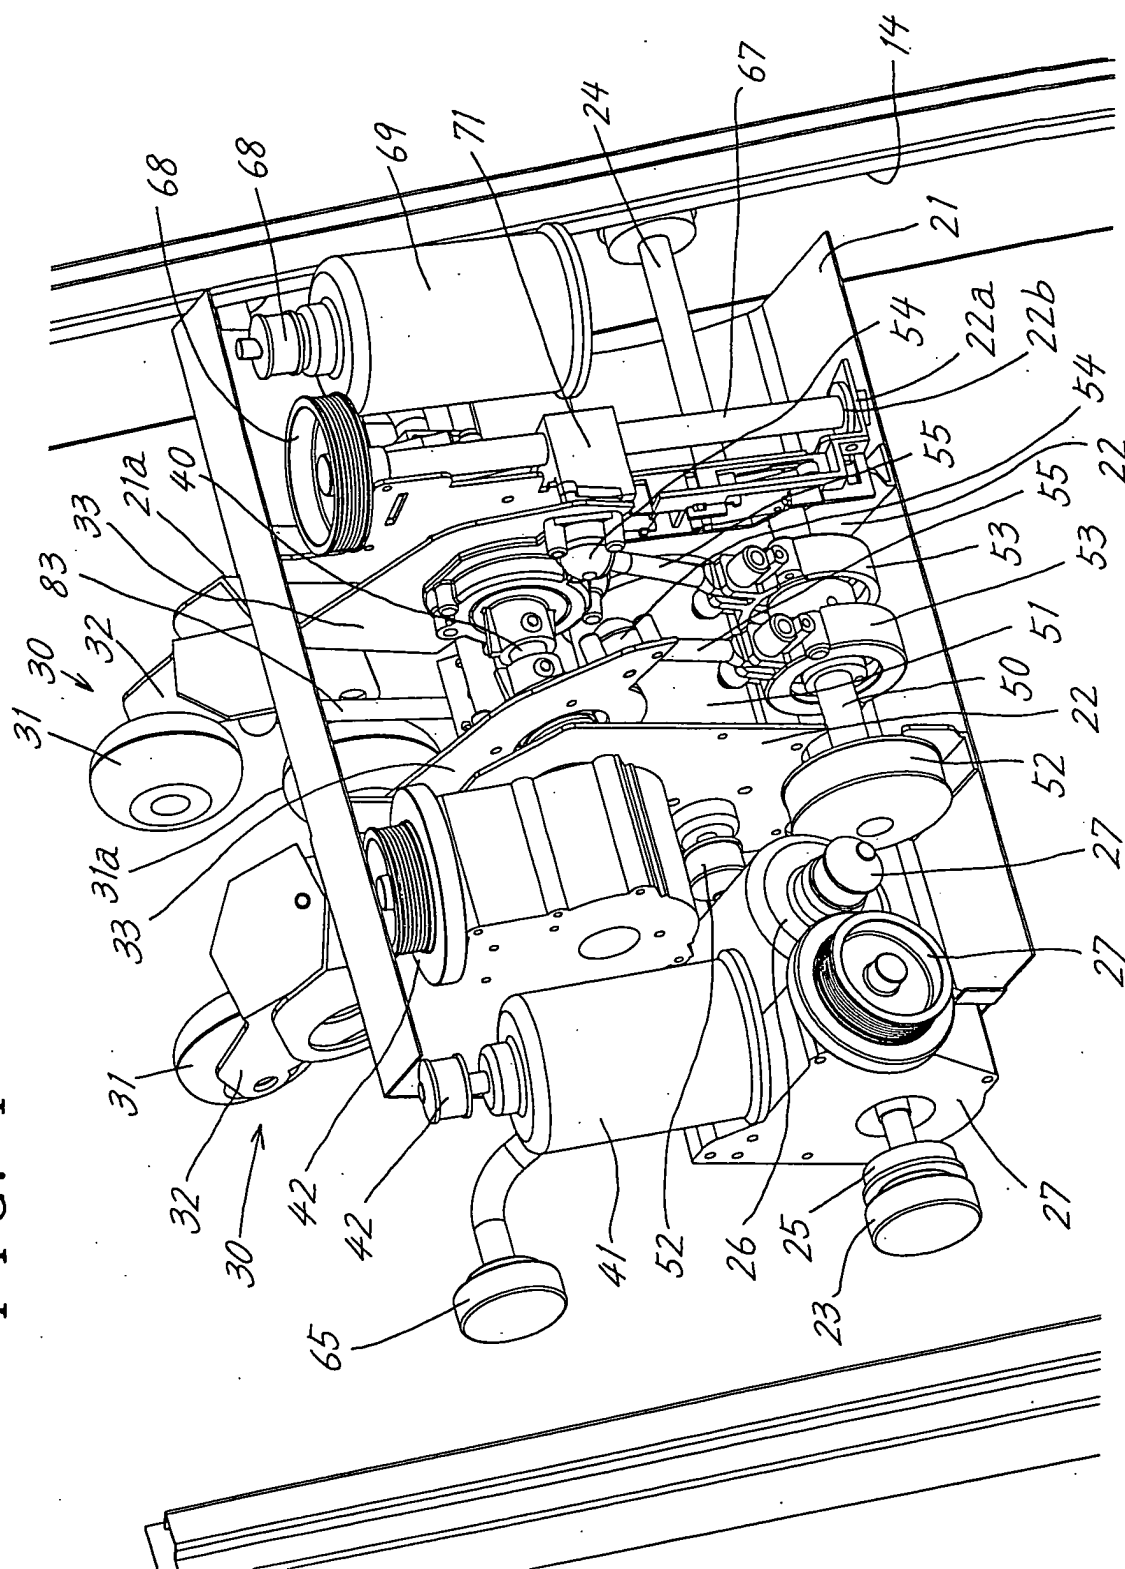


FIG. 5

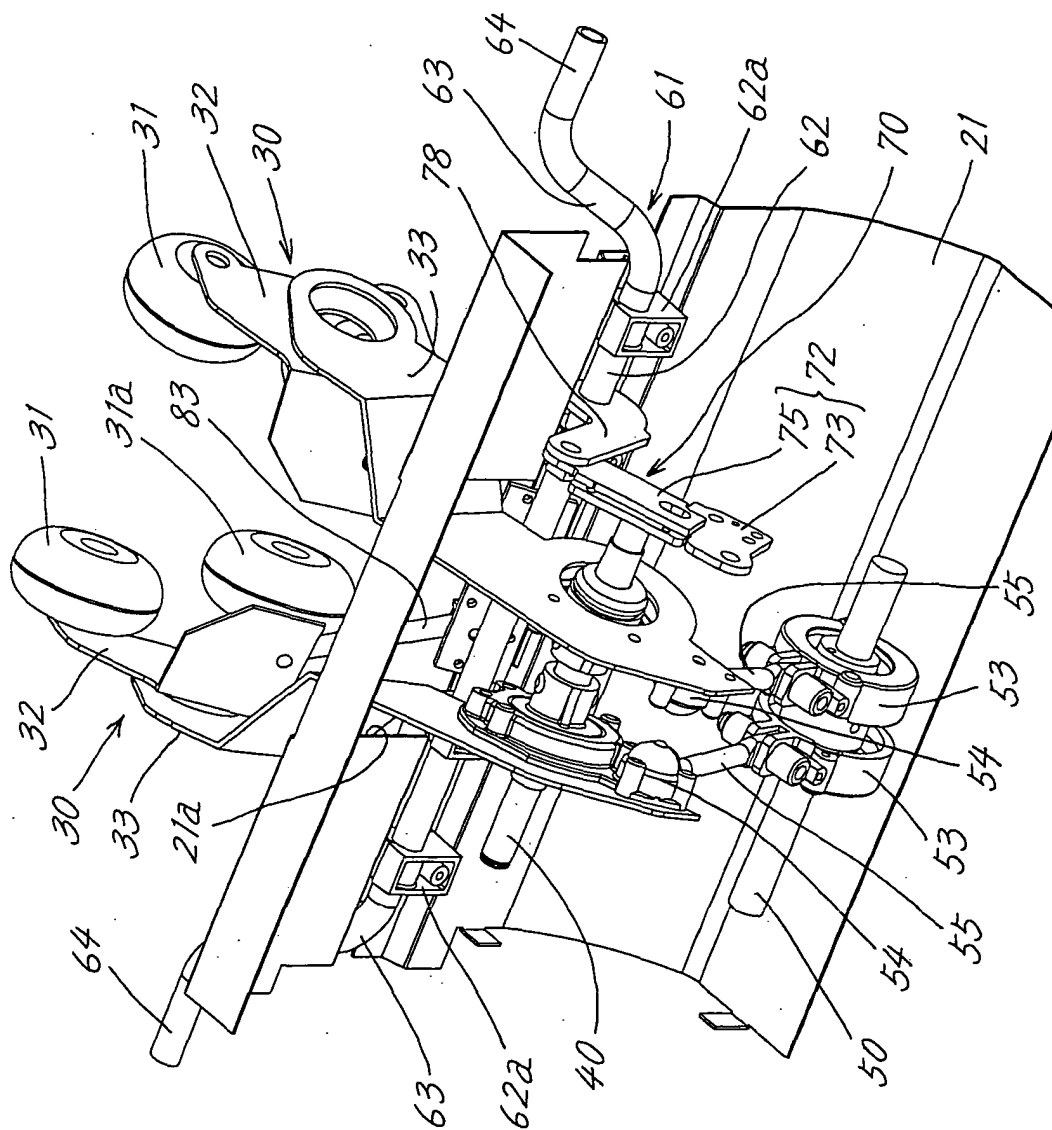


FIG. 6


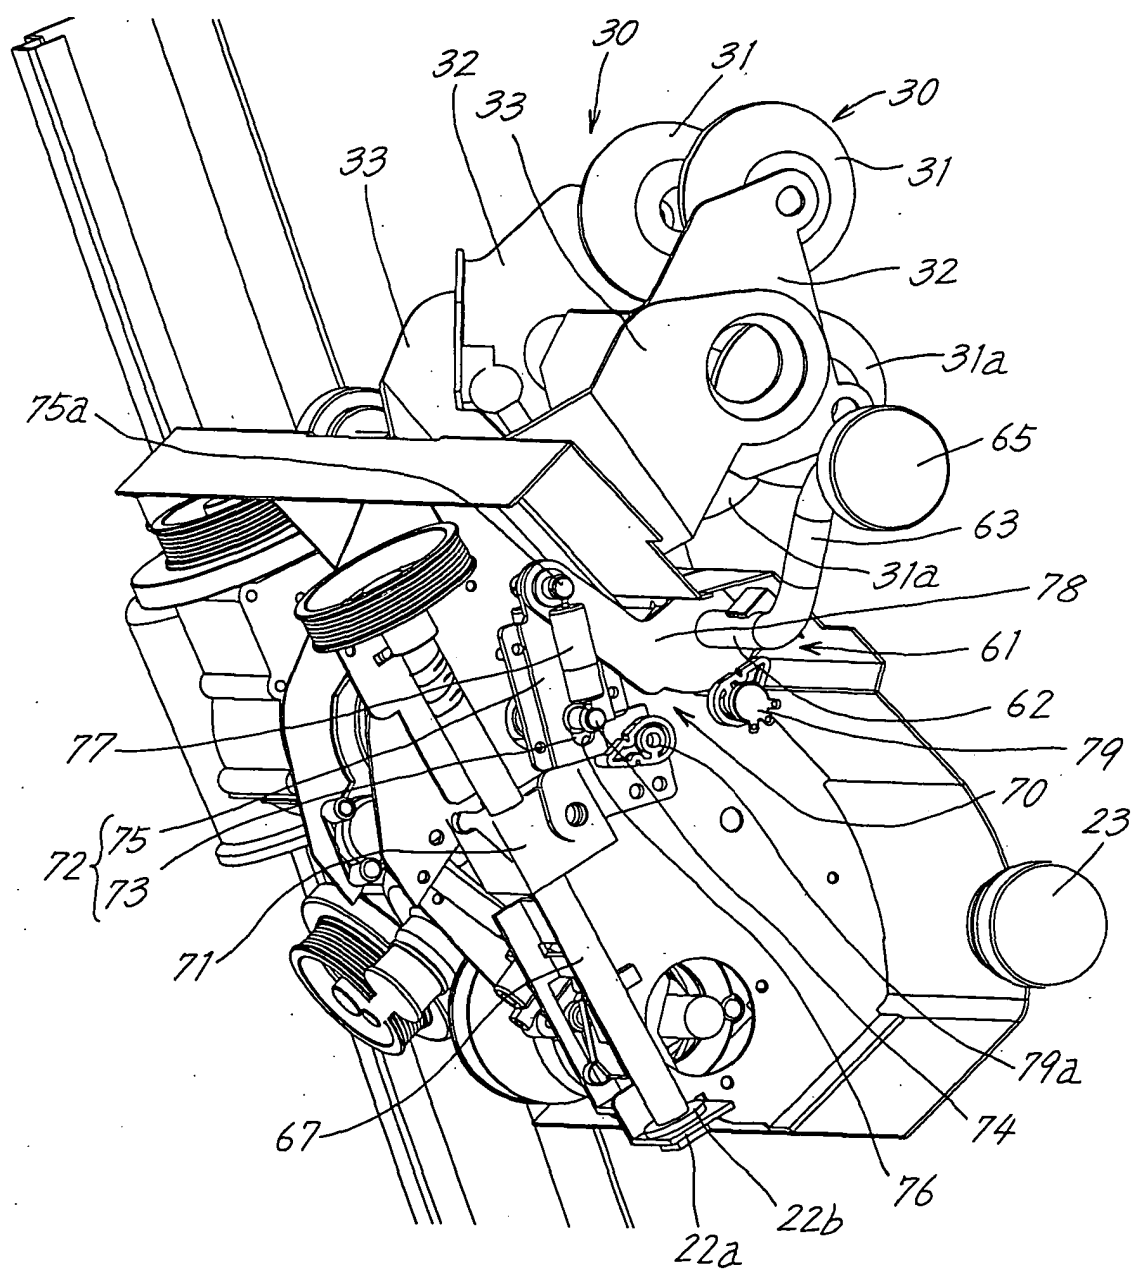


FIG. 7



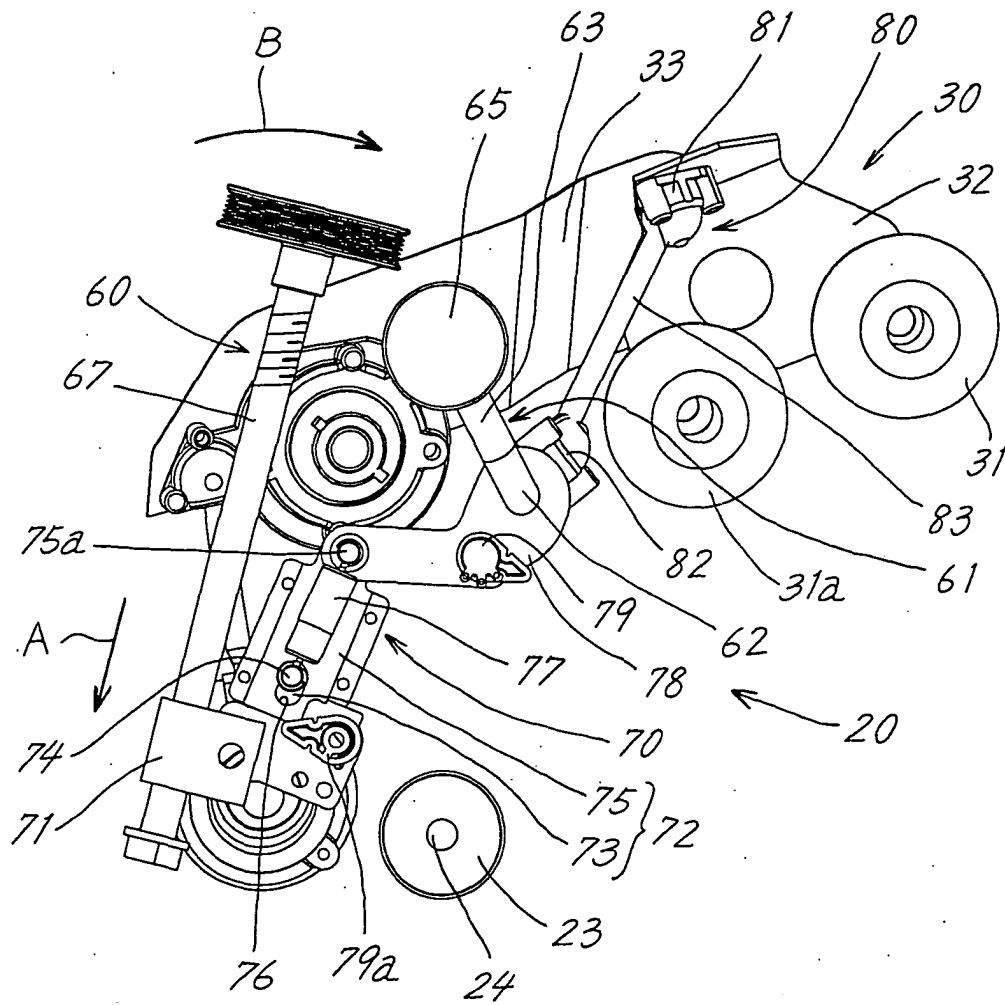

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 02 9806

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 02 02045 A (TAKAHASHI KUNIYOSHI ;MIKI AKITOSHI (JP); TANAKA KOICHI (JP); MORI) 10 January 2002 (2002-01-10) -& EP 1 297 813 A 2 April 2003 (2003-04-02) * paragraphs [0065]-[0071]; figures 1,5-7,18-26 *	1-7	A61H1/00 A61H37/00
X	US 5 741 218 A (FUJII YASUO) 21 April 1998 (1998-04-21) * column 4, line 1 - column 5, line 21; figures 1-3 *	1,2	
X	EP 1 020 174 A (FAMILY KABUSHIKI KAISHA) 19 July 2000 (2000-07-19) * paragraphs [0033]-[0047]; figures 1-4 *	1,2	
X	US 5 755 677 A (OHSHITA SHOJI ET AL) 26 May 1998 (1998-05-26) * column 8, line 54 - column 9, line 28; figure 13 *	1-3	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A61H
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 3 February 2004	Examiner Fischer, E
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 02 9806

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-02-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0202045	A	10-01-2002	JP 2002078767 A	19-03-2002
			AU 6636001 A	14-01-2002
			CN 1457250 T	19-11-2003
			EP 1297813 A1	02-04-2003
			WO 0202045 A1	10-01-2002
			TW 508237 B	01-11-2002

US 5741218	A	21-04-1998	JP 2782181 B2	30-07-1998
			JP 9271499 A	21-10-1997
			CN 1163746 A ,B	05-11-1997
			DE 19713134 A1	20-11-1997
			KR 205129 B1	01-07-1999
			TW 442279 B	23-06-2001

EP 1020174	A	19-07-2000	WO 9965444 A1	23-12-1999
			EP 1020174 A1	19-07-2000

US 5755677	A	26-05-1998	AU 2223895 A	09-02-1996
			CA 2171095 A1	25-01-1996
			CN 1130349 A ,B	04-09-1996
			DE 69524193 D1	10-01-2002
			DE 69524193 T2	18-07-2002
			EP 0721319 A1	17-07-1996
			HK 1019002 A1	11-10-2002
			WO 9601610 A1	25-01-1996
			JP 3163222 B2	08-05-2001
			JP 8080327 A	26-03-1996
			JP 2001120629 A	08-05-2001
			KR 182325 B1	01-04-1999
			JP 2995146 B2	27-12-1999
			JP 8080328 A	26-03-1996
