



(12) UK Patent (19) GB (11) 2 123 081 B

(54) Title of invention

Method and apparatus for automatically  
threading separable slide fastener stringers  
through sliders

(51) INT CL<sup>4</sup>; A44B 19/62

(21) Application No  
8316685

(22) Date of filing  
20 Jun 1983

(30) Priority data

(31) 57/105687

(32) 19 Jun 1982

(33) Japan (JP)

(43) Application published  
25 Jan 1984

(45) Patent published  
4 Sep 1985

(73) Proprietors  
Yoshida Kogyo Kabushiki Kaisha  
(Japan)  
No 1 Kanda Izumi-cho  
Chiyoda-ku  
Tokyo  
Japan

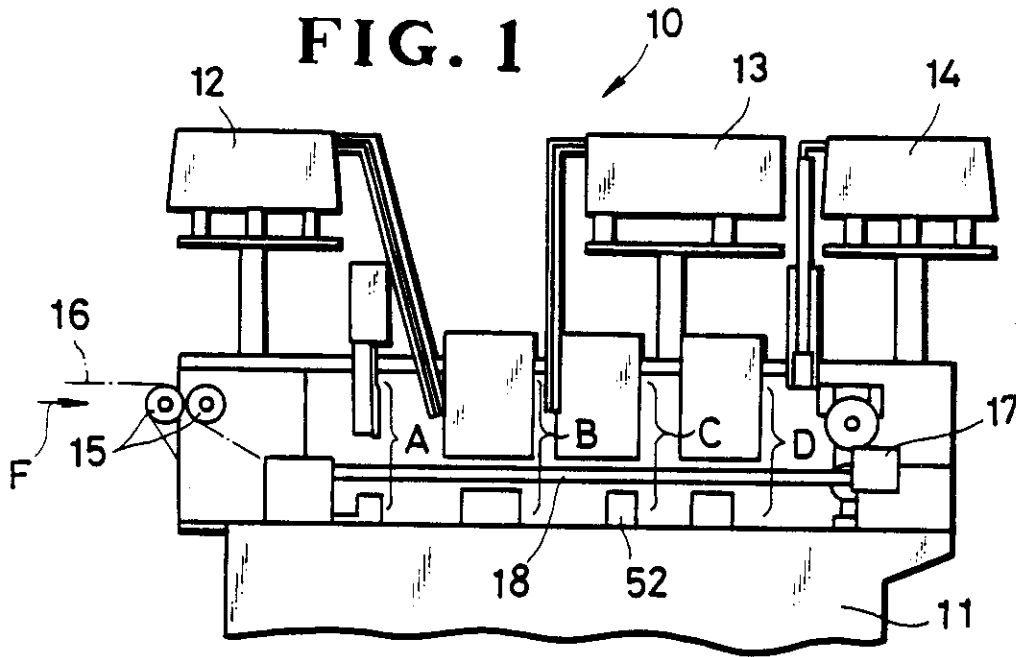
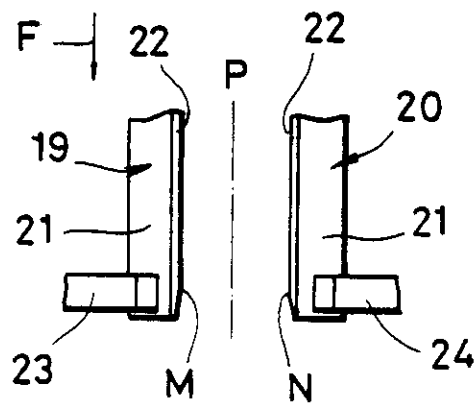
(72) Inventors  
Koichi Kawakami  
Mitsuo Sawada

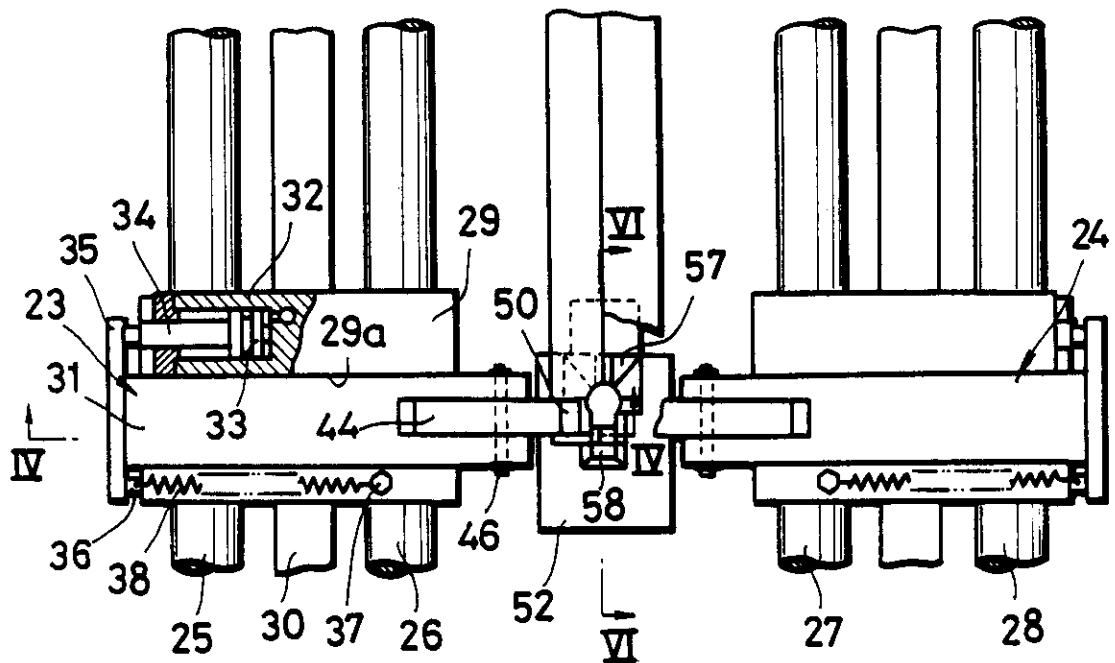
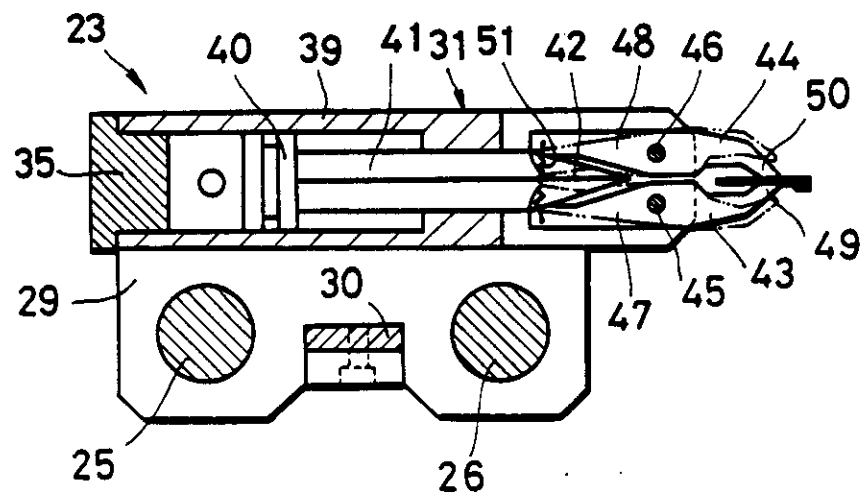
(74) Agent and/or  
Address for Service  
Marks & Clerk,  
57-60 Lincoln's Inn Fields,  
London WC2A 3LS

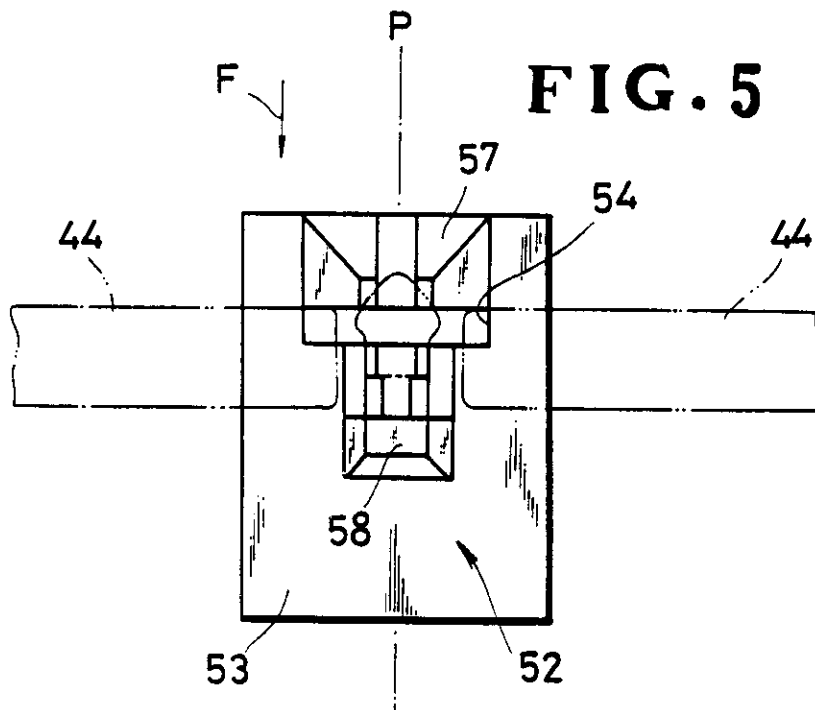
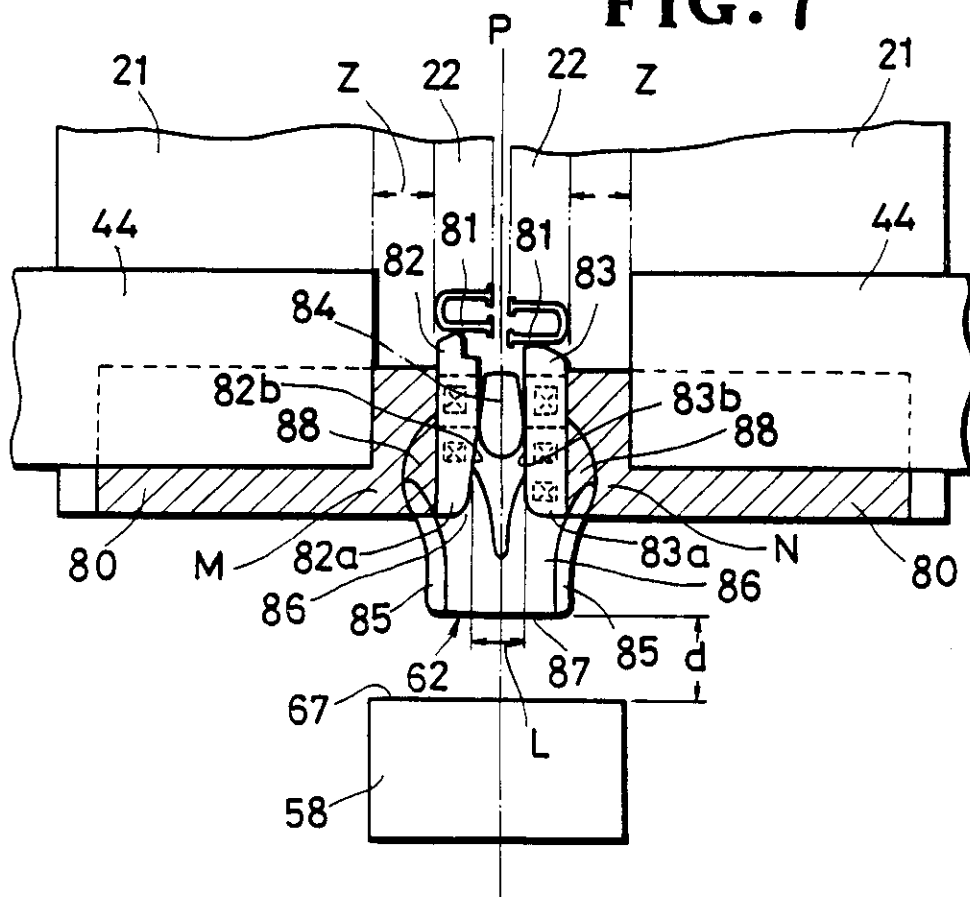
(52) Domestic classification  
E2S 101 DA

(56) Documents cited  
None

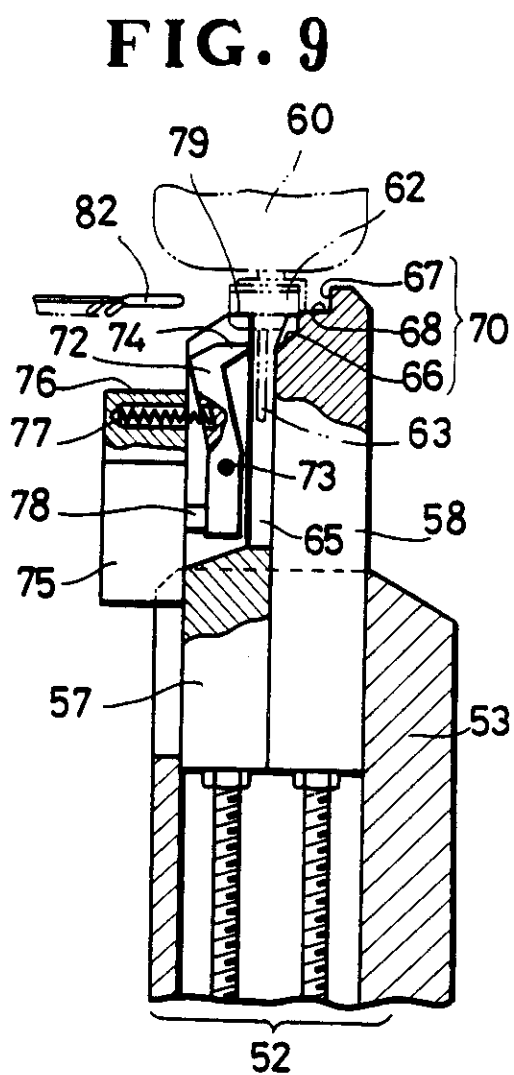
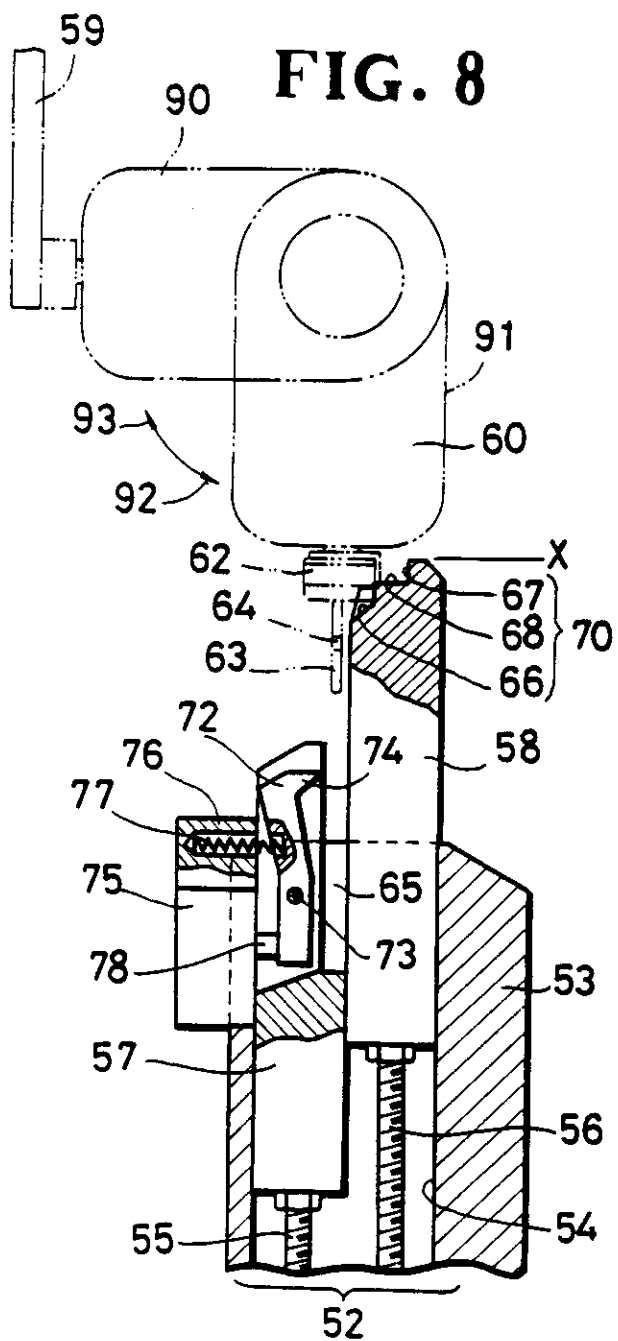
(58) Field of search  
E2S

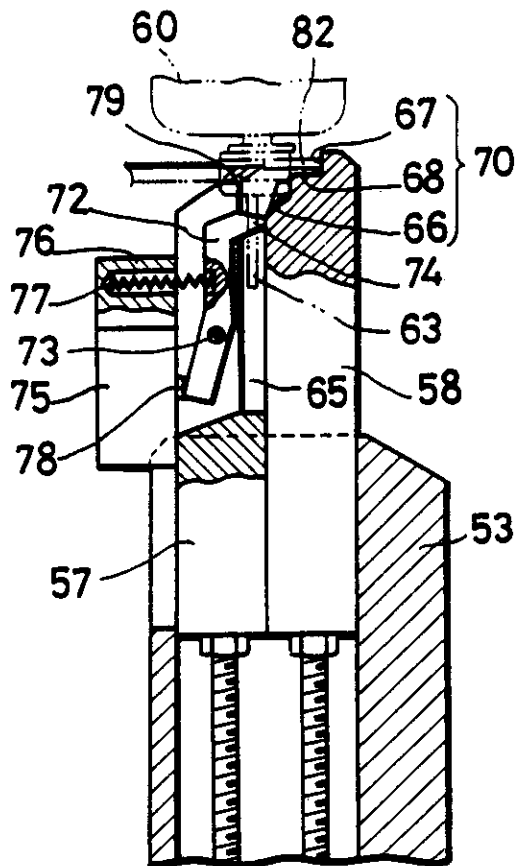
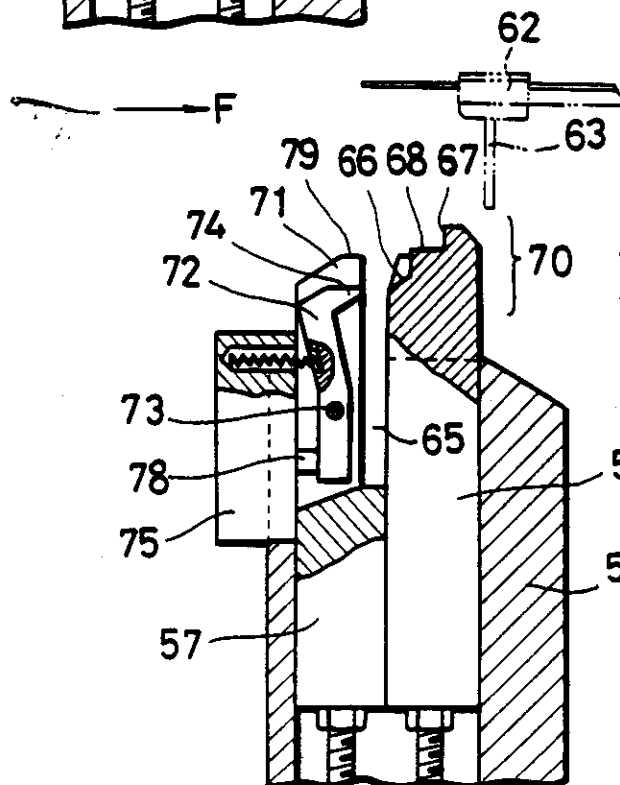
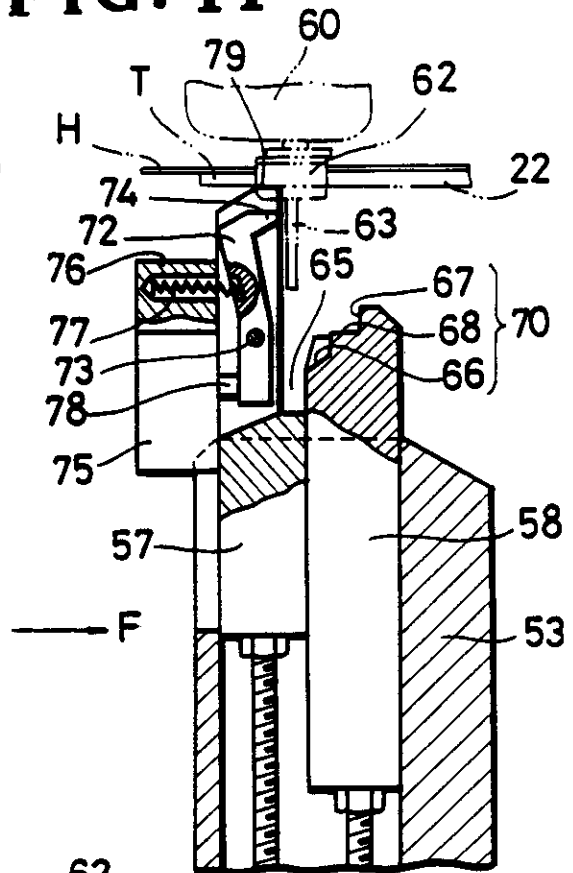
**FIG. 1****FIG. 2**

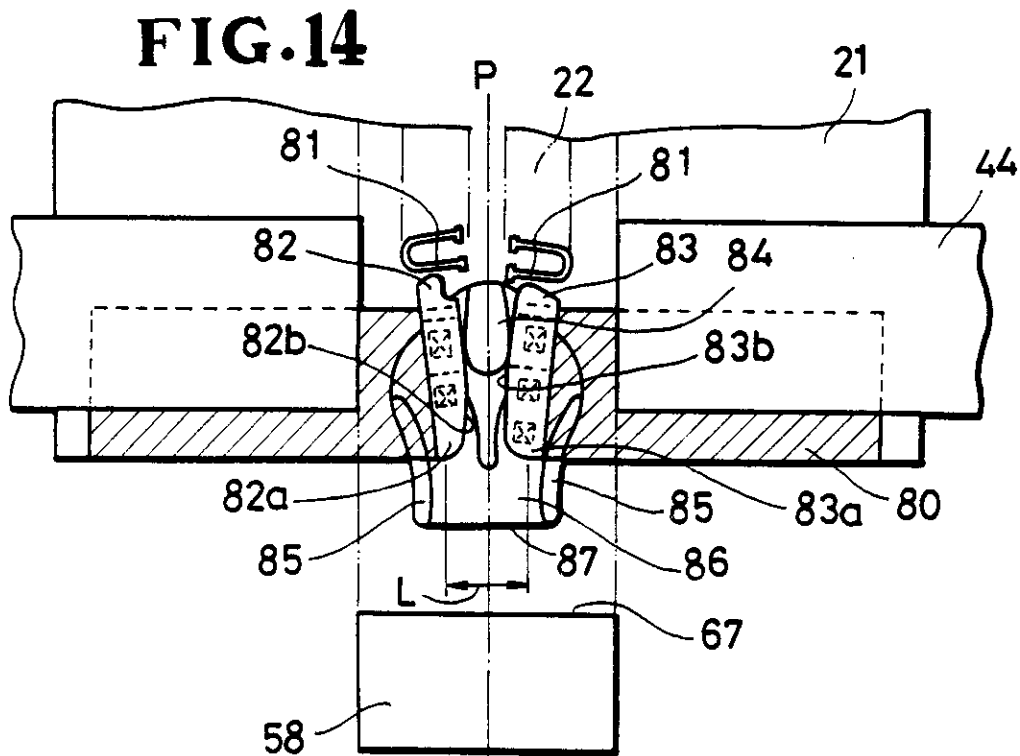
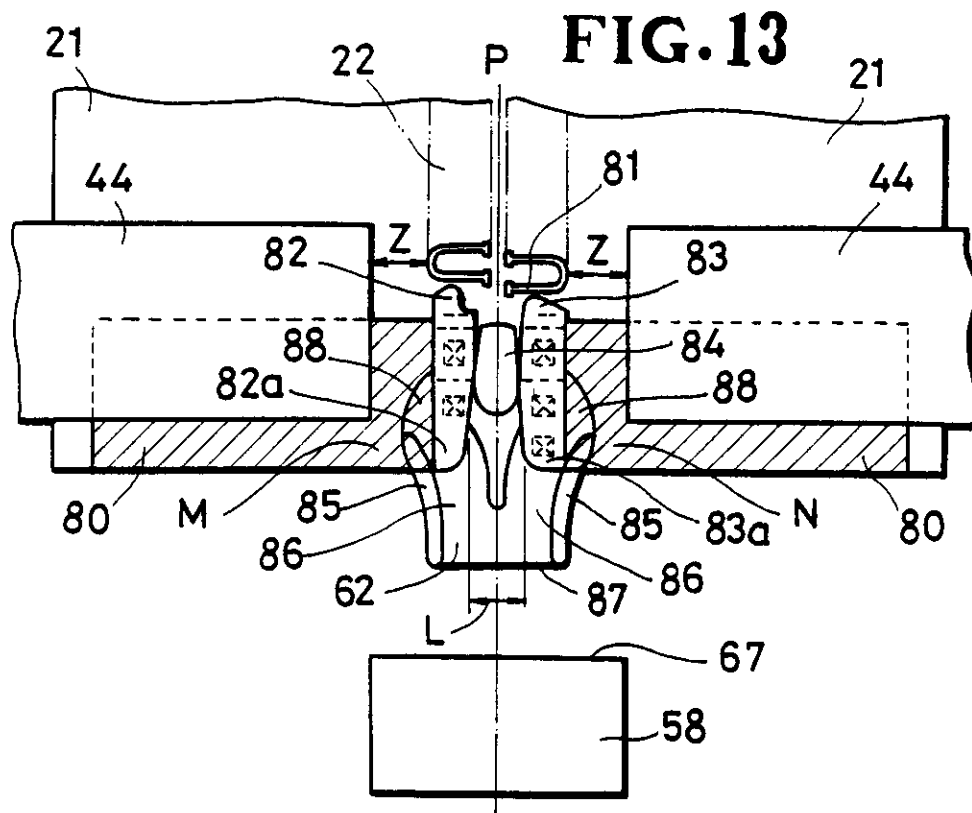
**FIG. 3****FIG. 4**

**FIG. 5****FIG. 7**

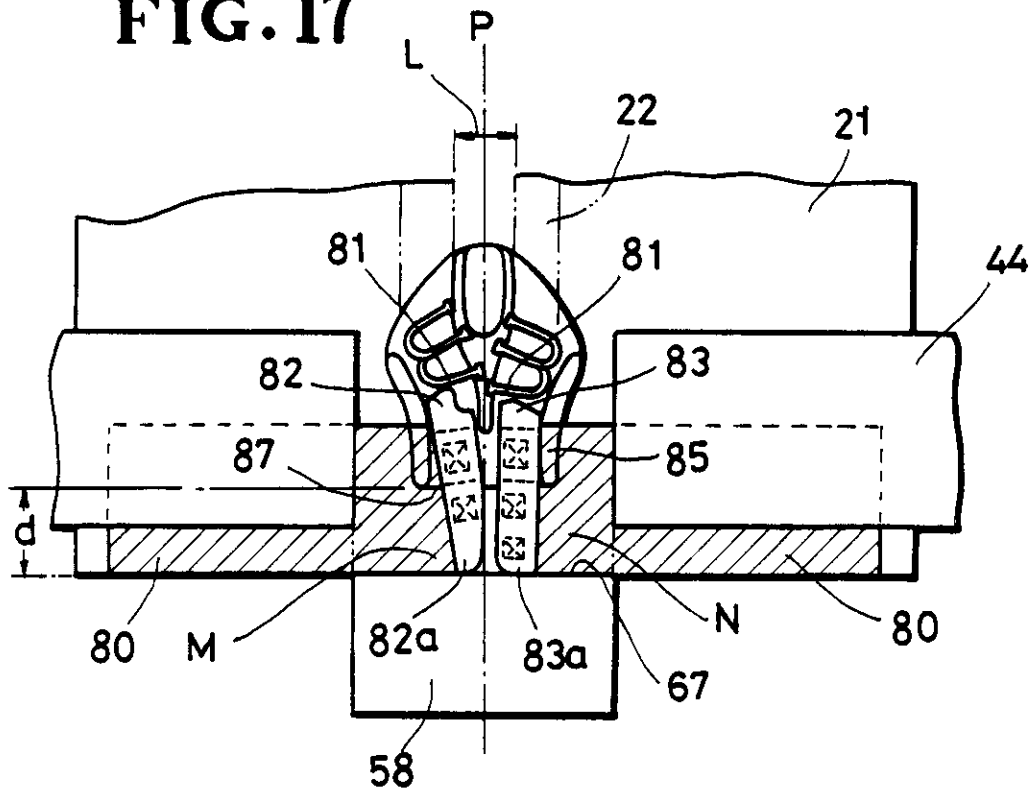




**FIG. 10****FIG. 11****FIG. 12**





**FIG. 17**

2123081

- 1 -

METHOD AND APPARATUS FOR AUTOMATICALLY THREADING  
SEPARABLE SLIDE FASTENER STRINGERS THROUGH SLIDERS

The present invention relates to a method of and  
an apparatus for automatically threading a pair of  
separable slide fastener stringers having pins secured  
to their ends, respectively, through a slider to  
5 thereby couple the slide fastener stringers into a  
slide fastener chain and mount the slider thereon.

Various processes have been practiced in the art  
for fabricating separable slide fasteners. According  
to one known method, auxiliary tapes are attached  
10 respectively across lower ends of separate elongate  
slide fastener stringers having top stops on upper ends  
thereof, the stringers are cut off across the tapes  
into desired unit stringers which are then threaded  
through a slider, pins are fixed to the lower ends of  
15 the stringer lengths, respectively, followed by  
attachment of a box to one of the pins, and finally the  
unit stringers are brought into mutual intermeshing  
engagement. Another prior process comprises the steps  
of attaching pins to lower ends of separate elongate

slide fastener stringers with top stops mounted on their upper ends, threading one of the stringers through a slider, attaching a box to the pin of the stringer with the slider mounted thereon, and cutting  
5 off the stringers into unit stringers which are then combined into a final slide fastener product. These conventional processes however include the manual step of bringing the unit stringers into interdigitating engagement, a step which has been a serious obstacle to  
10 efforts to achieve an increased rate of production of slide fasteners.

A method of manufacturing separable slide fasteners is disclosed in Japanese Laid-Open Patent Publication No. 53-69746, assigned to the present  
15 assignee. The disclosed method is capable of fabricating separable slide fasteners highly efficiently as the entire process is automatized. However, a problem is still to be solved in threading separate stringers with pins attached through a slider unobstructedly and  
20 reliably and taking the stringers into proper meshing engagement.

It is possible by means of the present invention to provide a method of and an apparatus for automatically threading a pair of separable slide fastener stringers  
25 with pins affixed to their ends smoothly and reliably through a slider to place the latter on the stringers and bring the stringers into proper intermeshing

relation.

According to first aspect of the present invention, there is provided a method of automatically threading a pair of separable slide fastener stringers having stringer tapes and pins on ends of thereof through a slider having a guide channel defined by a pair of guide flanges and a diamond and including a pair of throats disposed one on each side of the diamond, said method comprising the steps of: (a) moving the separable slide fastener stringers in one plane along parallel spaced paths, respectively, toward the throats in the slider fixed in position; (b) introducing the pins into the guide channel through said throats, respectively, in said slider while keeping said separable slide fastener stringers in said parallel spaced paths; and (c) inserting said separable slide fastener stringers through said slider with said pins guided by the guide flanges, respectively, and the diamond while moving said separable slide fastener stringers in said one plane along said parallel spaced paths and at the same time allowing the stringer tapes to flex.

According to second aspect of the present invention, there is provided an apparatus for automatically threading a pair of separable slide fastener stringers through a slider, said apparatus comprising: (a) a pair of grippers including a pair of

slide bases and a pair of gripper bases mounted on said slide bases, respectively, each supporting thereon a pair of pivotable gripper arms for gripping therebetween one of the separable slide fastener stringers; (b) a  
5 plurality of guide rails on which said slide bases are slidably movable to allow said grippers feed said separable slide fasteners along parallel spaced straight paths equidistantly one on each side of a central line, said gripper bases being slidably movable on said slide  
10 base in a direction substantially perpendicular to said parallel spaced straight paths for selectively gripping said separable slide fasteners while at the same time allowing the stringer tapes to flex; (c) a slider holder interposed transversely between said parallel  
15 spaced straight paths for holding the slider, said slider holder having a slider engagement surface aligned with said central line; and (d) said grippers being movable on said guide rails along said parallel spaced straight paths for inserting said separable slide fastener  
20 stringers through said slider held in engagement with said slider engagement surface while at the same time allowing the stringer tapes to flex.

The invention will be described by way of example with reference to the accompanying drawings, wherein :-

Figure 1 is a schematic side elevational view of an entire system for automatically assembling separable slide fasteners;

5 Figure 2 is a fragmentary plan view showing the manner in which a pair of transversely spaced slide fastener stringers are held and fed along by a pair of grippers;

10 Figure 3 is a fragmentary plan view of a threading unit for automatically threading a pair of slide fastener stringers through a slider;

Figure 4 is a cross-sectional view taken along line IV - IV of Figure 3;

Figure 5 is an enlarged plan view of a slider holder in the threading unit shown in Figure 3;

15 Figure 6 is a vertical cross-sectional view of the slider holder with a slider imaginarily shown supplied from a chute by a slider feeder arm;

20 Figure 7 is a plan view of a slider supported on the slider holder and a pair of slide fastener stringers as they are threaded into the slider;

Figures 8 through 12 are vertical cross-sectional views illustrating progressive steps of threading the slide fastener stringers through the slider; and

25 Figures 13 through 17 are plan views showing progressive steps of threading the slide fastener stringers through the slider.

Figure 1 shows an overall system 10 for automatically assembling separable slide fasteners. The system 10 includes a unit A for automatically cutting off a pair of continuous elongate slide fastener stringers 16 into a pair of unit stringers having a length equal to that of a final separable slide fastener, a unit B for automatically attaching a pair of pins to ends of the stringers, respectively, a unit C for automatically threading the stringers through a slider and bringing the stringers into intermeshing engagement with each other, and a unit D for automatically attaching a box to one of the pins fixed to the stringers. The units A, B, C and D are all mounted on a base 11. The system 10 also has a first parts feeder 12 for supplying pins to the unit B, a second parts feeder 13 for supplying sliders to the unit C, and a third parts feeder 14 for supplying boxes to the unit D. The continuous elongate slide fastener stringers 16 before they are cut off are fed along into the system 10 by guide rolls 15. The stringers are gripped and pulled by a gripper unit 17 movable along a horizontal guide rail assembly 18 mounted on the base 11.

Prior to entering the automatic assembling system 10, the continuous slide fastener stringers 16 are gapped to provide longitudinally spaced element-free spaces (one shown in Figure 11), and top

stops (one shown in Figure 11) are attached to rear ends of rows of elements on the stringers 16.

The automatic assembling system 10 will operate as follows: The continuous slide fastener stringers 16 are fed along by the guide rolls 15 in the direction of the arrow F while the stringers 16 are being gripped by the gripper unit 17 (described later on) and pulled along successively through the units A, B, C and D. In the unit B, pins are affixed to ends of the rows of coupling elements remote from the top stops on the stringers 16. Then, the stringers 16 are threaded through a slider in the unit C and taken into interdigitating engagement as they emerge from the slider. A box is attached to one of the pins in the unit D. Finally, the stringers are cut off by the unit A into a length of unit stringers which will be finished as a final slide fastener product. The slide fastener stringers 16 may be cut off into unit stringers any time prior or subsequent to the steps carried out by the units B, C and D.

The present invention is particularly directed to the unit C for threading a pair of slide fastener stringers through a slider. The unit C will now be described in greater detail with reference to Figures 2 through 7. As shown in Figure 2, the gripper unit 17 includes a pair of grippers 23, 24 for gripping the ends of slide fastener stringers 19, 20 in transversely

spaced-apart relation to each other and pulling them toward the unit C. Each of the stringers 19, 20 is composed of a stringer tape 21 supporting a row of coupling elements 22 on one longitudinal edge thereof.

5 The stringers 19, 20 have front end portions M, N, respectively, on which pins 82, 83 (Figure 7) are mounted, respectively. In Figure 2, while the stringers 19, 20 are fed along in the direction of the arrow F, they are laterally spaced from each other at  
10 equidistant positions on both sides of a central line P. The stringers 19, 20 will be interengaged into a slide fastener chain having its longitudinal central axis in alignment with the central line P.

As illustrated in Figure 3, the guide rail  
15 assembly 18 is composed of two pairs of parallel guide rails 25, 26 and 27, 28 spaced at equal distances from the central line P. The gripper 23 has a slide base 29 slidably fitted over the guide rails 25, 26. Likewise, the gripper 24 has a slide base slidably fitted over  
20 the guide rails 27, 28. Since the gripper 24 is the mirror image of the gripper 23, only the gripper 23 will be described hereinbelow. The slide base 29 is affixed to a gripper drive belt 30 which is driven by a suitable reciprocable driving means (not shown). The  
25 gripper 23 also includes a gripper base 31 slidably fitted in a slot 29a in the slide base 29 and movable in a direction normal to the central line P. A fluid

cylinder 32 is defined as part of the slide base 29 for actuating the gripper base 31. A piston 33 is slidably disposed in the fluid cylinder 32 and has a piston rod 34 connected to a connector plate 35 attached to the gripper base 31. The connector plate 35 has a spring rod 36, and the slide base 29 has a spring attachment 37, there being a tension spring 38 having one end connected to the spring rod 36 and the other end to the spring attachment 37. As shown in Figure 4, the gripper base 31 has a fluid cylinder 39 with a piston 40 slideably fitted therein, the piston 40 having a piston rod 41 including a tapered wedge 42 on its end remote from the piston 40. A pair of upper and lower gripper arms 43, 44 is pivotably mounted by a pair of pins 45, 46, respectively, on a bifurcated end of the gripper base 31. The upper and lower gripper arms 43, 44 have rear ends 47, 48, respectively, which can be brought into contact with the tapered wedge 42 and front jaws 49, 50, respectively, for gripping the stringer tape 21 therebetween. The rear ends 47, 48 are normally urged by a spring 51 to move toward each other. When the piston rod 41 is projected, its tapered edge 42 spreads apart the rear ends 47, 48 of the gripper arms 47, 48 to move the front jaws 49, 50 toward each other for sandwiching the stringer tape 21. When the piston rod 41 is retracted, the rear ends 47, 48 are moved toward each other under the force of the

spring 51 to thereby spread apart the front jaws 49, 50, thus releasing the stringer tape 21.

As shown in Figure 5, the unit C includes a slider holder 52 having a central axis aligning with the central line P. The slider holder 52 includes a holder casing 53 supported on the base 11 and having a vertical slot 54 (Figure 6) in which two piston rods 55, 56 extend vertically from two fluid cylinders (not shown), respectively. A pair of locking and stop blocks 57, 58 are mounted on upper ends of the piston rods 55, 56, respectively, for vertical movement in the vertical slot 54. A chute 59 extends from the parts feeder 13 (Figure 1). A feeder arm 60 is angularly movable about a shaft 61 between the chute 59 and the stop block 58 for feeding one of sliders 62 at a time from the parts feeder 13 to the stop block 32. The slider 62 has a pull tab 63 loosely pivotably attached thereto and having an aperture 64. The locking and stop blocks 57, 58 define therebetween a slit 65 for receiving therein the pull tab 63 as it depends from the slider 62 due to gravity. The stop block 58 has on its upper end a stepped portion 70 composed of a slanted slider engagement surface 66, a vertical pin stop surface 67 spaced from the slanted slider engagement surface 66, and a horizontal spacer surface 68 extending between the slanted slider engagement surface 66 and the vertical pin stop surface 67. The

locking block 57 has an upper bifurcated portion 71 in which a locking lever 72 is pivotably fitted by a pin 73. The locking lever 72 has a locking pawl 74 engageable in the aperture 64 in the pull tab 63. A  
5 jig cylinder 75 is attached to a vertical surface of the locking block 57 which is remote from the stop block 58, the jig cylinder 75 being actuatable by an electromagnetic device (not shown). The jig cylinder 75 supports thereon a casing 76 having disposed therein  
10 a compression spring 77 having an end placed in a recess defined in the back of the locking lever 72 for normally urging the latter in a direction to move the locking pawl 74 into the slit 65. The jig cylinder 75 has a piston rod 78 held in abutment against a lower  
15 end of the locking lever 72. When the jig cylinder 75 is actuated, the piston rod 78 projects to push the locking lever 72 counterclockwise (Figure 6) about the pin 73 so that the locking pawl 74 is retracted out of the slit 65 against the resiliency of the compression  
20 spring 77. The locking block 57 has an upper end surface 79 serving as a slider mount, as described later on.

As illustrated in Figure 7, the stringer tapes 21, 21 have films 80, 80, respectively, applied to  
25 their ends for preventing the tape ends from fraying. A pair of pins 82, 83 are attached to the stringer tapes 21, 21, respectively, at their ends on the

confronting edges of the tapes 21, 21. The rows of coupling elements 22, 22 include lowermost elements 81, 81 held in contact with the pins 82, 83, respectively. The pins 82, 83 have respective ends 82a, 83a and  
5    respective side surfaces 82b, 83b confronting each other. A box (not shown) will be secured to the pin 83 in the unit D so that the pin 82 can be fitted in the box. The slider 62 to be slidably mounted on the stringer tapes 21, 21 include a diamond or connector  
10    post 84 interconnecting upper and lower slider wings, and a pair of flanges 85, 85 mounted on each slider wing and defining a generally Y-shaped guide channel 86 in cooperation with the diamond 84. The Y-shaped guide channel 86 has a rear end 87 remote from the diamond 84  
15    and a pair of throats 88, 88 disposed one on each side of the diamond 84.

Operation of the threading unit C of the foregoing construction is as follows:

The stringers 19, 20 with the pins 82, 83  
20    attached thereto, respectively, in the unit B are gripped by the grippers 23, 24 as shown in Figure 2 and pulled thereby in the direction of the arrow F in mutually spaced relation toward the unit C. At this time, the fluid cylinder 39 in each of the grippers 23,  
25    24 is actuated to push the piston rod 41 for causing the wedge 42 to close the gripping jaws 49, 50 against the force of the spring 51 to thereby grip the stringer

tape 21. The slide bases 29 are caused by the gripper drive belts 30 to slide along the guide rails 25, 26 and 27, 28 to thereby feed the stringers 19, 20. Just prior to arrival at the unit C, the fluid cylinder 32 in each of the grippers 23, 24 is inactivated to allow the gripper base 9 to move toward the central line P under the force of the spring 38. During this time, the pistons 34 in the grippers 34, 35 are controlled under fluid pressure to keep the distal ends 82a, 83a of the pins 82, 83 spaced from each other by a distance L which is slightly greater than the width of the diamond 84, as shown in Figure 7. As the front ends of the stringers 19, 20 approach the unit C, one of the sliders 62 is supplied by the feeder arm 60 (Figure 6) from the chute 59 to the slanted slider engagement surface 66 on the stop block 58 as it is raised.

More specifically, the feeder arm 60 with the slider 62 received from chute 59 is angularly moved substantially through 90° counterclockwise in the direction of the arrowhead 92 (Figure 8) from a horizontal position 90 to a vertical position 91 in which the slider 62 is held in engagement with the slanted slider engagement surface 66 of the stop block 58 with its upper surface in an uppermost position X.

Then, the locking block 57 is lifted to allow the dependent pull tab 64 to be received in the slit 65 and to enable the slider mount 79, the slanted slider

engagement surface 66, and the feeder arm 60 to hold the slider 62 firmly in position, as illustrated in Figure 9.

When the jig cylinder 75 is inactivated, the  
5 piston rod 78 is retracted and the locking pawl 74 of the locking lever 72 is forced under the bias of the spring 77 to enter the aperture 64 in the pull tab 63 positioned in the slit 65 for thereby locking the slider 62 securely in place. Where the slider 62 is of  
10 the automatic locking type, a locking prong is retracted out of the guide channel in the slider 62 at this time. With the slider 62 thus positioned, the stringers 19, 20 are introduced into the Y-shaped guide channel 86 through the throats 88, 88, respectively.  
15 The insertion of the stringers 19, 20 is stopped when the pins 82, 83 engage the vertical pin stop surface 68 on the stop block 58, as shown in Figure 10.

The jig cylinder 75 is actuated again to project the piston rod 78 for retracting the locking pawl 74  
20 out of the aperture 64 in the pull tab 63. At the same time, the stop block 58 is lowered to its lowermost position, as shown in Figure 11. The slider 62 is now supported by the slider mount 79 of the locking block 57 and the feeder arm 60. Simultaneously, the grippers  
25 23, 24 are actuated again to resume the feeding of the stringers 19, 20 at the same speed of travel in the direction of the arrow F. The stringers 19, 20 are now

brought into proper intermeshing engagement in the slider 62 as they are pulled along by the grippers 23, 24.

When the top stops (Figure 11) secured to the rear ends of the rows of coupling elements 22, 22 engage the slider 62 at the throats 88 therein, the slider 62 is forcibly pulled by the top stops off the locking block 57 and the feeder arm 60. Then, the locking block 57 is moved downwardly as shown in Figure 12. The feeder arm 60 is angularly moved about the shaft 61 counterclockwise in the direction of the arrow 93 (Figure 8) substantially through 90° back to the horizontal position 90 for receiving a next slider from the chute 59. The stop block 58 is raised again to the uppermost position X shown in Figure 8 in preparation for resuming the foregoing cycle.

The manner in which the stringers 19, 20 are threaded through the slider 62 will be described in greater detail.

As illustrated in Figure 7, the gripping jaws 44, 44 of the grippers 23, 24 are spaced from the elements 81, 81 and the pins 82, 83 at the front end portions M, N by distances Z transversely of the stringer tapes 21, 21. As described above, the grippers 23, 24 are slid along the guide rails 25 - 28 to pull the stringers 19, 20 in the same plane along parallel paths while maintaining the ends 82a, 83a of

the pins 82, 83 spaced apart from each other by the distance L. The slider 62 is engaged by the slanted slider engagement surface 66 with the throats 88 in the slider 62 being positioned in the plane in which the stringers 19, 20 are travelling. At this time, the rear end 87 of the guide channel 86 is spaced a distance d from the vertical stop surface 67 of the stop block 58.

The front end portions M, N of the stringers 19, 20 are introduced into the Y-shaped guide channel 86 through the throats 88, 88, respectively. As the stringers 19, 20 progress, the distal ends 82a, 83a of the pins 82, 83 are brought into abutment against inner surfaces of the flanges 85, 85, as shown in Figure 13.

Continued advancing movement of the stringers 19, 20 causes the distal ends 82a, 83a of the pins 82, 83 to be directed toward each other as they are guided by the inner surfaces of the flanges 85, 85, as illustrated in Figure 14. At the same time, the inner edges 82b, 83b of the pins 82, 83 are brought into sliding engagement with side surfaces of the diamond 84. Since the stringer tapes 21, 21 are relatively flexible, the grippers 23, 24 can pull the stringers 19, 20 continuously in the same plane along the parallel paths even when the pins 82, 83 start to be inclined with respect to the central line P.

As the pins 82, 83 enter the slider 62, they

become more inclined and the elements 81, 82 begin to be inserted into the Y-shaped guide channel 86 through the throats 88, 88 and to be inclined along the side surfaces of the diamond 84, as shown in Figure 15. The  
5 stringer tapes 21, 21 are caused to flex further, but the grippers 23, 24 are still allowed to pull the stringers 19, 20 parallel to each other.

The front end portions M, N of the stringers 19, 20 then emerge from the rear end 87 and the distal ends  
10 82a, 83a of the pins 82, 83 are brought into mutual contact with each other, as illustrated in Figure 16, for transverse alignment with each other. The grippers 23, 24 still pull the stringers 19, 20 parallel to each other.

15 When the distal ends 82a, 83a of the pins 82, 83 abut against the vertical pin stop surface 67 of the stop block 58, the advancing movement of the stringers 19, 20 is arrested as shown in Figure 17. At this time, the coupling elements 81, 81 adjacent to the pins  
20 82, 83 are in a position to start intermeshing with each other in the Y-shaped guide channel 86. To assure reliable abutting engagement of the pin ends 82a, 83a against the vertical pin stop surface 67 and allow the coupling elements 81, 81 to start intermeshing  
25 correctly with each other, the front end portions M, N of the stringers 19, 20 are kept pressed against the vertical pin stop surface 67 for a few seconds. To this

end, the gripper drive belts 30 (Figure 3) for driving the grippers 23, 24 are driven by a servomotor (not shown) which can produce a continuous low torque to press the pin ends 82a, 83a against the vertical pin  
5 stop surface 67.

The stop block 58 is then lowered to leave the slider 62 held only by the locking block 57 and the feeder arm 60. The grippers 23, 24 are advanced simultaneously at the same speed to permit the  
10 stringers 19, 20 to pass through the Y-shaped guide channel 86 in the slider 62. During this time, the rows of coupling elements 22, 22 are brought by the slider 62 into correct intermeshing engagement with each other. Accordingly, the stringers 19, 20 are  
15 combined into a slide fastener chain with the slider 62 slidably mounted thereon. The locking block 57 is then lowered to free the slider 62 as mounted on the stringers 19, 20, as shown in Figure 12.

With the arrangement of the present invention, a  
20 pair of grippers for gripping a pair of slide fastener stringers are movable in the same plane along parallel rectilinear paths; they only move in a direction along the guide rails and in another direction perpendicular thereto. Therefore, the movements of the grippers are  
25 quite simple, and the unit for threading stringers through sliders in association with such grippers can operate with precision, is of an increased processing capacity, and can be serviced economically.

# CLAIMS

1. A method of automatically threading a pair of separable slide fastener stringers having stringer tapes and pins on ends of thereof through a slider having a guide  
5 channel defined by a pair of guide flanges and a diamond and including a pair of throats disposed one on each side of the diamond, said method comprising the steps of:

(a) moving the separable slide fastener stringers in one plane along parallel spaced paths, respectively, toward  
10 the throats in the slider fixed in position;

(b) introducing the pins into the guide channel through said throats, respectively, in said slider while keeping said separable slide fastener stringers in said parallel spaced paths; and

15 (c) inserting said separable slide fastener stringers through said slider with said pins guided by the guide flanges, respectively, and the diamond while moving said separable slide fastener stringers in said one plane along said parallel spaced paths and at the same time allowing  
20 the stringer tapes to flex.

2. A method according to claim 1, said pins being progressively inclined with respect to said parallel paths as they are guided by said guide flanges.

3. A method according to claim 1, said pins being  
25 temporarily stopped before said separable slide fastener stringers are fully inserted through said slider.

4. An apparatus for automatically threading a pair of

separable slide fastener stringers through a slider, said apparatus comprising :

(a) a pair of grippers including a pair of slide bases and a pair of gripper bases mounted on said slide bases, respectively, each supporting thereon a pair of  
5 pivotable gripper arms for gripping therebetween one of the separable slide fastener stringers;

(b) a plurality of guide rails on which said slide bases are slidably movable to allow said grippers feed  
10 said separable slide fasteners along parallel spaced straight paths equidistantly one on each side of a central line, said gripper bases being slidably movable on said slide base in a direction substantially perpendicular to said parallel spaced straight paths for  
15 selectively gripping said separable slide fasteners while at the same time allowing the stringer tapes to flex;

(c) a slider holder interposed transversely between said parallel spaced straight paths for  
20 holding the slider, said slider holder having a slider engagement surface (66) aligned with said central line; and

(d) said grippers being movable on said guide rails along said parallel spaced straight paths for  
25 inserting said separable slide fastener stringers through said slider held in engagement with said slider engagement surface while at the same time allowing the stringer tapes to flex.

5. An apparatus according to claim 4, said gripper  
30 arms being pivotably movable about pins extending parallel to said guide rails.

6. An apparatus according to claim 4, including a

gripper drive belt connected to each of said slide bases  
and extending parallel to said guide rails.

---

Publication No.  
2123081 A dated 25 January 1984

Patent Granted:

WITH EFFECT FROM  
SECTION 25(1)

SEP 1985

Patent No.  
216685 filed on 20 June 1983

Priority claimed:  
19 June 1982 in Japan doc: 57/105687

Title:  
Method and apparatus for automatically threading separable slide fastener stringers  
through sliders

Applicant:  
Yoshida Kogyo KK (Japan), No 1 Kanda Izumi-cho, Chiyoda-ku, Tokyo, Japan.

Inventors:  
Koichi Kawakami, 72 Omachi Toyama-shi, Toyama-ken, Japan.

Mitsuo Sawada, 1-1 Horitake Kurobe-shi, Toyama-ken, Japan.

Classified to:  
E28

Examination requested 25 APR 1984

Address for Service:  
Marks and Clerk, 57-60 Lincoln's Inn Fields, London WC2A 3LS.