629210

COMMONWEALTH of AUSTRALIA
Patents Act 1952

APPLICATION FOR A STANDARD PATENT

I/We

Sun Microsystems, Inc.

of

2550 Garcia Avenue, Mountain View, California, 94043, United States of America

hereby apply for the grant of a Standard Patent for an invention entitled:

Method and apparatus for minimizing the visual degradation of digital typefaces

which is described in the accompanying complete specification.

Details of basic application(s):-

Number	Convention Country	Date
263043	United States of America	26 October 1988

The address for service is care of DAVIES & COLLISON, Patent Attorneys, of 1 Little Collins Street, Melbourne, in the State of Victoria, Commonwealth of Australia.

DATED this NINTH day of MAY 1989

To: THE COMMISSIONER OF PATENTS

.....
a member of the firm of
DAVIES & COLLISON for
and on behalf of the
applicant(s)

Davies & Collison, Melbourne

M 008854 090589

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

DECLARATION IN SUPPORT OF CONVENTION OR NON-CONVENTION APPLICATION FOR A PATENT

In support of the Application made for a patent for an invention

Insert title of invention.

entitled: "METHOD AND APPARATUS FOR MINIMIZING DEGRADATION OF DIGITAL TYPEFACES"

Insert full name(s) and address(es) of declarant(s) being the applicant(s) or person(s) authorized to sign on behalf of an applicant company.

I
~~We~~ of Michael H. Morris
Sun Microsystems, Inc.
2550 Garcia Avenue
Mountain View, California 94043
United States of America.

do solemnly and sincerely declare as follows :–

Cross out whichever of paragraphs 1(a) or 1(b) does not apply

1(a) relates to application made by individual(s)
1(b) relates to application made by company; insert name of applicant company.

1. (a) ~~I/We are~~

or (b) I am authorized by

Sun Microsystems, Inc.

the applicant..... for the patent to make this declaration on ~~its~~ behalf.

Cross out whichever of paragraphs 2(a) or 2(b) does not apply

2(a) relates to application made by inventor(s)
2(b) relates to application made by company(s) or person(s) who are not inventor(s); insert full name(s) and address(es) of inventors.

2. (a) ~~I/We are~~

or (b) 1. Eduardo MARTINEZ
of 1735 Woodland,
Palo Alto, California 94304

and 2. May KAO
of 7583 Dumas Drive,
Cupertino, California 95014

both of United States of America

~~I/We are~~ the actual inventor.S..... of the invention and the facts upon which the applicant..... ~~is~~ entitled to make the application are as follows :–

State manner in which applicant(s) derive title from inventor(s)

The actual inventors assigned th invention to the said applicant

Cross out paragraphs 3 and 4 for non-convention applications. For convention applications, insert basic country,(s) followed by date(s) and basic applicant(s).

3. The basic application..... as defined by Section 141 of the Act ~~was/were~~ made

in United States of America on the 26 October 1988

by Eduardo Martinez and May Kao

in ..... on the .....

by .....

in ..... on the .....

by .....

4. The basic application..... referred to in paragraph 3 of this Declaration ~~was/were~~ the first application..... made in a Convention country in respect of the invention the subject of the application.

Insert place and date of signature.

Declared at California this 25 day of April 1989

Signature of declarant(s) (no attestation required)

.....

Michael H. Morris
Vice President

Note: Initial all alterations.

DAVIES & COLLISON, MELBOURNE and CANBERRA.

(12) PATENT ABRIDGMENT (11) Document No. AU-B-34584/89
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 629210

(54) Title
METHOD AND APPARATUS FOR MINIMIZING THE VISUAL DEGRADATION OF DIGITAL TYPEFACES

International Patent Classification(s)
(51)[4] G06F 015/72 G06F 003/12

(21) Application No. : 34584/89 (22) Application Date : 09.05.89

(30) Priority Data

(31) Number (32) Date (33) Country
263043 26.10.88 US UNITED STATES OF AMERICA

(43) Publication Date : 05.07.90

(44) Publication Date of Accepted Application : 01.10.92

(71) Applicant(s)
SUN MICROSYSTEMS, INC.

(72) Inventor(s)
EDUARDO MARTINEZ; MAY KAO

(74) Attorney or Agent
DAVIES COLLISON CAVE , 1 Little Collins Street, MELBOURNE VIC 3000

(57) Claim

1. A method for minimising the visual degradation of digital typefaces in a computer system wherein typefaces are displayed and generated for a particular scale and each character of a typeface is described in a format using control points comprising X–Y coordinate pairs, said method comprising the steps of:

forming a frame for each character from said control points, said frame represented by a plurality of frame points comprising X–Y coordinate pairs;

determining vertical strokes which comprise each character, said strokes formed by a plurality of frame points and identified as X strokes;

determining horizontal strokes which comprise each character, said horizontal strokes formed by a plurality of frame points and identified as Y strokes;

adjusting the X coordinates of the frame points for each character of the typeface representative of X strokes, said X strokes being oriented in the vertical direction and prioritised in order of visual importance to the character, said strokes being adjusted according to priority wherein the amount of adjustment of the lower priority strokes is dependent upon the higher priority strokes, said adjustment regularising the thicknesses of the X strokes and preserving the width of each character;

adjusting the X coordinates of the frame points which do not form a stroke, said adjustment dependent on preserving the width of the character and the thicknesses of adjusted X strokes;

. . ./2

adjusting the Y coordinates of the frame points for each character of the typeface representative of Y strokes, said Y strokes being oriented in the horizontal direction and prioritised in order of visual importance to the character, said strokes being adjusted according to the priority wherein the amount of adjustment of the lower priority strokes is dependent upon the thicknesses of the higher priority strokes, said adjustment

preserving the heights of the characters of the typeface and the horizontal alignment of the Y strokes; and

adjusting the Y coordinates of the frame points which do not form a stroke, said adjustment dependent on preserving the height of the character and the thicknesses and the horizontal alignment of the adjusted strokes;

whereby the important visual features of the characters of the typeface are maintained thereby minimizing the visual degradation of the typeface.

629210

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

NAME & ADDRESS
OF APPLICANT:

Sun Microsystems, Inc.
2550 Garcia Avenue
Mountain View California 94043
United States of America

This document contains the amendments allowed under Section 83 (2) by the Supervising Examiner on

.....

and is correct for printing

: : .....

NAME(S) OF INVENTOR(S):

Eduardo MARTINEZ
May KAO

ADDRESS FOR SERVICE:

DAVIES & COLLISON
Patent Attorneys
1 Little Collins Street, Melbourne, 3000.

COMPLETE SPECIFICATION FOR THE INVENTION ENTITLED:

Method and apparatus for minimizing the visual degradation of digital typefaces

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

1. FIELD OF THE INVENTION:

The method and apparatus of the present invention relates to the technique of intelligent scaling. More particularly, the present invention relates to data processing apparatus and methods for minimizing the visual degradation of digital typefaces.

2. ART BACKGROUND:

As the popularity and affordability of computers have increased, so has the number of computer programs available. The computer programs available are diverse, encompassing a wide variety of applications. In addition, the range of users has broadened from the computer programmer of 10 years ago to businesses that use the computer for a variety of tasks including word processing and accounting.

It is well understood from the nature of digital representations of continuous analog forms that some degradation will occur when translating from a continuous representation (such as a typeface prepared manually by a calligrapher) to a discrete digital representation. Programmers and engineers, the original users of computers and viewers of digital typefaces generated by computers (typically on CRT's and computer printers) were not concerned about how the type looked so long as the characters were somewhat readable. However, not only has the viewer of digital type changed but also the requirements with respect to legibility and degradation of type.

As a result, the ability to provide legible digital typefaces has become extremely important for the automation of the printing and typesetting industry as well as for word processor users who require legible, letter quality type. For further information on digital typefaces, see: Bigelow & Day, "Digital Typography", Scientific American, p. 106-119, August, 1983; Karow, Digital Formats For Typefaces, (URW Verlag 1987).

Typically, to produce a digital typeface, the typeface is developed manually, digitized and input into a digital typeface format such as IKARUS. Problems arise because the control points of the character which define the outline of the character do not always coincide to the discrete grid positions corresponding to the resolution of the digital display or printer. As a result, the control points are rounded off to the nearest grid position and parts of characters which originally had the same dimension (for example the widths of the vertical portions of an upper case "I" and "J") now have different dimensions. This method results in the visual degradation of the typeface because the reader does not easily see and recognize the characters with the height and width relationships among the characters changed. Further degradation of the typeface occurs when the size of the characters is globally increased by multiplying the dimensions by a factor, because the inconsistencies in the typeface are also multiplied by that factor.

Another problem arises due to the fact that the thicknesses or heights of characters or portions of characters may be approximately, but not exactly, the same height or width. As the scale of the typeface decreases, the likelihood of distortion increases due to the small differences in height or width. If, for example, the heights of the characters are exactly the same, the scaled version of each of the characters would also be exactly the same. However, if the heights differ by a small value and the display is a low resolution device, the height of one character may be rounded off to one pixel and the height of another character may be rounded off to a different pixel even though the original difference in height may have been less than .25 of a pixel. In small scale (low resolution) cases similar to the above example, it is desirable to round the heights of the character to the same pixel in order to maintain the original symmetry and proportions. Thus, the typeface loses the original symmetry and proportion among characters and portions of characters in the typeface again resulting in the visual degradation of the typeface.

COMMONWEALTH PATENT OFFICE Sec. 77

To solve these problems, skilled technicians are employed to manually correct any deficiencies in the typeface by reviewing each character and modifying portions of the character which the technician usually perceives to increase the legibility. However, this process is time consuming and costly. There are two primary variables that have to be considered when scaling a digital typeface for display: (1) the different sizes of the font, e.g. 9 point, 10 point or 12 point; and (2) the different resolutions of the display or output device. For each typeface, the manual process must be performed for each possible scale which is equal to the product of the resolution and font size. In addition, the quality of the work is dependent on the skill of the technician. Computer aided processes have been introduced to assist in the manual process. For example there are systems, which display the character and provide a means for the skilled technician to view and modify the character on the display. However, the process of adjustment, what to adjust and how much to adjust is still performed by a skilled technician. U.S. Patent No. 4,675,830 discloses a method for producing scaling typeface data in which the relative dimensions of the characters are preserved. However, the process disclosed requires not only the input of data which describe the typeface but also control information such as key points of the typeface which are aligned with the grid points and dimensions that are to exist between grid points. This additional input must be generated manually by a skilled technician who develops the control information by visual inspection of the typeface.

SUMMARY OF THE INVENTION

In accordance with the present invention there is provided a method for minimising the visual degradation of digital typefaces in a computer system wherein typefaces are displayed and generated for a particular scale and each character of a typeface is described in a format using control points comprising X-Y coordinate pairs, said method comprising the steps of:

forming a frame for each character from said control points, said frame represented by a plurality of frame points comprising X-Y coordinate pairs;

determining vertical strokes which comprise each character, said strokes formed by a plurality of frame points and identified as X strokes;

determining horizontal strokes which comprise each character, said horizontal strokes formed by a plurality of frame points and identified as Y strokes;

adjusting the X coordinates of the frame points for each character of the typeface representative of X strokes, said X strokes being oriented in the vertical direction and prioritised in order of visual importance to the character, said strokes being adjusted according to priority wherein the amount of adjustment of the lower priority strokes is dependent upon the higher priority strokes, said adjustment regularising the thicknesses of the X strokes and preserving the width of each character;

adjusting the X coordinates of the frame points which do not form a stroke, said adjustment dependent on preserving the width of the character and the thicknesses of adjusted X strokes;

adjusting the Y coordinates of the frame points for each character of the typeface representative of Y strokes, said Y strokes being oriented in the horizontal direction and prioritised in order of visual importance to the character, said strokes being adjusted according to the priority wherein the amount of adjustment of the lower priority strokes is dependent upon the thicknesses of the higher priority strokes, said adjustment preserving the heights of the characters of the typeface and the horizontal alignment of the Y strokes; and

AUSTRALIAN PATENT OFFICE LS

adjusting the Y coordinates of the frame points which do not form a stroke, said adjustment dependent on preserving the height of the character and the thickness and the horizontal alignment of the adjusted strokes;

whereby the important visual features of the characters of the typeface are maintained thereby minimising the visual degradation of the typeface.

In accordance with the present invention there is also provided a method of adjusting in the horizontal direction at least one character of a digital typeface in a computer system wherein typefaces are displayed and each character is defined by a plurality of frame points which form the frame of the character; said character further described by a plurality of X strokes indicative of important visual elements with respect to the X coordinates of the frame, said strokes defined by the frame points of the character wherein the frame points are represented by X-Y coordinate pairs and a typeface is generated for a particular scale, said method comprising the steps of:

identifying the X strokes as strong X strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than or equal to a predetermined amount indicative of a strong stroke;

constructing an X main street comprising non-horizontally overlapping strong X strokes, prioritised in order of length, said X main street indicative of high priority visual components of a character;

globally adjusting the thicknesses of the X strokes of the typeface relative to all strokes of the typeface thereby regularising the thicknesses of the X strokes;

adjusting in the horizontal direction X white space which occurs between X strokes on main street, said white space being proportionately scaled and adjusted in order to preserve the total width of the character;

adjusting the coordinates of the X main street strokes such that the location of the strokes relative to one another is determined according to the adjusted white space between strokes; and

adjusting the X coordinates of the frame points of the X strokes not on X main street wherein the amount of adjustment of the X coordinates is dependent upon the higher priority adjusted X strokes and the X white space

AUSTRALIAN PATENT OFFICE LS

between the X main street strokes;

wherein the width of the character and the symmetries and spatial relationships among the strokes of the characters of the typeface are preserved.

In accordance with the present invention there is also provided a method of adjusting in the vertical direction at least one character of a digital typeface in a computer system wherein typefaces are displayed and each character is defined by a plurality of frame points which form the frame of the character, said character further described by a plurality of Y strokes indicative of strong visual elements with respect to the Y coordinates of the frame, said strokes formed by two Y segments, said strokes defined by the frame points of the character wherein the frame points are represented by X-Y coordinate pairs and a typeface is generated for a particular scale, said method comprising the steps of:

globally adjusting the thicknesses of the Y strokes of the typeface relative to the strokes of the typeface thereby regularising the thicknesses of the Y strokes;

identifying the Y strokes as strong Y strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than a predetermined amount indicative of a strong stroke;

constructing a Y main street comprising non-vertically overlapping strong Y strokes, prioritised or order of length, said Y main street indicative of high priority visual components of a character;

forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top extremes of characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters

AUSTRALIAN PATENT OFFICE LS

being dependent on the number of extremes which comprise each cluster;

identifying those Y main street strokes which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinates of the segments of Y main street strokes which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y main street stroke is adjusted by a Y alignment process, adjusting the Y coordinate of the other segment according to the thickness of the stroke;

adjusting the Y white space between Y main street strokes, said adjustment of Y white space dependent upon preserving the height of the character;

adjusting the Y coordinates of the Y main street strokes not adjusted according to a Y alignment process, said Y coordinates adjusted relative to the adjusted Y main street strokes;

identifying those Y strokes not on Y main street which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinates of the segment of Y strokes not on Y main street which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y stroke not on main street is adjusted by a Y alignment process, adjusting the Y coordinate of the other segment according to the thickness of the stroke;

adjusting the Y coordinates of the remaining unadjusted strokes relative to the adjusted Y main street strokes;

identifying those Y segments which did not form a stroke which are

AUSTRALIAN PATENT OFFICE LS

black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinate of a segment which is black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface; and

adjusting the Y coordinates of the remaining unadjusted segments relative to the adjusted Y main street strokes.

In accordance with the present invention there is also provided a method of adjusting characters in a digital typeface by a Y alignment process in a computer system wherein typefaces are displayed and each character is defined by a plurality of frame points which form the frame of the character, said frame points forming horizontal segments, referred to as Y segments, at the Y coordinate values of the frame points, said Y segments indicative of visual components of the character and approximates portions of the frame, said segments having a direction according to the direction of the frame the segment approximates, said method comprising the steps of:

forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top extremes of characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters being dependent on the number of extremes which comprise each cluster;

identifying those Y segments which are black convex and within the Y coordinate limits of an important cluster of the same type, the type of segment being dependent on the direction of the segment; and

adjusting the Y coordinate of the segment which is black convex and

AUSTRALIAN PATENT OFFICE LS

within an important cluster of the same type, said method of adjustment comprising:

determining the important Y coordinate, YIMPT, of the important cluster the segment is within, said YIMPT being the extreme top Y coordinate of the cluster if the cluster comprises top extremes and the extreme bottom Y coordinate of the cluster if the cluster comprises bottom extremes;

adjusting YIMPT to the nearest grid position;

adjusting the distance between YIMPT and the segment to be adjusted so that the distance is equal to an incremental value of the grid; and

adjusting the Y coordinate value of the segment to be equal to the sum of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is greater than or equal to YIMPT, and adjusting the Y coordinate value of the segment to be equal to the difference of adjusted values of YIMPT and the distance if the Y coordinate value of the segment is less then YIMPT.

In accordance with the present invention there is also provided a method for enhancing the legibility of digital typefaces in a computer system wherein typefaces are displayed and the frame points which form the end points of diagonal segments of the character frame are modified, said process comprising the steps of:

ordering all diagonal segments by slope;

forming groups of diagonal segments which are relatively close in angle;

rotating each group of diagonal segments by the complement of the average slope of the group such that the diagonal segments are approximately vertical;

identifying certain pairs of diagonal master segments as diagonal strokes if the two segments oppose one another in direction and vertically overlap one another and the ratio of the length of vertical overlap and the distance between segments is greater than a predetermined amount indicative

AUSTRALIAN PATENT OFFICE

of the visual recognition of a stroke;

adjusting the thickness of the diagonal strokes according to the adjusted thicknesses of horizontal or vertical strokes which were the same or approximately the same thickness prior to adjustment;

adjusting the frame points of the diagonal strokes to correspond to the adjusted thickness of the diagonal stroke, wherein the thicknesses of adjacent strokes are preserved by displacing the frame points along the segments of the adjacent strokes.

In accordance with the present invention there is also provided a method for scaling distances in a digital typeface at a given scale in a computer system wherein typefaces are displayed, comprising:

storing an "n" number of values to be scaled in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be scaled;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

scaling the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position;

determining the next value to be scaled from the index stored in the third array;

scaling the remaining values in order of priority said scaling process comprising:

determining the largest value which was scaled and is smaller than the current value to be scaled;

determining the smallest value which was scaled and is larger than the current value to be scaled;

if there is no value which is larger than the current value to be scaled,

AUSTRALIAN PATENT OFFICE LS

calculating the scaled current value according to the following equation:

$$A[m]+R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was scaled and is smaller than the current value to be scaled, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was scaled and is smaller than the current value to be scaled and S is the scale of the typeface; and

if there is a value which is larger than the current value to be scaled, calculating the scaled current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where A[m] is the adjusted value of the largest value which was scaled and is smaller than the current value to be scaled, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was scaled and is larger than the current value to be scaled, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was scaled and is smaller than the current value to be scaled, V[r] is the original value of the smallest value which was scaled and is larger than the current value to be scaled.

In accordance with the present invention there is also provided a method for classifying the coordinates of control points into classes of master and slave coordinates in a computer system wherein typefaces are displayed and each character of a digital typeface of characters is described in a format using control points comprising X-Y coordinate pairs, said method comprising the steps of:

forming a frame for each character from said control points each frame being a simplified visual representation of a corresponding character, said frame represented by a plurality of frame points comprising X-Y coordinate pairs;

identifying certain X coordinates of the frame points as X master coordinates if the frame point is in the extreme in the horizontal direction or if the frame point is an end point of a line segment which is a vertical or almost vertical side of the frame;

AUSTRALIAN PATENT OFFICE

identifying the non-master X coordinates as X slave coordinates;

whereby the master coordinates are adjusted to be located at integer grid positions and the slave coordinates are proportionately adjusted according to the adjusted master coordinates.

In accordance with the present invention there is also provided apparatus for performing the above methods.

Through the method and apparatus of the present invention, the visual degradation of digital typefaces is minimised without the manual input of the skilled technicians.

The present invention provides methods and apparatus which are most advantageously used in conjunction with a digital computer to minimise the visual degradation that occurs when preparing and scaling digital typefaces. In the method and apparatus of the present invention, the frames, which are used to describe each character, are modified according to a predetermined set of rules which analyses and establishes the visual components which make up each character and the priority in which the components are aligned on grid points and with respect to previously aligned components.

The control points, which are used to define the character in a digital typeface format, are analysed to determine the frame of a character. The

AUSTRALIAN PATENT OFFICE LS

frame is a simplified form of the character which comprises important visual properties or components of the character which are to be preserved. The frame is analyzed in the horizontal direction and vertical direction to determine the priority or importance of the coordinates which define the outline of the frame. The important coordinates, referred to as master coordinates, are then further analyzed to determine the corresponding master segments. These segments are then analyzed to determine the pairs of segments which form strokes. The strokes are classified and prioritized.

Using the visual components determined, from the analysis of the character, the coordinates of the frame are adjusted starting with the highest priority component, the highest priority stroke, according to certain rules which are dependent upon whether the strokes formed are oriented in the horizontal or vertical direction. Components lower in priority, such as the lower priority strokes, master coordinates which are not part of a stroke and frame coordinates which are not defined as master coordinates, are then modified or aligned in a manner that is dependent on the previously aligned components. As a result of the priority and rules for adjustment, the important visual components of each character and the relationship of the visual components of each character with the other characters of the typeface are preserved thereby minimizing the visual degradation of the typeface.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects, features and advantages of the method and apparatus for the present invention will be apparent from the following detailed description of the preferred embodiment in which:

Fig. 1 illustrates a computer incorporating the present invention.

Fig. 2a illustrates the control points used to digitally describe the character and **Fig. 2b** illustrates the contour convention used in the description of the method and apparatus of the present invention.

Fig. 3 is a flow chart generally depicting the process of the present invention.

Fig. 4a is an illustration of a character and the corresponding frame and **Fig. 4b** is a flow chart illustrating a method for determining the frame of the character.

Fig. 5 shows the letter "e" and its control points.

Fig. 6 shows the frame formed from the letter "e" depicted in Fig. 5.

Fig. 7a, 7b and 7c illustrates the geometric relationships between control points and frame points.

Fig. 8 is a flow chart briefly describing the analysis process of the present invention.

Fig. 9a is a flow chart describing the process of determining the visual components with respect to X coordinates up to the highest priority visual component, the X main street. **Fig. 9b**.is a flow chart describing the process of determining the visual components with respect to the Y coordinates up to the highest priority visual component, the Y main street.

Fig. 10a illustrates X master segments and X strokes and **Fig. 10b** illustrates Y master segments and Y strokes.

Figs. 11a and **11b** are flow charts describing the limited divergence process of the present invention.

Fig. 12 is a flow chart describing the horizontal adjustment process of the present invention.

Fig. 13a illustrates the relative adjustment process of the present invention and **Fig. 13b** illustrates the method for adjusting slave coordinates.

Fig. 14 is an illustration of a local extreme.

Fig. 15 is a flow chart illustrating the process of determining clusters with respect to the Y alignment adjustment process of Y coordinates.

Fig. 16 is a flow chart describing the Y alignment adjustment process of the present invention.

Figs. 17a and **17b** are flow charts describing the vertical adjustment process of the present invention.

Fig. 18 illustrates the location of the clusters and strokes used to describe the vertical adjustment process of the present invention.

Fig. 19 is a flow chart which describes the diagonal adjustment process of the present invention.

Fig. 20 illustrates the adjustment of a diagonal stroke in the character "N".

Fig. 21a - 21b illustrate the adjustment of the frame points of diagonal strokes according to the present invention.

NOTATION AND NOMENCLATURE

The detailed descriptions which follow are presented largely in terms of algorithms and symbolic representations of operations on data bits within a computer memory. These algorithmic descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art.

An algorithm is here, and generally, conceived to be a self-consistent sequence of steps leading to a desired result. These steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It proves convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like. It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities.

Further, the manipulations performed are often referred to in terms, such as adding or comparing, which are commonly associated with mental operations performed by a human operator. No such capability of a human operator is necessary, or desirable in most cases, in any of the operations described herein which form part of the present invention; the operations are machine operations. Useful machines for performing the operations of the present invention include general purpose digital computers or other similar devices. In all cases there should be borne in mind the distinction between the method operations in operating a computer and the method of computation itself. The present invention relates to method steps for operating a computer in

processing electrical or other (e.g., mechanical, chemical) physical signals to generate other desired physical signals.

The present invention also relates to apparatus for performing these operations. This apparatus may be specially constructed for the required purposes or it may comprise a general purpose computer as selectively activated or reconfigured by a computer program stored in the computer. The algorithms presented herein are not inherently related to a particular computer or other apparatus. In particular, various general purpose machines may be used with programs written in accordance with the teachings herein, or it may prove more convenient to construct more specialized apparatus to perform the required method steps. The required structure for a variety of these machines will appear from the description given below.

DETAILED DESCRIPTION OF THE INVENTION

The following detailed description will be divided into several sections. The first of these will discuss a general system arrangement for performing the process for minimizing the visual degradation of digital typefaces. Subsequent sections will deal with such aspects of the present invention as the analysis of the typeface data to determine the important visual components of each character in the typeface and the priority of adjustment of the visual components and adjustment of the characters in horizontal, vertical and diagonal directions

In addition, in the following description, numerous specific details are set forth such as algorithmic conventions, character definition conventions, specific numbers of bits, etc., in order to provide a ~~through~~ thorough understanding of the present invention. However, it will be obvious to one skilled in the art that the present invention may be practiced without these specific details. In other

COMMONWEALTH PATENT OFFICE Sec. 77

instances, well-known circuits and structures are not described in detail in order not to obscure the present invention unnecessarily.

General System Configuration

Fig. 1 shows a typical computer-based system for increasing the legibility of digital typeface according to the present invention. Shown there is a computer 1 which comprises three major components. The first of these is the input/output (I/O) circuit 2 which is used to communicate information in appropriately structured form to and from the other parts of the computer 1. Also shown as a part of computer 1 is the central processing unit (CPU) 3 and memory 4. These latter two elements are those typically found in most general purpose computers and almost all special purpose computers. In fact, the several elements contained within computer 1 are intended to be representative of this broad category of data processors. Particular examples of suitable data processors to fill the role of computer 1 include machines manufactured by Sun Microsystems, Inc., Mountain View, California. Other computers having like capabilities may of course be adapted in a straightforward manner to perform the functions described below.

Also shown in Fig. 1 is an input device 5, shown in typical embodiment as a keyboard. It should be understood, however, that the input device may actually be a card reader, magnetic or paper tape reader, or other well-known input device (including, of course, another computer). A mass memory device 6 is coupled to the I/O circuit 2 and provides additional storage capability for the computer 1. The mass memory may include other programs and the like and may take the form of a magnetic or paper tape reader or other well known device. It will be appreciated that the data retained within mass memory 6, may, in appropriate cases, be incorporated in standard fashion into computer 1 as part of memory 4.

In addition, a display monitor 7 is illustrated which is used to display messages or other communications to the user. Such a display monitor may take the form of any of several well-known varieties of CRT displays.

Preferably, the display monitor 7 may also display the graphic images i.e. the typefaces characters, generated from the digital typeface data modified according to the process of the present invention. A cursor control 8 is used to select command modes and edit the input data, such as, for example, the scale of the typeface, and provides a more convenient means to input information into the system.

Process Overview

Referring to Fig. 2a, several upper case and lower case characters of a typeface are shown. In Fig. 2a lower case "o" and "f"and upper case "N" and "G" are illustrated. Associated with each character is a set of points, for example points 10, 15, 20 and 25 which are the control points of the character. The control points are dependent on the digital format that is used to describe the character. In the present example the characters are described and control points reflect a contour format comprising straight line segments and arcs of conics and beziers. Straight line segments are described by two control points, conic arcs are described by three control points and bezier arcs are described by four control points. For example, in Fig. 2a, control points 10, 15 and 25 describe a conic arc between points 15 and 25 wherein control point 10 dictates the arc or the radius of the curve. There are many other formats such as the IKARUS format, DI format, the VC format and the VS format which are also used to define digital typefaces. However, in the description of the present invention the format described above will be used.

Throughout the description of the process, the characters are represented and described according to a single convention. However, the process is not limited to use with a single convention and may be easily applied to other conventions. In the following convention, the character consists of one or more contours each defining a boundary between "black" and "white". Each contour consists of a begin point followed by a sequence of arcs. Each arc is defined by a curve type and two or more control points. Due

COMMONWEALTH PATENT OFFICE Sec. 77

to the continuity of the contour the first point of each arc is implicitly the last of the previous one. The last point of the last arc must be coincident with the beginning point. The contours are defined in relation to a coordinate system such that: (1) when the character is viewed in the normal reading position the X axis points in the direction of successive character placement, e.g. to the right for the roman alphabet , down for a Chinese font; (2) the Y axis is 90% counter clockwise from X; and (3) the direction of the contour is clockwise if the region enclosed is black, otherwise the direction of the contour is counter clockwise. No arc has inflections or extremes except at the end points of the arc. Note that an arc that has an inflection or extreme which is not at an end point, can be subdivided into two arcs at the point of the inflection or extreme such that the inflection or extreme occurs at the end points of the newly created arcs.

To better understand this convention the letter "e" is illustrated. Referring to Fig. 2b the outside contour of the character is oriented in a clockwise direction reflecting that the outside contour encases a black region. The inside contour surrounds a white region and is therefore the contour oriented in the counter clockwise direction.

The curve types description (i.e. straight line segment, arcs of conics or arcs of Beziers) remain invariant during the adjustment process only the control points change. The adjusted character is then the one defined by the same curve types description controlled by the adjusted control points.

In the description reference is made to the the resolution, font size and the scale of the display device. The resolution of the display device is described in terms of pixels, a known computer graphic display quantity. The resolution may be expressed as the total number of pixels in the horizontal and vertical direction (e.g. 1024 pixels x 1024 pixels) of the display or the number of pixels per inch. The font size is expressed in units called points, a well known unit in the art of typography. If a font size is ten point, the distance to the top of

COMMONWEALTH PATENT OFFICE Sec. 77

the highest character of the font (e.g. the letter "A"), called the ascender distance, plus the distance to the bottom of the lowest character of the font (e.g., the letter "g") called the descender distance, is ten points in length. One point is equal to ~~1/72~~ 1/72.3 inches. The scale is equal to the product of resolution and the font size, for example, if the font size is 6 points and the resolution is 144 pixels/inch the scale is:

$$\frac{\text{6 point}}{(\cancel{72}\ 72.3\ \text{points/inch})} * \frac{\text{144 pixels}}{\text{inch}} = 12 \text{ pixels}$$

Referring to Fig. 3, the process of the present invention is briefly described. At block 50, the input data, which consists of the control points for each of the characters of the typeface, is input to the system. At block 55, the system analyzes this information and determines from the control points input the frame of the character. At block 60, the coordinates which define the frame are further analyzed to determine the important visual components of each of the characters of the typeface and the priority or order of importance that these components adjusted to minimize the visual degradation of the typeface. At block 65, using the frames of the characters and the analysis of the important visual components, the characters of the typeface are adjusted using an innovative intelligence scaling method to produce adjusted frames according to the scale desired. The process preserves the important visual features of the typeface, particularly the consistency of the stroke thicknesses, the horizontal alignment of the characters (i.e., the alignment of the Y coordinates of the characters), the proportion of the white space within a character as well as the total width of the characters. At block 70, the original control points of each of the characters are then adjusted to correspond to the adjusted frames. The adjusted control points are used to control the curve types description to produce characters in which the visual degradation of the typeface has been minimized.

COMMONWEALTH PATENT OFFICE Sec. 77

Analysis of Characters of Typeface

The first step of the process is to determine the frame of each character. The object of determining the frame is to simplify each of the characters to a series of discrete points which may be analyzed and modified to adjust the character. A frame is a collection of polygons, one for each of the characters contours. These polygons are simpler than the original character, yet they retain the characters' fundamental visual properties. The frame comprises a sequence of straight line segments that follow the shape of the character such that there is a straight line segment for every horizontal tangent, vertical tangent, straight line segment, tangent of an inflection point and for the tangents at a slope discontinuity. Utilizing the character shown in Fig. 4a, the frame is formed by connecting the horizontal tangents, 71, vertical tangents 72, tangents of inflection points 73, straight line segments of the character 74 and tangents at the slope discontinuities 75.

Preferably, the process depicted in Fig. 4b is used to construct the frame of a character. At block 76, a polygon is constructed by connecting the control points of the character in the sequence they are ordered (according to the direction of the frame). At block 80, each control point is then assigned the property retained ("r") or non-retained ("n"). Initially, the control points which correspond to the end points of the arc are retained and the remaining points are identified as non-retained. The retained points are those points which will be subsequently identified as the frame points.

The polygon is then simplified into a lower order polygon by eliminating those control points which are not necessary to maintaining the fundamental visual properties of the character. In a sequence of polygon sides <r-n-n-r> (typically representative of a Bezier arc) the central side is deleted, that is the side between the two non-retained points and the surrounding sides are extended until they intersect one another. The new point which occurs at

the intersection of the two sides is labeled non-retained. At block 87, in a series of aligned points, all points but the two extreme points are eliminated. If the sequence contained two or more retained points or if one of its points is an inflection, the remaining points, the two extreme points, are labeled retained. At block 90, for a sequence of points <r-n-n . . . n-r>, all sides lying between consecutive <n> points are eliminated and the sides at the ends of the sequence bounded by <r-n> and <n-r> points are extended towards one another until they insect. The point of intersection is labeled retained.

The points remaining after the completion of the above process are the frame points which form the frame of the character. Fig. 5 shows the letter "e" identified by its control points. Fig. 6 shows the frame for the character It is evident that although the character is simplified somewhat, e.g.the edges are squared and the character is drawn as straight line segments, the important visual characteristics are maintained. Particularly, the relative thickness of certain points of the character with respect to other sections of the character, the height and width of the character as well as the relative angles of various sections of the character are important visual features which are preserved.

The frame provides a simplified representation of the character to perform the subsequent analysis and adjustment operations on. Once the frame has been adjusted, the adjusted values of the control points of the character, which were eliminated when forming the frame, may be computed from the known geometric relationships between the original values of the frame and the control points.

For example, Fig. 7 illustrates the three situations during the above described process for forming the frame in which control points are eliminated. Fig. 7a illustrates a polygon representation of a Bezier arc. The three segment arc is identified by points U-M-N-V. Control point U and control

point V are the end points of the arc. During the process of forming the frame, control points M and N were eliminated and the line segments represented by control points U-M and V-N were extended until they intersected one another at point O thereby simplifying the polygon to two segments, U-O and O-V. Using linear transformations, the adjusted value of control point M may be calculated using the following equation:

$$\bar{M}' = \bar{U}' * tm + \bar{O}' * (1-tm), tm = \frac{|\bar{M}-\bar{O}|}{|\bar{U}-\bar{O}|}$$

Where $\bar{M}'$ is the adjusted value of $\bar{M}$, $\bar{O}'$ is the adjusted value of $\bar{O}$ and $\bar{U}'$ is the adjusted value of $\bar{U}$.

N is similarly adjusted using the equation:

$$\bar{N}' = \bar{V}' * tn + \bar{O}' * (1-tn), tn = \frac{|\bar{N}-\bar{O}|}{|\bar{V}-\bar{O}|}$$

Where $\bar{N}'$ is the adjusted value of $\bar{N}$, $\bar{V}'$ is the adjusted value of $\bar{V}$ and $\bar{O}'$ is the adjusted value of $\bar{O}$.

Similarly, Fig. 7b illustrates a series of aligned control points U-M-V wherein control point M was eliminated during the process of forming the frame. The adjusted value of M may be computed according to the following equation:

$$\bar{M}' = \bar{V}' * tm + \bar{U}' * (1-tn), tn = \frac{|\bar{N}-\bar{U}|}{|\bar{V}-\bar{U}|}$$

Where $\bar{M}'$ is the adjusted value of control point $\bar{M}$, $\bar{U}'$ is the adjusted value of $\bar{U}$ and $\bar{V}'$ is the adjusted value $\bar{V}$.

Fig. 7c illustrates a sequence of points <r-n-n . . . n-r> wherein the control points M, N, P and Q between end points U and V were eliminated and

COMMONWEALTH PATENT OFFICE Sec. 77

replaced by a single control point, identified by O, which was formed by extending segments U-M and V-Q. The adjusted values of the control points eliminated may be calculated using linear transformations. For example, the adjusted value of control point M may be calculated according to the following equation:

$$\overline{M}'=[M'_x M'_y] = [M_u M_v] \times \begin{bmatrix} V'_x - O'_x & V'_y - O'_y \\ U'_x - O'_x & U'_y - O'_y \\ O'_x & O'_y \end{bmatrix}$$

Where M_u and M_v identify the location of the control point relative to control points U and V, V'_X and V'_Y are respectfully the adjusted X and Y coordinate values of V, U'_X and U'_Y are respectively the adjusted X and Y coordinate values of U and O'_X and O'_Y are respectively the adjusted X and Y coordinate values of O.

Control points N, P and Q may be similarly calculated by substitutions of the control point coordinate values for the values of M in the above equation.

The innovative adjustment process of the present invention is then applied to the frame points to adjust the characters and to insure that the relative heights and widths of the character and visual relationships which the user perceives are maintained for any given scale.

Analysis is performed on each frame to further simplify the characters by determining the important visual features to preserve and to break down the frame into a plurality of visual components which are prioritized. The visual components determined are subsequently adjusted according to the priority to minimize the visual degradation of the typeface.

COMMONWEALTH PATENT OFFICE Sec. 77

The process of determining the important visual features of each character is briefly described in the flow chart of Fig. 8. The frames of the characters are separately analyzed in the horizontal and vertical directions to determine the important visual components and priority of importance during the subsequent adjustment process.

At block 100, the frame points are first examined to determine the X master coordinates. An X master coordinate is defined as those X coordinates of the frame points which are important to the visual presentation of the character.

Once the X master coordinates are determined, at block 105, the X master segments are formed. These segments are formed in the vertical direction using the X master coordinates. At block 110, X strokes are formed by pairing X master segments. At block 115, the X main street is determined, comprising the most important visual elements of the character with respect to the X coordinates.

The Y coordinates are similarly analyzed. At block 120, the Y master coordinates are determined. Using the Y master coordinate, at block 125, the Y master segments are formed, at block 130 the Y strokes are formed and at block 135 the Y main street is determined. Once the analysis is complete, the important visual components of the characters - the master points, master segments, strokes and main street - are determined. The priority of the components corresponds to the order in which the components were determined, the main street having the highest priority and slave points, those frame points which are not master points, having the lowest priority.

The analysis of the frame to determine the important visual components will now be described in detail. As stated above, the X master coordinates are first determined. Referring to Fig. 9a at block 300 an X master

coordinate is designated at each X coordinate of a frame point which is an X extreme or local extreme. For example, in the character "F", X extremes exist at the far right and far left of the top horizontal line and a local X extreme exists at the far right of the lower horizontal line. The right end of the lower horizontal line is a local extreme because the line does not extend as far right as the top line but in that local area of the character it extends the furthest to the right. The extremes form the limits or edges of the character which is an important visual feature, since it dictates the height or width of a character or a portion of a character.

At block 310 an X master coordinate is also designated at an X coordinate of a frame point if that frame point is an end point of a vertical or almost vertical line of the frame. An almost vertical line is a line in which may be visually perceived to be vertical. Preferably an almost vertical line has a range of 1:5 to 1:20.

Those coordinates which are not X master coordinates are designated an X slave coordinate and are the lowest priority visual component of the character.

At block 315, X master segments are then formed using X master coordinates. An X master segment is formed starting at each X master coordinate and extending vertically in an upward and downward direction. Each end of the segment extends away from the frame point corresponding to the X master coordinate point until each end of the segment is a predetermined horizontal distance away from the side of the frame which extends in the upward direction away from the master coordinate point, if the end point of the master segment is extending in the upward direction, or the side of the frame which extends away from the X master point in the downward direction, if the end point of the master segment extends in the downward direction. This predetermined distance is approximately one-half the maximum pixel size that

COMMONWEALTH PATENT OFFICE Scc. 77

will be used to generate the typeface. In practice the minimum number of pixels per unit as defined by the sum of ascender and descender heights of a typeface is approximately 10. Therefore it is preferred that the predetermined distance is in the range of 0.01 to 0.02 of the distance defined by the sum of the ascender and descender heights. These segments represent a further simplification of the important visual features of the character.

As set forth in block 320, the X master segments are paired according to certain rules to form strokes. In typography, a stroke is known as the kind of shape produced by a pen or a brush when moved along a rectilinear or slightly curved trajectory. In the system of the present invention, the strokes represent the primary visual elements of the characters and are the elements that are most important in the adjustment process. An X stroke is found where two segments vertically overlap one another for a distance sufficient for the visual definition of a stroke.

The direction of the segment is used to describe the color of the segment and corresponds to the convention used. Segments representing a portion of the curve of a character inherit the properties of the curve; therefore the segments representing a portion of the curve inherit the in/out property of that portion of the curve. In accordance with the contour convention described previously, an X segment has an "in" color if it is oriented in the positive or up direction and has an "out" color if it is oriented in the negative or down direction. In addition, the X master segments are examined in the order of increasing coordinates, that is, the segments would be examined from the left, where the lower coordinate values are located, to the right where the higher coordinates values are located. Thus, two segments would be opposing if the first stroke examined has an "in" color and the second stroke has an "out" color.

The in/out segments must vertically overlap one another for a distance such that the combination of the two segments forms a visually recognizable stroke. It is preferable that the existence of a stroke be determined according to the ratio of the distance the segments vertically overlap to the distance between segments. If a stroke ratio is greater than or equal to 1:1 it is considered a stroke and if it is less than ~~or equal to~~ 1:1 the two segments do not form a stroke. The segments vertically overlap one another if the Y minimum coordinate value of each segment is less than the Y maximum coordinate value of the opposing segment. The amount of overlap is equal to the smallest Y maximum value of the two segments minus the largest Y minimum value of the two segments.

The pairing of X master segments to form X master strokes may best be explained through illustration. Referring to Fig. 10a, six segments are shown, located at X coordinates X_1-X_6. To determine which X master segments form strokes, the X master segments are examined from left to right to attempt to pair opposing segments. Therefore the master segment X_1 is examined with the master segment at X_2. The master segment at X_1 has an "in" color and the master segment at X_2 has an "out" color. Therefore the segments oppose one another. The segments are further examined to determine if the segments vertically overlap one another. The segments do vertically overlap one another because the minimum Y coordinate value of the X_1 segment, Y_3, is less than the maximum Y coordinate value of the opposing (X_2) segment, Y_6, and the minimum Y coordinate value of the X_2 segment, Y_3, is less than the maximum Y coordinate of the opposing (X_1) segment, Y_7. The amount of vertical overlap equals:

$$\text{MIN } (Y_7,Y_6) - \text{MAX } (Y_3,Y_3) = (Y_6-Y_3)$$

Where MAX and MIN are functions which respectively determine the maximum and minimum of the values. Visually it can be seen that the ratio of the amount

COMMONWEALTH PATENT OFFICE Sec. 77

of vertical overlap to the distance between segments is greater than 1:1; therefore the segments at X_1 and X_2 form a stroke.

The segments at X_3 and X_4 do not form a stroke because the segments do not fulfill the requirement for opposing segments that first segment examined, the left segment, has an "in" color and the second or right segment has an "out" color. Similarly the segments at X_4 and X_5 do not form a stroke because the segments are not opposite in color and therefore do not oppose one another. The final pair of segments analyzed, X_5 and X_6, do not form a stroke because the amount of vertical overlap is so small that the stroke ratio is less than 1:1.

At block 330, Fig. 9a, the X main street is constructed. The X main street comprises non-horizontally overlapping, strong X strokes. Each stroke is classified as a strong stroke or as a weak stroke. A strong stroke will be evaluated prior to and will have priority in the adjustment process over a weak stroke because it has a greater visual impact on the viewer and is more discernable by the viewer. Preferably a stroke is a strong stroke if the stroke ratio is greater than or equal to 1.5:1. If the stroke ratio is less than 1.5:1, the stroke is classified as a weak stroke.

The strokes are evaluated in order of length such that if two strokes horizontally overlap, the longer stroke will be on X main street. The X main street reflects the most important visual elements of the character with respect to the X coordinates; therefore, the strokes on main street will be the first elements to be adjusted in the horizontal direction in order to minimize the visual degradation of the typeface. Referring to the example illustrated in Fig. 10a, the stroke formed by the segments at locations X_1 and X_2 is part of X main street because the stroke is a strong stroke and does not horizontally overlap a longer strong stroke.

The Y coordinates of the frame points are analyzed in a manner similar to the analysis of the X coordinates of the frame points. Referring to Fig. 9b, at block 340 a Y master coordinate is designated at a Y coordinate of a frame point which is a Y extreme or a Y local extreme. At block 345 a Y master coordinate is also designated at a Y coordinate of a frame point if that frame point is an end point of a horizontal or almost horizontal line of the frame. Preferably an almost horizontal line has a range of 5:1 to 20:1.

At block 350, Y master segments are formed from Y master coordinates by extending horizontally away from the frame point corresponding to the Y master coordinate in a direction to the right and left of the frame point. The end points of the segment extend until each end of the segment is a predetermined vertical distance away from a side of the frame which extends in the right direction away from the master coordinate if the end of the segment extends to the right, and the side of the frame which extends away from the Y master coordinate in the left direction if the end point of the Y master segment extends to the left.

At block 355, Y strokes are formed from two opposing Y master segments which horizontally overlap one another for a distance sufficient for the visual definition of a stroke. The segments are examined in order of increasing Y coordinates (i.e. bottom to top) and, in accordance with the contour convention described previously, a Y segment has an "in" color if its direction is to the left, and an "out" color if its direction is to the right. The two segments are opposing if the bottom segment has an "in" color and the top segment has an "out" color. The segments horizontally overlap one another if the X minimum coordinate value of each segment is less than the X maximum coordinate value of the opposing segment. The amount of overlap is equal to the smallest X maximum value of the two segments minus the largest X minimum value of the two segments.

COMMONWEALTH PATENT OFFICE Sec. 77

Fig. 10b illustrates the process of forming Y strokes. Five Y master segments are located at Y coordinate locations Y_1-Y_5. To determine which Y master segments form strokes, the segments are examined from the bottom Y master segment Y_1 to the top Y master segment Y_5. The segments at location Y_1 and Y_2 are first examined to determine whether the segments oppose one another. The first segment at location Y_1 is an "in" segment, but the second segment at Y_2 is also an "in" segment and not an "out" segment as is required to form opposing segments. Therefore, the next possible pairing of Y master segments at location Y_2, Y_3 is examined. The segments oppose one another because the Y master segment at location Y_2 is an "in" segment and the Y master segment at Y_3 is an "out" segment. The segments are now analyzed to determine if the segments horizontally overlap and if the segments horizontally overlap, the amount of overlap. The segments horizontally overlap because the X minimum, X_3, of the Y master segment at location Y_2 is less than the X maximum, X_7, of the Y master segment at location Y_3 and the X minimum X_1, of the ~~segment at Y_3~~ is less than the X maximum X_9 of the segment at Y_2 segment at Y_3. The amount of horizontal overlap is equal to:

$$\text{MIN}(X_9, X_7)\text{-MAX}\ (X_3, X_1) = (X_7\text{-}X_3)$$

Since the distance (X_7-X_3) is much greater than the Y distance between segments (Y_3-Y_2), the stroke ratio is greater than 1:1 and the Y master segments at locations Y_2 and Y_3 form a stroke.

The Y master segments at locations Y_4 and Y_5 are then analyzed to determine if the two segments form a stroke. The segments form a stroke because the segment at Y_4 has an "in" color and the segment at Y_5 has an "out" color, the segments horizontally overlap one another and the amount of overlap (X_4-X_2) is ~~large~~ larger than the distance (Y5-Y4) between segments that the stroke ratio is greater than 1:1.

COMMONWEALTH PATENT OFFICE Sec. 77

After the Y strokes are determined, at block 360, Fig 9b, the Y strokes are examined to determine which strokes form the Y main street. The Y main street comprises non-vertically overlapping, strong Y strokes. Each Y stroke is classified as a strong stroke or weak stroke, the strong stroke having a greater visual impact on the viewer. The strokes are evaluated in order of increasing length such that if two strong strokes vertically overlap, the longer stroke will be part of the Y main street. The Y main street reflects the most important visual elements which respect to the Y coordinates and will be the first elements adjusted. Referring to the example in Fig. 10b, the stroke formed by segments located at Y_4 and Y_5 is a strong stroke but overlaps with the strong stroke formed by segments at locations Y_4 and Y_6. Therefore, only longer stroke, the stroke formed by segments Y_4 and Y_5, will be part of the Y main street.

Typeface Adjustment Processes

Once the characters of the typeface have been analyzed, to determine visual components which form the character and the priority of importance of the components, the typeface is adjusted to minimize the visual degradation of the typeface. The frame coordinates are adjusted in order of importance, as dictated by the priority of the visual components determined during the process of analysis of the character, and are adjusted by three processes, referred to as the horizontal, vertical and diagonal adjustment processes. The horizontal adjustment process adjusts the X coordinates of the frame points describing each character and the vertical adjustment process adjusts the Y coordinates of the frame points. The diagonal adjustment process adjusts the frame points forming the diagonal strokes in the character.

As will be apparent from the following description, the adjustment of the characters of the typeface is optimized when all three processes are

COMMONWEALTH PATENT OFFICE Sec. 77

used together on the same set of frame points, however, these processes may be performed singularly or in conjunction with other methods of adjustment and still improve the visual characteristics of the characters of the typeface.

The horizontal adjustment process will first be described. In the horizontal adjustment process, the total width of the character, the thicknesses of strokes within a character and the thicknesses of strokes as related to the stroke thicknesses of other characters of the typeface are important visual features that are desirable to preserve.

Frequently during the adjustment process it is necessary to adjust an off grid coordinate to the nearest grid, that is pixel, position. This may be accomplished by simply rounding the coordinate value to the nearest grid position. Simple rounding presents divergence and convergence problems. Divergence problems occur when two different coordinate values, no matter how close in distance, will be rounded to different grid positions for certain scales. Inconsistent convergence occurs when two different coordinate values round to the same grid position at a given scale and to a different grid position at a smaller scale. This is visually undesirable because the visual differences should decrease as the scale decreases.

To avoid these problems, an innovative process, hereinafter referred to as the limited divergence process, is used to adjust off-grid coordinate values and off grid distances. The limited divergence process adjusts the values in the order of decreasing priority so that the adjustment of the higher priority values influence the adjustment of the lower priority values.

Referring to Figs. 11a and 11b, the limited divergence process is herein described. At block 500, an array V of n elements is formed containing the values to be adjusted. The number of elements in the array, *n*, is equal to the n nber of values to be adjusted. The values are organized in the array in

the order of increasing values. At block 505, a second array P is formed which corresponds to array V and contains the priority order of the values stored in V such that P[i] contains the priority order of the value in V[i]. The priority of the value is dependent upon the number of times the value occurs in the group of values. Thus, in a group of values, the values which occur more frequently are assigned the higher priorities. At block 515, a third array B of n elements is formed. Initially, the bit values in the third array B are set to zero. Once a value V[i] is adjusted, the corresponding array element B[i] is set to one. At block 520 a fourth array A of n elements is formed, which corresponds to the array V and contains the adjusted values.

At block 525, a fifth array I is formed which corresponds to the first array V and contains the index of the value whose priority is immediately lower than the priority of the value currently being adjusted. The element of the array I which corresponds to the lowest priority value contains a value equal to -1 to indicate that there are no lower priority values.

In order for the process to work accurately, the smallest value must be adjusted first. Therefore at block 530 the priority of the smallest value is set to the highest priority. At block 535, the smallest value is adjusted according to the following equation:

$$A[0] = R\,(V[0] * S)$$

Where R is a rounding function which simply rounds the value to the nearest grid position and S is the scale of the typeface. B [0] is set to 1 to indicate that the first element, which is the smallest value of all the values in the array V, has been adjusted. The index for the array, k is set to I[0]. I[0] contains the index which points to the next lowest value (V[k]) in priority.

The adjusted value of V[k] is then calculated. At block 545, m is set to equal k-1. A search is then initiated starting at array element B[m] and continuing by decreasing the index m of array B until an element, B[m], equals one. Thus, the array value V[m] is the largest adjusted value that is smaller than V[k]. At block 550, r is set to equal k +1. A search is initiated starting at array element B(r) and continuing by increasing the index of array B until B[r]=1 or r = n. If r≠n, (that is, a value B[r] = 1 has been found), then V[r] is the smallest adjusted value that is larger than V[k]. If r=n, all elements of array B having an index value greater than k have been searched and no values in array V which are greater than V[k] have been adjusted.

If r=n then the adjusted value of the value r[k] is:

$$A[k] = A[m] + R((V[k] - V[m])*S)$$

Where R is a function which rounds the value in the parenthesis, (V[k] - V[m]) *.S), to the nearest grid position and S is the scale. If r≠n, B[r] = 1 and the adjusted value of V[k] is equal to:

$$A[k]=A[m] + R((A[r] - A[m]) * (V[k] - V[m]) / (V[r] - V[m]))$$

Once the adjusted value, A[k], has been computed, at block 565, the corresponding bit value which indicates that the value has been adjusted, B(k), is set to one and at block 570, k is set to equal the value I [k] which sets the index k to the index of the value in V that is next lowest in priority. If I[k] is equal to -1 then the adjustment process is complete because there is no value in V that is lower in priority. If I [k] is not equal to -1, the process continues again at starting block 545 and proceeds in a loop from blocks 545 to 575 until I[k]= -1. At the completion of the limited divergence process, array A contains the adjusted values of the values stored in V.

The horizontal adjustment will now be described referring to the flow chart depicted in Fig. 12. In the horizontal adjustment process, the thickness of the X strokes is an important visual element. Therefore at block

400, the thicknesses of all the X strokes in the typeface are globally adjusted (adjusted relative to all the X strokes in the typeface) so that size relationships among the stroke thicknesses are maintained thereby regularizing the strokes. Preferably, the stroke thicknesses are adjusted relative to both the X and Y stroke thicknesses of the typeface. The local divergence process is used to globally adjust the X stroke thicknesses, wherein the stroke thicknesses are input to array V in order of increasing magnitude and the priority is set according to the frequency each stroke thickness occurs in the typeface.

Once the X stroke thicknesses are globally adjusted, the highest priority visual component, the X main street, is adjusted. The thicknesses of the strokes on X main street have been adjusted; therefore, at block 420, the X white space between the X main street strokes are adjusted, which determines the relative placement of the X main street strokes within each character.

The white distances are adjusted locally, with respect to the total width of the character. The global adjustment of the X main street stroke thickness may cause the character to either increase or decrease in total width. Since the width of a character is an important visual feature, it is desirable to maintain the original width of the character. The width of the character comprises the thicknesses of strokes and the X white space. Thus to maintain the original width of the character, any distortion in total width caused by the adjustment of the strokes is absorbed by adjusting the X white space. For example, if the stroke thickness as adjusted increase the total width of the character, the total X white space is decreased in order to compensate for the increase in width. The X white space is first scaled by a white space scale factor. The white space scale factor is calculated according to the following equation:

COMMONWEALTH PATENT OFFICE Sec. 77

$$\frac{\text{Width - Stroke'}}{\text{White}}$$

Where "Width" is the total original character width, "Stroke" is total adjusted stroke thicknesses on X main street and "White" is the total original X white space.

The scaled X white space is then adjusted using the limited divergence process described above in order to preserve the symmetry of the size of the X white space within each character.

Although the thicknesses of the strokes are globally determined, the adjustment of the location of those strokes within the character is determined locally. At block 415, the placement of the strokes, that is the frame points of the strokes, within each character is simply determined according to the adjusted X white space. For example, if a character consisted of 3 X main street strokes X_1-X_2, X_3-X_4 and X_5-X_6 and strokes X_1-X_2 and X_3-X_4 are separated by X white space W_1 and strokes X_3-X_4 and X_5-X_6 are separated by X white space W_2, the relative location of stroke X_1-X_2 would be at the far left of the character and the relative location of stroke X_3-X_4 would be equal to the adjusted thickness of stoke X_1-X_2 plus the adjusted X white space W_1. Similarly, the relative location of stroke X_5-X_6 would be equal to the sum of the adjusted thickness of stroke X_1-X_2, the adjusted X white space W_1, the adjusted thickness of stroke X_3-X_4 and the adjusted X white space W_1, the adjusted thickness of stroke X_3-X_4 and the adjusted X white space W_2.

After the X white space has been computed and the adjustment of the frame points of the X main street strokes is complete, referring to Fig. 12, block 425, the frame points which form the strokes not on X main street are adjusted. The weak strokes and overlapping strokes which did not make it on main street are aligned with the closest

COMMONWEALTH PATENT OFFICE Sec. 77

main street side and the other side is computed given the globally adjusted thickness of the stroke. The strokes are adjusted according to the following process hereinafter referred to as the "relative adjustment process". Referring to Fig. 13a, locations X_4-X_5, X_1-X_3 and X_9-X_{10}, identify strokes on X main street, X_0-X_2 and X_7-X_8 identify the

strokes which did not make it on X main street and X6 identifies the location of a coordinate which was not used to form a stroke. The relative adjustment process is described using stroke X_7-X_8 as an example. First, it is determined which side or segment which forms the stroke X_7-X_8 is closest to a side or segment of a stroke on X main street. Therefore, in the present example the distance between the segments at locations X_7 and X_5 and the distance between the segments at locations X_8 and X_9 are compared. As can be seen from Fig. 13a, the distance between X_8 and X_9 is much shorter than the distance between X_5 and X_7. Therefore, the side X_8 is the segment closest to the closest main street side and is adjusted relative to the segment at location X_9 of the main street stroke X_9-X_{10}. X_8 is adjusted using the following equation:

$$X_8' = X_9' - R((|X_9 - X_8|) * S_{59})$$

where R represents the function of rounding the value to the nearest grid point, X_9' is the adjusted value of X_9 and S_{59} is the scale factor between the segments at locations identified by X_5 and X_9. The scale factor functions to proportionality adjust the distances between adjusted main street strokes thereby maintaining the relative distances between main street strokes and non-main street strokes and master coordinates and main street strokes. Thus, the scale factor for the present adjustment calculation is equal to:

$$S_{59} = \frac{(X_9' - X_5')}{(X_9 - X_5)} * S$$

Wherein X_5 and X_5' are respectively the value and adjusted value of the location of the closest X main street stroke side on the one side of the segment to be adjusted, X_9 and X_9' are respectively the value and adjusted value of the location of the V is the closest X main street stroke side on the other side of segment to be adjusted and S is the scale of the typeface.

Sec. 77 PATENT OFFICE

Once the coordinates of the first segment of the stroke, in the present example X_8, are adjusted, the coordinates of the other segment of the stroke, X_7, are simply adjusted according to thickness of the stroke which was globally adjusted.. Thus, in the present example, X_7 is equal to the adjusted value of X_8 minus the adjusted thickness of the stroke.

Referring again to Fig. 12, block 430, after the non-X main street strokes are adjusted, the master coordinates of master segments which did not form strokes and the master coordinates which did not form master segments are adjusted. Each X master coordinate is aligned with the closest segment of an X main street stroke and the distance is rounded to the nearest grid position. The segment of an X main street stroke which is closest to the master coordinate is first determined. Referring to Fig. 13a master coordinate X_6 is closest to the segment at location X_5 of main street stroke X_4-X_5. Thus, adjusted value of X_6 is equal to:

$$X_6' = X_5' + R((X_6-X_5)S_{59})$$

Where X_5' is the adjusted value of X_5. The scale factor S_{59} is again used because X_6 is located between the segments at locations X_5 and X_9 of strokes X_4-X_5 and X_9-X_{10}

At block 435, Fig. 12, after all the master coordinates have been adjusted, the slave coordinates (i.e., those frame coordinates that are not X master coordinates) are adjusted. The slave coordinates are proportionately adjusted relative to the two adjacent master coordinates with respect to the frame. For example, referring to Fig. 13b, slave coordinate X_1 is adjusted relative to master coordinates X_0 and X_2 which are closest or adjacent to the slave coordinate X_1 respectively in the clockwise and counter clockwise

direction along the frame. The adjusted value of the slave coordinate X_1 is equal to:

$$X_1' = X_0' + f * (X_2' - X_0')$$

$$f = \frac{X_1 - X_0}{X_2 - X_0}$$

Where X_0', X_2' are the adjusted values of master coordinates X_0 and X_2.

The vertical adjustment process is performed on the frame of the character to adjust the Y coordinate values of the frame points. In the vertical adjustment process the upper and lower vertical extremes of each character (that is the tops and bottoms of character) with respect to the entire typeface is considered to be an important visual feature. Therefore it is desirable to maintain the height of each character and the vertical relationships among the characters in the typeface. It has been found that, in general, the tops and bottoms of the characters are visually in alignment with tops and bottoms of other characters of the typeface. For example, the top of most upper case characters are located in the same region. Similarly, the tops of most of the lower case characters are located in the same region. It has also been found that in many cases the local extremes of characters typically align with the extremes of other characters of the typeface. This is illustrated in Fig. 14. The top of the circular portion 600 of the lower case "b" is a local extreme for that portion of the character. The top extreme of the character "b" is at the top of the long vertical portion 605. It can also be seen that the top local extreme 600 in the character "b" is somewhat in vertical alignment with the top extreme of the lower case character "o" 615.

The vertical adjustment process of the present invention utilizes the above observations with respect to the vertical alignment of the characters in the typeface. The top and bottom extremes of the character are evaluated

separately. Therefore any adjustments performed are performed relative to "like" data; e.g. a top segment of a character is adjusted relative only to the top extremes of other characters in the typeface and a bottom segment of a character is adjusted relative only to the bottom extremes of other characters in the typeface. Wherever possible a Y segment is adjusted using the Y alignment process described below which aligns the segment with the Y regions defined by the extremes of the characters of the typeface.

Referring to Fig. 15, at block 650, the characters in the typeface are evaluated to determine the Y coordinate regions or "clusters" where the upper vertical extreme (i.e. top extreme) of all the characters in the typeface lie. The top clusters are determined by examining the Y coordinate values where the top extremes of the characters occur and calculating the distance between the Y coordinate values. A cluster is a set of consecutive Y coordinate values wherein no two consecutive Y coordinate values are more than a predetermined distance apart. Thus if a Y coordinate value of a top extreme is more than the predetermined distance apart from any other top extreme, a cluster comprising one top extreme is formed at that Y coordinate value. The predetermined distance indicative of a cluster should be large enough to cause the majority top extremes in a certain region reflecting, for example, the top of upper case characters to be part of a single cluster. Preferably the predetermined distance may be within range of value within the range of .005 to .01 of the sum of the ascender height and descender height of the typeface. Most coordinates representing the top extremes of the characters lie within a small quantity of clusters.

At block 652, some of the top clusters are then identified as important top clusters. The important clusters are subsequently utilized as the reference points for adjusting the vertical coordinates of the characters. A top cluster is an important top cluster if: (1) it is the extreme top cluster of all the clusters or (2) the number of top extremes which comprise the cluster is greater

than or equal to a predetermined percentage of the total number of top extremes which identify the tops of the characters and contain a predetermined minimum percentage of the number of top extremes found in the largest or most important top cluster. Preferably an important cluster must contain 10 to 20 % of the total number of top extremes and at least 20 to 30 % of the number of top extremes in the largest top cluster.

At blocks 655 and 657, the lower vertical extremes (bottom extremes) of the characters of typeface are evaluated to determine the bottom clusters and the important bottom clusters. The clusters are determined using the same process that was used to determine the top clusters. A bottom cluster is a set of consecutive Y coordinate values of bottom extremes wherein no two consecutive Y coordinate values are more than a predetermined distance apart. The predetermined distance used to determine if two bottom extremes are part of the same cluster is preferably a value within the range of .005 to .01 of the sum of the ascender height and descender height. Following the above guidelines for forming clusters, most Y coordinates values corresponding to the bottom extremes of characters lie within a small number of clusters.

At block 657, the important bottom clusters are determined. A bottom cluster is an important bottom cluster if: (1) it is the extreme bottom cluster of all the clusters or (2) the number of bottom extremes which comprise the cluster is greater than or equal to a predetermined percentage of the total number of the bottom extremes and the cluster contains a predetermined minimum percentage of the number of bottom extremes found in the largest or most important bottom cluster. Preferably an important cluster contains 10 to 20 % of the total number of bottom extremes and at least 20 to 30 % of the number of bottom extremes in the largest bottom cluster.

Once the important top and important bottom clusters are formed, the Y master segments can be analyzed to determine if the Y coordinates of the

the master segments can be adjusted using the Y alignment adjustment process. In order for a Y master segment to be adjusted using the Y alignment process, the segment must: (1) be black convex and lie within an important cluster of the same type or (2) be the top extreme segment or bottom extreme segment of the character.

A segment is black convex if it is a top extreme or local top extreme and the segment has an "out" color direction or if the segment is a bottom extreme or local bottom extreme and has an "in" color. An example of a segment which is black convex is the top extreme of the character "O". The alignment of black convex segments is a distinctive visual feature of the characters that is desirable to preserve.

The black convex segment must also be within a cluster of the same type. Thus bottom segment must lie within an important bottom cluster and a top segment must lie within an important top cluster. A segment is a top segment if it has an "out" color. Similarly, a segment is a bottom segment if the segment has an "in" color.

The Y alignment adjustment process performs a relative adjustment of the Y coordinates to preserve the visual differences in horizontal alignment among the characters in the typeface, for example the height of characters, when such a difference can be accurately expressed using the available resolution of the display device, and to eliminate the differences when the resolution becomes too coarse. The process takes into account the fact that most extremes and local extremes of the same type vertically align into the same regions.

Referring to the flow chart of Fig. 16, the Y alignment process will herein be described. At block 700, the important Y coordinate value YIMPT of the important cluster

COMMONWEALTH PATENT OFFICE Sec. 77

the segment lies within is determined. YIMPT is equal to the extreme top coordinate value, if the cluster is a top cluster, or the extreme bottom coordinate value of the cluster, if the cluster is a bottom cluster. At block 705, YIMPT is rounded to the nearest grid position to produce YIMPT'. At block 710, the distance "d" between the segment in the important cluster and YIMPT' is determined. At block 715, the limited divergence process is used to adjust the distance "d". The values of all the distances "d" between the segments to be Y aligned and the corresponding YIMPT' values are input to the limited divergence process in order that the visual relationships among the Y segments are maintained after adjustment. At block 720, the adjusted Y coordinate value of the segment is computed. If the segment is a top segment the adjusted Y coordinate value is equal to YIMPT'-d'. If the segment is a bottom segment, the adjusted Y coordinate value is equal to YIMPT'+d'.

Fig. 18 and the flow charge of Fig. 17 will now be referenced to illustrate vertical adjustment process. Clusters Y_0-Y_1 and Y_3-Y_5 are bottom important clusters and clusters Y_8-Y_9, Y_{12}-Y_{14} and Y_{17}-Y_{18} are top important clusters. Assume, for the purposes of illustration, the top segment of each stroke has an "out" color and the bottom segment of each stroke has an "in" color. Strokes Y_2-Y_4, Y_6-Y_7, Y_{11}-Y_{13} and Y_{15}-Y_{16} contain segments which are black convex and Y_2-Y_4, Y_6-Y_7, Y_{11}-Y_{13}, and Y_{15}-Y_{16} are strokes on Y main street.

At block 665, the thicknesses of the Y strokes are globally adjusted using the limited divergence process. Preferably the Y strokes are globally adjusted relative to the X and Y strokes of the typeface. At block 667, the values of "d" the distance between a segment to be adjusted using the Y alignment process and the YIMPT' of the cluster the segment lies within, are globally adjusted using the limited divergence process. The top and bottom extremes are

COMMONWEALTH OF PENNSYLVANIA Sec. 77 PATENT OFFICE

an important visual element of each character, therefore, at block 669 the segments which are the top and bottom extremes of the character are adjusted using the Y alignment process. If the Y segments are part of a stroke, the other segment of the stroke is adjusted according to the adjusted thickness of the stroke. For example, referring to Fig. 18, the bottom extreme segment, Y_2, is

COMMONWEALTH PATENT OFFICE Sec. 77

adjusted to cluster Y_0-Y_1 using the Y alignment process. The other segment Y_4 of the stroke is adjusted according to the adjusted thickness of the stroke. Similarly the top extreme segment Y_{16} of stroke Y_{15}-Y_{16} is adjusted to cluster Y_{17}-Y_{18} using the Y alignment process and the segment Y15 is adjusted according to the adjusted thickness of the stroke. Once the Y coordinates of the top and bottom extremes are adjusted, the Y main street is adjusted.

At block 670, the segments of Y main street strokes which are black convex and within an important cluster of the same type are adjusted using the Y alignment process.

At block 675, if a segment of a stroke was adjusted by Y alignment, the other segment which forms the stroke is adjusted according to the adjusted thickness of the stroke. Thus, if the adjusted side is below the other side of the stroke, the other side of the stroke is adjusted by adding the adjusted thickness of the stroke to the adjusted Y coordinate value of the Y aligned stroke. Similarly if the adjusted side is above the other side of the stroke, the stroke is adjusted by subtracting adjusted thickness of the stroke from the adjusted coordinate value of the aligned stroke.

In the example illustrated in Fig. 18, segment Y_{13} of Y main street stroke Y_{11}-Y_{13} is black convex and within important cluster of the same type Y_{12}-Y_{14}. Therefore the Y frame coordinate of the segment Y_{13} is adjusted using the Y alignment adjustment process. The other segment which forms the stroke, Y_{11}, is adjusted according to the adjusted thickness of the stroke.

The remaining Y main street strokes are adjusted using the Y white space. Therefore the Y white space needs to be adjusted. At block 680, those white spaces between the adjusted Y main street strokes and unadjusted main street strokes are adjusted. The Y white space is first scaled by multiplying the white space by the white scale factor which is equal to:

$$\frac{Ydist - Stroke'}{White}$$

Where Ydist is the original total Y distance from the bottom to the top of the character, Stroke' is the total thickness of the adjusted strokes and White is the total original Y White space.

The scaled Y white space is then adjusted locally, using the limited divergence process described earlier in this document. However, it is necessary to scale only the Y white space to be used in order to adjust the strokes. If N number of strokes are contained between two fixed positions, then N+1 white spaces bound the sides of the strokes and only N white spaces are needed to position the strokes. All the Y white spaces but the larges Y white space are adjusted because the largest Y space is visually the least sensitive to a change in dimension. By default, the largest white space will then be equal to the difference of the total Y distance and the sum of the adjusted stroke thicknesses and Y white space.

At block 685, the strokes on Y main street which could not be adjusted by Y alignment are adjusted relative to the adjusted strokes and Y white space, using the relative adjustment process described earlier in this document. Thus, in the example shown in Fig. 18, Y main street stroke Y_6-Y_7 is adjusted. First it is determined that segment which forms the stroke, Y_6 or Y_7, is closest to an adjusted main street stroke. In this example, the distance between Y_{11} and Y_7 is compared to the distance between Y_6 and Y_4. Because the distance between Y_6 and Y_4 is less than the distance than between Y_7 and Y_{11} the stroke side Y_6 will be aligned relative to stroke side Y_4 using the following calculation:

$$Y_6' = Y_4' + R((Y_6 - Y_4) * S411)$$

COMMONWEALTH PATENT OFFICE Sec. 77

where Y_4' is the adjusted value of segment Y_4 and S_{411} is the scale between main street segments Y_4 and Y_{11}. The other side of stroke Y_7, is adjusted by adding the adjusted thickness of the stroke to the adjusted value of Y_6.

Once all the strokes on Y main street are adjusted, the segments of the strokes which did not make it on Y main street are adjusted. Referring back to Fig. 17b, block 690, the segments of strokes not on Y main street, which are black convex and within an important cluster of the same type, are adjusted using the Y alignment adjustment process. Similarly, at block 691, the segments which form the other sides of the strokes are adjusted according to the adjusted thickness of each stroke.

At block 693, the remaining non-Y main street strokes are adjusted relative to the adjusted Y main street strokes using the relative adjustment process.

Once all the strokes have been computed, at block 695, the Y master coordinates of Y master segments which did not form strokes are adjusted. If the Y master segment is black convex and within an important cluster of the same type, the segment is adjusted using the Y alignment adjusted process. Otherwise the Y master coordinate of the segment is adjusted relative to the adjusted Y main street strokes using the relative adjustment process. For example, master coordinate Y_{10} in Fig. 18 would be adjusted relative to Y_{11}, the closest Y main street side using the following equation:

$$Y_{10}'=Y_{11}' - R((Y_{11} - Y_{10}) * S_{711})$$

Where Y_{11}' is the adjusted value of Y_{11}, R is a round-off function which rounds the value to the nearest grid position and S_{711} is the scale between Y main street strokes sides 7 and 11, the two closest segments to Y_{11}.

At block 697, any remaining Y master coordinates are adjusted relative to the adjusted Y main street strokes using the relative adjustment process.

At block 699, the Y slave coordinates are adjusted. The Y slave coordinates are adjusted relative to the two master coordinates, which are adjacent to the slave coordinate with respect to the frame. The slave coordinates are adjusted in the same manner as the X slave coordinates using the process described with respect to Fig. 13b.

At this point in the process the adjustment of frame coordinates in the horizontal and vertical direction have been described. However, there are important visual features which are not oriented in the vertical or horizontal direction which should be preserved in order to minimize degradation of the character. For example, it is desirable to maintain the relative thicknesses of diagonal strokes such as the diagonal strokes in the letter "N" or the letter "W". In order to insure that these important visual features are preserved, the frame coordinates of the characters which form diagonal strokes are also adjusted.

Referring to Fig. 19, at block 750, the diagonal lines are ordered according to slope. A diagonal line is any line which is not a horizontal or almost horizontal line or a vertical or almost vertical line. At block 755, groups are formed of diagonals which are relatively close in angle. The size of the range of the group should not be too big that it encompasses a large number of diagonal segments, but the range should not be so small but that the groups only include those segments that are parallel. Preferably the diagonal lines are grouped in ranges which vary from 10 to 20 degrees. Most preferably the lines are grouped together in 10 degree ranges.

At block 760, the diagonal lines are rotated so that they appear as vertical lines. To rotate the lines, the angles in each group are averaged and each diagonal line in the group is rotated by the complement of the average angle of the group. The rotation of the diagonal segments result in vertical or almost vertical segments, from which the diagonal strokes can simply be determined.

At block 775, the rotated diagonal segments are analyzed to determine if the segments form diagonal strokes. The requirements for forming the strokes are the same requirements for forming X strokes discussed earlier; thus a stroke is found where two opposing segments, the first segment having an "in" color and the second segment having an "out" color, vertically overlap for a distance sufficient for the visual definition of the stroke.

Once the diagonal strokes have been determined, at block 780 the thicknesses of the diagonal strokes are adjusted. This is performed using a process herein referred to as "empathy adjustment". In the empathy adjustment process, the thickness of the diagonal stroke is compared to the stroke thicknesses of the X and Y strokes to find a vertical or horizontal stroke thickness that is close to or equal to the diagonal stroke thickness. If a vertical or horizontal stroke thickness is equal to the diagonal stroke thickness, the adjusted thickness of the diagonal stroke is equal to the adjusted thickness of that horizontal or vertical stroke. If the diagonal stroke thickness is not equal to a horizontal or vertical stroke thickness, the two closest thickness values, the closest thickness value greater than the diagonal stroke thickness and the closest thickness value less than the diagonal stroke thickness, are used to compute the adjusted thickness of the diagonal stroke according to the following equation:

$$TD' = TL'+(TR'-TL')*t$$

$$t=\frac{(TD-TL)}{(TR-TL)}$$

Where TD is the thickness of the diagonal stroke, TL is the closest stroke thickness less than TD, TR is the closest stroke thickness greater than TD, and TD', TL', TR' respectively are the adjusted thicknesses of TD, TL and TR.

The frame points are adjusted by displacing each segment of the diagonal stroke by one-half of the amount the stroke is adjusted, 1/2 (TD'-TD). However, the diagonal stroke cannot be modified by simply displacing the segments by 1/2 (TD'-TD). The end points of the diagonal stroke must be adjusted in such a manner that the thicknesses of the adjusted adjacent strokes are maintained. In order to preserve the thicknesses of the adjacent strokes, the frame points at the intersection of the adjacent stroke and the diagonal stroke are displaced along a segment of the adjacent stroke. This is illustrated in Fig. 20. For purposes of illustration, the letter N is broken down into 3 strokes, X strokes 810, 812 and diagonal stroke 814. Using the empathy adjustment process, the thickness of diagonal stroke 812 is to be increased by an amount W. Therefore segments 816 and 818 are each displaced by the amount W/2 to locations shown as 820 and 822. To maintain the thickness of strokes 810, frame point 824 is adjusted to point 826 and frame point 830 is adjusted to point 832. Similarly, to preserve the thickness of stroke 812, frame point 834 is adjusted to point 836 and frame point 838 is adjusted to 840.

Each frame point is adjusted individually. The type of frame point adjustments performed can be broken down into 4 cases. Case 1 is the adjustment of a frame point which is preceded by a segment to be adjusted and followed by segment that is not to be adjusted. In other words, the frame point connects a first segment that is to be adjusted to a second segment that is not to be adjusted. Case 2 is the adjustment of a point preceded by a segment that is not to be adjusted and followed by a segment that is to be adjusted. Case 3 is

the adjustment of a point between segments that are both to be adjusted, but adjusted by different amounts. Case 4 is the adjustment of a point between segments which are both to be adjusted by the same amount.

The geometry of the first case is illustrated in Fig. 21a. Line 850 represents the segments of a diagonal stroke to be adjusted. Line segment 855 is the adjacent segment which is not to be adjusted. The frame point of the stroke which requires adjustment is identified at 860. In the present example, line 850 is to be moved a distance d to adjust the diagonal stroke. Therefore frame point 860 must be moved along segment 855 to point 870. By adjusting frame point 860 to 870 the thickness and orientation of the stroke formed by segment 855 are preserved.

The adjusted control point 870 is determined according to the following process. From the frame points we can determine the angles $\alpha 1$ and $\alpha 2$. Using the known values $\alpha 1, \alpha 2$ and the distance d, the new point 870 can be calculated using trigonometric functions. The length of the hypotenuse 875 of the triangle formed by the vertices frame point 860, new frame point 870 and point 880 is calculated according to the equation:

$$\Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

Once ΔH 875 is calculated, the ΔX and ΔY, which must be added to the coordinates of frame point 860 to determine the adjusted coordinate 870, are calculated according to the following equations:

$$\Delta X = \Delta H * \cos(\alpha 2)$$

$$\Delta Y = \Delta H * \sin(\alpha 2)$$

Case 2, which is the case illustrated in Fig 21b, is the adjustment of a point preceded by a segment that is not to be adjusted and a segment to be adjusted. Segment 900 identifies the diagonal segment that is to be adjusted a

distance d. The adjacent segment 905 is not to be adjusted. In the present example we again know from the frame points the angles $\alpha 1$ and $\alpha 2$. Using that information we can calculate ΔH which is equal to:

$$\Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

ΔX and ΔY, which are added to coordinate point 910 to result in adjusted point 915, are calculated using the following equations:

$$\Delta X = - \Delta H * \cos(\alpha 1)$$

$$\Delta Y = - \Delta H * \sin(\alpha 1)$$

Fig. 21c illustrates case 3, the adjustment of a point between two segments that are both to be adjusted, but adjusted by different amounts. Referring to Fig. 21c, frame point 925 is to be adjusted to point 930 in order to adjust segment 935 a distance d0 and to adjust segment 940 a distance d1. In order to calculate the adjusted coordinate 930 two sets of calculations are performed. ΔX_1 and ΔY_1 are first calculated to determine theoretical adjusted point 945 where the frame point 925 is a case 1 segment, that is, a frame point preceded by line 940 to be adjusted, a distance d1, followed by a line not to be adjusted, line 935. ΔX_2 and ΔY_2 are calculated to determine a second theoretical adjusted point 950 wherein the frame point 925 is a case 2 calculation, that is, a frame point is preceded by a line 940 not to be adjusted followed by a line 935 to be adjusted a distance d0. The points 925, 950, 945 and 930 form a parallelogram; therefore the adjusted point 930 is equal to:

$$X' = X + \Delta X_1 + \Delta X_2$$

$$Y' = Y + \Delta Y_1 + \Delta Y_2$$

Case 4 is a point preceded and succeeded by lines in which both lines are adjusted by the same amount. Referring to Fig. 21d control point 970 is preceded by line 975 and followed by line 980. Both line 975 and line 980

are displaced a distance d. Therefore, control point 970 must be adjusted by an amount ΔX and ΔY to result in adjusted point 985. This is achieved using the following equation:

$$\Delta X = \frac{d * \cos(\alpha 1)}{\sin(\alpha 2 - \alpha 1)}$$

Where TD is the thickness of the diagonal stroke and TD' is the adjusted thickness of the diagonal stroke and $\alpha 1$ and $\alpha 2$ are determined from the frame of the character.

ΔY is similarly determined by the following equation:

$$\Delta Y = \frac{d * \sin(\alpha 1)}{\sin(\alpha 2 - \alpha 1)}$$

Once the diagonal adjustment process is complete the frame points representing each of the characters are adjusted and the control points for each character are adjusted according to adjusted frame points using the linear transformations described earlier in this document.

The invention has been described in conjunction with the preferred embodiment. Numerous alternatives, modifications, variations and uses will be apparent to those skilled in the art in light of the foregoing description. For example, the horizontal, vertical and diagonal adjustment processes may be used independently, in conjunction with one another or in conjunction with other adjustment processes. Similarly, the process of analyzing the character and determining the important visual components may be used with other adjustment processes not described herein. In addition, the processes or portions of processes that do not require the input of the scale can be executed independently of those processes that require input of the scale. For example, the process of analyzing the characters of the typeface to determine the important visual components may be a separate process which is

COMMONWEALTH PATENT OFFICE Sec. 77

executed once for any typeface. The output data generated may be stored in a intermediate data format and retrieved whenever necessary to generate the typeface. This decreases the amount of computation time required because the analysis process is executed only once for any given typeface. The output of the analysis process may then be used in conjunction with the horizontal, vertical and diagonal adjustment processes to generate the adjusted typeface for a given scale. If the typeface is to be adjusted to another scale, the same output from the analysis process may be retrieved and used again with the horizontal, vertical and diagonal adjustment processes to generate an adjusted typeface for that scale.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method for minimising the visual degradation of digital typefaces in a computer system wherein typefaces are displayed and generated for a particular scale and each character of a typeface is described in a format using control points comprising X–Y coordinate pairs, said method comprising the steps of:

forming a frame for each character from said control points, said frame represented by a plurality of frame points comprising X–Y coordinate pairs;

determining vertical strokes which comprise each character, said strokes formed by a plurality of frame points and identified as X strokes;

determining horizontal strokes which comprise each character, said horizontal strokes formed by a plurality of frame points and identified as Y strokes;

adjusting the X coordinates of the frame points for each character of the typeface representative of X strokes, said X strokes being oriented in the vertical direction and prioritised in order of visual importance to the character, said strokes being adjusted according to priority wherein the amount of adjustment of the lower priority strokes is dependent upon the higher priority strokes, said adjustment regularising the thicknesses of the X strokes and preserving the width of each character;

adjusting the X coordinates of the frame points which do not form a stroke, said adjustment dependent on preserving the width of the character and the thicknesses of adjusted X strokes;

adjusting the Y coordinates of the frame points for each character of the typeface representative of Y strokes, said Y strokes being oriented in the horizontal direction and prioritised in order of visual importance to the character, said strokes being adjusted according to the priority wherein the amount of adjustment of the lower priority strokes is dependent upon the thicknesses of the higher priority strokes, said adjustment

AUSTRALIAN PATENT OFFICE

preserving the heights of the characters of the typeface and the horizontal alignment of the Y strokes; and

adjusting the Y coordinates of the frame points which do not form a stroke, said adjustment dependent on preserving the height of the character and the thicknesses and the horizontal alignment of the adjusted strokes;

whereby the important visual features of the characters of the typeface are maintained thereby minimizing the visual degradation of the typeface.

2. The method according to claim 1 further comprising:

determining diagonal strokes comprising each character which are oriented in the diagonal direction, said strokes formed by a plurality of frame points;

adjusting the frame points of each character of the typeface representative of the diagonal strokes, said adjustment dependent on preserving the adjusted thicknesses and locations of the adjusted X and Y strokes.

3. A method of analyzing the characters of a typeface and determining the important visual components, wherein the contour of each character of the typeface is described in a format using control points comprising X-Y coordinate pairs, said character contours having a specified direction dependent upon the contour convention applied, said method comprising:

in a computer system typefaces are displayed

forming a frame for each character from said control points, each frame being a simplified visual representation of a corresponding character, said frames being represented by a plurality of frame points comprising X-Y coordinate pairs;

identifying certain X coordinates of the frame points as X master coordinates if the frame point is an extreme in the horizontal direction or if the frame point is an end point of a line segment which is a vertical or almost vertical side of the frame;

forming X master segments,said master segments approximating a portion of the character frame, said master segments defined as a vertical line segment which extends in a up and down direction away from an X master coordinate for a distance such that each end point of the line segment is a predetermined horizontal distance away from the frame,;

identifying the direction of each of the X master segments, the direction of the master segments corresponding to the direction of the frame the segment approximates, the direction of the frame dictated by the contour convention applied;

identifying said X master segments as having an "in" color if the segment is identified as being oriented in the upward direction;

identifying said X master segments as having an "out" color if the segment is identified as being oriented in the downward direction;

identifying certain pairs of X master segments as X strokes if two adjacent segments vertically overlap and the left segment is colored "in" and the right segment is colored "out", said segments

AUSTRALIAN PATENT OFFICE LS

vertically overlapping for a distance such that the ratio of the length of vertical overlap and the distance between the segments is greater than or equal to a predetermined amount indicative of the visual recognition of a stroke;

identifying certain Y coordinates of the frame points as Y master coordinates if the frame point is an extreme in the vertical direction or if the frame point is an end point of a line segment which is a horizontal or almost horizontal side of the frame;

forming Y master segments,said Y master segments approximating a portion of the character frame, said master segments defined as a horizontal line segment which extends in a right and left direction away from a Y master coordinate until each end point of the line segment is a predetermined vertical distance away from the frame;

identifying the direction of the Y master segments, the direction of the master segments corresponding to the direction of the frame the segment approximates, the direction of the frame dictated by the contour convention applied;

identifying said Y master segments as having an "in" color if the segment is identified as being in the leftward direction;

identifying said Y master segments as having an "out" color if the segment is identified as being in the rightward direction; and

identifying certain pairs of Y master segments as Y strokes if two adjacent segments horizontally overlap and the upper segment is colored "in" and the lower segment is colored "out", said segments horizontally overlapping for a distance such that the ratio of the length of overlap and the distance between the segments is greater than or equal to a predetermined amount indicative of the visual recognition of a stroke.

COMMONWEALTH PATENT OFFICE Sec. 77

4. A method of adjusting in the horizontal direction at least one character of a digital typeface in a computer system wherein typefaces are displayed and each character is defined by a plurality of frame points which form the frame of the character; said character further described by a plurality of X strokes indicative of important visual elements with respect to the X coordinates of the frame, said strokes defined by the frame points of the character wherein the frame points are represented by X-Y coordinate pairs and a typeface is generated for a particular scale, said method comprising the steps of:

identifying the X strokes as strong X strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than or equal to a predetermined amount indicative of a strong stroke;

constructing an X main street comprising non-horizontally overlapping strong X strokes, prioritised in order of length, said X main street indicative of high priority visual components of a character;

globally adjusting the thicknesses of the X strokes of the typeface relative to all strokes of the typeface thereby regularising the thicknesses of the X strokes;

adjusting in the horizontal direction X white space which occurs between X strokes on main street, said white space being proportionately scaled and adjusted in order to preserve the total width of the character;

adjusting the coordinates of the X main street strokes such that the location of the strokes relative to one another is determined according to the adjusted white space between strokes; and

adjusting the X coordinates of the frame points of the X strokes not on X main street wherein the amount of adjustment of the X coordinates is dependent upon the higher priority adjusted X strokes and the X white space between the X main street strokes;

wherein the width of the character and the symmetries and spatial relationships among the strokes of the characters of the typeface are preserved.

5. A method of adjusting in the vertical direction at least one character of a digital typeface in a computer system wherein typefaces are displayed and each

AUSTRALIAN PATENT OFFICE LS

character is defined by a plurality of frame points which form the frame of the character, said character further described by a plurality of Y strokes indicative of strong visual elements with respect to the Y coordinates of the frame, said strokes formed by two Y segments, said strokes defined by the frame points of the character wherein the frame points are represented by X-Y coordinate pairs and a typeface is generated for a particular scale, said method comprising the steps of:

globally adjusting the thicknesses of the Y strokes of the typeface relative to the strokes of the typeface thereby regularising the thicknesses of the Y strokes;

identifying the Y strokes as strong Y strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than a predetermined amount indicative of a strong stroke;

constructing a Y main street comprising non-vertically overlapping strong Y strokes, prioritised or order of length, said Y main street indicative of high priority visual components of a character;

forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top extremes of characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters being dependent on the number of extremes which comprise each cluster;

identifying those Y main street strokes which comprise

AUSTRALIAN PATENT OFFICE LS

at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinates of the segments of Y main street strokes which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y main street stroke is adjusted by a Y alignment process, adjusting the Y coordinate of the other segment according to the thickness of the stroke;

adjusting the Y white space between Y main street strokes, said adjustment of Y white space dependent upon preserving the height of the character;

adjusting the Y coordinates of the Y main street strokes not adjusted according to a Y alignment process, said Y coordinates adjusted relative to the adjusted Y main street strokes;

identifying those Y strokes not on Y main street which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinates of the segment of Y strokes not on Y main street which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y stroke not on main street is adjusted by a Y alignment process, adjusting the Y coordinate of the other segment according to the thickness of the stroke;

adjusting the Y coordinates of the remaining unadjusted strokes relative to the adjusted Y main street strokes;

identifying those Y segments which did not form a stroke which are black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinate of a segment which is black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface; and

adjusting the Y coordinates of the remaining unadjusted segments relative to the adjusted Y main street strokes.

6. The method of adjusting set forth in claim 5 wherein the method of adjusting Y segments using a Y alignment process comprises:

determining the important Y coordinate, YIMPT, of the important cluster the segment is within, said YIMPT being the extreme top Y coordinate of the cluster if the cluster comprises top extremes and the extreme bottom Y coordinate of the cluster if the cluster comprises bottom extremes;

adjusting YIMPT to the nearest grid position;

adjusting the distance between YIMPT and the segment to be adjusted so that the distance is equal to an incremental value of the grid; and

adjusting the Y coordinate value of the segment to be equal to the sum of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is greater than or equal to YIMPT, and adjusting the Y coordinate value of the segment to be equal to the difference of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is less than YIMPT.

COMMONWEALTH PATENT OFFICE Sec. 77

7. A method of adjusting characters in a digital typeface by a Y alignment process in a computer system wherein typefaces are displayed and each character is defined by a plurality of frame points which form the frame of the character, said frame points forming horizontal segments, referred to as Y segments, at the Y coordinate values of the frame points, said Y segments indicative of visual components of the character and approximates portions of the frame, said segments having a direction according to the direction of the frame the segment approximates, said method comprising the steps of:

forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top extremes of characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters being dependent on the number of extremes which comprise each cluster;

identifying those Y segments which are black convex and within the Y coordinate limits of an important cluster of the same type, the type of segment being dependent on the direction of the segment; and

adjusting the Y coordinate of the segment which is black convex and within an important cluster of the same type, said method of adjustment comprising:

determining the important Y coordinate, YIMPT, of the important cluster the segment is within, said YIMPT being the extreme top Y coordinate of the cluster if the cluster comprises top extremes and the extreme bottom Y coordinate of the cluster if the cluster comprises bottom extremes;

adjusting YIMPT to the nearest grid position;

adjusting the distance between YIMPT and the segment to be

AUSTRALIAN PATENT OFFICE LS

adjusted so that the distance is equal to an incremental value of the grid; and

adjusting the Y coordinate value of the segment to be equal to the sum of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is greater than or equal to YIMPT, and adjusting the Y coordinate value of the segment to be equal to the difference of adjusted values of YIMPT and the distance if the Y coordinate value of the segment is less then YIMPT.

8. A method for enhancing the legibility of digital typefaces in a computer system wherein typefaces are displayed and the frame points which form the end points of diagonal segments of the character frame are modified, said process comprising the steps of:

ordering all diagonal segments by slope;

forming groups of diagonal segments which are relatively close in angle;

rotating each group of diagonal segments by the complement of the average slope of the group such that the diagonal segments are approximately vertical;

identifying certain pairs of diagonal master segments as diagonal strokes if the two segments oppose one another in direction and vertically overlap one another and the ratio of the length of vertical overlap and the distance between segments is greater than a predetermined amount indicative of the visual recognition of a stroke;

adjusting the thickness of the diagonal strokes according to the adjusted thicknesses of horizontal or vertical strokes which were the same or approximately the same thickness prior to adjustment;

adjusting the frame points of the diagonal strokes to correspond to the adjusted thickness of the diagonal stroke, wherein the thicknesses of adjacent strokes are preserved by displacing the frame points along the segments of the adjacent strokes.

AUSTRALIAN PATENT OFFICE LS

9. A method for scaling distances in a digital typeface at a given scale in a computer system wherein typefaces are displayed, comprising:

storing an "n" number of values to be scaled in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be scaled;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

scaling the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position;

determining the next value to be scaled from the index stored in the third array;

scaling the remaining values in order of priority said scaling process comprising:

determining the largest value which was scaled and is smaller than the current value to be scaled;

determining the smallest value which was scaled and is larger than the current value to be scaled;

if there is no value which is larger than the current value to be scaled, calculating the scaled current value according to the following equation:

$$A[m]+R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was scaled and is smaller than the current value to be scaled, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was scaled and is smaller than the current value to be scaled and S is the scale of the typeface; and

if there is a value which is larger than the current value to be scaled, calculating the scaled current value according to the following equation:

AUSTRALIAN PATENT OFFICE

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where A[m] is the adjusted value of the largest value which was scaled and is smaller than the current value to be scaled, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was scaled and is larger than the current value to be scaled, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was scaled and is smaller than the current value to be scaled, V[r] is the original value of the smallest value which was scaled and is larger than the current value to be scaled.

AUSTRALIAN PATENT OFFICE

10. A method for classifying the coordinates of control points into classes of master and slave coordinates in a computer system wherein typefaces are displayed and each character of a digital typeface of characters is described in a format using control points comprising X–Y coordinate pairs, said method comprising the steps of:

forming a frame for each character from said control points each frame being a simplified visual representation of a corresponding character, said frame represented by a plurality of frame points comprising X–Y coordinate pairs;

identifying certain X coordinates of the frame points as X master coordinates if the frame point is in the extreme in the horizontal direction

AUSTRALIAN PATENT OFFICE LS

or if the frame point is an end point of a line segment which is a vertical or almost vertical side of the frame;

identifying the non-master X coordinates as X slave coordinates;

whereby the master coordinates are adjusted to be located at integer grid positions and the slave coordinates are proportionately adjusted according to the adjusted master coordinates.

11. The method of claim 10 wherein said frame has a direction corresponding to the direction of the character and the step of forming a frame for each character further comprises the steps of:

constructing a polygon by connecting the control points of the character by the sequence they are ordered according to the direction of the frame;

assigning each control point a property retained (R) or non-retained (N) wherein the control points which correspond to the end points of arcs of the character are retained and the remaining control points are assigned the property non-retained;

simplifying the polygon by eliminating the control points which are not necessary to maintain the fundamental visual properties of the character said method of simplifying comprising the steps of:

in a sequence of polygon sides <R-N-N-R>, deleting the central side between the two non-retained points and extending the surrounding sides until they intersect on another at a new point which is labeled non-retained;

in a series of aligned points, eliminating the points between the two extreme points and if the sequence contains two or more retained points or if at least one of its points is an inflection point, the two extreme points are labeled retained;

in a sequence of points <R-N-N . . . N-R>, eliminating all sides lying between consecutive end points and extending the ends of the sides, bounded by R-N and N-R points, towards one another until they intersect at a new point which is labeled retained.

whereby the non-retained points are eliminated thereby simplifying the polygon into a series of retained points.

12. The method of claim 1 wherein the frame is formed in such a manner that there is a straight line segment for every horizontal tangent, vertical tangent, straight line segment, tangent of an inflection point and tangents at a slope discontinuity, said segments connected by straight segments.

13. The method of claim 12 wherein said frame has a direction corresponding to the direction of the character and the step of forming a frame for each character further comprises the steps of:

constructing a polygon by connecting the control points of the character by the sequence they are ordered according to the direction of the frame;

assigning each control point a property retained (R) or non-retained (N) wherein the control points which correspond to the end points of arcs of the character are retained and the remaining control points are assigned the property non-retained;

simplifying the polygon by eliminating the control points which are not necessary to maintain the fundamental visual properties of the character said method of simplifying comprising the steps of:

in a sequence of polygon sides <R-N-N-R>, deleting the central side between the two non-retained points and extending the surrounding sides until they intersect on another at a new point which is labeled non-retained;

in a series of aligned points, eliminating the points between the two extreme points and if the sequence contains two or more retained points or if at least one of its points is an inflection point, the two extreme points are labeled retained;

in a sequence of points <R-N-N . . . N-R>, eliminating all sides lying between consecutive end points and extending the ends of the sides, bounded by R-N and N-R points, towards one

another until they intersect at a new point which is labeled retained.

whereby the non-retained points are eliminated thereby simplifying the polygon into a series of retained points.

14. The method of claim 1 further comprising the step of calculating the adjusted control points from the adjusted frame points using the known geometries between the frame points and the control points.

15. The method of claim 13 further comprising the steps of calculating the adjusted control points from the adjusted frame points, said method comprising the steps of:

if control points of the sequence <U-M-N-V> form a sequence of sides <R-N-N-R> and during the process of forming the frame, control points M and N were eliminated and the sides U-M and V-N were extended to intersect at new frame point O,

calculating the adjusted value of control point M according the following equation:

$$M' = U' \cdot tm + O' \cdot (1-tm),\ tm = \frac{|\ M - O\ |}{|\ U - O\ |}$$

calculating the adjusted value of control point N according to the following equation:

$$N' = V' \cdot tn + O' \cdot (1-tn),\ tn = \frac{|\ N - O\ |}{|\ V - O\ |}$$

where M' is the adjusted value of M, O' is the adjusted value of O, U' is the adjusted value of U, N' is the adjusted value of N and V' is the adjusted value of V;

if control points of the sequence <U-M-V> form a sequence of aligned points and during the process of forming the frame, control point

COMMONWEALTH Rec. 77 PATENT OFFICE

M was eliminated, calculating control point M according to the following equation:

$$M' = V' \cdot tm + U' \cdot (1-tm),\ tm = \frac{|M-U|}{|V-U|}$$

where M' is the adjusted value of control point M, U' is the adjusted value of U and V' is the adjusted value of V;

if control points of the sequence <U-M-N-P-Q-V> form a sequence of sides <R-N-N-...-N-R> and during the process of forming the frame, control points M, N, P, Q were eliminated, and the sides U-M and V-Q were extended to intersect at frame point O, calculating control points M, N, P and Q according to the following equation:

$$\overline{CTRLPT}' = [CTRLPT'_X, CTRLPT'_Y] = [CTRLPT_U, CTRLPT_V] \cdot \begin{bmatrix} V'_X - O'_X & V'_Y - O'_Y \\ U'_X - O'_X & U'_Y - O'_Y \\ O'_X & O'_Y \end{bmatrix}$$

where CTRLPT' is the adjusted value of the control point to be calculated, $CTRLPT_U$ and $CTRLPT_V$ identify the location of the control point relative to the control points U and V, V'_x and V'_y are respectively the adjusted X and Y coordinate values of V, U'_x and U'_y are respectively the adjusted X and Y coordinates of a U and O'_x and O'y are respectively the adjusted X and Y coordinate values of O.

16. The method of claim 1 wherein the step of adjusting the X coordinates of the frame points representative of X strokes comprises the steps of:

identifying the X strokes as strong X strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than or equal to a predetermined amount indicative of a strong stroke;

constructing an X main street comprising non-horizontally overlapping strong X strokes, prioritized in order of length, said X main street indicative of high priority visual components of a character;

COMMONWEALTH PATENT OFFICE Sec. 77

globally adjusting the thicknesses of the X strokes of the typeface relative to all strokes of the typeface thereby regularizing the thicknesses of the X strokes;

adjusting in the horizontal direction X white space which occurs between X strokes on main street, said white space being proportionately scaled and adjusted in order to preserve the total width of the character;

adjusting the coordinates of the X main street strokes such that the location of the strokes relative to one another is determined according to the adjusted white space between strokes; and

adjusting the X coordinates of the frame points of the X strokes not on X main street wherein the amount of adjustment of the X coordinates is dependent upon the higher priority adjusted X strokes and the X white space between the X main street strokes.

17. The method of claim 16 wherein the step of globally adjusting the thicknesses of X strokes comprises:

storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjustment process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted , V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

18. The method of claim 16 wherein the predetermined amount indicative of a strong stroke is 1.5:1.

19. The method of claim 16 wherein the step of constructing an X main street further comprises if two strong strokes horizontally overlap, the longer stroke will be on X main street.

20. The method of claim 16 wherein the step of adjusting in the horizontal direction X white space which occurs between X main street strokes comprises the steps of:

calculating a X white space scale factor according to the difference of the total width of the character and the total adjusted stroke thicknesses of the strokes on X main street, divided by the total amount of X white space;

scaling the X white space by multiplying the X white space by the X white space scale factor;

proportionately adjusting the scaled X white space to preserve the symmetry of the size of the X white space contained within each character.

21. The method of claim 20 wherein the step of proportionally adjusting the scaled white space comprises the steps of:

storing an "n" number of adjusted white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionally determined according to the frequency a scaled white space value occurs;

setting the priority of the smallest value to the highest priority;

COMMONWEALTH PATENT OFFICE Sec. 77

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjusting process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was

COMMONWEALTH PATENT OFFICE Sec. 77

adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

22. The method of claim 16 wherein the step of adjusting the X coordinates of the frame points of the strokes not on X main street comprises aligning a side of each stroke with the closest main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

23. The method of claim 22 wherein the step of aligning a side of each stroke with the ciosest main street stroke side comprises:

determining the side of a stroke which is closest to a side of a stroke on X main street;

calculating the adjusted X coordinate of the side closest to a side of a stroke on X main street according to the following equation:

$$Xc' = Xmc' - R((|Xmc-Xc|)*Sm)$$

where Xc and Xc' are respectively the value and adjusted value of the side of the stroke closest to a side of an X main street stroke, Xmc and Xmc' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and Sm is the scale factor between the main street stroke sides closest to the right and to the left of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$Sm = \frac{(X_{Mc}' - X_{Mf}') * S}{(X_{Mc} - X_{Mf})}$$

where X_{Mf} and X_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

24. The method of claim 1 wherein the step of adjusting the X coordinates of the frame points which do not form a stroke comprises aligning each X

coordinate which the closest side of a main street stroke and rounding the coordinate value to the nearest grid position.

25. The method of claim 24 wherein the step of aligning the X coordinate with the closest main street stroke side comprises:

determining the X main street stroke side closest to the X coordinate to be aligned;

calculating the adjusted X coordinate according to the following equation:

$$X_{coord'} = X_{Mc'} - R((|X_{Mc}-X_{coord}|)*Sm)$$

where Xcoord and Xcoord' are respectively the value and adjusted value of the X coordinate, X_{Mc} and $X_{Mc'}$ are respectively the value and adjusted value of the side of the main street stroke the X coordinate is closest to, R represents the rounding of the value to the nearest grid point and Sm is the scale factor between the main street strokes sides closest to the right and to the left of the X coordinate to be adjusted, said scale factor being calculated according to the following equation:

$$Sm = \frac{(X_{Mc'} - X_{Mf'}) * S}{(X_{Mc} - X_{Mf})}$$

where X_{Mf} and $X_{Mf'}$ are respectively the value and adjusted value of the side of the main street stroke on the side of the X coordinate opposite the main street side closest to the X coordinate and S represents the scale of the typeface.

26. The method of claim 1 wherein the step of adjusting the Y coordinates of the frame points representative of Y strokes comprises:

globally adjusting the thicknesses of the Y strokes of the typeface relative to all the strokes of the typeface thereby regularizing the thicknesses of the Y strokes;

COMMONWEALTH PATENT OFFICE Seq. 77

identifying the Y strokes as strong Y strokes if the ratio of the length of the stroke to the thickness of the stroke is greater than a predetermined amount indicative of a strong stroke;

constructing an Y main street comprising non-vertically overlapping strong Y strokes, prioritized in order of length, said Y main street indicative of high priority visual components of a character;

forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top extremes of characters of the typeface wherein no two consecutive Y coordinate values are are more than a predetermined distance apart;

forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters being dependent on the number of extremes which comprise each cluster;

identifying those Y main street strokes which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinates of the segments of Y main street strokes which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y main street stroke is adjusted by a Y alignment process, adjusting the Y coordinate of the other segment according to the adjusted thickness of the stroke;

adjusting the Y white space between Y main street strokes, said adjustment of Y white space dependent upon preserving the height of the character;

COMMONWEALTH PATENT OFFICE Sec. 77

adjusting the Y coordinates of the Y main street strokes not adjusted according to a Y alignment process, said Y coordinates adjusted relative to the adjusted Y main street strokes;

identifying those Y strokes not on Y main street which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinates of the segments of Y strokes not on Y main street which are black convex and within an important cluster of the same type by the Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y stroke not on main street is adjusted by the Y alignment process, adjusting the Y coordinate of the other segment according to the adjusted thickness of the stroke;

adjusting the Y coordinates of the remaining unadjusted strokes relative to the adjusted Y main street strokes;

identifying those Y segments which do not form a stroke which are black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinate of a segment which is black convex and within an important cluster of the same type by the Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface; and

adjusting the Y coordinates of the remaining unadjusted segments relative to the adjusted Y main street strokes.

27. The method of claim 26 wherein the method of adjusting Y segments using a Y alignment process comprises:

determining an important Y coordinate, YIMPT, of the important cluster the segment is within, said YIMPT being the extreme top Y coordinate of the cluster if the cluster comprises top extremes or the

extreme bottom Y coordinate of the cluster if the cluster comprises bottom extremes;

adjusting YIMPT to the nearest grid position;

adjusting the distance between YIMPT and the segment to be adjusted so that the distance is equal to an incremental value of the grid; and

adjusting the Y coordinate value of the segment to be equal to the sum of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is greater than or equal to YIMPT, or adjusting the Y coordinate value of the segment to be equal to the difference of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is less than YIMPT.

28. The method of claim 26 wherein the predetermined amount indicative of a strong stroke is a ratio of the length of the stroke to the thickness of the stroke of 1:1.5.

29. The method of claim 26 wherein the step of constructing a Y main street further comprises if two strong strokes vertically overlap, the longer stroke will be on Y main street.

30. The method of claim 26 wherein the predetermined distance apart determinative of the formation of top extreme clusters and bottom extreme clusters is in the range of .005 to .01 of the sum of the ascender height and descender height of the typeface.

31. The method of claim 26 wherein the step of determining important top clusters and important bottom clusters further comprises determining a cluster to be an important top cluster if it is the extreme top cluster of all the top clusters.

32. The method of claim 26 wherein the step of determining important top clusters and important bottom clusters further comprises determining a cluster to

be an important bottom cluster if it is the extreme bottom cluster of all the bottom clusters.

33. The method of claim 26 wherein in the step of determining important top clusters and important bottom clusters, a top cluster is an important top cluster if the cluster contains 10-20% of the total number of top extremes and at least 20-30% of the number of top extremes in the largest top cluster.

34. The method of claim 26 wherein in the step of determining important top clusters and important bottom clusters, a bottom cluster is an important bottom cluster if the cluster contains 10-20% of the total number of bottom extremes and at least 20-30% of the number of bottom extremes in the largest top cluster.

35. The method of claim 26 wherein a segment is black convex if it is a top extreme or local top extreme and the segment has an "out" color direction or if the segment is a bottom extreme or local bottom extreme and has an "in" color direction.

36 The method of claim 35 wherein a segment is top segment if it has an "out "color and a segment is a bottom segment if it has an "in" color.

37. The method of claim 26 wherein the step of globally adjusting the thicknesses of the Y strokes comprises:

storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

setting the priority of the smallest value to the highest priority;

COMMONWEALTH PATENT OFFICE Sec. 77

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjustment process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which

COMMONWEALTH PATENT OFFICE Sec. 77

was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

38. The method of claim 26 wherein the step of adjusting in the vertical direction Y white space which occurs between Y main street strokes comprises the steps of:

calculating a Y white space scale factor according to the difference between the total height of the character and the total adjusted stroke thicknesses of the strokes on Y main street, divided by the total amount of Y white space;

scaling the Y white space by multiplying the Y white space by the Y white space scale factor;

proportionately adjusting the scaled Y white space to preserve the symmetry of the size of the Y white space contained within each character.

39. The method of claim 38 wherein the step of proportionately adjusting the scaled white space comprises the steps of:

storing an "n" number of scaled white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionately determined according to the frequency a scaled white space value occurs;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

77 PATENT OFFICE

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjusting process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

COMMONWEALTH PATENT OFFICE Sec. 77

40. The method of claim 26 wherein the step of adjusting the Y coordinates of the frame points of Y main street strokes not adjusted using the Y alignment process comprises aligning a side of each stroke with the closest adjusted main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

41. The method of claim 40 wherein the step of aligning a side of each stroke with the closest main street stroke side comprises:

determining the side of the stroke which is closest to a side of an adjusted stroke on Y main street;

calculating the adjusted Y coordinate of the side closest to a side of an adjusted stroke on Y main street according to the following equation:

$$Y_c' = Y_{Mc}' - R((|Y_{Mc}-Y_c|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an adjusted Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the adjusted main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the adjusted main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

42. The method of claim 26 wherein the step of adjusting the Y coordinates of the frame points of strokes not on Y main street not adjusted using the Y alignment process comprises aligning a side of each stroke with the closest

main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

43. The method of claim 42 wherein the step of aligning a side of each stroke with the closest main street stroke side comprises:

determining the side of the stroke which is closest to a side of a stroke on Y main street;

calculating the adjusted Y coordinate of the side closest to a side of a stroke on Y main street according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted coordinate value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

44. The method of claim 26 wherein the step of adjusting the Y coordinates of the remaining unadjusted Y segments comprises aligning the Y segment stroke with the closest main street stroke side.

45. The method of claim 44 wherein the step of aligning Y segments with the closest main street stroke side comprises:

COMMONWEALTH PATENT OFFICE 77

determining the side of a main street stroke the segment is closest to;

calculating the adjusted Y coordinate of the segment according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted Y coordinate value of the side of the Y segment, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the segment is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the segment to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the Y coordinate of the segment to be aligned and S represents the scale of the typeface.

46. The method of claim 27 further comprising the step of proportionately adjusting the distances between each YIMPT and the corresponding segment to be adjusted such that the visual relationships among the Y segments are maintained after adjustment.

47. The method of claim 46 wherein the step of proportionately adjusting further comprises the steps of:

storing an "n" number of values equal to the distances between YIMPTs and the corresponding segments to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

COMMONWEALTH PATENT OFFICE Sec. 77

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determined according to the frequency of occurrence of the distance values;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjustment process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

COMMONWEALTH PATENT OFFICE Sec. 77

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

48. The method of claim 26 wherein the step of adjusting the Y coordinates which do not form segments comprises aligning the Y coordinate with the closest main street stroke side.

49 The method of claim 48 wherein the step of aligning Y coordinates with the closest main street stroke side comprises:

determining the side of a main street stroke the coordinate is closest to;

calculating the adjusted Y coordinate according to the following equation:

$$Yc' = Ymc' - R((|Ymc-Yc|)*Sym)$$

where Yc and Yc' are respectively the value and adjusted value of the Y coordinate, Ymc and Ymc' are respectively the value and adjusted value of the side of the main street stroke the Y coordinate is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the coordinate to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

COMMONWEALTH PATENT OFFICE Sec. 77

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the coordinate to be aligned and S represents the scale of the typeface.

50. The method of claim 1 wherein the step of determining vertical strokes comprises the steps of:

identifying certain X coordinates of the frame points as X master coordinates if the frame point is an extreme in the horizontal direction or if the frame point is an end point of a line segment which is a vertical or almost vertical side of the frame and identifying X slave coordinates as those X coordinates int identified as X master coordinates;

forming X master segments,said master segments approximating a portion of the character frame, said master segments defined as a vertical line segment which extends in a up and down direction away from an X master coordinate for a distance such that each end point of the line segment is a predetermined horizontal distance away from the frame;

identifying the direction of each of the X master segments, the direction of the master segments corresponding to the direction of the frame the segment approximates, the direction of the frame dictated by the contour convention applied;

identifying said X master segments as having an "in" color if the segment is identified as being oriented in the upward direction;

identifying said X master segments as having an "out" color if the segment is identified as being oriented in the downward direction;

identifying certain pairs of X master segments as X strokes if two adjacent segments vertically overlap and the left segment is colored "in" and the right segment is colored "out", said segments vertically overlapping for a distance such that the ratio of the length of vertical overlap and the distance between the segments

is greater than or equal to a predetermined amount indicative of the visual recognition of a stroke;

51. The method of claim 50 wherein an almost vertical line is a line with a slope in the range of 1:5 to 1:20.

52. The method of claim 51 wherein the predetermined horizontal distance away from the frame that a master segment extends is approximately one-half the maximum pixel size used to generate the typeface.

53. The method of claim 52 wherein the predetermined horizontal distance is in the range of .01 to .02 of the distance defined by the sum of the ascender and descender heights of a typeface.

54. The method of claim 50 wherein the predetermined ratio indicative of a stroke is 1:1

55. the method of claim 50 further comprising the step of identifying the X strokes as strong X strokes if the ratio of the length of the stroke to the thickness of the stroke is greater than or equal to a predetermined amount and weak strokes if the ratio is less than a predetermined amount wherein a strong stroke has a higher priority than a weak stroke.

56. The method of claim 54 wherein the predetermined ratio is 1.5:1.

57. The method of claim 49 wherein the step of adjusting the X coordinates of the frame points representative of X strokes comprises the steps of:

identifying the X strokes as strong X strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than or equal to a predetermined amount indicative of a strong stroke;

constructing an X main street comprising non-horizontally overlapping strong X strokes, prioritized in order of length, said X

main street indicative of high priority visual components of a character;

globally adjusting the thicknesses of the X strokes of the typeface relative to all strokes of the typeface thereby regularizing the thicknesses of the X strokes;

adjusting in the horizontal direction X white space which occurs between X stokes on main street, said white space being proportionately scaled and adjusted in order to preserve the total width of the character;

adjusting the coordinates of the X main street strokes such that the location of the strokes relative to one another is determined according to the adjusted white space between strokes; and

adjusting the X coordinates of the frame points of the X strokes not on X main street wherein the amount of adjustment of the X coordinates is dependent upon the higher priority adjusted X strokes and the X white space between the X main street strokes.

58. The method of claim 57 wherein the step of globally adjusting the thicknesses of X strokes comprises:

storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

setting the priority of the smallest value to the highest priority;

COMMONWEALTH OF AUSTRALIA PATENT OFFICE

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjustment process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which

COMMONWEALTH PATENT OFFICE Sec. 77

was adjusted and is smaller than the current value to be adjusted , V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

59. The method of claim 57 wherein the predetermined amount indicative of a strong stroke is 1.5:1.

60. The method of claim 57 wherein the step of constructing an X main street further comprises if two strong strokes horizontally overlap, the longer stroke will be on X main street.

61. The method of claim 57 wherein the step of adjusting in the horizontal direction X white space which occurs between X main street strokes comprises the steps of:

calculating a X white space scale factor according to the difference of the total width of the character and the total adjusted stroke thicknesses of the strokes on X main street, divided by the total amount of X white space;

scaling the X white space by multiplying the X white space by the X white space scale factor;

proportionately adjusting the scaled X white space to preserve the symmetry of the size of the X white space contained within each character.

62. The method of claim 61 wherein the step of proportionately adjusting the scaled white space comprises the steps of:

storing an "n" number of adjusted white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionately

determined according to the frequency a scaled white space value occurs;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjusting process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which

COMMONWEALTH PATENT OFFICE Sec. 77

rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

63. The method of claim 61 wherein the step of adjusting the X coordinates of the frame points of the strokes not on X main street comprises aligning a side of each stroke with the closest main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

64. The method of claim 63 wherein the step of aligning a side of each stroke with the closest main street stroke side comprises:

determining the side of the stroke which is closest to a side of a stroke on X main street;

calculating the adjusted X coordinate of the side closest to a side of a stroke on X main street according to the following equation:

$$X_C' = X_{MC}' - R((|X_{MC}-X_C|)*S_m)$$

where Xc and Xc' are respectively the value and adjusted value of the side of the stroke closest to a side of an X main street stroke, X_{MC} and X_{MC}' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and Sm is the scale factor between the main street stroke sides closest to the right and to the left of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_m = \frac{(X_{MC}' - X_{Mf}') * S}{(X_{MC} - X_{Mf})}$$

where X_{Mf} and X_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

COMMONWEALTH PATENT OFFICE Sec. 77

65. The method of claim 49 wherein the X coordinates of the frame points which do not form a stroke comprise X master coordinates and X slave coordinates and the step of adjusting the X coordinates of the frame points which do not form a stroke further comprise aligning each X master coordinate which the closest side of a main street stroke and rounding the coordinate value to the nearest grid position.

66 The method of claim 64 wherein the step of aligning the X master coordinate with the closest main street stroke side comprises:

determining the X main street stroke side closest to the X master coordinate to be aligned;

calculating the adjusted X master coordinate according to the following equation:

$$X_{coord'} = X_{Mc'} - R((|X_{Mc}-X_{coord}|)*S_m)$$

where Xcoord and Xcoord' are respectively the value and adjusted value of the X master coordinate, X_{Mc} and $X_{Mc'}$ are respectively the value and adjusted value of the side of the main street stroke side the X master coordinate is closest to, R represents the rounding of the value to the nearest grid point and Sm is the scale factor between the main street strokes sides closest to the right and to the left of the X master coordinate to be adjusted, said scale factor being calculated according to the following equation:

$$Sm = \frac{(X_{Mc'}-X_{Mf'}) * S}{(X_{Mc} - X_{Mf})}$$

where X_{Mf} and $X_{Mf'}$ are respectively the value and adjusted value of the side of the main street stroke on the side of the X master coordinate opposite the main street side closest to the X master coordinate and S represents the scale of the typeface.

67.. The method of claim 49 further comprising the step of aligning the X slave coordinates said step comprising proportionately adjusting the X slave

coordinates relative to X master coordinates of the adjacent frame points along the frame.

68. The method of claim 66 wherein the step of aligning X slave coordinates further comprises calculating the adjusted value of the X coordinate according to the following equation:

$$X_1' = X_0' + f * (X_2' - X_0')$$

$$f = \frac{X_1 - X_0}{X_2 - X_0}$$

where X1 and X1' respectively are the value and adjusted value of the X slave coordinate to be adjusted, X0 and X0' are respectively the value and adjusted value of the X master coordinate of the frame point adjacent to the left of the X coordinate to be adjusted, X2 and X2' respectively are the value and adjusted value of the X master coordinate of the frame point adjacent to the right of the X slave coordinate to be adjusted.

69. The method of claim 1 wherein the step of determining horizontal strokes comprises the steps of :

identifying certain Y coordinates of the frame points as Y master coordinates if the frame point is an extreme in the vertical direction or if the frame point is an end point of a line segment which is a horizontal or almost horizontal side of the frame and identifying Y slave coordinates as those Y coordinates not identified as Y master coordinates;

forming Y master segments,said Y master segments approximating a portion of the character frame, said master segments defined as a horizontal line segment which extends in a right and left direction away from a Y master coordinate until each end point of the line segment is a predetermined vertical distance away from the frame;

identifying the direction of the Y master segments, the direction of the master segments corresponding to the direction of

COMMONWEALTH PATENT OFFICE Sec. 77

the frame the segment approximates, the direction of the frame dictated by the contour convention applied;

identifying said Y master segments as having an "in" color if the segment is identified as being in the leftward direction;

identifying said Y master segments as having an "out" color if the segment is identified as being in the rightward direction; and

identifying certain pairs of Y master segments as Y strokes if two adjacent segments horizontally overlap and the upper segment is colored "in" and the lower segment is colored "out", said segments horizontally overlapping for a distance such that the ratio of the length of overlap and the distance between the segments is greater than or equal to a predetermined amount indicative of the visual recognition of a stroke.

70. The method of claim 69 wherein an almost horizontal line is a line with a slope in the range of 5:1 to 20:1.

71. The method of claim 69 wherein the predetermined vertical distance away from the frame that a master segment extends is approximately one-half the maximum pixel size used to generate the typeface.

72. The method of claim 71 wherein the predetermined vertical distance is in the range of .01 to .02 of the distance defined by the sum of the ascender and descender heights of a typeface.

73. The method of claim 69 wherein the predetermined ratio indicative of a stroke is 1:1

74. the method of claim 69 further comprising the step of identifying the Y strokes as strong Y strokes if the ratio of the length of the stroke to the thickness of the stroke is greater than or equal to a predetermined amount and weak strokes if the ratio is less than a predetermined amount wherein a strong stroke has a higher priority than a weak stroke.

COMMONWEALTH PATENT OFFICE Sec. 77

75. The method of claim 74 wherein the predetermined ratio is 1:1.5.

76. The method of claim 69 wherein the step of adjusting the Y coordinates of the frame points representative of Y strokes comprises:

globally adjusting the thicknesses of the Y strokes of the typeface relative to all the strokes of the typeface thereby regularizing the thicknesses of the Y strokes;

identifying the Y strokes as strong Y strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than a predetermined amount indicative of a strong stroke;

constructing an Y main street comprising non-vertically overlapping strong Y strokes, prioritized in order of length, said Y main street indicative of high priority visual components of a character;

forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top extremes of characters of the typeface wherein no two consecutive Y coordinate values are are more than a predetermined distance apart;

forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters being dependent on the number of extremes which comprise each cluster;

identifying those Y main street strokes which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinate of the segments of the Y main street strokes which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the

segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y main street stroke is adjusted by a Y alignment process, adjusting the Y coordinate of the other segment according to the adjusted thickness of the stroke;

adjusting the Y white space between Y main street strokes, said adjustment of Y white space dependent upon preserving the height of the character;

adjusting the Y coordinates of the Y main street strokes not adjusted according to a Y alignment process, said Y coordinates adjusted relative to the adjusted Y main street strokes;

identifying those Y strokes not on Y main street which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinates of the segments of the Y strokes not on Y main street which are black convex and within an important cluster of the same type by the Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y stroke not on main street is adjusted by the Y alignment process, adjusting the Y coordinate of the other segment according to the adjusted thickness of the stroke;

adjusting the Y coordinates of the remaining unadjusted strokes relative to the adjusted Y main street strokes;

identifying those Y segments which do not form a stroke which is black convex and within the Y coordinate limits of an important cluster of the same type;

adjusting the Y coordinate of a segment which is black convex and within an important cluster of the same type by the Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface; and

adjusting the Y coordinates of the remaining unadjusted segments relative to the adjusted Y main street strokes.

77. The method of claim 76 wherein the method of adjusting Y segments using a Y alignment process comprises:

determining an important Y coordinate, YIMPT, of the important cluster the segment is within, said YIMPT being the extreme top Y coordinate of the cluster if the cluster comprises top extremes or the extreme bottom Y coordinate of the cluster if the cluster comprises bottom extremes;

adjusting YIMPT to the nearest grid position;

adjusting the distance between YIMPT and the segment to be adjusted so that the distance is equal to an incremental value of the grid; and

adjusting the Y coordinate value of the segment to be equal to the sum of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is greater than or equal to YIMPT, or adjusting the Y coordinate value of the segment to be equal to the difference of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is less than YIMPT.

78. The method of claim 76 wherein the predetermined amount indicative of a strong stroke is a ratio of the length of the stroke to the thickness of the stroke of 1:1.5.

79. The method of claim 76 wherein the step of constructing a Y main street further comprises if two strong strokes vertically overlap, the longer stroke will be on Y main street.

80. The method of claim 76 wherein the predetermined distance apart determinative of the formation of top extreme clusters and bottom extreme clusters is in the range of .005 to .01 of the sum of the ascender height and descender height of the typeface.

COMMONWEALTH PATENT OFFICE Sec. 77

81. The method of claim 76 wherein the step of determining important top clusters and important bottom clusters further comprises determining a cluster to be an important top cluster if it is the extreme top cluster of all the top clusters.

82. The method of claim 76 wherein the step of determining important top clusters and important bottom clusters further comprises determining a cluster to be an important bottom cluster if it is the extreme bottom cluster of all the bottom clusters.

83. The method of claim 76 wherein in the step of determining important top clusters and important bottom clusters, a top cluster is an important top cluster if the cluster contains 10-20% of the total number of top extremes and at least 20-30% of the number of top extremes in the largest top cluster.

84. The method of claim 76 wherein in the step of determining important top clusters and important bottom clusters, a bottom cluster is an important bottom cluster if the cluster contains 10-20% of the total number of bottom extremes and at least 20-30% of the number of bottom extremes in the largest top cluster.

85. The method of claim 76 wherein a segment is black convex if it is a top extreme or local top extreme and the segment has an "out" color direction or if the segment is a bottom extreme or local bottom extreme and has an "in" color direction.

86. The method of claim 85 wherein a segment is a top segment if it has an "out " color direction and a segment is a bottom segment if it has an "in" color direction.

87. The method of claim 76 wherein the step of globally adjusting the thicknesses of the Y strokes comprises:

storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the type face and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjustment process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

88. The method of claim 76 wherein the step of adjusting in the vertical direction Y white space which occurs between Y main street strokes comprises the steps of:

calculating a Y white space scale factor according to the difference between the total height of the character and the total adjusted stroke thicknesses of the strokes on Y main street, divided by the total amount of Y white space;

scaling the Y white space by multiplying the Y white space by the Y white space scale factor;

proportionately adjusting the scaled Y white space to preserve the symmetry of the size of the Y white space contained within each character.

89. The method of claim 88 wherein the step of proportionately adjusting the scaled white space comprises the steps of:

storing an "n" number of scaled white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionately determined according to the frequency a scaled white space value occurs;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjusting process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

COMMONWEALTH PATENT OFFICE Sec. 77

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

90. The method of claim 76 wherein the step of adjusting the Y coordinates of the frame points of Y main street strokes not adjusted using the Y alignment process comprises aligning a side of each stroke with the closest adjusted main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

91. The method of claim 90 wherein the step of aligning a side of each stroke with the closest main street stroke side comprises:

determining the side of the stroke which is closest to a side of an adjusted stroke on Y main street;

calculating the adjusted Y coordinate of the side closest to a side of an adjusted stroke on Y main street according to the following equation:

$$Y_C' = Y_{MC}' - R((|Y_{MC}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an adjusted Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the adjusted main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the adjusted main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

COMMONWEALTH PATENT OFFICE Sec. 77

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

92. The method of claim 76 wherein the step of adjusting the Y coordinates of the frame points of strokes not on Y main street not adjusted using the Y alignment process comprises aligning a side of each stroke with the closest main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

93. The method of claim 90 wherein the step of aligning a side of each stroke with the closest main street stroke side comprises:

determining the side of the stroke which is closest to a side of a stroke on Y main street;

calculating the adjusted Y coordinate of the side closest to a side of a stroke on Y main street according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

94. The method of claim 76 wherein the step of adjusting the Y coordinates of the remaining unadjusted Y segments comprises aligning the Y segment stroke with the closest main street stroke side.

95. The method of claim 94 wherein the step of aligning Y segments with the closest main street stroke side comprises:

determining the side of a main street stroke the segment is closest to;

calculating the adjusted Y coordinate of the segment according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the Y segment, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the segment is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the segment to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the segment to be aligned and S represents the scale of the typeface.

96. The method of claim 76 further comprising the step of adjusting the Y slave coordinates said step comprising proportionately adjusting the Y slave coordinates relative to Y master coordinates of the adjacent frame points along the frame.

97. The method of claim 96 wherein the step of aligning the Y slave coordinates further comprises calculating the adjusted value of the Y coordinate according to the following equation:

$$Y_1' = Y_0' + f * (Y_2' - Y_0')$$

$$f = \frac{Y_1 - Y_0}{Y_2 - Y_0}$$

where Y1 and Y1' respectively are the value and adjusted value of the Y slave coordinate to be adjusted, Y0 and Y0' are respectively the value and adjusted value of the Y master coordinate of the frame point adjacent to the left of the Y coordinate to be adjusted, Y2 and Y2' respectively are the value and adjusted value of the Y master coordinate of the frame point adjacent to the right of the Y coordinate to be adjusted.

98. The method of claim 2 wherein the step of determining diagonal strokes comprises the steps of:

ordering all diagonal segments by slope;

forming groups of diagonal segments which are relatively close in angle;

rotating each group of diagonal segments by the complement of the average slope of the group such that the diagonal segments are approximately vertical;

identifying certain pairs of diagonal master segments as diagonal strokes if the two segments oppose one another in direction and vertically overlap one another and the the ratio of the length of vertical overlap and the distance between segments is greater than a predetermined amount indicative of the visual recognition of a stroke.

99. The method of claim 98 wherein a diagonal line is a line which is a non-horizontal, non-almost horizontal, non-vertical and non-almost vertical line.

COMMONWEALTH PATENT OFFICE Sec 77

100. The method of claim 98 wherein the step of forming groups of diagonal segments which are relatively close in angle form groups of diagonal segments in the range of 10 to 20 degrees.

101. The method of claim 98 wherein two segments oppose one another in direction if the left segment is colored "in" and the right segment is colored "out", a segment having an "in" color if the segment is oriented in the upward direction and a segment having an "out" color if the segment is oriented in the downward direction.

102. The method of claim 98 wherein the predetermined amount of the ratio of the length of vertical overlap to the distance between segments indicative of the visual recognition of a stroke is 1:1.

103. The method of claim 98 wherein the step of adjusting the thickness of the diagonal strokes comprises the steps of

comparing the diagonal stroke thickness to the values of the horizontal and vertical stroke thicknesses;

if the diagonal stroke thickness is equal to a horizontal or vertical stroke thickness, adjusting the diagonal stroke thickness to be equal to the adjusted value of the horizontal or vertical stroke thickness;

if the diagonal stroke thickness is not equal to a horizontal or vertical stroke thickness, adjusting the diagonal stroke thickness according to the following equation:

$$TD' = TL'+(TR'-TL')*t$$

$$t=\frac{(TD-TL)}{(TR-TL)}$$

where TD and TD' respectively are the thickness and adjusted thickness of the diagonal stroke, TL is the closest horizontal or vertical stroke thickness less than TD, TR is the closest horizontal or vertical stroke thickness greater than TD and TL' and TR' respectively the adjusted values of TL and TR.

COMMONWEALTH PATENT OFFICE Sec. 77

104. The method of claim 98 wherein the step of adjusting the frame points of the diagonal strokes comprises the steps of:

if the frame point to be adjusted is preceded by a first segment to be adjusted and followed a second segment not to be adjusted during diagonal adjustment, adjusting the frame point according to the following equations:

$$X' = X + \Delta H * \cos(\alpha 2)$$
$$Y' = Y + \Delta H * \sin(\alpha 2)$$

$$\text{and } \Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH is the distance the frame point is to be move along the second segment to the location of the adjusted frame point where the adjusted first segment intersects the second segment, d is the distance the first segment is to be adjusted, equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is preceded by a first segment not to be adjusted and followed a second segment to be adjusted during diagonal adjustment, adjusting the frame point according to the following equations:

$$X' = X + \Delta H * \cos(\alpha 1)$$
$$Y' = Y + \Delta H * \sin(\alpha 1)$$

$$\text{and } \Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH is the distance the frame point is to be move along the first segment to the location of the adjusted frame point where the adjusted second segment intersects the first segment, d is the distance the second segment is to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal

stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is between two segments that are both to be adjusted , wherein the first segment is adjusted a distance d1 and the second segment adjusted a distance d2, adjusting the frame point according to the following equations:

$$X' = X + \Delta X_1 + \Delta X_2$$
$$Y' = Y + \Delta Y_1 + \Delta Y_2$$

where $\Delta X1$ and $\Delta Y1$ are calculated for the case that the frame point is preceded by a first segment to be adjusted a distance d1 followed by a second segment not to be adjusted whereby $\Delta X1$ and $\Delta Y1$ are calculated according to the following equations:

$$\Delta X_1 = \Delta H_1 * \cos(\alpha 2)$$
$$\Delta Y_1 = \Delta H_1 * \sin(\alpha 2)$$

$$\text{and } \Delta H_1 = \frac{d1}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH_1 is the distance the frame point is to be move along the second segment to the location of the adjusted frame point where the adjusted first segment intersects the second segment, d1 is the distance the first segment is to be adjusted, equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, a1 is the angle of the slope of the first segment and a2 is the angle of the slope of the second segment; and

where $\Delta X2$ and $\Delta Y2$ are calculated for the case that the frame point is preceded by a first segment not to be adjusted followed by a second segment to be adjusted a distance d2 whereby $\Delta X2$ and $\Delta Y2$ are calculated according to the following equations:

$$\Delta X_2 = \Delta H_2 * \cos(\alpha 1)$$
$$\Delta Y_2 = \Delta H_2 * \sin(\alpha 1)$$

$$\text{and } \Delta H_2 = \frac{d2}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH_2 is the distance the frame point is to be move along the first segment to the location of the adjusted frame point where the adjusted second segment intersects the first segment, d2 is the distance the second segment is to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is between two segments that are both to be adjusted by the same distance d, adjusting the frame point according to the following equations:

$$X' = X + \Delta X$$
$$Y' = Y + \Delta Y$$

$$\Delta X = \frac{d * \cos(\alpha 1)}{\sin(\alpha 2 - \alpha 1)} \qquad \Delta Y = \frac{d * \sin(\alpha 1)}{\sin(\alpha 2 - \alpha 1)}$$

where d is the distance the segments are to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment.

105. The method of claim 3 wherein said step for forming a frame for each character further comprises the steps of:

constructing a polygon by connecting the control points of the character by the sequence they are ordered according to the direction of the frame;

assigning each control point a property retained (R) or non-retained (N) wherein the control points which correspond to the end

COMMONWEALTH PATENT OFFICE Sec. 77

points of arcs of the character are retained and the remaining control points are assigned the property non-retained;

simplifying the polygon by eliminating the control points which are not necessary to maintain the fundamental visual properties of the character said method of simplifying comprising the steps of:

in a sequence of polygon sides <R-N-N-R>, deleting the central side between the two non-retained points and extending the surrounding sides until they intersect on another at a new point which is labeled non-retained;

in a series of aligned points, eliminating the points between the two extreme points and if the sequence contains two or more retained points or if at least one of its points is an inflection point, the two extreme points are labeled retained;

in a sequence of points <R-N-N . . . N-R>, eliminating all sides lying between consecutive end points and extending the ends of the sides, bounded by R-N and N-R points, towards one another until they intersect at a new point which is labeled retained.

whereby the non-retained points are eliminated thereby simplifying the polygon into a series of retained points.

106. The method of claim 3 wherein an almost vertical line is a line with a slope in the range 1:5 to 1:20.

107. The method of claim 3 wherein the predetermined horizontal distance away from the frame that a master segment extends is approximately one-half the maximum pixel size used to generate the typeface.

108. The method of claim 3 wherein the predetermined horizontal distance is in the range of .01 to .02 of the distance defined by the sum of the ascender and descender heights of a typeface.



109. The method of claim 3 wherein the predetermined ratio indicative of a stroke is 1:1

110. The method of claim 3 wherein an almost horizontal line is a line with a slope in the range of 5:1 to 20:1.

111. The method of claim 4 wherein the step of globally adjusting the thicknesses of X strokes comprises:

storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjustment process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

COMMONWEALTH PATENT OFFICE Sec. 77

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

A[m] +R((V[k]-V[m])*S)

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted , V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

112. The method of claim 4 wherein the predetermined amount indicative of a strong stroke is 1.5:1.

113. The method of claim 4 wherein the step of adjusting in the horizontal direction X white space which occurs between X main street strokes comprises the steps of:

calculating a X white space scale factor according to the difference of the total width of the character and the total adjusted stroke thicknesses of the strokes on X main street, divided by the total amount of X white space;

COMMONWEALTH PATENT OFFICE Sec. 77

scaling the X white space by multiplying the X white space by the X white space scale factor;

proportionately adjusting the scaled X white space to preserve the symmetry of the size of the X white space contained within each character.

114. The method of claim 113 wherein the step of proportionately adjusting the scaled white space comprises the steps of:

storing an "n" number of adjusted white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionally determined according to the frequency a scaled white space value occurs;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjusting process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

COMMONWEALTH PATENT OFFICE Sec. 77

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

A[m] +R((V[k]-V[m])*S)

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

115. The method of claim 113 wherein the step of adjusting the X coordinates of the frame points of the strokes not on X main street comprises aligning a side of each stroke with the closest main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

116. The method of claim 113 wherein the step of aligning a side of each stroke with the closest main street stroke side comprises:

determining the side of a stroke which is closest to a side of a stroke on X main street;

COMM. WEALTH Sec. 77 PATENT OFFICE

calculating the adjusted X coordinate of the side closest to a side of a stroke on X main street according to the following equation:

$$X_c' = X_{mc}' - R((|X_{mc}-X_c|)*Sm)$$

where Xc and Xc' are respectively the value and adjusted value of the side of the stroke closest to a side of an X main street stroke, Xmc and Xmc' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and Sm is the scale factor between the main street stroke sides closest to the right and to the left of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$Sm = \frac{(X_{Mc}' - X_{Mf}') * S}{(X_{Mc} - X_{Mf})}$$

where X_{Mf} and X_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

117. The method of claim 5 wherein the predetermined amount indicative of a strong stroke is a ratio of the length of the stroke to the thickness of the stroke of 1:1.5.

118. The method of claim 5 wherein the step of constructing a Y main street further comprises if two strong strokes vertically overlap, the longer stroke will be on Y main street.

119. The method of claim 5 wherein the predetermined distance apart determinative of the formation of top extreme clusters and bottom extreme clusters is in the range of .005 to .01 of the sum of the ascender height and descender height of the typeface.

COMMONWEALTH PATENT OFFICE Sec. 77

120. The method of claim 5 wherein the step of determining important top clusters and important bottom clusters further comprises determining a cluster to be an important top cluster if it is the extreme top cluster of all the top clusters.

121. The method of claim 5 wherein the step of determining important top clusters and important bottom clusters further comprises determining a cluster to be an important bottom cluster if it is the extreme bottom cluster of all the bottom clusters.

122. The method of claim 5 wherein in the step of determining important top clusters and important bottom clusters, a top cluster is an important top cluster if the cluster contains 10-20% of the total number of top extremes and at least 20-30% of the number of top extremes in the largest top cluster.

123. The method of claim 5 wherein in the step of determining important top clusters and important bottom clusters, a bottom cluster is an important bottom cluster if the cluster contains 10-20% of the total number of bottom extremes and at least 20-30% of the number of bottom extremes in the largest top cluster.

124. The method of claim 5 wherein a segment is black convex if it is a top extreme or local top extreme and the segment has an "out" color direction or if the segment is a bottom extreme or local bottom extreme and has an "in" color direction.

125. The method of claim 124 wherein a segment is top segment if it has an "out "color and a segment is a bottom segment if it has an "in" color.

126. The method of claim 5 wherein the step of globally adjusting the thicknesses of the Y strokes comprises:

storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjustment process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

127. The method of claim 5 wherein the step of adjusting in the vertical direction Y white space which occurs between Y main street strokes comprises the steps of:

calculating a Y white space scale factor according to the difference between the total height of the character and the total adjusted stroke thicknesses of the strokes on Y main street, divided by the total amount of Y white space;

scaling the Y white space by multiplying the Y white space by the Y white space scale factor;

proportionately adjusting the scaled Y white space to preserve the symmetry of the size of the Y white space contained within each character.

128. The method of claim 127 wherein the step of proportionately adjusting the scaled white space comprises the steps of:

storing an "n" number of scaled white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionately determined according to the frequency a scaled white space value occurs;

COMMONWEALTH PATENT OFFICE Sec. 77

setting the priority of the smallest value to the highest priority;

storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

determining the next value to be adjusted from the index stored in the third array;

adjusting the remaining values in order of priority said adjusting process comprising:

determining the largest value which was adjusted and is smaller than the current value to be adjusted;

determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the

value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

129. The method of claim 5 wherein the step of adjusting the Y coordinates of the frame points of Y main street strokes not adjusted using the Y alignment process comprises aligning a side of each stroke with the closest adjusted main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

130. The method of claim 129 wherein the step of aligning a side of each stroke with the closest main street stroke side comprises:

determining the side of a stroke which is closest to a side of an adjusted stroke on Y main street;

calculating the adjusted Y coordinate of the side closest to a side of an adjusted stroke on Y main street according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an adjusted Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the adjusted main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the adjusted main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

COMMONWEALTH OF AUSTRALIA Sec. 77 PATENT OFFICE

131. The method of claim 5 wherein the step of adjusting the Y coordinates of the frame points of strokes not on Y main street not adjusted using the Y alignment process comprises aligning a side of each stroke with the closest main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

132. The method of claim 131 wherein the step of aligning a side of each stroke with the closest main street stroke side comprises:

determining the side of a stroke which is closest to a side of a stroke on Y main street;

calculating the adjusted Y coordinate of the side closest to a side of a stroke on Y main street according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

133. The method of claim 7 wherein the predetermined distance apart determinative of the formation of top extreme clusters and bottom extreme clusters is in the range of .005 to .01 of the sum of the ascender height and descender height of the typeface.

COMMONWEALTH PATENT OFFICE Sec. 77

134. The method of claim 7 wherein the step of determining important top clusters and important bottom clusters further comprises determining a cluster to be an important top cluster if it is the extreme top cluster of all the top clusters.

135. The method of claim 7 wherein the step of determining important top clusters and important bottom clusters further comprises determining a cluster to be an important bottom cluster if it is the extreme bottom cluster of all the bottom clusters.

136. The method of claim 7 wherein in the step of determining important top clusters and important bottom clusters, a top cluster is an important top cluster if the cluster contains 10-20% of the total number of top extremes and at least 20-30% of the number of top extremes in the largest top cluster.

137. The method of claim 7 wherein in the step of determining important top clusters and important bottom clusters, a bottom cluster is an important bottom cluster if the cluster contains 10-20% of the total number of bottom extremes and at least 20-30% of the number of bottom extremes in the largest top cluster.

138. The method of claim 7 wherein a segment is black convex if it is a top extreme or local top extreme and the segment has an "out" color direction or if the segment is a bottom extreme or local bottom extreme and has an "in" color direction.

139. The method of claim 7 wherein a segment is top segment if it has an "out "color and a segment is a bottom segment if it has an "in" color.

140. The method of claim 8 wherein a diagonal line is a line which is a non-horizontal, non-almost horizontal, non-vertical and non-almost vertical line.

PATENT OFFICE

141. The method of claim 8 wherein the step of forming groups of diagonal segments which are relatively close in angle form groups of diagonal segments in the range of 10 to 20 degrees.

142. The method of claim 8 wherein two segments oppose one another in direction if the left segment is colored "in" and the right segment is colored "out", a segment having an "in" color if the segment is oriented in the upward direction and a segment having an "out" color if the segment is oriented in the downward direction.

143. The method of claim 8 wherein the predetermined amount of the ratio of the length of vertical overlap to the distance between segments indicative of the visual recognition of a stroke is 1:1.

144. The method of claim 8 wherein the step of adjusting the thickness of the diagonal strokes comprises the steps of

comparing the diagonal stroke thickness to the values of the horizontal and vertical stroke thicknesses;

if the diagonal stroke thickness is equal to a horizontal or vertical stroke thickness, adjusting the diagonal stroke thickness to be equal to the adjusted value of the horizontal or vertical stroke thickness;

if the diagonal stroke thickness is not equal to a horizontal or vertical stroke thickness, adjusting the diagonal stroke thickness according to the following equation:

$$TD' = TL'+(TR'-TL')*t$$

$$t=\frac{(TD-TL)}{(TR-TL)}$$

where TD and TD' respectively are the thickness and adjusted thickness of the diagonal stroke, TL is the closest horizontal or vertical stroke thickness less than TD, TR is the closest horizontal or vertical stroke thickness greater than TD and TL' and TR' respectively the adjusted values of TL and TR.

COMMONWEALTH PATENT OFFICE Sec. 77

145. The method of claim 8 wherein the step of adjusting the frame points of the diagonal strokes comprises the steps of:

if the frame point to be adjusted is preceded by a first segment to be adjusted and followed a second segment not to be adjusted during diagonal adjustment, adjusting the frame point according to the following equations:

$$X' = X + \Delta H * \cos(\alpha 2)$$
$$Y' = Y + \Delta H * \sin(\alpha 2)$$

$$\text{and } \Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH is the distance the frame point is to be move along the second segment to the location of the adjusted frame point where the adjusted first segment intersects the second segment, d is the distance the first segment is to be adjusted, equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is preceded by a first segment not to be adjusted and followed a second segment to be adjusted during diagonal adjustment, adjusting the frame point according to the following equations:

$$X' = X + \Delta H * \cos(\alpha 1)$$
$$Y' = Y + \Delta H * \sin(\alpha 1)$$

$$\text{and } \Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH is the distance the frame point is to be move along the first segment to the location of the adjusted frame point where the adjusted second segment intersects the first segment, d is the distance the second segment is to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal

stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is between two segments that are both to be adjusted , wherein the first segment is adjusted a distance d1 and the second segment adjusted a distance d2, adjusting the frame point according to the following equations:

$$X' = X + \Delta X_1 + \Delta X_2$$
$$Y' = Y + \Delta Y_1 + \Delta Y_2$$

where $\Delta X1$ and $\Delta Y1$ are calculated for the case that the frame point is preceded by a first segment to be adjusted a distance d1 followed by a second segment not to be adjusted whereby $\Delta X1$ and $\Delta Y1$ are calculated according to the following equations:

$$\Delta X_1 = \Delta H_1 * \cos(\alpha 2)$$
$$\Delta Y_1 = \Delta H_1 * \sin(\alpha 2)$$

$$\text{and } \Delta H_1 = \frac{d1}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH_1 is the distance the frame point is to be move along the second segment to the location of the adjusted frame point where the adjusted first segment intersects the second segment, d1 is the distance the first segment is to be adjusted, equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, a1 is the angle of the slope of the first segment and a2 is the angle of the slope of the second segment; and

where $\Delta X2$ and $\Delta Y2$ are calculated for the case that the frame point is preceded by a first segment not to be adjusted followed by a second segment to be adjusted a distance d2 whereby $\Delta X2$ and $\Delta Y2$ are calculated according to the following equations:

$$\Delta X_2 = \Delta H_2 * \cos(\alpha 1)$$
$$\Delta Y_2 = \Delta H_2 * \sin(\alpha 1)$$

$$\text{and } \Delta H_2 = \frac{d2}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH_2 is the distance the frame point is to be move along the first segment to the location of the adjusted frame point where the adjusted second segment intersects the first segment, d2 is the distance the second segment is to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is between two segments that are both to be adjusted by the same distance d, adjusting the frame point according to the following equations:

$$X' = X + \Delta X$$
$$Y' = Y + \Delta Y$$

$$\Delta X = \frac{d * \cos(\alpha 1)}{\sin(\alpha 2 - \alpha 1)} \qquad \Delta Y = \frac{d * \sin(\alpha 1)}{\sin(\alpha 2 - \alpha 1)}$$

where d is the distance the segments are to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment.

146. An apparatus for minimizing the visual degradation of digital typefaces wherein a typeface is generated for a particular scale and each character of the typeface is described in a format using control points comprising X-Y coordinate pairs, said apparatus comprising:

means for forming a frame for each character from said control points, said frame represented by a plurality of frame points comprising X-Y coordinate pairs;

COMMONWEALTH Sec. '77 PATENT OFFICE

means for determining vertical strokes which comprise each character, said strokes formed by a plurality of frame points and identified as X strokes;

means for determining horizontal strokes which comprise each character, said horizontal strokes formed by a plurality of frame points and identified as Y strokes;

means for adjusting the X coordinates of the frame points for each character of the typeface representative of X strokes, said X strokes being oriented in the vertical direction and prioritized in order of visual importance to the character, said strokes being adjusted according to priority wherein the amount of adjustment of the lower priority strokes is dependent upon the higher priority strokes, said adjustment regularizing the thicknesses of the X strokes and preserving the width of the each character;

means for adjusting said the X coordinates of the frame points which do not form a stroke, said adjustment dependent on preserving the width of the character and the thicknesses of adjusted X strokes;

means for adjusting the Y coordinates of the frame points for each character of the typeface representative of Y strokes, said Y strokes being oriented in the horizontal direction and prioritized in order of visual importance to the character, said strokes being adjusted according to the priority wherein the amount of adjustment of the lower priority strokes is dependent upon the thicknesses of the higher priority strokes, said adjustment preserving the heights of the characters of the typeface and the horizontal alignment of the Y strokes; and

means for adjusting the Y coordinates of the frame points which do not form a stroke, said adjustment dependent on preserving the height of the character and the thicknesses and the horizontal alignment of the adjusted strokes;

whereby the important visual features of the characters of the typeface are maintained thereby minimizing the visual degradation of the typeface.

COMMONWEALTH PATENT OFFICE Sec. 77

147. The apparatus of claim 146 wherein said frame has a direction corresponding to the direction of the character and the step of forming a frame for each character further comprises the steps of:

means for constructing a polygon by connecting the control points of the character by the sequence they are ordered according to the direction of the frame;

means for assigning each control point a property retained (R) or non-retained (N) wherein the control points which correspond to the end points of arcs of the character are retained and the remaining control points are assigned the property non-retained;

means for simplifying the polygon by eliminating the control points which are not necessary to maintain the fundamental visual properties of the character said means comprising:

in a sequence of polygon sides <R-N-N-R>, means for deleting the central side between the two non-retained points and extending the surrounding sides until they intersect on another at a new point which is labeled non-retained;

in a series of aligned points, means for eliminating the points between the two extreme points and if the sequence contains two or more retained points or if at least one of its points is an inflection point, the two extreme points are labeled retained;

in a sequence of points <R-N-N . . . N-R>, means for eliminating all sides lying between consecutive end points and extending the ends of the sides, bounded by R-N and N-R points, towards one another until they intersect at a new point which is labeled retained.

whereby the non-retained points are eliminated thereby simplifying the polygon into a series of retained points.

148. The apparatus of claim 147 further comprising means for calculating the adjusted control points from the adjusted frame points, said method comprising the steps of:

COMMONWEALTH OF AUSTRALIA PATENT OFFICE Rec. 77

if control points of the sequence <U-M-N-V> form a sequence of sides <R-N-N-R> and during the process of forming the frame, control points M and N were eliminated and the sides U-M and V-N were extended to intersect at new frame point O,

means for calculating the adjusted value of control point M according the following equation:

$$M' = U' \cdot tm + O' \cdot (1-tm),\ tm = \frac{|\ M - O\ |}{|\ U - O\ |}$$

means for calculating the adjusted value of control point N according to the following equation:

$$N' = V' \cdot tn + O' \cdot (1-tn),\ tn = \frac{|\ N - O\ |}{|\ V - O\ |}$$

where M' is the adjusted value of M, O' is the adjusted value of O, U' is the adjusted value of U, N' is the adjusted value of N and V' is the adjusted value of V;

if control points of the sequence <U-M-V> form a sequence of aligned points and during the process of forming the frame, control point M was eliminated, means for calculating control point M according to the following equation:

$$M' = V' \cdot tm + U' \cdot (1-tm),\ tm = \frac{|\ M - U\ |}{|\ V - U\ |}$$

where M' is the adjusted value of control point M, U' is the adjusted value of U and V' is the adjusted value of V;

if control points of the sequence <U-M-N-P-Q-V> form a sequence of sides <R-N-N-...-N-R> and during the process of forming the frame, control points M, N, P, Q were eliminated, and the sides U-M and V-Q were extended to intersect at frame point O, means for calculating control points M, N, P and Q according to the following equation:

COMMONWEALTH PATENT OFFICE Sec. 77

$$\overline{CTRLPT}' = [CTRLPT'_X, CTRLPT'_Y] = [CTRLPT_U, CTRLPT_V] \cdot \begin{bmatrix} V'_X - O'_X & V'_Y - O'_Y \\ U'_X - O'_X & U'_Y - O'_Y \\ O'_X & O'_Y \end{bmatrix}$$

where CTRLPT' is the adjusted value of the control point to be calculated, $CTRLPT_u$ and $CTRLPT_v$ identify the location of the control point relative to the control points U and V, V'_x and V'_y are respectively the adjusted X and Y coordinate values of V, U'_x and U'_y are respectively the adjusted X and Y coordinates of a U and O'_x and O'y are respectively the adjusted X and Y coordinate values of O.

149. The apparatus of claim 166 wherein means for determining vertical strokes comprises:

means for identifying certain X coordinates of the frame points as X master coordinates if the frame point is an extreme in the horizontal direction or if the frame point is an end point of a line segment which is a vertical or almost vertical side of the frame;

means for forming X master segments,said master segments approximating a portion of the character frame, said master segments defined as a vertical line segment which extends in a up and down direction away from an X master coordinate for a distance such that each end point of the line segment is a predetermined horizontal distance away from the frame;

means for identifying the direction of each of the X master segments, the direction of the master segments corresponding to the direction of the frame the segment approximates, the direction of the frame dictated by the contour convention applied;

means for identifying said X master segments as having an "in" color if the segment is identified as being oriented in the upward direction;

means for identifying said X master segments as having an "out" color if the segment is identified as being oriented in the downward direction;

means for identifying certain pairs of X master segments as X strokes if two adjacent segments vertically overlap and the left segment is colored "in" and the right segment is colored "out", said segments vertically overlapping for a distance such that the ratio of the length of vertical overlap and the distance between the segments is greater than or equal to a predetermined amount indicative of the visual recognition of a stroke;

150. The apparatus of claim 149 wherein an almost vertical line is a line with a slope in the range of 1:5 to 1:20.

151. The apparatus of claim 149 wherein the predetermined horizontal distance away from the frame that a master segment extends is approximately one-half the maximum pixel size used to generate the typeface.

152. The apparatus of claim 151 wherein the predetermined horizontal distance is in the range of .01 to .02 of the distance defined by the sum of the ascender and descender heights of a typeface.

153. The apparatus of claim 149 wherein the predetermined ratio indicative of a stroke is 1:1

154. The apparatus of claim 149 wherein the means for adjusting the X coordinates of the frame points representative of X strokes comprises:

means for identifying the X strokes as strong X strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than or equal to a predetermined amount indicative of a strong stroke;

means for constructing an X main street comprising non-horizontally overlapping strong X strokes, prioritized in order of

PATENT OFFICE

length, said X main street indicative of high priority visual components of a character;

means for globally adjusting the thicknesses of the X strokes of the typeface relative to all strokes of the typeface thereby regularizing the thicknesses of the X strokes;

means for adjusting in the horizontal direction X white space which occurs between X strokes on main street, said white space being proportionately scaled and adjusted in order to preserve the total width of the character;

means for adjusting the coordinates of the X main street strokes such that the relative location of the strokes relative to one another is determined according to the adjusted white space between strokes; and

means for adjusting the X coordinates of the frame points of the X strokes not on X main street wherein the amount of adjustment of the X coordinates is dependent upon the higher priority adjusted X strokes and the X white space between the X main street strokes.

155. The apparatus of claim 149 wherein the means for globally adjusting the thicknesses of X strokes comprises:

means for storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

means for setting the priority of the smallest value to the highest priority;

COMMONWEALTH PATENT OFFICE Sec. 77

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

means for adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

means for determining the next value to be adjusted from the index stored in the third array;

means for adjusting the remaining values in order of priority said adjustment process comprising:

means for determining the largest value which was adjusted and is smaller than the current value to be adjusted;

means for determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which

was adjusted and is smaller than the current value to be adjusted , V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

156. The apparatus of claim 154 wherein the means for adjusting in the horizontal direction X white space which occurs between X main street strokes comprises the steps of:

means for calculating a X white space scale factor according to the difference of the total width of the character and the total adjusted stroke thicknesses of the strokes on X main street, divided by the total amount of X white space;

means for scaling the X white space by multiplying the X white space by the X white space scale factor;

means for proportionately adjusting the scaled X white space to preserve the symmetry of the size of the X white space contained within each character.

157. The apparatus of claim 156 wherein the means for proportionally adjusting the scaled white space comprises the steps of:

means for storing an "n" number of adjusted white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionally determined according to the frequency a scaled white space value occurs;

means for setting the priority of the smallest value to the highest priority;

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

PATENT OFFICE

means for adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

means for determining the next value to be adjusted from the index stored in the third array;

means for adjusting the remaining values in order of priority said adjusting process comprising:

means for determining the largest value which was adjusted and is smaller than the current value to be adjusted;

means for determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation.

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

COMMONWEALTH PATENT OFFICE Sec. 77

158. The apparatus of claim 154 wherein the means for adjusting the X coordinates of the frame points of the strokes not on X main street comprises means for aligning a side of each stroke with the closest main street stroke side and a means for adjusting the other side of the stroke according to the adjusted stroke thickness.

159. The apparatus of claim 158 wherein the means for aligning a side of each stroke with the closest main street stroke side comprises:

means for determining the side of the stroke which is closest to a side of a stroke on X main street;

means for calculating the adjusted X coordinate of the side closest to a side of a stroke on X main street according to the following equation:

$$X_c' = X_{mc}' - R((|X_{mc}-X_c|)*S_m)$$

where Xc and Xc' are respectively the value and adjusted value of the side of the stroke closest to a side of an X main street stroke, Xmc and Xmc' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and Sm is the scale factor between the main street stroke sides closest to the right and to the left of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_m = \frac{(X_{Mc}' - X_{Mf}') * S}{(X_{Mc} - X_{Mf})}$$

where X_{Mf} and X_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

160. The apparatus of claim 158 wherein the means for adjusting the X master coordinates of the frame points which do not form a stroke comprises aligning

each X master coordinate which the closest side of a main street stroke and rounding the coordinate value to the nearest grid position.

161. The apparatus of claim 160 wherein the means for aligning the X master coordinate with the closest main street stroke side comprises:

means for determining the X main street stroke side closest to the X master coordinate to be aligned;

means for calculating the adjusted X master coordinate according to the following equation:

$$X_{coord}' = X_{Mc}' - R((|X_{Mc}-X_{coord}|)*S_m)$$

where Xcoord and Xcoord' are respectively the value and adjusted value of the X master coordinate, X_{Mc} and X_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the X master coordinate is closest to, R represents the rounding of the value to the nearest grid point and Sm is the scale factor between the main street strokes sides closest to the right and to the left of the X master coordinate to be adjusted, said scale factor being calculated according to the following equation:

$$S_m = \frac{(X_{Mc}' - X_{Mf}') * S}{(X_{Mc} - X_{Mf})}$$

where X_{Mf} and X_{Mf}' are respectively the value and adjusted value of the side of the main street stroke on the side of the X master coordinate opposite the main street side closest to the X master coordinate and S represents the scale of the typeface.

162. The apparatus of claim 149 further comprising the means for aligning the X slave coordinates said step comprising proportionately adjusting the X coordinates relative to the X master coordinates of the adjacent frame points along the frame.

COMMONWEALTH PATENT OFFICE Sec. 77

163. The apparatus of claim 162 wherein the means for aligning the X slave coordinates further comprises means for calculating the adjusted value of the X slave coordinate according to the following equation:

$$X_1' = X_0' + f * (X_2' - X_0')$$

$$f = \frac{X_1 - X_0}{X_2 - X_0}$$

where X1 and X1' respectively are the value and adjusted value of the X slave coordinate to be adjusted, X0 and X0' are respectively the value and adjusted value of the X master coordinate of the frame point adjacent to the left of the X coordinate to be adjusted, X2 and X2' respectively are the value and adjusted value of the X master coordinate of the frame point adjacent to the right of the X slave coordinate to be adjusted.

164. The apparatus of claim 146 wherein the means for determining horizontal strokes comprises the steps of :

means for identifying certain Y coordinates of the frame points as Y master coordinates if the frame point is an extreme in the vertical direction or if the frame point is an end point of a line segment which is a horizontal or almost horizontal side of the frame and identifying Y coordinates as Y slave coordinates if the Y coordinates are not identified as Y master coordinates;

means for forming Y master segments,said Y master segments approximating a portion of the character frame, said master segments defined as a horizontal line segment which extends in a right and left direction away from a Y master coordinate until each end point of the line segment is a predetermined vertical distance away from the frame;

means for identifying the direction of the Y master segments, the direction of the master segments corresponding to the direction of the frame the segment approximates, the direction of the frame dictated by the contour convention applied;

COMMONWEALTH PATENT OFFICE Sec. 77

means for identifying said Y master segments as having an "in" color if the segment is identified as being in the leftward direction;

means for identifying said Y master segments as having an "out" color if the segment is identified as being in the rightward direction; and

means for identifying certain pairs of Y master segments as Y strokes if two adjacent segments horizontally overlap and the upper segment is colored "in" and the lower segment is colored "out", said segments horizontally overlapping for a distance such that the ratio of the length of overlap and the distance between the segments is greater than or equal to a predetermined amount indicative of the visual recognition of a stroke.

165. The apparatus of claim 164 wherein an almost horizontal side of the frame is a line having a slope in the range of 5:1 to 20:1.

166. The apparatus of claim 164 wherein the predetermined vertical distance away from the frame that a master segment extends is approximately one-half the maximum pixel size used to generate the typeface.

167. The apparatus of claim 166 wherein the predetermined vertical distance is in the range of .01 to .02 of the distance defined by the sum of the ascender and descender heights of a typeface.

168. The apparatus of claim 164 wherein the predetermined ratio indicative of a stroke is 1:1

169. The apparatus of claim 164 wherein the means for adjusting the Y coordinates of the frame points representative of Y strokes comprises:

means for globally adjusting the thicknesses of the Y strokes of the typeface relative to all the strokes of the typeface thereby regularizing the thicknesses of the Y strokes;

means for identifying the Y strokes as strong Y strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than a predetermined amount indicative of a strong stroke;

means for constructing an Y main street comprising non-vertically overlapping strong Y strokes, prioritized in order of length, said Y main street indicative of high priority visual components of a character;

means for forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top extremes of characters of the typeface wherein no two consecutive Y coordinate values are are more than a predetermined distance apart;

means for forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

means for determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters being dependent on the number of extremes which comprise each cluster;

means for identifying those Y main street strokes which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

means for adjusting the Y coordinate of the segments of the Y main street strokes which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y main street stroke is adjusted by a Y alignment process, means for adjusting the Y coordinate of the other segment according to the adjusted thickness of the stroke;

means for adjusting the Y white space between Y main street strokes, said adjustment of Y white space dependent upon preserving the height of the character;

COMMONWEALTH PATENT OFFICE Sec. 77

means for adjusting the Y coordinates of the Y main street strokes not adjusted according to a Y alignment process, said Y coordinates adjusted relative to the adjusted Y main street strokes;

means for identifying those Y strokes not on Y main street which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

means for adjusting the Y coordinates of the segments of the Y strokes not on Y main street which are black convex and within an important cluster of the same type by the Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

if one segment of a Y stroke not on main street is adjusted by the Y alignment process, means for adjusting the Y coordinate of the other segment according to the adjusted thickness of the stroke;

means for adjusting the Y coordinates of the remaining unadjusted strokes relative to the adjusted Y main street strokes;

means for identifying those Y segments which do not form a stroke which is black convex and within the Y coordinate limits of an important cluster of the same type;

means for adjusting the Y coordinate of the segment which is black convex and within an important cluster of the same type by the Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface; and

means for adjusting the Y coordinates of the remaining unadjusted segments relative to the adjusted Y main street strokes.

170. The apparatus of claim 169 wherein the means for adjusting Y segments using a Y alignment process comprises:

means for determining an important Y coordinate, YIMPT, of the important cluster the segment is within, said YIMPT being the extreme top Y coordinate of the cluster if the cluster comprises top extremes or

COMMONWEALTH PATENT OFFICE Sec. 77

the extreme bottom Y coordinate of the cluster if the cluster comprises bottom extremes;

means for adjusting YIMPT to the nearest grid position;

means for adjusting the distance between YIMPT and the segment to be adjusted so that the distance is equal to an incremental value of the grid; and

means for adjusting the Y coordinate value of the segment to be equal to the sum of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is greater than or equal to YIMPT, or adjusting the Y coordinate value of the segment to be equal to the difference of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is less than YIMPT.

171. The apparatus of claim 169 wherein the predetermined distance apart determinative of the formation of top extreme clusters and bottom extreme clusters is in the range of .005 to .01 of the sum of the ascender height and descender height of the typeface.

172. The apparatus of claim 169 wherein the means for determining important top clusters and important bottom clusters further comprises means for determining a cluster to be an important top cluster if it is the extreme top cluster of all the top clusters; and means for determining a cluster to be an important bottom cluster if it is the extreme bottom cluster of all the bottom clusters.

173. The apparatus of claim 169 wherein in the means for determining important top clusters and important bottom clusters, a top cluster is an important top cluster if the cluster contains 10-20% of the total number of top extremes and at least 20-30% of the number of top extremes in the largest top cluster and a bottom cluster is an important bottom cluster if the cluster contains 10-20% of the total number of bottom extremes and at least 20-30% of the number of bottom extremes in the largest top cluster.

174. The apparatus of claim 169 wherein a segment is black convex if it is a top extreme or local top extreme and the segment has an "out" color direction or if the segment is a bottom extreme or local bottom extreme and has an "in" color direction.

175. The apparatus of claim 174 wherein a segment is a top segment if it has an "out " color direction and a segment is a bottom segment if it has an "in" color direction.

176. The apparatus of claim 169 wherein the means for globally adjusting the thicknesses of the Y strokes comprises:

means for storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

means for setting the priority of the smallest value to the highest priority;

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

means for adjusting the smallest value wherein the value is multiplied by the scale of the type face and rounded to the nearest grid position

means for determining the next value to be adjusted from the index stored in the third array;

means for adjusting the remaining values in order of priority said adjustment process comprising:

means for determining the largest value which was adjusted and is smaller than the current value to be adjusted;

COMMONWEALTH PATENT OFFICE Sec. 77

means for determining the smallest value which was adjusted and is larger than the current value to be adjusted;

means for if there is no value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

177. The apparatus of claim 169 wherein the means for adjusting in the vertical direction Y white space which occurs between Y main street strokes comprises the steps of:

means for calculating a Y white space scale factor according to the difference between the total height of the character and the total adjusted stroke thicknesses of the strokes on Y main street, divided by the total amount of Y white space;

means for scaling the Y white space by multiplying the Y white space by the Y white space scale factor;

means for proportionately adjusting the scaled Y white space to preserve the symmetry of the size of the Y white space contained within each character.

178. The apparatus of claim 177 wherein the means for proportionately adjusting the scaled white space comprises:

means for storing an "n" number of scaled white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionately determined according to the frequency a scaled white space value occurs;

means for setting the priority of the smallest value to the highest priority;

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

means for adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

means for determining the next value to be adjusted from the index stored in the third array;

means for adjusting the remaining values in order of priority said adjusting process comprising:

means for determining the largest value which was adjusted and is smaller than the current value to be adjusted;

means for determining the smallest value which was adjusted and is larger than the current value to be adjusted;

COMMONWEALTH PATENT OFFICE Sec. 77

if there is no value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted and S is the scale.

179. The apparatus of claim 169 wherein the means for adjusting the Y coordinates of the frame points of Y main street strokes not adjusted using the Y alignment process comprises means for aligning a side of each stroke with the closest adjusted main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

180. The apparatus of claim 179 wherein the means for aligning a side of each stroke with the closest main street stroke side comprises:

means for determining the side of the stroke which is closest to a side of an adjusted stroke on Y main street;

means for calculating the adjusted Y coordinate of the side closest to a side of an adjusted stroke on Y main street according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an adjusted Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the adjusted main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the adjusted main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

181. The apparatus of claim 169 wherein the means for adjusting the Y coordinates of the frame points of strokes not on Y main street not adjusted using the Y alignment process comprises means for aligning a side of each stroke with the closest main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

182. The apparatus of claim 181 wherein the means for aligning a side of each stroke with the closest main street stroke side comprises:

means for determining the side of the stroke which is closest to a side of a stroke on Y main street;

means for calculating the adjusted Y coordinate of the side closest to a side of a stroke on Y main street according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$



where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}' - Y_{Mf}') * S}{(Y_{Mc} - Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

183. The apparatus of claim 169 wherein the means for adjusting the Y coordinates of the remaining unadjusted Y segments comprises means for aligning the Y segment stroke with the closest main street stroke side.

184. The apparatus of claim 183 wherein the means for aligning Y segments with the closest main street stroke side comprises:

means for determining the side of a main street stroke the segment is closest to;

means for calculating the adjusted Y coordinate of the segment according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc} - Y_C|) * S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the Y segment, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the segment is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of

COMMONWEALTH PATENT OFFICE Sec. 77

the segment to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the segment to be aligned and S represents the scale of the typeface.

185. The apparatus of claim 184 wherein the means for adjusting the Y slave coordinates further comprises means for calculating the adjusted value of the Y slave coordinate according to the following equation:

$$Y_1' = Y_0' + f * (Y_2' - Y_0')$$

$$f = \frac{Y_1 - Y_0}{Y_2 - Y_0}$$

where Y1 and Y1' respectively are the value and adjusted value of the Y slave coordinate to be adjusted, Y0 and Y0' are respectively the value and adjusted value of the Y master coordinate of the frame point adjacent to the left of the Y slave coordinate, Y2 and Y2' respectively are the value and adjusted value of the Y master coordinate of the frame point adjacent to the right of the Y slave coordinate.

186. The apparatus of according to claim 146 further comprising:

means for determining diagonal strokes comprising each character which are oriented in the diagonal direction, said strokes formed by a plurality of frame points;

means for adjusting the frame points of each character of the typeface representative of the diagonal strokes, said adjustment dependent on preserving the adjusted thicknesses and locations of the adjusted X and Y strokes.

187. The apparatus of claim 186 wherein the means for determining diagonal strokes comprises the steps of:

means for ordering all diagonal segments by slope;

means for forming groups of diagonal segments which are relatively close in angle;

means for rotating each group of diagonal segments by the complement of the average slope of the group such that the diagonal segments are approximately vertical;

means for identifying certain pairs of diagonal master segments as diagonal strokes if the two segments oppose one another in direction and vertically overlap one another and the the ratio of the length of vertical overlap and the distance between segments is greater than a predetermined amount indicative of the visual recognition of a stroke.

188. The apparatus of claim 187 wherein the means for forming groups of diagonal segments which are relatively close in angle form groups of diagonal segments in the range of 10 to 20 degrees.

189. The apparatus of claim 187 wherein two segments oppose one another in direction if the left segment is colored "in" and the right segment is colored "out", a segment having an "in" color if the segment is oriented in the upward direction and a segment having an "out" color if the segment is oriented in the downward direction.

190. The apparatus of claim 187 wherein the predetermined amount of the ratio of the length of vertical overlap to the distance between segments indicative of the visual recognition of a stroke is 1:1.

191. The apparatus of claim 187 wherein the means for adjusting the thickness of the diagonal strokes comprises:

means for comparing the diagonal stroke thickness to the values of the horizontal and vertical stroke thicknesses;

Sec. 77

if the diagonal stroke thickness is equal to a horizontal or vertical stroke thickness, means for adjusting the diagonal stroke thickness to be equal to the adjusted value of the horizontal or vertical stroke thickness;

if the diagonal stroke thickness is not equal to a horizontal or vertical stroke thickness, means for adjusting the diagonal stroke thickness according to the following equation:

$$TD' = TL' + (TR' - TL') * t$$

$$t = \frac{(TD - TL)}{(TR - TL)}$$

where TD and TD' respectively are the thickness and adjusted thickness of the diagonal stroke, TL is the closest horizontal or vertical stroke thickness less than TD, TR is the closest horizontal or vertical stroke thickness greater than TD and TL' and TR' respectively the adjusted values of TL and TR.

192. The apparatus of claim 187 wherein the means for adjusting the frame points of the diagonal strokes comprises:

if the frame point to be adjusted is preceded by a first segment to be adjusted and followed a second segment not to be adjusted during diagonal adjustment, means for adjusting the frame point according to the following equations:

$$X' = X + \Delta H * \cos(\alpha 2)$$
$$Y' = Y + \Delta H * \sin(\alpha 2)$$

$$\text{and } \Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH is the distance the frame point is to be move along the second segment to the location of the adjusted frame point where the adjusted first segment intersects the second segment, d is the distance the first segment is to be adjusted, equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

COMMONWEALTH PATENT OFFICE Sec. 77

if the frame point to be adjusted is preceded by a first segment not to be adjusted and followed a second segment to be adjusted during diagonal adjustment, means for adjusting the frame point according to the following equations:

$$X' = X + \Delta H * \cos(\alpha 1)$$
$$Y' = Y + \Delta H * \sin(\alpha 1)$$

$$\text{and } \Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH is the distance the frame point is to be move along the first segment to the location of the adjusted frame point where the adjusted second segment intersects the first segment, d is the distance the second segment is to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is between two segments that are both to be adjusted , wherein the first segment is adjusted a distance d1 and the second segment adjusted a distance d2, means for adjusting the frame point according to the following equations:

$$X' = X + \Delta X_1 + \Delta X_2$$
$$Y' = Y + \Delta Y_1 + \Delta Y_2$$

where $\Delta X1$ and $\Delta Y1$ are calculated for the case that the frame point is preceded by a first segment to be adjusted a distance d1 followed by a second segment not to be adjusted whereby $\Delta X1$ and $\Delta Y1$ are calculated according to the following equations:

$$\Delta X_1 = \Delta H_1 * \cos(\alpha 2)$$
$$\Delta Y_1 = \Delta H_1 * \sin(\alpha 2)$$

$$\text{and } \Delta H_1 = \frac{d1}{\sin(\alpha 2 - \alpha 1)}$$

PATENT OFFICE

where ΔH_1 is the distance the frame point is to be move along the second segment to the location of the adjusted frame point where the adjusted first segment intersects the second segment, d1 is the distance the first segment is to be adjusted, equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment; and

where $\Delta X2$ and $\Delta Y2$ are calculated for the case that the frame point is preceded by a first segment not to be adjusted followed by a second segment to be adjusted a distance d2 whereby $\Delta X2$ and $\Delta Y2$ are calculated according to the following equations:

$$\Delta X_2 = \Delta H_2 * \cos(\alpha 1)$$
$$\Delta Y_2 = \Delta H_2 * \sin(\alpha 1)$$

$$\text{and } \Delta H_2 = \frac{d2}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH_2 is the distance the frame point is to be move along the first segment to the location of the adjusted frame point where the adjusted second segment intersects the first segment, d2 is the distance the second segment is to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is between two segments that are both to be adjusted by the same distance d, means for adjusting the frame point according to the following equations:

Sec. 77 PATENT OFFICE

$$X' = X + \Delta X$$
$$Y' = Y + \Delta Y$$

$$\Delta X = \frac{d^* \cos(\alpha 1)}{\sin(\alpha 2 - \alpha 1)} \qquad \Delta Y = \frac{d^* \sin(\alpha 1)}{\sin(\alpha 2 - \alpha 1)}$$

where d is the distance the segments are to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment.

193. An apparatus for analyzing the characters of a typeface and determining the important visual components, wherein the contour of each character of the typeface is described in a format using control points comprising X-Y coordinate pairs, said character contours having a specified direction dependent upon the contour convention applied, said apparatus comprising:

means for forming a frame for each character from said control points, each frame being a simplified visual representation of a corresponding character, said frames being represented by a plurality of frame points comprising X-Y coordinate pairs;

means for identifying certain X coordinates of the frame points as X master coordinates if the frame point is an extreme in the horizontal direction or if the frame point is an end point of a line segment which is a vertical or almost vertical side of the frame;

means for forming X master segments,said master segments approximating a portion of the character frame, said master segments defined as a vertical line segment which extends in a up and down direction away from an X master coordinate for a distance such that each end point of the line segment is a predetermined horizontal distance away from the frame,;

means for identifying the direction of each of the X master segments, the direction of the master segments corresponding to

COMMONWEALTH PATENT OFFICE Sec. 77

the direction of the frame the segment approximates, the direction of the frame dictated by the contour convention applied;

means for identifying said X master segments as having an "in" color if the segment is identified as being oriented in the upward direction;

means for identifying said X master segments as having an "out" color if the segment is identified as being oriented in the downward direction;

means for identifying certain pairs of X master segments as X strokes if two adjacent segments vertically overlap and the left segment is colored "in" and the right segment is colored "out", said segments vertically overlapping for a distance such that the ratio of the length of vertical overlap and the distance between the segments is greater than or equal to a predetermined amount indicative of the visual recognition of a stroke;

means for identifying certain Y coordinates of the frame points as Y master coordinates if the frame point is an extreme in the vertical direction or if the frame point is an end point of a line segment which is a horizontal or almost horizontal side of the frame;

means for forming Y master segments,said Y master segments approximating a portion of the character frame, said master segments defined as a horizontal line segment which extends in a right and left direction away from a Y master coordinate until each end point of the line segment is a predetermined vertical distance away from the frame;

means for identifying the direction of the Y master segments, the direction of the master segments corresponding to the direction of the frame the segment approximates, the direction of the frame dictated by the contour convention applied;

means for identifying said Y master segments as having an "in" color if the segment is identified as being in the leftward direction;

means for identifying said Y master segments as having an "out" color if the segment is identified as being in the rightward direction; and

means for identifying certain pairs of Y master segments as Y strokes if two adjacent segments horizontally overlap and the upper segment is colored "in" and the lower segment is colored "out", said segments horizontally overlapping for a distance such that the ratio of the length of overlap and the distance between the segments is greater than or equal to a predetermined amount indicative of the visual recognition of a stroke.

194. The apparatus of claim 193 wherein the means for forming a frame for each character further comprises:

means for constructing a polygon by connecting the control points of the character by the sequence they are ordered according to the direction of the frame;

means for assigning each control point a property retained (R) or non-retained (N) wherein the control points which correspond to the end points of arcs of the character are retained and the remaining control points are assigned the property non-retained;

means for simplifying the polygon by eliminating the control points which are not necessary to maintain the fundamental visual properties of the character said means comprising:

in a sequence of polygon sides <R-N-N-R>, means for deleting the central side between the two non-retained points and extending the surrounding sides until they intersect on another at a new point which is labeled non-retained;

in a series of aligned points, means for eliminating the points between the two extreme points and if the sequence contains two or more retained points or if at least one of its points is an inflection point, the two extreme points are labeled retained;

in a sequence of points <R-N-N . . . N-R>, means for eliminating all sides lying between consecutive end points and

COMMONWEALTH PATENT OFFICE Sec. 77

extending the ends of the sides, bounded by R-N and N-R points, towards one another until they intersect at a new point which is labeled retained.

whereby the non-retained points are eliminated thereby simplifying the polygon into a series of retained points.

195. The apparatus of claim 193 wherein an almost vertical side is a line having a slope in the range 1:5 to 1:20.

196. The apparatus of claim 193 wherein the predetermined horizontal distance away from the frame that a master segment extends is approximately one-half the maximum pixel size used to generate the typeface.

197. The apparatus of claim 193 wherein the predetermined horizontal distance is in the range of .01 to .02 of the distance defined by the sum of the ascender and descender heights of a typeface.

198. The apparatus of claim 193 wherein the predetermined ratio indicative of a stroke is 1:1

199. The apparatus of claim 193 wherein an almost horizontal line is a line having a slope in the range of 5:1 to 20:1.

200. The apparatus of claim 193 wherein the predetermined vertical distance away from the frame that a master segment extends is approximately one-half the maximum pixel size used to generate the typeface.

201. The apparatus of claim 193 wherein the predetermined vertical distance is in the range of .01 to .02 of the distance defined by the sum of the ascender and descender heights of a typeface.

202. An apparatus for of adjusting in the horizontal direction at least one character of a digital typeface, each character defined by a plurality of frame

COMMONWEALTH PATENT OFFICE Sec. 77

points which form the frame of the character; said character further described by a plurality of X strokes indicative of important visual elements with respect to the X coordinates of the frame, said strokes defined by the frame points of the character, wherein the frame points are represented by X-Y coordinate pairs and a typeface is generated for a particular scale said apparatus comprising:

means for identifying the X strokes as strong X strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than or equal to a predetermined amount indicative of a strong stroke;

means for constructing an X main street comprising non-horizontally overlapping strong X strokes, prioritized in order of length, said X main street indicative of high priority visual components of a character;

means for globally adjusting the thicknesses of the X strokes of the typeface relative to all strokes of the typeface thereby regularizing the thicknesses of the X strokes ;

means for adjusting in the horizontal direction X white space which occurs between X stokes on main street, said white space being proportionately scaled and adjusted in order to preserve the total width of the character; [and]

means for adjusting the coordinates of the X main street strokes such that the location of the strokes relative to one another is determined according to the adjusted white space between strokes; and

means for adjusting the X coordinates of the frame points of the X strokes not on X main street wherein the amount of adjustment of the X coordinates is dependent upon the higher priority adjusted X strokes and the X white space between the X main street strokes;

wherein the width of the character and the symmetries and spatial relationships among the strokes of the characters of the typeface are preserved.

PATENT OFFICE

203. The apparatus of claim 202 wherein the step of globally adjusting the thicknesses of X strokes comprises:

means for storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said priority determinative of the frequency a stroke thickness occurs in the typeface;

means for setting the priority of the smallest value to the highest priority;

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

means for adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

means for determining the next value to be adjusted from the index stored in the third array;

means for adjusting the remaining values in order of priority said adjustment process comprising:

means for determining the largest value which was adjusted and is smaller than the current value to be adjusted;

means for determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is

COMMONWEALTH PATENT OFFICE Sec. 77

the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted , V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

204. The apparatus of claim 202 wherein the predetermined amount indicative of a strong stroke is 1.5:1.

205. The apparatus of claim 202 wherein the step of adjusting in the horizontal direction X white space which occurs between X main street strokes comprises the steps of:

means for calculating a X white space scale factor according to the difference of the total width of the character and the total adjusted stroke thicknesses of the strokes on X main street, divided by the total amount of X white space;

means for scaling the X white space by multiplying the X white space by the X white space scale factor;

means for proportionately adjusting the scaled X white space to preserve the symmetry of the size of the X white space contained within each character.

COMMONWEALTH PATENT OFFICE Sec. 77

206. The apparatus of claim 205 wherein the step of proportionately adjusting the scaled white space comprises the steps of:

means for storing an "n" number of adjusted white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionally determined according to the frequency a scaled white space value occurs;

means for setting the priority of the smallest value to the highest priority;

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

means for adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

means for determining the next value to be adjusted from the index stored in the third array;

means for adjusting the remaining values in order of priority said adjusting process comprising:

means for determining the largest value which was adjusted and is smaller than the current value to be adjusted;

means for determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is

COMMONWEALTH PATENT OFFICE Sec. 77

the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

207. The apparatus of claim 202 wherein the means for adjusting the X coordinates of the frame points of the strokes not on X main street comprises means for aligning a side of each stroke with the closest main street stroke side and a means for adjusting the other side of the stroke according to the adjusted stroke thickness.

208. The apparatus of claim 207 wherein the means for aligning a side of each stroke with the closest main street stroke side comprises:

means for determining the side of the stroke which is closest to a side of a stroke on X main street;

means for calculating the adjusted X coordinate of the side closest to a side of a stroke on X main street according to the following equation:

$$X_c' = X_{mc}' - R((|X_{mc}-X_c|)*S_m)$$

where Xc and Xc' are respectively the value and adjusted value of the side of the stroke closest to a side of an X main street stroke, Xmc and Xmc' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and Sm is the scale factor between the main street stroke sides closest to the right and to the left of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$Sm = \frac{(X_{Mc}' - X_{Mf}') * S}{(X_{Mc} - X_{Mf})}$$

where X_{Mf} and X_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

209. An apparatus for adjusting in the vertical direction at least one character of a digital typeface, each character defined by a plurality of frame points which form the frame of the character, said character further described by a plurality of Y strokes indicative of strong visual elements with respect to the Y coordinates of the frame, said strokes formed by two Y segments, said strokes defined by the frame points of the character wherein the frame points are represented by X-Y coordinate pairs and a typeface is generated for a particular scale, said apparatus comprising:

means for globally adjusting the thicknesses of the Y strokes of the typeface relative to the strokes of the typeface thereby regularizing the thicknesses of the Y strokes;

means for identifying the Y strokes as strong Y strokes if the ratio of the length of the stroke and the thickness of the stroke is greater than a predetermined amount indicative of a strong stroke;

means for constructing an Y main street comprising non-vertically overlapping strong Y strokes, prioritized in order of length, said Y main street indicative of high priority visual components of a character;



means for forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top extremes of characters of the typeface wherein no two consecutive Y coordinate values are are more than a predetermined distance apart;

means for forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

means for determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters being dependent on the number of extremes which comprise each cluster;.

means for identifying those Y main street strokes which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

means for adjusting the Y coordinates of the segments of Y main street strokes which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

means for if one segment of a Y main street stroke is adjusted by a Y alignment process, means for adjusting the Y coordinate of the other segment according to the thickness of the stroke;

means for adjusting the Y white space between Y main street strokes, said adjustment of Y white space dependent upon preserving the height of the character;

means for adjusting the Y coordinates of the Y main street strokes not adjusted according to a Y alignment process, said Y coordinates adjusted relative to the adjusted Y main street strokes;

COMMONWEALTH PATENT OFFICE Sec. 77

means for identifying those Y strokes not on Y main street which comprise at least one segment which is black convex and within the Y coordinate limits of an important cluster of the same type;

means for adjusting the Y coordinates of the segment of Y strokes not on Y main street which are black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface;

means for if one segment of a Y stroke not on main street is adjusted by a Y alignment process, means for adjusting the Y coordinate of the other segment according to the thickness of the stroke;

means for adjusting the Y coordinates of the remaining unadjusted
strokes relative to the adjusted Y main street strokes;

means for identifying those Y segments which did not form a stroke which are black convex and within the Y coordinate limits of an important cluster of the same type;

means for adjusting the Y coordinate of the segment which is black convex and within an important cluster of the same type by a Y alignment process wherein the Y coordinate of the segment is horizontally aligned with the proximate Y coordinates of other segments of characters of the typeface; and

means for adjusting the Y coordinates of the remaining unadjusted segments relative to the adjusted Y main street strokes.

210. The apparatus of claim 209 wherein the predetermined distance apart determinative of the formation of top extreme clusters and bottom extreme clusters is in the range of .005 to .01 of the sum of the ascender height and descender height of the typeface.

SEC. 77 PATENT OFFICE

211. The apparatus of claim 209 wherein the means for determining important top clusters and important bottom clusters further comprises means for determining a cluster to be an important top cluster if it is the extreme top cluster of all the top clusters; and means for determining a cluster to be an important bottom cluster if it is the extreme bottom cluster of all the bottom clusters.

212. The apparatus of claim 209 wherein in the means for determining important top clusters and important bottom clusters, a top cluster is an important top cluster if the cluster contains 10-20% of the total number of top extremes and at least 20-30% of the number of top extremes in the largest top cluster and a bottom cluster is an important bottom cluster if the cluster contains 10-20% of the total number of bottom extremes and at least 20-30% of the number of bottom extremes in the largest top cluster.

213. The apparatus of claim 209 wherein a segment is black convex if it is a top extreme or local top extreme and the segment has an "out" color direction or if the segment is a bottom extreme or local bottom extreme and has an "in" color direction.

214. The apparatus of claim 213 wherein a segment is a top segment if it has an "out " color direction and a segment is a bottom segment if it has an "in" color direction.

215. The apparatus of claim 209 wherein the means for globally adjusting the thicknesses of the Y strokes comprises:

means for storing an "n" number of stroke thickness values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted said

COMMONWEALTH PATENT OFFICE Sec. 77

priority determinative of the frequency a stroke thickness occurs in the typeface;

means for setting the priority of the smallest value to the highest priority;

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

means for adjusting the smallest value wherein the value is multiplied by the scale of the type face and rounded to the nearest grid position

means for determining the next value to be adjusted from the index stored in the third array;

means for adjusting the remaining values in order of priority said adjustment process comprising:

means for determining the largest value which was adjusted and is smaller than the current value to be adjusted;

means for determining the smallest value which was adjusted and is larger than the current value to be adjusted;

means for if there is no value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted , R is a function which

COMMONWEALTH PATENT OFFICE Sec. 77

rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted , V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original value of the smallest value which was adjusted and is larger than the current value to be adjusted.

216. The apparatus of claim 209 wherein the means for adjusting in the vertical direction Y white space which occurs between Y main street strokes comprises the steps of:

means for calculating a Y white space scale factor according to the difference between the total height of the character and the total adjusted stroke thicknesses of the strokes on Y main street, divided by the total amount of Y white space;

means for scaling the Y white space by multiplying the Y white space by the Y white space scale factor;

means for proportionately adjusting the scaled Y white space to preserve the symmetry of the size of the Y white space contained within each character.

217. The apparatus of claim 216 wherein the means for proportionately adjusting the scaled white space comprises:

means for storing an "n" number of scaled white space values to be adjusted in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be adjusted, proportionately determined according to the frequency a scaled white space value occurs;

means for setting the priority of the smallest value to the highest priority;

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

means for adjusting the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

means for determining the next value to be adjusted from the index stored in the third array;

means for adjusting the remaining values in order of priority said adjusting process comprising:

means for determining the largest value which was adjusted and is smaller than the current value to be adjusted;

means for determining the smallest value which was adjusted and is larger than the current value to be adjusted;

if there is no value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted and S is the scale of the typeface; and

if there is a value which is larger than the current value to be adjusted, means for calculating the adjusted current value according to the following equation:

$$A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))$$

where where A[m] is the adjusted value of the largest value which was adjusted and is smaller than the current value to be adjusted, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was adjusted and is larger than the current value to be adjusted, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was adjusted and is smaller than the current value to be adjusted, V[r] is the original

Sec. 77 PATENT OFFICE

value of the smallest value which was adjusted and is larger than the current value to be adjusted and S is the scale.

218. The apparatus of claim 209 wherein the means for adjusting the Y coordinates of the frame points of Y main street strokes not adjusted using the Y alignment process comprises means for aligning a side of each stroke with the closest adjusted main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

219. The apparatus of claim 218 wherein the means for aligning a side of each stroke with the closest main street stroke side comprises:

means for determining the side of the stroke which is closest to a side of an adjusted stroke on Y main street;

means for calculating the adjusted Y coordinate of the side closest to a side of an adjusted stroke on Y main street according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an adjusted Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the adjusted main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the adjusted main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

COMMONWEALTH PATENT OFFICE Sec. 77

220. The apparatus of claim 209 wherein the means for adjusting the Y coordinates of the frame points of strokes not on Y main street not adjusted using the Y alignment process comprises means for aligning a side of each stroke with the closest main street stroke side and adjusting the other side of the stroke according to the adjusted stroke thickness.

221. The apparatus of claim 220 wherein the means for aligning a side of each stroke with the closest main street stroke side comprises:

means for determining the side of the stroke which is closest to a side of a stroke on Y main street;

means for calculating the adjusted Y coordinate of the side closest to a side of a stroke on Y main street according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the stroke closest to a side of an Y main street stroke, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the stroke is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the stroke to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the stroke to be aligned and S represents the scale of the typeface.

222. The apparatus of claim 209 wherein the means for adjusting the Y coordinates of the remaining unadjusted Y segments comprises means for aligning the Y segment stroke with the closest main street stroke side.

COMMONWEALTH PATENT OFFICE Sec. 77

223. The apparatus of claim 222 wherein the means for aligning Y segments with the closest main street stroke side comprises:

means for determining the side of a main street stroke the segment is closest to;

means for calculating the adjusted Y coordinate of the segment according to the following equation:

$$Y_C' = Y_{Mc}' - R((|Y_{Mc}-Y_C|)*S_{ym})$$

where Yc and Yc' are respectively the value and adjusted value of the side of the Y segment, Y_{Mc} and Y_{Mc}' are respectively the value and adjusted value of the side of the main street stroke the segment is closest to, R represents the rounding of the value to the nearest grid point and S_{ym} is the scale factor between the main street strokes closest on the top and bottom of the segment to be adjusted, said scale factor being calculated according to the following equation:

$$S_{ym} = \frac{(Y_{Mc}'-Y_{Mf}') * S}{(Y_{Mc}-Y_{Mf})}$$

where Y_{Mf} and Y_{Mf}' are respectively the value and adjusted value of a side of a main street stroke on the side opposite the main street stroke side closest to the segment to be aligned and S represents the scale of the typeface.

224. The apparatus of claim 223 wherein the means for aligning the Y slave coordinates further comprises means for calculating the adjusted value of the Y slave coordinate according to the following equation:

$$Y_1' = Y_0' + f * (Y_2' - Y_0')$$

$$f = \frac{Y_1 - Y_0}{Y_2 - Y_0}$$

where Y1 and Y1' respectively are the value and adjusted value of the Y slave coordinate, Y0 and Y0' are respectively the value and adjusted value of the Y master coordinate of the frame point adjacent to the left of the Y slave coordinate, Y2 and Y2' respectively are the value and adjusted value of the Y

COMMONWEALTH PATENT OFFICE Sec. 77

master coordinate of the frame point adjacent to the right of the Y slave coordinate to be adjusted.

225. The apparatus for adjusting set forth in claim 209 wherein the apparatus for adjusting Y segments using a Y alignment process comprises:

means for determining the important Y coordinate, YIMPT, of the important cluster the segment is within, said YIMPT being the extreme top Y coordinate of the cluster if the cluster comprises top extremes and the extreme bottom Y coordinate of the cluster if the cluster comprises bottom extremes;

means for adjusting YIMPT to the nearest grid position;

means for adjusting the distance between YIMPT and the segment to be adjusted so that the distance is equal to an incremental value of the grid; and

means for adjusting the Y coordinate value of the segment to be equal to the sum of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is greater than or equal to YIMPT, and adjusting the Y coordinate value of the segment to be equal to the difference of adjusted values of YIMPT and the distance, if the Y coordinate value of the segment is less than YIMPT.

226. An apparatus for adjusting characters in a digital typeface by a Y alignment process, each character defined by a plurality of frame points which form the frame of the character, said frame points forming horizontal segments, referred to as Y segments, at the Y coordinate values of the frame points, said Y segments indicative of visual components of the character and approximates portions of the frame, said segments having a direction according to the direction of the frame the segment approximates, said apparatus comprising:

means for forming at least one top extreme cluster comprising a set of consecutive Y coordinate values of top

PATENT OFFICE Sec. 77

extremes of characters of the typeface wherein no two consecutive Y coordinate values are are more than a predetermined distance apart;

means for forming at least one bottom extreme cluster comprising a set of consecutive Y coordinate values of the bottom extremes of the characters of the typeface wherein no two consecutive Y coordinate values are more than a predetermined distance apart;

means for determining which top clusters are important top clusters and which bottom clusters are important bottom clusters, the importance of the clusters being dependent on the number of extremes which comprise each cluster;.

means for identifying those Y segments which are black convex and within the Y coordinate limits of an important cluster of the same type, the type of segment being dependent on the direction of the segment; and

means for adjusting the Y coordinate of the segment which is black convex and within an important cluster of the same type, said method of adjustment comprising:

means for determining the important Y coordinate, YIMPT, of the important cluster the segment is within, said YIMPT being the extreme top Y coordinate of the cluster if the cluster comprises top extremes and the extreme bottom Y coordinate of the cluster if the cluster comprises bottom extremes;

means for adjusting YIMPT to the nearest grid position;

means for adjusting the distance between YIMPT and the segment to be adjusted so that the distance is equal to an incremental value of the grid; and

means for adjusting the Y coordinate value of the segment to be equal to the sum of adjusted values of YIMPT and the distance, if the Y coordinate value of the

COMMONWEALTH PATENT OFFICE Scc. 77

segment is greater than or equal to YIMPT, and adjusting the Y coordinate value of the segment to be equal to the difference of adjusted values of YIMPT and the distance if the Y coordinate value of the segment is less than YIMPT.

227. The apparatus of claim 226 wherein the predetermined distance apart determinative of the formation of top extreme clusters and bottom extreme clusters is in the range of .005 to .01 of the sum of the ascender height and descender height of the typeface.

228. The apparatus of claim 226 wherein the means for determining important top clusters and important bottom clusters further comprises means for determining a cluster to be an important top cluster if it is the extreme top cluster of all the top clusters; and means for determining a cluster to be an important bottom cluster if it is the extreme bottom cluster of all the bottom clusters.

229. The apparatus of claim 226 wherein the predetermined distance apart determinative of the formation of top extreme clusters and bottom extreme clusters is in the range of .005 to .01 of the sum of the ascender height and descender height of the typeface.

230. The apparatus of claim 226 wherein the means for determining important top clusters and important bottom clusters further comprises means for determining a cluster to be an important top cluster if it is the extreme top cluster of all the top clusters; and means for determining a cluster to be an important bottom cluster if it is the extreme bottom cluster of all the bottom clusters.

231. The apparatus of claim 226 wherein in the means for determining important top clusters and important bottom clusters, a top cluster is an important top cluster if the cluster contains 10-20% of the total number of top extremes and at least 20-30% of the number of top extremes in the largest top cluster and a bottom cluster is an important bottom cluster if the cluster

contains 10-20% of the total number of bottom extremes and at least 20-30% of the number of bottom extremes in the largest top cluster.

232. The apparatus of claim 226 wherein a segment is black convex if it is a top extreme or local top extreme and the segment has an "out" color direction or if the segment is a bottom extreme or local bottom extreme and has an "in" color direction.

233. The apparatus of claim 232 wherein a segment is a top segment if it has an "out " color direction and a segment is a bottom segment if it has an "in" color direction.

234. An apparatus for enhancing the legibility of digital typefaces wherein the frame points which form the end points of diagonal segments of the character frame are modified, said apparatus comprising:

means for ordering all diagonal segments by slope;

means for forming groups of diagonal segments which are relatively close in angle;

means for rotating each group of diagonal segments by the complement of the average slope of the group such that the diagonal segments are approximately vertical;

means for identifying certain pairs of diagonal master segments as diagonal strokes if the two segments oppose one another in direction and, vertically overlap one another and the the ratio of the length of vertical overlap and the distance between segments is greater than a predetermined amount indicative of the visual recognition of a stroke;

means for adjusting the thickness of the diagonal strokes according to the adjusted thicknesses of horizontal or vertical strokes which were the same or approximately the same thickness prior to adjustment;

means for adjusting the frame points of the diagonal strokes to correspond to the adjusted thickness of the diagonal stroke,

wherein the thicknesses of adjacent strokes are preserved by displacing the frame points along the segments of the adjacent strokes.

235. The apparatus of claim 234 wherein the means for forming groups of diagonal segments which are relatively close in angle form groups of diagonal segments in the range of 10 to 20 degrees.

236. The apparatus of claim 234 wherein two segments oppose one another in direction if the left segment is colored "in" and the right segment is colored "out", a segment having an "in" color if the segment is oriented in the upward direction and a segment having an "out" color if the segment is oriented in the downward direction.

237. The apparatus of claim 234 wherein the predetermined amount of the ratio of the length of vertical overlap to the distance between segments indicative of the visual recognition of a stroke is 1:1.

238. The apparatus of claim 234 wherein the means for adjusting the thickness of the diagonal strokes comprises:

means for comparing the diagonal stroke thickness to the values of the horizontal and vertical stroke thicknesses;

if the diagonal stroke thickness is equal to a horizontal or vertical stroke thickness, means for adjusting the diagonal stroke thickness to be equal to the adjusted value of the horizontal or vertical stroke thickness;

if the diagonal stroke thickness is not equal to a horizontal or vertical stroke thickness, means for adjusting the diagonal stroke thickness according to the following equation:

$$TD' = TL'+(TR'-TL')*t$$

$$t=\frac{(TD-TL)}{(TR-TL)}$$

COMMONWEALTH OF AUSTRALIA Sec. 77 PATENT OFFICE

where TD and TD' respectively are the thickness and adjusted thickness of the diagonal stroke, TL is the closest horizontal or vertical stroke thickness less than TD, TR is the closest horizontal or vertical stroke thickness greater than TD and TL' and TR' respectively the adjusted values of TL and TR.

239. The apparatus of claim 234 wherein the means for adjusting the frame points of the diagonal strokes comprises:

if the frame point to be adjusted is preceded by a first segment to be adjusted and followed a second segment not to be adjusted during diagonal adjustment, means for adjusting the frame point according to the following equations:

$$X' = X + \Delta H * \cos(\alpha 2)$$
$$Y' = Y + \Delta H * \sin(\alpha 2)$$

$$\text{and } \Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH is the distance the frame point is to be move along the second segment to the location of the adjusted frame point where the adjusted first segment intersects the second segment, d is the distance the first segment is to be adjusted, equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is preceded by a first segment not to be adjusted and followed a second segment to be adjusted during diagonal adjustment, means for adjusting the frame point according to the following equations:

$$X' = X + \Delta H * \cos(\alpha 1)$$
$$Y' = Y + \Delta H * \sin(\alpha 1)$$

$$\text{and } \Delta H = \frac{d}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH is the distance the frame point is to be move along the first segment to the location of the adjusted frame point where the adjusted second segment intersects the first segment, d is the distance the second segment is to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is between two segments that are both to be adjusted , wherein the first segment is adjusted a distance d1 and the second segment adjusted a distance d2, means for adjusting the frame point according to the following equations:

$$X' = X + \Delta X_1 + \Delta X_2$$
$$Y' = Y + \Delta Y_1 + \Delta Y_2$$

where $\Delta X1$ and $\Delta Y1$ are calculated for the case that the frame point is preceded by a first segment to be adjusted a distance d1 followed by a second segment not to be adjusted whereby $\Delta X1$ and $\Delta Y1$ are calculated according to the following equations:

$$\Delta X_1 = \Delta H_1 * \cos(\alpha 2)$$
$$\Delta Y_1 = \Delta H_1 * \sin(\alpha 2)$$

$$\text{and } \Delta H_1 = \frac{d1}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH_1 is the distance the frame point is to be move along the second segment to the location of the adjusted frame point where the adjusted first segment intersects the second segment, d1 is the distance the first segment is to be adjusted, equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment; and

COMMONWEALTH PATENT OFFICE Sec. 77

where $\Delta X2$ and $\Delta Y2$ are calculated for the case that the frame point is preceded by a first segment not to be adjusted followed by a second segment to be adjusted a distance d2 whereby $\Delta X2$ and $\Delta Y2$ are calculated according to the following equations:

$$\Delta X_2 = \Delta H_2 * \cos(\alpha 1)$$
$$\Delta Y_2 = \Delta H_2 * \sin(\alpha 1)$$

$$\text{and } \Delta H_2 = \frac{d2}{\sin(\alpha 2 - \alpha 1)}$$

where ΔH_2 is the distance the frame point is to be move along the first segment to the location of the adjusted frame point where the adjusted second segment intersects the first segment, d2 is the distance the second segment is to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment;

if the frame point to be adjusted is between two segments that are both to be adjusted by the same distance d, means for adjusting the frame point according to the following equations:

$$X' = X + \Delta X$$
$$Y' = Y + \Delta Y$$

$$\Delta X = \frac{d^* \cos(\alpha 1)}{\sin(\alpha 2 - \alpha 1)} \qquad \Delta Y = \frac{d^* \sin(\alpha 1)}{\sin(\alpha 2 - \alpha 1)}$$

where d is the distance the segments are to be adjusted, said amount to be adjusted being equal to one half the difference between the adjusted thickness and the original thickness of the diagonal stroke, $\alpha 1$ is the angle of the slope of the first segment and $\alpha 2$ is the angle of the slope of the second segment.

COMMONWEALTH PATENT OFFICE Sec. 71

240. An apparatus for scaling distances in a digital typeface at a given scale of a typeface comprising:

means for storing an "n" number of values to be scaled in a first indexed array, said values stored in the array in order of increasing value;

means for storing in a second indexed array corresponding to the first array, a priority of the values stored in the first array which define the order which the values are to be scaled;

means for setting the priority of the smallest value to the highest priority;

means for storing in a third indexed array corresponding to the first array, the index of the first array element having a priority immediately lower than the current indexed array element;

means for scaling the smallest value wherein the value is multiplied by the scale of the typeface and rounded to the nearest grid position

means for determining the next value to be scaled from the index stored in the third array;

means for scaling the remaining values in order of priority said scaling process comprising:

means for determining the largest value which was scaled and is smaller than the current value to be scaled;

means for determining the smallest value which was scaled and is larger than the current value to be scaled;

means for calculating the scaled current value according to the following equation if there is no value which is larger than the current value to be scaled:

$$A[m] + R((V[k]-V[m])*S)$$

where A[m] is the adjusted value of the largest value which was scaled and is smaller than the current value to be scaled, R is a function which rounds the number to the closest grid position, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was scaled and is smaller than the current value to be scaled and S is the scale of the typeface; and

means for calculating the scaled current value according to the following equation if there is a value which is larger than the current value to be scaled:

A[m]+R((A[r]-A[m])*(V[k]-V[m])/(V[r]-V[m]))

where where A[m] is the adjusted value of the largest value which was scaled and is smaller than the current value to be scaled, R is a function which rounds the number to the closest grid position, A[r] is the smallest value which was scaled and is larger than the current value to be scaled, V[k] is the value to be adjusted, V[m] is the original value of the largest value which was scaled and is smaller than the current value to be scaled, V[r] is the original value of the smallest value which was scaled and is larger than the current value to be scaled.

241. In a digital typeface of characters wherein each character the typeface is described in a format using control points comprising X-Y coordinate pairs a an apparatus for classifying the coordinates of the control points into classes of master and slave coordinates, said apparatus comprising:

means for forming a frame for each character from said control points each frame being a simplified visual representation of a corresponding character, said frame represented by a plurality of frame points comprising X-Y coordinate pairs;

means for identifying certain Y coordinates of the frame points as Y master coordinates if the frame point is an extreme in the vertical direction or if the frame point is an end point of a line segment which is a horizontal or almost horizontal side of the frame;

means for identifying the Y coordinates of the frame points not identified as Y master coordinates as Y slave coordinates;

whereby the master coordinates are adjusted to be located on integer grid positions and the slave coordinates are proportionately adjusted according to the adjusted master coordinates.

242. The apparatus of claim 241 wherein said frame has a direction corresponding to the direction of the character and the step of forming a frame for each character further comprises the steps of:

means for constructing a polygon by connecting the control points of the character by the sequence they are ordered according to the direction of the frame;

means for assigning each control point a property retained (R) or non-retained (N) wherein the control points which correspond to the end points of arcs of the character are retained and the remaining control points are assigned the property non-retained;

means for simplifying the polygon by eliminating the control points which are not necessary to maintain the fundamental visual properties of the character said means comprising:

in a sequence of polygon sides <R-N-N-R>, means for deleting the central side between the two non-retained points and extending the surrounding sides until they intersect on another at a new point which is labeled non-retained;

in a series of aligned points, means for eliminating the points between the two extreme points and if the sequence contains two or more retained points or if at least one of its points is an inflection point, the two extreme points are labeled retained;

in a sequence of points <R-N-N . . . N-R>, means for eliminating all sides lying between consecutive end points and extending the ends of the sides, bounded by R-N and N-R points, towards one another until they intersect at a new point which is labeled retained.

whereby the non-retained points are eliminated thereby simplifying the polygon into a series of retained points.



243 A method of minimising the visual degradation of digital typefaces substantially as hereinbefore described with reference to the accompanying drawings.

244. An apparatus for minimising the visual degradation of digital typefaces substantially as hereinbefore described with reference to the accompanying drawings.

DATED this 8th day of July, 1992

SUN MICROSYSTEMS, INC.
By its Patent Attorneys
DAVIES COLLISON CAVE

AUSTRALIAN PATENT OFFICE LS

6 6 89 34586

Fig. 1

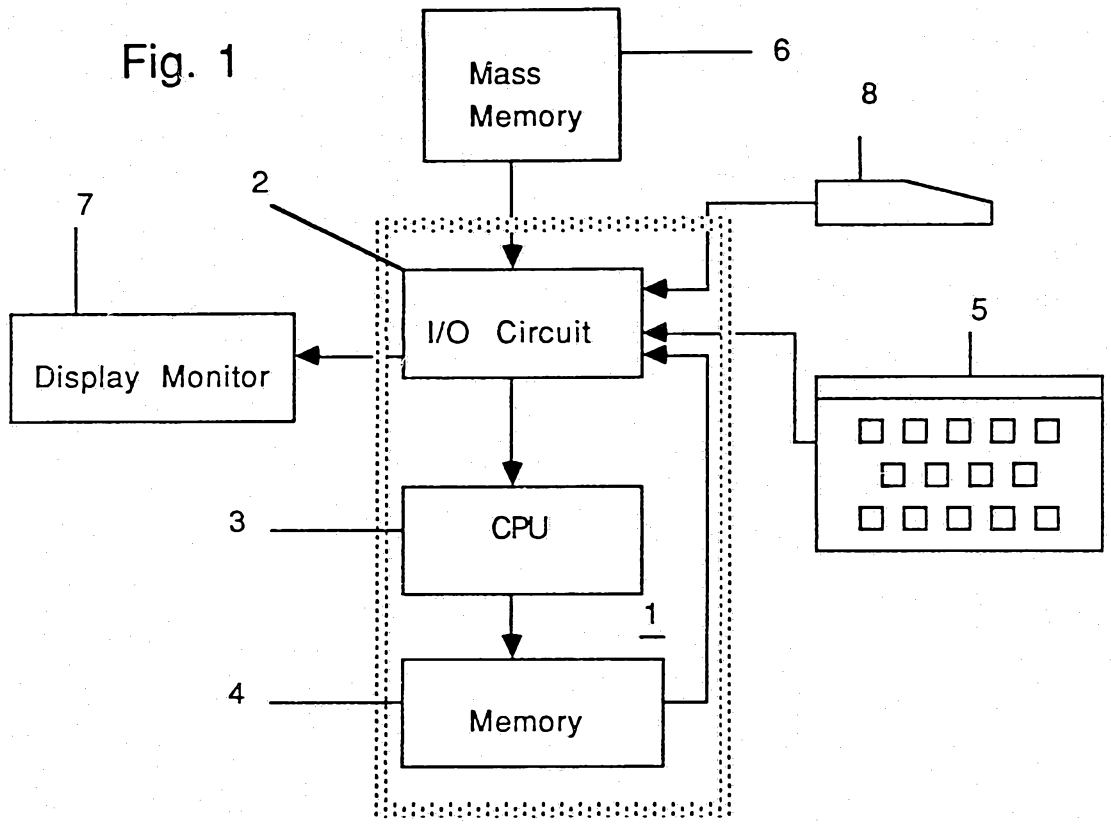

34584/89

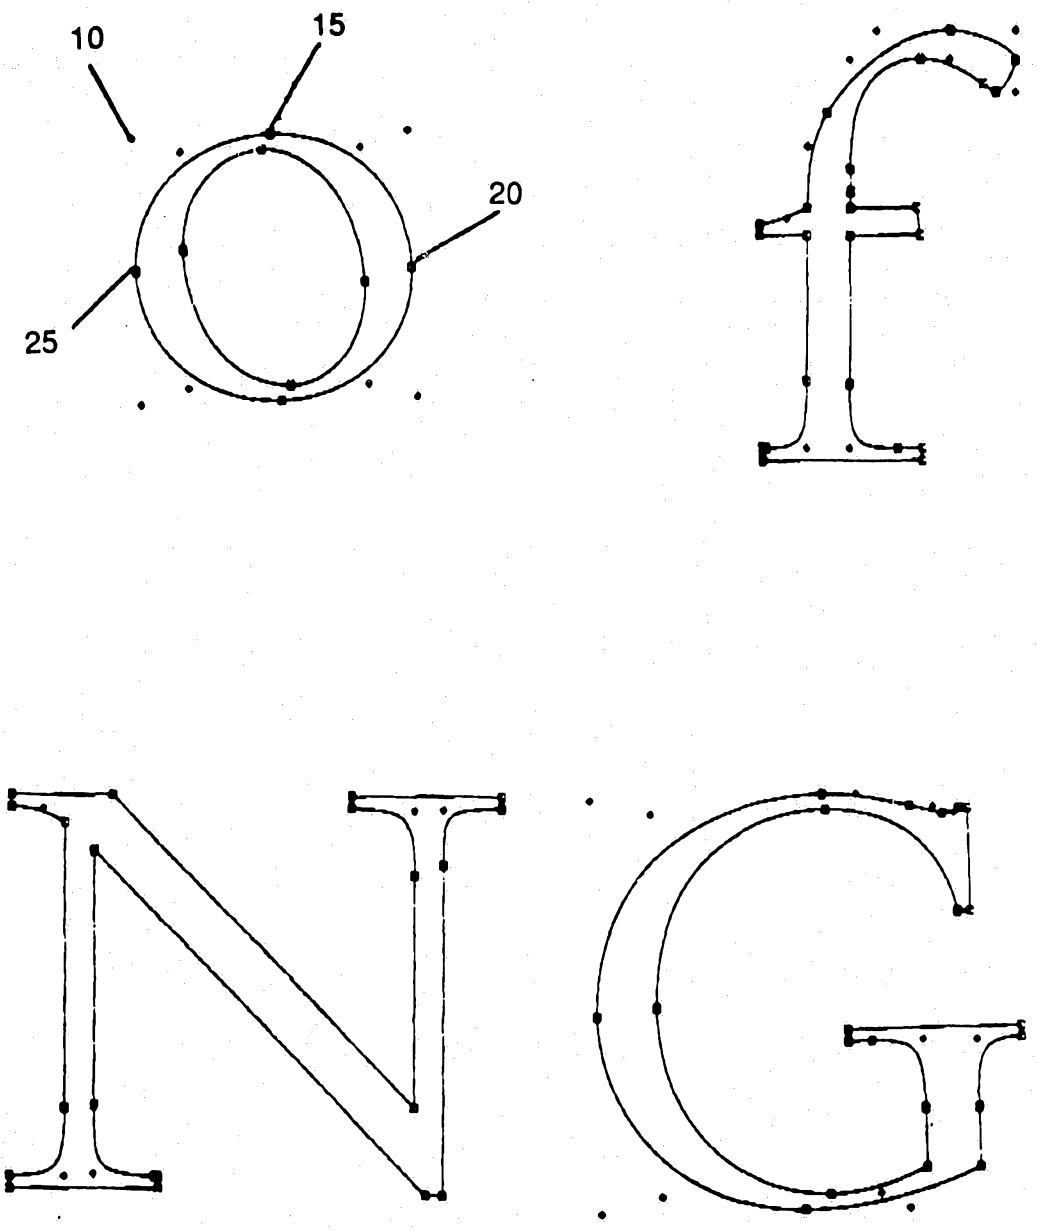

Fig. 2a

Fig. 2b

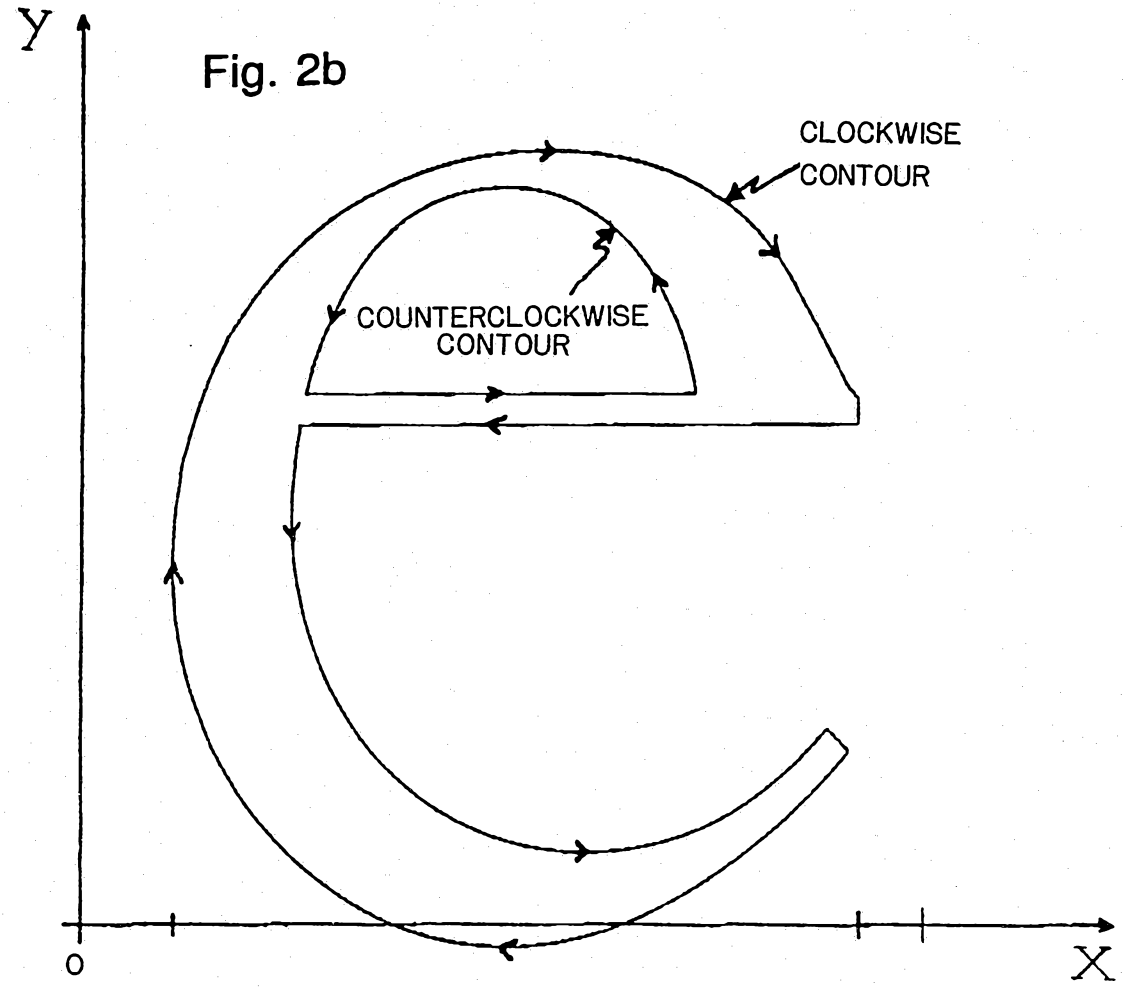

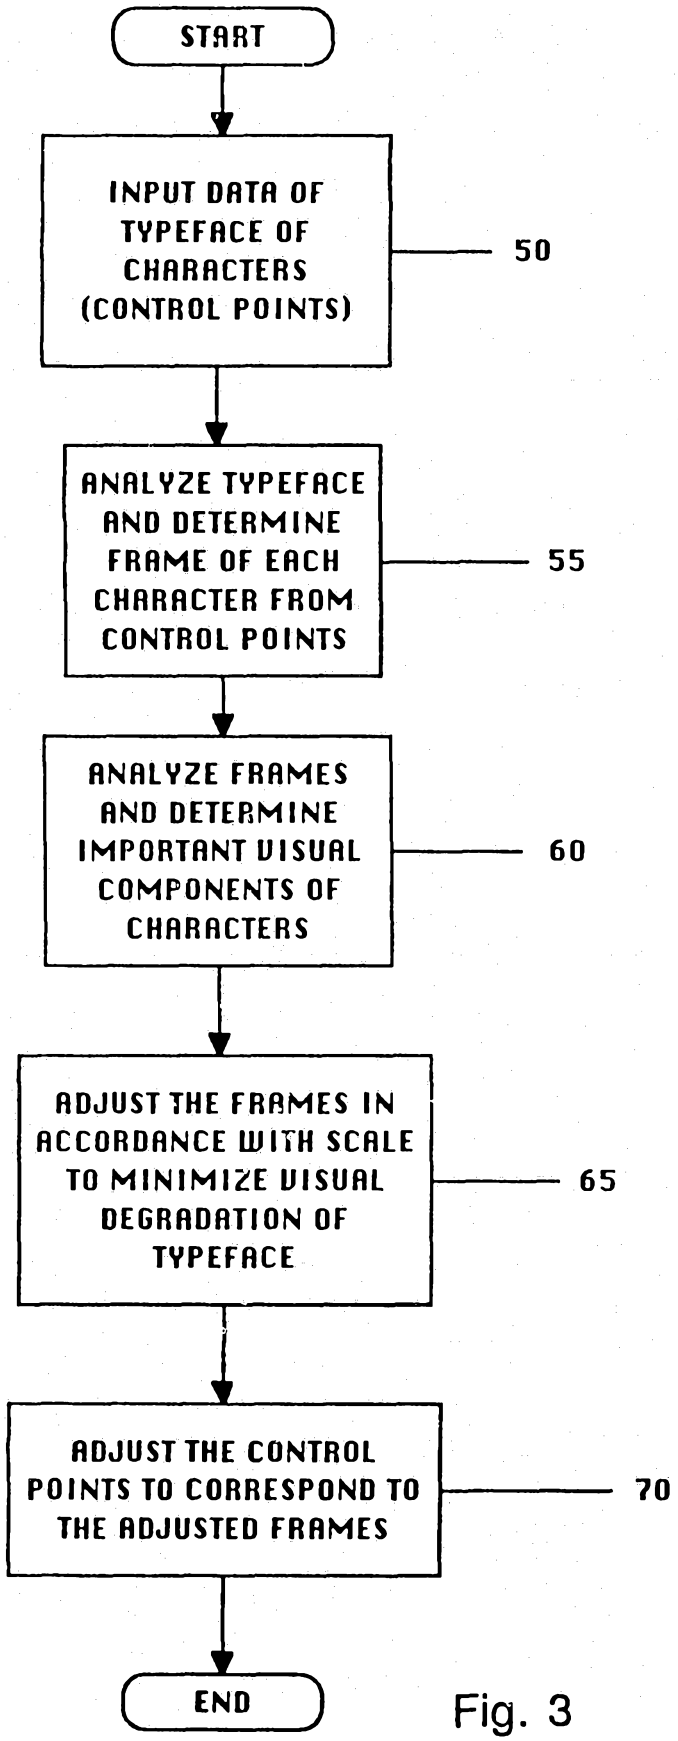
START
INPUT DATA OF TYPEFACE OF CHARACTERS (CONTROL POINTS)
50
ANALYZE TYPEFACE AND DETERMINE FRAME OF EACH CHARACTER FROM CONTROL POINTS
55
ANALYZE FRAMES AND DETERMINE IMPORTANT VISUAL COMPONENTS OF CHARACTERS
60
ADJUST THE FRAMES IN ACCORDANCE WITH SCALE TO MINIMIZE VISUAL DEGRADATION OF TYPEFACE
65
ADJUST THE CONTROL POINTS TO CORRESPOND TO THE ADJUSTED FRAMES
70
END

Fig. 3

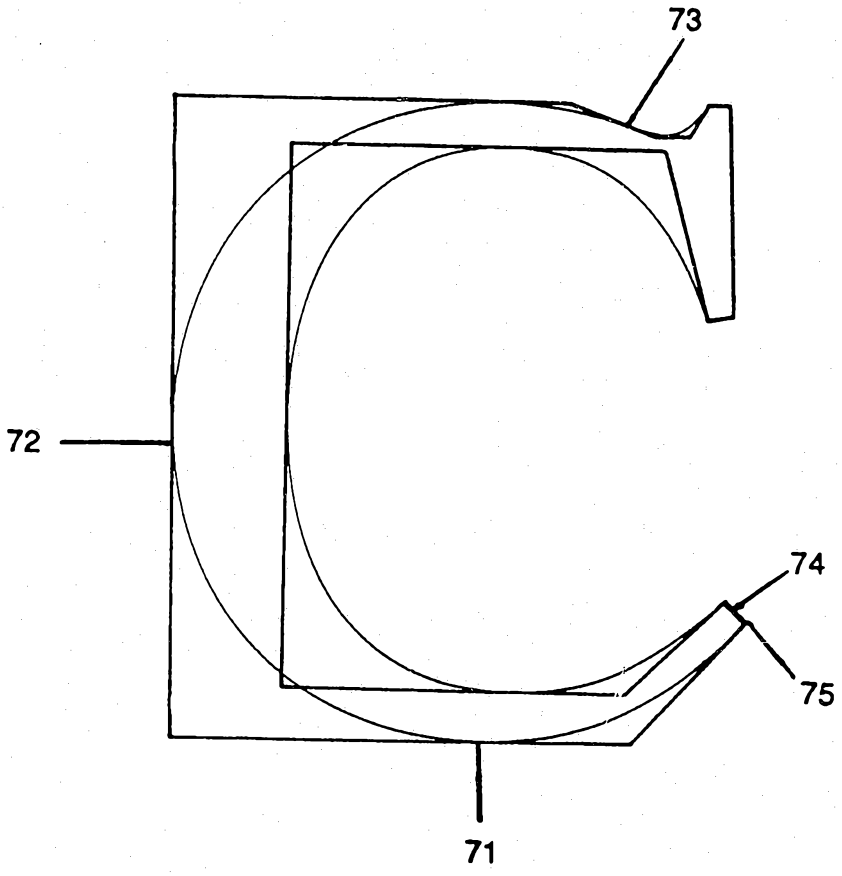

Fig. 4a

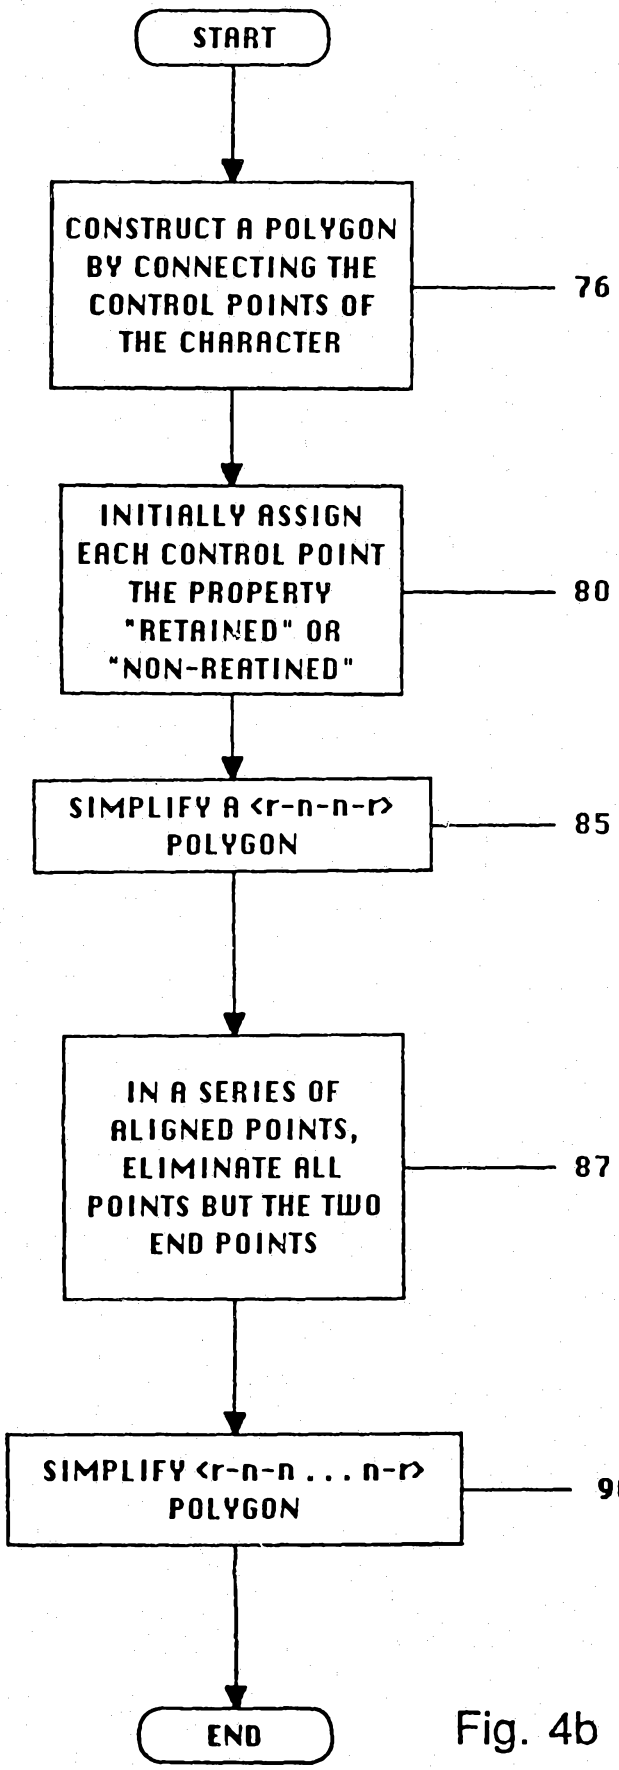
START
CONSTRUCT A POLYGON BY CONNECTING THE CONTROL POINTS OF THE CHARACTER
76
INITIALLY ASSIGN EACH CONTROL POINT THE PROPERTY "RETAINED" OR "NON-RETAINED"
80
SIMPLIFY A <r-n-n-r> POLYGON
85
IN A SERIES OF ALIGNED POINTS, ELIMINATE ALL POINTS BUT THE TWO END POINTS
87
SIMPLIFY <r-n-n . . . n-r> POLYGON
90
END

Fig. 4b

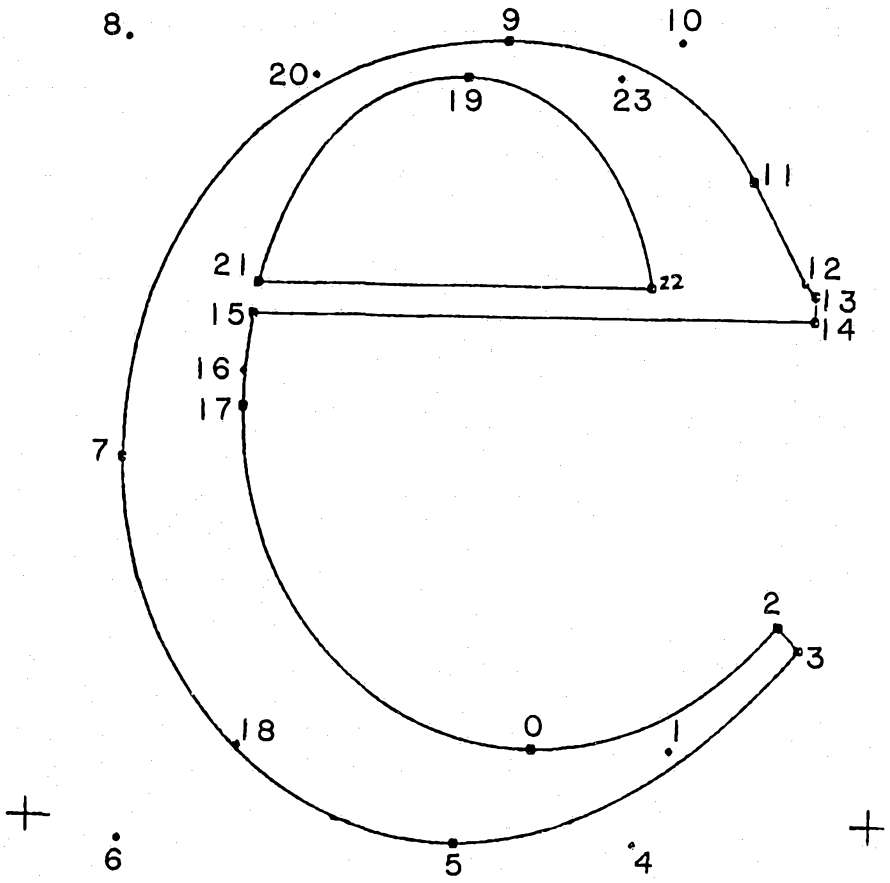

Fig. 5

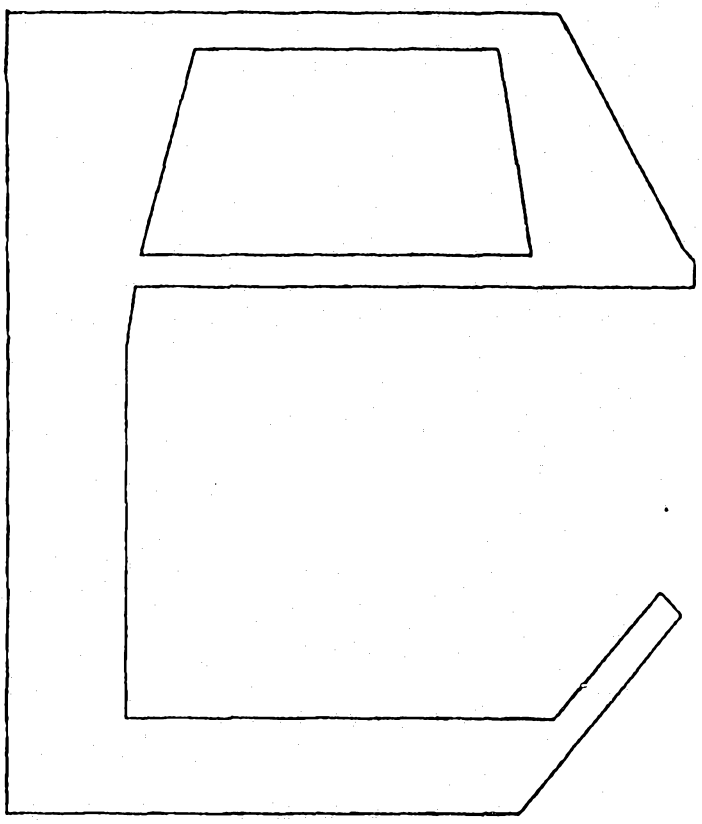

Fig. 6

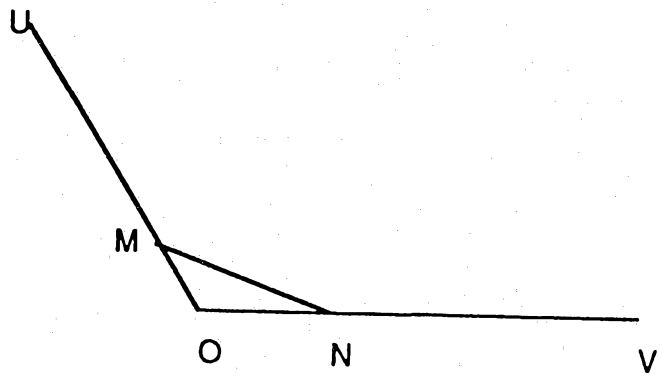

Fig 7a

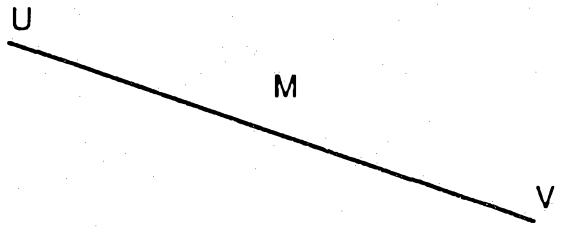

Fig 7b

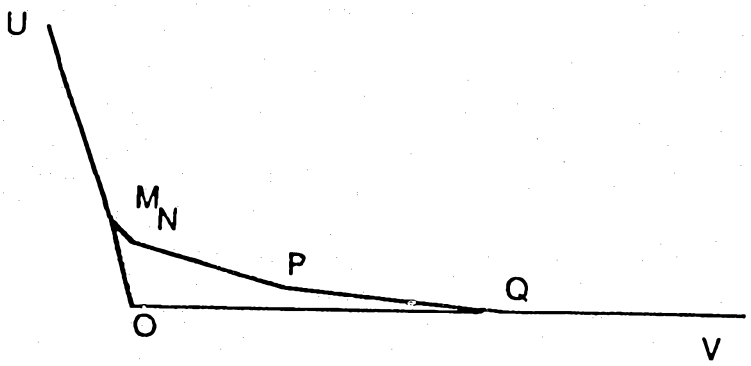

Fig 7c

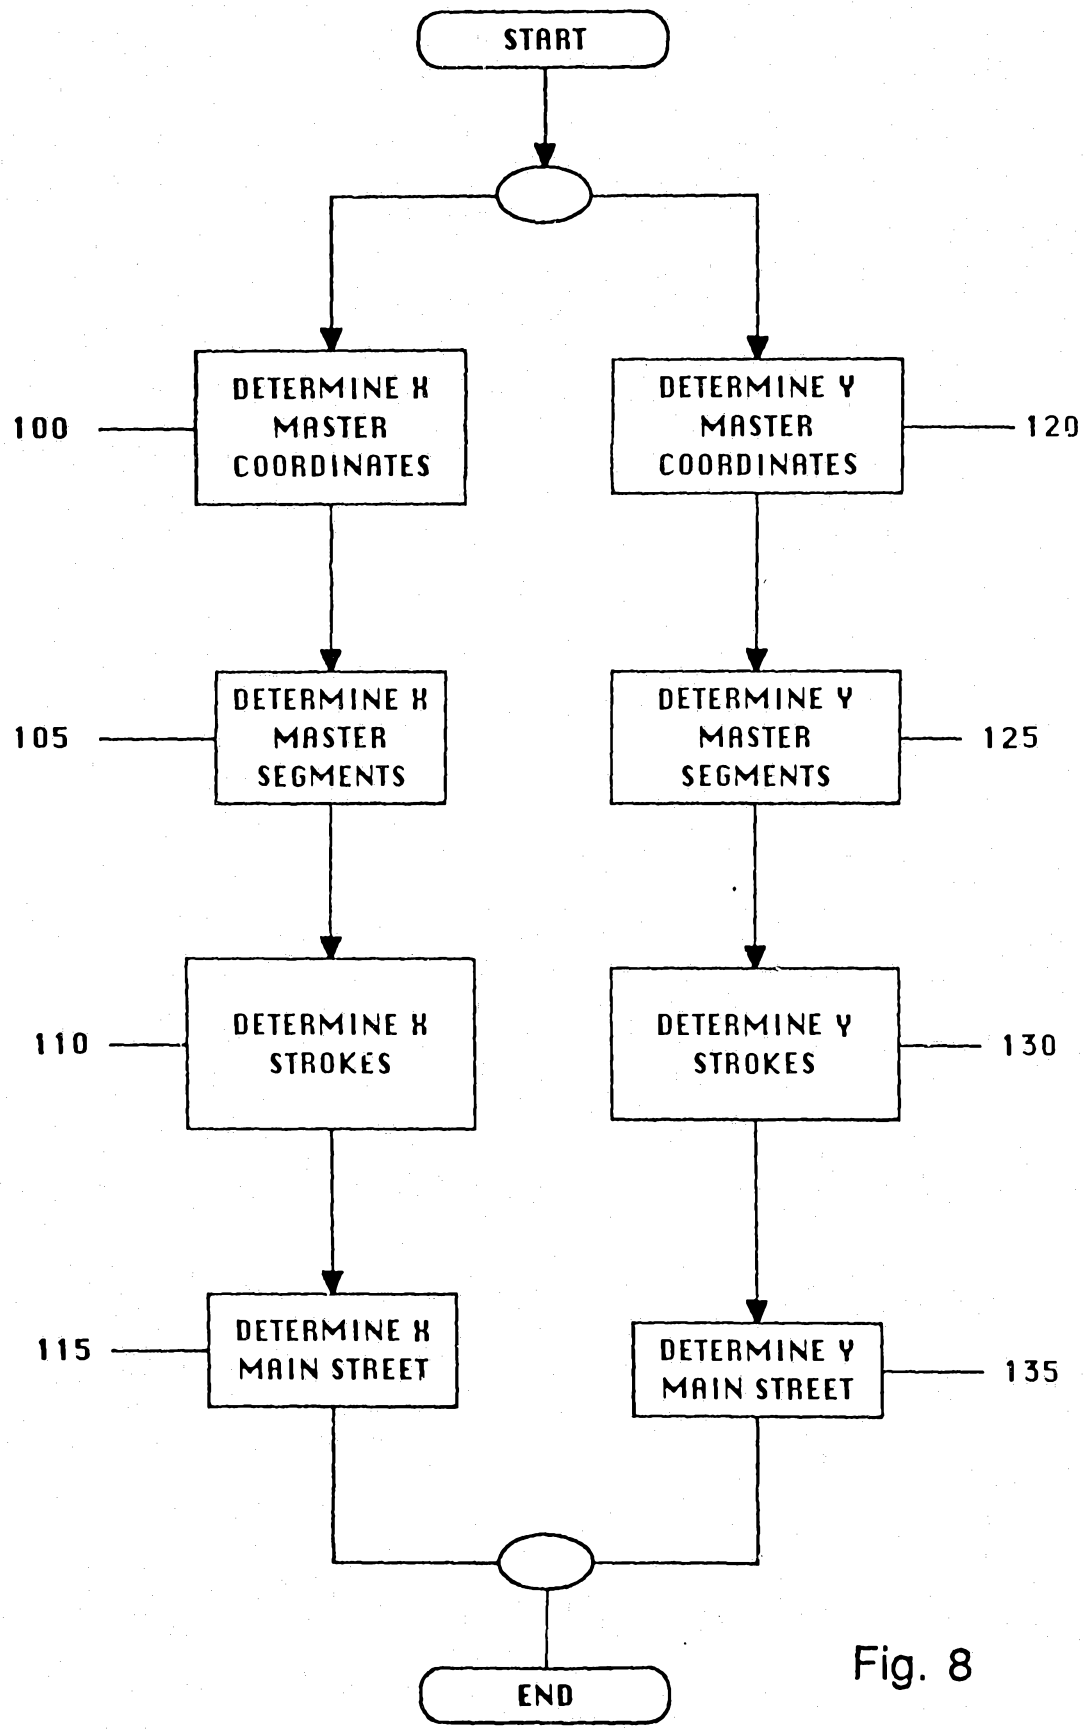
START
100
DETERMINE X MASTER COORDINATES
120
DETERMINE Y MASTER COORDINATES
105
DETERMINE X MASTER SEGMENTS
125
DETERMINE Y MASTER SEGMENTS
110
DETERMINE X STROKES
130
DETERMINE Y STROKES
115
DETERMINE X MAIN STREET
135
DETERMINE Y MAIN STREET
END

Fig. 8

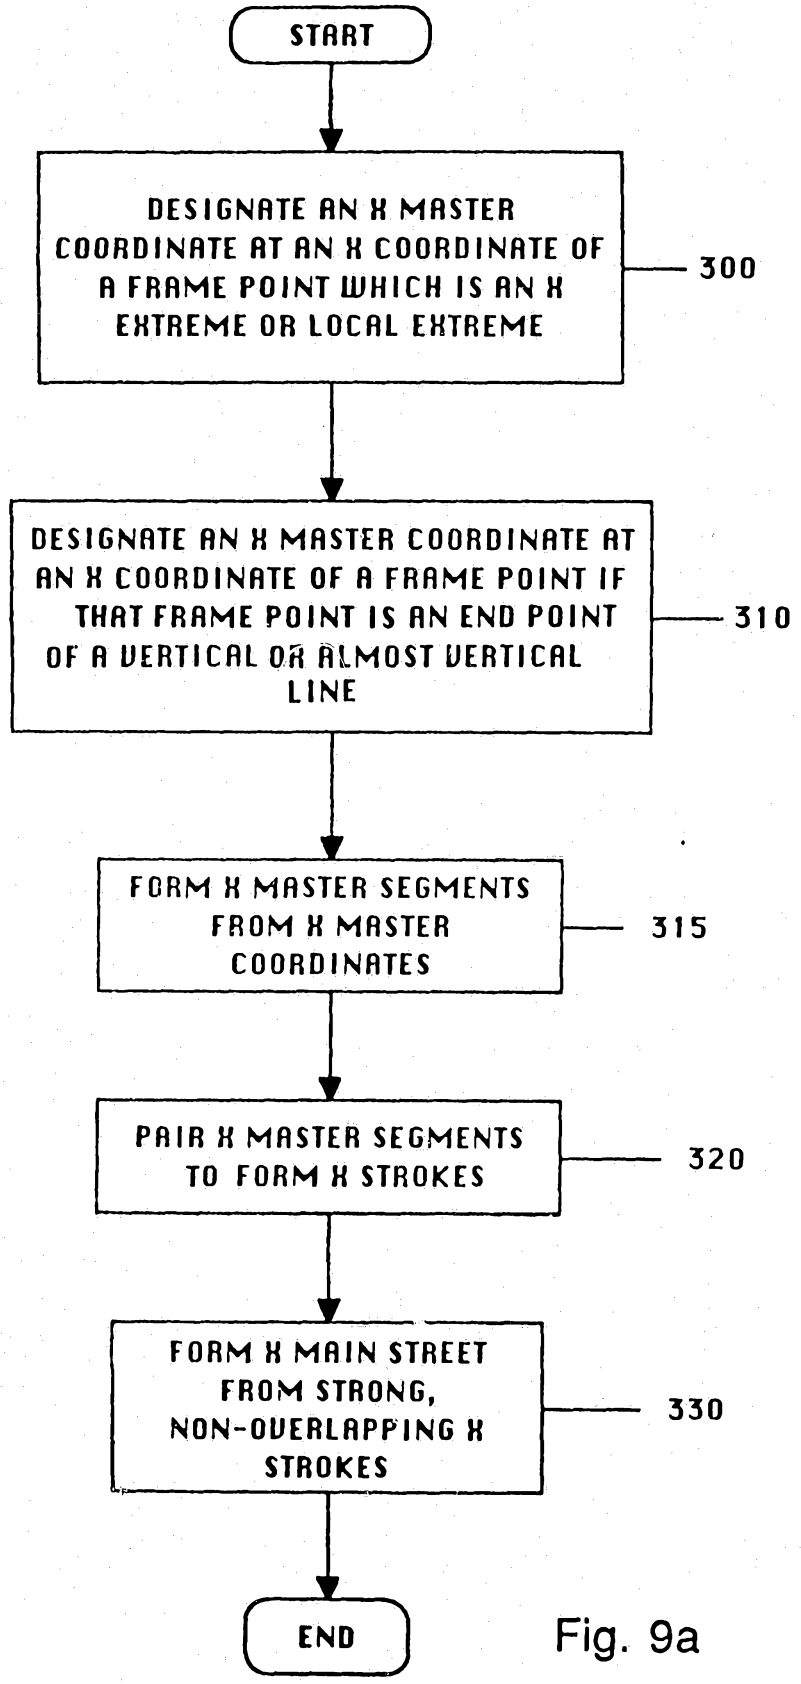
START
DESIGNATE AN X MASTER COORDINATE AT AN X COORDINATE OF A FRAME POINT WHICH IS AN X EXTREME OR LOCAL EXTREME
300
DESIGNATE AN X MASTER COORDINATE AT AN X COORDINATE OF A FRAME POINT IF THAT FRAME POINT IS AN END POINT OF A VERTICAL OR ALMOST VERTICAL LINE
310
FORM X MASTER SEGMENTS FROM X MASTER COORDINATES
315
PAIR X MASTER SEGMENTS TO FORM X STROKES
320
FORM X MAIN STREET FROM STRONG, NON-OVERLAPPING X STROKES
330
END

Fig. 9a

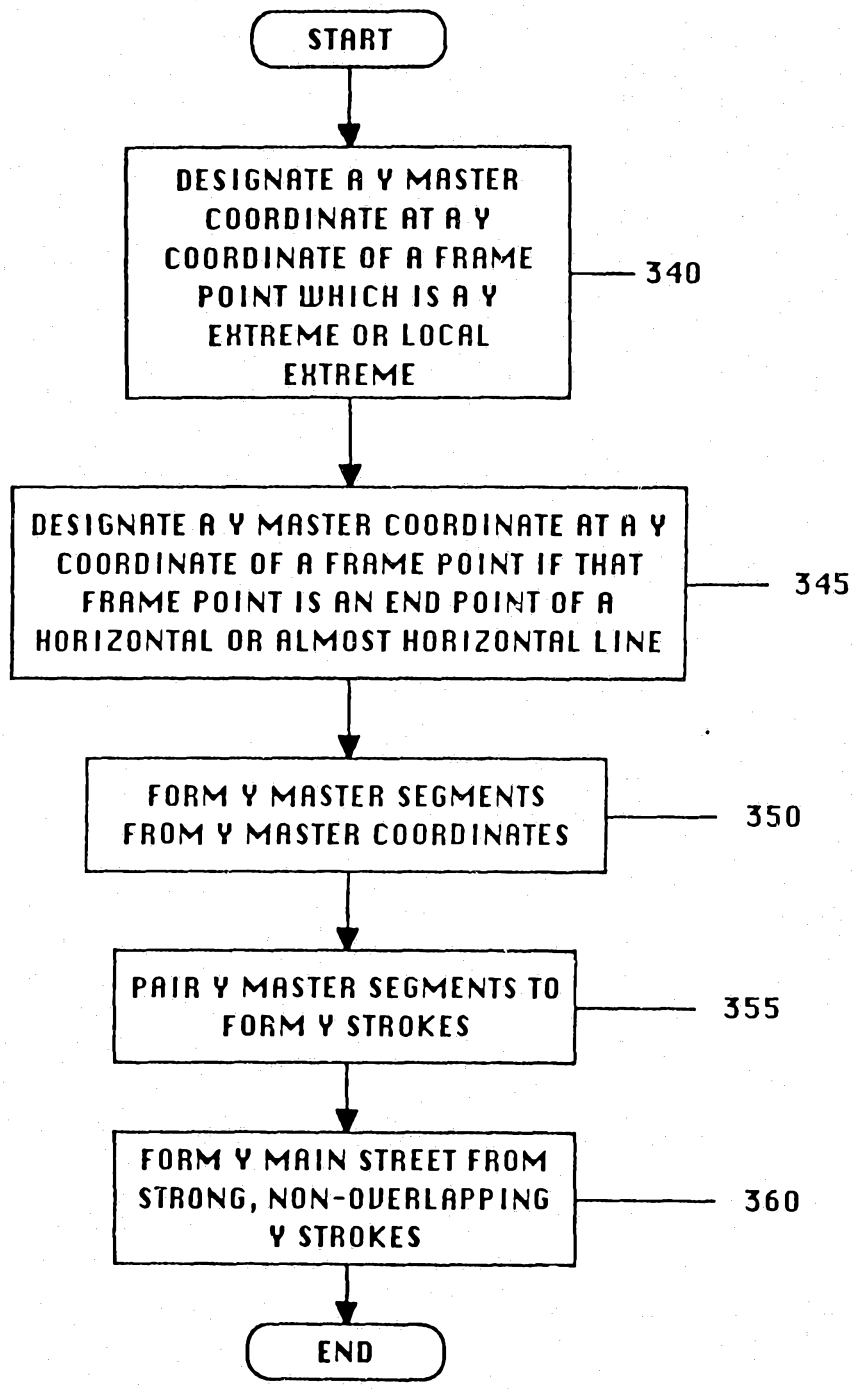
START
DESIGNATE A Y MASTER COORDINATE AT A Y COORDINATE OF A FRAME POINT WHICH IS A Y EXTREME OR LOCAL EXTREME
340
DESIGNATE A Y MASTER COORDINATE AT A Y COORDINATE OF A FRAME POINT IF THAT FRAME POINT IS AN END POINT OF A HORIZONTAL OR ALMOST HORIZONTAL LINE
345
FORM Y MASTER SEGMENTS FROM Y MASTER COORDINATES
350
PAIR Y MASTER SEGMENTS TO FORM Y STROKES
355
FORM Y MAIN STREET FROM STRONG, NON-OVERLAPPING Y STROKES
360
END

Fig. 9b

Fig. 10a

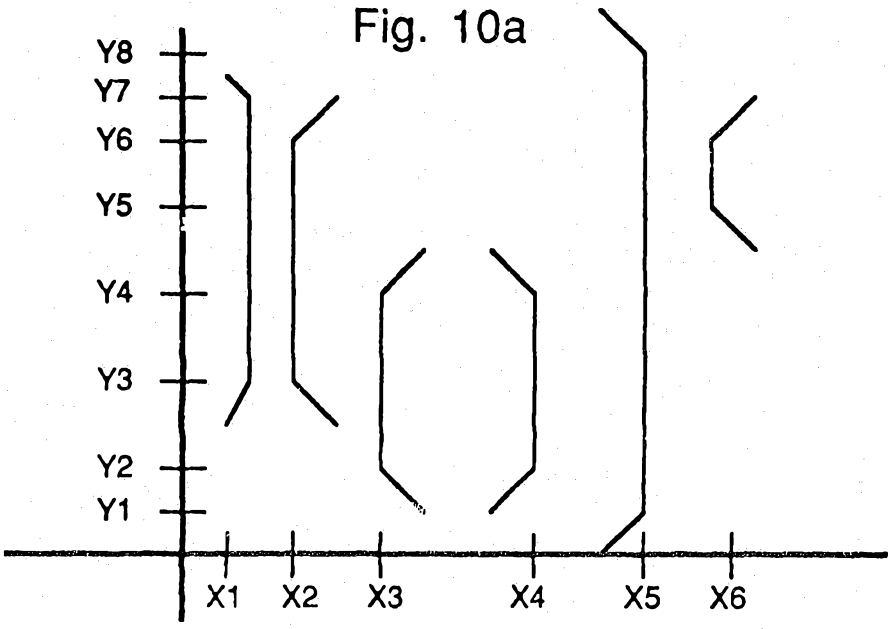

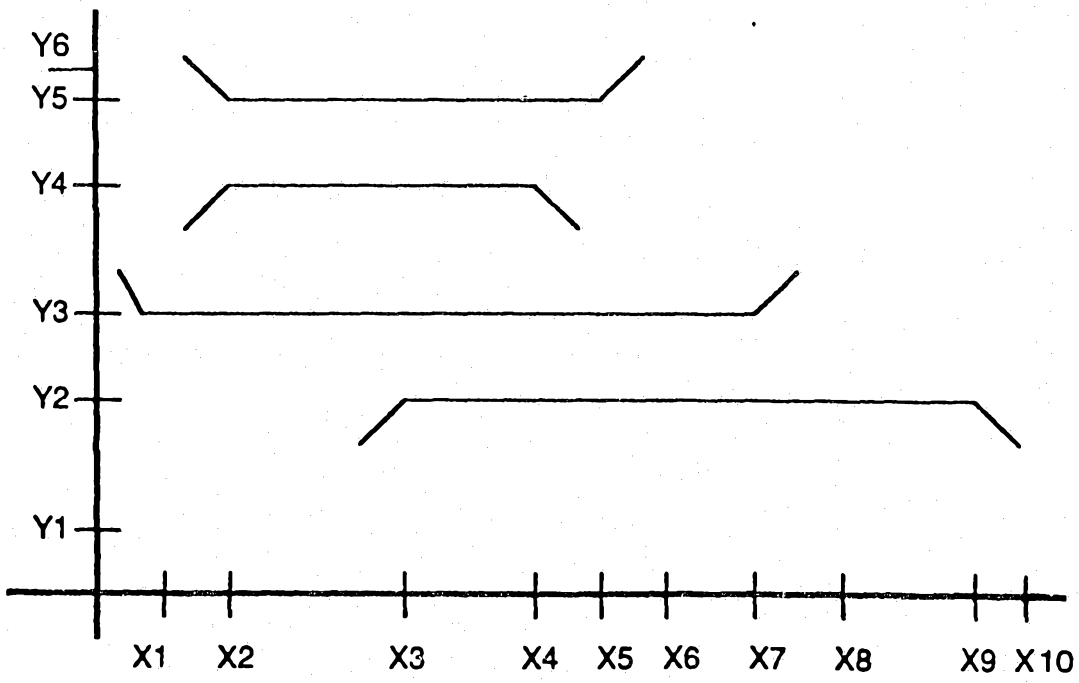

Fig. 10b

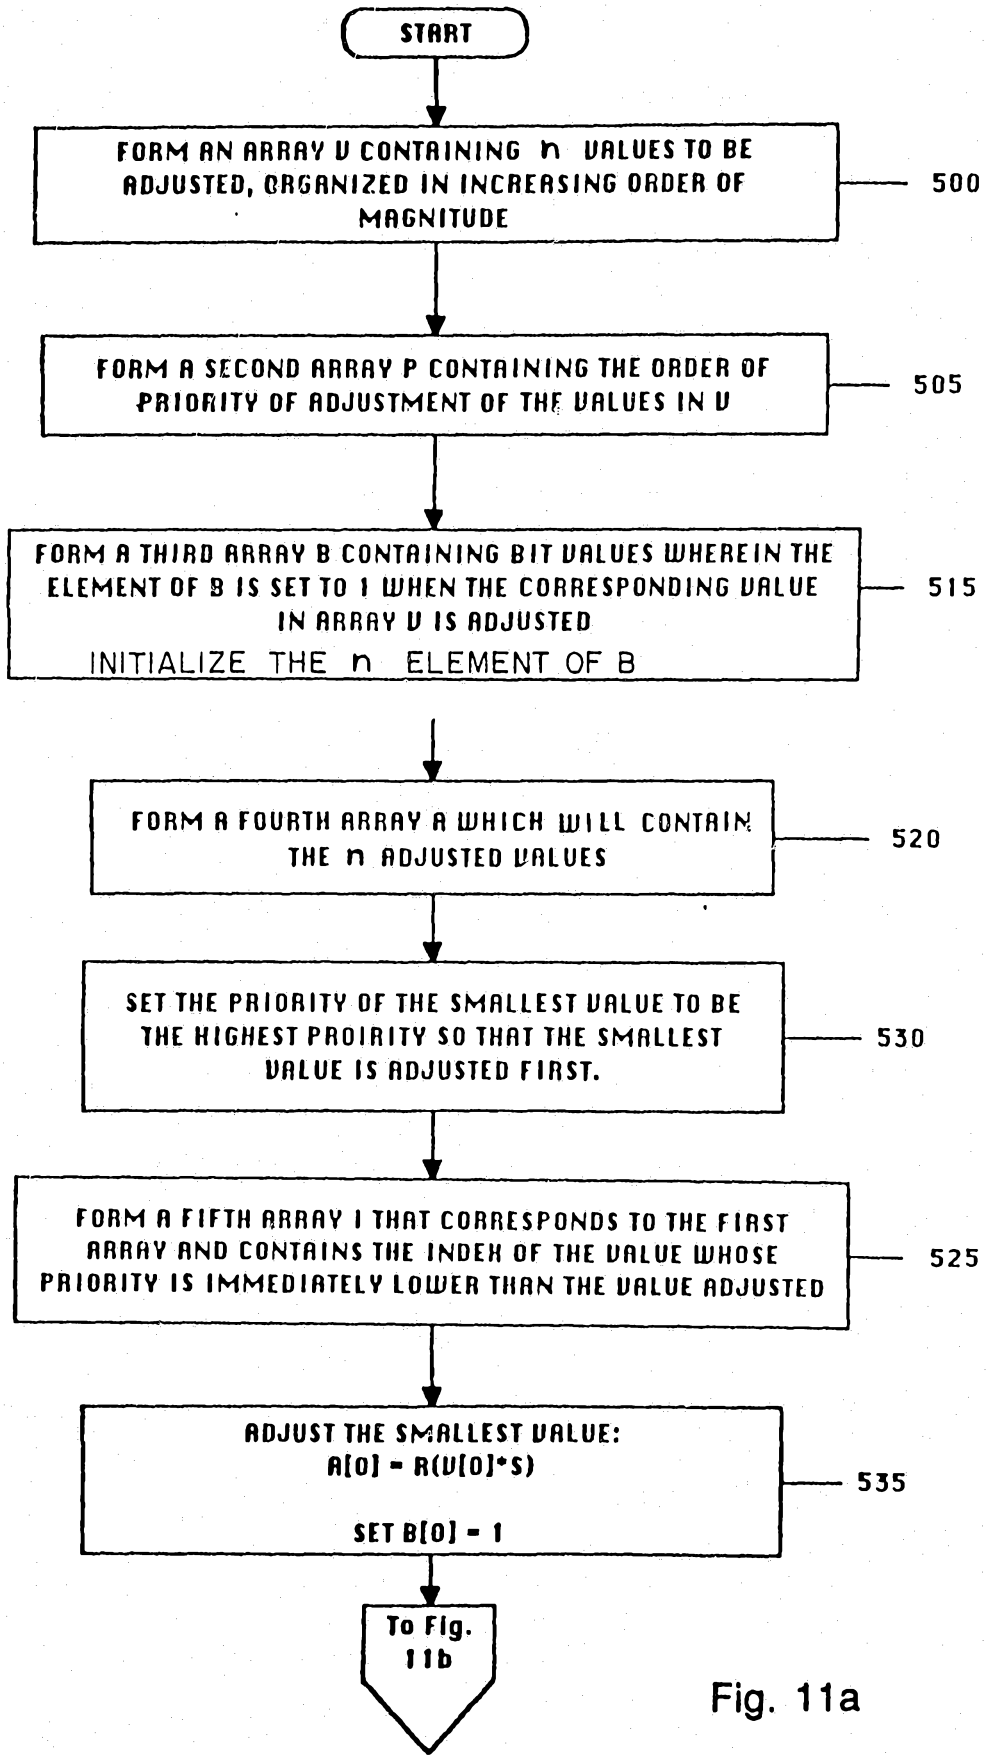
START
FORM AN ARRAY U CONTAINING n VALUES TO BE ADJUSTED, ORGANIZED IN INCREASING ORDER OF MAGNITUDE
500
FORM A SECOND ARRAY P CONTAINING THE ORDER OF PRIORITY OF ADJUSTMENT OF THE VALUES IN U
505
FORM A THIRD ARRAY B CONTAINING BIT VALUES WHEREIN THE ELEMENT OF B IS SET TO 1 WHEN THE CORRESPONDING VALUE IN ARRAY U IS ADJUSTED
INITIALIZE THE n ELEMENT OF B
515
FORM A FOURTH ARRAY A WHICH WILL CONTAIN THE n ADJUSTED VALUES
520
SET THE PRIORITY OF THE SMALLEST VALUE TO BE THE HIGHEST PROIRITY SO THAT THE SMALLEST VALUE IS ADJUSTED FIRST.
530
FORM A FIFTH ARRAY I THAT CORRESPONDS TO THE FIRST ARRAY AND CONTAINS THE INDEX OF THE VALUE WHOSE PRIORITY IS IMMEDIATELY LOWER THAN THE VALUE ADJUSTED
525
ADJUST THE SMALLEST VALUE:
A[0] = R(U[0]*S)
SET B[0] = 1
535
To Fig. 11b

Fig. 11a

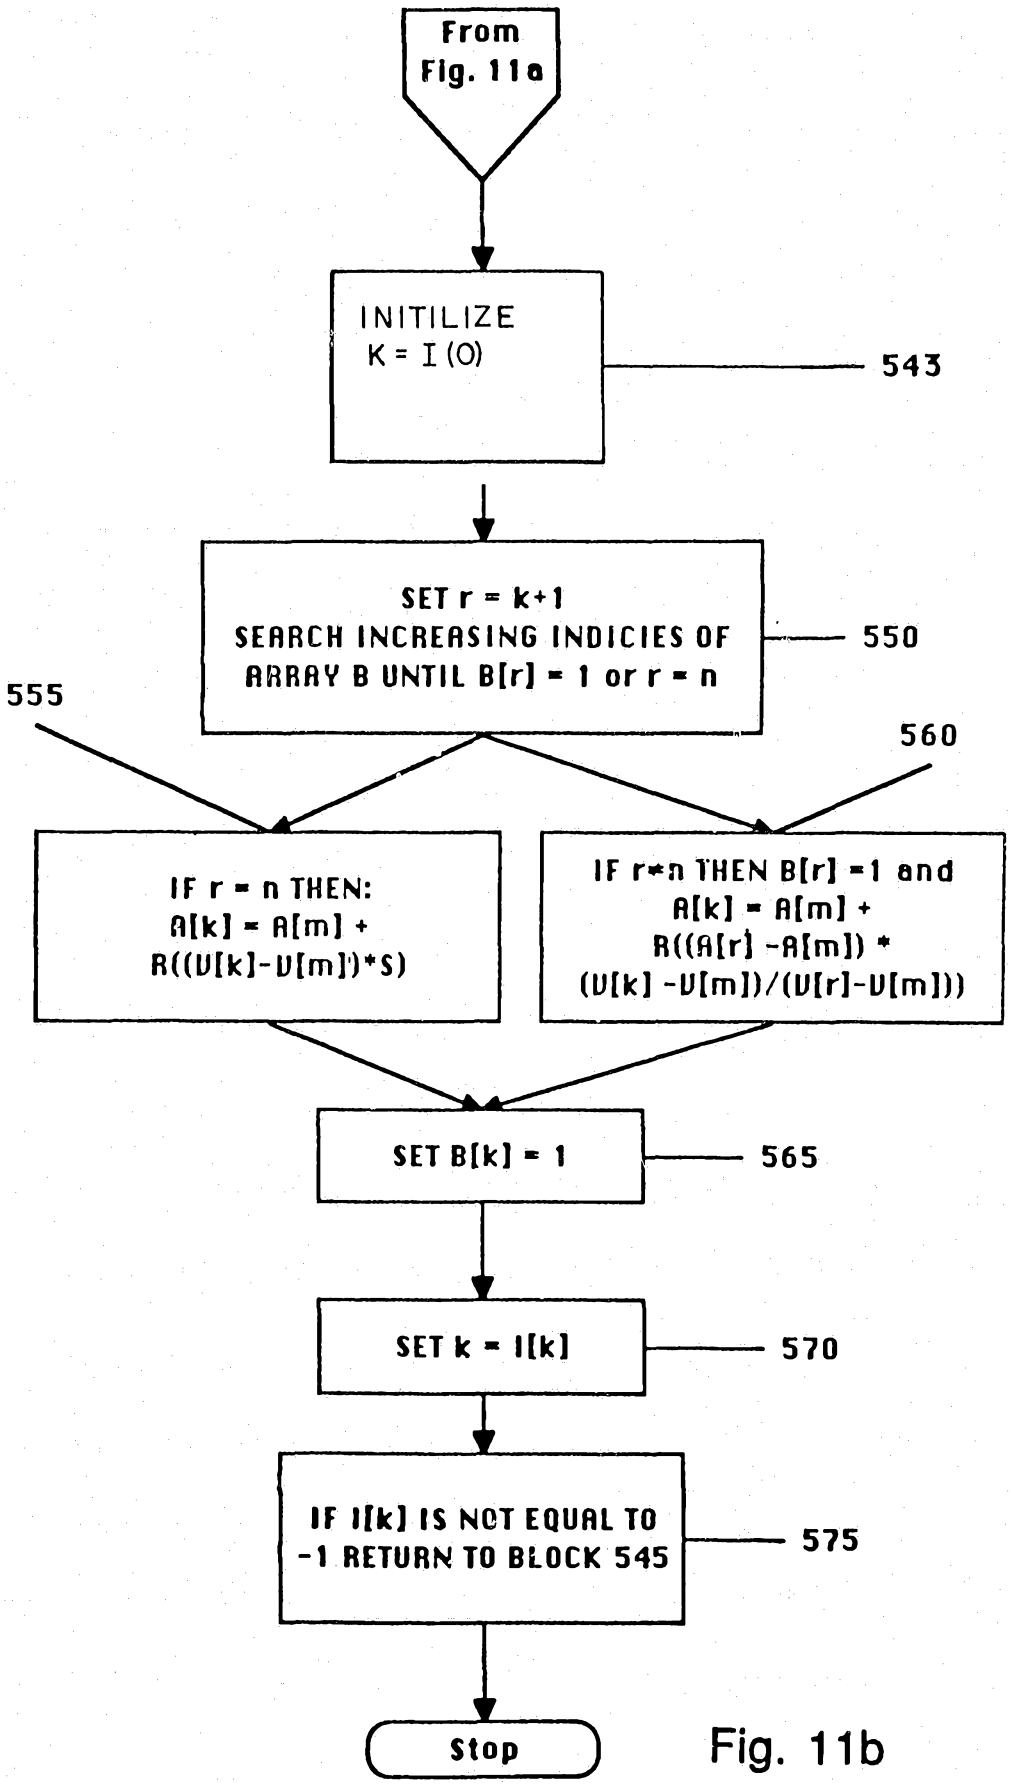
From Fig. 11a
INITILIZE K = I(0)
543
SET r = k+1
SEARCH INCREASING INDICIES OF ARRAY B UNTIL B[r] = 1 or r = n
550
555
560
IF r = n THEN: A[k] = A[m] + R((V[k]-V[m])*S)
IF r≠n THEN B[r] =1 and A[k] = A[m] + R((A[r] -A[m]) * (V[k] -V[m])/(V[r]-V[m]))
SET B[k] = 1
565
SET k = I[k]
570
IF I[k] IS NOT EQUAL TO -1 RETURN TO BLOCK 545
575
Stop

Fig. 11b

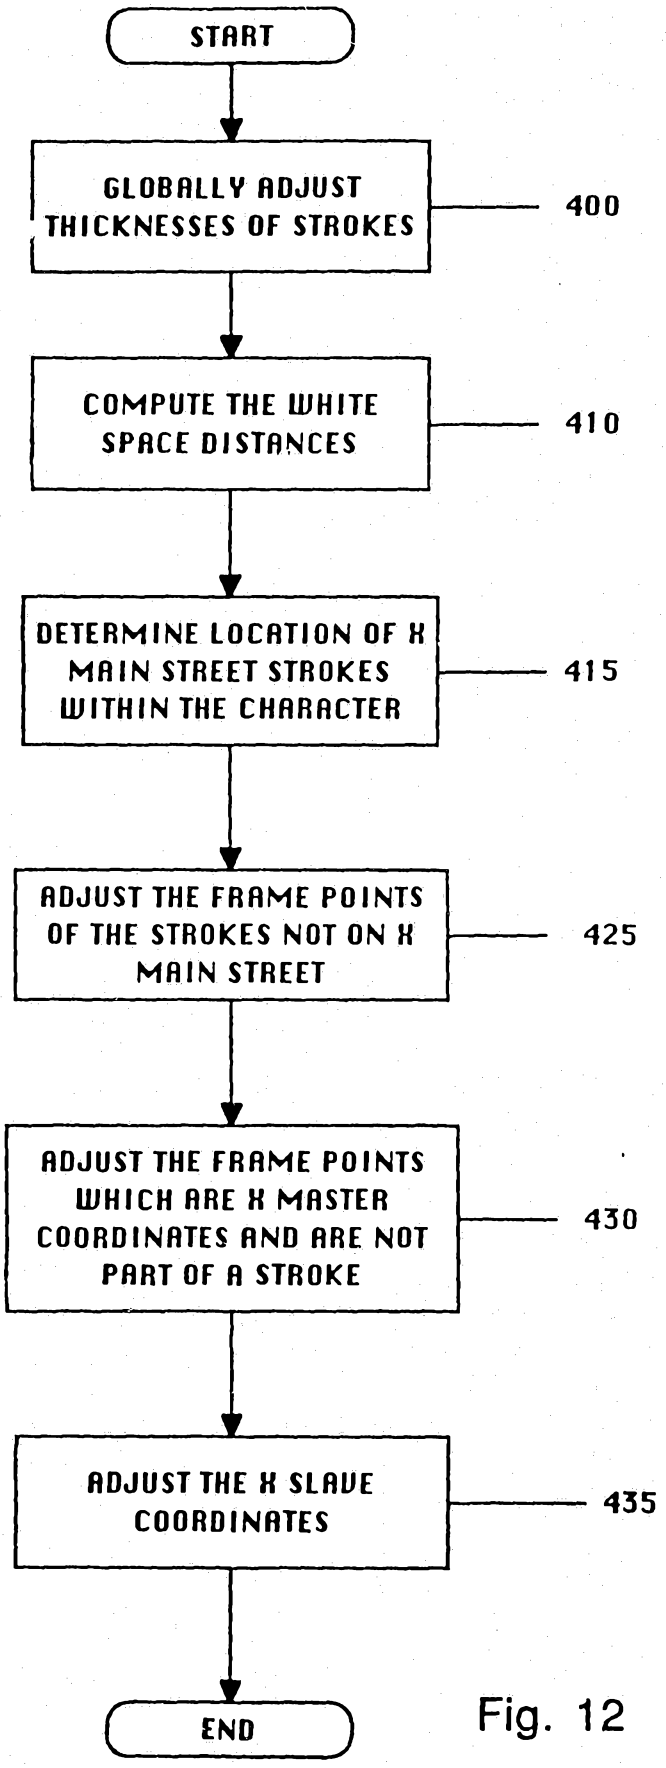
START
GLOBALLY ADJUST THICKNESSES OF STROKES
400
COMPUTE THE WHITE SPACE DISTANCES
410
DETERMINE LOCATION OF X MAIN STREET STROKES WITHIN THE CHARACTER
415
ADJUST THE FRAME POINTS OF THE STROKES NOT ON X MAIN STREET
425
ADJUST THE FRAME POINTS WHICH ARE X MASTER COORDINATES AND ARE NOT PART OF A STROKE
430
ADJUST THE X SLAVE COORDINATES
435
END

Fig. 12

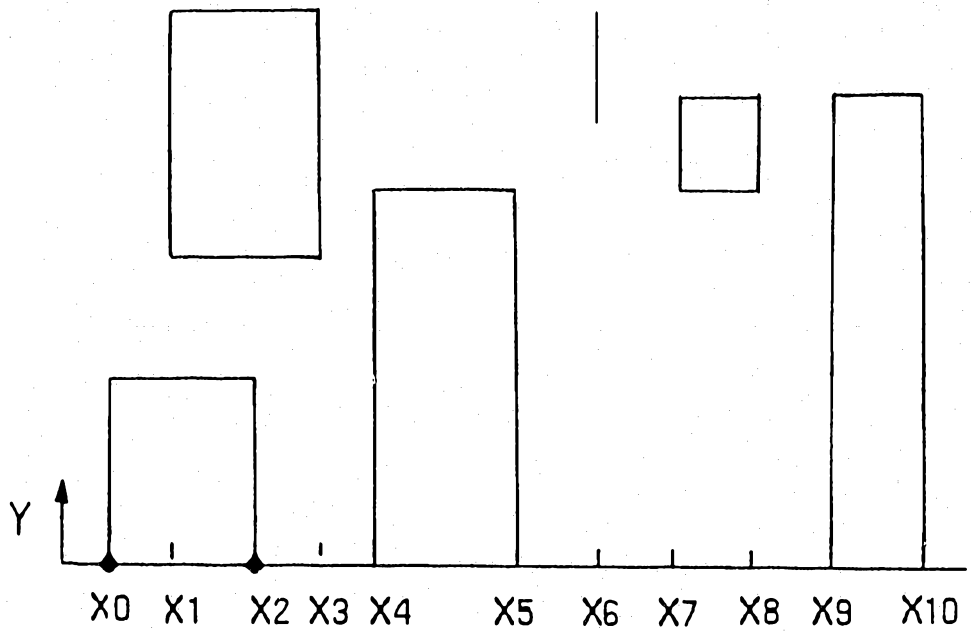

Fig. 13a

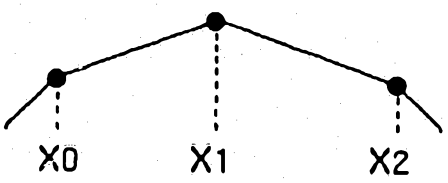

Fig. 13b

Fig. 14

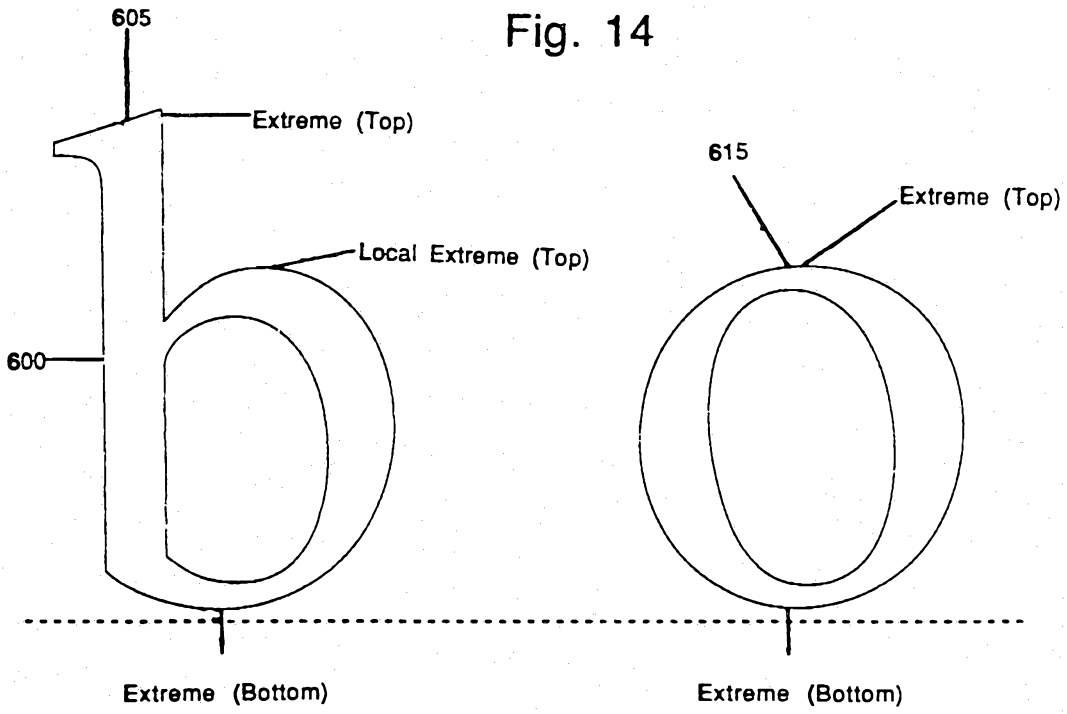
605
Extreme (Top)
Local Extreme (Top)
600
615
Extreme (Top)
Extreme (Bottom)
Extreme (Bottom)

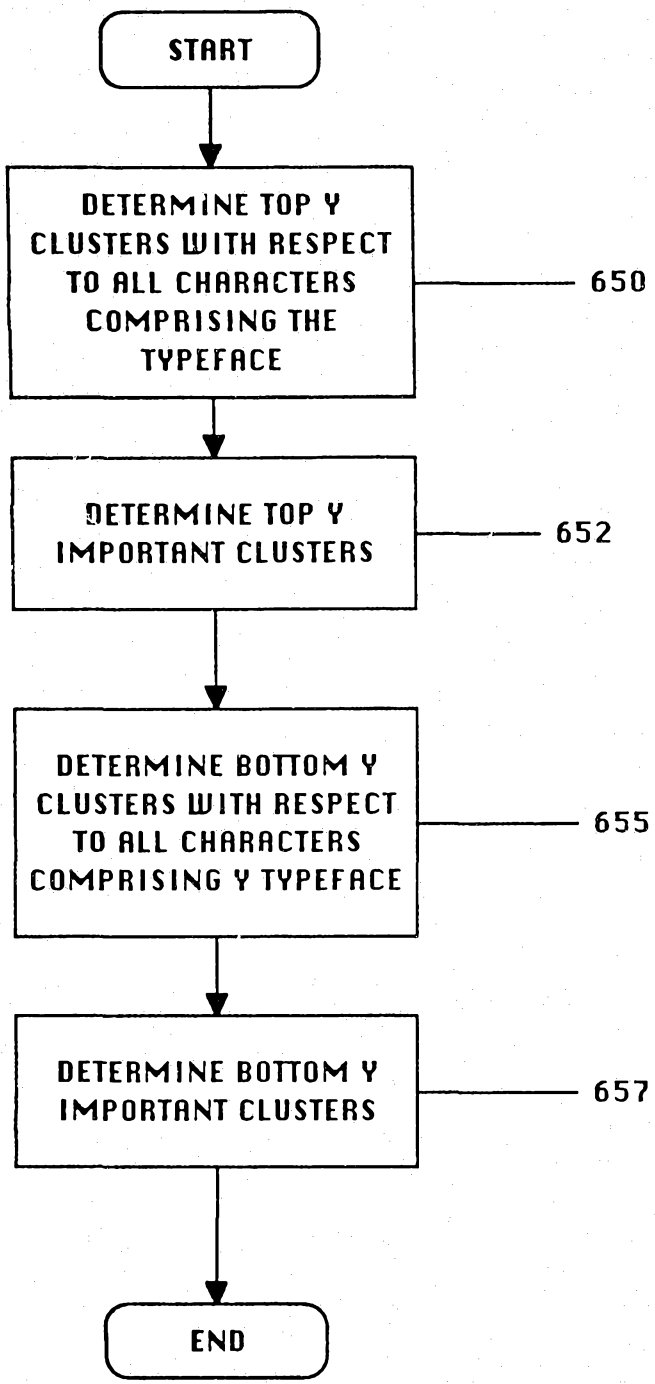
START
DETERMINE TOP Y CLUSTERS WITH RESPECT TO ALL CHARACTERS COMPRISING THE TYPEFACE
650
DETERMINE TOP Y IMPORTANT CLUSTERS
652
DETERMINE BOTTOM Y CLUSTERS WITH RESPECT TO ALL CHARACTERS COMPRISING Y TYPEFACE
655
DETERMINE BOTTOM Y IMPORTANT CLUSTERS
657
END

Fig. 15

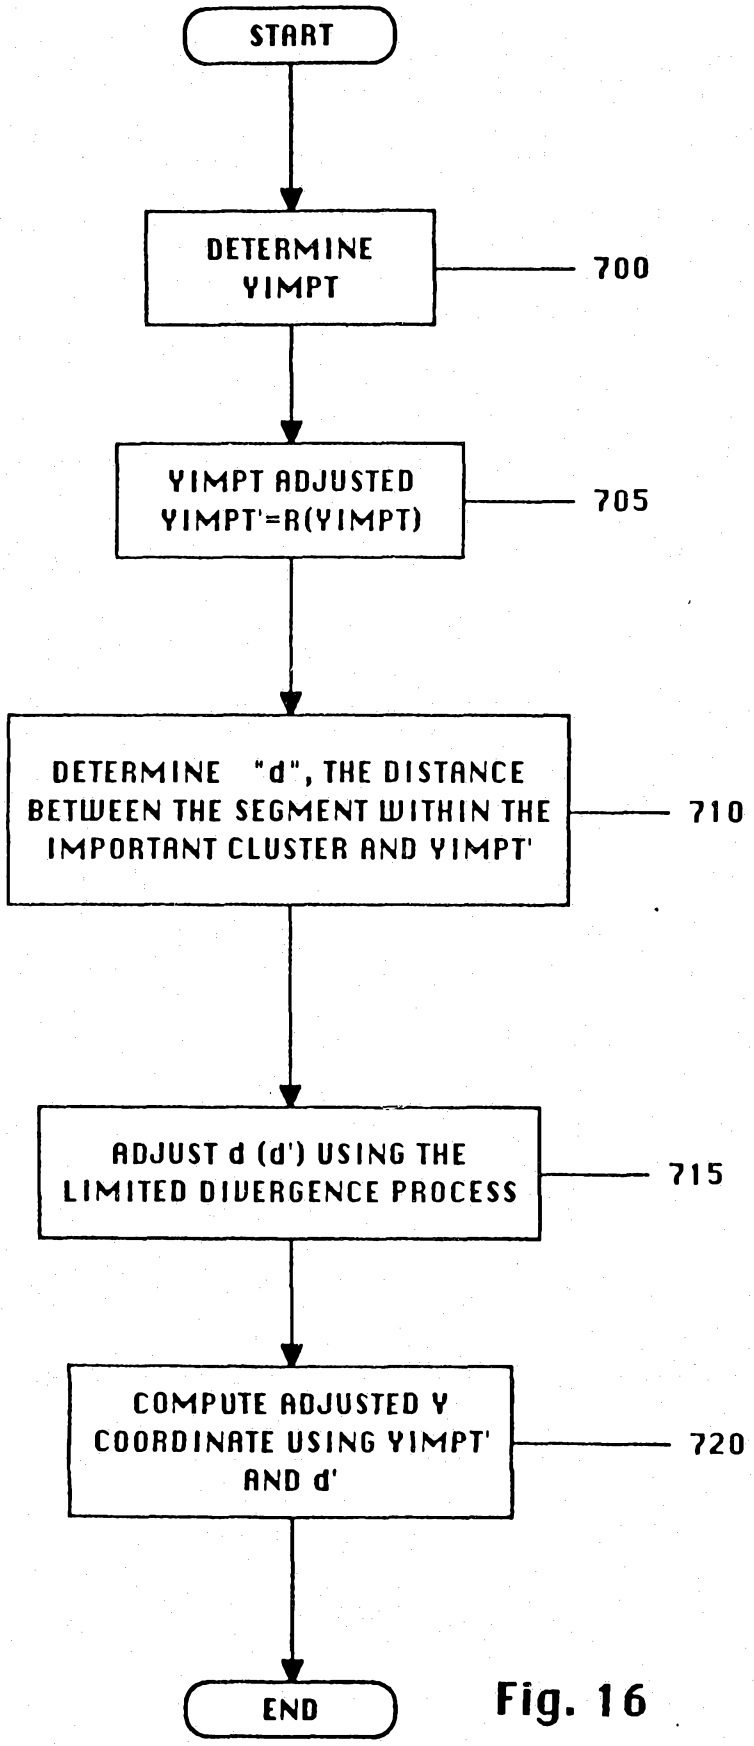
START
DETERMINE YIMPT
700
YIMPT ADJUSTED YIMPT'=R(YIMPT)
705
DETERMINE "d", THE DISTANCE BETWEEN THE SEGMENT WITHIN THE IMPORTANT CLUSTER AND YIMPT'
710
ADJUST d (d') USING THE LIMITED DIVERGENCE PROCESS
715
COMPUTE ADJUSTED Y COORDINATE USING YIMPT' AND d'
720
END

Fig. 16

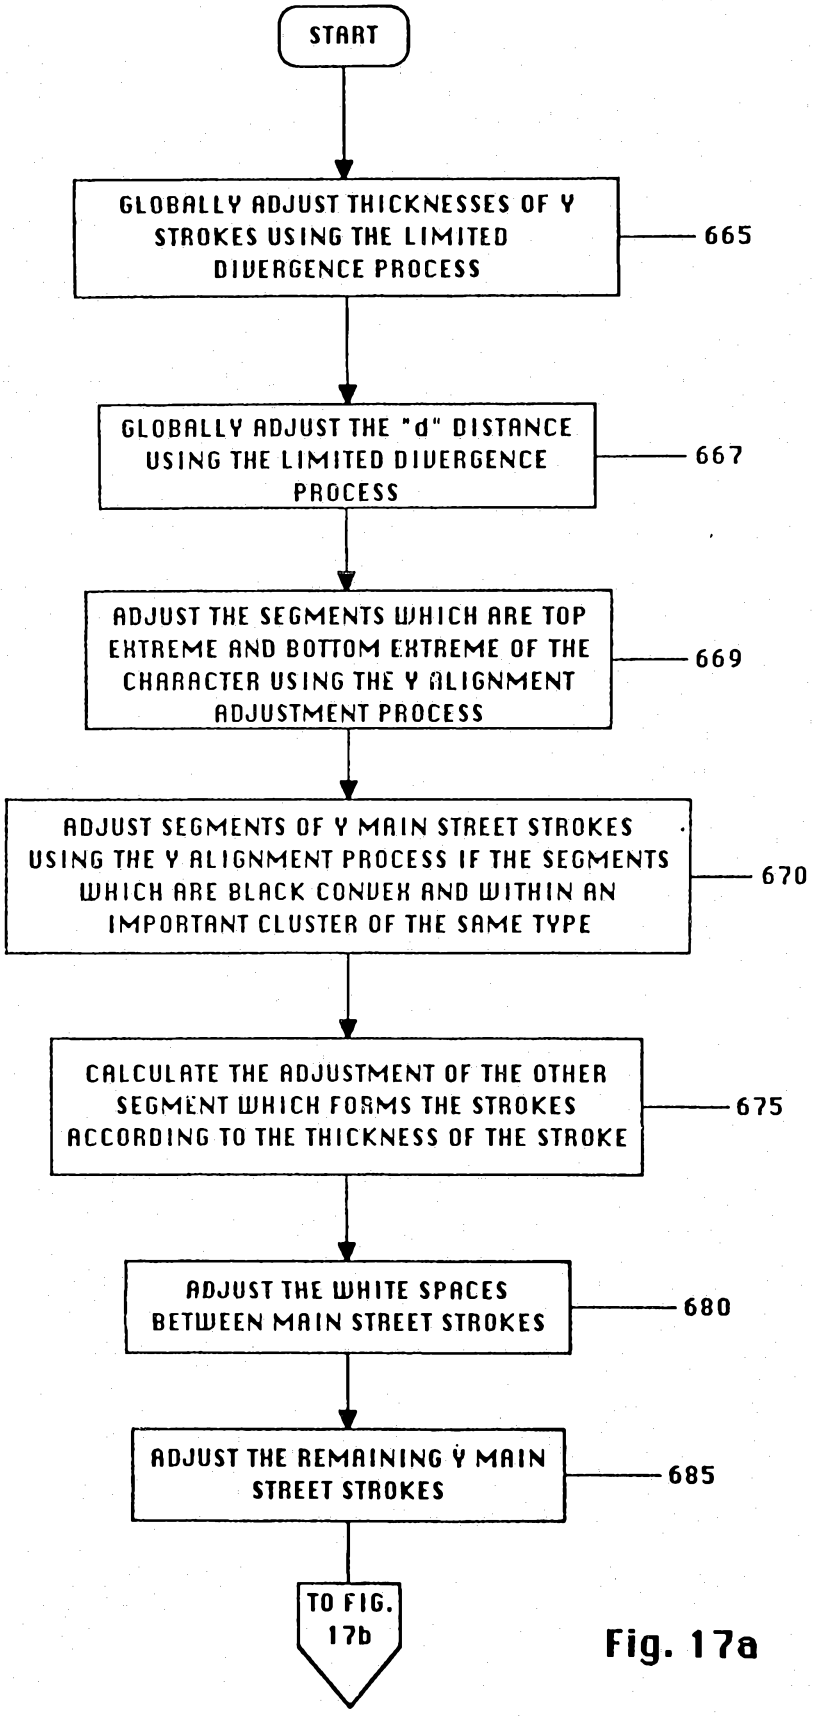
START
GLOBALLY ADJUST THICKNESSES OF Y STROKES USING THE LIMITED DIVERGENCE PROCESS
665
GLOBALLY ADJUST THE "d" DISTANCE USING THE LIMITED DIVERGENCE PROCESS
667
ADJUST THE SEGMENTS WHICH ARE TOP EXTREME AND BOTTOM EXTREME OF THE CHARACTER USING THE Y ALIGNMENT ADJUSTMENT PROCESS
669
ADJUST SEGMENTS OF Y MAIN STREET STROKES USING THE Y ALIGNMENT PROCESS IF THE SEGMENTS WHICH ARE BLACK CONVEX AND WITHIN AN IMPORTANT CLUSTER OF THE SAME TYPE
670
CALCULATE THE ADJUSTMENT OF THE OTHER SEGMENT WHICH FORMS THE STROKES ACCORDING TO THE THICKNESS OF THE STROKE
675
ADJUST THE WHITE SPACES BETWEEN MAIN STREET STROKES
680
ADJUST THE REMAINING Y MAIN STREET STROKES
685
TO FIG. 17b

Fig. 17a

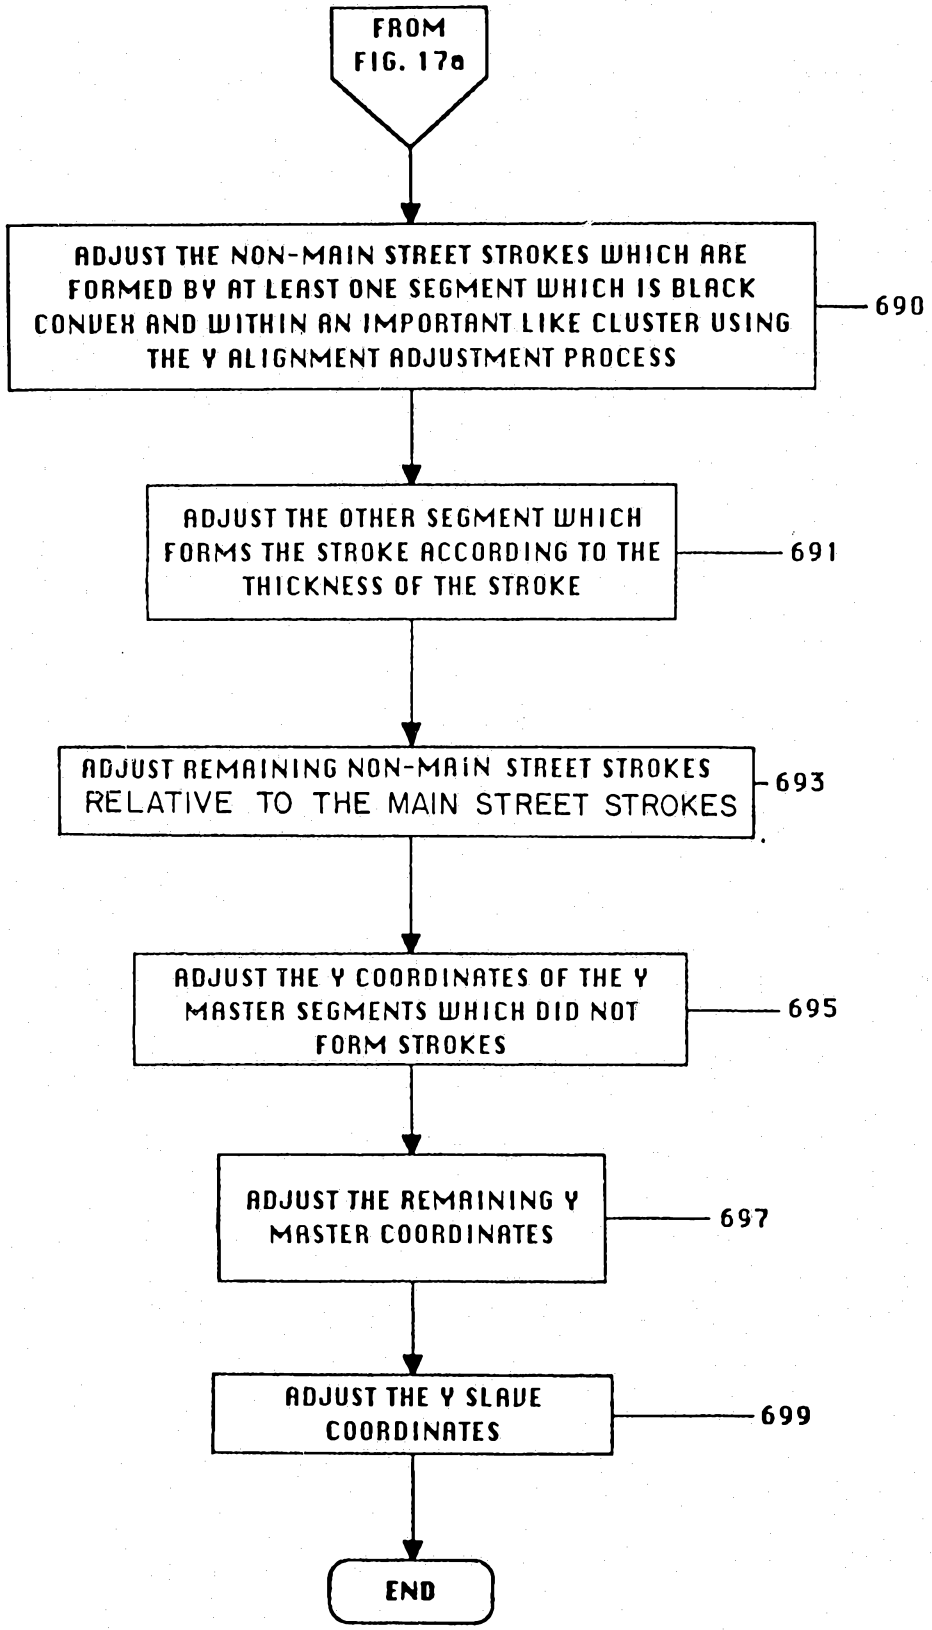
FROM FIG. 17a
ADJUST THE NON-MAIN STREET STROKES WHICH ARE FORMED BY AT LEAST ONE SEGMENT WHICH IS BLACK CONVEX AND WITHIN AN IMPORTANT LIKE CLUSTER USING THE Y ALIGNMENT ADJUSTMENT PROCESS
690
ADJUST THE OTHER SEGMENT WHICH FORMS THE STROKE ACCORDING TO THE THICKNESS OF THE STROKE
691
ADJUST REMAINING NON-MAIN STREET STROKES RELATIVE TO THE MAIN STREET STROKES
693
ADJUST THE Y COORDINATES OF THE Y MASTER SEGMENTS WHICH DID NOT FORM STROKES
695
ADJUST THE REMAINING Y MASTER COORDINATES
697
ADJUST THE Y SLAVE COORDINATES
699
END

Fig. 17b

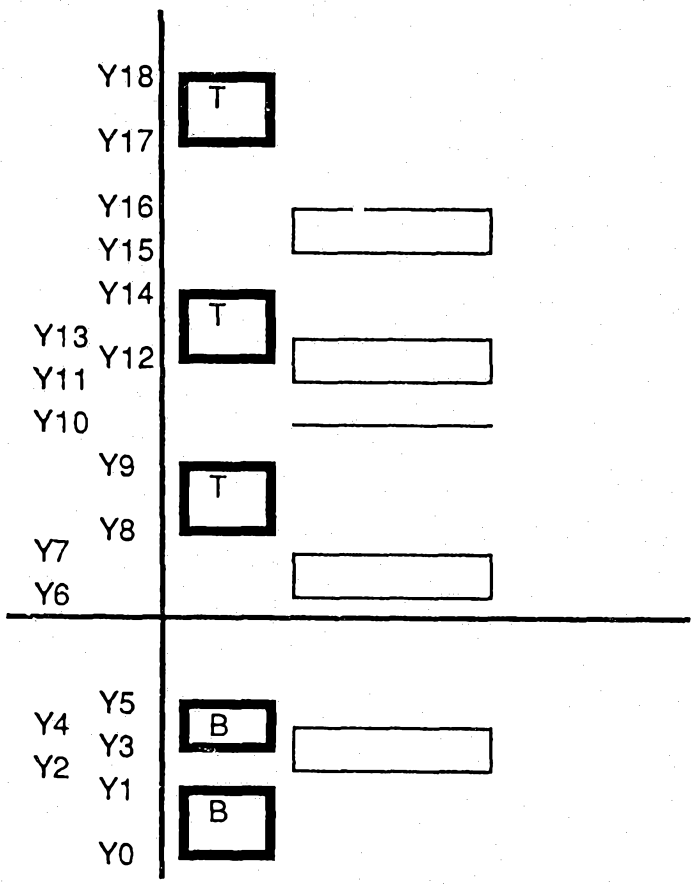
Y18
Y17
Y16
Y15
Y14
Y13
Y12
Y11
Y10
Y9
Y8
Y7
Y6
Y5
Y4
Y3
Y2
Y1
Y0
T
T
T
B
B

Fig. 18

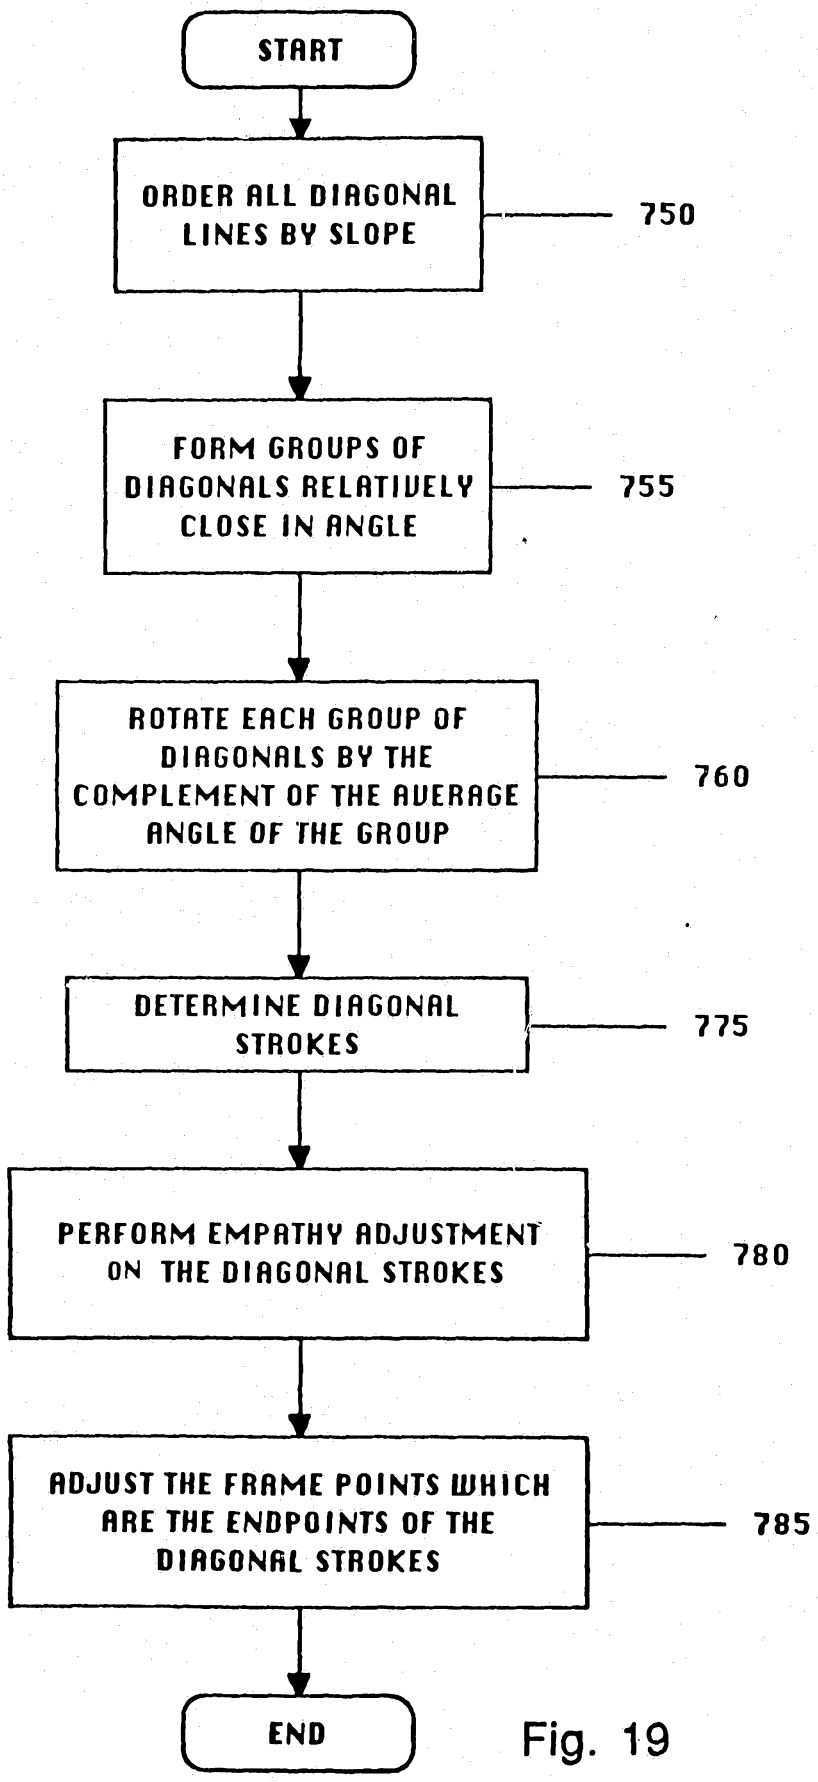
START
ORDER ALL DIAGONAL LINES BY SLOPE
750
FORM GROUPS OF DIAGONALS RELATIVELY CLOSE IN ANGLE
755
ROTATE EACH GROUP OF DIAGONALS BY THE COMPLEMENT OF THE AVERAGE ANGLE OF THE GROUP
760
DETERMINE DIAGONAL STROKES
775
PERFORM EMPATHY ADJUSTMENT ON THE DIAGONAL STROKES
780
ADJUST THE FRAME POINTS WHICH ARE THE ENDPOINTS OF THE DIAGONAL STROKES
785
END

Fig. 19

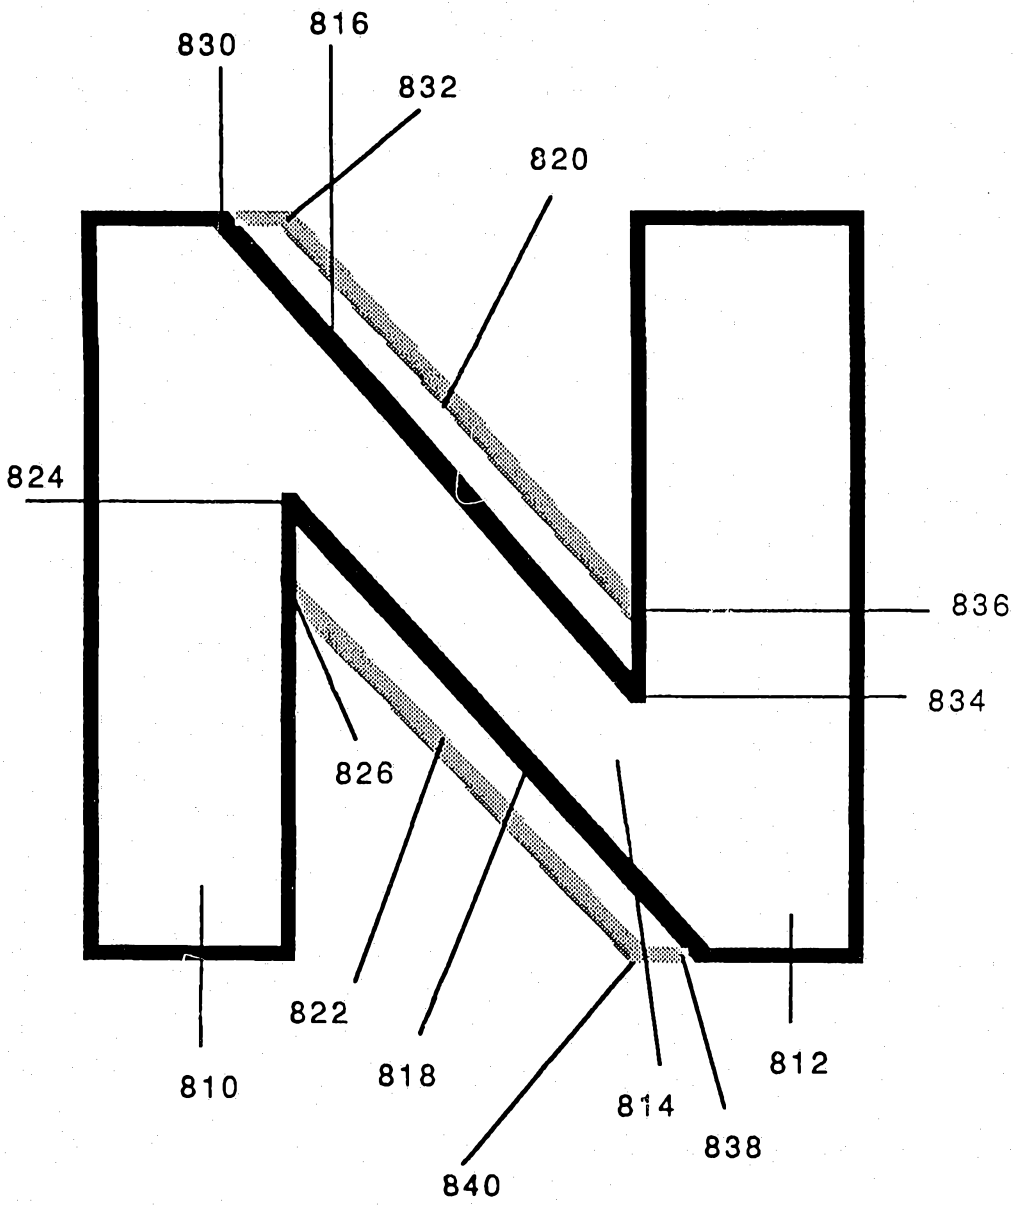

Fig. 20

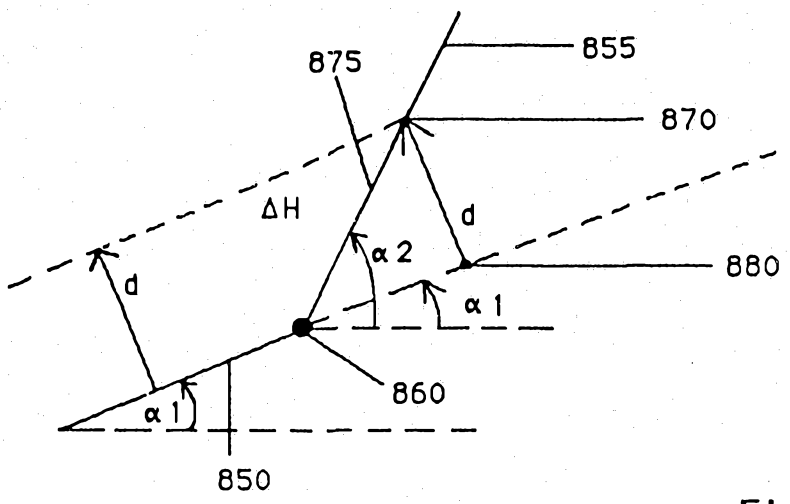

Fig. 21a

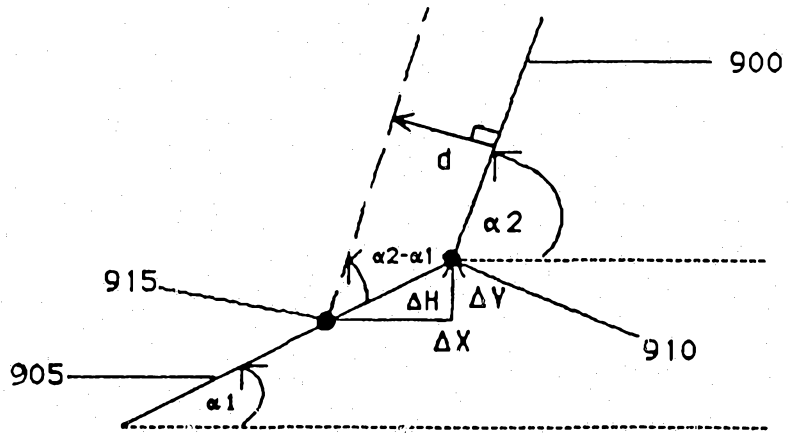

Fig. 21b

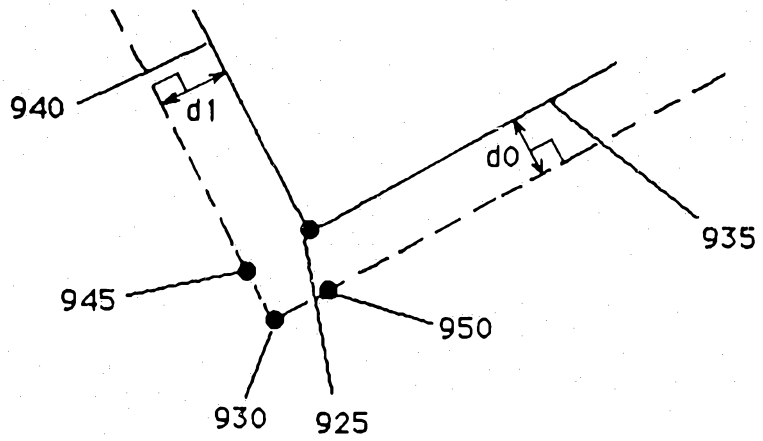

Fig. 21c

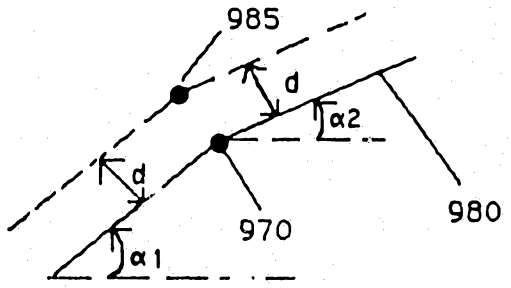

Fig. 21d