



(43) International Publication Date
17 July 2014 (17.07.2014)

(10) International Publication Number
WO 2014/110031 A1

(51) International Patent Classification:
B26B 21/50 (2006.01)

(21) International Application Number:
PCT/US2014/010491

(22) International Filing Date:
7 January 2014 (07.01.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/750,079 8 January 2013 (08.01.2013) US

(71) Applicant: **THE HONE RAZOR COMPANY LLC**
[US/US]; 112 Van Wyck Avenue, Pittsburgh,
Pennsylvania 15227 (US).

(72) Inventor: **HAHN, Adam, J.**; 112 Van Wyck Avenue, Pitt-
sburgh, Pennsylvania 15227 (US).

(74) Agents: **MEDER, Julie, W.** et al.; The Webb Law Firm,
One Gateway Center, 420 Ft. Duquesne Blvd., Suite 1200,
Pittsburgh, Pennsylvania 15222 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: RAZOR AND RAZOR TREATMENT SYSTEM

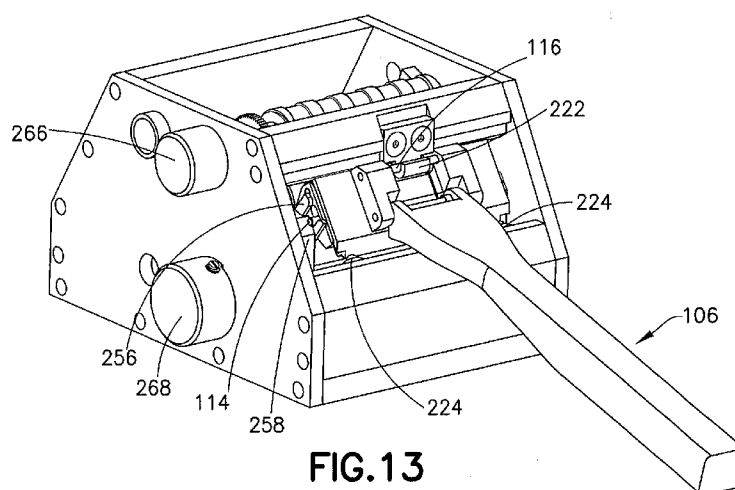


FIG. 13

(57) Abstract: A razor treatment system includes a razor having a head, and a razor treatment device including a drum rotationally supported within the razor treatment device, at least two cam members supported within the razor treatment device, at least two guide members configured to cooperate with the cam members to expose the blade, and a first actuating member configured to effect rotation of the drum. The head includes a cover for housing a blade. The cover is configured to expose the blade. The razor interfaces with the razor treatment device to move the cover of the razor to expose the blade. Each cam member may define a cam track that guides linear retraction of the blade, rotational movement of the blade and cover, and linear extension of the blade into a position between the drums.

RAZOR AND RAZOR TREATMENT SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 61/750,079, filed January 8, 2013, the disclosure of which is hereby incorporated in its entirety by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] This disclosure relates generally to razor treatment systems and, more particularly, to a razor configured to interact with a razor treatment system.

Description of Related Art

[0003] Razors have become ubiquitous and are used by both men and women for their personal shaving needs. Straight-blade razors, which are made of high carbon or stainless steel, exemplify the early modern popular style of shaving implements. These razors can be used for many shaving sessions over a long period of time, but must be maintained by regular sharpening and stropping. The process of sharpening, or honing, the blade uses an abrasive material that removes material from the blade's edge. Stropping, which must be done with each use of a straight-blade razor, straightens and re-aligns the blade, which tends to bend and pit under use, preventing a close shave if not straightened.

[0004] Double-edged safety razors replaced the straight edge in popularity in the early part of the twentieth century. The disposal of blades after limited use was made popular and economical by the arrival of blades made of low-cost, thin steel, thereby eliminating the need for stropping or honing. The safety feature of these razors, protecting the user from all but the very edge of the blade, appealed to users. The orientation of the handle and the blade required the user to develop the proper technique to achieve an optimal shave. The next evolution combined the safety of small, thin blades exposed only at the edge, with the proper angle-of-attack and a pivoting head to adjust to the contours of the face. The disposable razor embodied the ease and simplicity of shaving, sacrificing longevity of product by providing disposable blades with limited life. This incarnation of men's and women's personal shaver remains the most popular and widely used, contributing a sizeable negative global economic impact.

[0005] While the convenience and ease of use of current disposable razor technology is attractive to users, improvements to certain aspects of the technology may be desirable. A

razor that incorporates the safety and usability aspects of the safety razor and the longevity of the straight blade razor would be a desirable improvement to razor technology.

[0006] Several different razor sharpening systems are known in the art, however, many of these sharpening systems fail to provide simplified sharpening and stropping of a razor. The razor blade disclosed in U.S. Patent No. 1,805,895 is used in a stropping device to bend the blade of the razor. However, the razor head remains stationary within the stropping device and fails to work in concert with the stropping device to expose the blade for stropping. Likewise, the razor sharpening system disclosed in U.S. Patent Application Publication No. 2013/0237134 fails to provide a razor with a head that works in concert with the sharpening system. This sharpening system does not use drums with an abrasive material to sharpen the blade nor is the blade sharpened by rotational movement of the drums. Further, the razor does not open and extend into the sharpening device through the use of a cam track to expose the blade of the razor. Similarly, U.S. Patent No. 7,104,874 discloses a razor sharpening system. However, this sharpening apparatus does not use drums with an abrasive material directly attached on an outer diameter of the drums nor does the razor open and extend the razor blades upon insertion into the sharpening apparatus. This sharpening apparatus is directed towards prolonging the use of a disposable razor, rather than a razor that is specifically designed to operate in concert with the sharpening device. The sharpening apparatus is used to resharpen existing cartridge razors but does not expose the underside of the razor blade.

SUMMARY OF THE INVENTION

[0007] In one embodiment, a razor treatment system is provided. The razor treatment system generally comprises a razor having a head and a razor treatment device including a drum rotationally supported within the razor treatment device, at least two cam members supported within the razor treatment device, at least two guide members configured to cooperate with the cam members to expose the blade, and a first actuating member configured to effect rotation of the guide members. The head includes a cover for housing a blade and the cover is configured to expose the blade. The razor interfaces with the razor treatment device to move the cover of the razor to expose the blade.

[0008] Each cam member may define a cam track that guides linear retraction of the blade, rotational movement of the blade and cover, and linear extension of the blade into a position on the drum. The blade of the razor may be spring-biased in the cover. At least a portion of the drum may comprise an abrasive material. The razor may further include a pair of pins. Each pin may extend from an end of a longitudinal axis of the blade and extends out of the

cover of the razor. The pins may be movable along the cam path of each cam member by each guide member in order to expose the blade in the razor treatment device.

[0009] Each guide member may be arcuate-shaped and define at least two recesses with surfaces configured to guide the pins along the cam path of each cam member. At least one latching mechanism may be positioned on at least one of a top surface of the cover and a bottom surface of the cover. At least one cradle member may be positioned on the head of the razor and configured to hold the spring-biased blade within the cover of the razor, wherein the blade may be spring-biased against the cradle member and may contact the cradle member at a portion that is abraded to position a cutting edge of the blade in a same position after each use of the treatment system. The abrasive material may be provided in a spiral configuration around the outer surface of the drum.

[0010] The razor treatment system may include a second drum having at least a portion of a surface thereof comprising an abrasive material. The razor treatment device may include a stropping portion. The stropping portion may include another rotatably mounted drum comprising a surface thereof comprising a material used to strop the blade.

[0011] In another embodiment, a shaving razor is provided. The shaving razor generally comprises a handle and a head. The head comprises a blade and a cover. The head is pivotally connected to the handle. The cover is configured to house the blade. The cover is rotatable relative to the handle to extend the blade from the cover.

[0012] In another embodiment, a razor treatment device is provided. The razor treatment device generally comprises a drum rotationally supported within a housing, at least two cam members supported within the housing, at least two guide members configured to cooperate with the cam members to interact with a shaving razor, and a first actuating member configured to effect rotation of the guide members.

[0013] Further details and advantages will be understood from the following detailed description read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] FIG. 1 is a perspective view of a razor according to this disclosure.

[0015] FIG. 2 is a bottom view of the razor of FIG. 1.

[0016] FIG. 3 is a perspective view of the razor of FIG. 1 depicting an exposed razor cover.

[0017] FIG. 4 is a bottom view of a razor according to this disclosure depicting magnets on a bottom surface of a razor cover.

- [0018] FIG. 5 is a perspective view of a top surface of the razor cover of FIG. 4.
- [0019] FIG. 6 is a side view of the razor of FIG. 1.
- [0020] FIGS. 7-9 are side views of the razor cover of FIG. 1.
- [0021] FIG. 10 is a side view of a cradle member of the razor of FIG. 1.
- [0022] FIGS. 11 and 12 are perspective views of a razor treatment device according to this disclosure.
- [0023] FIG. 13 is a perspective view of a razor treatment system according to one embodiment of this disclosure.
- [0024] FIGS. 14 and 15 are cross-sectional views of the razor treatment device of FIGS. 11 and 12.
- [0025] FIG. 16 is a perspective view of the razor treatment system of FIG. 13.
- [0026] FIG. 17 is a perspective view of a pair of sharpening drums used in the razor treatment system.
- [0027] FIG. 18 is a perspective view of another embodiment of a razor treatment system according to this disclosure.
- [0028] FIG. 19 is a front view of the razor treatment system of FIG. 18.
- [0029] FIG. 20 is a cross-sectional view of the razor treatment system of FIG. 18.
- [0030] FIGS. 21-27 are cross-sectional views of the razor treatment system of FIG. 18 depicting the movement of a blade and cover of a razor along a cam track within the razor treatment system.
- [0031] FIG. 28 is a sectional view of the razor treatment system of FIG. 18 depicting an actuating member used on the razor treatment system.
- [0032] FIGS. 29-34 are cross-sectional views of the razor treatment system of FIG. 18 depicting the movement of a blade and cover of a razor along a cam track.
- [0033] FIG. 35 is a perspective view of another embodiment of a razor treatment system according to the disclosure.
- [0034] FIG. 36 is a perspective view of a pair of stropping drums used in the razor treatment system.

DESCRIPTION OF THE DISCLOSURE

[0035] For purposes of the description hereinafter, spatial orientation terms, as used, shall relate to the referenced embodiment as it is oriented in the accompanying drawings, figures, or otherwise described in the following detailed description. However, it is to be understood that the embodiments described hereinafter may assume many alternative variations and

configurations. It is also to be understood that the specific components, devices, features, and operational sequences illustrated in the accompanying drawings, figures, or otherwise described herein are simply exemplary and should not be considered as limiting. Further, unless otherwise stated, all other components within the sharpener and razor hereinbelow are duplicated on each side of the sharpener and razor so, although they may be discussed herein as a single component, the discussion applies equally to the analogous component on the opposite side of the sharpener or razor. Therefore, in the drawings several reference characters are used multiple times.

[0036] An embodiment of a razor 100A shown in Figs. 1-3 (or in an alternative embodiment, 100B, shown in Figs. 5-9) is disclosed with an extendable blade 102 such that the blade 102 can be exposed to be honed and/or stropped while remaining connected to a razor frame 104. As shown in Figures 1-9, the razor 100A, 100B comprises a handle 106 pivotally connected to a razor head 108, which includes the razor frame 104. The razor frame 104 includes a cover 110 and a frame back 112. The blade 102 is movably mounted within the razor frame 104 and is positioned with respect to the frame 104 so as to provide an appropriate shaving angle (typically between about 20 and 45 degrees between the blade 102 and a user's shaving surface). The blade 102 can be made of stainless steel or any hard, non-corrosive material (i.e., various metals, ceramic, etc.). Blade pins 114 extend from each side of the blade 102 through a slot 116 in each side of the cover 110. Screws 136 are used to secure portions of the frame 104 and head 108 together. In one embodiment, as shown in Figs. 4-9, magnets 118 may be positioned within recesses defined in an upper surface of the cover 110 and/or a lower surface of the cover 110, as well as within recesses defined in the frame back 112 of the razor head 108. In one position, the magnets 118 on the lower surface of the cover 110 interact with the magnets 118 on the frame back 112 of the razor head 108. In this position, the magnets 118 are used to hold the cover 110 closed in the frame 104 of the razor head 108. In a second position, the magnets 118 on the top of the cover 110 interact with a cross member 424 (Figs. 21-27) to keep the cover 110 open during treatment of the blade 102. This arrangement is explained in more detail below. Although these magnets 118 are shown as flush with the cover 110 and frame 104, it is contemplated that the magnets may be positioned further in or out of the respective structures. Alternatively, any type of mechanical latching mechanism that provides a retaining force may be interchanged with the magnets 118, for retaining the cover 110 in position while the blade 102 is honed, as described below.

[0037] The blade 102 is biased forward within the frame 104 by springs 120 received on pins 122. A cutting edge of blade 102 is retained within pockets 123 defined in cradles 124 positioned on the frame 104. Spring-loading the blade 102 forward ensures that the blade 102 is in a desirable shaving position. This may be of particular importance since the process of honing the blade removes material from the edge of the blade 102. Therefore, slight adjustment of the blade 102 position within the frame 104 may be necessary after honing in order to retain the proper shaving position when the blade 102 is returned to its location within the frame 104. As shown in Fig. 10, the blade 102 is positioned in a desirable position for a preferred shaving position for the razor 100A, B. Point A is the cutting point of the blade 102. It is desirable to keep this point in the same position with respect to the cradle 124 (and by extension, the head 108 of the razor 100A, B). Points B and C are the contact points of the blade 102, which contact the cradle 124. As the blade 102 is sharpened, the blade 102 is shortened, thereby shifting the position of point A in the cradle 124. To compensate for the shortened blade 102, the springs 120 bias the blade 102 forward in the pocket 123 of the cradle 124 to position points B and C at the same contact point each time the blade 102 is retained in the cradle 124. The razor frame 104 is pivotally attached to the handle 106 via frame pins 126. A spring or other biasing member (not shown) extending from the frame 104 keeps the frame 104 biased forward and the frame pin 126 allows the frame 104 to pivot around an axis that runs through the frame pin 126, in order to accommodate the contours of the body surface during shaving while keeping the blade 102 at the correct angle relative to the skin. One end of this spring may be received within the frame 104 and an opposing end may be received within the razor handle 106.

[0038] Cover pins 130 are positioned on an inside surface of cover 110, optionally extending from tabs 131. The cover 110 is pivotable around an axis extending through cover pins 130 such that cover 110 can open to expose the blade 102. Opening of the cover 110 is accomplished by movement of the blade pins 114 in a direction toward the cover pins 130 such that the springs 120 are compressed and the blade 102 is retracted. Upon retraction of the blade 102 (Figs. 7, 8), the blade 102 moves out of pockets 123 of the cradles 124. When the blade 102 is not engaged in the pockets 123, the cover 110 is able to be moved away from the frame back 112 by pivoting the cover 110 around the cover pins 130 (Fig. 9). Once the cover 110 is open, the pins 114 can be released and will move away from the cover pins 130, thereby releasing the springs 120, resulting in expansion of the springs 120, once again biasing the blade 102 into a forward position. Without the cradles 124 to restrain it, the blade 102 can extend forward and protrude from the cover 110.

[0039] Another embodiment of the invention includes a razor treatment device 200 for maintenance of the razor 100A, 100B. Referring now to **Figures 11-14**, the razor treatment device 200 includes a housing 202 comprising a back side 204, a left side 206, a right side 208, a top 210, and a bottom 212. The housing 202 also includes a front side 214 with a front panel 216, an opening 218, a cross bar 220 including a hook 222, and ball spring plungers 224. The ball spring plungers 224 are located on a top edge 226 of the front panel 216, opposite the hook 222 and may be spaced equidistant from the sides of the housing 202. It is also contemplated that the ball spring plungers 124 may be replaced with other suitable mechanisms suitable for snap fitting the razor head 108 within the housing 202.

[0040] Within the housing 202 is a portion 228 for honing the blade 102 of the razor 100A, 100B. Honing portion 228 includes an upper sharpening drum 230 and a lower sharpening drum 232 rotationally supported within the housing 202. As detailed below, blade 102 is received in between drums 230, 232. It is also contemplated that only one drum may be used to sharpen and/or strop the blade 102. As shown in **Fig. 17**, a raised sharpening surface 234 of the upper drum 230 is in the form of a ribbon that wraps around the drum 230 in a helical fashion. A non-sharpening surface 236 sits below and in-between the sections of the sharpening surface 234. The sharpening surface 234 of the upper drum 230 opposes a non-sharpening surface 240 of the lower drum 232. The non-sharpening surface 240 also is a ribbon that wraps around the drum in the alternate space from the sharpening surface 234. The non-sharpening surface 240 sits below and in-between the section of a sharpening surface 238 on the lower drum 232. Likewise, the non-sharpening surface 236 of the upper drum 230 opposes the sharpening surface 238 of the lower drum 232. Because the sharpening surfaces 234 and 238 are raised with respect to the non-sharpening surfaces 236 and 240, the sharpening surfaces 234, 238 of the opposite drums are able to overlap such that the sharpening surface 234 of the upper drum 230 extends into a gap defined by non-sharpening surface 240 of the lower drum 232. Likewise, the sharpening surface 238 of the lower drum 232 extends into a gap defined by the non-sharpening surface 236 of the upper drum 230. By providing a helical sharpening surface 234, 238 on each drum 230, 232, the drums 230, 232 are configured to engage or inter-engage with one another to create an overlap. This overlap may be desirable in order to maintain the desired angle on the razor blade 102 after sharpening of the blade 102. If the surface of the drums 230, 232 were flat and simply flush against each other, the angle of the blade 102 created by honing with those drums would approach zero degrees, while extremely sharp, a blade with this angle may be too fragile to cut well. The angle of a cutting tool is a balance between sharpness (smaller angle) and

durability (larger angle). In some embodiments, the angle between a top surface and a bottom surface of the razor blade **102** is between 15 degrees and 20 degrees. In some embodiments, the angle of the razor blade **102** is 16 degrees. The overlap of the upper sharpening drum **230** and the lower sharpening drum **232** can produce the appropriate angle.

[0041] The helical aspect of the design accommodates sharpening of substantially the entire length of blade **102**. As the drums **230**, **232** rotate, the portions of the sharpening surfaces **234**, **238** in contact with the blade **102** move down the entire length of the blade surface on both sides thereof. The sharpening surfaces **234**, **238** of the sharpening drums **230**, **232** may include a very hard material such as stone or a diamond coating, as is typically used for sharpening purposes.

[0042] As shown in **Fig. 15**, the lower drum **232** is biased in a rearward position by a spring **242**. The spring **242** is positioned on a member **272** of the housing **202** at one end and positioned on the linkage **250** at an opposing end. The spring **242** is biased so as to pull the linkage **250** rearward, thereby also biasing the lower drum **232** in a rearward position. This resting position may be desired so that when the razor **100A**, **100B** is engaged in the razor treatment device **200** and the cover **110** of the razor **100A**, **100B** is opened to expose the blade **102** for sharpening (see discussion below), the lower drum **232** is not in a position to block the opening of the cover **110** or the extension of the blade **102** out of the cover **110**. The lower drum **232** is moved forward into the correct position once the blade **102** is in position for sharpening. The mechanics of the positioning of the lower drum **232** will be discussed in more detail below. In another embodiment, the lower drum **232** may be held stationary, without the spring **242** biasing the lower drum **232** in a rearward position. In this embodiment, however, the linear retraction of the blade **102** within the cover **110** is increased so that the blade **102** may clear the lower drum **232** upon insertion into the razor treatment device **200**.

[0043] Also within the housing **202** are rotatably mounted gears **244**, **246** and **248** (received on respective axles mounted to housing **202**) and linkage **250** extending between gears **244** and a drum gear **254**, which together compose a gear train that moves the lower drum **232** forward and into place for sharpening of the blade **102**. Drum gears **252** and **254** are mounted on common axles with respective upper sharpening drum **230** and lower sharpening drum **232**, with the drum axles mounted to housing **202**.

[0044] Unless otherwise stated, all other components within the housing **202** are duplicated on each side of the razor treatment device **200** so, although they may be discussed herein as a single component, the discussion applies equally to the analogous component on the opposite

side of the razor treatment device 200. Also contained in the housing 202 are two forked guide members 256, one on either side of the pair of drums 230, 232. Each forked guide member 256 is associated with a cam track 258. As will be discussed in further detail, the forked guide member 256, when biased in a forward position, engages the pin 114 on the blade 102 within a forked end 260 of the forked guide member 256 when the razor 100A, 100B is inserted in the razor treatment device 200. As the forked end of the forked guide member 256 is moved rearward, the associated blade pin 114 is pushed along with the forked guide member 256. The blade pin 114 rides on a surface of the cam track 258 as it moves rearward. This arrangement results in the opening of the cover 110 and release of the blade 102 for sharpening, as described in more detail below. The cam track 258 includes a first run 262 and a second run 264. The forked guide members 256 are biased forward via a coil spring or the like incorporated into an actuating member 268, configured such that rotation of the actuating member 268 rotates the forked guide members 256. When the razor 100A, 100B is removed from the razor treatment device 200, the forked guide members 256 move forward automatically and are in place and available to receive the blade pins 114 the next time the razor 100A, 100B is inserted in the razor treatment device 200.

[0045] The razor treatment device 200 includes two actuating members 266, 268 which may be located on a side of the razor treatment device 200. The actuating members 266, 268 are shown as knobs, but may be replaced by levers or any other mechanism to impart movement from the user to the appropriate components within the razor treatment device 200, and/or they may be positioned in any location on the razor treatment device 200 provided they are able to perform the appropriate functions as described herein. One actuating member 268 connected to forked guide members 256 by rod member 270 may be turned by the user after the razor 100A, 100B has been latched into the razor treatment device 200. Movement of actuating member 268 is converted to movement of the forked guide members 256 by rotation of rod member 270, which engages and moves the blade pins 114, and also to movement of the lower drum 232 into the correct position for sharpening.

[0046] The second actuating member 266 may be turned by the user once the blade 102 is extended and in place for sharpening. This actuating member 266 turns the drums 230, 232 so that the blade 102 is sharpened by the movement of the sharpening surfaces 234, 238 along each side of the blade 102. This process will be discussed in further detail hereinbelow. In some embodiments, the actuating member 266 may include a slip clutch to prevent the actuating member 266 from being turned in the wrong direction, which could damage the blade.

[0047] In some embodiments, as shown in **Fig. 16**, the razor treatment device **300** includes a stropping portion **302**. For the purposes of this discussion, the stropping portion **302** is located opposite the honing portion **304** within the housing **306** of the razor treatment device **300** but can be located elsewhere, as desired. For example, the stropping portion **302** may be located above or below the honing portion **304**. The stropping portion **302** has the same or similar mechanical arrangement and mechanical functions as described for the honing portion **304** except for the differences described herein. As shown in **FIG. 36**, the drums **308, 310** of the stropping portion **302** may be made of rubber, leather, or other suitable material that will bend the edge of the blade **102** back to true. Alternatively, the drums **308, 310** may be coated with an extremely fine abrasive material that can polish and bend the edge of the blade **102**, as opposed to the abrasives that remove larger amounts of material from the edge of the blade **102** as would be used for honing. This extremely fine abrasive material may be a paste or polishing compound that may be externally applied to the drums **308, 310** to achieve a very fine abrasion. Once the razor head **108** is inserted into the opening of the stropping portion **302** of the razor treatment device **300** and the blade **102** is released and extended to contact the stropping drums **308, 310** by turning of a lower actuating member **314** connected thereto, the stropping drums **308, 310** are turned in a similar fashion as the sharpening drum **316**. However, as viewed from the right side **318** of the razor treatment device **300**, an upper actuating member **312** of the stropping portion **302** is turned in a clockwise direction to rotate the upper stropping drum **308** in a clockwise direction. The upper stropping drum gear **320** rotates in a clockwise direction with the upper stropping drum **308** and imparts a counterclockwise rotation to a lower stropping drum gear (not shown). The lower stropping drum gear is associated with the lower stropping drum **310**, which also rotates in a counterclockwise direction. This concerted movement of the stropping drums **308, 310** results in straightening of the edge of the blade **102**. As opposed to honing, no material is removed from the blade **102** in the stropping process, but the existing blade edge is bent back to a straight form.

[0048] The honing of the blade **102** and the stropping of the blade **102** are performed in opposite directions. When the blade **102** is honed, the sharpening drums **230, 232** are rotated “into” the blade **102**. When the blade **102** is stropped, the drums **230, 232** are rotated “away” from the blade **102**. This opposite direction of rotation lends itself to having only one user input actuating member to rotate both sets of drums in their respective directions, even if the razor **100A, 100B** is only engaged in one side of the razor treatment device **200**. This reduces the number of actuating members needed for rotating the drums and reduces the cost of

manufacturing such device. This also helps to eliminate user confusion as to which actuating member is used to rotate which set of drums. In order to ensure the user rotates the actuating member in the correct direction, a slip clutch (or similar anti-rotational device) may be incorporated so the actuating member 266 can only be turned in one direction.

[0049] It should be noted that, while the actuating members 312, 314 are shown as being located on the right side 318 of the razor treatment device 300, the actuating members 312, 314 may alternatively be located on the left side 322. This alternative location of the actuating members 312, 314 would require suitable alteration of the gear train associated with these actuating members 312, 314 and the stropping drums 308, 310, as would be known to one skilled in the art, in order to produce the proper rotation of the stropping drums 308, 310 required to straighten the blade edge (i.e., clockwise rotation of the upper stropping drum 308 and counterclockwise rotation of the lower stropping drum 310 as viewed from the right side 318).

[0050] In another alternative embodiment, as shown in Figs. 18-35, the forked guide members 256 are replaced with a different type of guide members. These arcuate guide members 402, along with the cam track 257, provide for similar blade motion as the forked guide member 256 and the cam track 258. The cam track 257 remains stationary and positioned on the sharpener 200 while the blade pins 114 ride along the surface of the cam track 257. In contrast, the arcuate guide members 402 rotate to engage the blade pins 114 and move the blade pins 114 over the cam track 257 surface. The arcuate guide members 402 are arcuate-shaped and define at least two recesses 404, 406 defining surfaces 408, 410 to receive the blade pins 114. The blade 102 may be retracted back into the cover 110 by rotating the arcuate guide member 402 in an opposite direction, so as to move the blade pins 114 along the surface of an opposing recess.

[0051] In an alternative embodiment, shown in Figures 18-20, the arcuate guide members 402 may be connected to a rack 412, received on linear bearing 414, and pinion 416 mechanism. In this embodiment, an actuating member 418, shown as a lever, uses linear motion to move the rack 412, which translates into rotation of the arcuate guide members 402. The user actuates the actuating member 418 that is connected to the rack 412, which turns the pinion 416, which is connected to the arcuate guide members 402. The limits of rotation of the arcuate guide members 402 are created by the linear distance the rack 412 is permitted to travel. Two hardstops 420 are positioned on the top and the bottom of the linear bearing 414 of the rack 412. In this embodiment, there are two different stable positions for the arcuate guide member 402. The first stable position occurs upon insertion of the razor

100A, 100B into the razor treatment device **200**. The second stable position occurs when the blade **102** is engaged with the sharpening drums **230, 232**, which is the position in which the actuating member **266** is rotated. Neither of these stable positions is at the hardstops **420** but rather in between the limits of travel of the rack **412**. Full rotation of the arcuate guide members **402** (at the hardstop) only moves the blade **102** through the first two steps of movement (linear retraction and rotation), so to achieve the final linear extension of the blade **102**, the arcuate guide member **402** needs to reverse direction to allow the blade springs **120** to extend the blade **102**.

[0052] It is desirable to have a limited number of user inputs (or user actions) to operate the system. One action engages/disengages the blade **102** into the sharpening drums **230, 232** and one action rotates the sharpening drums **230, 232**. By using the arcuate guide members **402** with offset stable positions, a complex motion with a single user input is achieved. The offset stable positions from the hardstops **420** are created by using springs **422** to bias the linear rack **412** to the middle of the stroke and spring plungers **426** (or similar “catches”) that keep the rack **412** in place when it reaches the stable position.

[0053] It is contemplated that this razor treatment device **200** may be used on a horizontal surface or mounted vertically on wall, such as a wall in a shower. The razor treatment device **200** may be waterproof and may use water as a sharpening lubricant. The razor treatment device **200** may be cleaned with common household products (rubbing alcohol, vinegar, dish soap, etc.). The razor treatment device **200** may have a storage portion for the razor **100A, 100B** to be housed in when not in use. The razor **100A, 100B** may also have a separate blade protector that may be stored in the razor treatment device **200** or used to protect the blade **102** when not in use.

[0054] Turning now to one process for sharpening the blade **102** of the razor **100A, 100B**, all movement will be described as viewed from the left side **206** of the housing **202**. It is also to be understood that a similar process is used to strop the blade **102** of the razor **100A, 100B**. First, the razor **100A, 100B** is inserted into the razor treatment device **200**. With the front of the razor head **108** facing the opening **218** on the front side **214** of the razor treatment device **200**, a lever **116** on the back of the razor frame **104** is aligned in the hook **222** of the crossbar **220** above the opening **218**. Once the lever **116** is engaged in the hook **222**, the razor head **108** can be pivoted downward so that the cover **110** is aligned within the opening **218**. The ball spring plungers **224** engage the lower edge **134** of the razor head **108** and lock it into place within the opening **218** as the razor head **108** is pivoted fully forward. When the razor

head 108 is locked in place, the forked end 260 of each forked guide member 256 receives a respective blade pin 114.

[0055] With the razor head 108 in place, the user may initiate the process to sharpen the blade 102. In the resting position, the forked guide members 256 receive their respective blade pin 114 and the lower drum 232 is biased in a rearward position. As the user turns the lower actuating member 268 in a counterclockwise direction to initiate the honing process, the forked guide member 256 is likewise rotated in a counterclockwise direction around an axis perpendicular to the forked guide member 256. As this rotation occurs, the forked guide member 256 moves its associated blade pin 114. Each blade pin 114 moves along an associated cam track 258 surface. As the blade pin 114 moves along a first run 262 of the cam track 258, the blade pin 114 is moved toward the cover pin 130 of the razor head 108. The movement of the blade pins 114 toward the cover pin 130 compresses the springs 120 and the blade 102 is retracted from the pockets 132 of the cradles 124. As the forked guide member 256 pushes the blade pin 114 along a second run 264 of the cam track 258, the razor cover 110 is moved to an open position as it pivots around the cover pin 130. As a result of the spring-loading of the blade 102 within the cover 110 and the absence of the cradles 124 in its direct path, the blade 102 is then extended to a forward position as it moves into place against the upper sharpening drum 230.

[0056] During this movement of the forked guide member 256, counterclockwise rotation of the actuating member 268 causes the gear 244 also to rotate in a counterclockwise direction. As the teeth of the gear 244 engage the teeth of the gear 246, the gear 246 is rotated in a clockwise direction. A portion of the circumference of the gear 246 does not contain teeth. Consequently, as a toothless portion 247 of the gear 246 moves past the gear 248, there is no movement imparted to the gear 248. Once the forked guide member 256 reaches the end of its counterclockwise movement, the first tooth of the gear 246 engages the teeth of the gear 248 and the gear 248 is rotated in a counterclockwise direction. The counterclockwise rotation of the gear 248 is imparted to the linkage 250 and swings the linkage 250 in a forward direction (toward the razor 100A, 100B). The linkage 250 is attached to the lower sharpening drum 232, which is consequently swung into place against the upper sharpening drum 230 and the extended blade 102.

[0057] With the razor blade 102 and the sharpening drums 230, 232 in place, the user may turn the upper actuating member 266 to rotate the sharpening drums 230, 232 and sharpen the blade 102. The user may rotate the upper actuating member 266 in a counterclockwise direction, which results in the counterclockwise rotation of the upper sharpening drum 230.

The drum gear **252** rotates counterclockwise with the upper sharpening drum **230** and imparts a clockwise rotation to the drum gear **254**. The drum gear **254** is operatively connected to the lower sharpening drum **232**, which consequently rotates in a clockwise direction. This coordinated rotation results in the sharpening of the blade **102** following a limited (for example, three or four) number of rotations of the actuating member **266**, depending on the gear ratio used.

[0058] Once the sharpening process is complete, the lower actuating member **268** may be rotated in the opposite direction as previously described (clockwise, as viewed from the left side **206** of the housing **202**) and the previous actions initiated with counterclockwise rotation of this actuating member **268** are reversed to retract the blade **102** and close the cover **110**. Clockwise rotation of lower actuating member **268** results in the movement of the forked guide member **256** toward the front side **214** of the razor treatment device **200**. As the forked guide member **256** moves forward, it pushes against the blade pin **114** and moves the blade pin **114** in the forward direction along the second run **264** of the cam track **258**. The force against the blade pin **114** pushes the blade **102** back against the springs **120** and pulls the cover **110** into a closed position. When the forked guide member **256** moves the blade pin **114** along the reverse path of the first run **262** of the cam track **258**, the blade pin **114** is released resulting in forward movement of the blade **102** within the cover **110**. Since the cover **110** has been closed, the extension of the spring-loaded blade **102** is received into the pockets **123** of the cradles **124**, locking the cover **110** closed and positioning the blade **102** for a close shave. The razor **100A**, **100B** may then be removed from the razor treatment device **200** by pulling on the handle **106** to release the razor head **108** from the ball spring plungers **108**. The razor **100A**, **100B** may then be swung upward to release the lever **116** from the hook **222**.

[0059] In an alternative embodiment, a different process uses the arcuate guide members **402** to sharpen the blade **102**, wherein the razor **100A**, **100B** and blade **102** move through a similar motion. In an initial position, the actuating member **418** is in a first stable position. The actuating member **418** is linearly actuated in a downward position to the second stable position (where the blade **102** is retracted and fully rotated). The actuating member **418** is then released and pushed up into the first position by the springs **422**. This allows the arcuate guide members **402** to rotate to allow the blade **102** to linearly extend in between the drums **230**, **232**. To release the razor **100A**, **100B** and blade **102** from the sharpening drums **230**, **232**, the actuating member **418** is pushed from the first stable position upward to a second stable position. This allows the blade pins **114** to move along the cam track **257**, which

allows the blade 102 to linearly retract into the cover 110, rotate about the handle 106, and linearly extend in the cover 110 to return the razor 100A, 100B to its normal operating condition.

[0060] As stated above, the blade 102 moves through a three phase motion to engage and disengage from the sharpening drums 230, 232. The cam track 257 provides the trajectory for this motion and the arcuate guide member 402 supplies the force to move the blade pins 114 along the track. However, the arcuate guide member 402 only moves the blade 102 through the first two stages. The third stage is achieved by the blade springs 120 extending the blade 102 along the remaining portion of the cam track 257. An additional “catch” may be needed to keep the blade in position when it transitions from phase 2 (rotation) to phase 3 (linear extension). Without the “catch”, the blade 102 may rotate in the opposite direction rather than extend linearly. Therefore, the magnets 118 may be used to keep the blade 102 in a linearly extending motion, rather than rotating in an opposite direction. The magnets 118 interact with cross member 424 to keep the blade 102 in the correct position. In the reverse motion (disengaging the blade 102 from the sharpening drums 230, 232), the same motion is achieved, but in the opposite direction. The magnets 118 also help to keep the cover 110 closed in the shaving position as well.

[0061] The foregoing embodiments are not to be construed as limiting of the present invention but are illustrative thereof. Although exemplary embodiments of this invention have been described, it will be clear to those skilled in the art that many modifications in the exemplary embodiments are possible without materially departing from the novel teachings and advantages of this invention. For example, the locations of the actuating members 266, 268, 312, 314, 418 and/or the location of the opening 218 on the device 200 can be varied, provided that their relationship and interaction with the associated components of the device that are critical for the function of the device are properly maintained. Also, different mechanisms may be used to move the pins 114 so as to retract the blade 102 to expose the blade 102 for sharpening; similarly, other mechanisms may be used to retract the blade 102. Other variations and modifications will be understood by one of skill in the art. Accordingly, all such modifications are intended to be included within the scope of this invention.

[0062] While an embodiment of a razor and treatment system is shown in the accompanying figures and described hereinabove in detail, other embodiments will be apparent to, and readily made by, those skilled in the art without departing from the scope and spirit of the invention. Accordingly, the foregoing description is intended to be illustrative rather than restrictive. The invention described hereinabove is defined by the

appended claims and all changes to the invention that fall within the meaning and the range of equivalency of the claims are to be embraced within their scope.

THE INVENTION CLAIMED IS:

1. A razor treatment system, comprising:
a razor having a head, wherein the head includes a cover for housing a blade, wherein the cover is configured to expose the blade; and
a razor treatment device including a drum rotationally supported within the razor treatment device, wherein the razor interfaces with the razor treatment device to move the cover of the razor to expose the blade for treatment of the blade by the drum.
2. The razor treatment system as claimed in claim 1, wherein the razor treatment system further comprises a sharpener comprising at least two cam members supported within the razor treatment device, at least two guide members configured to cooperate with the cam members to expose the blade, and a first actuating member configured to effect rotation of the guide members.
3. The razor treatment system as claimed in claim 1, wherein each cam member defines a cam track that guides linear retraction of the blade, rotational movement of the blade and cover, and linear extension of the blade into a position on the drum.
4. The razor treatment system as claimed in claim 1, wherein the blade of the razor is spring-biased in the cover.
5. The razor treatment system as claimed in claim 4, wherein the razor further comprises at least one cradle member positioned on the head of the razor and configured to hold the spring-biased blade within the cover of the razor, wherein the blade is spring-biased against the cradle member and contacts the cradle member at a portion that is abraded to position a cutting edge of the blade in a same position after each use of the razor treatment system.
6. The razor treatment system as claimed in claim 2, wherein at least a portion of a surface of the drum comprises an abrasive material.
7. The razor treatment system as claimed in claim 6, further comprising a second drum having at least a portion of a surface thereof comprising an abrasive material.

8. The razor treatment system as claimed in claim 6, wherein the abrasive material is provided in a spiral configuration around the outer surface of the drum.

9. The razor treatment system as claimed in claim 2, wherein the razor further includes a pair of pins, each pin extending from an end of a longitudinal axis of the blade and extending out of the cover of the razor, and wherein the pins are movable along the cam path of each cam member by each guide member in order to expose the blade in the razor treatment device.

10. The razor treatment system as claimed in claim 2, wherein each guide member is arcuate-shaped and defines at least two recesses with surfaces configured to guide the pins along the cam path of each cam member.

11. The razor treatment system as claimed in claim 1, wherein the razor further comprises at least one latching mechanism positioned on at least one of a top surface of the cover and a bottom surface of the cover.

12. The razor treatment system as claimed in claim 2, wherein the razor treatment device further includes a stropping portion.

13. The razor treatment system as claimed in claim 12, wherein the stropping portion comprises another rotatably mounted drum comprising on a surface thereof a material suitable to strop the blade.

14. A shaving razor, comprising:
a handle; and
a head comprising a blade and a cover, the head pivotally connected to the handle, and the cover housing the blade; and
wherein the cover is rotatable relative to the handle to extend the blade from the cover.

15. The shaving razor as claimed in claim 14, wherein the blade is spring-biased within the cover.

16. The shaving razor as claimed in claim 15, the razor further comprising a pair of pins, wherein each pin extends out of the cover of the razor along a longitudinal axis of the blade.

17. The shaving razor as claimed in claim 15, the razor further comprising at least one cradle member positioned on the head of the razor and configured to hold the spring-biased blade within the cover of the razor, wherein the blade is spring-biased against the cradle member and contacts the cradle member at a portion that is abraded to position a cutting edge of the blade in a same position after each use of the shaving razor.

18. A razor treatment device, comprising:
a drum rotationally supported within a housing,
at least two cam members supported within the housing,
at least two guide members configured to cooperate with the cam members to interact with a shaving razor, and
a first actuating member configured to effect rotation of the guide members.

19. The razor treatment device as claimed in claim 18, further comprising a second drum rotationally supported within the housing.

20. The razor treatment device as claimed in claim 19, wherein each cam member defines a cam track that guides linear retraction of a blade of a shaving razor, rotational movement of the blade and a cover of the shaving razor, and linear extension of the blade into a position between the drums.

21. The razor treatment device as claimed in claim 20, wherein at least a portion of at least one drum comprises an abrasive material.

22. The razor treatment device as claimed in claim 21, wherein the abrasive material is provided in a spiral configuration around the outer surface of the drums.

23. The razor treatment device as claimed in claim 20, wherein each guide member is arcuate-shaped and defines at least two recesses with surfaces configured to guide the blade of the shaving razor along the cam path of each cam member.

24. The razor treatment device as claimed in claim 21, further comprising a stropping portion rotatably supported within the housing.

25. The razor treatment device as claimed in claim 20, wherein the first drum and second drum are rotatably positioned on one side of the razor treatment device and the stropping portion is rotatably positioned on an opposite side of the housing.

26. The razor treatment device as claimed in claim 25, wherein the stropping portion comprises a rotatably supported drum comprising a surface bearing a material suitable to strop the blade.

1/22

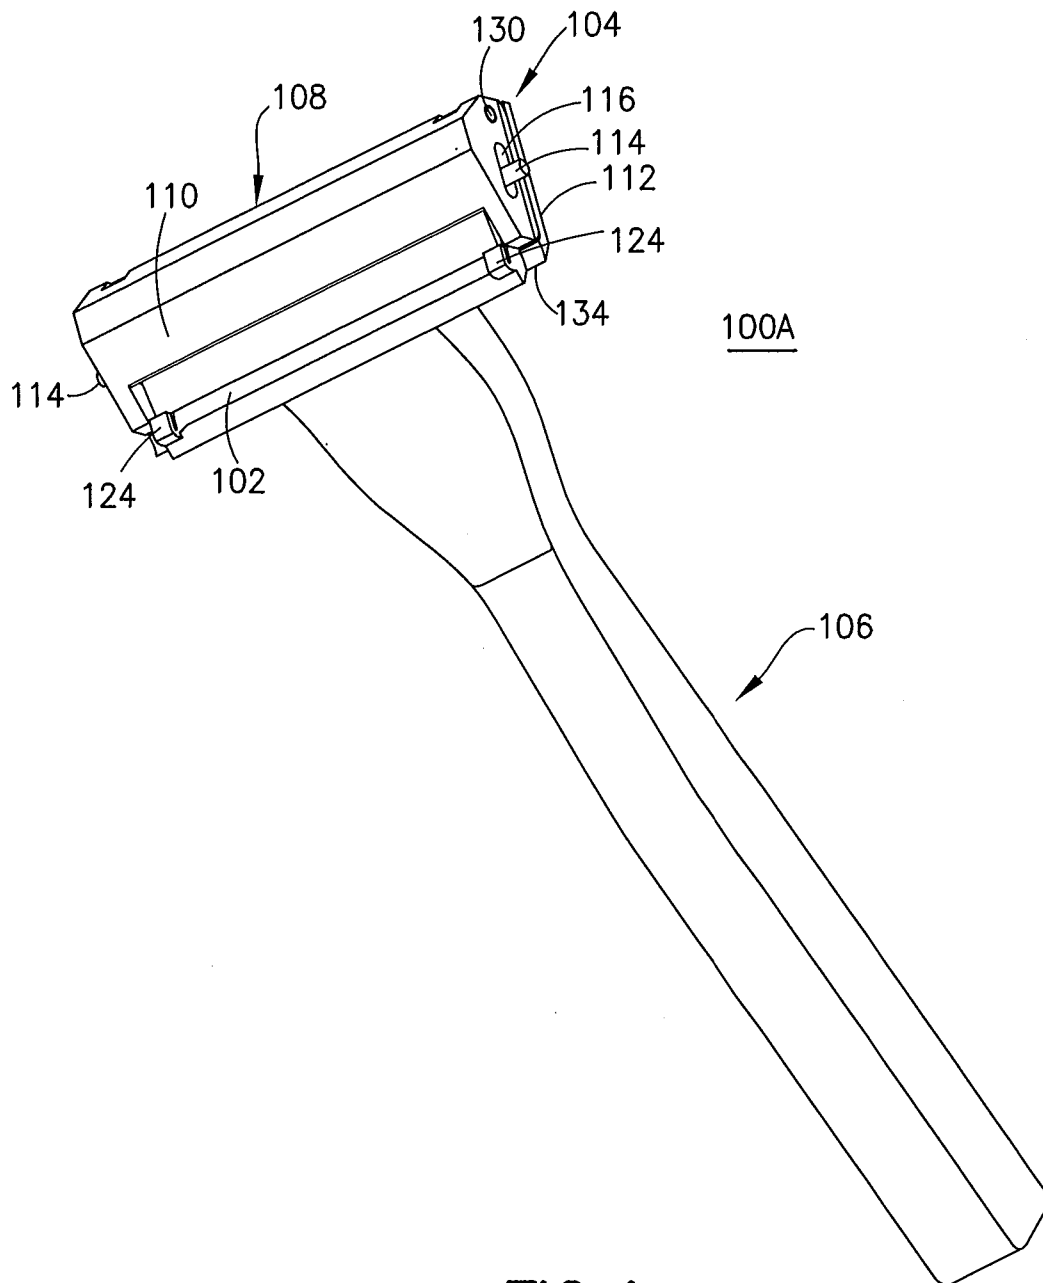


FIG. 1

2/22

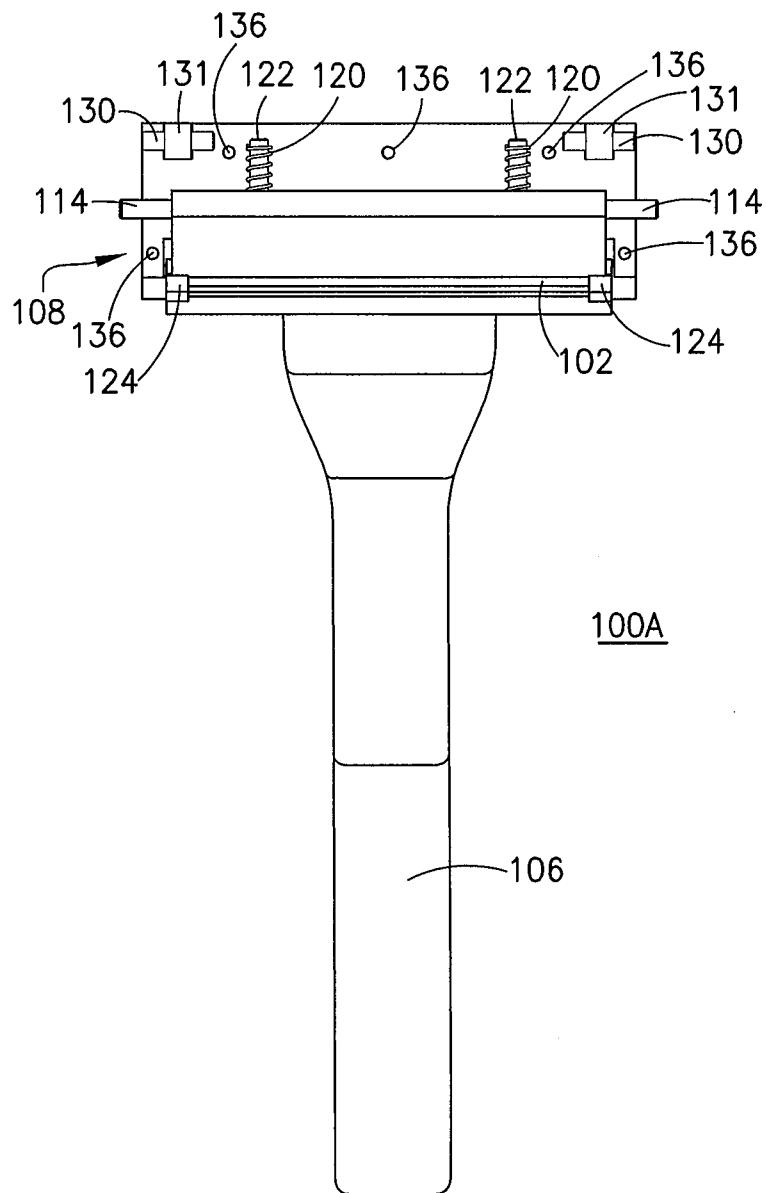


FIG.2

3/22

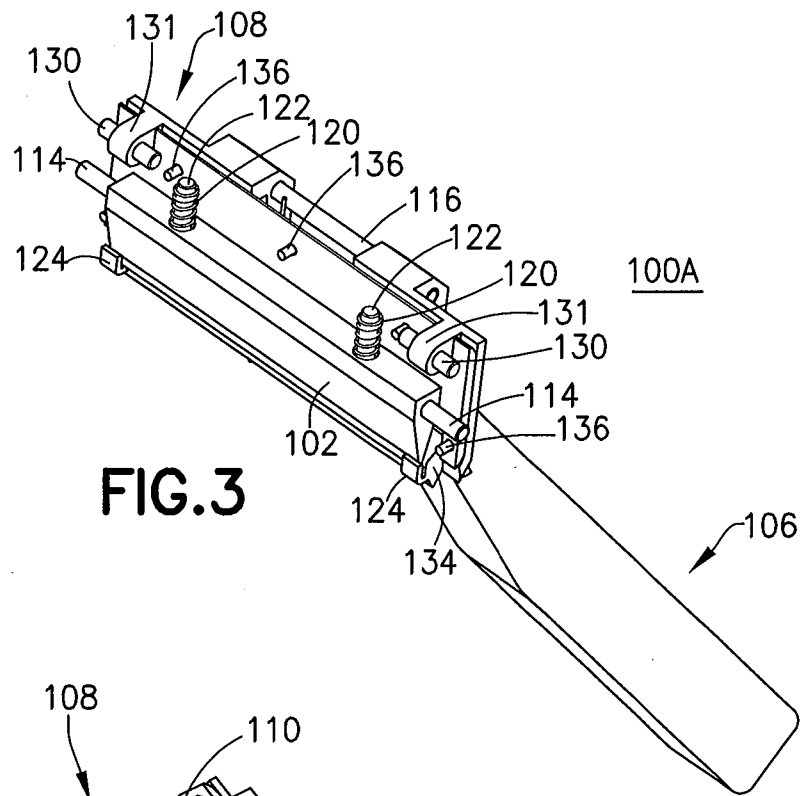


FIG. 3


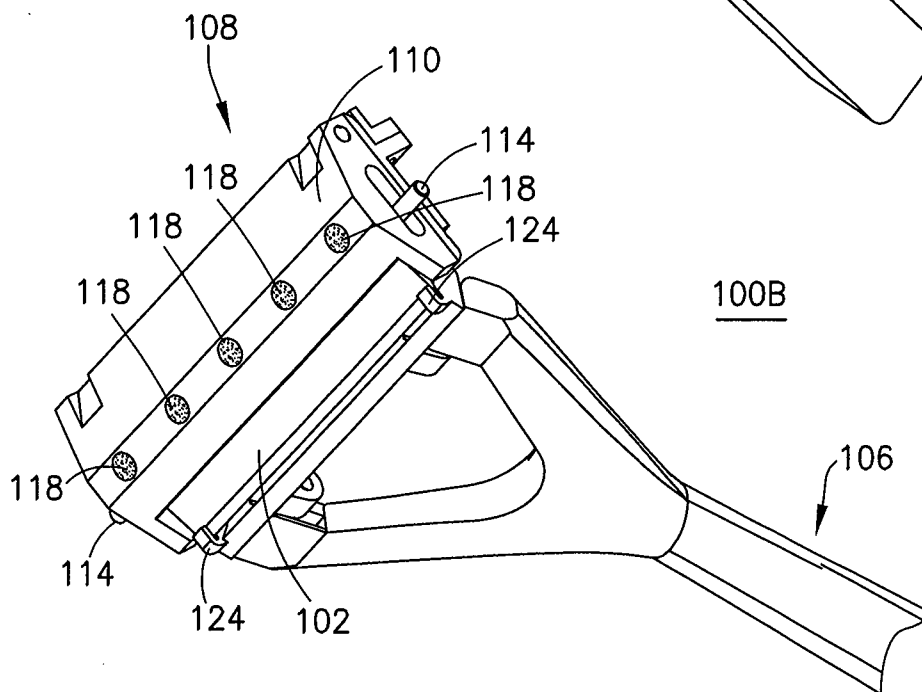


FIG. 4

4/22

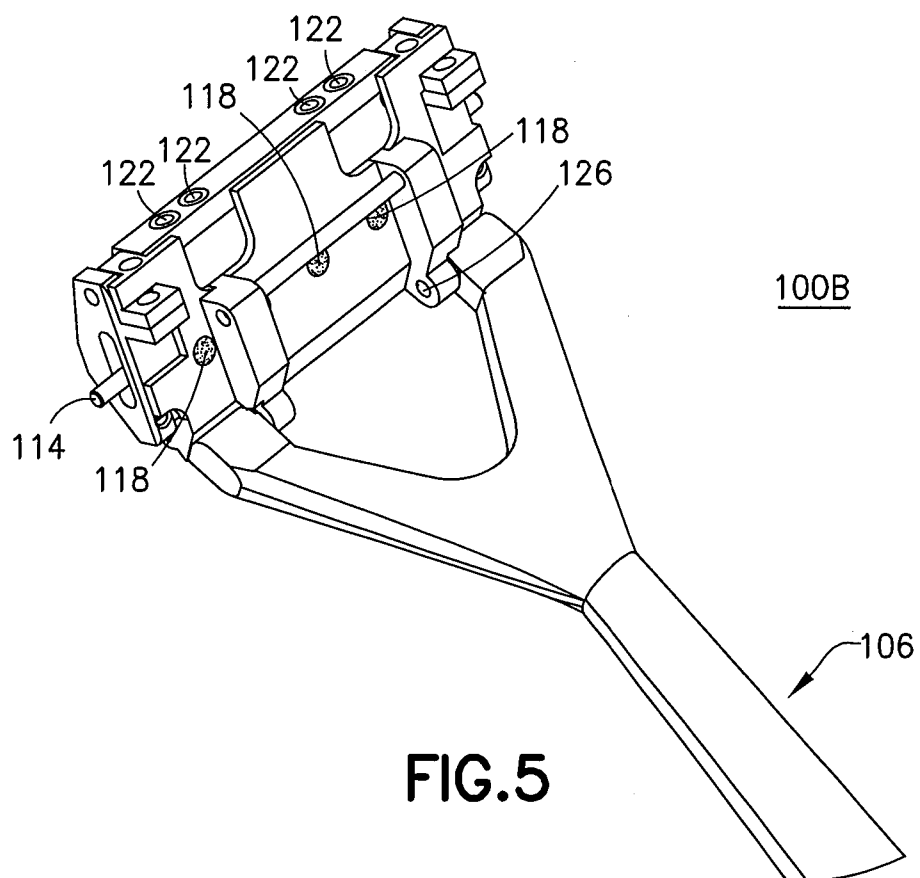

5/22

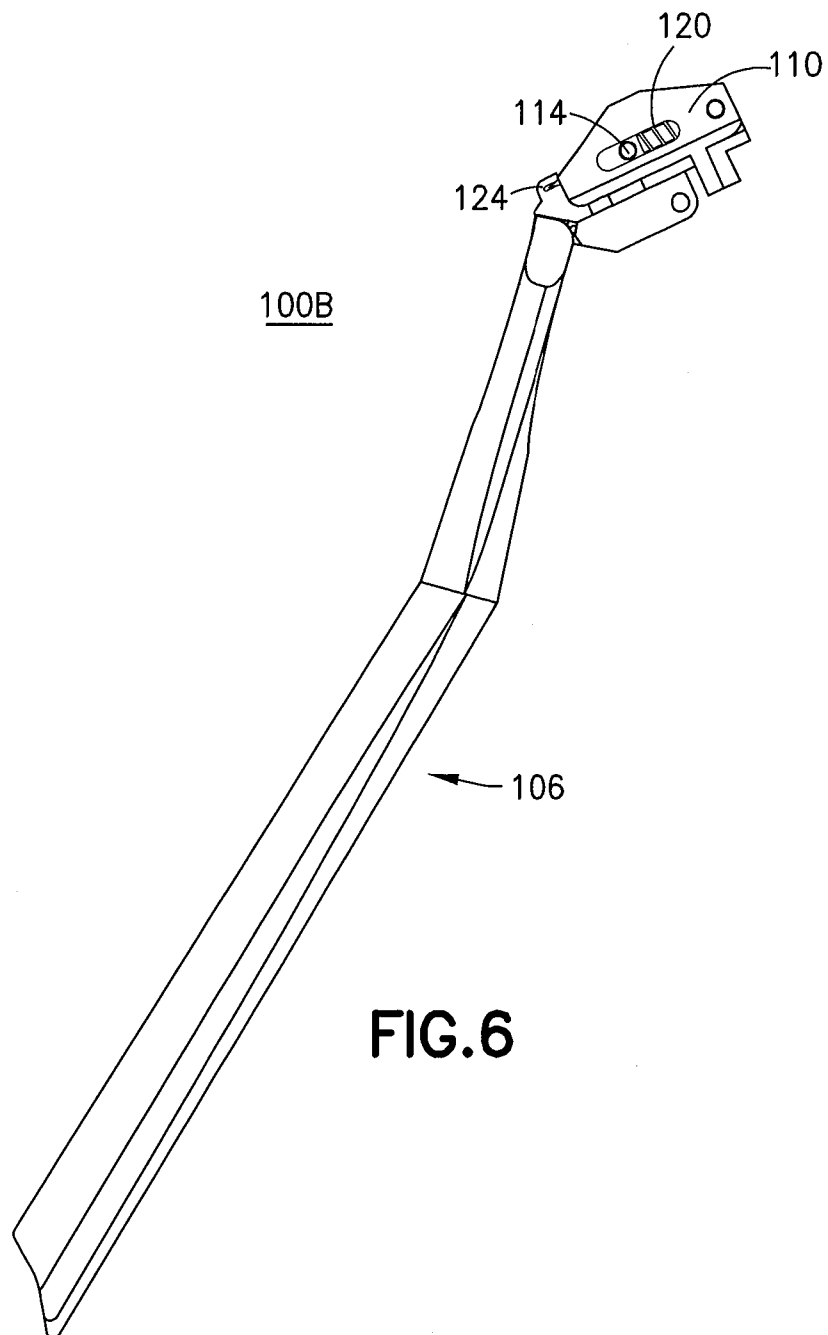


FIG. 6

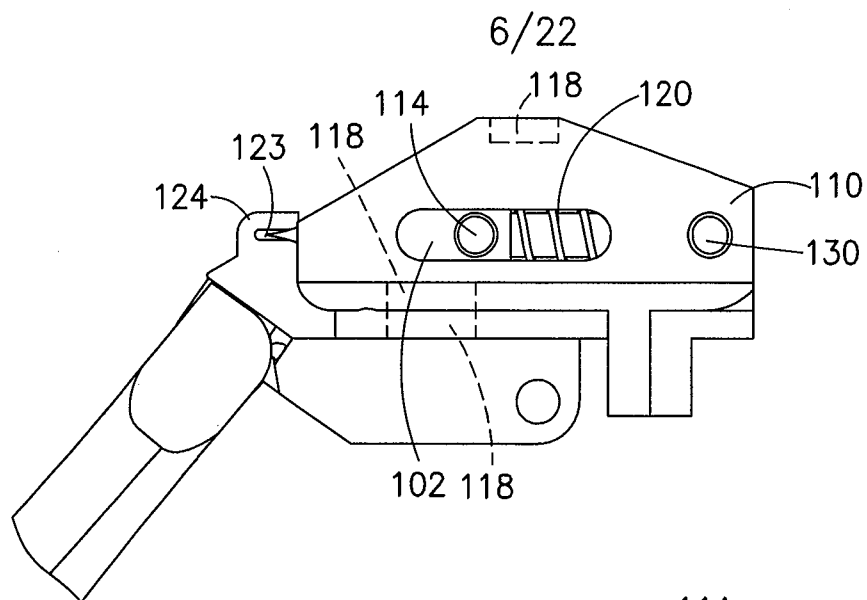


FIG. 7

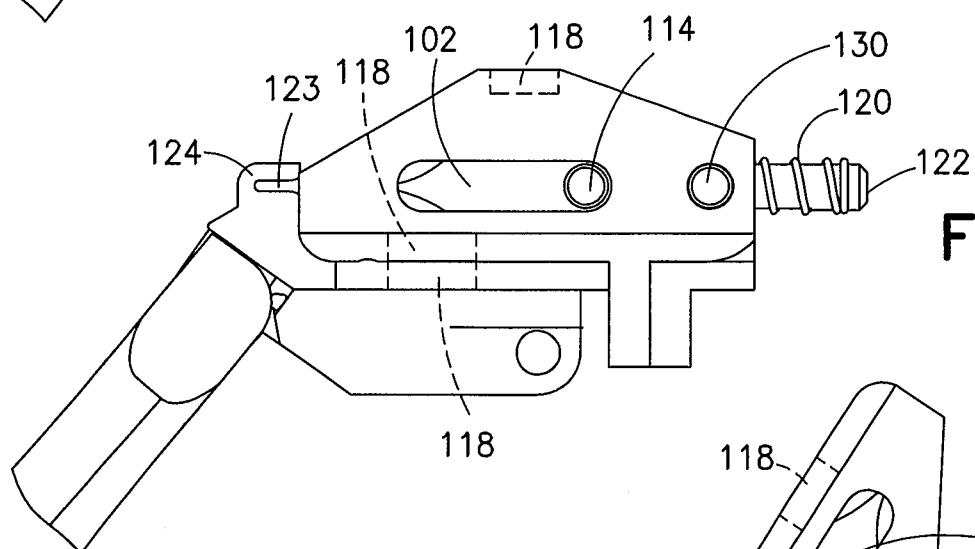


FIG. 8

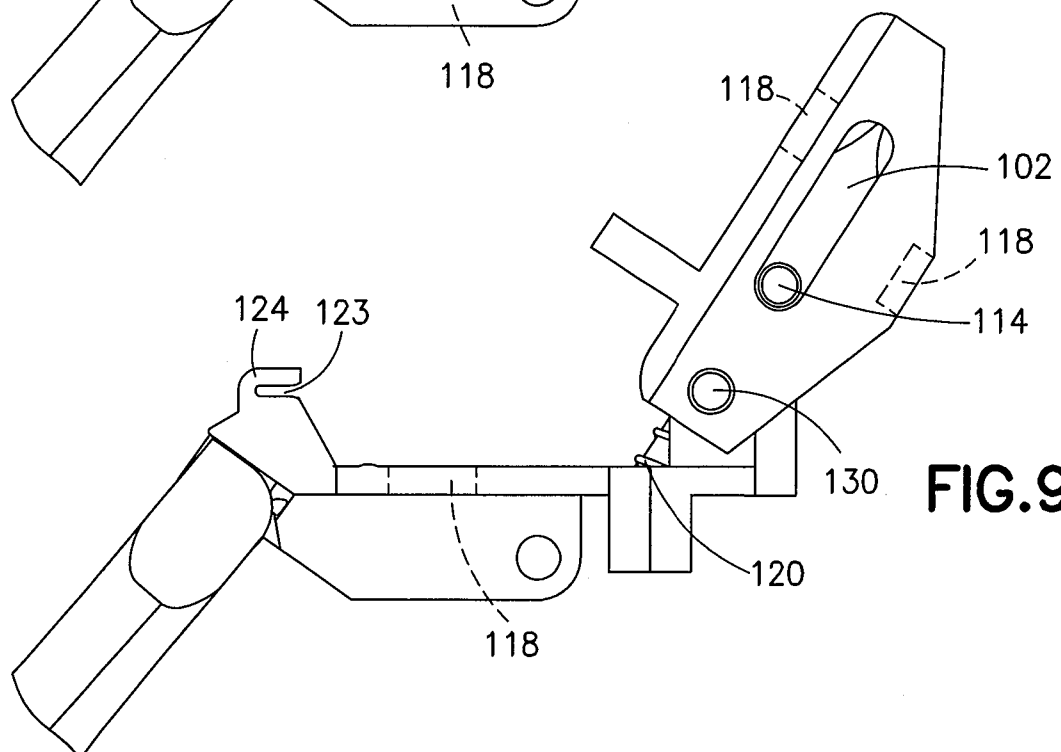


FIG. 9

7/22

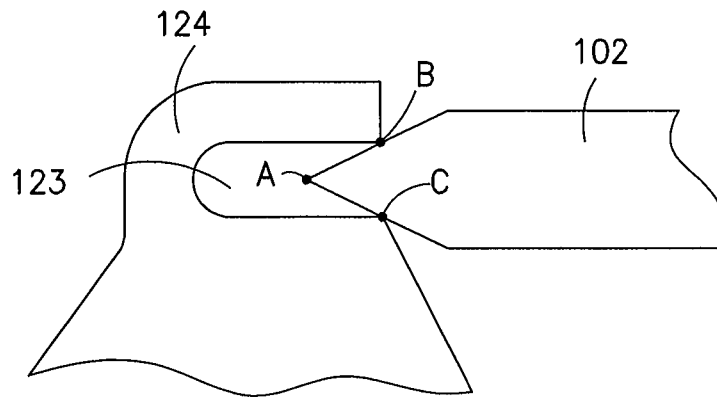


FIG. 10

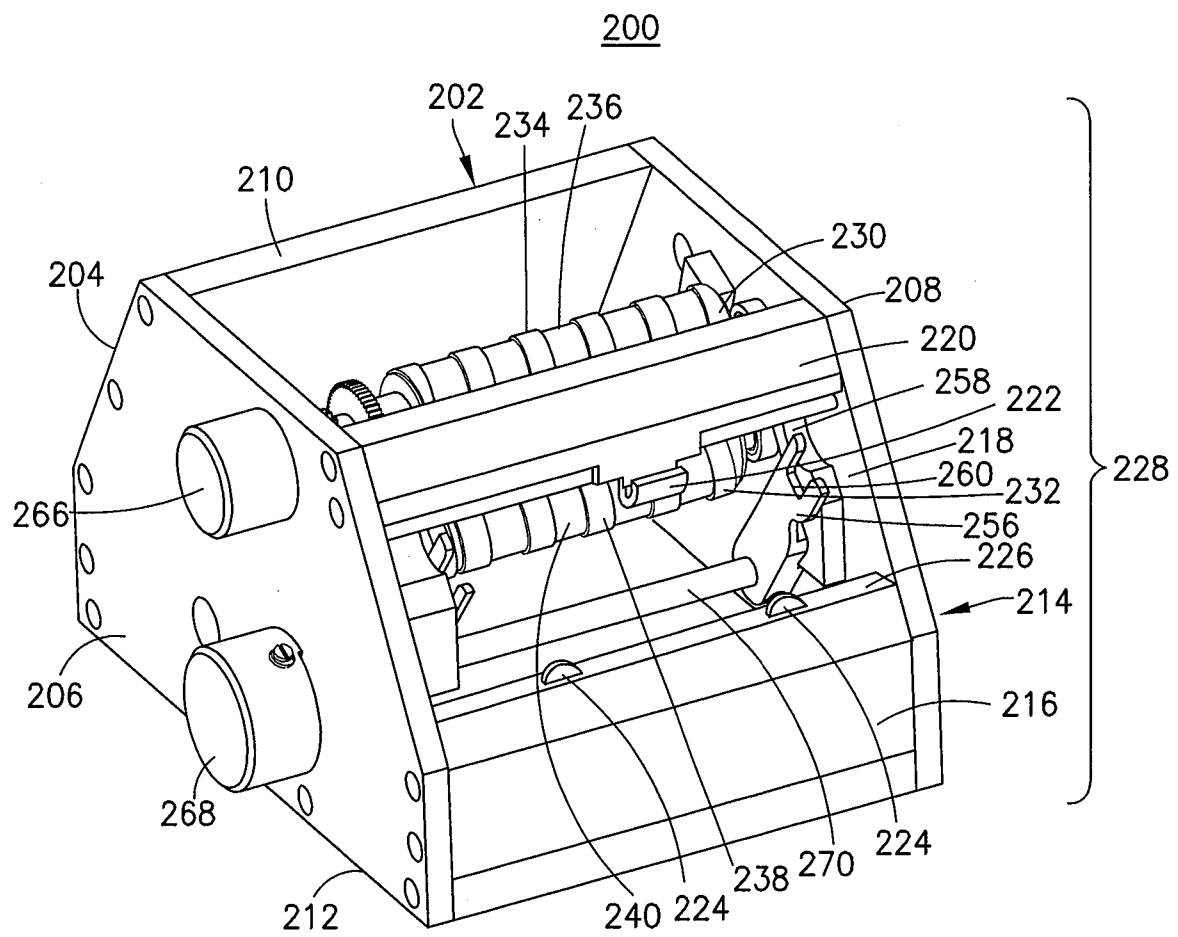


FIG. 11

8/22

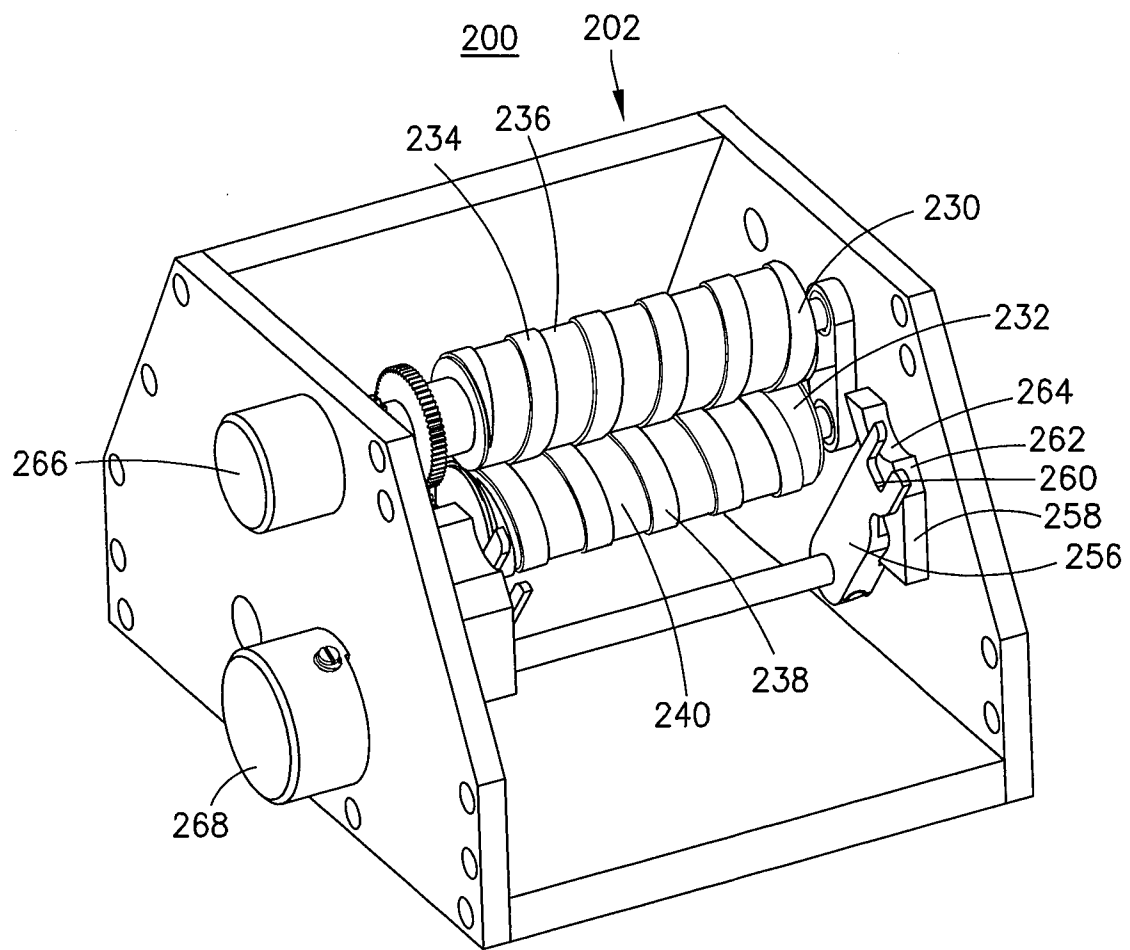


FIG. 12

9/22

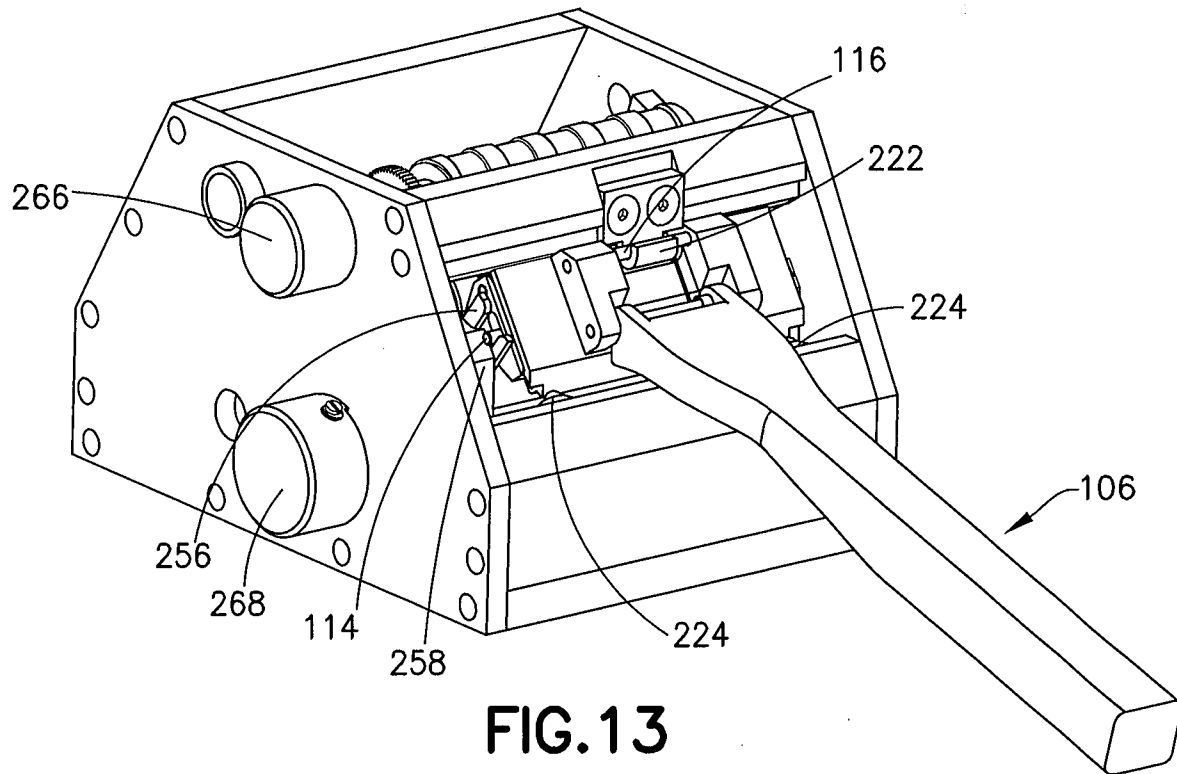


FIG. 13

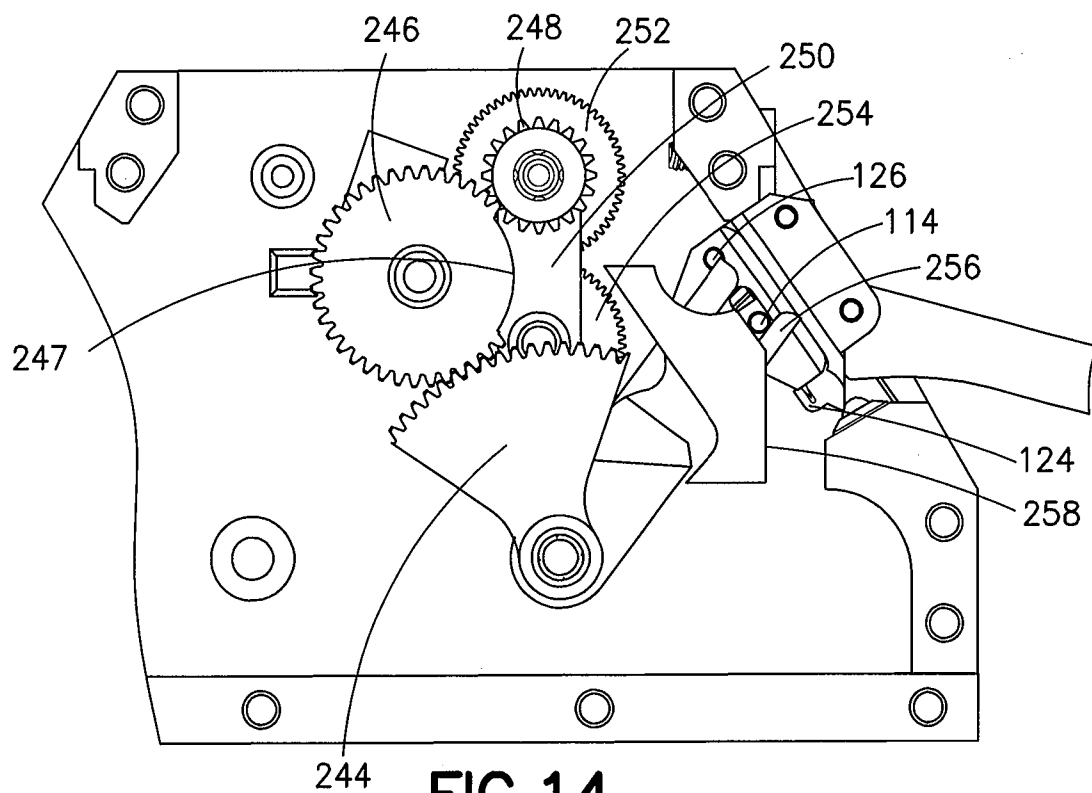


FIG. 14

10/22

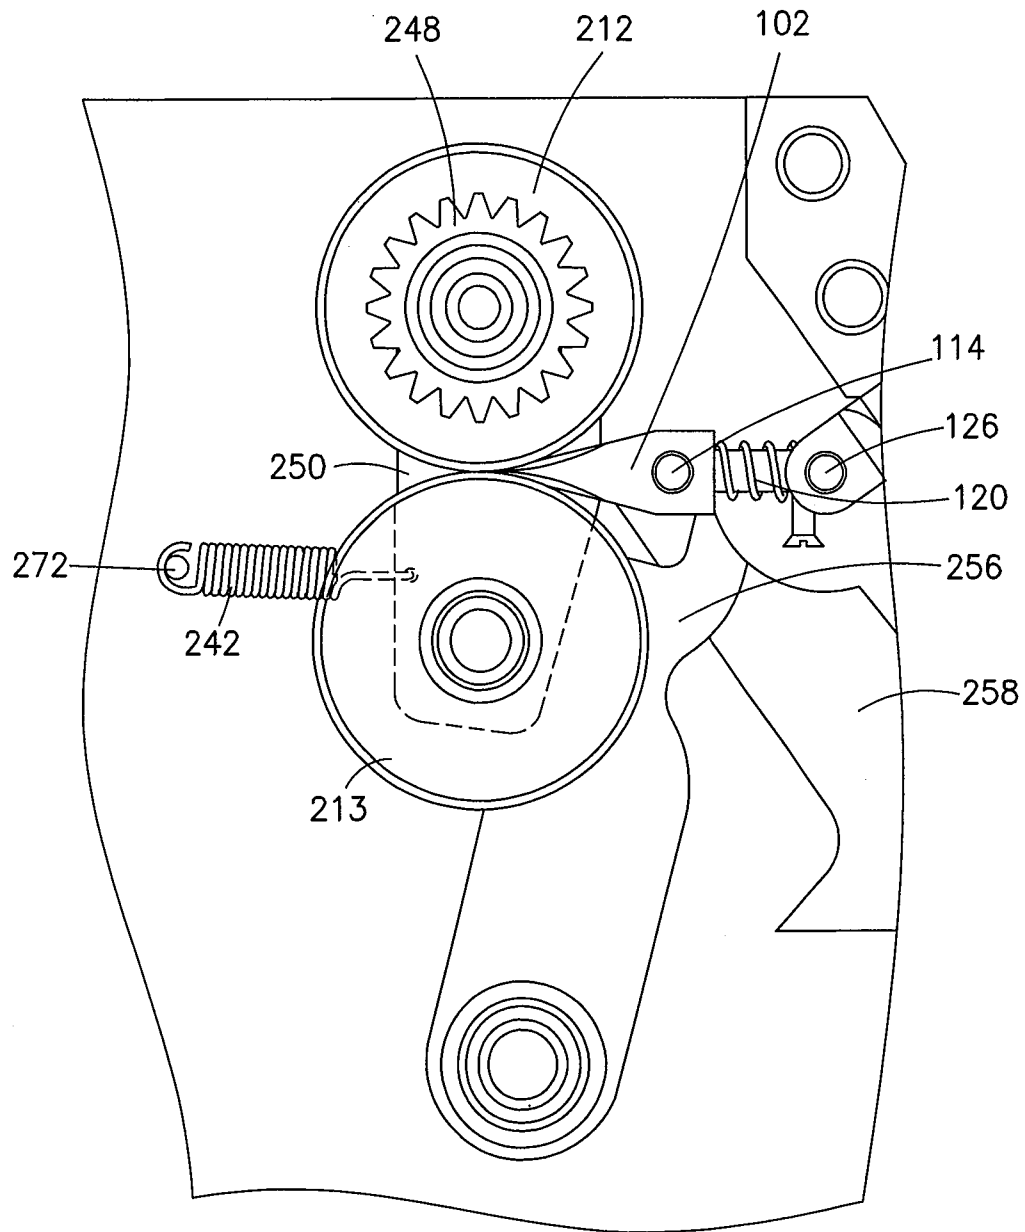


FIG. 15

11/22

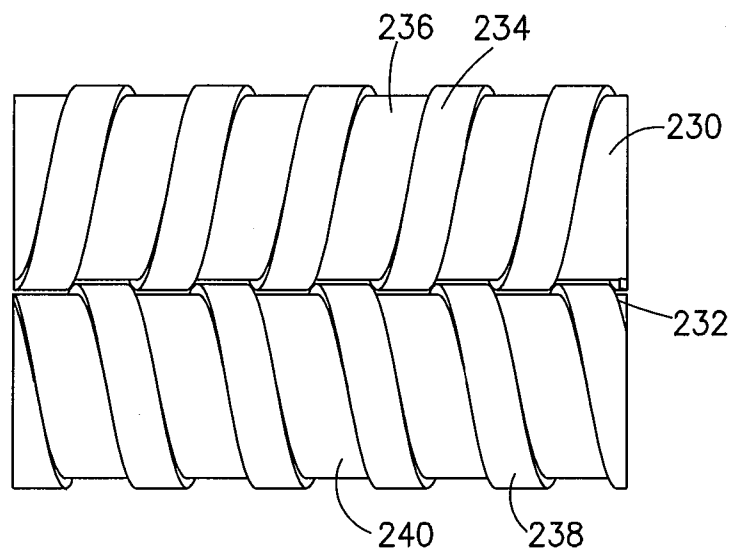
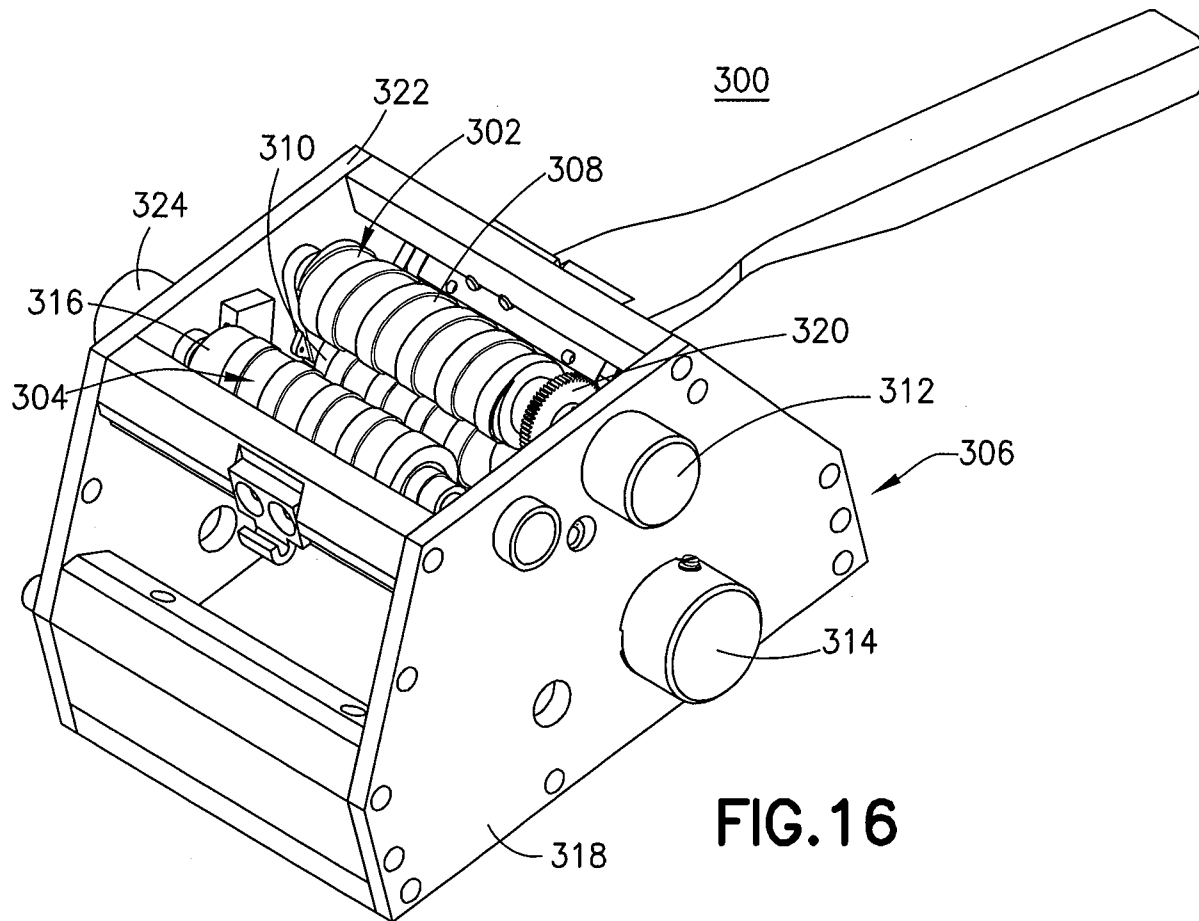


FIG. 17

12/22

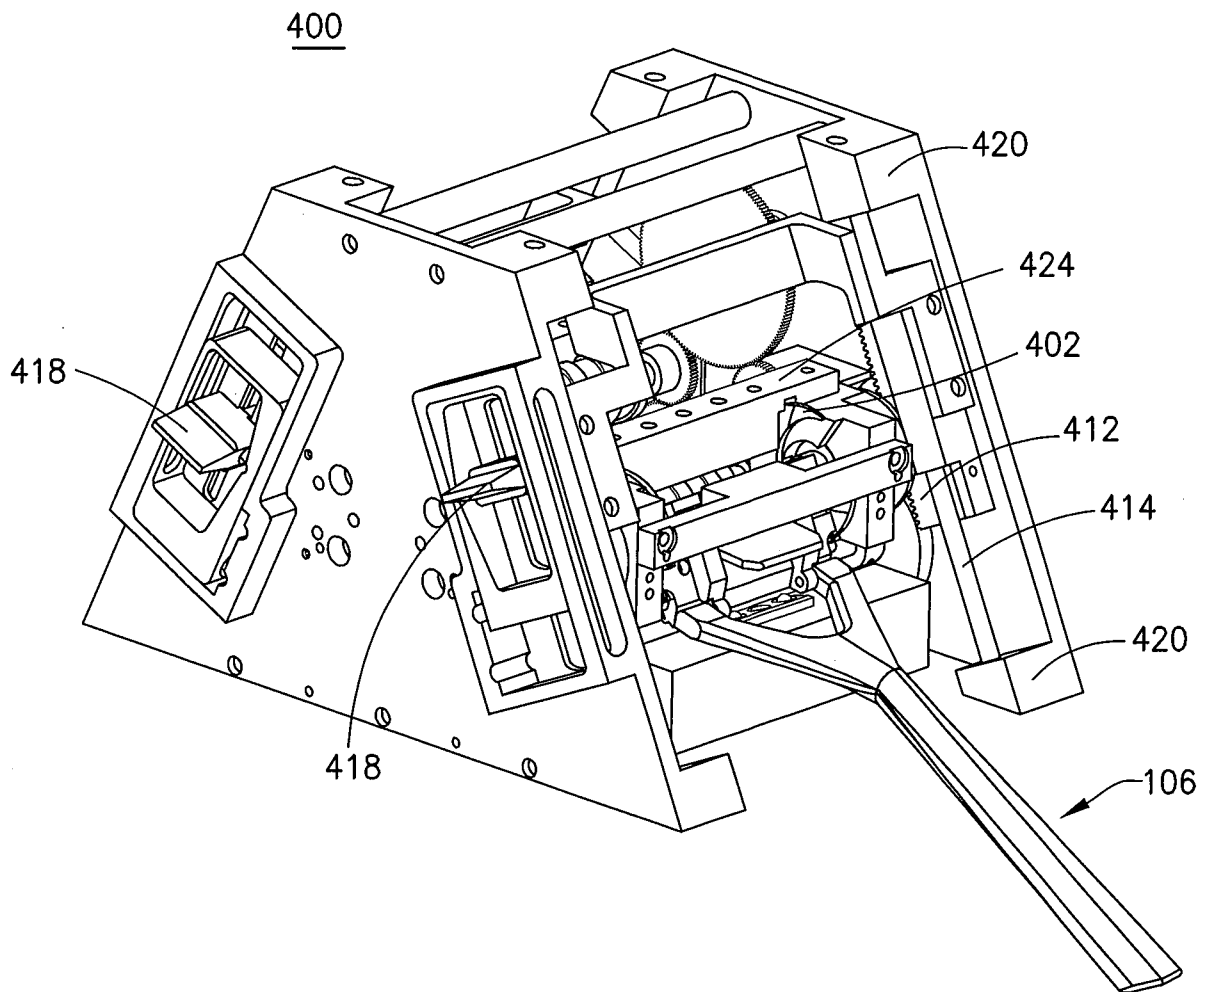


FIG.18

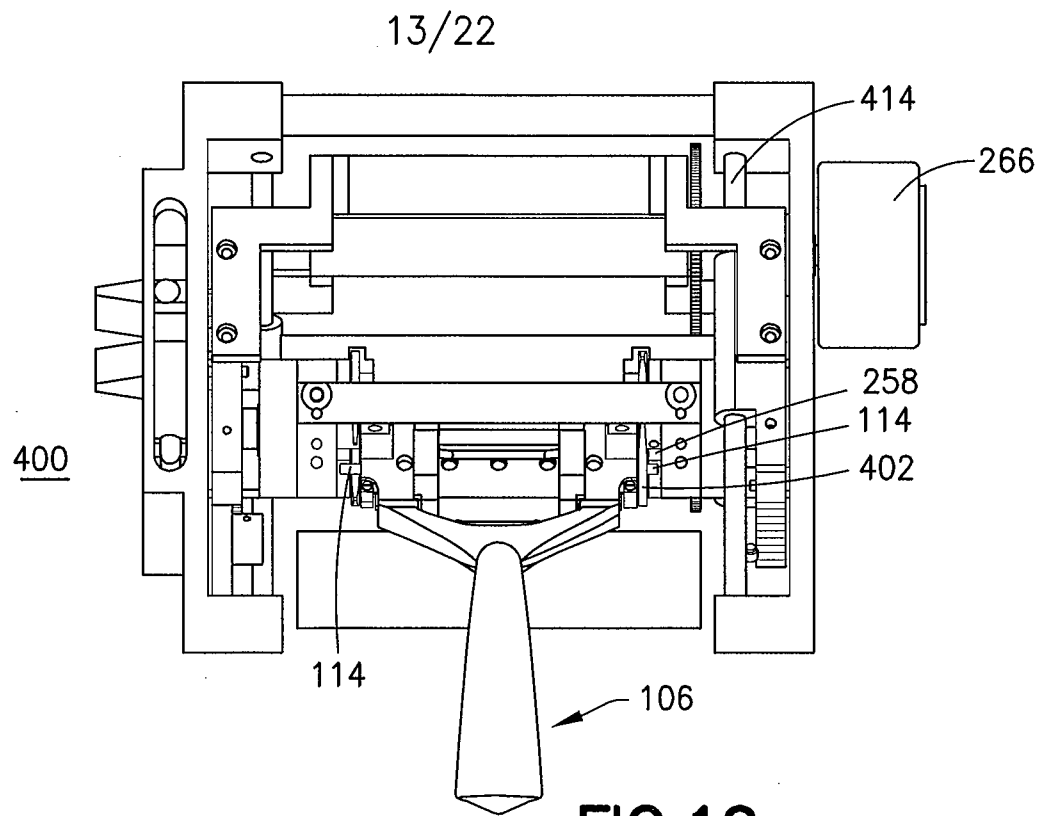


FIG.19

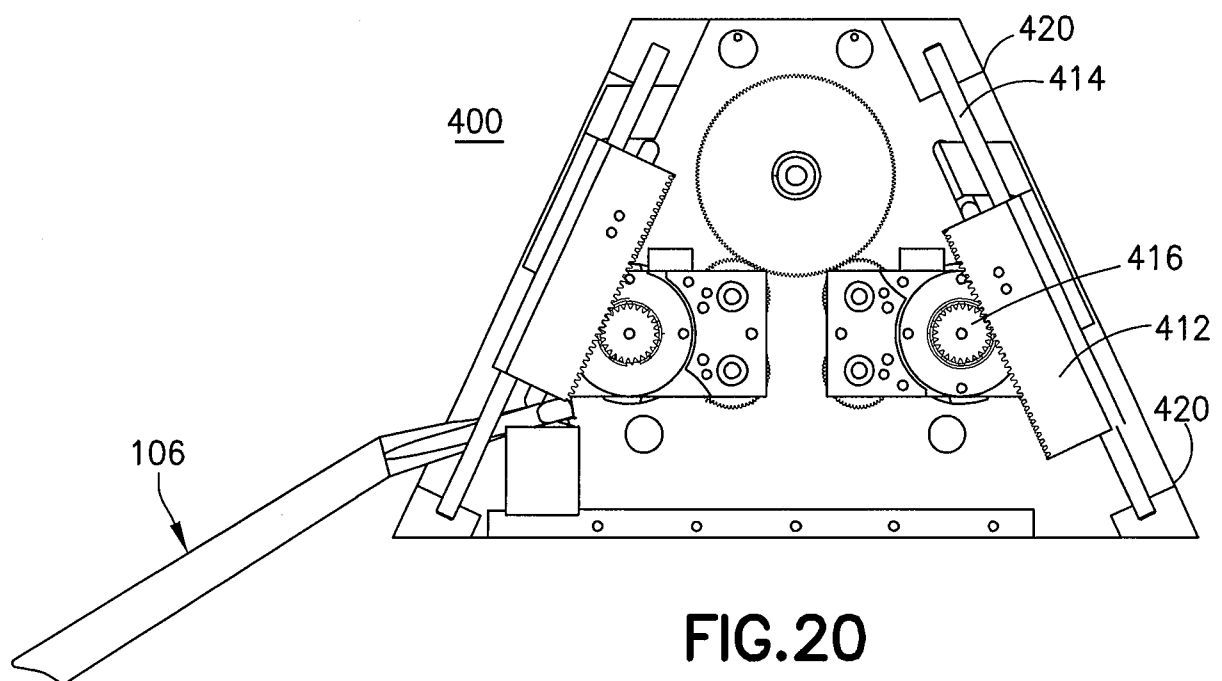


FIG.20

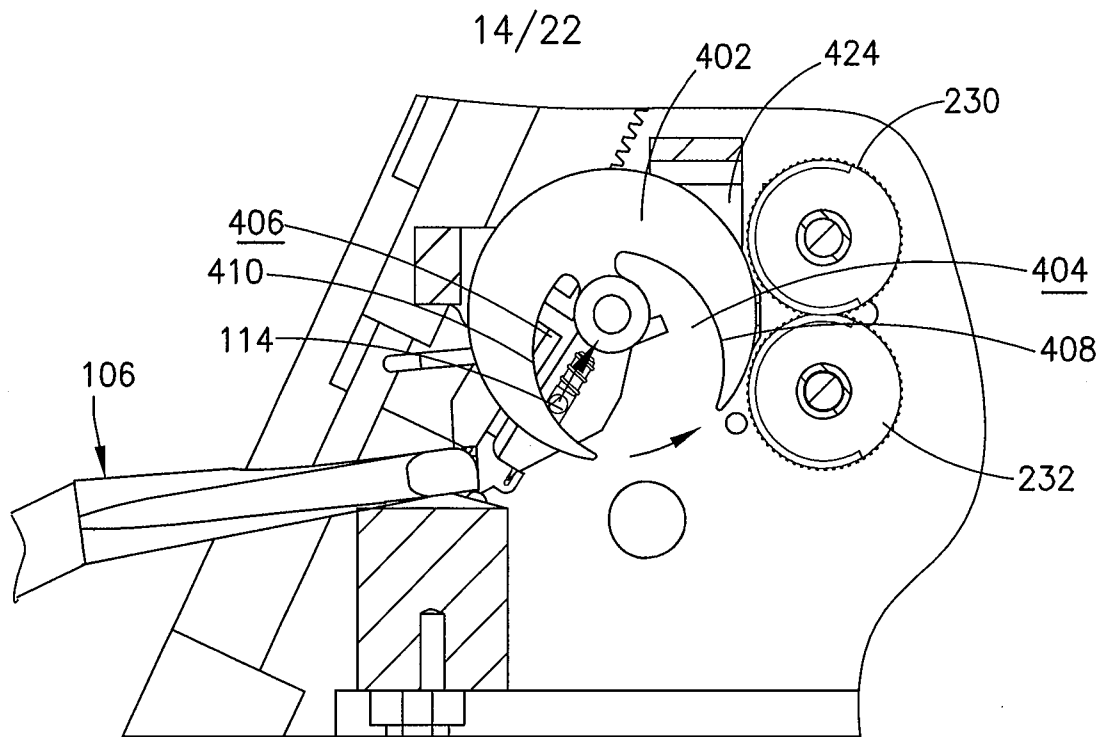


FIG. 21

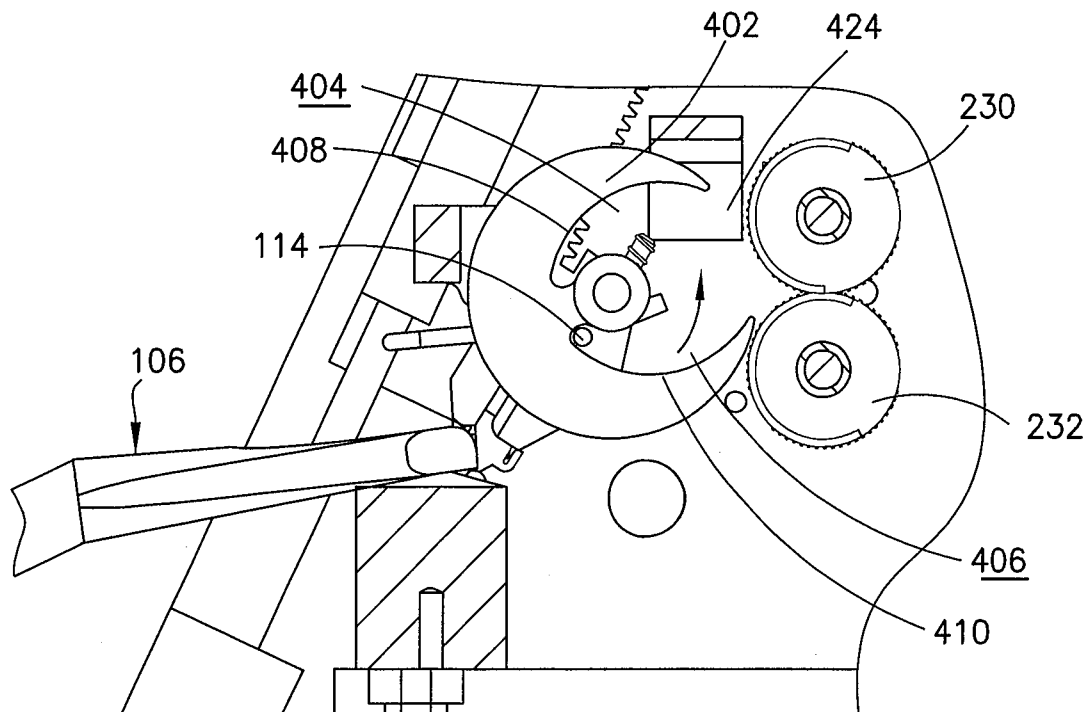


FIG. 22

15/22

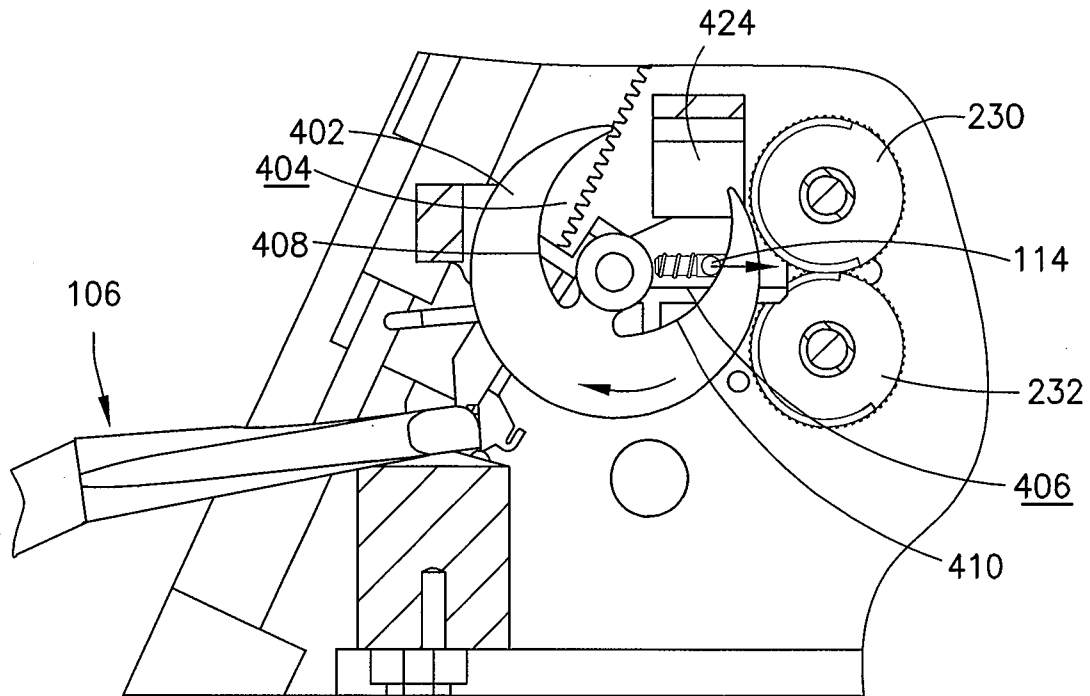


FIG. 23

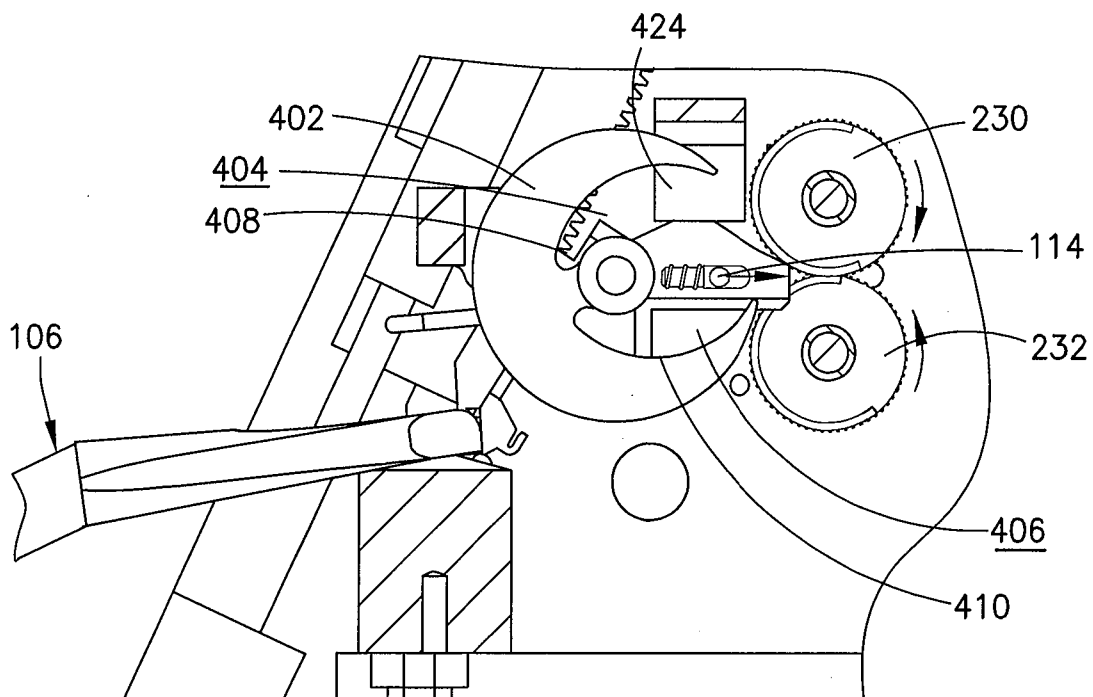


FIG. 24

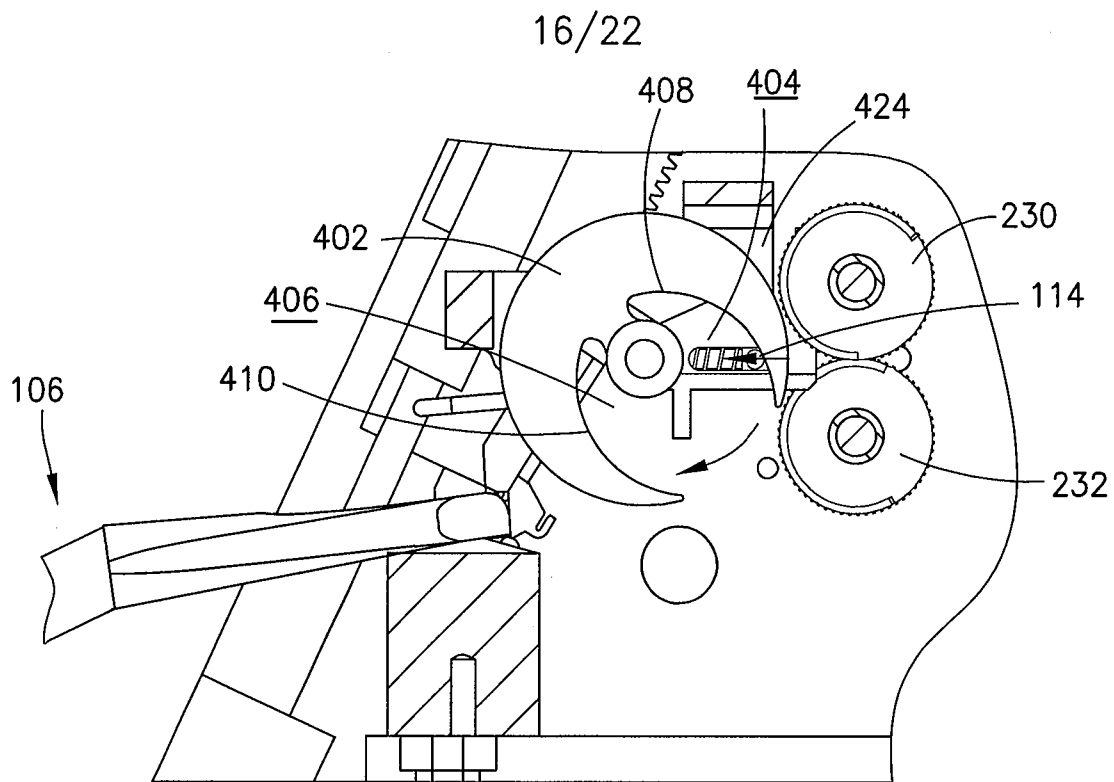


FIG. 25

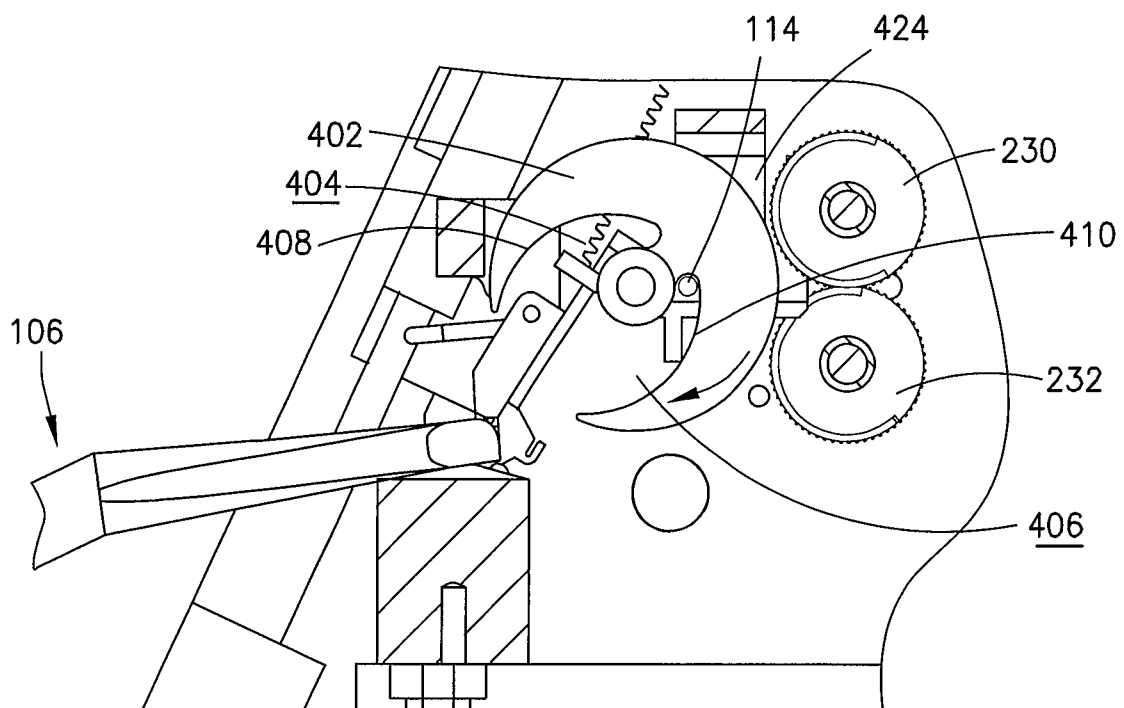


FIG. 26

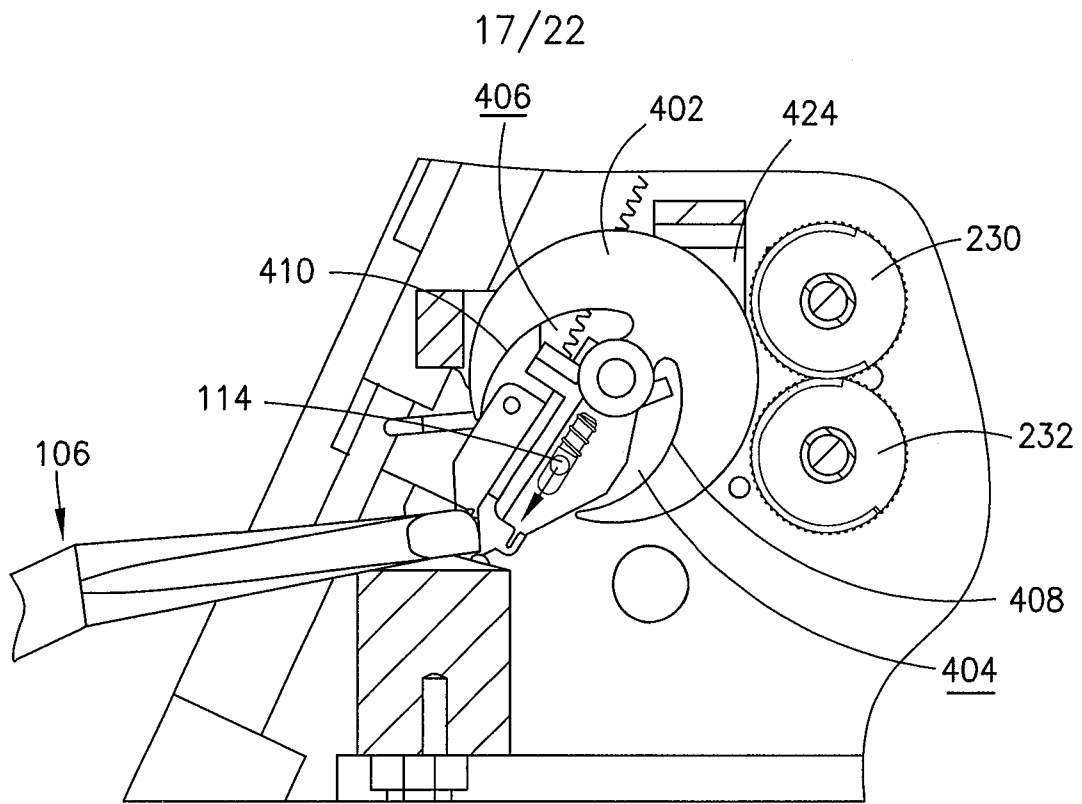


FIG. 27

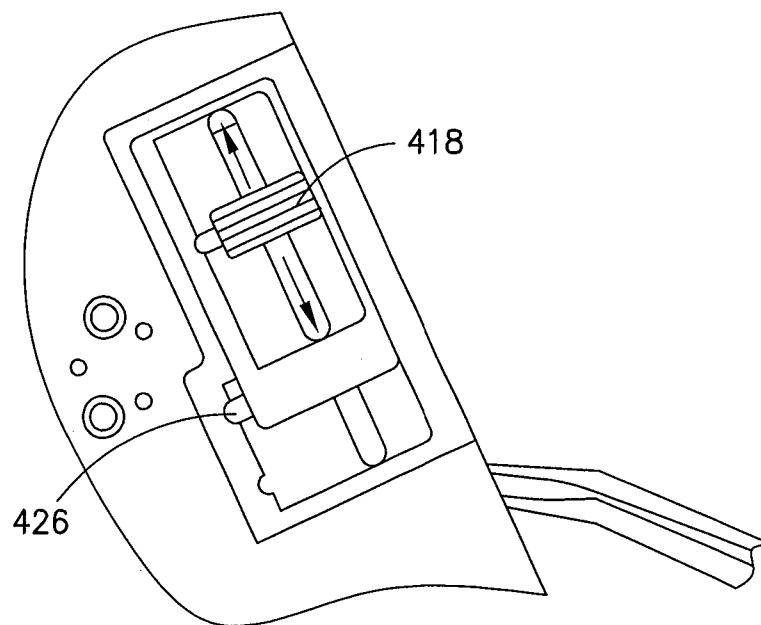


FIG. 28

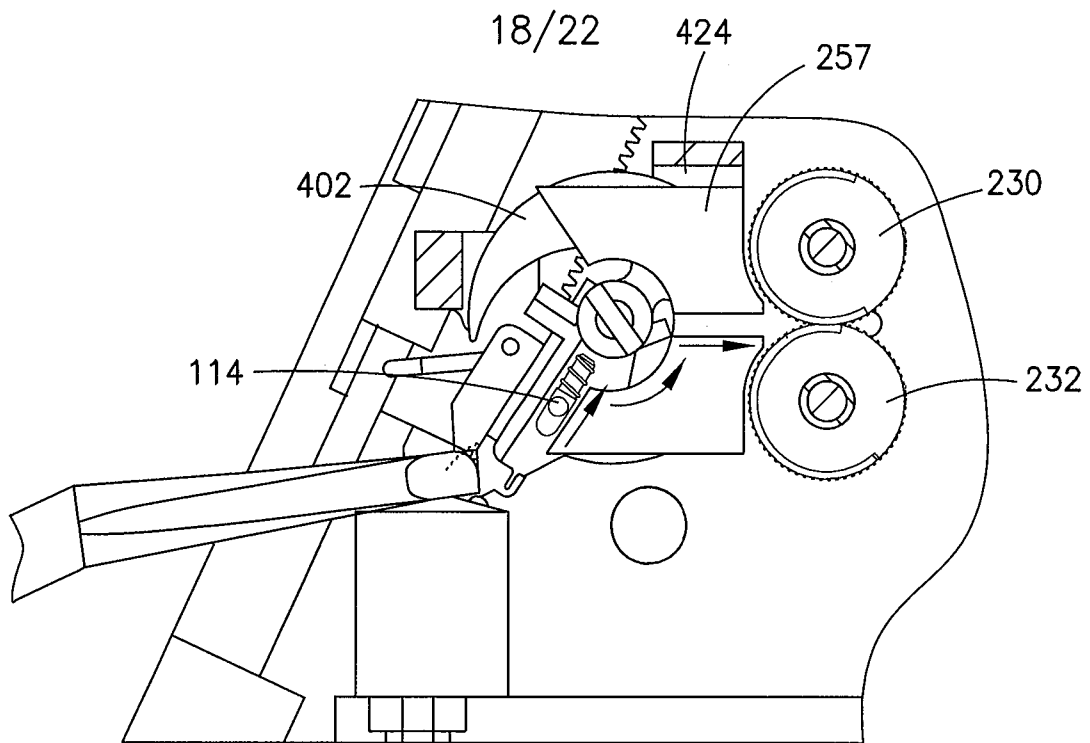


FIG. 29

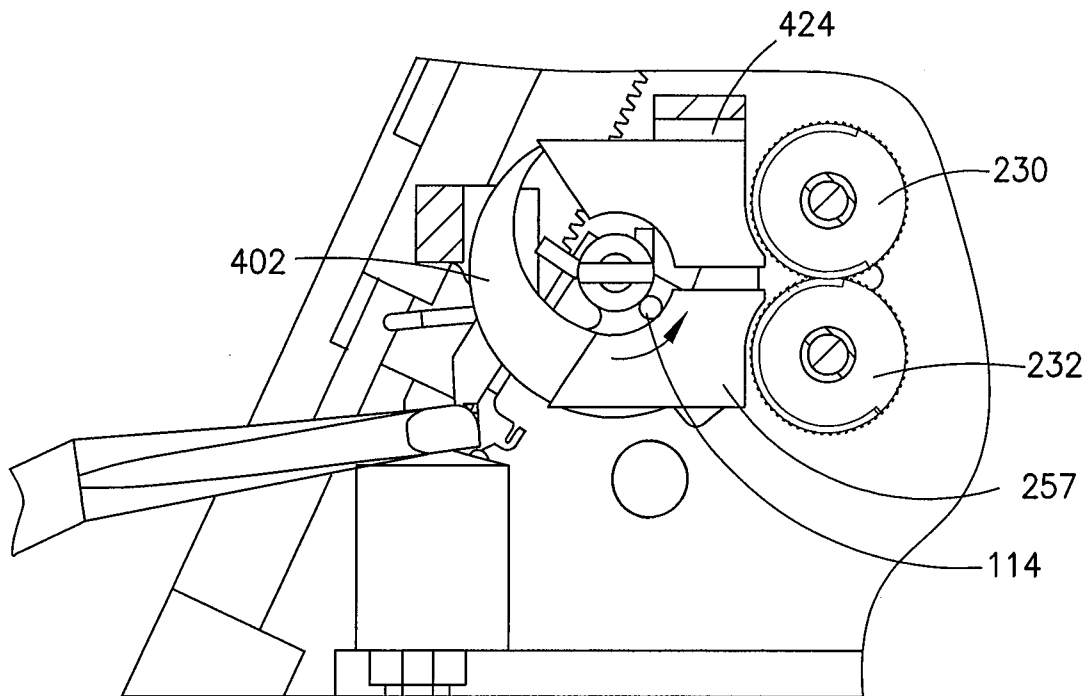


FIG. 30

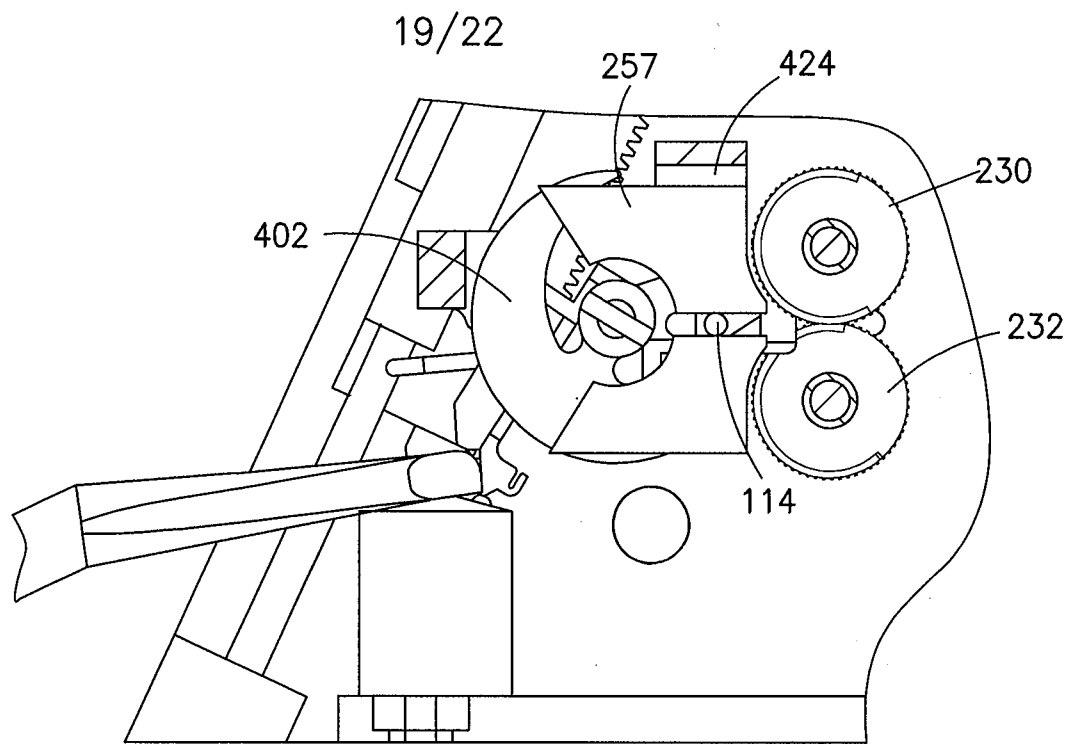


FIG.31

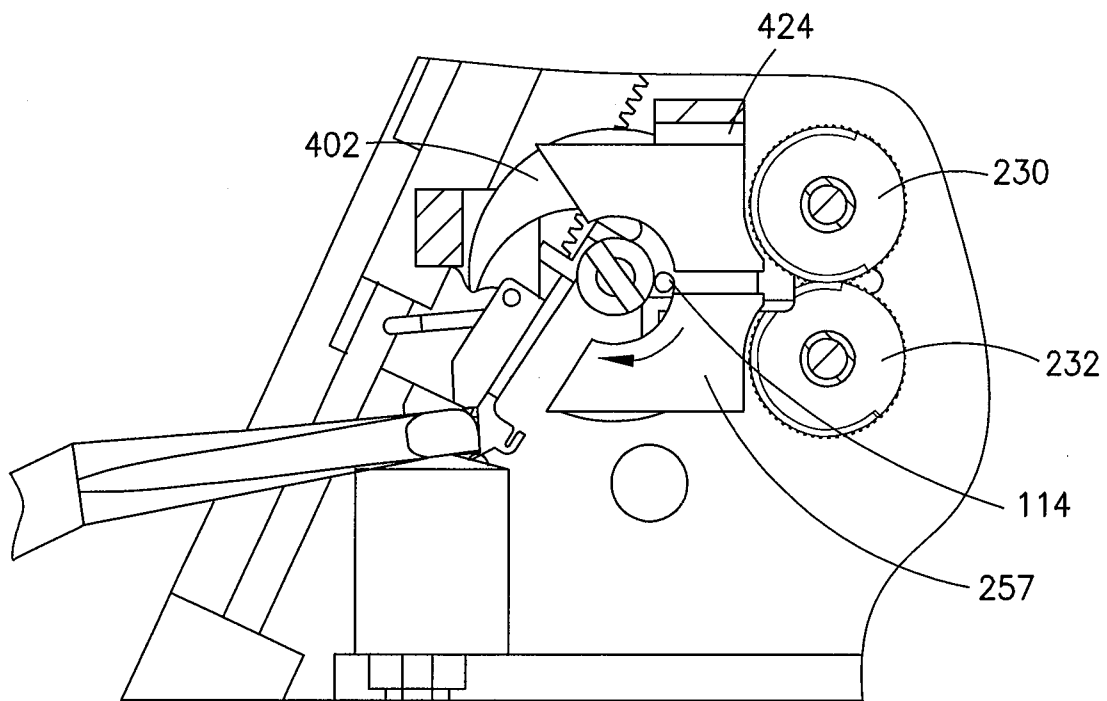


FIG.32

20/22

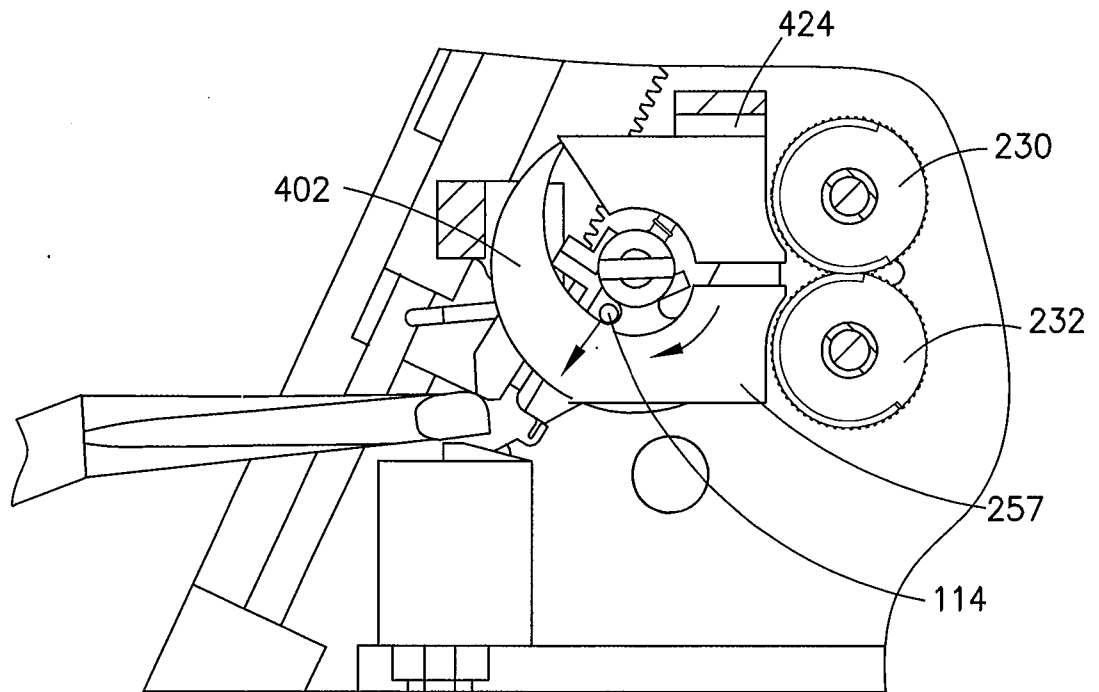


FIG.33

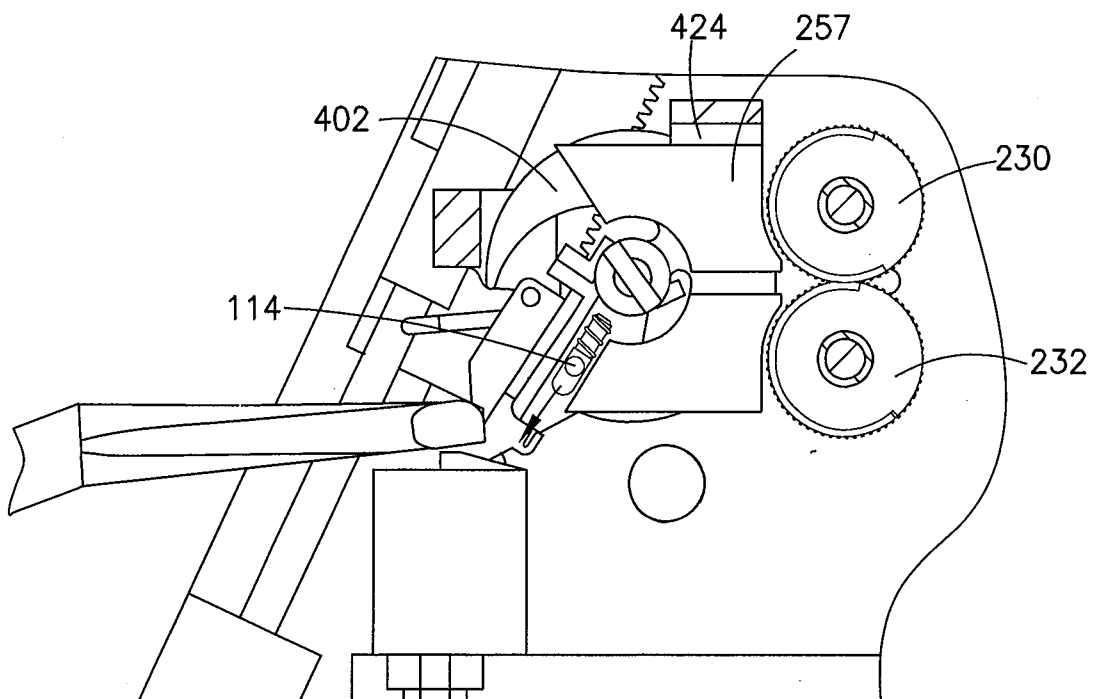


FIG.34

21/22

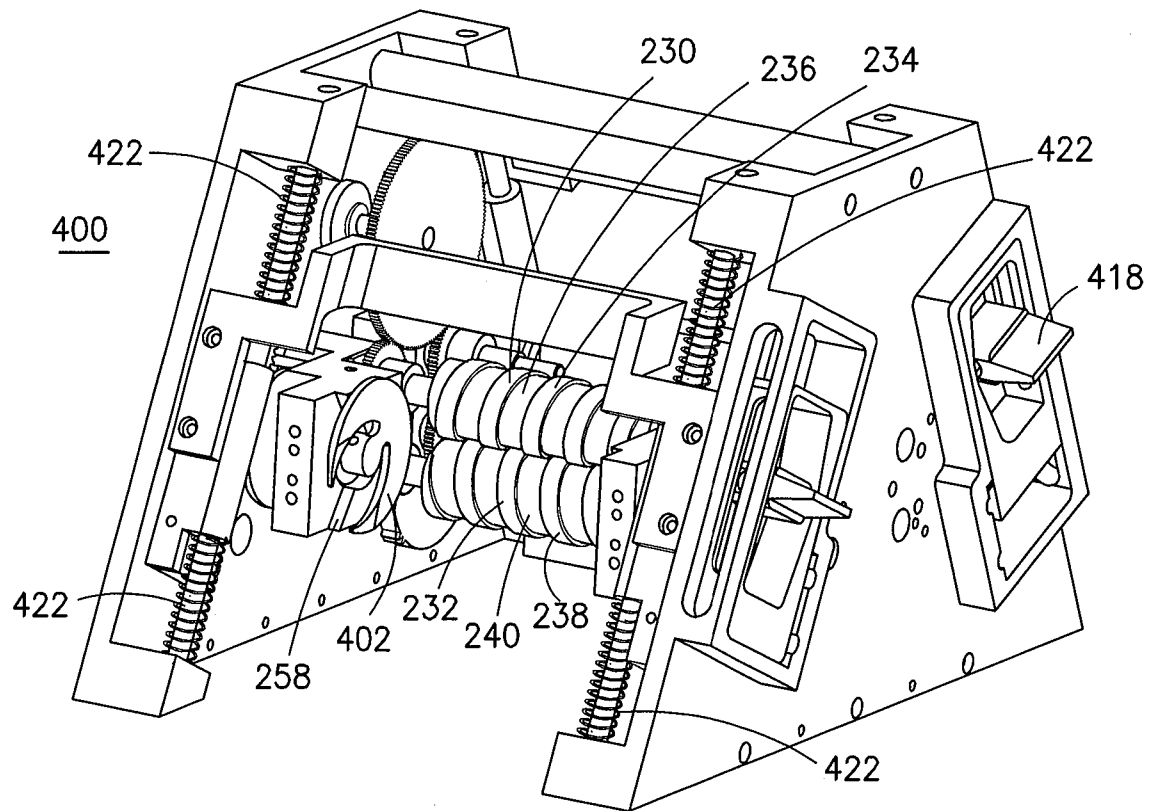


FIG.35

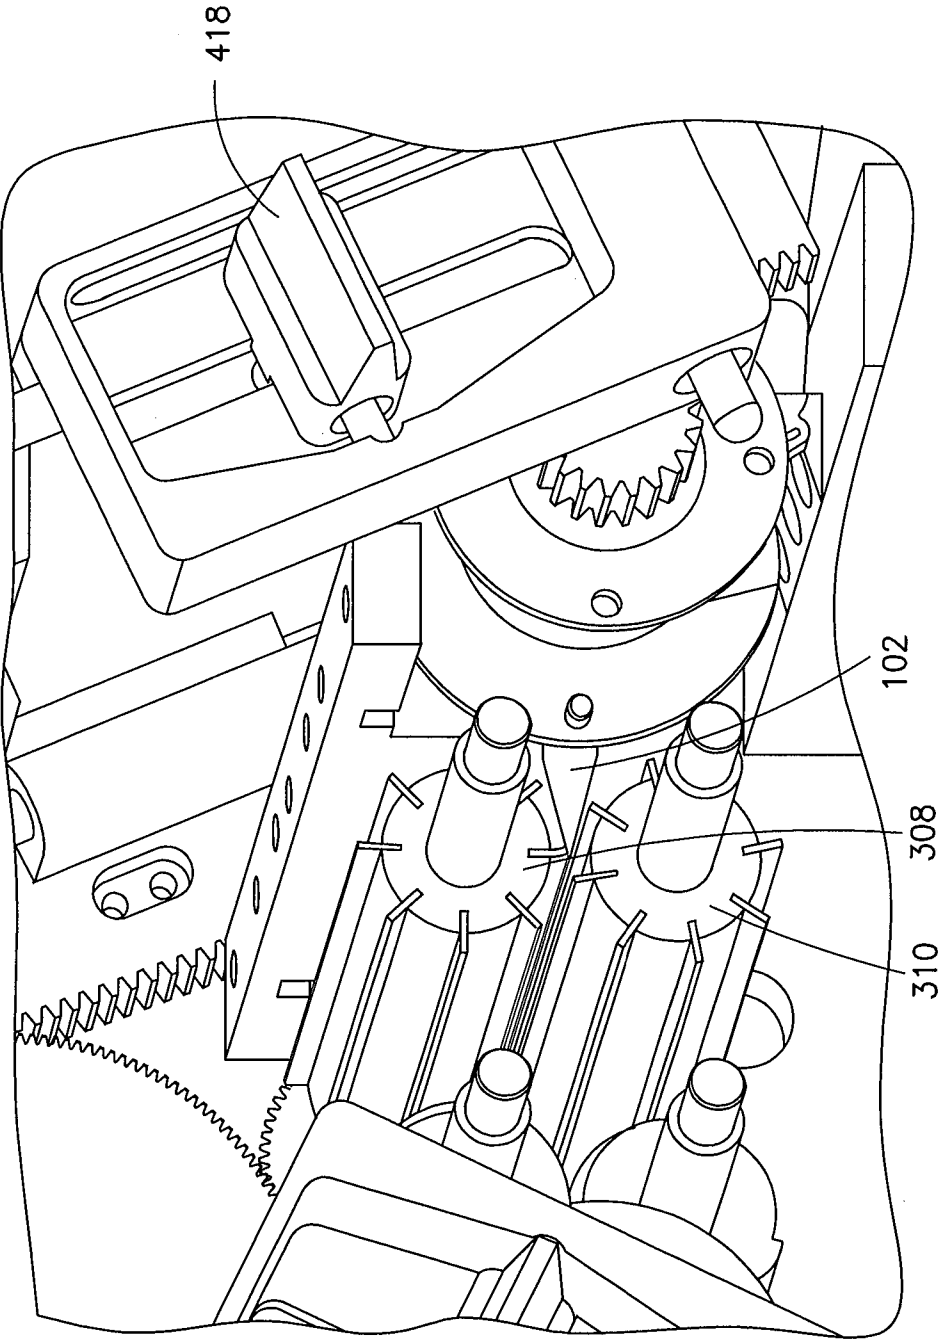


FIG. 36

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2014/010491

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B26B 21/50 (2014.01)

USPC - 30/37

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - B24B 33/00, 33/04, 33/08; B26B 19/38, 21/00, 21/08, 21/10, 21/12, 21/14, 21/16, 21/40, 21/50, 21/52 (2014.01)

USPC - 30/32, 34.05, 35-38, 43.3, 51, 52, 57, 62; 451/45, 191, 367, 371, 381, 402-404, 556

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
CPC - B26B 21/00, 21/02, 21/06, 21/08, 21/10, 21/12, 21/14, 21/16, 21/165, 21/40, 21/50, 21/54 (2014.02)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Orbit, Google Patents, Google

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 7,104,874 B1 (GUSSACK et al) 12 September 2006 (12.09.2006) entire document	1-26
A	US 1,901,591 A (GODSHALK) 14 March 1933 (14.03.1933) entire document	1-26
A	US 1,734,524 A (KOHLMILLER) 05 November 1929 (05.11.1929) entire document	1-26
A	US 1,978,988 A (COOK et al) 30 October 1934 (30.10.1934) entire document	1-26

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 April 2014

Date of mailing of the international search report

02 MAY 2014

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774