



(51) International Patent Classification:
F16L 5/02 (2006.01) *H02G 3/22* (2006.01)

Jämfö (SE). ÅKESSON, Jörgen [SE/SE]; Öljersjövägen 25, S-371 94 Lyckeby (SE).

(21) International Application Number:
PCT/SE2010/050118

(74) Agent: STRÖM & GULLIKSSON AB; Box 4188, S-203 13 Malmö (SE).

(22) International Filing Date:
2 February 2010 (02.02.2010)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0950039-8 4 February 2009 (04.02.2009) SE

(71) Applicant (for all designated States except US): ROX-TEC AB [SE/SE]; 540, S-371 23 Karlskrona (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ANDERSSON, Jens [SE/SE]; Enbärsvägen 7, S-370 23 Hasslö (SE). ERICSON, Mats [SE/SE]; Lysmaskvägen 7, S-374 51 Asarum (SE). FILIPSEN, Jenny [SE/SE]; Fortifikationsgatan 5, S-371 31 Karlskrona (SE). HILDINGSSON, Ulf [SE/SE]; Mjövikstrandsvägen 12, S-370 24 Nätraby (SE). LUNDBORG, Christer [SE/SE]; Bastionsgatan 6, S-371 32 Karlskrona (SE). MILTON, Stefan [SE/SE]; Torstävavägen 13, S-373 02 Ramdala (SE). PETTERSSON, Ronnie [SE/SE]; Rörläggarevägen 10, S-373 00

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PIPE OR CABLE LEAD-THROUGH BLOCKS

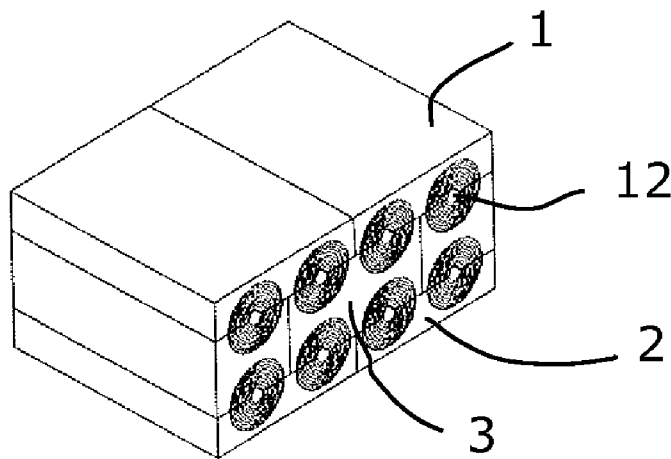


Fig. 1

(57) Abstract: The present invention concerns blocks (1-3, 11) being a part of a cable, wire or pipe transition. The invention also concerns a structure formed of a number of the blocks (1-3, 11). Each block (1-3, 11) has a generally rectangular shape and forms a part of the cable, wire or pipe transition together with at least one further block (1-3, 11). Each block (1-3, 11) has at least one recess placed in the middle of the block. Inside the recess a number of peelable sheets (4) are received. The sheets (4) are peeled off to adapt the inner diameter of the block to the outer diameter of a cable, wire or pipe to be received in the recess. Each block (1-3, 11) has means for fastening further blocks (1-3, 11) to the block (1-3, 11) above or below the block (1-3, 11).

WO 2010/090584 A1



Published:

— *with international search report (Art. 21(3))*

PIPE OR CABLE LEAD-THROUGH BLOCKS

5

Technical Field

The present invention concerns cable, wire or pipe transitions or lead-through placed in blocks, which blocks may be attached to each other to form different structures. The blocks have peelable sheets for adaption to an outer diameter of a cable, wire
10 or pipe to be received.

Prior Art

The cable, wire or pipe transitions are to receive the cables, wires or pipes in a sealed way.

15 Cable, wire or pipe transitions are used for sealing in many different environments, such as for cabinets, technical shelters, junction boxes and machines. They are used in different industrial environments, such as automotive, telecom, power generation and distribution, as well as marine and offshore. The transitions often include modules, which may have to seal against fluid, gas, fire, rodents, termites, dust, moisture
20 etc., and may receive cables or wires for electricity, communication, computers etc., pipes for different gases or liquids such as water, compressed air, hydraulic fluid and cooking gas or wires for load retention.

It is previously known to have different types of modules for cable or pipe penetrations. The modules normally made of an elastic material are often placed inside a
25 frame together with some kind of compression means. The compression means is used to compress the modules around respective cable or pipe to give a sealing around the cable or pipe. In some of the modules a package of peelable sheets or layers are arranged in an opening to receive the cable or pipe. By means of the peelable sheets the inner diameter of the opening of the module may be adapted to the outer diameter of the
30 cable or pipe. Thus, the same module may be used for a range of diameters of cables or pipes.

Summary of the Invention

The dimensions of openings of walls of different kinds, through which openings
35 cables or pipes are to be lead in a sealed way, may vary. Furthermore the demands of the sealing may vary depending on field of application. One general ambition in all

design is to keep the costs for manufacture, storing and transport as low as possible at the same time as the products must fulfil the intended functions.

By having cable or pipe penetrations in form of blocks different wall structures may be formed adapted to the dimensions of a formed opening in a wall of some kind.

5 By means of the present invention a structure may be formed by means of a few standard components, which standard components can be adapted to different dimensions on cables or pipes to be received and different dimensions on an opening receiving the structure. Normally, no outer compression means is used together with the blocks of the present invention. The blocks may be brought together before installation inside a frame
10 or the like, whereby the blocks are placed inside the frame as one single unit. This facilitates installation.

According to the present invention a block having a generally rectangular shape is arranged. The block forms a cable or pipe transition for one or more cables or pipes together with at least one further block. Each block has at least one recess placed
15 in the middle of one side of the block and extended all of the thickness of the block. A number of peelable sheets are placed in the recess. Inside of the peelable sheets a cable or pipe is to be received. The block has means for fastening it to a further block placed above or below the block.

Further objects and advantages of the present invention will be obvious to a
20 person skilled in the art reading the detailed description below of at present preferred embodiments.

Brief Description of the Drawings

The invention will be described further below by way of example and with reference
25 to the enclosed drawings. In the drawings:

Fig. 1 is a perspective view of a structure wall formed of a number of blocks according to the present invention,

Fig. 2 is a perspective view from above of one example of a block according to the present invention,

30 Fig. 3 is a perspective view from below of the block of Fig. 2,

Fig. 4 is a perspective view from above of a further example of a block according to the present invention,

Fig. 5 is a perspective view from below of a still a further example of a block according to the present invention,

35 Fig. 6 is an end view of the block of Fig. 5,

Fig. 7 is a perspective view from above of a further example of a block according to the present invention,

Fig. 8 is a perspective view of a one example of a frame to be used with blocks according to the present invention, and

5 Figs. 9-12 are perspective views of yet further examples of blocks according to the present invention.

Detailed Description of Preferred Embodiments

As used in this description and for ease of description the expressions “upper”,
10 “lower”, “top”, “bottom” and similar expressions are normally in view of the Figs. referred to, or in view of the normal orientation at use. However, a person skilled in the art realises that the blocks of the present invention may have any orientation at use. As used in this description the terms “height”, “width” and “thickness” are used in connection with the blocks and the formed wall in directions as indicated with h, w and t, respectively, in Fig. 2.

By means of a number of blocks 1, 2, 3 according to the present invention it is possible to form different wall structures having a number of cable, wire or pipe transitions.

In one embodiment the blocks 1, 2, 3 are of three general types. One upper
20 block 1 and one lower block 2 is to be placed at the top and bottom, respectively, of the formed structure. Between the upper and lower blocks 1, 2 one or more layers of intermediate blocks 3 are placed in the structure. The blocks 1, 2, 3 are normally made of a relatively rigid polymeric material. In some embodiments the blocks 1, 2, 3 are made of a relatively elastic polymeric material.

25 The upper block 1 of Figs. 2 and 3 has a generally rectangular shape. In the middle of the lower surface of the upper block 1, two central semicircular recesses, as seen in cross section, are formed receiving a number of peelable sheets 4 or layers. The semicircular recesses extend all of the thickness of the upper block 1. A person skilled in the art realises that even though the shown recesses have a semicircular cross section
30 form, it is also possible with other cross section forms of the recesses. The upper surface of the upper block 1 is even. On the lower side of the upper block 1 a number of openings 5 are placed for co-operation with protruding parts in the form of bosses 6 of a block placed below the upper block 1 in use.

35 The lower block 2 of Fig. 4 has a generally rectangular shape. In the middle of the upper surface of the lower block 2, two semicircular recesses are formed receiving a

number of peelable sheets 4 or layers. The semicircular recesses extend all of the thickness of the lower block 2. On the upper surface of the lower block 2 a number of protruding parts or bosses 6 are formed. The bosses 6 are to co-operate with openings 5 of one or more blocks placed above the lower block in use, to hold the blocks together.

5 Normally, the lower surface of the lower block 2 is an even continuous surface, having no openings.

When used with the upper and lower blocks 1, 2 of Figs. 2-4, the intermediate blocks 3 have bosses and openings for co-operation with the openings 5 and bosses 6 of the upper blocks 1 and lower blocks 2, respectively. The intermediate block 3 of Figs. 5 and 6 has a generally rectangular shape. In the middle of each of the lower and upper
10 surfaces, respectively, of the intermediate block 3, semicircular recesses are formed receiving a number of peelable sheets 4 or layers. The semicircular recesses extend all of the thickness of the block 3.

In the embodiments of Figs. 5, 6 and 7 an alternative form of the parts connecting the different blocks 3, 11 are shown. On the upper surface of the blocks 3, 11 a number of protruding parts 7, 8 are formed and on the lower surface of the blocks 3, 11 a number of corresponding openings 9, 10 are formed. The protruding parts 7, 8 and openings 9, 10 are to co-operate with openings 9, 10 and protruding parts 7, 8, respectively, of blocks placed in a layer above or below the shown blocks 3, 11.

20 In the embodiment of Figs. 5-7 the protruding parts 7 at the corners each has two straight parts forming a right angle, thus, the protruding parts 7 and corresponding openings 9 show an L-form in plan view. On two opposite sides of each block further protruding parts 8 are arranged between the protruding parts 7 at the corners. Said further protruding parts 8 are to be received in corresponding openings 10 at a block to be
25 placed above the block having the further protruding parts 8. Said further protruding parts 8 and corresponding openings 10 have only one straight part. The protruding parts 7, 8 of a first block are to be received in openings 9, 10 of a second block placed on top of the first block.

A person skilled in the art realises that the connection between blocks placed
30 on top of each other may be accomplished in many different ways. For instance the protruding parts and corresponding openings may have other forms than shown.

All protruding parts on one block and corresponding co-operating parts or openings of an adjacent block have complementary forms, independently of the exact form of the protruding parts and co-operating parts. The protruding parts are received in

a tight fit in the co-operating parts. Thus, the blocks are held together by means of the tight fit between the protruding parts and the co-operating parts.

As indicated in Fig. 1 the blocks may have different number of recesses receiving peelable sheets 4. The recesses are evenly distributed on the blocks 1-3, 11. A person skilled in the art realises that the number of recess may vary in principle without limitation. Thus, a block, being an upper, lower or intermediate block, may have one, two, three, four, five etc. recesses on one surface.

By the co-operation through the tight fit between the bosses 6 and protruding parts 7, 8, respectively, and openings 5, 9, 10 of different blocks 1-3, 11, the blocks 1-3, 11 are held together forming a wall structure. By placing a number of blocks 1-3, 11 mutually adjacent each other and above each other a wall structure may be formed, comprising vertical and horizontal rows of blocks 1-3, 11.

The blocks 1-3, 11 used to form a single wall structure should each have the same height and thickness but may have different widths as indicated above. To form a stable wall structure it is beneficial if blocks of different widths are used in such a way that contact surfaces between two separate blocks 1-3, 11 are not placed on a continuous vertical line going through all of the formed wall structure. Such a continuous non-interrupted vertical line will give rows of blocks 1-3, 11 that are not attached to adjacent rows of blocks 1-3, 11.

The blocks 1-3, 11 may have further features in other embodiments as shown in the simultaneously filed applications entitled "A pipe or Cable Lead-Through having a Part Indicating Compression", "A Module of a Pipe or Cable Lead-Through having Grooves on Opposite Sides", "Modules of Pipe or Cable Lead-Through Sticking Together", "A Pipe or Cable Lead-Through having Modularized Modules", "A Pipe or Cable Lead-Through having Penetratable Modules", "Lubrication of a Pipe or Cable Lead-Through" and "A Pipe or Cable Lead-Through having Modules with a Dimensioning Function", filed by the applicant of the present application. These applications are hereby incorporated by reference.

The semicircular recesses of the blocks are placed in such a way that when blocks are put together to form a wall, circular recesses are formed of two semicircular recesses of blocks 1-3, 11 placed on top of each other. In the middle of the peelable sheets 4 of each circular recess a blind 12 is placed. The blinds 12 are normally fixed by adhesive to the peelable sheets 4 on either the upper or lower sides of each block 1-3, 11. The blind 12 is taken away when a cable or pipe is to be received in the recess. The recess may be placed eccentrically in the same way as shown in the simultaneously filed

application entitled "Eccentric Part of a Pipe or cable Lead-Through", filed by the applicant of the present application. This application is hereby incorporated by reference.

The sheets 4 of each block adhere enough to each other to stick together but at the same time loose enough to be peeled off by hand. The same goes for the blinds 12.

5 Normally the sheets 4 are peeled off one by one but it is also possible to peel off a larger number of sheets 4 at the time. The sheets 4 are made of an elastic polymeric material.

The sheets may be arranged in many different ways and with different features as reflected in the simultaneously filed applications entitled "A pipe or Cable Lead-Through having Interconnected Layers", "A Pipe or Cable Lead-Through having Layers of Different Thickness", "Cohering Between Layers of a Pipe or Cable Lead-Through" and "Identification of Layers of a Pipe or Cable Lead-Through", filed by the applicant of the present application. These applications are hereby incorporated by reference.

The structure formed may have any number of blocks but must always have at least two blocks.

15 Often the structure of blocks 1-3, 11 is received inside a frame or the like holding the structure in position and possibly compressing the structure. The tightness of the structure will be improved by compressing. In Fig. 8 one example of a frame is shown, which frame may be used together with the structure of blocks 1-3, 11. The frame has an upper horizontal frame beam 13, a lower horizontal frame beam 14, a left vertical frame beam 15 and a right vertical frame beam 16. The stated positions of the different frame beams 13-16 are with reference to Fig. 8. A person skilled in the art realises that the frame may be mounted in other positions than as showed in Fig. 8. The upper horizontal frame beam 12 has two through openings at the ends. The trough openings are to receive one fixation screw 17 each. The fixation screws 17 go into one vertical frame beam 15, 16 each. In a corresponding way the lower horizontal frame beam has two through openings receiving fixation screws, which go into one vertical frame beam 15, 16 each. A structure of blocks is to be placed inside the frame formed of the upper horizontal frame beam 13, the lower horizontal frame beam 14, the left vertical frame beam 15 and the right vertical frame beam 16. The dimension of the frame may be altered, by replacing the horizontal and/or vertical frame beams 13-16 with frame beams of other lengths. In some embodiments (not shown) the blocks adjacent the frame are connected to the frame by means of co-operating protruding parts and openings. Thus, such blocks are connected to the frame in a similar way to the connection between the blocks.

In a further embodiment one or more of the horizontal and/or the vertical frame beams are received movable in relation to the other parts of the frame, thereby the inner dimension of the frame may be varied in a simple way.

In Figs. 9-12 further examples of connection between the blocks are shown. A person skilled in the art realises that the exact form of the co-operating parts forming the mutual connection between the blocks may be varied in many ways and that the shown connecting parts may be combined in many different ways. For several of the shown examples the upper and lower blocks are identical. This is achieved in that the blocks are provided with alternating bosses and groves.

In the example of Fig. 9 a block 18 is shown. A number of peelable sheets 4 are placed in a semicylindrical recess of the block 18. The block 18 has protruding parts 19 having an L-form in two diagonally opposite corners and two L-formed openings 20 at the other two corners. Between the protruding parts 19 and openings 20, respectively, at the corners further protruding parts 21 and openings 22 are placed outside the recess holding the peelable sheets 4. These latter protruding parts 21 and openings 22 have an elongated form.

The block 23 shown in Fig. 10 has a protruding part in the form of a rail 24 and a co-operating part in the form of a groove 25 on two opposing sides, which rails 24 and grooves 25 extend across the block 23 in the thickness direction t . The rails 24 and grooves 25 are placed outside a semicylindrical recess receiving a number of peelable sheets 4. The rails 24 and grooves 25 have corresponding cross sections in form of a dovetail. By means of the dovetails two blocks 23 may be held together firmly in the height h direction of the blocks. Two connected blocks 23 are to be slid in relation to each other to connect or disconnect them. A person skilled in the art realises that it is possible to achieve them same effect with rails and grooves of many different cross section forms.

The block 26 of Fig. 11 has protruding parts or bosses 27 and openings 28 corresponding with the bosses 5 and openings 6 of the blocks 1, 2 shown in Figs. 3 and 4. However, in the embodiment of Fig. 11 the block 26 has alternating bosses 27 and openings 28 on the same side of the block 26.

The block 29 of Fig. 12 differs from the block 20 of Fig. 9 only in the form of the protruding parts 30 and the openings 31. In the block 29 of Fig. 12 the protruding parts 30 and the openings 31 all have an elongated form.

Also in the embodiments of Figs. 9-12 the protruding parts and co-operating parts have complementary forms and are held together in a tight fit.

A person skilled in the art realises that the different connection forms shown in Figs. 9-12 also could be used in possible connection between blocks and a frame.

In use a cable or pipe may be placed in each circular recess of the structure. If the number of cables or pipes to be received is less than the available recesses the blinds
5 12 of the recesses not used are kept in place. When a cable or pipe is to be received in a recess, the blocks 1-3, 11, forming said recess, are separated. Then the blind 12 is taken out and an appropriate number of sheets 4 are peeled off from respective block 1-3, 11. The number of sheets 4 peeled off should give an opening normally having an inner diameter being slightly smaller than the outer diameter of the cable or pipe received. As
10 the sheets 4 are made of an elastic material the difference in diameter will be taken up by the sheets 4 remaining in respective block 1-3, 11. In some embodiments the blocks 1-3, 11 are made of an elastic material taking up the difference in diameter. The number of blocks 1-3, 11 used to form a structure of blocks is adapted to the size of an opening in which the structure of blocks is to be received. When all cables or pipes have been
15 placed in the appropriate recesses the blocks are put together to form the structure of blocks, such as a wall. The formed structure of blocks is then pressed into the opening, whereby a tight lead-through is formed for the cables and/or pipes. The structure of blocks 1-3, 11 may be compressed somewhat at installation due to the elasticity of the peelable sheets 4 of the recesses of the blocks 1-3, 11 or the elasticity of the blocks 1-3,
20 11.

If the structure of blocks 1-3, 11 is to be received inside a frame of the type shown in Fig. 8, horizontal and vertical frame beams 13-16 of appropriate dimensions are chosen. The length of the horizontal frame beams 13, 14 is adapted to the width of the formed structure of blocks 1-3, 11 and the length of the vertical frame beams 15, 16
25 is adapted to the height of the formed structure of blocks 1-3, 11. When the structure of blocks 1-3, 11 has been placed inside the frame the fixation screws 17 are tightened in order to compress the structure of blocks 1-3, 11. As indicated above the peelable sheets 4 of each block 1-3, 11 are elastic and a compression given by means of the fixation screws 17 of the frame will enhance the tightening of the cable and/or pipe lead-
30 throughs.

CLAIMS

1. A block (1, 2, 3, 11, 18, 23, 26, 29) having a generally rectangular shape, which block is part of a cable or pipe transition for one or more cables or pipes together with at least one further block (1-3, 11, 18, 23, 26, 29), **characterized** in that the block (1-3, 11, 18, 23, 26, 29) has at least one recess placed on one side of the block (1-3, 11, 18, 23, 26, 29) and extended all of the thickness of the block (1-3, 11, 18, 23, 26, 29), that a number of peelable sheets (4) are placed in the at least one recess, inside of which peelable sheets a cable or pipe is to be received, and that the block has means for fastening it to a further block placed above or below the block (1-3, 11, 18, 23, 26, 29), that the means for fastening are protruding parts (6, 7, 8, 19, 21, 27, 30) at one block (2, 3, 11, 18, 26, 29) and co-operating parts (5, 9, 10, 20, 22, 25, 28, 31) at an opposite block (1, 3, 18, 26, 29), that the protruding parts (6, 7, 8, 19, 21, 27, 30) and co-operating parts (5, 9, 10, 20, 22, 25, 28, 31) have complementary forms, and that the protruding parts (6, 7, 8, 19, 21, 27, 30) are received in a tight fit in the co-operating parts (5, 9, 10, 20, 22, 25, 28, 31).

2. The block of claim 1, wherein the at least one recess has a semicircular cross section form.

3. The block of claim 1 or 2, wherein a number of protruding parts (6, 7, 8, 19, 21, 27, 30) at one block (2, 3, 11, 18, 26, 29) co-operates with openings (5, 9, 10, 20, 22, 28, 31) at another block (1, 3, 18, 26, 29), to fasten two blocks to each other.

4. The block of claim 3, wherein protruding parts (7, 19) placed at corners of a block (3, 11, 21) and openings (9, 20) placed at corners of a block (3, 18) each has two straight parts forming a right angle, giving the protruding parts (7, 19) and openings (9, 20) an L-form in plan view, and wherein protruding parts (8, 21) and corresponding openings (10, 22) placed between the protruding parts (7, 19) and openings (9, 20), respectively, at the corners have an elongated form.

5. The block of claim 3, wherein the protruding parts (30) and the openings (31) have an elongated form.

6. The block of claim 1 or 2, wherein the protruding parts are rails (24) on one block (23) co-operating with grooves (25) of another block (23), which rails (24) and grooves (25) extends all of the thickness of the block (23).

7. The block of claim 6, wherein the rails (24) and grooves (25) have a dovetail form in cross section.

8. The block of any of the previous claims, wherein it has recesses receiving a number of peelable sheets (4) on opposing sides of the block (3, 23) and wherein the

peelable sheets (4) adhere to each other loose enough for separate sheets to be peeled off by hand.

9. A structure formed of a number of blocks according to any of the previous claims placed mutually adjacent to each other and on top of each other.

5 10. The structure of claim 9, wherein it is placed inside a frame.

11. The structure of claim 10, wherein the frame is formed of an upper horizontal frame beam (13), a lower horizontal frame beam (14), a left vertical frame beam (15) and a right vertical frame beam (16).

10 12. The structure of claim 11, wherein the frame beams (13-16) are fixed to each other by means of fixation screws.

13. The structure of claim 11, wherein one or more of the horizontal and/or the vertical frame beams (13-16) are received movable in relation to the other frame beams of the frame.

15 14. The structure of claim 9, wherein at least one block (1-3, 11, 18, 23, 26, 29) has a different width than the other blocks (1-3, 11, 18, 23, 26, 29), whereby the blocks are placed in such a way that the contact surfaces between two separate blocks are not placed on a continuous vertical line going through all of the formed structure.

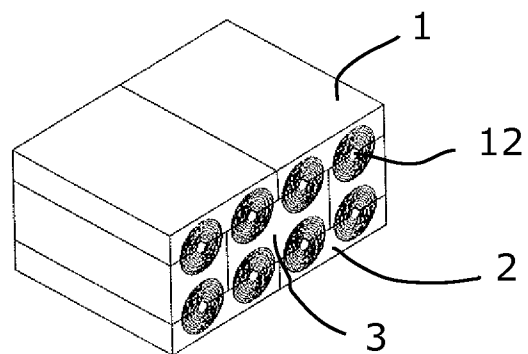


Fig. 1

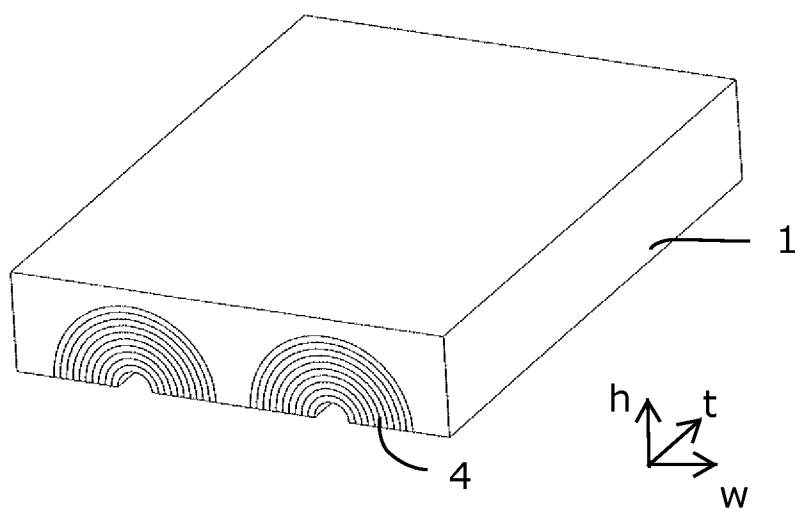


Fig. 2

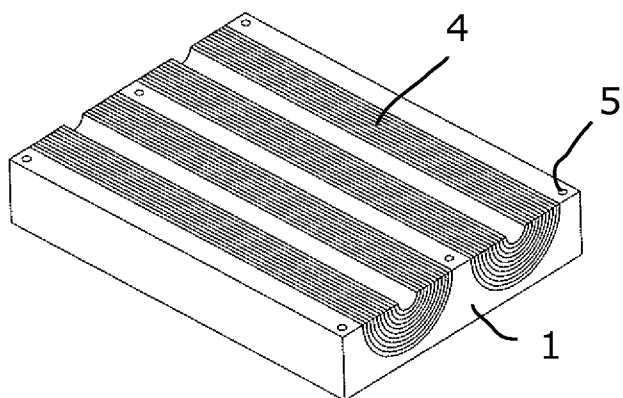


Fig. 3

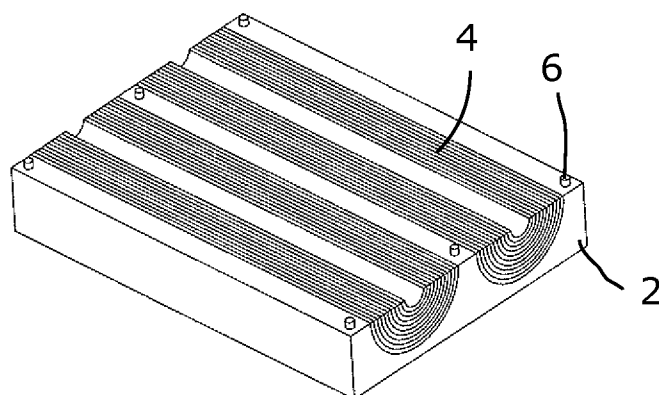


Fig. 4

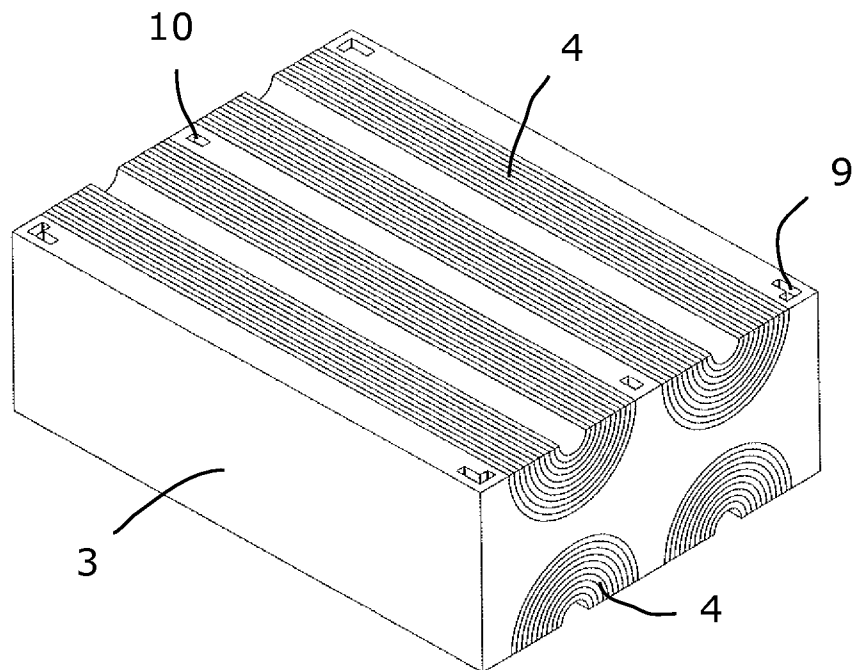


Fig. 5

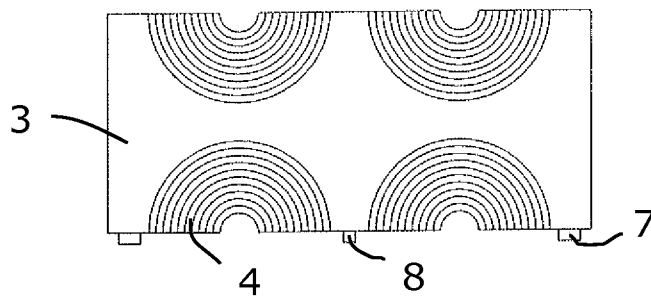


Fig. 6

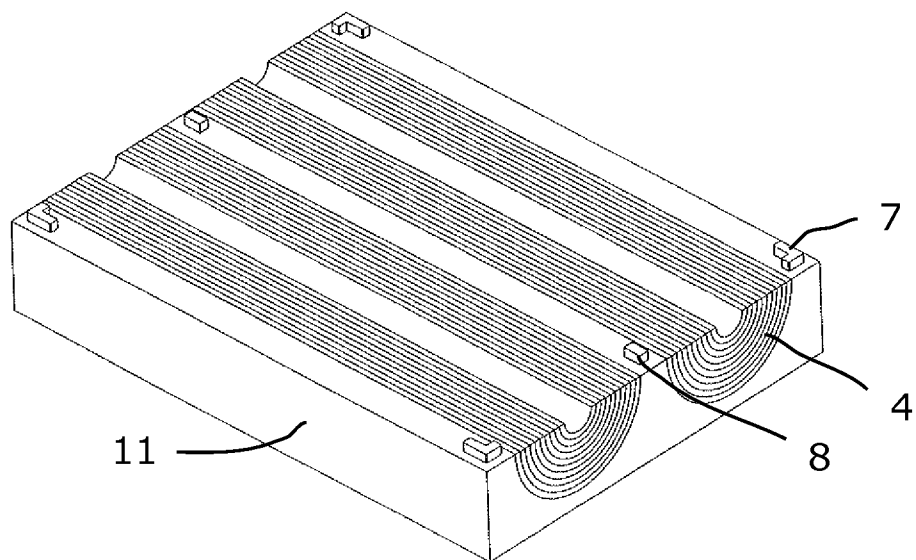


Fig. 7

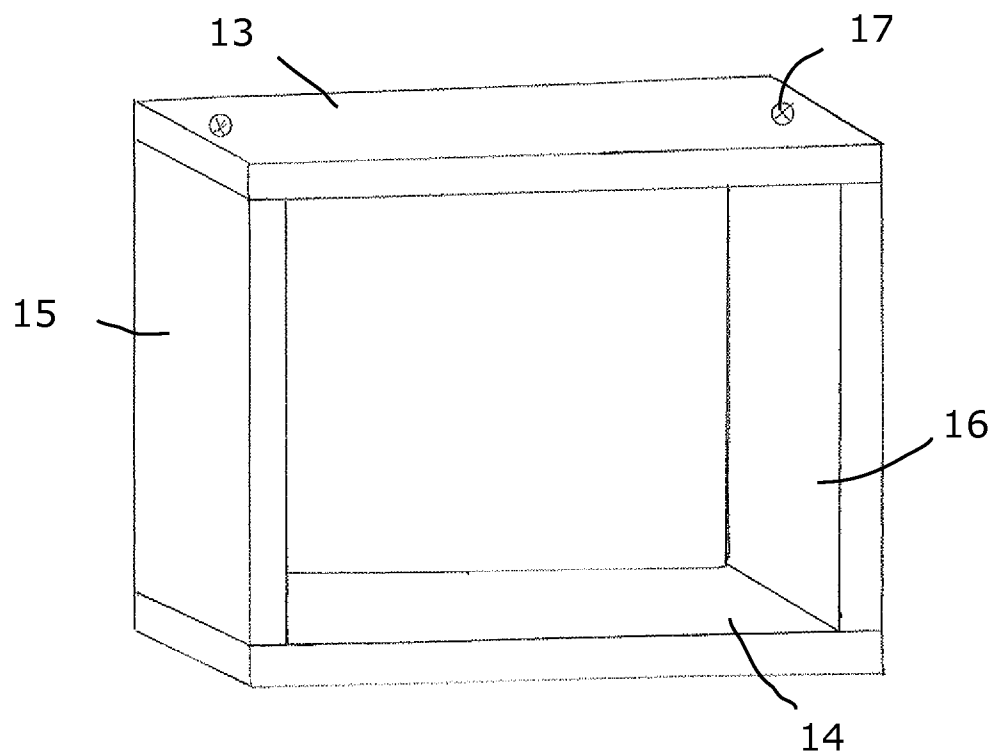


Fig. 8

4/4

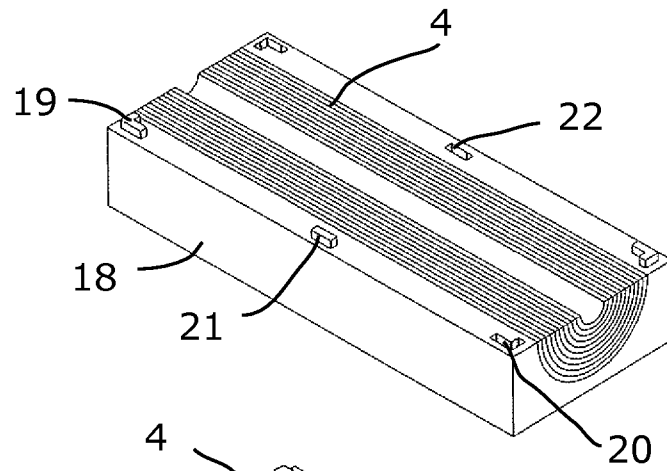


Fig. 9

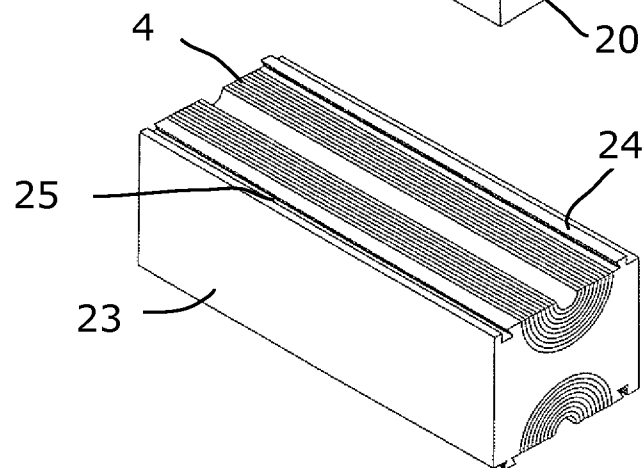


Fig. 10

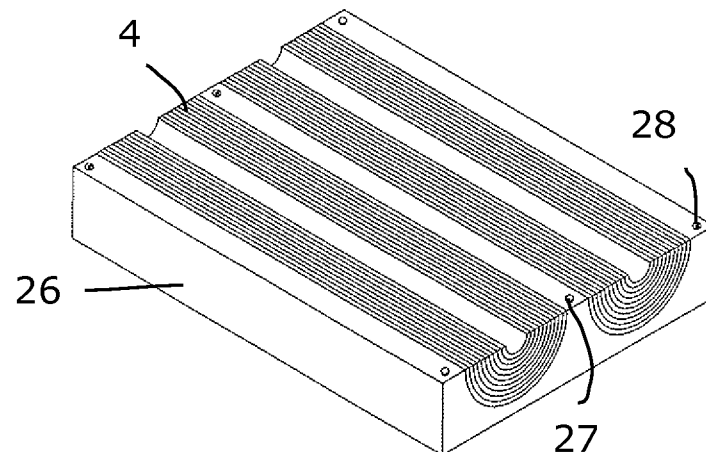


Fig. 11

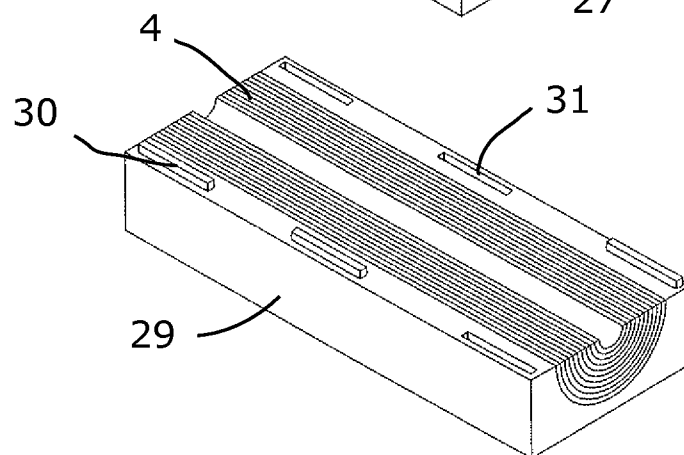


Fig. 12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2010/050118

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: F16L, H02G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 4434202 A1 (MURRPLASTIK GMBH SYSTEM-TECHNIK), 21 Sept 1995 (21.09.1995), figure 1, abstract --	1-14
Y	WO 2007094736 A1 (TOXTEC AB), 23 August 2007 (23.08.2007), figures 12,16, abstract --	1-14
Y	WO 2005057749 A1 (ROXTEX AB), 23 June 2005 (23.06.2005), figures 1,3, abstract --	1-14
Y	SE 531217 C2 (ROXTEC AB), 20 January 2009 (20.01.2009), figures 1,3, abstract -- -----	1-14

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
 "&" document member of the same patent family

Date of the actual completion of the international search

1 March 2010

Date of mailing of the international search report

18 -03- 2010

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Sara Thulin / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2010/050118

International patent classification (IPC)

F16L 5/02 (2006.01)

H02G 3/22 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se (English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se (Swedish version)

Use the application number as username. The password is **SFLRVCEIOR**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE2010/050118

DE	4434202	A1	21/09/1995	DE	9414666	U	24/08/1995
WO	2007094736	A1	23/08/2007	CN	101064421	A	31/10/2007
				EP	1989770	A	12/11/2008
				SE	0600367	A	18/08/2007
				US	20090218451	A	03/09/2009
WO	2005057749	A1	23/06/2005	AU	2004298224	A,B	20/03/2008
				BR	PI0417522	A	06/03/2007
				CA	2549047	A,C	23/06/2009
				CN	1914777	A	14/02/2007
				CN	100456589	C	28/01/2009
				EP	1695424	A	30/08/2006
				JP	4191766	B	03/12/2008
				JP	2007514398	T	31/05/2007
				KR	20060110320	A	24/10/2006
				NO	20063212	A	29/08/2006
				RU	2319057	C	10/03/2008
				SE	526243	C	02/08/2005
				SE	0303361	A	13/06/2005
				TW	274451	B	21/02/2007
				US	7371969	B	13/05/2008
				US	20070199728	A	30/08/2007
SE	531217	C2	20/01/2009	SE	0701304	A	30/11/2008
				WO	2009022960	A	19/02/2009