

Published:

— with international search report (Art. 21(3))

Needle assembly cover

5 Description

Technical Field

10 The invention relates to a cover for a needle assembly, which is used with an injection device such as, for example, a pen injector or an auto-injector.

Background of the Invention

15 Patients suffering from diseases like diabetes have to frequently self-administer injections. Injection devices like auto-injectors or pen injectors have been developed to facilitate self-administering injections. Typically, such injection devices are re-usable and refitted with sterile injection needle assemblies to minimize the risk of infections.

20 A conventional needle assembly is coupled to an injection device by a threaded engagement. However, patients typically over-tighten the needle assembly when coupling it to the injection device making removal of the needle assembly difficult. Difficulties in removing the needle assembly can lead to needle-stick injuries and infection. Thus, there is a need for an improved means by which to couple and remove the needle assembly to/from an injection device.

25

Summary of the Invention

30 It is an object of the present invention to provide a needle assembly cover for a needle assembly which is used with an injection device.

30

In an exemplary embodiment, a needle assembly system comprises a needle assembly including a needle and a needle support, and a cover including a distal portion adapted to house at least a distal end of the needle and a proximal portion adapted to house the needle support. The proximal portion includes a first portion and a second portion. The

first portion has a first inner diameter substantially equal to an outer diameter of the needle support and the second portion has a second inner diameter greater than the diameter of the needle support.

5 In an exemplary embodiment, a first inner surface of the first portion frictionally engages the needle support. A second inner surface of the second portion does not frictionally engage the needle assembly. The second inner surface includes at least one projection, and an outer surface of the needle support includes at least one groove. Engagement
10 of the at least one projection with the at least one groove provides at least one of an audible feedback and a tactile feedback.

In an exemplary embodiment, the cover includes at least one extension extending proximally of the proximal portion. The at least one extension is adapted to abut an injection device.

15

In an exemplary embodiment, the proximal portion is elastically deformable.

Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the
20 detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

25 Brief Description of the Drawings

The present invention will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only, and thus, are not limitative of the present invention, and wherein:

30

Figure 1 shows a sectional view of a section of a needle assembly cover according to an exemplary embodiment of the present invention,

Figure 2 shows a sectional view of a section of a needle assembly cover according to an exemplary embodiment of the present invention, and

5 Figure 3 shows a sectional view of a section of a needle assembly cover according to an exemplary embodiment of the present invention.

Corresponding parts are marked with the same reference symbols in all figures.

Detailed Description

10

As shown in Figure 1, a needle assembly system 1 comprises a needle assembly 4 and a cover 5 for the needle assembly 4. The needle assembly 4 may be coupled to an injection device 2 such as, for example, a pen injector or an auto-injector. The injection device 3 contains a medicament module 3, such as a cartridge or a pre-filled syringe.

15

The needle assembly 4 may include a needle support 4.2 and a needle 4.1. The needle 4.1 may include a proximal tip for piercing a septum on the medicament module 3 and a distal end for piercing an injection site. The needle support 4.2 may be cylindrical and have an inner threaded surface 4.4 adapted to mate with an outer threaded surface 2.2 on a distal end 2.1 of the injection device 2. The needle 4.1 may be disposed along a longitudinal axis 6 of the needle assembly 4.

20

In an exemplary embodiment, the cover 5 for the needle assembly 4 includes a distal portion, a middle portion and a proximal portion. The distal portion may be cylindrical and adapted to house the distal end of the needle 4.1. The distal portion of the cover 5 may have a closed distal end to prevent exposure of the distal end of the needle 4.1. The middle portion of the cover 5 may have a frusto-conical shape, increasing in diameter from distal to proximal ends. A proximal end of the middle portion may include a stop face 5.2 formed an inner surface thereof. The stop face 5.2 may include or more projections or annular surface which project into an interior of the cover 5. The stop face 5.2 may abut a distal face 4.5 of the needle support 4.2 to prevent the needle support 4.2 from moving distally within the cover 5 past the stop face 5.2

25

30

In an exemplary embodiment, the proximal portion of the cover 5 may be cylindrical, having a substantially constant outer diameter along its length. The proximal portion may have a first portion 5.1 with a first inner diameter which is substantially equal to an outer diameter of the needle support 4.2. Thus, the first portion 5.1 of the proximal portion of the cover 5 may frictionally engage the needle support 4.2. The proximal portion may have a second portion with a second inner diameter which is greater than the outer diameter of the needle support 4.2. Thus, the cover 5 may rotate relative to the needle support 4 when the needle support 4.2 is in the cover 5 but does not engage the first portion 5.1.

10

As shown in Figure 1, the needle assembly 4 is in a first position (e.g., a distal position) within the cover 5 when the needle assembly 4 first engages the injection device 2.

When the needle assembly 4 first engages the injection device 2, one or more extensions extending proximally from a proximal end 2.6 of the cover 5 may abut a shoulder 2.3 on the injection device 2. Thus, in this exemplary embodiment, the cover 5 may not move axially when the needle assembly 4 is being engaged to (or disengaged from) the injection device 2. In other exemplary embodiments, the cover 5 may move axially until the proximal end of the cover 5 abuts the shoulder 2.3.

20 In the first position, the distal face 4.5 of the needle support 4.2 abuts the stop face 5.2 of the middle portion of the cover 5. When the needle support 4.2 engages the distal end 2.1 of the injection device 2, the cover 5 may be rotated relative to the injection device 2, and due to the frictional engagement between the first portion 5.1 of the proximal portion of the cover 5 and the needle support 4.2, the needle support 4.2 may be temporarily, positionally fixed relative to the cover 5. As the inner threaded surface 4.4 of the needle support 4.2 engages the outer threaded surface 2.2 of the injection device 2, the needle support 4.2 may be axially advanced in a proximal direction toward the injection device 2.

30 Figure 2 shows an exemplary embodiment of the needle assembly 4 in a second position (e.g., proximal position) within the cover 5 after one or more rotations of the cover 5 relative to the injection device 2. In the second position, the needle support 4.2 has disengaged from the first portion 5.1 of the proximal portion of the cover 5 and is in the second portion. Because the second portion has the second diameter greater than

the outer diameter of the needle support 4.2, further rotation of the cover 5 may not result in rotation of the needle assembly 4. Thus, in the second position, the needle assembly 4 has properly engaged the injection device 2 (e.g., a distal face 2.4 of the injection device 2 abuts a distal end of the needle support 4.2 and a proximal end 4.7 of the needle assembly 4 abuts the shoulder 2.3), but the radial separation between the cover 5 and the needle support 4.2 prevents over-tightening of the needle assembly 4 to the injection device 2.

In an exemplary embodiment, at least a portion of an outer surface 4.3 of the needle support 4.2 may have a plurality of grooves formed therein, and the inner surface of the second portion of the proximal portion of the cover 5 may have one or more projections formed thereon. When the needle assembly 4 is in the second position within the cover 5, further rotation of the cover 5 may cause the one or more projections to intermittently abut the plurality of grooves, thereby providing an audible (“clicking”) feedback and/or a tactile feedback. The audible and/or tactile feedbacks may indicate to the patient that the needle assembly 4 has been properly secured to the injection device 2 and further rotation of the cover 5 is neither necessary nor desirable.

To remove a used needle assembly 4 from the injection device 2, the cover 5 may be placed on the needle assembly 4. Because the needle assembly 4 is in the second position and the cover 5 may rotate relative to the needle assembly 4, the patient may be required to pinch the proximal portion of the cover 5 so that the cover 5 engages the needle support 4.2. Thus, at least the proximal portion of the cover 5 may be elastically deformable to allow for squeezing. After a few pinched rotations of the cover 5, the needle support 4.2 may be advanced axially within the cover 5 into engagement with the first portion 5.1 of the proximal portion of the cover 5 and pinching the cover 5 may no longer be necessary to disengage the needle assembly 4 from the injection device 2.

Figure 3 shows another exemplary embodiment of a needle assembly system 1 according to the present invention. In this exemplary embodiment, one or more protrusions 2.5 are formed on the shoulder 2.3 of the injection device 2. The protrusions 2.5 abut the proximal portion of the cover 5 and prevent axial movement of the cover 5 relative to the injection device 2 in a proximal direction.

Those of skill in the art will understand the modifications (additions and/or removals) of various components of the device and/or system and embodiment described herein may be made without departing from the full scope and spirit of the present invention, which encompass such modifications and any and all equivalents thereof.

List of References

	1	needle assembly system
5	2	injection device
	2.1	distal end
	2.2	outer threaded surface
	2.3	shoulder portion
	2.4	distal face
10	2.5	protrusion
	2.6	proximal end
	3	medicament module
	4	needle assembly
	4.1	needle
15	4.2	needle support
	4.3	outer surface
	4.4	inner threaded surface
	4.5	distal face
	4.6	distal end
20	4.7	proximal end
	5	cover
	5.1	first portion
	5.2	stop face
	6	longitudinal axis
25		

Claims

5

1. A needle assembly system (1) comprising:
a needle assembly (4) including a needle (4.1) and a needle support (4.2);
a cover (5) including a distal portion adapted to house at least a distal end of the
needle (4.1) and a proximal portion adapted to house the needle support (4.2),
10 wherein the proximal portion includes a first portion (5.1) and a second portion,
wherein the first portion (5.1) has a first inner diameter substantially equal to an outer
diameter of the needle support (4.2) and the second portion has a second inner
diameter greater than the diameter of the needle support (4.2).

15

2. The needle assembly system (1) according to claim 1, wherein a first inner
surface of the first portion (5.1) frictionally engages the needle support (4.2).

20

3. The needle assembly system (1) according to claim 2, wherein a second inner
surface of the second portion does not frictionally engage the needle assembly
(4).

25

4. The needle assembly system (1) according to claim 3, wherein the second inner
surface includes at least one projection, and an outer surface (4.3) of the needle
support (4.2) includes at least one groove.

5. The needle assembly system (1) according to claim 4, wherein engagement of
the at least one projection with the at least one groove provides at least one of an
audible feedback and a tactile feedback.

30

6. The needle assembly system (1) according to any one of the preceding claims,
wherein the cover (5) includes at least one extension extending proximally of the
proximal portion, wherein the at least one extension is adapted to abut an
injection device (2).

7. The needle assembly system (1) according to any one of the preceding claims, wherein the proximal portion is elastically deformable.

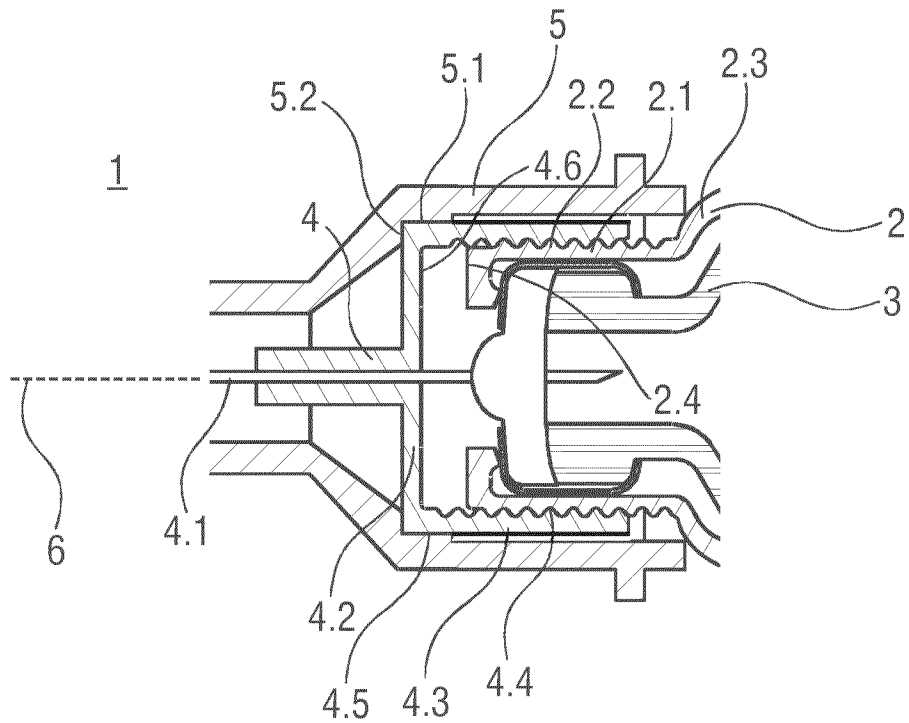


FIG 1

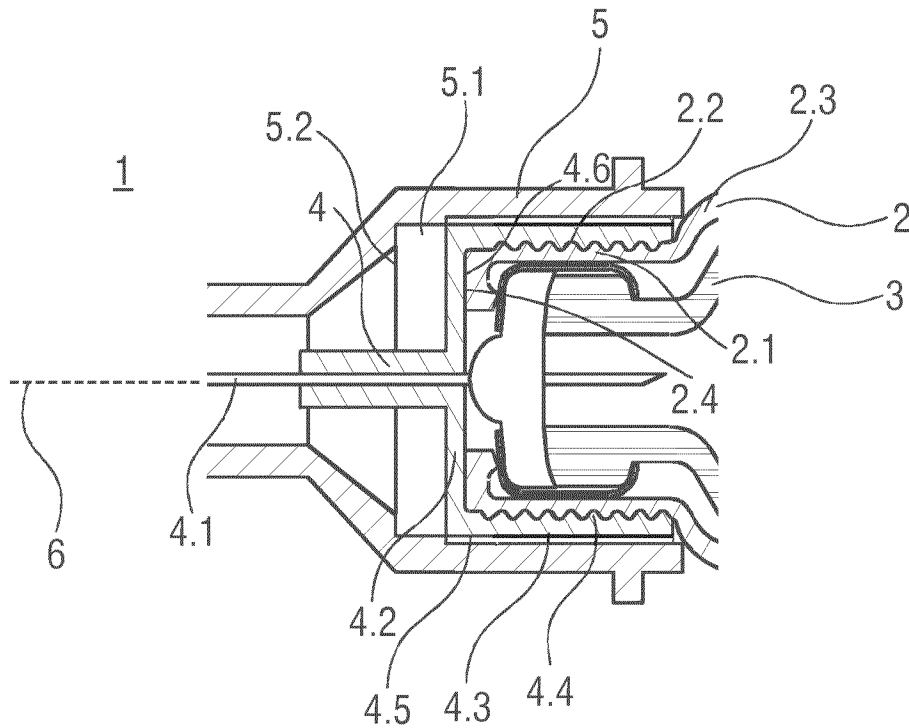


FIG 2

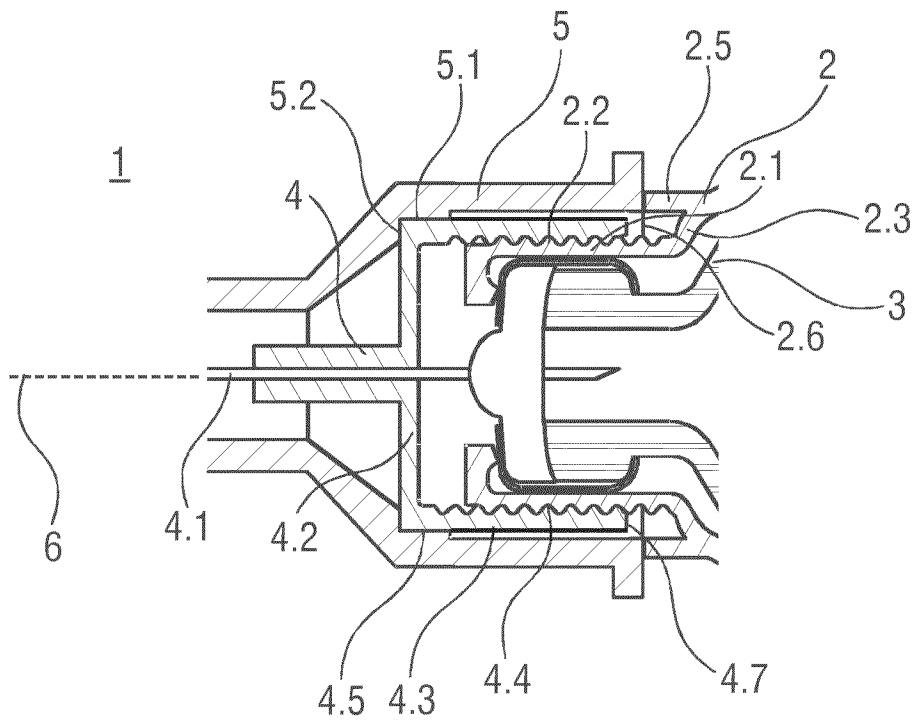


FIG 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/059987

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61M5/32 A61M5/34
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
A61M
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 199 15 272 A1 (VETTER & CO APOTHEKER [DE]) 5 October 2000 (2000-10-05) figures 1a-e column 1, lines 35-38 column 2, lines 49-52 column 3, lines 15-22	1-3,6,7
X	EP 2 039 384 A2 (BECTON DICKINSON CO [US]) 25 March 2009 (2009-03-25) figures 4,9 paragraphs [0051], [0052], [0066]	1-7
X	US 3 967 621 A (SCHWARZ LOTHAR) 6 July 1976 (1976-07-06) figure 1 column 1, lines 7-8 column 2, lines 7-20 column 7, line 21	1,3,6,7
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 20 August 2012	Date of mailing of the international search report 27/08/2012
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Herz, Markus
--	--

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/059987

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 747 835 A (SANDHAUS JEFFREY [US]) 31 May 1988 (1988-05-31) figure 11 column 9, line 33 -----	1-3,6,7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2012/059987

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19915272	A1	05-10-2000	DE 19915272 A1 05-10-2000
			WO 0059563 A1 12-10-2000

EP 2039384	A2	25-03-2009	CA 2639320 A1 07-03-2009
			EP 2039384 A2 25-03-2009
			EP 2221078 A1 25-08-2010
			JP 2009101140 A 14-05-2009
			US 2009069753 A1 12-03-2009

US 3967621	A	06-07-1976	DE 2434046 A1 29-01-1976
			FR 2278350 A1 13-02-1976
			GB 1511259 A 17-05-1978
			IT 1039867 B 10-12-1979
			US 3967621 A 06-07-1976

US 4747835	A	31-05-1988	AU 1120288 A 25-08-1988
			CN 88100806 A 14-09-1988
			EP 0284183 A1 28-09-1988
			JP 63203165 A 23-08-1988
			US 4747835 A 31-05-1988
