(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
11 December 2008 (11.12.2008)

PCT

(10) International Publication Number
WO 2008/149171 A1

(51) International Patent Classification:
B30B 1/26 (2006.01) *B30B 15/14* (2006.01)

(21) International Application Number:
PCT/IB2007/001525

(22) International Filing Date: 6 June 2007 (06.06.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant *(for all designated States except US)*: **ABB RESEARCH LTD** [CH/CH]; Affolternstrasse 52, CH-8050 Zurich (CH).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: **BOSGA, Sjoerd** [SE/SE]; Tråddgragargatan 27d, S-72337 Västerås (SE).

(74) Agent: **ABB, AB**; Legal & Compliance/Intellectual Property, Forskargaärd 7, S-721 78 Våsterås (SE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*
— *with amended claims*

(54) **Title:** MOTOR UPGRADE KIT FOR A MECHANICAL PRESS

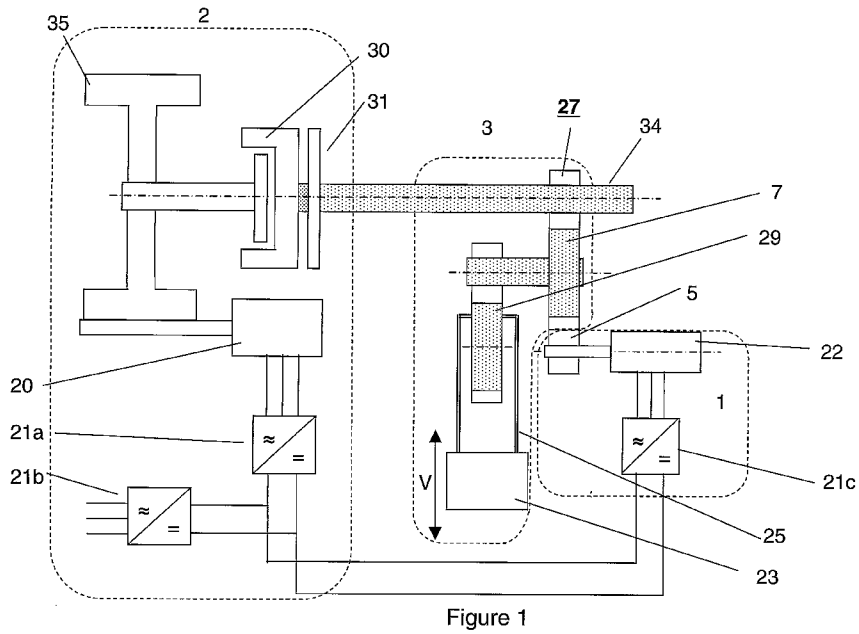

Figure 1

(57) **Abstract:** A press drive motor upgrade kit (1) for adapting a mechanical press of the flywheel -driven type to a servo press comprising a drive motor (20) and a drive train (34, 27, 29), and a mechanical press so modified. The kit comprises at least one servo motor (22) adapted for driving said mechanical press and a drive transmission apparatus or gear transmission or the like (9), connected to the servo motor (22) and adapted for engagement with at least one gear or shaft of said drive train of said mechanical press. The kit may also comprise a baseplate (4) or mounting structure on which the servo motor and transmission are arranged.

WO 2008/149171 A1

Motor upgrade kit for a mechanical press

TECHNICAL FIELD.

The invention concerns a conversion apparatus and method for a mechanical press. In particular it describes an electric motor upgrade kit of parts to adapt a mechanical press of the flywheel-driven type and convert it to a servo press. The kit may be advantageously used to convert an existing mechanical press, or a mechanical press being manufactured according to an existing traditional flywheel design, into a servo press, preferably of the hybrid servo type and thus provide greater control over a production cycle of the existing press or press made to a traditional design.

TECHNICAL BACKGROUND

Mechanical presses are commonly used to form industrial products such as automobile parts which are stamped or pressed from steel blanks or workpieces. Today's large mechanical presses are most often driven by a flywheel. The function of the flywheel is to store the necessary energy to carry out a pressing, stamping, punching etc operation. A motor drives the flywheel so that before the start of a press operation the flywheel is rotating at the speed at which the pressing will occur.

In such presses, parts are pressed between an upper and a lower die. The upper die is connected to the press slide, which moves up and down in the slide guides, while the lower die is either fixed or mounted on a bed. The slide motion is driven by the press mechanism, which is located in the upper part of the press, known as the crown. The press mechanism consists of speed-reducing gears and a mechanism which translates rotating motion of the gears into linear motion of the slide. This translation can either be a

CONFIRMATION COPY

relatively simple eccentric mechanism, or a more complicated link-drive mechanism. The gears today are driven by the flywheel, which is connected to the so-called main shaft (or high-speed shaft) through a clutch. A brake is also connected to this same shaft.

In a conventional mechanical press the press continues to rotate after each pressing stage is completed until its eccentric wheel has rotated one complete turn. During this second stage following pressing, the motor driving the flywheel will slowly increase the rotational speed and regain the normal pressing speed. At the end of the operation, the clutch is disengaged and a brake is used to stop the motion of the press. In the traditional mechanical solution, press speed is fixed and proportional to flywheel speed during the complete operation. Thus, if pressing has to be done at a low speed (for quality or other technical reasons), the complete operation will occur at low speed. This results in a long cycle time, and therefore, a low production rate. To address the problem of low speeds in the non pressing stage of a press production cycle presses with variable speed drive motors, known as servo presses, or hybrid servo presses, have been developed. For example, US2004/003729, entitled Drive unit and drive method for press, assigned to Komatsu, describes a press drive unit with a first drive system for driving a flywheel with a main motor and a second drive system for driving the drive shaft at variable speed with a sub motor.

To provide a servo press, one option is designing completely new press mechanics, and integrating a servo motor and associated transmission into this new design. This option, a new press design, is the option which can give a design which is best suited for servo operation, as the design can be optimized. For example it can be designed for optimal controllability of the press during the pressing phase, or for highest possible productivity. However, this option has high risks for both press manufacturers and their customers: the design will be new and thus unproven, and most

often manufacturers and customers have, as yet, few or no clear specifications for how such a design should perform. As a result, different manufacturers will likely offer very different servo press designs, some slower than existing mechanical presses, some with extremely high power requirements, and in general with very different performances which may be unpredictable over a long service life. Servo presses, such as presses disclosed in patent application US 60/765183, sometimes described as having a Direct Drive Chain configuration, do not have a large flywheel and a clutch. A servo motor drives the press directly. At the start of the operation, the motor accelerates the press to a high speed, higher than the pressing speed. Then, before impact, the motor slows down the press to pressing speed. Pressing thus occurs at around the same speed as with the mechanical solution. As soon as pressing is completed, the motor once again accelerates the press to high speed. When the press has opened sufficiently for an unloader robot to enter the press, the motor starts slowing down the press. The servo press can thus reach a much improved cycle time at low pressing speeds, because of its capability to run at a high speed during the rest of the cycle. However, the servo press requires a large motor and power converter (approx. five times larger than the fully mechanical press).

SUMMARY OF THE INVENTION

According to an aspect of the present invention a drive motor upgrade kit for adapting a mechanical press of the flywheel-drive is described, which said kit comprises a servo motor adapted for driving said mechanical press and a drive transmission apparatus connected to the servo motor and adapted for engagement with at least one gear or shaft of said drive train of said mechanical press, and a structural fixture or baseplate on which the servo motor and the drive transmission apparatus are arranged.

According to an embodiment of the present invention a drive motor upgrade kit for adapting a mechanical press of the flywheel-drive is described wherein the drive transmission apparatus of said

upgrade kit is adapted to cooperate with a gear or shaft of the existing original press drive train.

According to an embodiment of the present invention a drive motor upgrade kit for adapting a mechanical press of the flywheel-drive is described wherein the drive transmission apparatus is mounted on an external part of said mechanical press to cooperate with a gear or shaft of said drive train of said mechanical press arranged inside said mechanical press.

According to another embodiment of the present invention a drive motor upgrade kit for adapting a mechanical press of the flywheel-drive is described wherein the drive transmission apparatus is mounted on an external part of said mechanical press to cooperate with a gear or shaft of said drive train of said mechanical press arranged inside said mechanical press, which gear may be an intermediate gear of the original existing press drive train.

According to another embodiment of the present invention a drive motor upgrade kit for adapting a mechanical press of the flywheel-drive is described wherein the upgrade kit comprises a common fixture or baseplate which is arranged for attaching the servo motor beside or above the crown of said mechanical press for engagement via the drive transmission apparatus with said drive train of said mechanical press.

According to another embodiment of the present invention a drive motor upgrade kit for adapting a mechanical press of the flywheel-drive is described wherein the upgrade kit comprises a common fixture or baseplate which is arranged for attaching the servo motor on top of the crown of said mechanical press.

According to another embodiment of the present invention a drive motor upgrade kit for adapting a mechanical press of the flywheel-drive is described wherein the upgrade kit further comprises a control means for limiting the total peak power, both positive and

negative, of the first press flywheel motor and the upgrade motor to a value which is equal to or lower than the peak power of the servo motor alone.

According to another aspect of the present invention a mechanical press for a mechanical press of the flywheel-driven type is disclosed which is arranged with a drive motor upgrade kit for adapting said mechanical press of the flywheel-driven type to a servo press comprising a drive motor and a drive train, such that said mechanical press further comprises a servo motor adapted for driving said mechanical press and a drive transmission apparatus connected to the servo motor and adapted for engagement with at least one gear or shaft of said drive train of said mechanical press and a structural fixture or baseplate on which the servo motor and the drive transmission apparatus are arranged.

An object of this invention is to eliminate the inconveniences of the above mentioned solutions, with a design that:

- can be installed on an existing press in a very short time, on site
- does not require significant modifications in the press crown
- can be offered as an option on a new press, which can be added in a late stage of the press design/manufacturing process
- has a relatively low inertia

To realize some of the above objects, the servo motor and associated transmission (gears) are preferably built together as a unit, which is called a "Press Motor Upgrade Kit". This unit is designed to be mounted on top of the press crown, and to connect to the existing press gears without requiring any modification of the existing press mechanism. In this description, the term servo motor is used to mean any type of controllable, variable-output electric motor.

The Press Motor Upgrade Kit is a standalone unit which is mounted on the press in one part. It consists of a base plate, or base structure, which holds together the other parts of the kit, principally a motor and an associated transmission (eg gears). This structure or baseplate is fixed to the top or other structural part of the press crown, with sufficient mounting accuracy and rigidity. On the baseplate or structure is mounted the (servo) motor or motors. Through a coupling this motor is connected to gear wheels of the mechanical press, which gears will typically reduce the speed of the motor to a lower speed of an existing gear in the press crown. This connection will then allow the upgrade motor to move the press gears at variable speed, both in positive and negative direction and up to a higher speed (eg. 50% higher) when not stamping than the maximum stamping speed the mechanical press drive was originally designed for. Another advantage is the increased flexibility of production cycle made possible. For example, the hybrid servo technology described here allows pressing at lower speed while maintaining cycle time, or alternatively pressing at an identical speed but with shorter cycle time, or a mix of these two.

Since the press motor upgrade Kit does not require major modifications in the press crown, installation on an existing press will be quick, and can easily be performed in a planned maintenance or holiday stop of the press. Minor modifications to the crown may include changing top plates, moving ventilation holes, moving eccentric position sensors, moving lubrication tubing, moving or replacing fencing, adding fixture holes, mechanizing part of the crown top structure, adding cable guides for the servo motor cabling, etc. However minor modifications such as these can be performed on site, and also do not affect the existing gear mechanism of the press.

Application of the kit is not limited to presses in which a pinion of the main shaft is close enough to the exterior of the press to

interact with a gear of the kit. In fact, in most presses the main shaft is not at all close to the top of the crown. Instead, in most presses there are intermediate gears close to the top of the crown. These intermediate gears are used to provide a gear step between the high speed of the main shaft and the low speed of the eccentric wheels of a traditional mechanical press.

Thus, in its most typical form the Press Upgrade Kit will preferably be designed to interact with an intermediate gear of the existing mechanical press, since this gear is almost always closest to the top of the press crown (in a some cases it may even extend to above the top of the crown structure). It may seem a disadvantage that such an intermediate gear rotates at a lower speed than the main shaft, since a higher gear ratio is thus required in the transmission to a high-speed motor. However, to bridge the distance between the top of the intermediate gear wheel and the mounting point of a first gear wheel belonging to the kit, typically a relatively large-diameter gear wheel is needed. To limit the kinetic energy associated with such a wheel, it is advantageous that it turns at as low speed as possible. Thus, for a kit to add as little inertia to the press as possible, interfacing with an intermediate gear is in most cases preferable to interfacing with a main-shaft pinion.

An important advantage of using the described motor upgrade kit to adapt a press is that relying on an existing press design means that established design rules still apply, so that there should be no unpleasant surprises in press performance, life time, etc. Thus reliability for an adapted press is expected to be high. Yet another advantage of using the described motor upgrade kit is that it does not involve any structural changes in the existing press or press design. This represents a simpler process which takes relatively little time, so that time down time is comparatively short. The absence of structural changes made to the existing press also means that using the press motor upgrade kit involves a

lower risk to the manufacturer than investing in a whole new press design. In addition, it is also an advantage that in a hybrid topology, the Kit can be removed if necessary after which the manufacturer has a fully functional traditional mechanical press.

The invention may be applied extensively, because adding a servo motor to an existing design is an option which can be applied to existing presses. Since presses typically have a life time of more than 30 years, this is a very important advantage. Many manufacturers and suppliers seek to upgrade or refurbish their existing press lines rather than investing in completely new lines.

As an alternative, a kit may be designed to interact with a gear associated with an eccentric wheel of the press (requiring a higher gear ratio to be realized in the kit) or a main-shaft pinion (or gear) (requiring a lower gear ratio to be realized in the kit).

In other embodiments additional gear mechanisms between the servo motor of the kit and the existing gear transmission system of the mechanical press may be used. For example, between the servo motor and the gear that interconnects with the existing drive train there may be more than a gear or gears, there may be a belt drive or chain drive as well.

In further embodiments or developments the transmission between the servo motor of the kit and the existing press may also comprise a clutch. A brake may also be added between the servo motor and the existing press gears, to work as a brake on the servo motor drive and transmission. Such a brake may optionally be arranged connected to the upgrade motor (22) for braking it or holding it at standstill. A clutch and a brake may optionally be

combined into a single unit, interspersed between the servo motor and the existing transmission gears of the press.

In another aspect of the invention, a press system or press line comprising at least one mechanical press of the flywheel-driven type arranged with a drive motor upgrade kit and the press operated synchronised with loading and/or press unloading equipment is described.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will now be described, by way of example only, with particular reference to the accompanying drawings in which:

FIGURE 1 is a schematic block diagram for a motor upgrade kit for a mechanical press, according to an embodiment of the invention,

FIGURE 2a is a schematic diagram showing a perspective view of a motor upgrade kit for a mechanical press, according to an embodiment of the invention, and Figure 2b is a schematic diagram comprising a view of the crown part of a mechanical press as a front elevation together with the relative position of a motor upgrade kit, according to an embodiment of the invention,

DETAILED DESCRIPTION OF THE EMBODIMENTS

Figure 1 shows the topology of a mechanical press with two drives: a mechanical drive 2 comprising a clutch 30 and flywheel 35, with associated motor 20, and a servo motor 22 with associated transmission 5. The figure also shows a press ram 23 which is driven in a reciprocal motion V by a main shaft 34 via press transmission gears 27 and an eccentric wheel 29 and to open and close the press.

With both drives, existing motor 20 and upgrade motor 22 in operation this is the topology of a hybrid servo press. With only the mechanical drive in place or operating, this would be a classic mechanical press. With only the motor upgrade Kit 1

operating, (and, possibly, an emergency brake), this would be a "full" servo press. However, the most likely topology for a mechanical press comprising the motor upgrade kit is the hybrid servo topology.

Figure 2a shows a principle drawing of a kit 1 with a single motor, as well as a schematic diagram of how the kit would interact with the gears of a press in Fig 2b. Figure 2a shows the motor upgrade motor 22 mounted on a structural baseplate 4, to which is also attached a set of gears 9 for transmitting power from the motor 22. Figure 2b shows a diagram of the crown or top T of a mechanical press. The figure shows the kit 1, with the upgrade motor 22 and a set of gears 9 arranged on a baseplate 4. The kit is shown here arranged on top of the crown of the press such that a gear 5 (Fig 1) of the set of gears 9 of the kit 1 is arranged to cooperate with a gear 7 (Fig 1) of the existing power transmission train of the mechanical press so that the upgrade motor 22 can drive the press through the existing power train of the press.

When operating a press adapted with the press upgrade kit 1 in a hybrid configuration the clutch and the brake of the press are required to be separately controlled. The brake would normally be activated for emergency braking and maintenance only, while the clutch will be activated during every press cycle, during the actual stamping or pressing. In a traditional mechanical press, clutch and brake may be combined into a unit in which at any time either the clutch or the brake is activated. In a press for which this is the case, the transformation into a servo press requires not only the installation of the Kit, but also a modification in the clutch/brake unit. Either such a combined clutch/brake unit could be modified, or replaced by a new single unit, or replaced by a separate clutch unit and a brake unit.

The gears of the Press Upgrade Kit may, for the hybrid servo press topology, typically be narrower, or thinner than the existing press gears. This is possible because the kit gears do not need to be dimensioned for the full pressing force, since this force will continue to be supplied by the flywheel. Thus, by using a smaller width, ie thickness of the gear wheel, the kit will be more compact and add less inertia to the press.

The above discussion regarding gear ratios applies to the case where a (servo) motor is used which has a higher top speed than the desired top speed of the main shaft. Future motor developments may lead to the use of a lower-speed motor, making a connection to intermediate gears or even eccentric-shaft gears even more appropriate.

A servo motor such as motor 22 to be added to an existing press or press design typically has a top speed which is higher or not much lower than the top speed of the main shaft 34 of the traditional press. Thus the connection of this servo motor would typically include a gearing transmission mechanism between the motor shaft and the press main shaft. Different solutions for such a transmission mechanism exist, among which may be:

1. adding a gear wheel to the main shaft, which interacts with a gear wheel on the upgrade motor shaft, possibly with intermediate gear wheels;

2. adding a pulley to the main shaft, which through a belt is connected to a smaller pulley, which is mounted on the motor shaft, possibly with intermediate gear wheels;

3. adding a pinion to the main shaft, through which a chain is connected to a smaller pinion, which is mounted on the motor shaft, possibly with intermediate gear wheels;

All these solutions have in common a drawback that a modification has to be made **inside** the crown T of the press. An exception would be that a new gear, pulley or pinion were mounted on the mainshaft and on the outside of the crown, but this would typically mean that the main shaft has to be made longer - thus also affecting an existing component which is inside the crown.

Solutions 2 and 3 (belt or chain transmission) above are relatively easy to realise, since only a single wheel (pulley or pinion) has to be mounted on the main shaft. However, both chains and belts usually have a limited lifetime and limited capability for power transmission, which make their application in presses limited and difficult. For example, a belt for a 1000 T hybrid servo press would have a width of about 300 mm, which is large compared to available space, and would have a lifetime of less than three years. Mounting and/or replacing a belt inside a press would also be complicated, unless the pulley were at the end of the shaft, since the belt has "infinite length". Furthermore, both the belt and the pulley solution require a wheel on the main shaft of such diameter, strength and width, that a significant increase in the total inertia of rotating masses (>= 15%) would result, so deteriorating the dynamic performance of the servo solution. In the case of the chain, even the mass of the chain would add significant inertia.

However, solutions 2 and 3 have the important advantage that a large distance between main shaft and servo motor can be bridged through the belt or the chain, and that the required gear ratio between main shaft and servo motor shaft may then be realized in a single step. Since a large distance can be bridged, the servo motor can be mounted at the top of the press. This means that this solution can be realized for most constructions of a press - provided that an suitable location is found for a pulley on the main shaft.

Solution 1 does not have this advantage - bridging the distance between the main shaft and the top of the press is difficult, and would involve large gear wheels with correspondingly large inertia. The main problem with this solution is however that the new gear wheels also require support for their bearings. These supports would either have to be made in the existing crown structure, or a supporting plate or structure would have to be added and fixed to the crown.

Furthermore, these solutions have the following inconveniences:

* for a new press:

- modifications in the crown design have to be done early in the design stage of the press

* for an existing press:

- modifications in the crown require moving the press (crown) to a specialized workshop (solution 1)

- modifications in the crown will leave the press inoperable for a long time (for solution 1 this may be around 2 months, which is more than the usual 1-month summer break)

- solutions 2 and 3 add much inertia to the press, which may mean that the press brake must be re-dimensioned (i.e. replaced by a bigger brake)

* for new and existing presses:

- solutions 2 and 3 add much inertia to the press, thus limiting the performance improvement the servo should give.

Thus with the upgrade kit according to the present invention the inconveniences of the above mentioned solutions are eliminated by means of the described design that:

- can be installed on an existing press in a very short time, on site

- does not require significant modifications in the press crown

- can be offered as an option on a new press, which can be added in a late stage of the press design/manufacturing process
- has a relatively low inertia.

A press that has been upgrade may be arranged with a control unit to control the new motor. A control init may also be arranged to control both motors. A control unit or control system may also be arranged to control the existing or new motor of the flywheel and its existing or new inverter to limit the total peak power (both positive and negative) of the two motors (20, 22) to a value which is equal to or lower than the peak power of the servo motor, using the flywheel as an energy buffer.

The motor speed control means may comprise a frequency converter, an inverter/rectifier as shown or other motor speed control means. Motor speed control means may also be shared with other presses or machines. The drive may be a multidrive, i.e. a system where two or more inverters share a single rectifier. This is advantageous for the case where due to the above mentioned power limitation the peak power of the rectifier is lower than or equal to the peak power of the inverter for the servo motor. Preferably in arrangements of an upgrade press with which the flywheel is NOT used for pressing (i.e. when run not a hybrid servo but a direct/full servo), the flywheel may STILL be used for the above mentioned power limitation.

The rectifier is in any case preferably arranged to be bi-directional, so that energy can be fed back to the grid. Since the rectifier is an active rectifier, it can supply reactive power to the factory grid. It may thus be used to compensate for some of the reactive power consumed by rectifiers used in other presses. Possible configurations include:

- existing flywheel motor, inverter, rectifier maintained

- existing flywheel motor, inverter, rectifier replaced, rectifier shared with servo drive (this allows maximum peak power limitation)
- existing motor maintained, but inverter and rectifier replaced (almost same as previous, if motor is AC motor)

An advantage of a hybrid servo or direct servo press is that it may be synchronised with other equipment. For such a press, or a press converted with the press motor upgrade kit herein described that may be controlled with variable speed, there are ways to adapt the motion of the press so that the press is synchronized to the motion of the unloader and/or loader robot, resulting in optimal cycle times. This and other methods are described in a PCT application filed on June 6, 2007 entitled IMPROVED METHOD AND SYSTEM FOR OPERATING A CYCLIC PRODUCTION MACHINE IN COORDINATION WITH A LOADER OR UNLOADER MACHINE, filed by the same applicant as this application, and with an inventor in common, which application is hereby included in this specification by means of this reference. The described method comprises changing setpoints in the press motion depending on an estimated synchronization time point. The described invention also provides a method for automatically optimizing the press line while in operation. Also, proposed methods are described that may be used for synchronizing the unloader robot to the press as well. To optimise the productivity of press lines and/or servo press line, motion of the presses should be synchronized to the motion of the loading equipment and vice versa. Especially for the reversing ("alternative bi-directional") motion, this requires a new concept for synchronization, different from what has been used for traditional mechanical presses. A press line may comprise a number of presses, usually arranged to carry out a sequence of operations. The term "press line" may also include a single press and a mechanised loader and/or unloader.

The servo motor may be controlled to run according to different strategies for different types of press cycle. For example higher

than pressing speed before and after pressing, in order to reduce cycle time AND/OR maintain cycle time but reduce pressing speed.

In addition, line coordination of an entire process section may be improved by controlling such a line using a single controller arranged to carry out methods according to an embodiment of the invention, due in part to the improved controllability of the direct servo or hybrid servo presses. This may be carried out by a robot controller unit and/or by another control unit. Coordination or optimisation may be achieved in part by adapting speed during opening/closing a press (while for example maintaining a required speed and energy output during the pressing/stamping part of the cycle), resulting in cycle times which may be reduced dependent on parameters such as: a state of a downstream process; or a state of an upstream process or another consideration such as overall power consumption; reduced energy consumption; smoothing power consumption peaks in the press line.

It should be noted that while the above describes exemplifying embodiments of the invention, there are several variations and modifications which may be made to the disclosed solution without departing from the scope of the present invention as defined in the appended claims.

CLAIMS

1. A drive motor upgrade kit (1) for adapting a mechanical press of the flywheel-driven type to a servo press comprising a drive motor (20) and a drive train (34, 27, 29), **characterised** by said kit comprising:
-a servo motor (22) adapted for driving said mechanical press and
-a drive transmission apparatus (9, 5) connected to the servo motor (22) and adapted for engagement with at least one gear or shaft of said drive train of said mechanical press, and
-a structural fixture (4) or baseplate on which the servo motor and the drive transmission apparatus are arranged.

2. A motor upgrade kit according to claim 1, **characterised** in that the motor upgrade kit (1) and is arranged mounted on an external part of said mechanical press.

3. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus is adapted to cooperate with a gear or shaft of said press drive train.

4. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus is mounted on an external part of said mechanical press to cooperate with a gear or shaft of said drive train of said mechanical press arranged inside said mechanical press.

5. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus is arranged to cooperate with an intermediate gear (7) of drive train.

6. A motor upgrade kit according to claim 1 or any of claims 2-5, **characterised** by a common fixture (base plate) (4) on which the servo motor and the drive transmission apparatus are arranged for mounting the motor on an external part of said mechanical press

and so connecting the servomotor (22) via the drive transmission apparatus (9, 5) to a part of the said drive train of said mechanical press.

7. A motor upgrade kit according to claim 1, **characterised** in that the common fixture or baseplate is arranged for attaching the servo motor beside or above the crown (T) of said mechanical press for engagement via the drive transmission apparatus (9, 5) with said drive train (34, 27, 29) of said mechanical press.

8. A motor upgrade kit according to claim 7, **characterised** in that the common fixture or baseplate is arranged for attaching the servo motor on top of the crown (T) of said mechanical press.

9. A motor upgrade kit according to claim 7 or 8, **characterised** in that the common fixture or baseplate is arranged for attaching the servo motor on the outside of said mechanical press in a position at a height above the top of a press ram (23) of said mechanical press.

10. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus (9) is arranged for engagement with an intermediate gear (7) or shaft of said drive train arranged between the existing press clutch and the existing press eccentric wheels (29) or link mechanism of said mechanical press.

11. A motor upgrade kit according to any previous claim, **characterised** in that the drive transmission apparatus (9) of the upgrade kit is arranged for engagement with an eccentric wheel or gear (29) of the existing drive train of said mechanical press.

12. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus (9) of the upgrade kit is arranged for engagement with a main gear or shaft (34) comprised

in said drive train between the existing press clutch and eccentric wheel(s) of said mechanical press.

13. An upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus of the upgrade kit (9) comprises one or more gear wheels (5) for engaging with a gear part on an intermediate shaft which is connected to the main (HS) shaft of said drive train of said mechanical press.

14. An upgrade kit according to claim 1, **characterised** in that a brake is arranged connected to the upgrade motor (22) for braking it or holding it.

15. An upgrade kit according to claim 1 or 14, **characterised** in that a clutch or other coupling/de-coupling means is arranged connected between the upgrade motor (22) and the existing drive train of said mechanical press.

16. An upgrade kit according to claim 1 or 15, **characterised** in that a clutch and brake may be combined into a unit interspersed between the servo motor and the existing drive train of said mechanical press.

17. An upgrade kit according to claim 1 or 14 or 16, **characterised** in that a clutch and brake may be combined into a unit interspersed between the servo motor and the existing drive train of said mechanical press and arranged with means for mechanically switching out the servo motor so that the press can be run without the servo motor providing power.

18. An upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus of the upgrade kit (9) comprises one or more drive belts or other transmission means.

19. An upgrade kit according to claim 1, **characterised** by comprising a two or more servo motors in the upgrade kit (1).

20. An upgrade kit according to claim 1, **characterised** by comprising additional control means for a power supply arranged to provide control functions to the servo motor of the conversion kit.

21. An upgrade kit according to claim 1 or 18, **characterised** by comprising power supply means (21c) to provide power to the servo motor (22) of the conversion kit.

22. An upgrade kit according to claim 1 or 20 or 21, **characterised** in that additional control means are comprised in the upgrade kit to provide control functions to the servo motor (22) of the conversion kit, which control functions are arranged capable of switching out the servo motor so that the press can be run without the servo motor providing power to the press.

23. An upgrade kit according to claim 1 or 21 or 22, **characterised** by a control means for limiting the total peak power, both positive and negative, of the first motor (20) and the upgrade motor (22) to a value which is equal to or lower than the peak power of the servo motor alone.

24. An upgrade kit according to claim 1 or 21 or 23, **characterised** by being arranged for power supply by one inverter of at least two inverters connected to a single rectifier.

25. An upgrade kit according to claim 1 or 23 or 24, **characterised** by being arranged for power supply by one inverter or least two inverters connected to a single rectifier and a control unit or control system arranged for control of the motor of the flywheel and its existing or new inverter to limit the total peak power, both positive and negative, of the two motors (20, 22) to a value which is equal to or lower than the peak power of the servo motor, using the flywheel as an energy buffer.

26. A mechanical press of the flywheel-driven type arranged with a drive motor upgrade kit (1) for adapting a mechanical press of the flywheel-driven type to a servo press comprising a drive motor (20) and a drive train (34, 27, 29), **characterised** in that said press further comprises:
-a servo motor (22) adapted for driving said mechanical press and
-a drive transmission apparatus (9, 5) connected to the servo motor (22) and adapted for engagement with at least one gear or shaft of said drive train of said mechanical press and
-a structural fixture (4) or baseplate on which the servo motor and the drive transmission apparatus are arranged.

27. A mechanical press according to claim 26, **characterised** in that the motor upgrade kit (1) and is arranged mounted on an external part of said mechanical press.

28. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) is adapted to cooperate with a gear (7) or shaft (34) of said press drive train.

29. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) is mounted on an external part of said mechanical press to cooperate with a gear (7) or shaft (34) of said drive train of said mechanical press arranged inside said mechanical press.

30. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus is arranged to cooperate with an intermediate gear (7) of drive train.

31. A mechanical press according to claim 26, **characterised** in that the servo motor and the drive transmission apparatus are arranged mounted on the common fixture base plate (4) for mounting on an external part of said mechanical press and by that means connecting the upgrade servomotor (22) via the drive transmission

apparatus (9) to a part of the said drive train of said mechanical press.

32. A mechanical press according to claim 26, **characterised** in that the baseplate (4) is arranged beside or above the crown (T) of said mechanical press for attaching the servo motor to the press suitable for engagement, via the drive transmission apparatus (9), with said drive train (34, 27, 29) of said mechanical press.

33. A mechanical press according to claim 26, **characterised** in that the baseplate (4) is arranged for attaching the servo motor on the outside of said mechanical press in a position at a height above the top of a press ram (23) of said mechanical press or on top of the crown (T) of said mechanical press.

34. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) is arranged for engagement with an intermediate gear (7) or shaft of said drive train arranged between the existing press clutch and the existing press eccentric wheels (29) or link mechanism of said mechanical press.

35. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) of the upgrade kit is arranged for engagement with an eccentric wheel or gear (29) of the existing drive train of said mechanical press.

36. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) of the upgrade kit is arranged for engagement with a main gear or shaft (34) comprised in said drive train between the existing press clutch and eccentric wheel(s) of said mechanical press.

37. A mechanical press according to claim 26, **characterised** in that a brake is arranged connected to the upgrade motor (22) for braking it or holding it.

38. A mechanical press according to claim 26 or 37, **characterised** in that a clutch or other coupling/de-coupling means is arranged connected between the upgrade motor (22) and the existing drive train of said mechanical press.

39. A mechanical press according to claim 26, **characterised** in that a clutch and brake may be combined in a unit interspersed between the servo motor and the existing drive train of said mechanical press such that either the clutch or the brake may be activated at any time.

40. A mechanical press according to claim 26, **characterised** in that a brake may be added such that it is interspersed between the servo motor and the existing drive train of said mechanical press which said brake is arranged capable of stopping the press in the event an emergency stop is required. servo?

41. A mechanical press according to claim 26 or 37 or 38, **characterised** in that a clutch and brake may be combined in a unit interspersed between the servo motor and the existing drive train of said mechanical press and arranged with means for mechanically switching out the servo motor so that the press can be run without the servo motor providing power.

42. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus of the upgrade kit (9) comprises one or more gear wheels (5) for engaging with a gear part on an intermediate shaft which is connected to the main (HS) shaft of said drive train of said mechanical press.

43. A mechanical press according to claim 26, **characterised**

by comprising two or more servo motors arranged on the press by means of the press motor upgrade kit (1).

44. A mechanical press according to claim 43, **characterised** in that the two or more servo motors arranged on the press by means of the press motor upgrade kit (1) are each arranged to interact with different intermediate gears, or other gears, of the press.

45. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus of the upgrade kit (9) comprises one or more drive belts or other transmission means.

46. A mechanical press according to claim 26, **characterised** by comprising additional control means for a power supply arranged to provide control functions to the servo motor of the press motor upgrade kit.

47. A mechanical press according to claim 26, **characterised** by being arranged with a power supply means (21c) to provide power to the servo motor (22) of the press motor upgrade kit.

48. A mechanical press according to claim 26, **characterised** in that additional control means are comprised in the upgrade kit to provide control functions to the servo motor (22) of the press motor upgrade kit, which control functions are arranged capable of switching out the servo motor so that the press can be run without the servo motor providing power.

49. A mechanical press according to claim 26, **characterised** by being arranged with one or more sensors to determine the position of the slide.

50. A mechanical press according to claim 26, **characterised** by being arranged for control by a control unit which is any from the group of: a robot controller, a press PLC.

51. A mechanical press according to claim 26, **characterised** by being arranged for control and operation as a hybrid servo press wherein the flywheel is used for pressing.

52. A mechanical press according to claim 26, **characterised** by being arranged for control and operation as a direct servo press wherein the flywheel not used during pressing.

53. A press system comprising at least one mechanical press of the flywheel-driven type arranged with a drive motor upgrade kit (1) for adapting said mechanical press of the flywheel-driven type to a servo press comprising a drive motor (20) and a drive train (34, 27, 29), and further arranged with press loadinf and/or unloading equipment, **characterised** in that said mechanical press further comprises:
-a servo motor (22) adapted for driving said mechanical press and
-a drive transmission apparatus (9, 5) connected to the servo motor (22) and adapted for engagement with at least one gear or shaft of said drive train of said mechanical press and
-a structural fixture (4) or baseplate on which the servo motor and the drive transmission apparatus are arranged, and
-arranged controlled such that motion of said mechanical press may be synchronized to the motion of the loading and/or unloading equipment.

received by the International Bureau on
28 August 2008 (28.08.2008)

CLAIMS

1. A drive motor upgrade kit (1) for adapting a mechanical press of the flywheel-driven type to a servo press, said mechanical press comprising a drive motor (20) and an existing drive train (34, 27, 7, 29), **characterised** by said kit comprising:
-a servo motor (22) adapted for driving said mechanical press and
-a drive transmission apparatus (9, 5) connected to the servo motor (22) and adapted for engagement with at least one gear of said existing drive train of said mechanical press, which engagement requires no modification of said existing drive train and
-a structural fixture (4) or baseplate on which the servo motor and the drive transmission apparatus are arranged.

2. A motor upgrade kit according to claim 1, **characterised** in that the motor upgrade kit (1) and is mounted on an external part of said mechanical press.

3. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus cooperates with a gear of said press drive train.

4. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus is mounted on an external part of said mechanical press to cooperate with a gear of said drive train of said mechanical press arranged inside said mechanical press.

5. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus cooperates with an intermediate gear (7) of drive train.

6. A motor upgrade kit according to claim 1 or any of claims 2-5, **characterised** by a common fixture (base plate) (4) on which the servo motor and the drive transmission apparatus are arranged for mounting the motor on an external part of said mechanical press

and so connecting the servomotor (22) via the drive transmission apparatus (9, 5) to a part of the said drive train of said mechanical press.

7. A motor upgrade kit according to claim 1, **characterised** in that the common fixture or baseplate attaches the servo motor beside or above the crown (T) of said mechanical press for engagement via the drive transmission apparatus (9, 5) with said drive train (34, 27, 29) of said mechanical press.

8. A motor upgrade kit according to claim 7, **characterised** in that the common fixture or baseplate attaches the servo motor on top of the crown (T) of said mechanical press.

9. A motor upgrade kit according to claim 7 or 8, **characterised** in that the common fixture or baseplate attaches the servo motor on the outside of said mechanical press in a position at a height above the top of a press ram (23) of said mechanical press.

10. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus (9) engages with an intermediate gear (7) of said drive train arranged between the existing press clutch and the existing press eccentric wheels (29) or link mechanism of said mechanical press.

11. A motor upgrade kit according to any previous claim, **characterised** in that the drive transmission apparatus (9) of the upgrade kit engages with an eccentric wheel or gear (29) of the existing drive train of said mechanical press.

12. A motor upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus (9) of the upgrade kit engages with a main gear ~~or shaft (34)~~ comprised in said drive train between the existing press clutch and eccentric wheel(s) of said mechanical press.

13. An upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus of the upgrade kit (9) comprises one or more gear wheels (5) for engaging with a gear part on an intermediate shaft which is connected to the main (HS) shaft of said drive train of said mechanical press.

14. An upgrade kit according to claim 1, **characterised** in that a brake is connected to the upgrade motor (22) for braking it or holding it.

15. An upgrade kit according to claim 1 or 14, **characterised** in that a clutch or other coupling/de-coupling means is connected between the upgrade motor (22) and the existing drive train of said mechanical press.

16. An upgrade kit according to claim 1 or 15, **characterised** in that a clutch and brake are combined into a unit interspersed between the servo motor and the existing drive train of said mechanical press.

17. An upgrade kit according to claim 1 or 14 or 16, **characterised** in that a clutch and brake are combined into a unit interspersed between the servo motor and the existing drive train of said mechanical press and arranged with means for mechanically switching out the servo motor so that the press can be run without the servo motor providing power.

18. An upgrade kit according to claim 1, **characterised** in that the drive transmission apparatus of the upgrade kit (9) comprises one or more drive belts or other transmission means.

19. An upgrade kit according to claim 1, **characterised** by comprising a two or more servo motors in the upgrade kit (1).

20. An upgrade kit according to claim 1, **characterised** by comprising control means for a power supply with control functions for the servo motor of the conversion kit.

21. An upgrade kit according to claim 1 or 18, **characterised** by comprising power supply means (21c) to provide power to the servo motor (22) of the conversion kit.

22. An upgrade kit according to claim 1 or 20 or 21, **characterised** in that control means are comprised in the upgrade kit to provide control functions to the servo motor (22) of the conversion kit, for switching out the servo motor so that the press can be run without the servo motor providing power to the press.

23. An upgrade kit according to claim 1 or 21 or 22, **characterised** by a control means for limiting the total peak power, both positive and negative, of the first motor (20) and the upgrade motor (22) to a value which is equal to or lower than the peak power of the servo motor alone.

24. An upgrade kit according to claim 1 or 21 or 23, **characterised** by being arranged for power supply by one inverter of at least two inverters connected to a single rectifier.

25. An upgrade kit according to claim 1 or 23 or 24, **characterised** by being arranged for power supply by one inverter or least two inverters connected to a single rectifier and a control unit or control system arranged for control of the motor of the flywheel and its existing or new inverter to limit the total peak power, both positive and negative, of the two motors (20, 22) to a value which is equal to or lower than the peak power of the servo motor, using the flywheel as an energy buffer.

26. A mechanical press of the flywheel-driven type arranged with a drive motor upgrade kit (1) for adapting a mechanical press of the flywheel-driven type to a servo press <u>said mechanical press</u>

comprising a drive motor (20) and an existing drive train (34, 27, 7, 29), **characterised** in that said press further comprises:
-a servo motor (22) adapted for driving said mechanical press and
-a drive transmission apparatus (9, 5) connected to the servo motor (22) and adapted for engagement with at least one gear of said existing drive train of said mechanical press, which engagement requires no modification of said existing drive train and
-a structural fixture (4) or baseplate on which the servo motor and the drive transmission apparatus are arranged.

27. A mechanical press according to claim 26, **characterised** in that the motor upgrade kit (1) and is arranged mounted on an external part of said mechanical press.

28. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) is adapted to cooperate with a gear (7) of said press drive train.

29. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) is mounted on an external part of said mechanical press to cooperate with a gear (7) of said drive train of said mechanical press arranged inside said mechanical press.

30. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus is arranged to cooperate with an intermediate gear (7) of drive train.

31. A mechanical press according to claim 26, **characterised** in that the servo motor and the drive transmission apparatus are arranged mounted on the common fixture base plate (4) for mounting on an external part of said mechanical press and by that means connecting the upgrade servomotor (22) via the drive transmission apparatus (9) to a part of the said drive train of said mechanical press.

32. A mechanical press according to claim 26, **characterised** in that the baseplate (4) is arranged beside or above the crown (T) of said mechanical press for attaching the servo motor to the press suitable for engagement, via the drive transmission apparatus (9), with said drive train (34, 27, 29) of said mechanical press.

33. A mechanical press according to claim 26, **characterised** in that the baseplate (4) is arranged for attaching the servo motor on the outside of said mechanical press in a position at a height above the top of a press ram (23) of said mechanical press or on top of the crown (T) of said mechanical press.

34. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) is arranged for engagement with an intermediate gear (7) of said drive train arranged between the existing press clutch and the existing press eccentric wheels (29) or link mechanism of said mechanical press.

35. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) of the upgrade kit is arranged for engagement with an eccentric wheel or gear (29) of the existing drive train of said mechanical press.

36. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus (9) of the upgrade kit is arranged for engagement with a main gear comprised in said drive train between the existing press clutch and eccentric wheel(s) of said mechanical press.

37. A mechanical press according to claim 26, **characterised** in that a brake is arranged connected to the upgrade motor (22) for braking it or holding it.

38. A mechanical press according to claim 26 or 37, **characterised** in that a clutch or other coupling/de-coupling means is arranged

connected between the upgrade motor (22) and the existing drive train of said mechanical press.

39. A mechanical press according to claim 26, **characterised** in that a clutch and brake are combined in a unit interspersed between the servo motor and the existing drive train of said mechanical press such that either the clutch or the brake may be activated at any time.

40. A mechanical press according to claim 26, **characterised** in that a brake is added such that it is interspersed between the servo motor and the existing drive train of said mechanical press which said brake is arranged capable of stopping the press in the event an emergency stop is required.

41. A mechanical press according to claim 26 or 37 or 38, **characterised** in that a clutch and brake are combined in a unit interspersed between the servo motor and the existing drive train of said mechanical press and arranged with means for mechanically switching out the servo motor so that the press can be run without the servo motor providing power.

42. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus of the upgrade kit (9) comprises one or more gear wheels (5) for engaging with a gear part on an intermediate shaft which is connected to the main (HS) shaft of said drive train of said mechanical press.

43. A mechanical press according to claim 26, **characterised** by comprising two or more servo motors arranged on the press by means of the press motor upgrade kit (1).

44. A mechanical press according to claim 43, **characterised** in that the two or more servo motors arranged on the press by means of the press motor upgrade kit (1) are each arranged to

interact with different intermediate gears, or other gears, of the press.

45. A mechanical press according to claim 26, **characterised** in that the drive transmission apparatus of the upgrade kit (9) comprises one or more drive belts or other transmission means.

46. A mechanical press according to claim 26, **characterised** by comprising control means for a power supply with control functions for the servo motor of the press motor upgrade kit.

47. A mechanical press according to claim 26, **characterised** by being arranged with a power supply means (21c) to provide power to the servo motor (22) of the press motor upgrade kit.

48. A mechanical press according to claim 26, **characterised** in that control means are comprised in the upgrade kit to provide control functions to the servo motor (22) of the press motor upgrade kit, for switching out the servo motor so that the press can be run without the servo motor providing power.

49. A mechanical press according to claim 26, **characterised** by being arranged with one or more sensors to determine the position of the slide.

50. A mechanical press according to claim 26, **characterised** by being arranged for control by a control unit which is any from the group of: a robot controller, a press PLC.

51. A mechanical press according to claim 26, **characterised** by being arranged for control and operation as a hybrid servo press wherein the flywheel is used for pressing.

52. A mechanical press according to claim 26, **characterised** by being arranged for control and operation as a direct servo press wherein the flywheel not used during pressing.

53. A method for adapting a mechanical press of the flywheel-driven type to a servo press, said mechanical press comprising a drive motor (20) and an existing drive train (34, 27, 7, 29), **characterised** in that said kit comprises a servo motor (20), a drive transmission apparatus (9,5) and a structural fixture (4) or baseplate on which the servo motor and the drive transmission apparatus are arranged and by:
mounting the servo motor (22) adapted for driving said mechanical press and the drive transmission apparatus (9, 5) connected to the servo motor (22) on said mechanical press and adapting the drive transmission apparatus for engagement with at least one gear of said existing drive train of said mechanical press.

54. A method according to claim 53, **characterised** by arranging the drive transmission apparatus to cooperate with an intermediate gear (7) of said existing drive train.

55. A method according to claim 53, **characterised** by mounting the servo motor (22) adapted for driving said mechanical press and the drive transmission apparatus (9, 5) connected to the servo motor (22) on an external part (T) of said mechanical press.

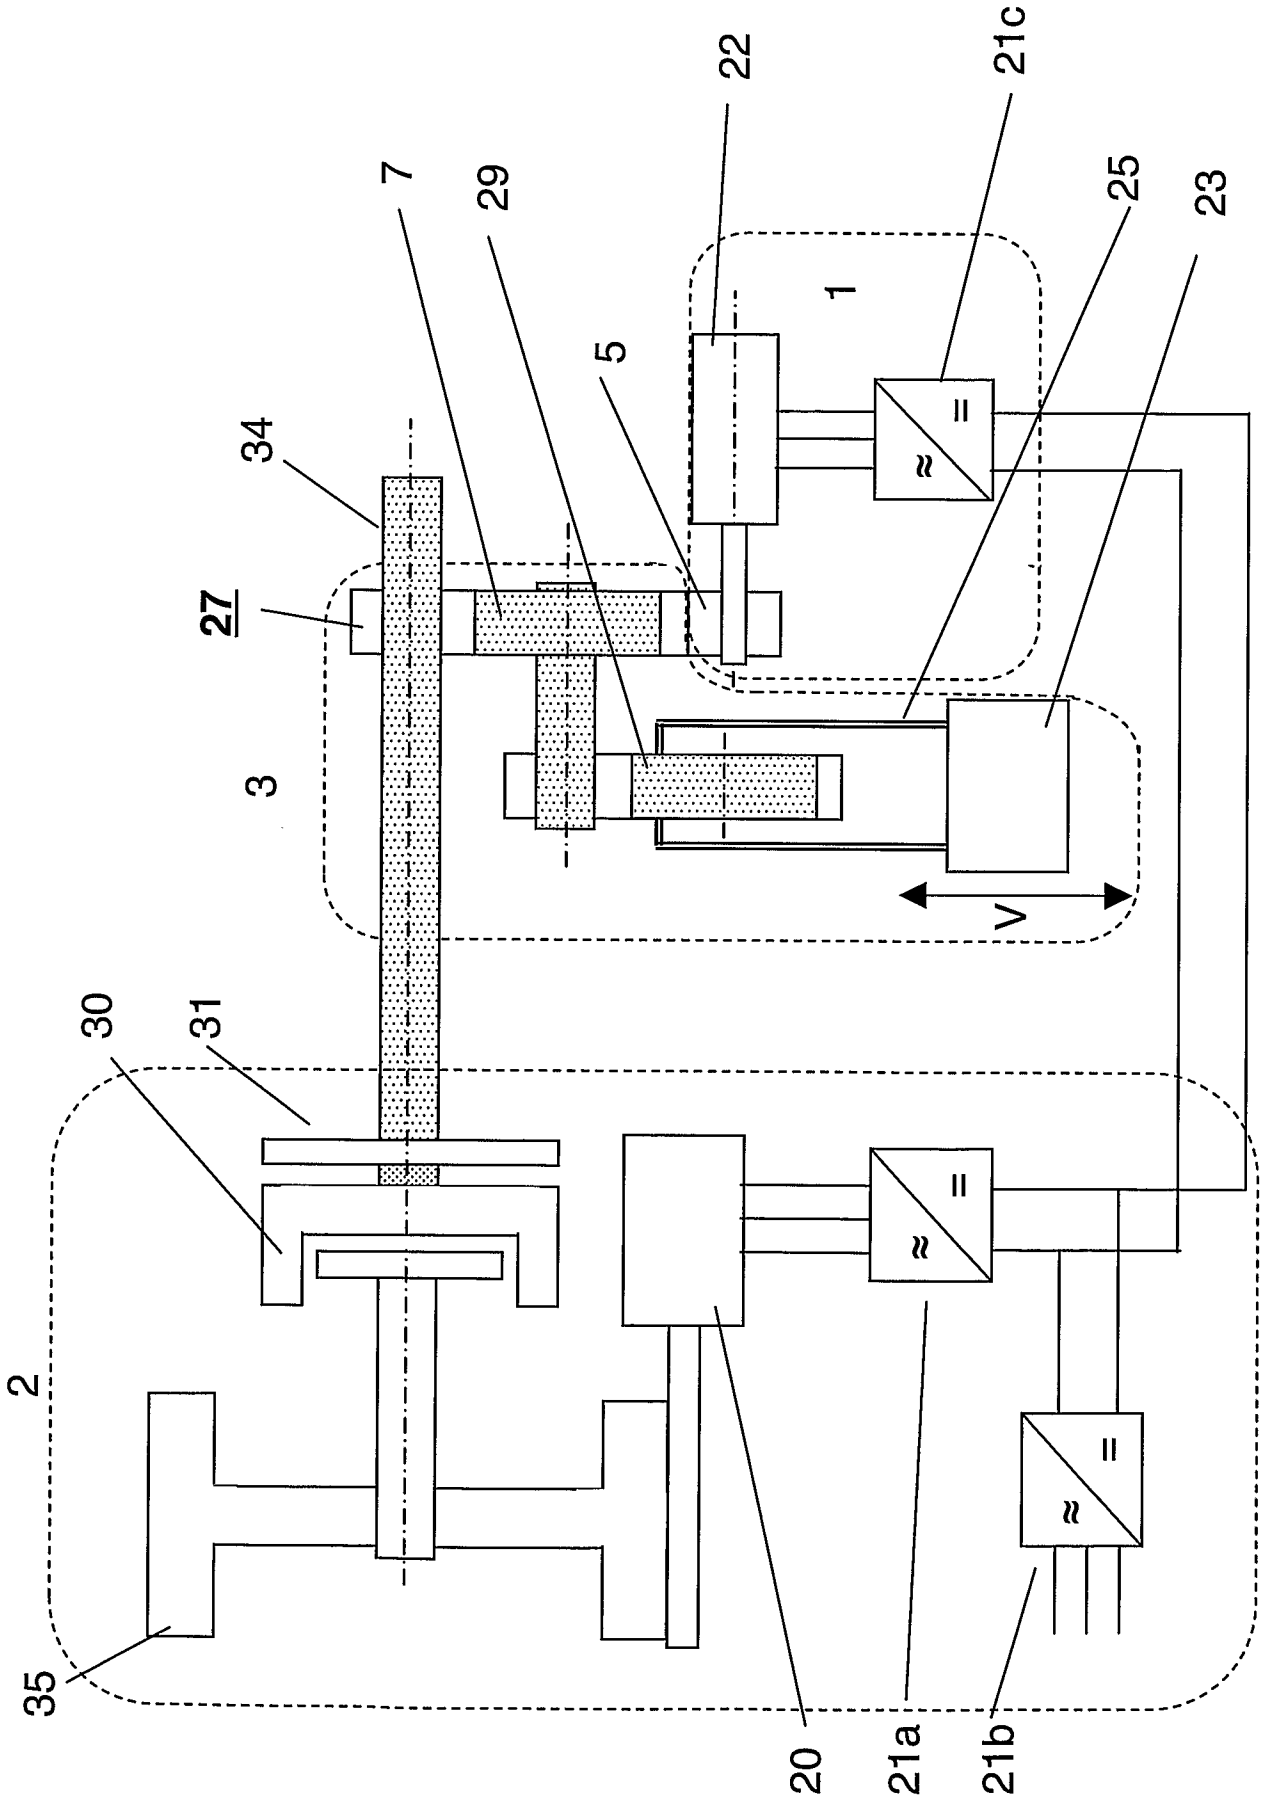

Figure 1

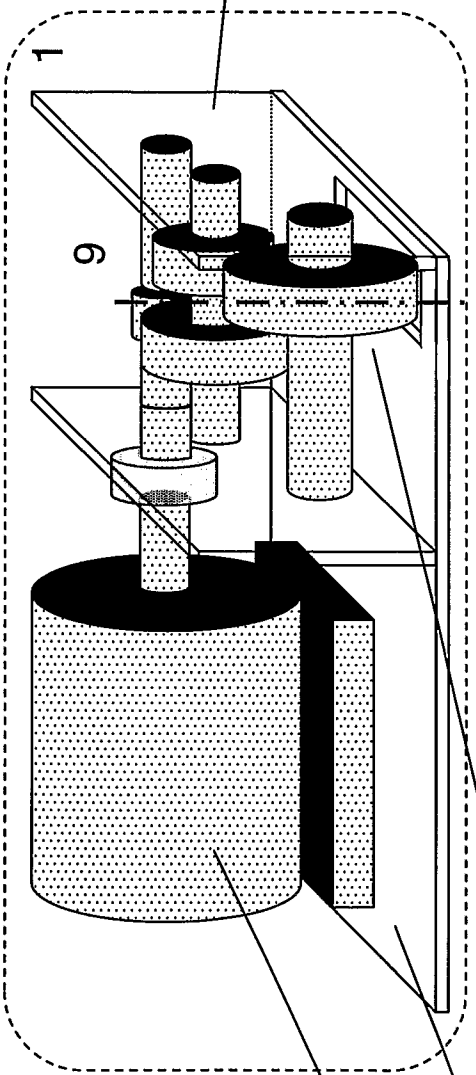

Fig 2a

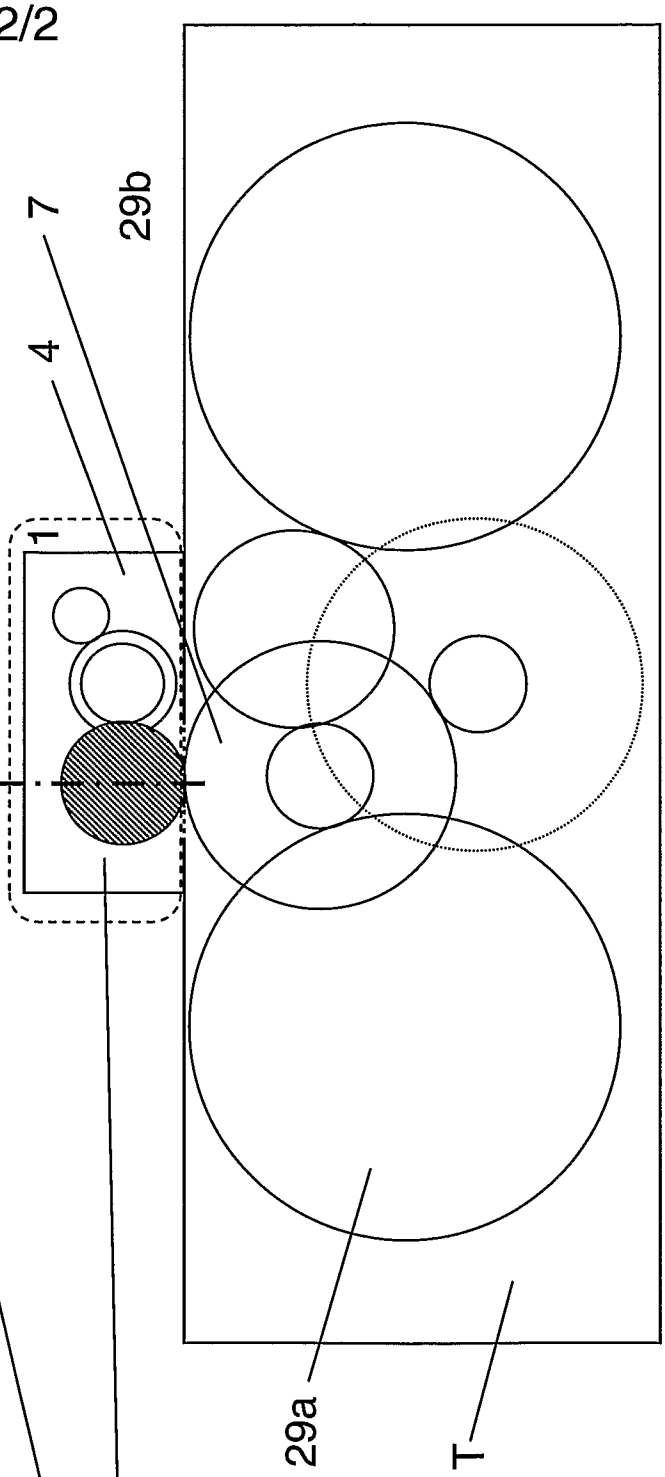

Fig 2b

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2007/001525

A. CLASSIFICATION OF SUBJECT MATTER
INV. B30B1/26 B30B15/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B30B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/003729 A1 (AOSHIMA KIYOJI [JP]) 8 January 2004 (2004-01-08) cited in the application paragraph [0037] - paragraph [0040]; claims; figures paragraph [0043] - paragraph [0056] -----	1,20-26, 46-48
X	US 2005/145117 A1 (DU RUXU [CN] ET AL) 7 July 2005 (2005-07-07) paragraph [0026] - paragraph [0031]; claims 1-13; figure 2 -----	1-19, 26-45, 49-52
X	EP 0 941 832 A (SCHULER PRESSEN GMBH & CO [DE]) 15 September 1999 (1999-09-15) paragraph [0021]; claims; figure 1 paragraph [0030] -----	1-19, 26-45, 49-52
	-/--	

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
24 July 2008	06/08/2008

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Baradat, Jean-Luc

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2007/001525

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 468 194 A (HAYASHI KEIICHIRO [JP]) 21 November 1995 (1995-11-21) claims; figures	1-19, 26-45, 49-52
X	JP 11 058091 A (AIDA ENG LTD) 2 March 1999 (1999-03-02) abstract; figures	1,26
A	DE 44 21 527 A1 (LANGENSTEIN & SCHEMANN GMBH [DE]) 21 December 1995 (1995-12-21) column 4, line 45 - line 60; claims; figures	20-25, 46-48
A	EP 1 628 389 A (FANUC LTD [JP]) 22 February 2006 (2006-02-22) claims; figures	20-25, 46-48
A	US 2002/017205 A1 (METZGER KURT [DE] ET AL) 14 February 2002 (2002-02-14) paragraph [0014] - paragraph [0022]; claims; figure	20-25, 46-48
A	US 5 669 294 A (KLEMM PETER [DE] ET AL) 23 September 1997 (1997-09-23) claims; figure	20-25, 46-48

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2007/001525

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers allsearchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. ☒ As only some of the required additional search fees were timely paid by the applicant, this international search reportcovers only those claims for which fees were paid, specifically claims Nos.:

1-52

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-19 26-45 49-52

a drive motor upgrade kit and a mechanical press

---

2. claims: 20-25 46-48

additional control for power supply

---

3. claim: 53

press system with loading/unloading equipment

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/IB2007/001525

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004003729 A1	08-01-2004	DE 10325826 A1	22-01-2004
		JP 2004034111 A	05-02-2004
		KR 20040004136 A	13-01-2004
US 2005145117 A1	07-07-2005	NONE	
EP 0941832 A	15-09-1999	DE 19810406 A1	16-09-1999
US 5468194 A	21-11-1995	NONE	
JP 11058091 A	02-03-1999	NONE	
DE 4421527 A1	21-12-1995	NONE	
EP 1628389 A	22-02-2006	CN 1738176 A	22-02-2006
		JP 2006060935 A	02-03-2006
		US 2006038524 A1	23-02-2006
US 2002017205 A1	14-02-2002	BR 0111419 A	10-06-2003
		CA 2407479 A1	13-12-2001
		CN 1443110 A	17-09-2003
		CZ 20023977 A3	16-04-2003
		DE 10028148 A1	20-12-2001
		WO 0194106 A1	13-12-2001
		EP 1292442 A1	19-03-2003
US 5669294 A	23-09-1997	CZ 9602124 A3	12-02-1997
		DE 19526491 A1	23-01-1997
		EP 0754541 A2	22-01-1997