


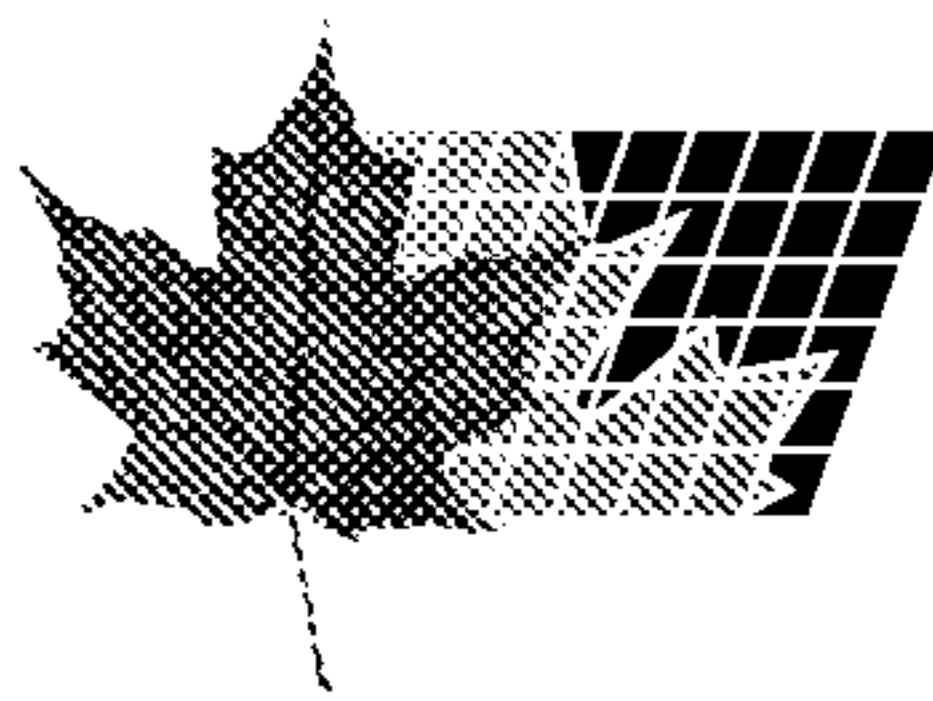

(72) JAREMA, Chester P., US

(71) HENKEL CORPORATION, US

(51) Int.Cl.⁶ C23G 5/032, C11D 17/04, A47L 25/00

(30) 1998/03/11 (60/077,787) US

(54) **COMPOSITIONS DE SOLVANT CONVENABLES A
L'ESSUYAGE DE LA SURFACE DES AUTOS AVEC UN
TORCHON**

(54) **SOLVENT MIXTURES SUITED FOR USE WITH WIPING
CLOTH ON AUTO BODIES**

(57) A solvent mixture comprising an alcohol, an aromatic hydrocarbon or an organic compound containing carboxyl but not hydroxyl moieties, and optionally and preferably a non-aromatic hydrocarbon or halohydrocarbon is particularly effective in removing incompletely cured residues of a variety of sealing compounds from the surfaces of automobile bodies, without damaging intermediate or final finish coatings for the automobile bodies. The solvent mixture may advantageously be absorbed in a wiping cloth for convenient use.

ABSTRACT OF THE DISCLOSURE

A solvent mixture comprising an alcohol, an aromatic hydrocarbon or an organic compound containing carboxyl but not hydroxyl moieties, and optionally and preferably a non-aromatic hydrocarbon or halohydrocarbon is particularly effective in removing in-
5 completely cured residues of a variety of sealing compounds from the surfaces of automobile bodies, without damaging intermediate or final finish coatings for the automobile bodies. The solvent mixture may advantageously be absorbed in a wiping cloth for convenient use.

Title

SOLVENT MIXTURES SUITED FOR USE WITH WIPING CLOTH ON AUTO BODIES

Field of the Invention

5 This invention relates to a mixed solvent that is especially suitable for use together with a wiping cloth to remove sealing compositions (alternatively called "sealers"), especially poly{vinyl chloride}, rubber, epoxy resin, and/or acrylic based sealers that are used in "body shop" and "paint shop" areas of automobile manufacturing plants, from the surfaces of automobile bodies at various stages of the manufacture of
10 the auto bodies.

Background of the Invention

 Sealing compositions are initially readily deformable solids, which alternatively could be called highly viscous liquids, that can easily be inserted into joints and the like. Sealing compositions are used during the manufacture of auto bodies before any general
15 chemical treatment of the overall metal of which auto bodies are primarily constructed and often also at later stages, e.g., after one or more stages of painting. The method of use of the sealers is sufficiently imprecise that almost inevitably some of the sealer will be accidentally applied to some part of the automobile where it is not desired, along with the places where it should go. Also, these sealing compositions eventually are converted
20 to no longer readily deformable solids during the course of manufacture of a complete automobile by the action of heat and/or lapse of time. In the course of this manufacture, residues from these sealing compositions, with varying degrees of deformability, can exude from the locations where they are desired to remain in the final product onto the parts of the auto body surfaces that need a decorative finish in the final automobile.

25 In order to prevent surface blemishes that might result from areas of sealer on the part of the surface of an automobile that is to be given a decorative finish, it is customary to wipe the auto body at several stages during the process of its complete manufacture with cloth or some similar soft, conformable, and retentively porous material that contains as absorbate a suitable solvent or solvent mixture to assist in transferring
30 any portions of sealing composition(s) that could interfere with later decoration of the surface to the solvent containing wiping cloth, which is eventually discarded. The same or a similar type of wiping cloth is also used to remove dust from sanding at various stages of manufacture. Various solvents have been used for such wiping cloths in the past, but none has been entirely satisfactory.

35 One problem with the prior art solvents used for this purpose is that the same

type of wiping cloth with the same solvent content is normally used throughout all stages of manufacture, including a wipe after the application of cationically electrodeposited paint, a step that is usually only one or two steps from the end of the process of completing the most decorative finish on an auto body exterior, and sometimes even a wipe of the very last decorative finish applied ("top coat"). Some solvents very readily dissolve the uncured sealer compositions, which usually include, for example, poly{vinyl chloride} and/or acrylic polymers, filler(s), and sometimes plasticizer(s). Such solvents would be very desirable to have in a wiping cloth used while most of the auto body surface is still bare metal, but such solvents are likely to attack the electrodeposited paint layer and any subsequent paint layer and therefore can not be used at that stage. Other problems with prior art solvents and solvent mixtures used in wiping cloths include: unpleasant odors; an evaporation rate that is too slow, so that solvent remains on the surface wiped more than about 30 seconds after wiping is finished, or too fast, so that most of the solvent is gone from the wiping cloth before the operator has finished the wiping operation; and fire hazard from the use of solvents with low flash points.

Accordingly, one major object of this invention is to provide a solvent mixture particularly useful in wiping cloths for the removal of poly{vinyl chloride} and/or acrylic based sealing compositions that will avoid or minimize at least one, and most preferably all, of the difficulties noted above that exist with prior art products. Other objects, which include provision of a wiping cloth incorporating this superior solvent mixture and processes for the use of the solvent and/or the wiping cloth, will be apparent from and be further explained in the description below.

Except in the claims and the operating examples, or where otherwise expressly indicated, all numerical quantities in this description indicating amounts of material or conditions of reaction and/or use are to be understood as modified by the word "about" in describing the broadest scope of the invention. Practice within the numerical limits stated is generally preferred, however. Also, throughout the description, unless expressly stated to the contrary: percent, "parts of", and ratio values are by weight or mass; the term "polymer" includes "oligomer", "copolymer", "terpolymer" and the like; the description of a group or class of materials as suitable or preferred for a given purpose in connection with the invention implies that mixtures of any two or more of the members of the group or class are equally suitable or preferred; description of constituents in chemical terms refers to the constituents at the time of addition to any combination specified in the description or of generation *in situ* within the composition by chemical reaction(s) noted

in the specification between one or more newly added constituents and one or more constituents already present in the composition when the other constituents are added, and does not preclude unspecified chemical interactions among the constituents of a mixture once mixed; specification of constituents in ionic form additionally implies the presence of sufficient counterions to produce electrical neutrality for the composition as a whole and for any substance added to the composition; any counterions thus implicitly specified preferably are selected from among other constituents explicitly specified in ionic form, to the extent possible; otherwise such counterions may be freely selected, except for avoiding counterions that act adversely to an object of the invention; the word "mole" means "gram mole", and the word itself and all of its grammatical variations may be used for any chemical species defined by all of the types and numbers of atoms present in it, irrespective of whether the species is ionic, neutral, unstable, hypothetical, or in fact a stable neutral substance with well defined molecules; and the terms "solution", "soluble", "homogeneous", and the like are to be understood as including not only true equilibrium solutions or homogeneity but also dispersions that show no visually detectable tendency toward phase separation over a period of observation of at least 100, or preferably at least 1000, hours during which the material is mechanically undisturbed and the temperature of the material is maintained within the range of 18 - 25 °C.

Brief Summary of the Invention

It has been found that a very advantageous solvent combination comprises, preferably consists essentially of, or more preferably consists of, the following components:

- (A) a component selected from the group of alcohols; and
- (B) a component selected from the group of organic compounds that contain a carbonyl moiety or an aromatic ring moiety or both but do not contain any hydroxy moiety; and, optionally and preferably,
- (C) a component selected from the group of organic compounds that contain no atoms other than carbon, hydrogen, and halogen atoms and do not contain any aromatic ring; and, optionally, one or both of:
- (D) water; and
- (E) a viscosity control agent.

More particularly, a liquid solvent mixture composition of matter that is suitable for use as an absorbate in a wiping cloth for removing automotive sealer compounds from undesired locations on automobile bodies, said composition comprising the following components:

- (A) a component selected from the group of alcohols; and
- (B) a component selected from the group of organic compounds that contain at least one of a carbonyl moiety and an aromatic ring but do not contain any hydroxy moiety.

5 Detailed Description of the Invention

Each of the components (A), (B), and (C) independently and the solvent mixture according to the invention as a whole preferably are liquids at 25°C, or more preferably are liquids at 18 °C. Also, independently, a solvent mixture according to the invention preferably has a flash point, measured by a standard closed cup method, that is at least,
 10 with increasing preference in the order given, -4.5, -4.0, -3.5, -3.0, -2.5, -2.0, -1.5, -1.0, -0.5, 0.0, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, or 7.0 °C.

Component (A) is preferably selected from alcohol molecules that contain a single -OH moiety in each molecule and independently preferably also, except for their -OH moiety or moieties, contain no atoms other than carbon, hydrogen, and ether
 15 oxygen, more preferably no atoms other than carbon and hydrogen. Also independently, the molecules selected for component (A) preferably contain not more than, with increasing preference in the order given, 6, 5, 4, 3, or 2 carbon atoms per molecule. The single most preferred molecule for component (A) is ethanol. Independently of its exact chemical nature, the amount of component (A) in a solvent mixture according to the
 20 invention preferably is at least, with increasing preference in the order given, 10, 20, 30, 40, 45, 50, 55, 60, 65, or 69 % and independently preferably is not more than, with increasing preference in the order given, 95, 90, 85, 80, 77, or 75 % of the total solvent mixture.

If a solvent mixture according to the invention is to be used under conditions in
 25 which static electric sparks and other sources of ignition can be adequately guarded against, component (B) may be satisfactorily and economically selected from aromatic hydrocarbons, optionally containing halogen or ether substituents. Benzene should normally be avoided because of its carcinogenicity, but toluene and the xylenes are highly suitable, with toluene most preferred.

30 In order to diminish the fire hazard, however, component (B) normally is preferably selected from molecules that, independently for each property stated: contain a single carbonyl group each; are ketones or esters; contain not more than, with increasing preference in the order given, 10, 8, 7, or 6 carbon atoms each and if they do not contain a tertiary carbon atom more preferably contain not more than 5 carbon atoms

each; primarily for reasons of economy, contain no atoms other than carbon, oxygen, and hydrogen; and, primarily for reasons of economy, contain not more than, with increasing preference in the order given, 6, 4, 3, or 2 oxygen atoms each.

The presence of a tertiary carbon atom in each molecule of component (B) is advantageous under many circumstances because of lower pollution potential. Tertiary butyl esters and ketones, for example, can be exempt from legal regulation as "Volatile Organic Compounds" (often abbreviated as "VOC"). This is a substantial advantage in many operations, where emissions of VOC are legally limited and inadequate or no facilities for abating such emissions are in place. In such circumstances, *ter*-butyl acetate is the most preferred single ingredient for component (B). Except for pollution potential, however, *n*-propyl acetate is almost as satisfactory. Mixtures of these two esters can also be more effective than either of them alone in removing a variety of sealing compositions without unduly damaging any of the desired protective finishing layers that may underly the sealing compositions so that it is practically impossible to remove the sealing compositions without effecting contact between the solvent according to the invention and the protective finishing layer.

The corresponding methyl *n*-propyl ketone and methyl *t*-butyl ketone are at least as satisfactory as the corresponding esters as constituents of component (B) insofar as the cleaning power of mixtures according to the invention that contain them are concerned. However, the mixtures containing the ketones have lower flash points than the mixtures otherwise the same except for substituting esters for the ketones, and technical grade ketones normally contain more impurities subject to stringent pollution abatement requirements than do technical grade esters. The esters are therefore preferred for these reasons under most circumstances.

Independently of their exact chemical nature, components (A) and (B) are preferably present in a solvent mixture according to the invention in amounts such that the amount of component (B) has a ratio to the amount of component (A) that is at least, with increasing preference in the order given, 0.05:1.0, 0.10:1.0, 0.15:1.0, 0.20:1.0, 0.25:1.0, 0.30:1.0, or 0.33:1.0 and independently preferably is not more than 2.5:1.0, 2.0:1.0, 1.5:1.0, or 1.0:1.0 and, if component (B) consists predominantly of carbonyl group containing molecules rather than aromatic compounds, still more preferably is not more than, with increasing preference in the order given, 0.8:1.0, 0.60:1.0, 0.55:1.0, 0.50:1.0, 0.47:1.0, 0.44:1.0, 0.41:1.0, 0.38:1.0, or 0.36:1.0.

Component (C) is optional but is normally preferred because its presence is nor-

mally associated with a more agreeable odor for the mixture as a whole. Component (C) preferably is selected from molecules that, independently for each property stated: primarily for reasons of economy, contain no atoms other than carbon and hydrogen; contain at least one, or more preferably at least two, carbon-carbon double bonds per molecule; and in sufficient number for measurement of boiling point constitute a compound that has a boiling point at normal atmospheric pressure that is at least, with increasing preference in the order given, 100, 120, 130, 140, 145, 150, 155, 160, 165, 170, or 175 °C. This is not to be construed to mean that all of the molecules in component (C) must necessarily constitute the same compound, but merely that each type of molecule present, if present in sufficient number for measurement of a boiling point, would constitute a compound with the minimum boiling point specified. Also, independently of these other preferences, component (C) preferably is present in a solvent mixture according to the invention in an amount that has a ratio to the amount of component (A) in the same mixture that is at least, with increasing preference in the order given, 0.003:1.0, 0.005:1.0, 0.007:1.0, 0.009:1.0, 0.011:1.0, or 0.013:1.0 and independently preferably is not more than, with increasing preference in the order given, 0.30:1.0, 0.25:1.0, 0.20:1.0, 0.17:1.0, 0.14:1.0, 0.12:1.0, 0.10:1.0, 0.090:1.0, 0.085:1.0, 0.080:1.0, or 0.075:1.0.

Optional component (D) of water is useful primarily to reduce cost and increase flash point, but it diminishes effective cleaning of most types of sealants. Therefore, this component normally preferably constitutes not more than, with increasing preference in the order given, 25, 20, 15, 10, or 5 % of the total solvent composition.

Optional component (E) of viscosity control agent may be used to give high viscosity at low shear rates in order to provide a non-dripping solvent mixture. Any of several types of "thickening agents" known in the art, such as natural and synthetic gums and latexes that increase substantially in viscosity upon pH change, may be used. Generally, however, any such thickening agent diminishes the effectiveness of a solvent mixture in removing most types of sealants and other soil from the surfaces to be cleaned with the solvent mixture, so that quantities of viscosity control agents should be limited to the minimum necessary to achieve the desired effect on viscosity.

Components (A) through (D) are not believed to undergo any chemical reaction among themselves and may be mixed in any order. If a viscosity control agent is used, it may be more sensitive to mixing order and preferably is treated as otherwise known in the art for the particular viscosity control agent used. For example, a thickening latex

should normally be mixed with all other constituents of a solvent mixture before the pH varying agent that causes its viscosity increase is added.

Solvent mixtures may be used according to the invention in conjunction with any type of woven or non-woven cloth or similar material that is not degraded by the solvent mixture itself, in a manner generally known in the art and illustrated, e.g., in U. S. Patent 5,595,786 of Jan. 21, 1997 to McBride, Jr., et al. A non-woven cloth web containing both rayon and textile polyester fibers is particularly preferred.

This invention may be further appreciated from the following working examples, and its advantages may be appreciated from comparison with the other mixtures and one simple solvent described below.

Solvent mixtures, some of which are according to the invention, are described in Table 1 below. The mixtures in Table 1 were tested for various physical and chemical properties related to their intended use in wiping cloths for removing poly{vinyl chloride} and acrylic based sealing compositions from auto bodies. These results are shown in Table 2 below.

Table 1

Mix. No.	Percent by Weight in Mixture of:													
	Act.	MPGI	nPAc	d-Lim.	iPA	EA	H ₂ O	nPA	tBAc	CP	DOA	Tol.	MiBK	MPK
1		100												
2	15	80					5.0							
3	20	80												
4	20			80										
5	20			75			5.0							
6	10				80		10							
7	20							80						
8	20						5.0	75						
9	20			5.0				75						
10	10			5.0				75				10		
11			25	1.0		74								
12			25	5.0		70								
13				5.0	75								20	
14				5.0				45				50		
15				5.0	45							50		
16				5.0	40							55		
17				5.0	30							65		
18				5.0		70								25
19			14	1.0		60			25					
20			12.5	1.0		70			12.5					
21			25	1.0		66	7.8			0.5	1.0			
22	5.0		9.0	1.0		60			25					
23			21.2	0.8		63	15							

Abbreviations and Other Notes for Table 1

“Mix. No.” means “Mixture Number”; “Act.” means “Acetone”; “MPGI” means “Propylene Glycol, Monomethyl Ether”; “nPAc” means “normal propyl alcohol”; “d-Lim.” means “d-Limonene”; “iPA” means “*Iso*-Propyl Alcohol”; “EA” means “Ethyl Alcohol” (specifically technical anhydrous denatured ethyl alcohol, containing 95 % ethanol and 5 % *iso*-propyl alcohol); “nPA” means “*n*-Propyl Alcohol”; “tBAc” means “*ter*-butyl acetate”; “CP” means “CARBOPOL” ETD-2690 polymeric thickening agent, a product commercially supplied by B. F. Goodrich, Specialty Polymers Division; “DOA” means “di-(2-ethylhexyl)amine”; “Tol” means “Toluene”; “MiBK” means “Methyl *iso*-Butyl Ketone”; and “MPK” means “Methyl *n*-Propyl Ketone”.

A blank cell indicates no addition of the material that would correspond to that cell.

Table 2

Mixture Number	Characteristic of Mixture with Respect to:				
	Removal of Sealing Composition:			Evaporation Rate of the Mixture	Other Properties
	60 B-4 (Yellow)	ESB-M4G252E (White)	LG-337-A (Gray Epoxy)		
1	80 - 90 %				
2	5 - 10 %				
3	100 %				
4	100 %				
5					Two liquid phases
6	0				
7	good	good		good	
8	poor	good		good	
9	good	good		good	
10	85 - 90 %	good			
11	good	good		good	Flash point 7.2 °C
12	good	good		good	Flash point 8.9 °C
13	good	good			Odor disagreeable
14	good	good			Left bubbles when wiped on painted panel
15	good			good	
16	good			good	
17	good	good		good	Flash point -4.4 °C
18	good	good		good	Flash point 7.2 °C
19	excellent		excellent	good	
20	good		fair	good	
21					Flash point 1.1 °C
22				good	
23	good		fair	good	

Note for Table 2

A blank cell indicates that the property at the column heading for the cell was not evaluated for the mixture number in the leftmost column of the same table row as the cell.

The invention may be varied in any number of ways as would be apparent to a person skilled in the art and all obvious equivalents and the like are meant to fall within the scope of this description and claims. The description is meant to serve as a guide to interpret the claims and not to limit them unnecessarily.

CLAIMS

1. A liquid solvent mixture composition of matter that is suitable for use as an absorbate in a wiping cloth for removing automotive sealer compounds from undesired locations on automobile bodies, said composition comprising the following components:
 - 5 (A) a component selected from the group of alcohols; and
 - (B) a component selected from the group of organic compounds that contain at least one of a carbonyl moiety and an aromatic ring but do not contain any hydroxy moiety.
2. A liquid solvent mixture according to claim 1, wherein:
 - 10 - component (A) constitutes from about 10 to about 90 % of the solvent mixture;
 - component (A) is selected from molecules that, outside their hydroxyl moiety or moieties, contain no atoms other than carbon, hydrogen, and ether oxygen and also contain not more than 6 carbon atoms per molecule;
 - component (B) is present in the mixture in an amount that has a ratio to the amount of component (A) in the same mixture that is from about 0.05:1.0 to about 2.5:1.0;
 - 15 - component (B) is selected from the group consisting of toluene, xylene, esters, and ketones, the molecules of which contain not more than 10 carbon atoms each, not more than one carbonyl group each, and not more than 6 oxygen atoms each.
 - 20
3. A liquid solvent mixture according to claim 2, wherein:
 - component (A) constitutes from about 30 to about 85 % of the solvent mixture;
 - component (A) is selected from molecules that, outside their hydroxyl moiety or moieties, contain no atoms other than carbon and hydrogen and also contain not more than 4 carbon atoms per molecule;
 - 25 - component (B) is present in the mixture in an amount that has a ratio to the amount of component (A) in the same mixture that is from about 0.07:1.0 to about 1.0:1.0;
 - component (B) is selected from the group consisting of toluene, xylene, esters, and ketones, the molecules of which contain not more than 7 carbon atoms each, not more than one carbonyl group each, and not more than 3 oxygen atoms each.
 - 30
4. A liquid solvent mixture according to claim 3, wherein:

- component (A) constitutes from about 45 to about 80 % of the solvent mixture;-
component (A) is selected from molecules that, outside their hydroxyl moiety or
moieties, contain no atoms other than carbon and hydrogen and also contain not
more than 3 carbon atoms per molecule;
- 5 - component (B) is present in the mixture in an amount that has a ratio to the
amount of component (A) in the same mixture that is from about 0.07:1.0 to
about 0.55:1.0;
- component (B) is selected from the group consisting of esters and ketones, the
molecules of which contain not more than 6 carbon atoms each, not more than
10 one carbonyl group each, and not more than 2 oxygen atoms each.
- 5. A liquid solvent mixture according to claim 4, comprising:
 - from about 69 to about 75 % of ethanol; and
 - an amount of *n*-propyl acetate, *t*-butyl acetate, or a mixture of *n*-propyl acetate
and *t*-butyl acetate that has a ratio to the amount of ethanol that is in the range
15 from about 0.30:1.0 to about 0.38:1.0.
- 6. A liquid solvent mixture according to claim 5, additionally comprising a
component (C) selected from the group consisting of molecules that:
 - contain no atoms other than carbon and hydrogen;
 - contain no aromatic ring;
 - 20 - contain at least two carbon-carbon double bonds; and
 - in sufficient number, constitute a compound that has a boiling point at normal
atmospheric pressure that is at least 175 °C,
 said component (C) being present in the mixture in an amount that has a ratio to the
amount of component (A) present in the same mixture that is from about 0.013:1.0 to
25 about 0.075:1.0.
- 7. A liquid solvent mixture according to claim 4, additionally comprising a
component (C) selected from the group consisting of molecules that:
 - contain no atoms other than carbon and hydrogen;
 - contain no aromatic ring;
 - 30 - contain at least one carbon-carbon double bond; and
 - in sufficient number, constitute a compound that has a boiling point at normal
atmospheric pressure that is at least 165 °C,
 said component (C) being present in the mixture in an amount that has a ratio to the

amount of component (A) present in the same mixture that is from about 0.011:1.0 to about 0.090:1.0.

8. A liquid solvent mixture according to claim 3, additionally comprising a component (C) selected from the group consisting of molecules that:

- 5 - contain no atoms other than carbon, hydrogen, and halogen atoms;
- contain no aromatic ring; and
- in sufficient number, constitute a compound that has a boiling point at normal atmospheric pressure that is at least 140 °C,

said component (C) being present in the mixture in an amount that has a ratio to the
10 amount of component (A) present in the same mixture that is from about 0.009:1.0 to about 0.12:1.0.

9. A liquid solvent mixture according to claim 2, additionally comprising a component (C) selected from the group consisting of molecules that:

- contain no atoms other than carbon, hydrogen, and halogen atoms;
- 15 - contain no aromatic ring; and
- in sufficient number, constitute a compound that has a boiling point at normal atmospheric pressure that is at least 120 °C,

said component (C) being present in the mixture in an amount that has a ratio to the
amount of component (A) present in the same mixture that is from about 0.005:1.0 to
20 about 0.17:1.0.

10. A liquid solvent mixture according to claim 1, additionally comprising a component (C) selected from the group consisting of molecules that:

- contain no atoms other than carbon, hydrogen, and halogen atoms;
- contain no aromatic ring; and
- 25 - in sufficient number, constitute a compound that has a boiling point at normal atmospheric pressure that is at least 100 °C,

said component (C) being present in the mixture in an amount that has a ratio to the
amount of component (A) present in the same mixture that is from about 0.003:1.0 to
about 0.25:1.0.

30 11. A wiping cloth containing a solvent mixture according to any one of claims 1 through 10 absorbed therein.

12. A solid walled container that contains therein at least one wiping cloth according to claim 11 and optionally also contains a reservoir of the solvent mixture absorbed in

the wiping cloth.

13. A process of preparing an automobile body surface for receiving a decorative finish thereon, said process comprising wiping the automobile body surface with a wiping cloth according to claim 11 in order to transfer a residue of sealing composition from the
- 5 automobile body surface to the wiping cloth.