

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2016/030128 A1

(43) International Publication Date

3 March 2016 (03.03.2016)

WIPO | PCT

(51) International Patent Classification:

F21V 31/00 (2006.01) *F21V 29/70* (2015.01)
F21V 15/01 (2006.01) *F21Y 101/02* (2006.01)
F21V 23/00 (2015.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/EP2015/067586

(22) International Filing Date:

30 July 2015 (30.07.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14182895.4 29 August 2014 (29.08.2014) EP

(71) Applicant: **PHILIPS LIGHTING HOLDING B.V.** [NL/NL]; High Tech Campus 45, 5656 AE Eindhoven (NL).

(72) Inventors: **VAN DELDEN, Martinus, Hermanus, Wilhelmus, Maria**; c/o High Tech Campus 5, NL-5656AE Eindhoven (NL). **DEN BOER, Reinier, Imre, Anton**; c/o High Tech Campus 5, NL-5656 AE Eindhoven (NL).

(74) Agents: **VERWEIJ, P., D.** et al.; Philips Lighting B.V., Philips Lighting Intellectual Property, High Tech Campus 5, 5656 AE Eindhoven (NL).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: LIGHTING MODULE AND HOUSING

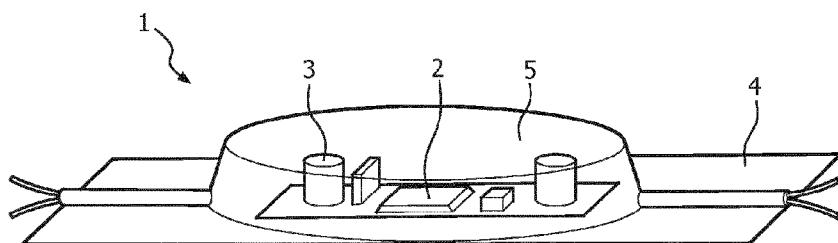


FIG. 1

(57) **Abstract:** A lighting device is provided. The light device (1) comprises a light source (2), a driver (3) for providing an output to said light source (2), and a first housing (4). The first housing (4) comprises a blister pack with at least one compartment suitable for locating said light source (2) and driver (3). A second housing (6) may also be provided and the second housing (6) may advantageously comprise a luminaire.

WO 2016/030128 A1

LIGHTING MODULE AND HOUSING

FIELD OF THE INVENTION

This invention relates to the field of lighting devices, and more specifically to a luminaire.

5 BACKGROUND TO THE INVENTION

Battens are so-called linear light sources. They may comprise of a linear housing with either one, two or three non-replaceable linear light sources on top and/or a side of the housing. Some battens can be connected together using integrated connectors.

EP0870980 entitled “Luminaire for line illumination” describes a luminaire 10 comprising an elongate batten.

SUMMARY OF THE INVENTION

Connected batten luminaires allow the creation of light lines up to approximately 8, 4-foot units using only a single power line socket. Typically the housing of 15 a batten is made from extruded aluminum or plastic. The production processes for extruding aluminum or plastic are a mature technology and have been extensively optimized.

A batten without a housing is known as a light-tube, such as a fluorescent light tube or tubular LED (TLED). To operate, a light tube requires an external means of fixation and a means to deliver power to the light tube. These functions are provided by the power 20 sockets of light tube holders. Furthermore, light tubes cannot be connected together because the through wire option is missing, this function is fulfilled by the housing of the batten.

Thus, there is a need for a housing of reduced size and/or complexity. It would be further advantageous to achieve a housing that is easy to manufacture and that is easy to recycle at the end of its life.

25 To better address one or more of these concerns, in a first aspect of the invention, there is provided a lighting device comprising:

- a light source,
- a driver for providing an output to said light source, and
- a first housing,

wherein said first housing comprises a blister pack with at least one compartment suitable for locating said light source and driver.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiment(s) described hereinafter.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Examples of the invention will now be described in detail with reference to the accompanying drawings, in which:

Fig. 1 shows an embodiment of a lighting device,

10 Fig. 2 shows an embodiment of a lighting device with a second housing,

Fig. 3 shows an embodiment of a lighting device with a folded second housing,

Fig. 4 shows an embodiment of a second housing,

Fig. 5 shows an embodiment of a second housing and a heat sink,

15 Fig. 6 shows an embodiment of a lighting device having an optical exit window and an end cap,

Figs. 7A-7E shows an embodiment of a second housing being folded and fitted with an end cap.

20 DETAILED DESCRIPTION OF EMBODIMENTS

Figure 1 shows an embodiment of a lighting device 1. The lighting device comprises a light source 2, a driver 3, for providing an output to said light source, and a first housing 4. The first housing 4 is a blister pack that comprises at least one compartment 5.

25 A blister pack is a term for several types of preformed plastic packaging. The primary component of a blister pack is a cavity or pocket made from a formable web, usually a thermoformed plastic. This may have a backing of paperboard or a lidding seal of aluminum foil or plastic.

30 Blister packs are useful for protecting products against external factors, such as humidity, moisture and contamination for extended periods of time. A common method of production is to use heat and pressure via a die to form the cavity or pocket from a roll or sheet of plastic.

A hinged blister is known as a clamshell, these comprise one sheet folded over on itself and sometimes fused at the edges. They can be securely heat sealed.

In the case of thermoforming, a plastic film or sheet is unwound from a reel and guided through a pre-heating line on the blister production line. The temperature of the pre heating plates (usually an upper and lower plate) is such that the plastic will soften and become pliable. The warm plastic will then arrive at a forming station where a large pressure, 5 usually 4 – 8 bar, will form the blister cavity into a negative mold. The mold is cooled such that plastic cools and becomes rigid enough to maintain its shape when removed from the mold. In cases of difficult blister shapes or larger sizes, the warm film may be physically pushed down partially into the cavity by a plug assist feature. The plug is used to partially depress the warmed film into the mold cavity before the pressure is applied to draw the 10 material to the cavity walls (negative pressure forming) or blow the material to the cavity wall (positive pressure forming). This plug assist increases the uniformity of the wall thickness of the blister pack.

Inserting the light source 2 and driver 3 inside the first housing 4 allows a lighting device 1 to be constructed that is protected from external factors and is suitable for 15 inclusion in a variety of further products. The first housing 4 may have more than one compartment. A heat sink such as a fluid enclosed in a bag may be inserted into a second compartment within the first housing 4. The fluid would be in thermal contact but not electrical contact with the light source 2. This would allow a lighting device 1 to be manufactured that is electrically safe and thermally managed. Obviously if the light source 2 20 does not produce enough of a thermal load to require a heat sink than this is not necessary.

Figure 2 shows an embodiment of a lighting device 1 with a second housing 6. The second housing 6 comprises a laminate. This laminate may be a honeycomb structure laminate, it may be a corrugated structure laminate or it may be another form of laminate. The second housing 6 may be a paper laminate such as a cardboard, also known as fiberboard 25 or it may be a plastic laminate.

Corrugated fiberboard is a paper-based material consisting of a fluted corrugated sheet and one or two flat linerboards. It is manufactured using flute lamination machines or corrugators. The corrugated medium and linerboard are usually made with a wall thickness of over 0.25mm thick. As a further advantage, paper laminates are widely recycled 30 and this may reduce environmental waste.

Corrugated plastic is a wide range of extruded twinwall plastic-sheet products usually produced from high impact polypropylene resin with a similar structure to corrugated cardboard. It is a light-weight and tough material that can be easily cut with a craft knife.

Chemically, the sheet is inert, with a neutral pH factor. At regular temperatures most oils, solvents and water have no effect, allowing it to perform under adverse weather conditions or as a product component exposed to harsh chemicals.

Honeycomb structures are natural or man-made structures that have the

5 geometry of a honeycomb to allow the minimization of the amount of used material to reach minimal weight and minimal material cost. The geometry of honeycomb structures can vary widely but the common feature of all such structures is an array of hollow cells formed between thin vertical walls. The cells are often columnar and hexagonal in shape. A honeycomb shaped structure provides a material with minimal density and relative high out-
10 of-plane compression properties and out-of-plane shear properties. Man-made honeycomb structural materials are commonly made by layering a honeycomb material between two thin layers that provide strength in tension. This forms a plate-like assembly. The second housing 6 may even be embedded into a wall of a building or further may be a sheet like building material containing at least one light source 2, driver 3 and first housing 4.

15 Fig 3 shows an embodiment of a lighting device 1 with a second housing 6 that is folded. The folding is advantageous as it allows a light source 2 and driver 3 to be inserted into a laminate without compromising the laminate's strength.

20 Conventionally, these components are inserted into the hollow housing of the plastic or Al batten. And such hollow housings can be easily capped by blind-caps or daisy-chaining bulk-head caps, routing the through wire connection from one end to the other end of the batten. Thus the key feature that gives the laminated cardboard their strength, the honeycomb, represents a volumetric issue when it comes to providing space to accommodate for example an LED driver 3, through wiring and other components.

25 A solution to creating volume in laminate structures, while preserving the surface appearance from all viewing directions, is to machine or to mill the laminate such that for example a "hollow" cube can be folded. This can be completed by machining a V-groove. Unfortunately, when the board laminate is thin, the strength and rigidness of the ribs is not always sufficient. This holds in particular when the top and bottom planes are removed and even more when building a 4 ft. square-shaped pipe i.e. a paper based batten. In addition, 30 when the pipe is loaded externally, the structure can be deformed easily and worse, under high loads, the thin ribs comprising only of the thin laminate, can crack, fracture or tear apart. Thus the structural integrity of the housing is lost. When the surface laminate layer is (too) thick, it can't be folded/bent.

Sustaining rigidity can be resolved in several ways; by adding additional mechanical supports in the form of inner ribs. By stacking multiple thin laminates having cut sections in between the outer two laminates. By cutting or creating a cavity or half cavity (two symmetric halves) by perpendicular cutting from one surface layer to the other, clad on both sides by thin laminates. Yet another option is to fold a batten by combining both cut cavities, laminated stacks and milled boards. This allows for simple vertical insert assembly, followed by folding or rolling and fixing the folded assembly by pressing in housing enclosing end-caps.

Figure 4 shows an embodiment of a second housing 6. The second housing 6 comprises a first surface 7, a second surface 8 and a honeycomb structure 9. The first surface 7 and second surface 8 may comprise a different material to each other and/or to the honeycomb structure. This is called a hybrid laminate and allows the tailoring of desired properties for the housing. For example, an Aluminum foil may be included in the laminate to provide heat sinking and/or electrical connectivity. A decorative laminate may be constructed having a first surface 7 that is aesthetically pleasing with a paper honeycomb structure 9 and a paper second surface 8.

Figure 5 shows an embodiment of a second housing 6 and a heat sink 10, the heat sink 10 may be a fluid or gel-filled bag that is thermally attached to the light source (not shown). Advantageously this heat sink 10 is included in a further compartment within the first housing.

Figure 6 shows an embodiment of a lighting device 1 having an optical exit window 11 and an end cap 12. The light source 2, driver 3 and first housing 4 can be fitted into a cut out within the second housing 6 or it may be that the second housing 6 is folded and the electronics are situated in the cavity created. An optical exit window 11 may be fitted to manipulate the light emitted and end caps 12 may be fitted to provide an electrical connection and/or to mechanically strengthen the lighting device 1.

Figure 7A shows a second housing 6 laid out flat with grooves 13; these grooves are included to facilitate the easy folding of the second housing 6.

Figure 7B shows the first housing (including the light source and driver) inserted into the second housing 6.

Figure 7C shows a second housing 6 in the initial stage s of folding. It can be seen that the grooves 13 facilitate the folding whilst maintaining the surface finish of the second housing 6.

Figure 7D shows a second housing 6 folded into a square pipe shape with the first housing 4 at the center. This provides protection for the light source 2 and driver 3 and will allow the light emitted to escape via a light exit window (not shown).

Figure 7E shows end caps 12 fitted to the ends of the second housing 6. This 5 will provide an electrical connection and/or to mechanically strengthen the lighting device.

CLAIMS:

1. A lighting device comprising:
 - a light source,
 - a driver for providing an output to said light source, and
 - a first housing,5 wherein said first housing comprises a blister pack with at least one compartment suitable for locating said light source and driver.
2. A lighting device according to claim 1 further comprising:
 - an optical member for manipulating the light output by said light source, and
 - 10 - a thermal member,wherein said thermal member comprises a flexible heat sink and/or a heat-spreader and said thermal member is located within said first housing.
3. A lighting device according to any preceding claim further comprising a 15 second housing, said second housing configured to accept said first housing, wherein said second housing comprises a laminate with a first surface opposite a second surface, said first surfaces and second surfaces sandwiching a center structure and the first housing is located between said first surface and said second surface.
- 20 4. A lighting device according to claim 3 wherein said second housing comprises a paper laminate.
5. A lighting device according to claims 3 or 4 wherein said second housing comprises a honeycomb laminate with a first surface and a second surface opposite the first 25 surface sandwiching the honeycomb structure.
6. A lighting device according to claim 5 wherein said second housing comprises a hybrid honeycomb laminate wherein said honeycomb structure comprises a paper structure and at least one of said first surface or said second surface comprise a further material.

7. A lighting device according to any preceding claim wherein said second housing forms a luminaire.

5 8. A lighting device according to claim 5 wherein at least one of said first or said second surfaces comprises a decorative veneer.

9. A lighting device according to claim 3 wherein said second housing further comprises a light exit window for transmitting the light emitted by said light source.

10

10. A lighting device according to any preceding claim wherein said second housing comprises a foldable honeycomb laminate.

15

11. A lighting device according to claim 5 wherein said second foldable housing is configured to be folded in a first direction for transportation and subsequently folded in a second direction before operation.

1/4

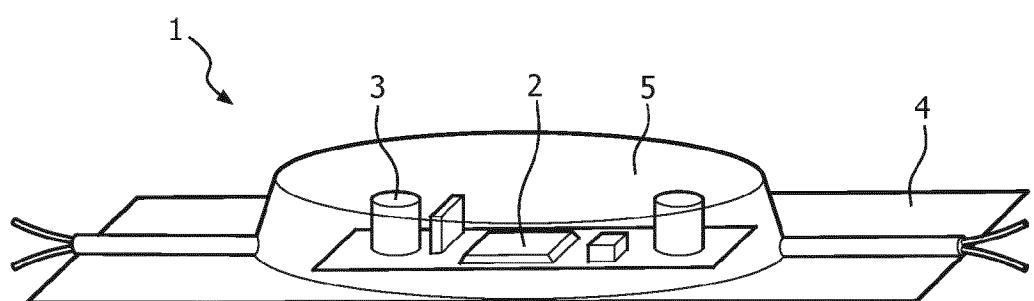


FIG. 1

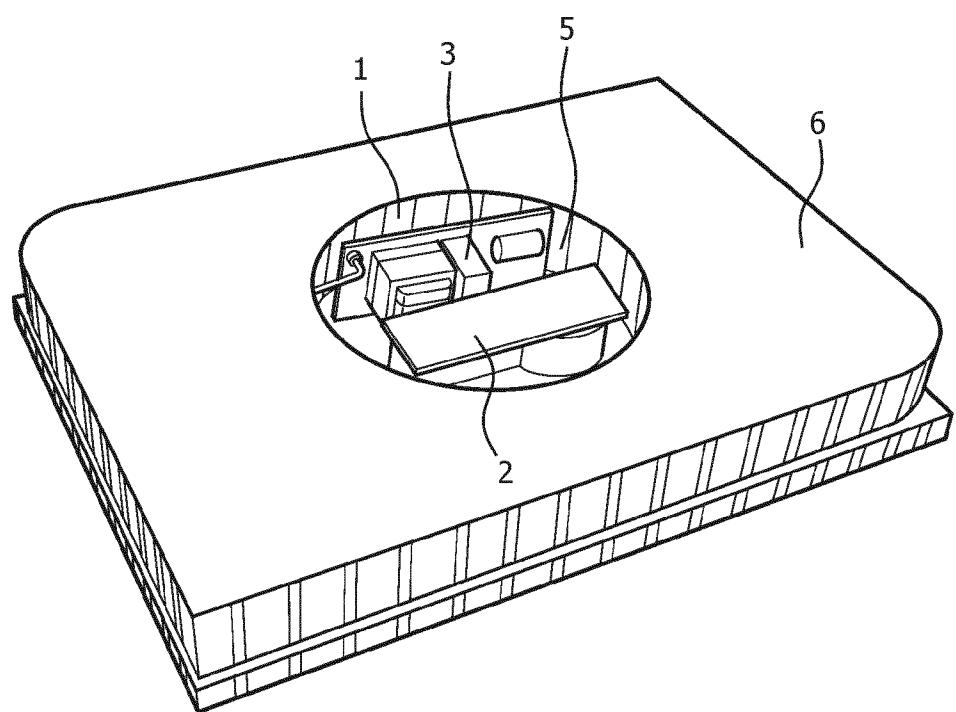


FIG. 2

2/4

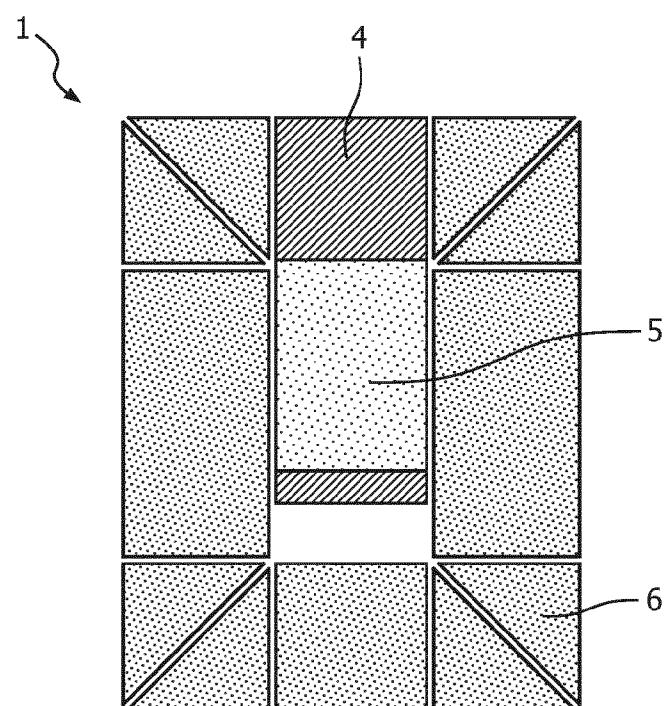


FIG. 3

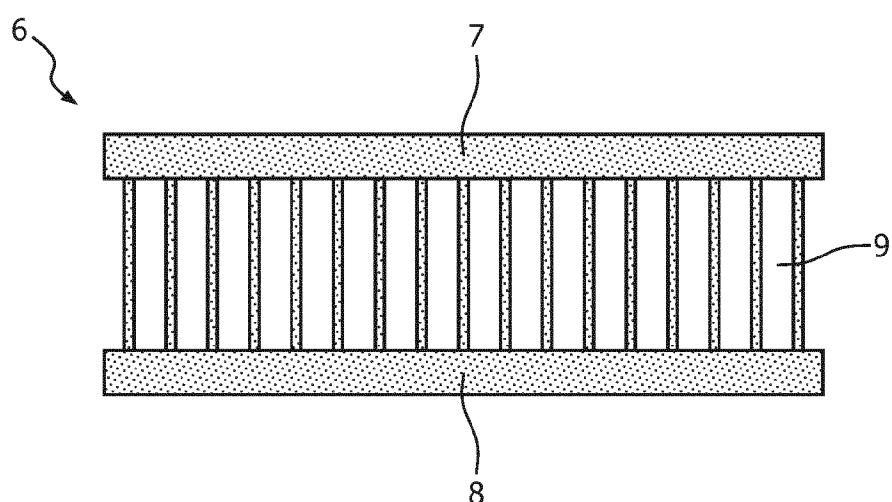


FIG. 4

3/4

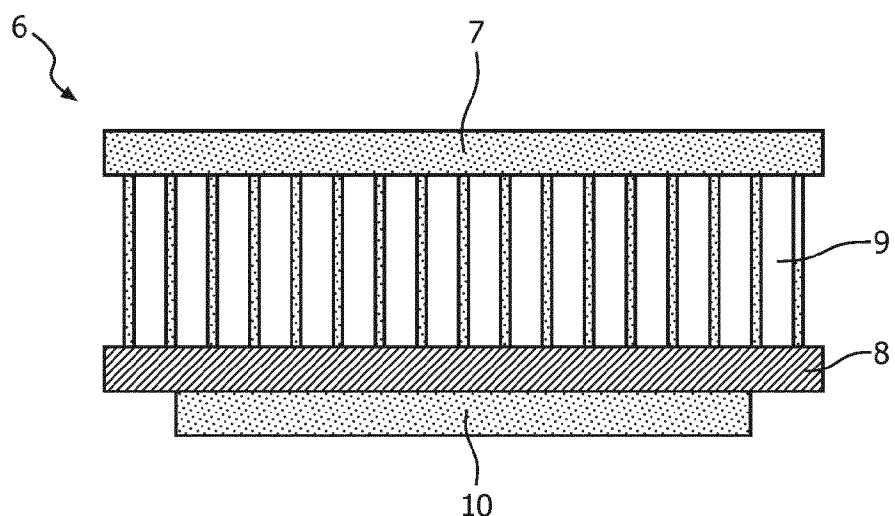


FIG. 5

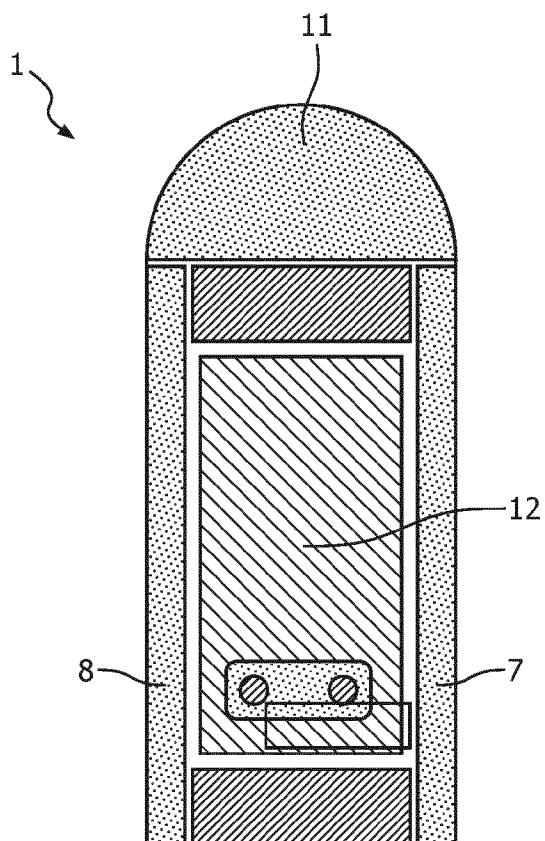


FIG. 6

4/4

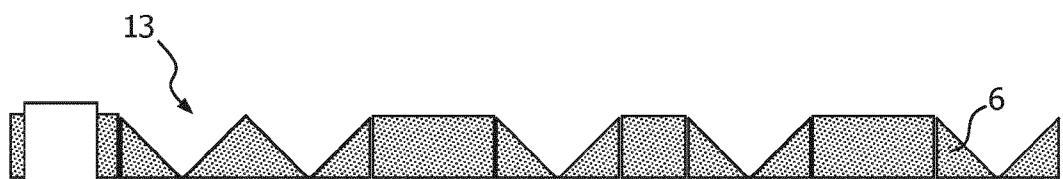


FIG. 7A



FIG. 7B



FIG. 7C

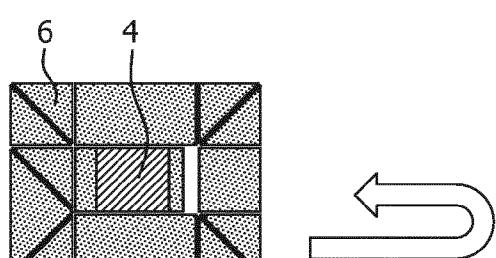


FIG. 7D

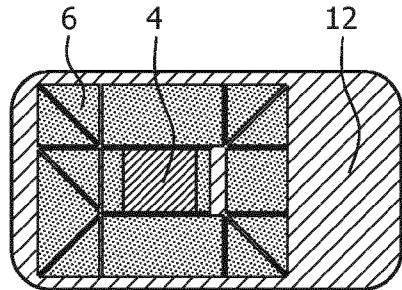


FIG. 7E

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/067586

A. CLASSIFICATION OF SUBJECT MATTER
 INV. F21V31/00 F21V15/01 F21V23/00 F21V29/70
 ADD. F21Y101/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F21V F21Y

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/296382 A1 (MAIER CHRISTINE [DE]) 3 December 2009 (2009-12-03) paragraphs [0020], [0027], [0042], [0049], [0053] figures 2A, 3A -----	1,2
Y	US 2013/094200 A1 (DELLIAN HARALD [DE] ET AL) 18 April 2013 (2013-04-18) paragraph [0012] figures 2, 3 -----	3,5,7-9
X	GB 2 400 433 A (METCALFE PAUL DAYAN [GB]; ROGERS RODNEY JOHN [GB]) 13 October 2004 (2004-10-13) page 4, lines 25-27 figures 1, 2 -----	1,2,7
A	----- -/-	3

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

6 November 2015

16/11/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Allen, Katie

INTERNATIONAL SEARCH REPORTInternational application No
PCT/EP2015/067586

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014/041172 A1 (CORLIFE OHG [DE]) 20 March 2014 (2014-03-20) page 11, paragraph 2-5 -----	1,2
Y	EP 1 041 211 A2 (BOX CONSULTANTS LIMITED [GB]) 4 October 2000 (2000-10-04) paragraph [0040] figure 4 -----	3,5,7-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/067586

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 2009296382	A1	03-12-2009	DE 102008025398 A1		10-12-2009
			US 2009296382 A1		03-12-2009
US 2013094200	A1	18-04-2013	CN 102971576 A		13-03-2013
			DE 102010030863 A1		05-01-2012
			EP 2521876 A1		14-11-2012
			US 2013094200 A1		18-04-2013
			WO 2012000860 A1		05-01-2012
GB 2400433	A	13-10-2004	NONE		
WO 2014041172	A1	20-03-2014	CN 104780861 A		15-07-2015
			DE 102012018170 A1		10-04-2014
			EP 2895097 A1		22-07-2015
			US 2015250555 A1		10-09-2015
			WO 2014041172 A1		20-03-2014
EP 1041211	A2	04-10-2000	AT 354705 T		15-03-2007
			DE 60033460 T2		31-10-2007
			DK 1041211 T3		02-07-2007
			EP 1041211 A2		04-10-2000
			ES 2282078 T3		16-10-2007
			GB 2348442 A		04-10-2000
			US 6667089 B1		23-12-2003