



US 20090051009A1

(19) **United States**(12) **Patent Application Publication**
Ipposhi et al.(10) **Pub. No.: US 2009/0051009 A1**(43) **Pub. Date: Feb. 26, 2009**(54) **SEMICONDUCTOR DEVICE, METHOD OF
MANUFACTURING THE SAME AND
RESISTOR**(75) Inventors: **Takashi Ipposhi**, Tokyo (JP);
Toshiaki Iwamatsu, Tokyo (JP)

Correspondence Address:

**OBLON, SPIVAK, MCCLELLAND MAIER &
NEUSTADT, P.C.**
1940 DUKE STREET
ALEXANDRIA, VA 22314 (US)(73) Assignee: **Renesas Technology Corp.**,
Chiyoda-ku (JP)(21) Appl. No.: **12/254,026**(22) Filed: **Oct. 20, 2008****Related U.S. Application Data**

(62) Division of application No. 11/448,827, filed on Jun. 8, 2006, now Pat. No. 7,449,749, which is a division of application No. 10/713,044, filed on Nov. 17, 2003, now Pat. No. 7,078,767, which is a division of application No. 09/814,116, filed on Mar. 22, 2001, now Pat. No. 6,707,105.

(30) **Foreign Application Priority Data**

Jun. 13, 2000 (JP) 2000-176884

Oct. 23, 2000 (JP) 2000-322634

Publication Classification(51) **Int. Cl.**
H01L 29/8605 (2006.01)(52) **U.S. Cl.** **257/537; 257/E29.326**(57) **ABSTRACT**

Formed on an insulator are an N⁻ type semiconductor layer having a partial isolator formed on its surface and a P⁻ type semiconductor layer having a partial isolator formed on its surface. Source/drain being P⁺ type semiconductor layers are provided on the semiconductor layer to form a PMOS transistor. Source/drain being N⁺ type semiconductor layers are provided on the semiconductor layer to form an NMOS transistor. A pn junction formed by the semiconductor layers is provided in a CMOS transistor made up of the transistors. The pn junction is positioned separately from the partial isolators where the crystal defect is thus very small. Therefore, the leakage current is very low at the pn junction.

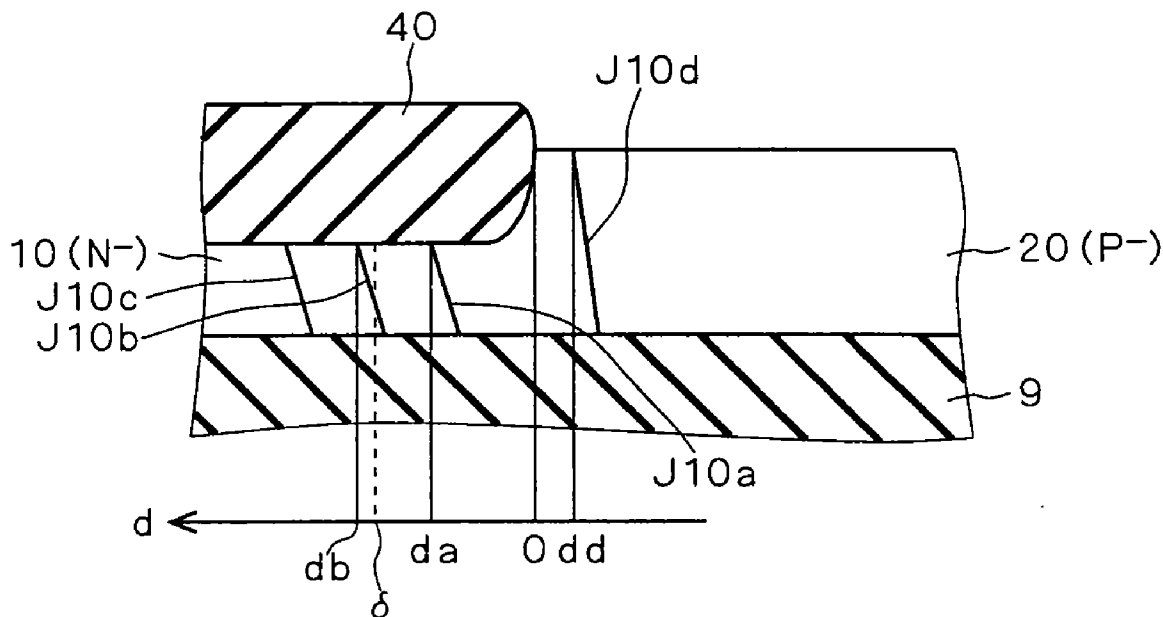


FIG. 1

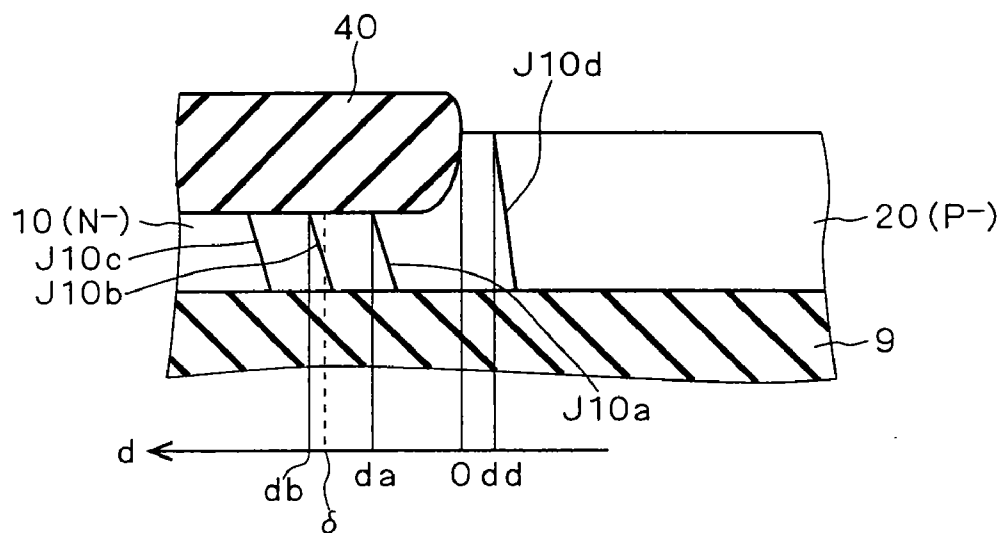


FIG. 2

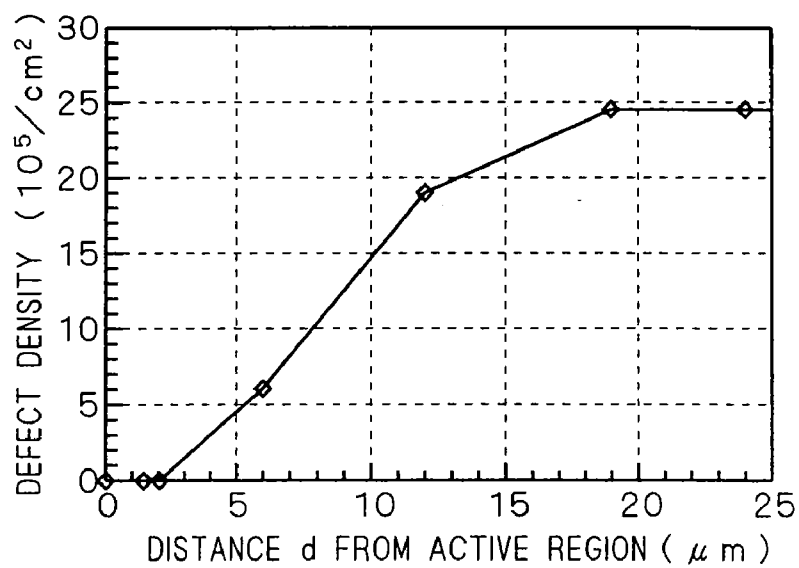


FIG. 3

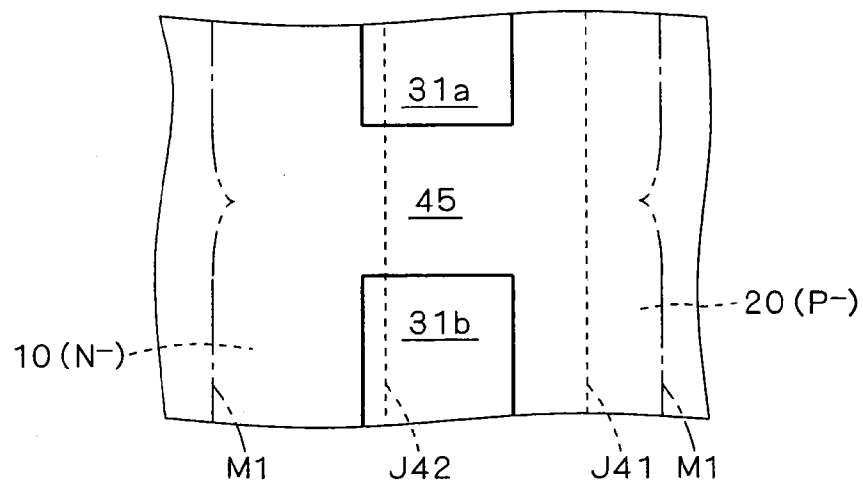


FIG. 4

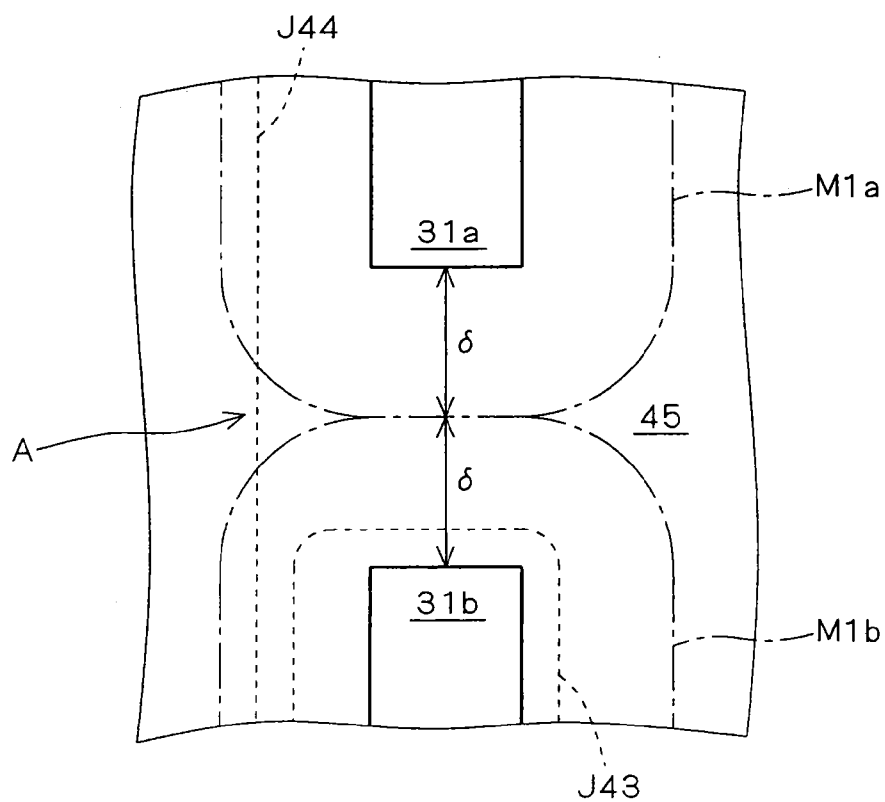


FIG. 5

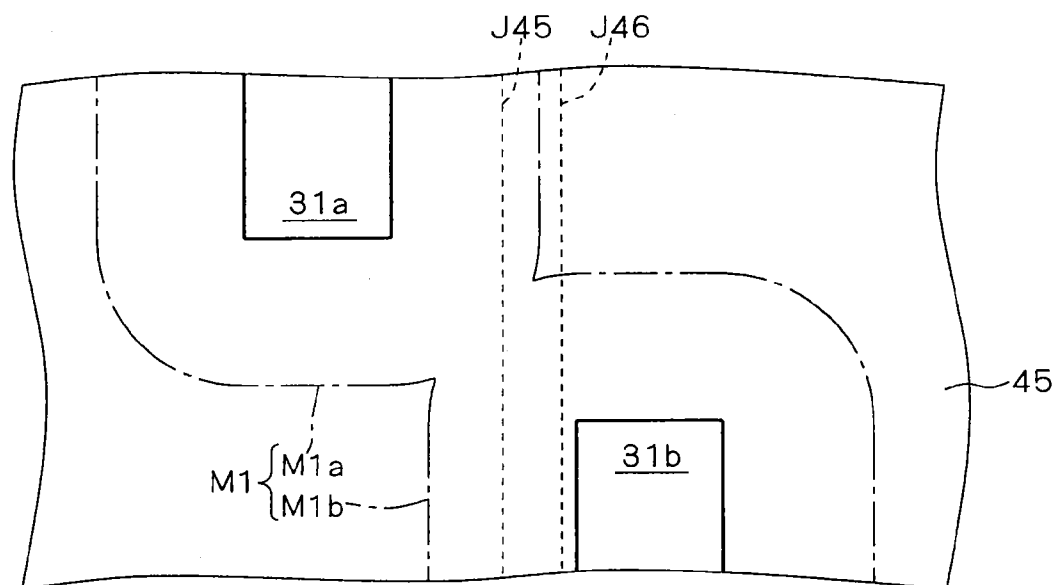


FIG. 6

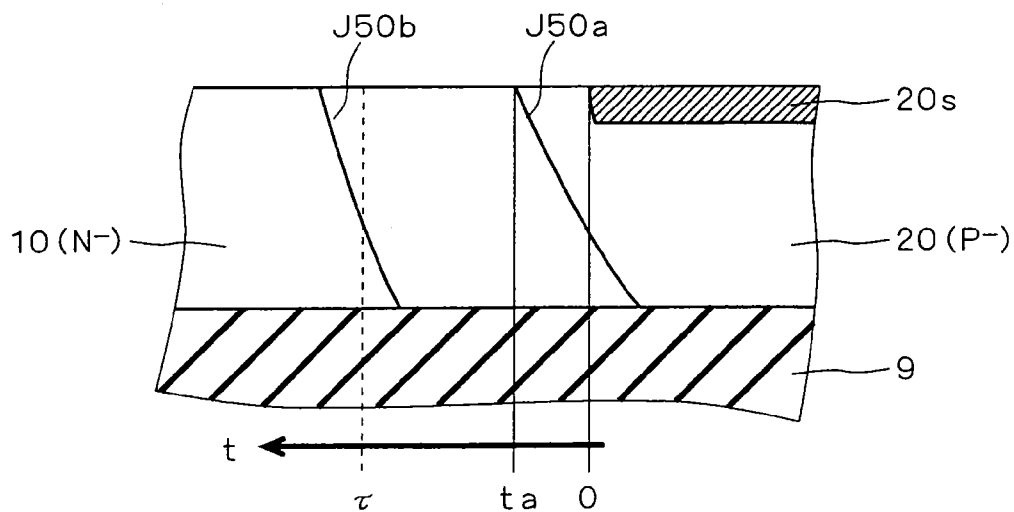


FIG. 7

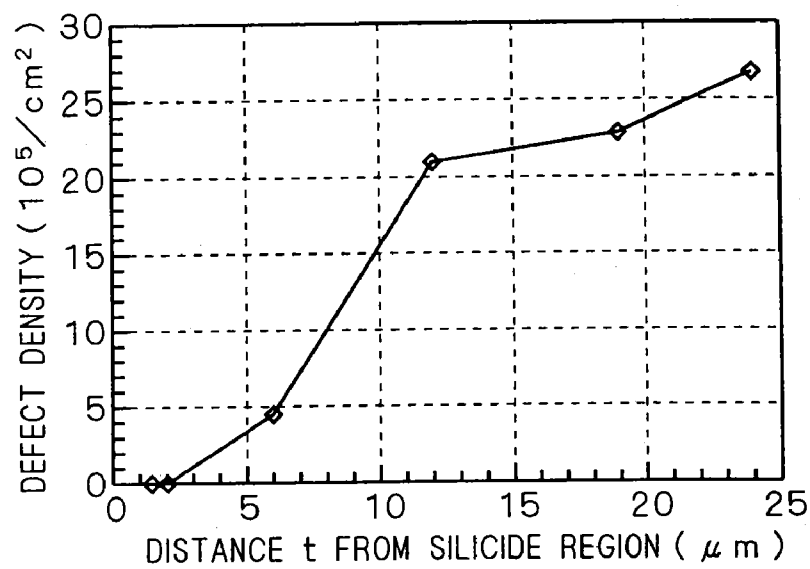


FIG. 8

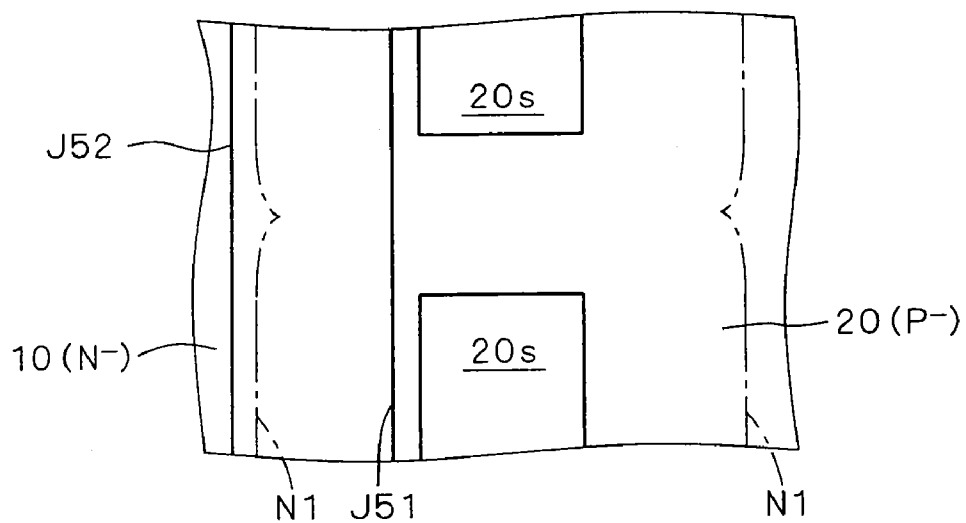


FIG. 9

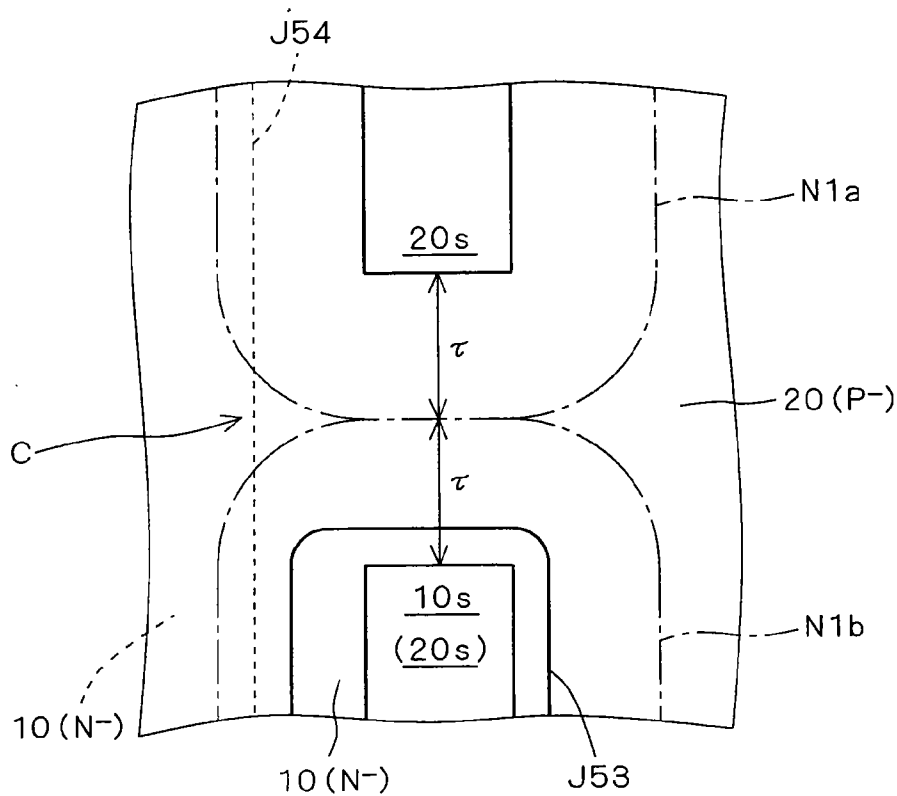


FIG. 10

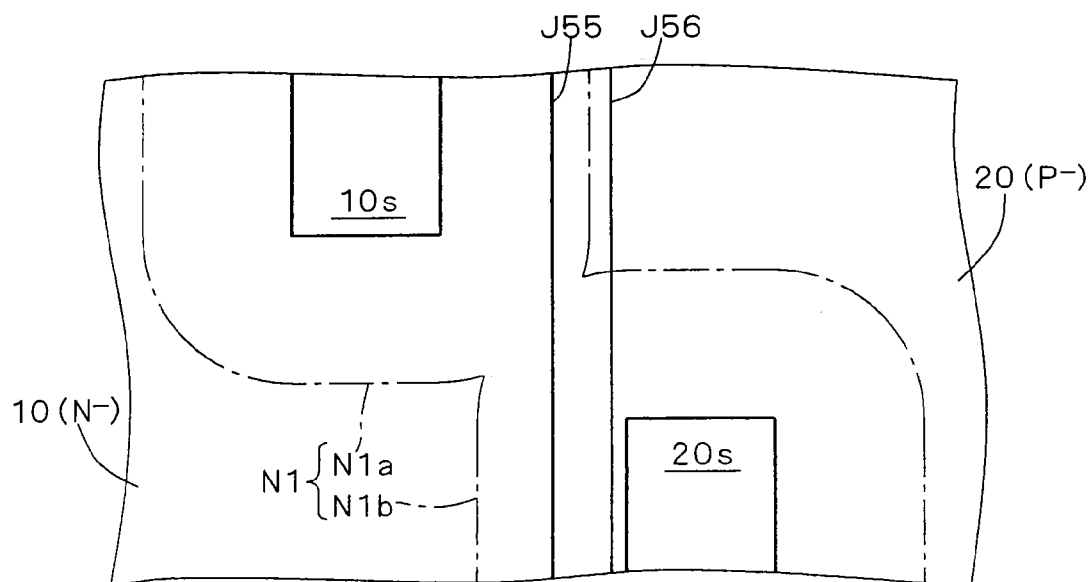


FIG. 11

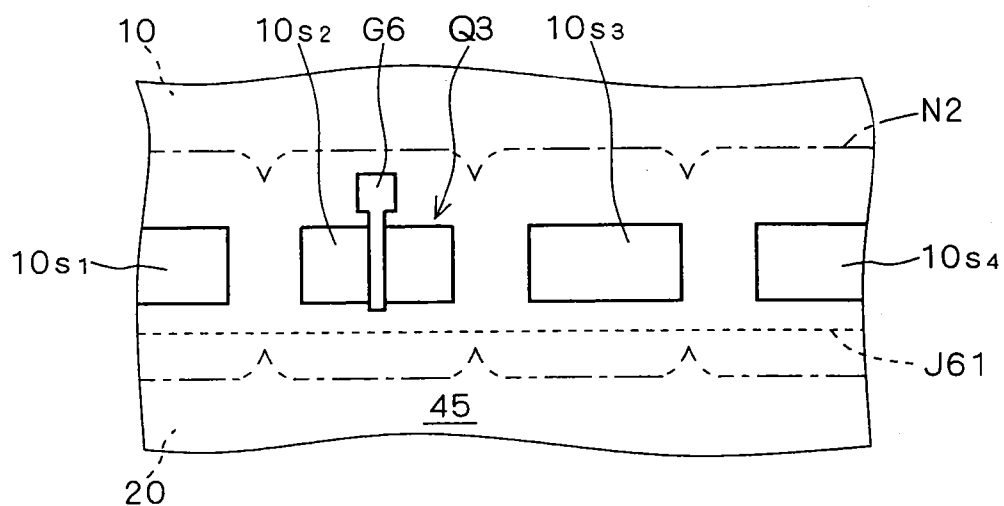
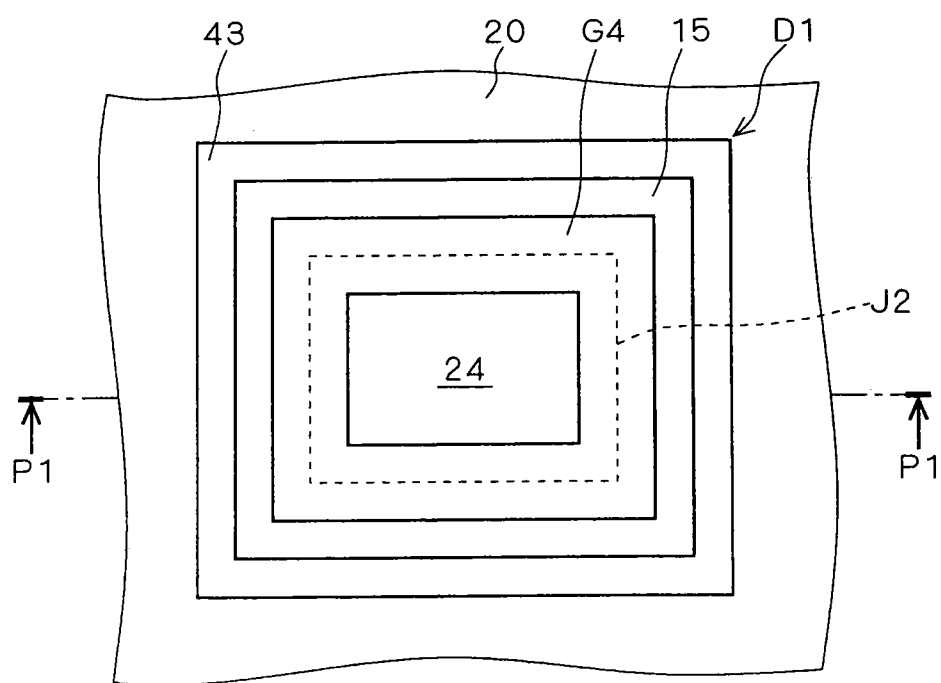


FIG. 12



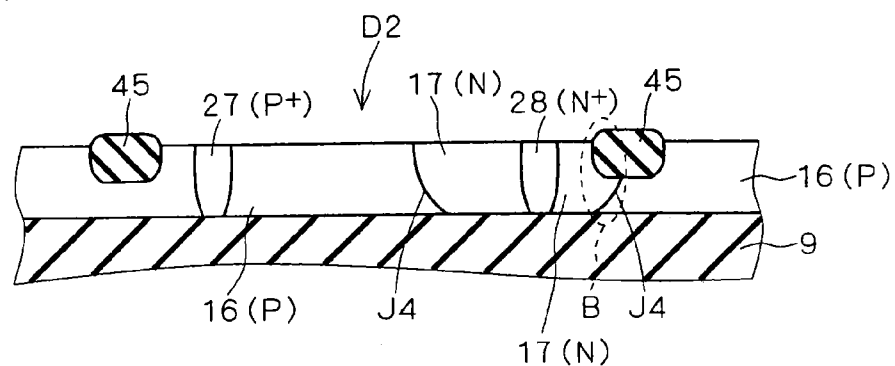


FIG. 16

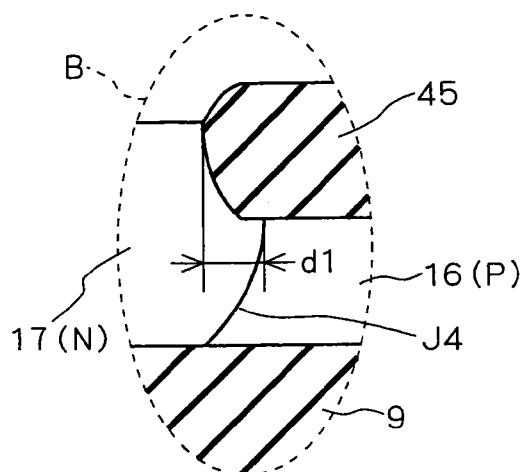


FIG. 17

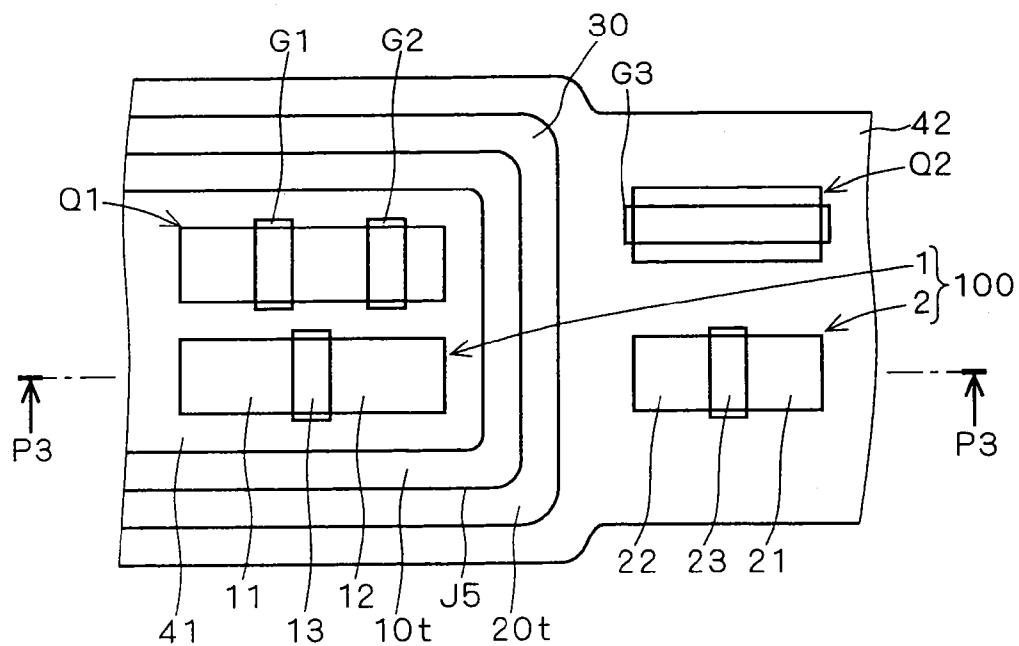


FIG. 18

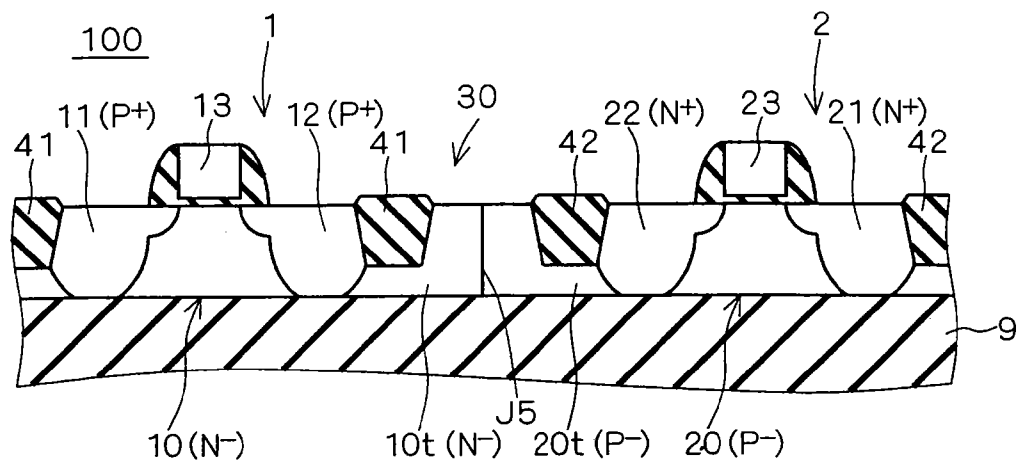


FIG. 19

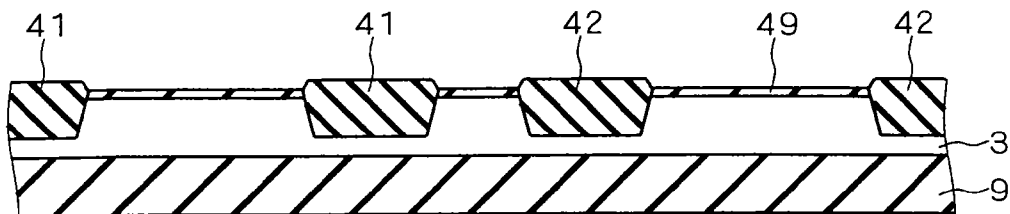
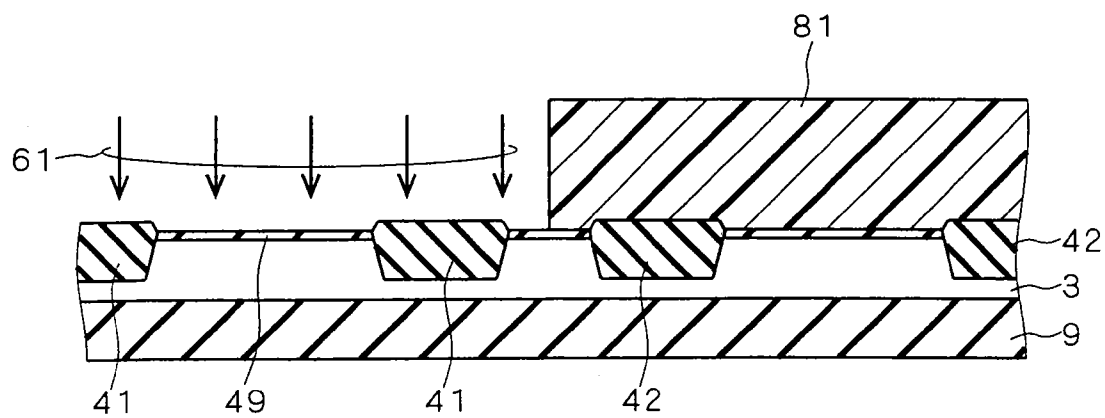


FIG. 20



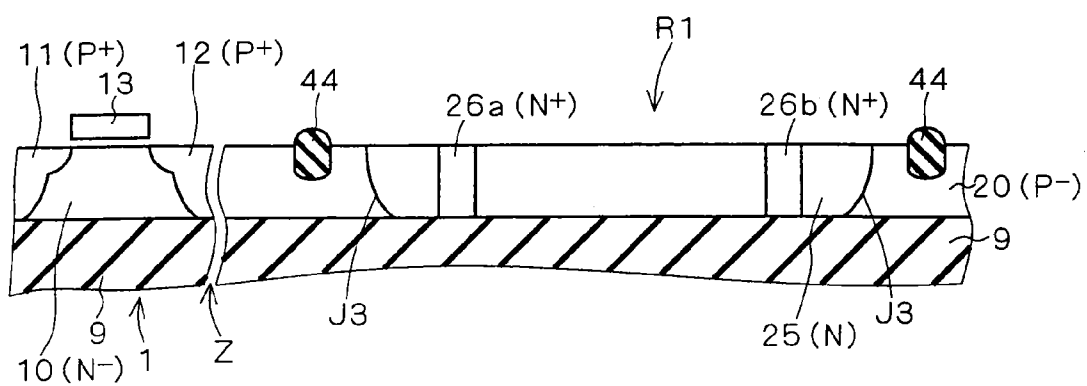


FIG. 24

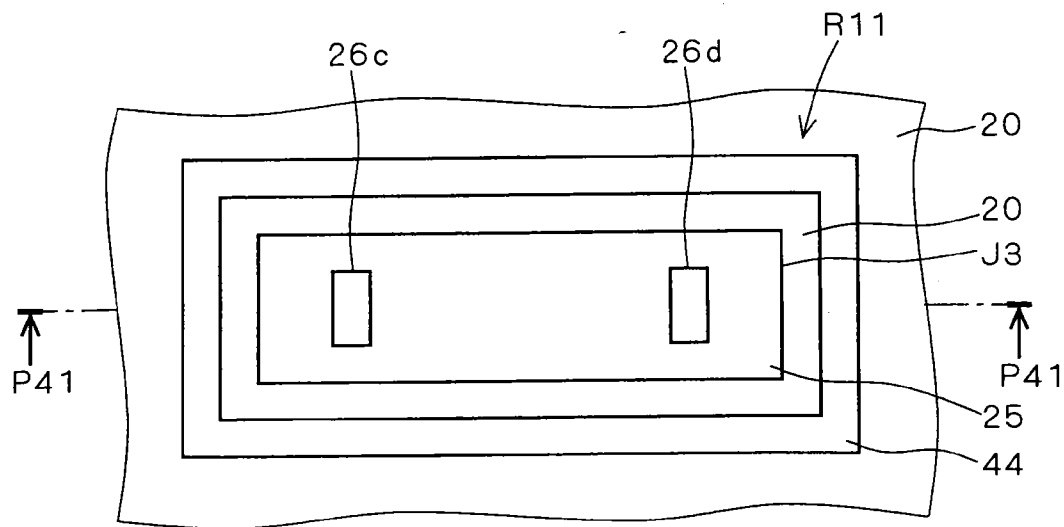
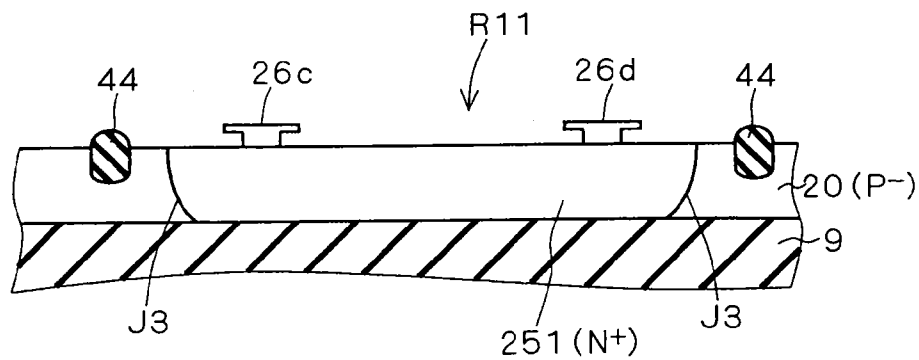


FIG. 25



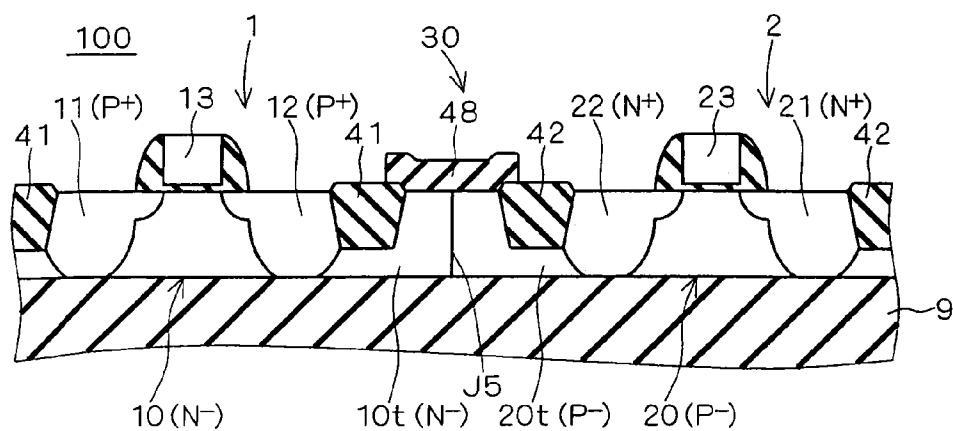


FIG. 29

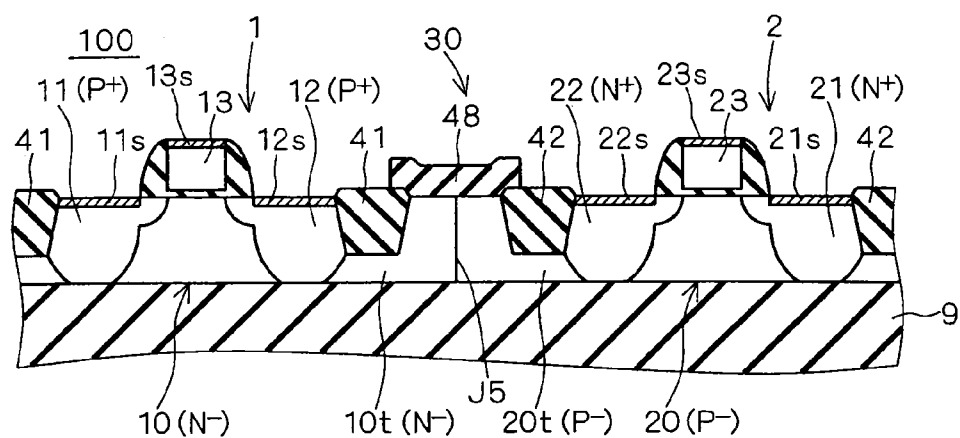


FIG. 30

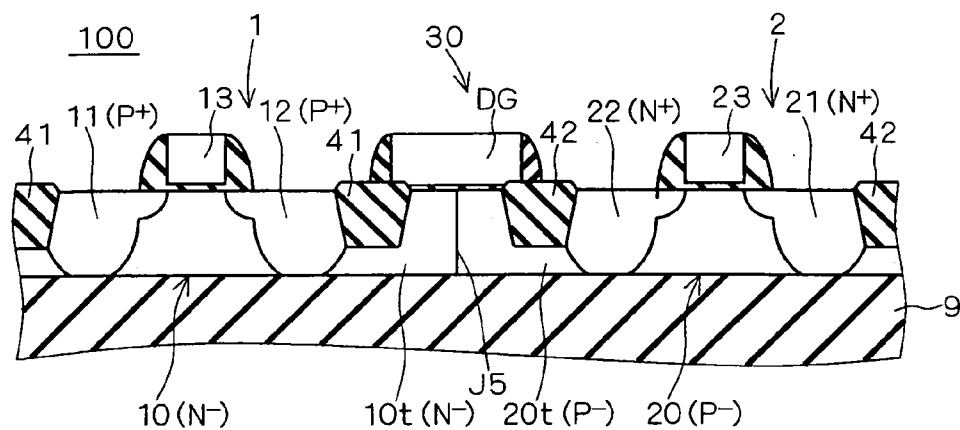
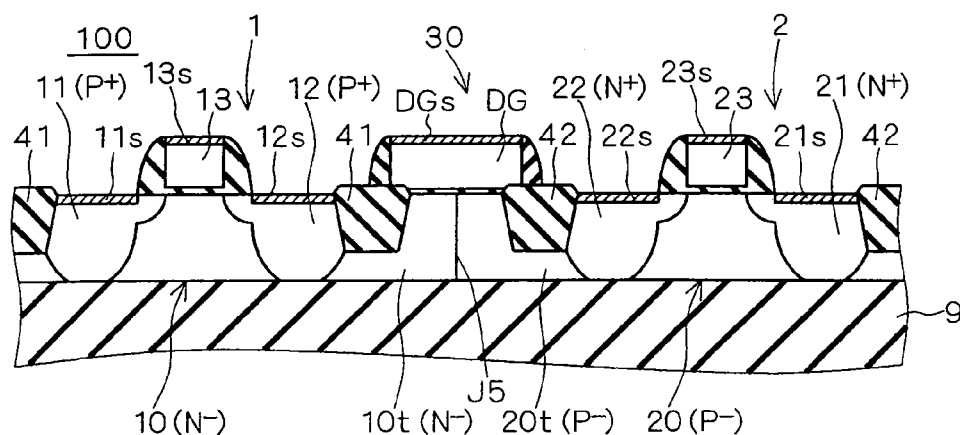


FIG. 31



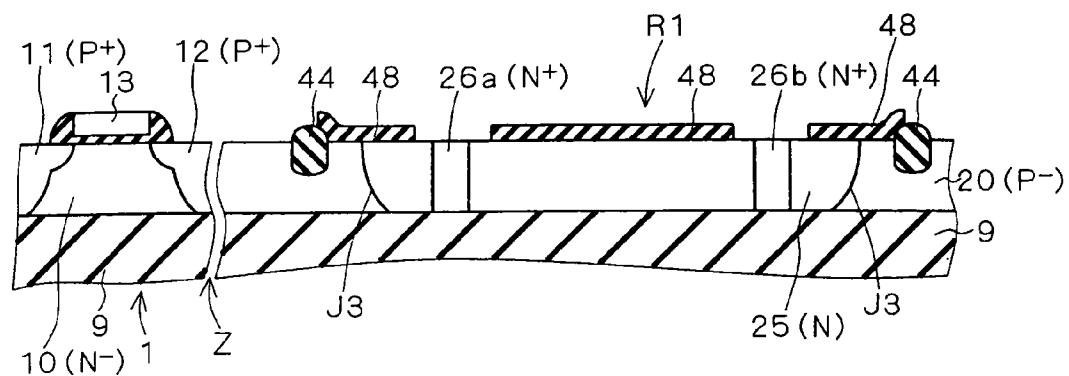


FIG. 35

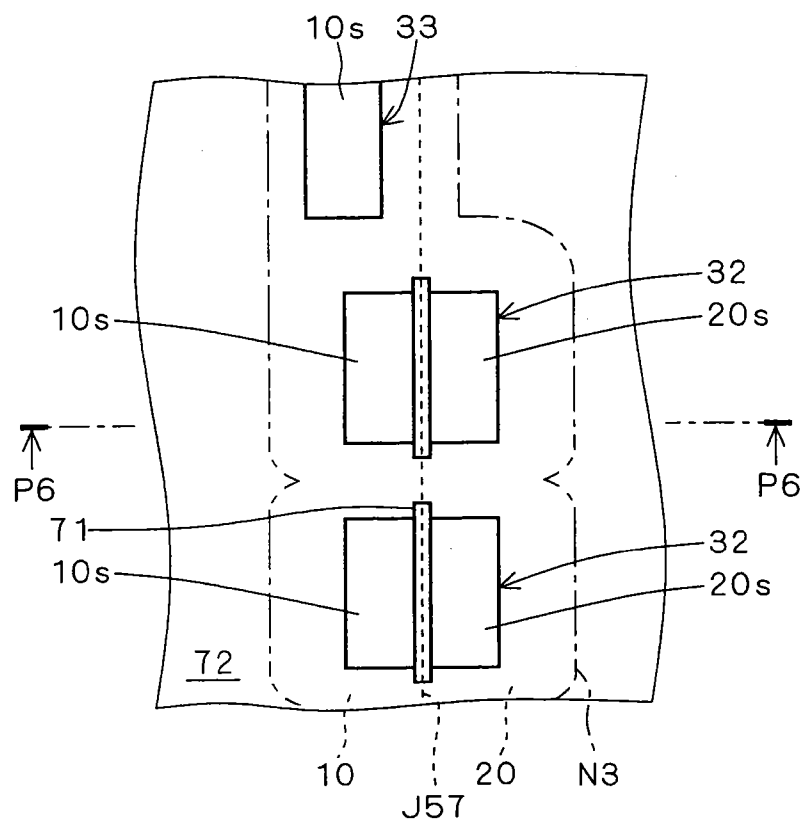


FIG. 36

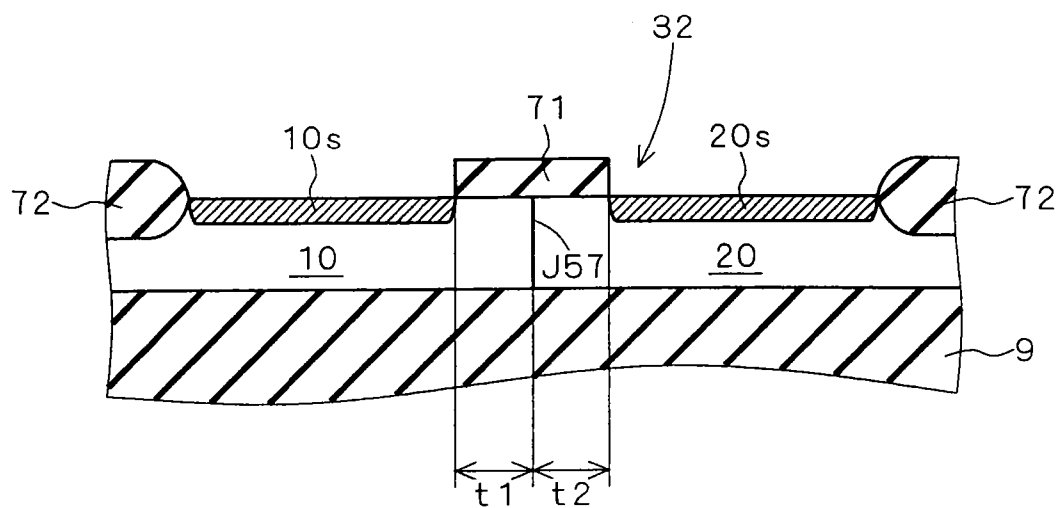


FIG. 37

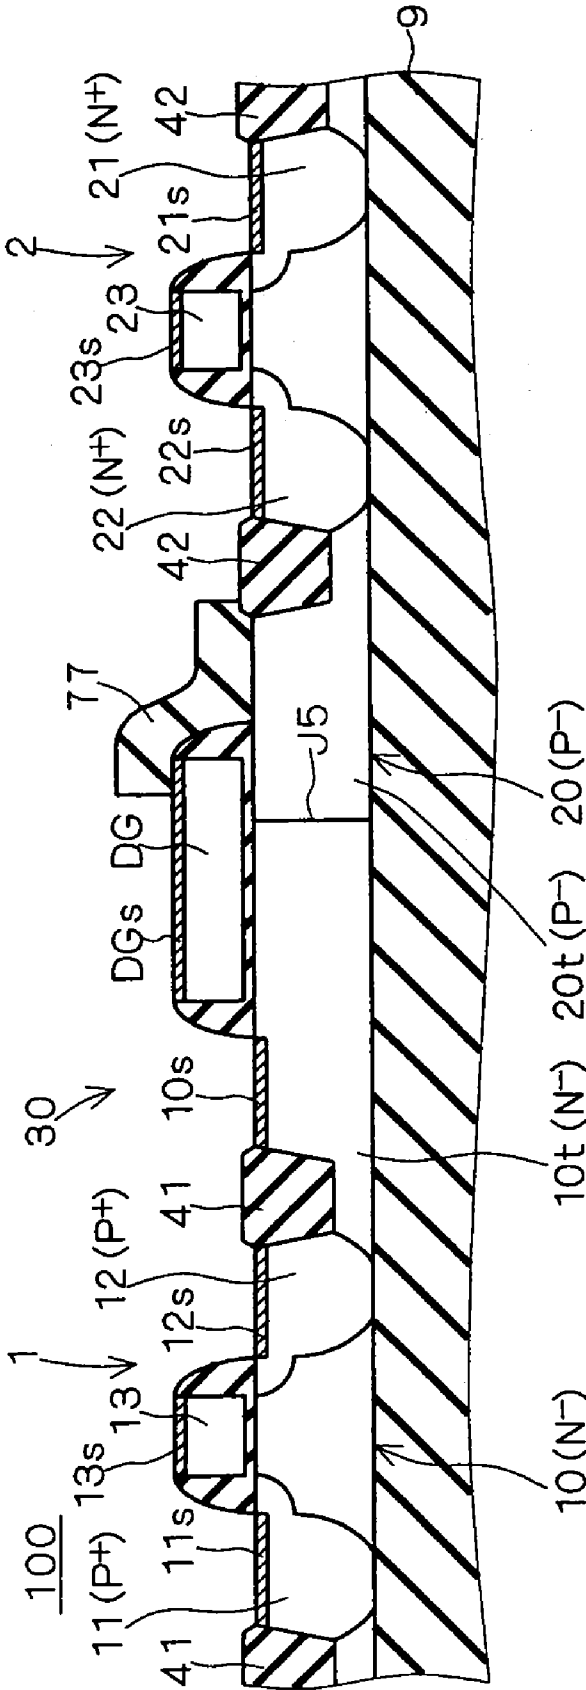


FIG. 38

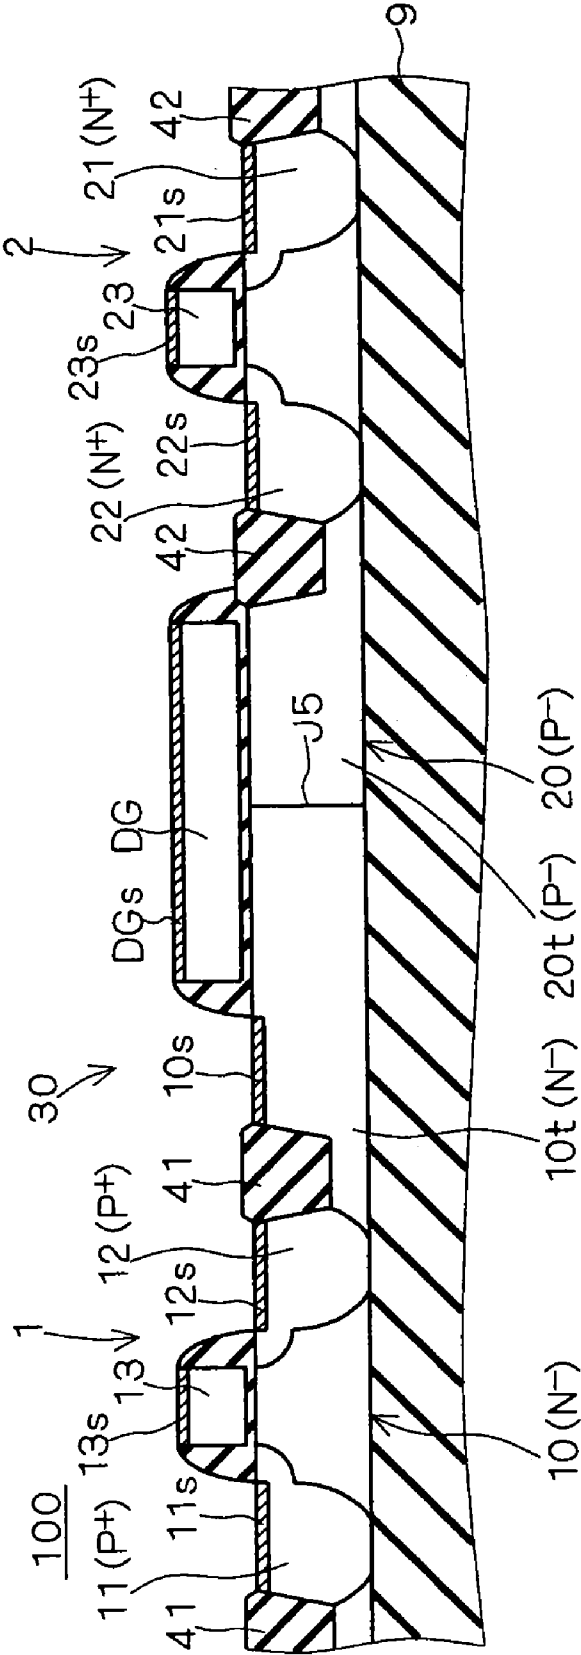


FIG. 39

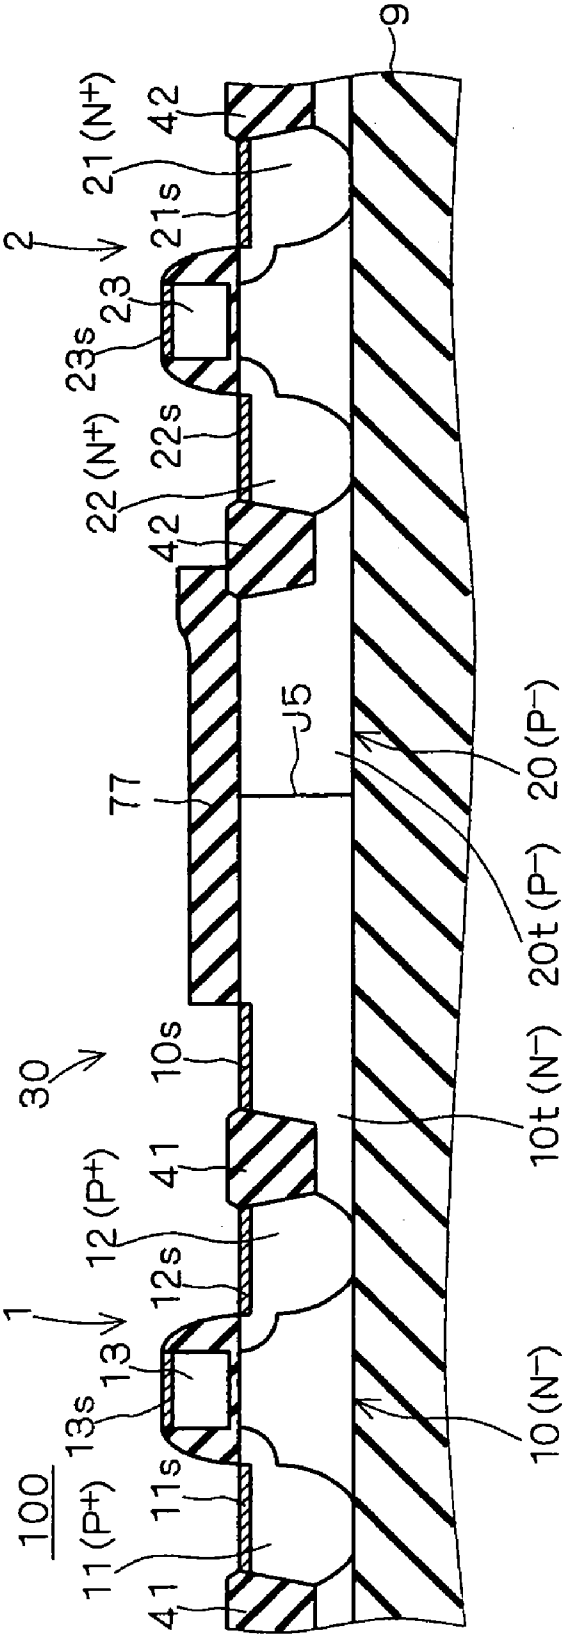


FIG. 40

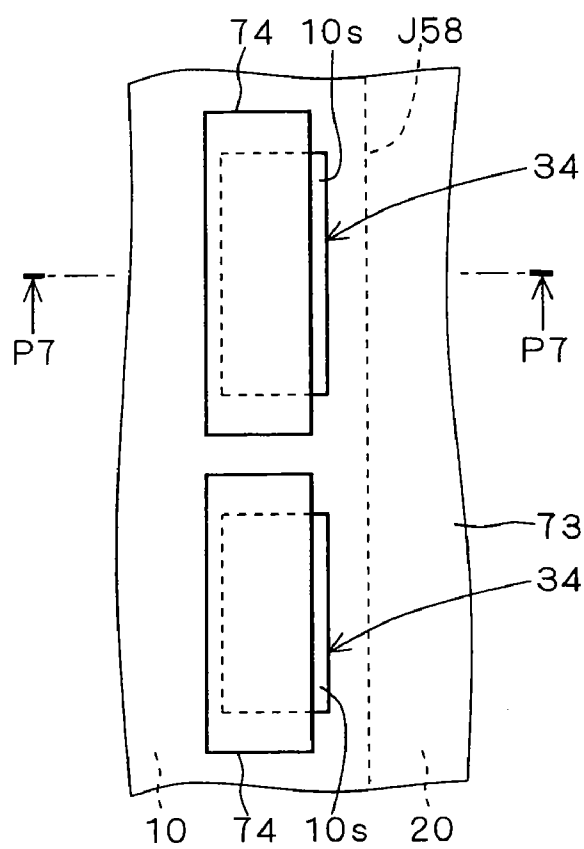


FIG. 41

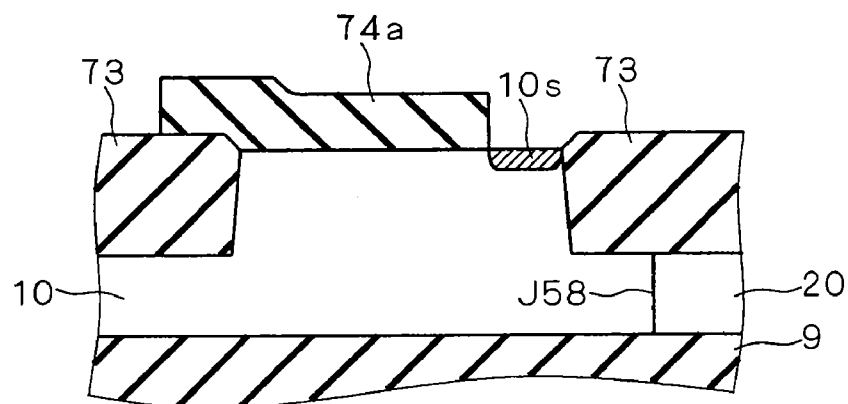


FIG. 42

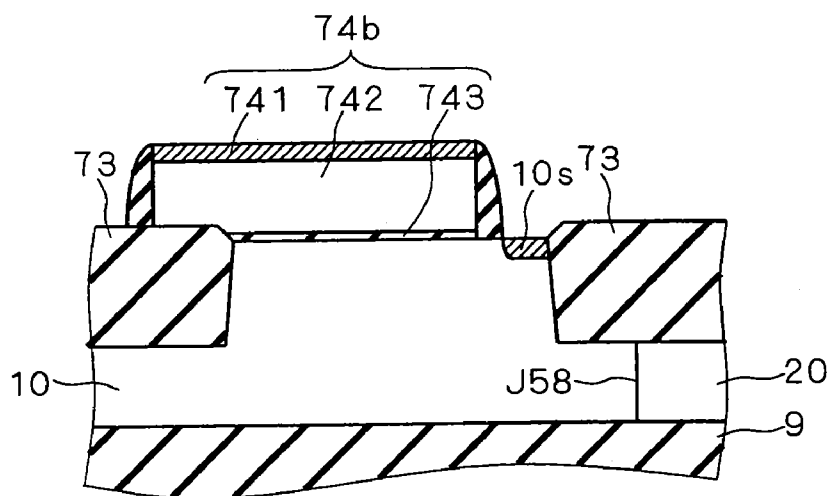


FIG. 43

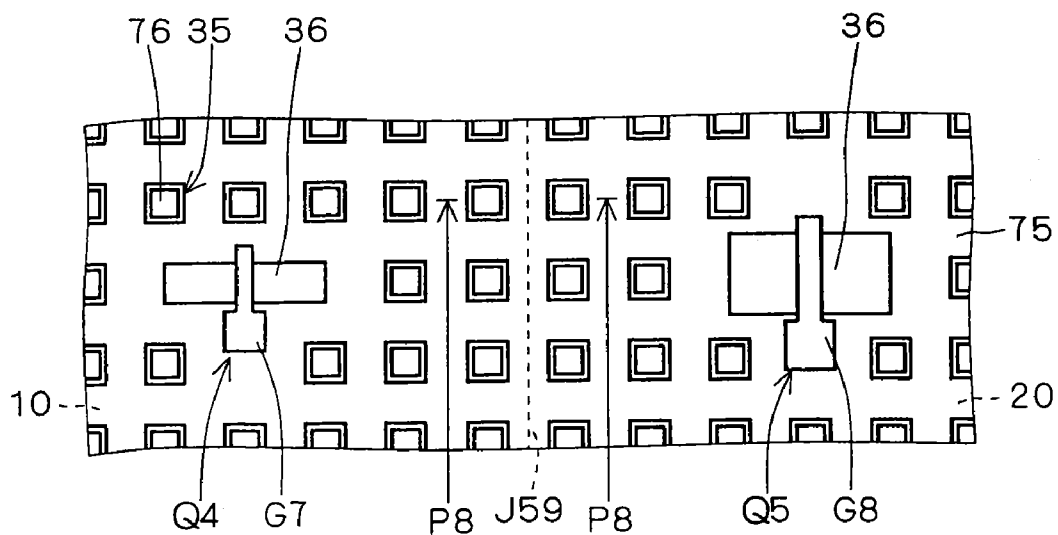


FIG. 44

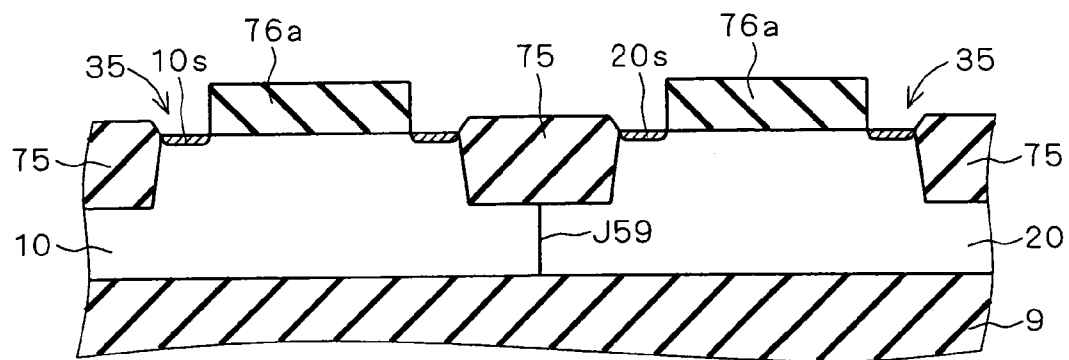


FIG. 45

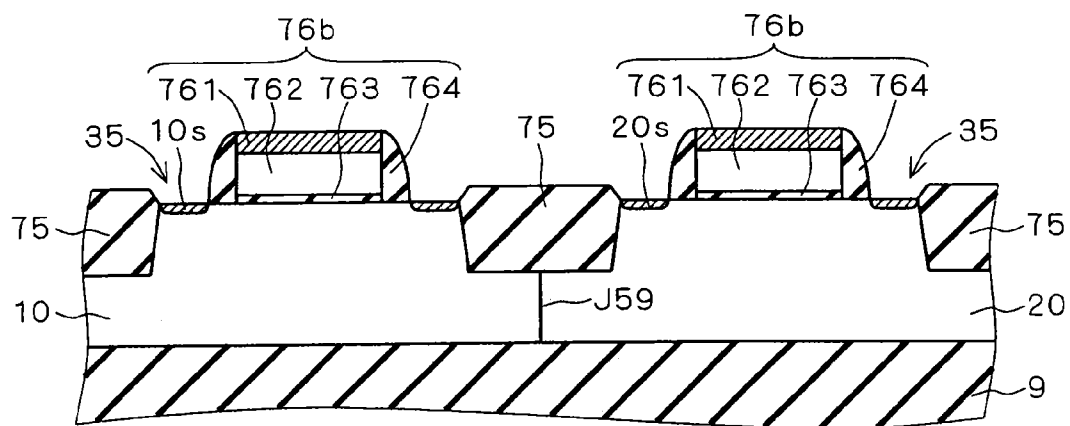


FIG. 46

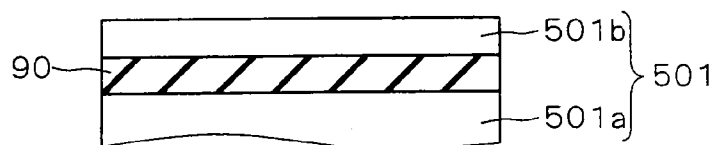


FIG. 47

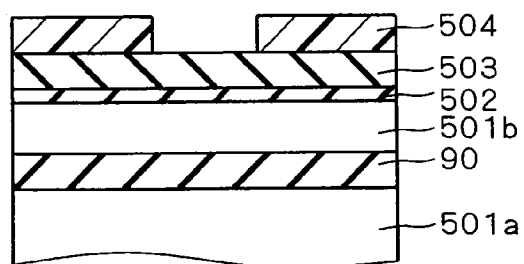


FIG. 48

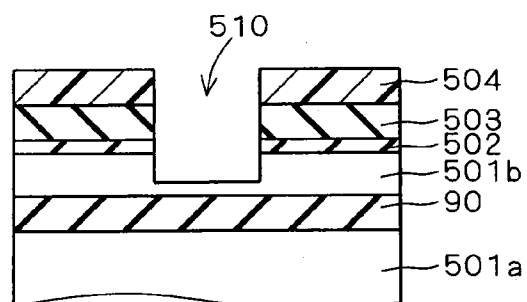


FIG. 49

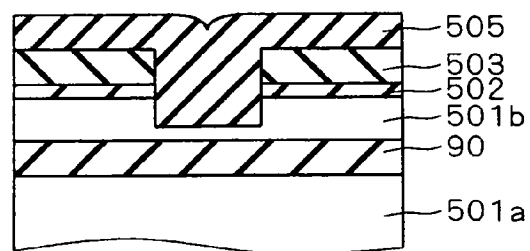


FIG. 50

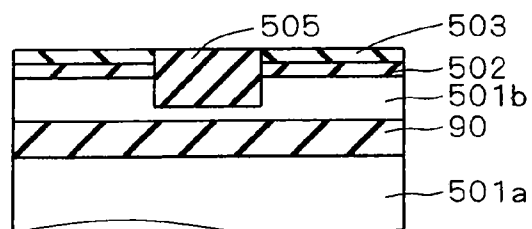


FIG. 51

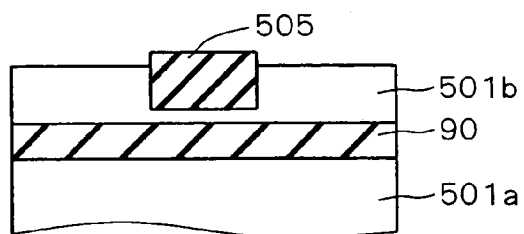


FIG. 52

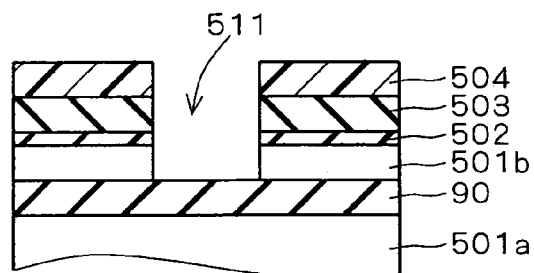


FIG. 53

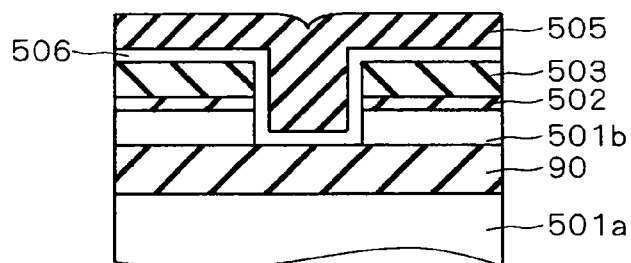


FIG. 54

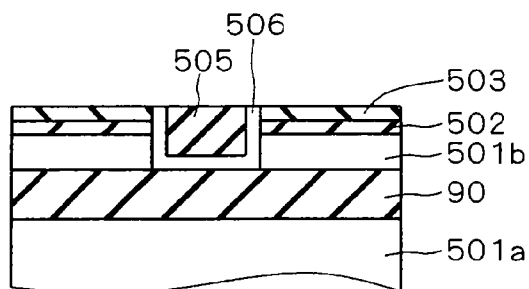


FIG. 55

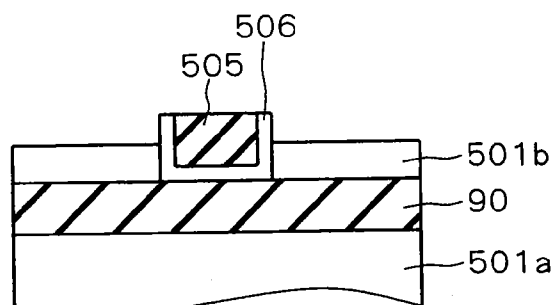


FIG. 56

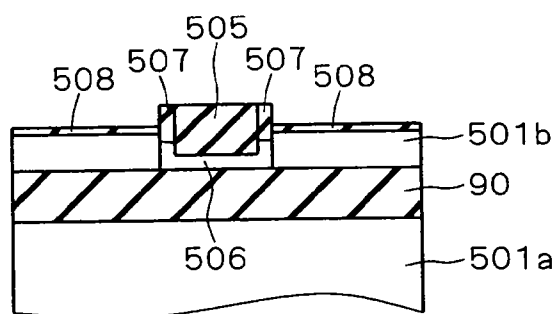


FIG. 57

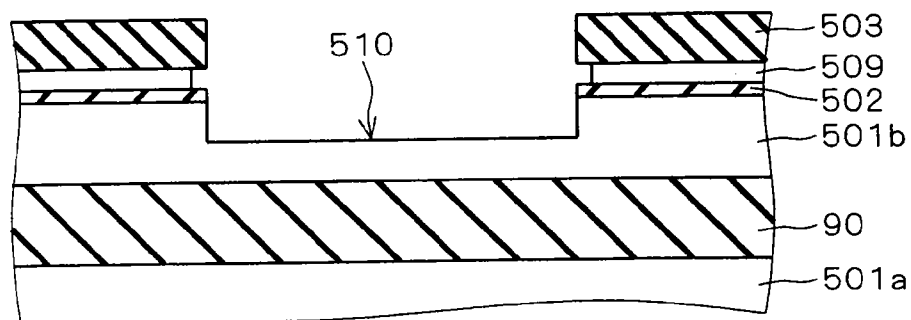


FIG. 58

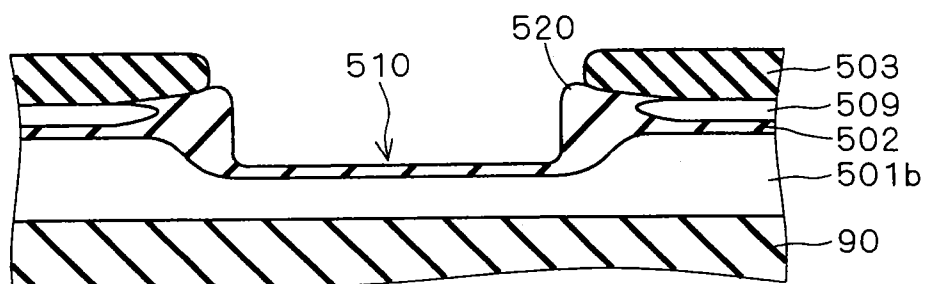


FIG. 59

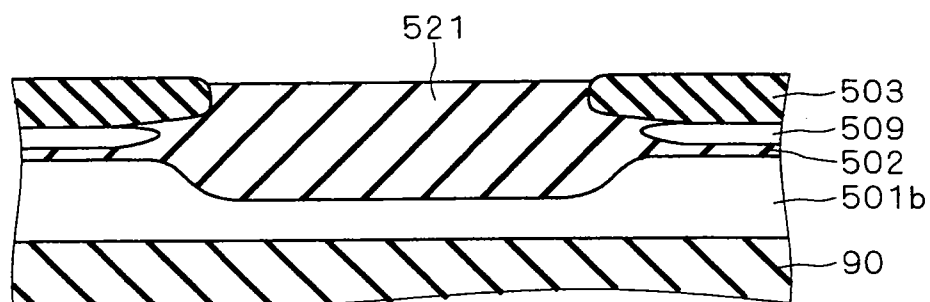


FIG. 60

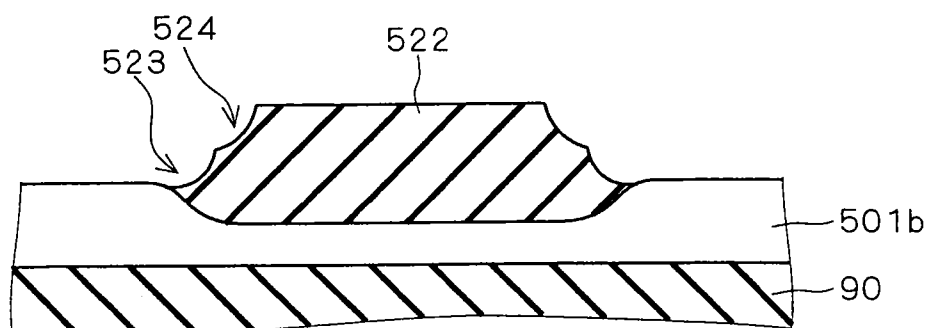


FIG. 61


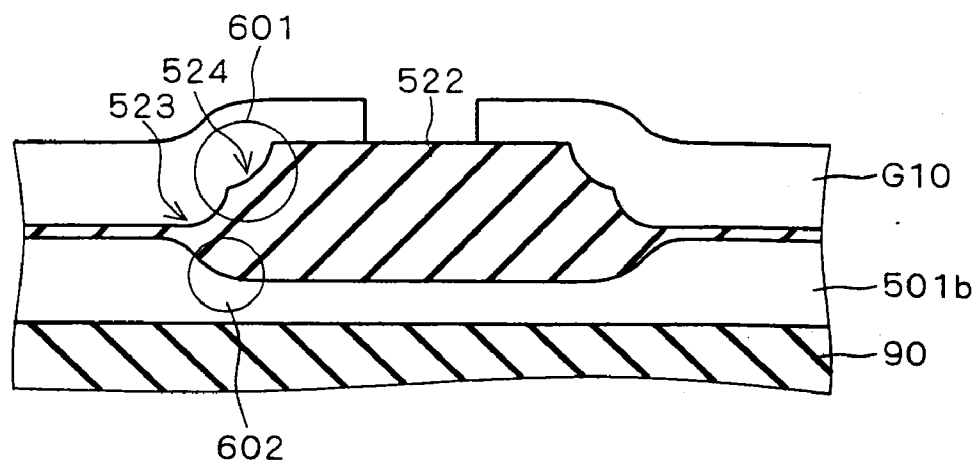


FIG. 62

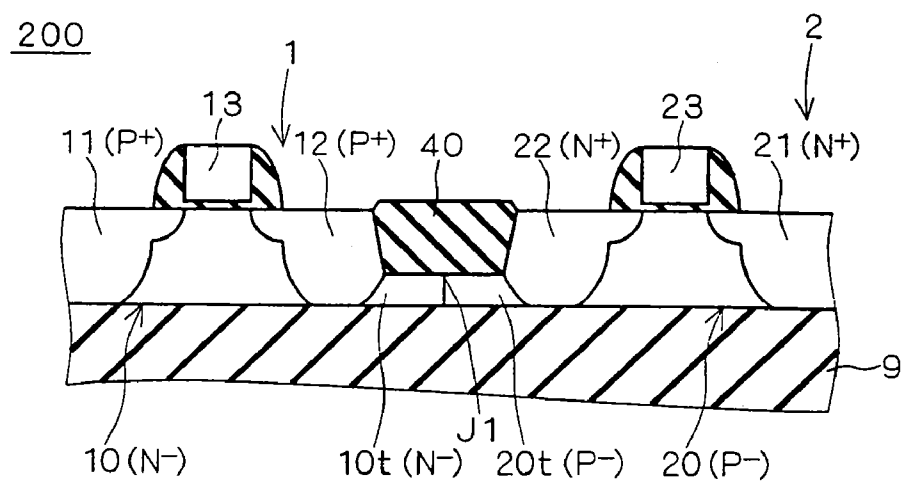

PRIOR ART

SEMICONDUCTOR DEVICE, METHOD OF MANUFACTURING THE SAME AND RESISTOR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present divisional application claims the benefit of priority under 35 U.S.C. §120 to application Ser. No. 11/448,827, filed Jun. 8, 2006 which is a divisional of application Ser. No. 10/713,044, filed Nov. 17, 2003, which is a divisional of Application of Ser. No. 09/814,116, filed Mar. 22, 2001, and claims the benefit of priority under 35 U.S.C. §119 from the Japanese Patent Application Nos. 2000-176884, filed Jun. 13, 2000, and 2000-322634, filed Oct. 23, 2000, the disclosure of each is herein incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a semiconductor device having a pn junction, and more particularly, a semiconductor device and a resistor having a structure where an insulative isolator is provided on a semiconductor film disposed on an insulative substrate on the opposite side to the substrate without making contact with the substrate.

[0004] 2. Description of the Background Art

[0005] Proposals for a so-called SOI (Silicon On Insulator) structure have been made conventionally. FIG. 62 is a sectional view exemplifying a structure of a CMOS (Complementary Metal Oxide Semiconductor) transistor 200 having the SOI structure. A P⁺ type semiconductor layer 20 is provided on an insulator 9, and an insulative isolator 40 is provided separately from the insulator 9 on a surface of the semiconductor layer 20 on the far side from the insulator 9. Such an isolator that is separated from the insulator and provided on the surface of the semiconductor film disposed on the insulator for isolating the surface of the semiconductor layer is hereinafter tentatively referred to as "partial isolator".

[0006] N⁺ type source/drain layers 21 and 22 are provided in the semiconductor layer 20. These source/drain layers and a gate electrode 23 provided on the semiconductor layer 20 with a gate insulating film interposed therebetween constitute an NMOS transistor 2. Such an NMOS transistor having the SOI structure including the partial isolator is disclosed in "Bulk-Layout-Compatible 0.18 μ m SOI-CMOS Technology Using Body-Fixed Partial Trench Isolation (PTI)" (Y. Hirano et al., 1999 IEEE International SOI Conference, October 1999, pp. 131-132), for example.

[0007] An N⁻ type semiconductor layer 10 is further provided on the insulator 9. P⁺ type source/drain layers 11 and 12 provided in the semiconductor layer 10 and a gate electrode 13 provided on the semiconductor layer 10 with a gate insulating film interposed therebetween constitute a PMOS transistor 1.

[0008] The source/drain layer 22 extends through the semiconductor layer 20, and the source/drain layer 12 extends through the semiconductor layer 10 in the thickness direction, respectively, to divide the respective semiconductor layers 10 and 20 in a sectional view. There is a semiconductor layer 20_f being a part of the semiconductor layer 20 and a semiconductor layer 10_f being a part of the semiconductor layer 10 between the source/drain layers 12 and 22. The semiconductor layers 20_f and 10_f are adjacent to each other to form a pn

junction J1 under the partial isolator 40, that is, between the partial isolator and the insulator 9. The pn junction J1 is positioned in the above-described manner when, for example, the pn junction J1 is formed at the stage of forming the semiconductor layers 10 and 20 before forming the partial isolator 40 and the partial isolator 40 is then formed on a boundary between the semiconductor layers 10 and 20.

[0009] In this way, semiconductor layers of conductivity types different from each other, i.e., p and n type semiconductor layers are formed as a semiconductor film having the SOI structure in a general LSI (Large Scale Integrated Circuit), and a MOS transistor and a bipolar transistor are formed using these semiconductor layers.

[0010] However, it is observed in the structure shown in FIG. 62 that the pn junction J1 positioned under the partial isolator 40 results in occurrence of an abnormal leakage current at the pn junction J1.

SUMMARY OF THE INVENTION

[0011] According to a first aspect of the present invention, a semiconductor device comprises: a substrate at least having an insulative surface; a semiconductor film provided on the surface of the substrate comprising a first semiconductor layer of a first conductivity type, a second semiconductor layer of the first conductivity type having an impurity concentration lower than that of the first semiconductor layer, a third semiconductor layer of a second conductivity type opposite to the first conductivity type and a fourth semiconductor layer of the second conductivity type having an impurity concentration lower than that of the third semiconductor layer; and an insulative isolator formed on a surface of the semiconductor film on the far side from the substrate, separately from the surface of the substrate. In the semiconductor device, the second and fourth semiconductor layers form a pn junction extending in the thickness direction of the semiconductor film, and a maximum value of a distance between the pn junction and a boundary between the isolator and the semiconductor film is not more than 2 μ m, when a direction from the boundary to the isolator along the surface of the substrate is taken as a positive direction.

[0012] According to a second aspect of the present invention, in the semiconductor device of the first aspect, the pn junction has a portion separated from the isolator.

[0013] According to a third aspect of present invention, in the semiconductor device of the second aspect, the portion of the pn junction separated from the isolator forms a semiconductor element.

[0014] According to a fourth aspect of the present invention, in the semiconductor device of the third aspect, the first, second, fourth and third semiconductor layers are adjacent to each other in this order, and the first and third semiconductor layers function as a contact with respect to the pn junction.

[0015] According to a fifth aspect of the present invention, in the semiconductor device of the second aspect, the first, fourth, second and third semiconductor layers are adjacent to each other in this order, and the first and second semiconductor layers function as source/drain layers of MOS transistors having conductivity types different from each other, respectively.

[0016] According to a sixth aspect of the present invention, the semiconductor device of the second aspect further comprises a cover having an insulative surface in contact with the portion of the pn junction separated from the isolator.

[0017] According to a seventh aspect of the present invention, the semiconductor device of the fifth aspect further comprises a cover having an insulative surface in contact with the portion of the pn junction separated from the isolator.

[0018] According to an eighth aspect of the present invention, in the semiconductor device of the second aspect, the second semiconductor layer is provided in the fourth semiconductor layer, the first semiconductor layer includes a pair of first semiconductor layers being formed in the second semiconductor layer, and the pair of first semiconductor layers function as a contact with respect to the second semiconductor layer.

[0019] According to a ninth aspect of the present invention, a semiconductor device comprises: a substrate at least having an insulative surface; a semiconductor film provided on the surface of the substrate, having at least one pn junction extending in a thickness direction of the substrate, the at least one pn junction including a pn junction which is applied with voltage; and a metallic compound layer selectively formed on the semiconductor film, being a compound of the semiconductor film and metal. In the semiconductor device, a maximum value of a distance between at least the pn junction which is applied with voltage and a boundary between the metallic compound layer and the semiconductor film is not more than 2 μm , when a direction from the boundary to the semiconductor film along the surface of the substrate is taken as a positive direction.

[0020] According to a tenth aspect of the present invention, the semiconductor device of the ninth aspect further comprises a mask provided on the at least one pn junction for preventing combination of the at least one pn junction with metal of the semiconductor film.

[0021] According to an eleventh aspect of the present invention, in the semiconductor device of the tenth aspect, the mask has the same structure as a gate of a MOS transistor to be formed on the semiconductor film in a thickness direction thereof.

[0022] According to a twelfth aspect of the present invention, a resistor comprises: a substrate at least having an insulative surface; a first semiconductor layer of a first conductivity type provided on the surface of the substrate; an insulative isolator formed on a surface of the first semiconductor film on the far side from the substrate, separately from the surface of the substrate; and a second semiconductor layer of a second conductivity type opposite to the first conductivity type formed in the first semiconductor layer, the second semiconductor layer forming a pn junction in conjunction with the first semiconductor layer, the pn junction extending from the surface of the first semiconductor layer to the surface of the substrate and being separated from the isolator.

[0023] According to a thirteenth aspect of the present invention, the resistor of the twelfth aspect further comprises a pair of third semiconductor layers of the second conductivity type formed in the second semiconductor layer, having an impurity concentration higher than that of the second semiconductor layer.

[0024] According to a fourteenth aspect of the present invention, the resistor of the thirteenth aspect further comprises a gate electrode covering the pn junction.

[0025] According to a fifteenth aspect of the present invention, the resistor of the thirteenth aspect further comprises a cover having an insulative surface in contact with the portion of the pn junction separated from the isolator.

[0026] According to a sixteenth aspect of the present invention, a method of manufacturing a semiconductor device comprises the steps of: (a) providing on an insulator a pn junction formed by a first semiconductor layer of a first conductivity type and a second semiconductor layer of a second conductivity type opposite to the first conductivity type, the pn junction extending from surfaces of the first and second semiconductor layers to the insulator, and providing an insulative isolator on the surfaces of the first and second semiconductor layers on the far side from the insulator, separately from the pn junction and the insulator; (b) forming a pair of third semiconductor layers in the first semiconductor layer as first source/drain layers, the third semiconductor layers having the second conductivity type and an impurity concentration higher than that of the second semiconductor layer; (c) forming a pair of fourth semiconductor layers in the second semiconductor layer as second source/drain layers, the fourth semiconductor layers having the first conductivity type and an impurity concentration higher than that of the first semiconductor layer; and (d) forming an insulating film on the pn junction and a pair of the first and second source/drain layers.

[0027] According to a seventeenth aspect of the present invention, in the method of the sixteenth aspect, the insulating film is formed in the step of forming gate insulating films of MOS transistors of conductivity types different from each other, the MOS transistors each having the first and second source/drain layers.

[0028] According to an eighteenth aspect of the present invention, in the method of the sixteenth aspect, the insulating film is formed in the step of forming sidewalls of gate electrodes of MOS transistors of conductivity types different from each other, the MOS transistors each having the first and second source/drain layers.

[0029] According to a nineteenth aspect of the present invention, a method of manufacturing a semiconductor device comprises the steps of: (a) providing on an insulator a pn junction formed by a first semiconductor layer and a second semiconductor layer of a conductivity type different from that of the first semiconductor layer, the pn junction extending from a surface of the first and second semiconductor layers to the insulator, and providing an insulative isolator on the surface of the first and second semiconductor layers on the far side from the insulator, separately from the insulator, the insulative isolator having an opening for exposing the pn junction; (b) forming a semiconductor element having a gate on the first semiconductor layer; (c) forming a mask which covers the pn junction at the opening and exposes at least part of the surface of the first and second semiconductor layers at the opening; and (d) combining the surface of the first and second semiconductor layers which is exposed with metal.

[0030] According to a twentieth aspect of the present invention, in the method of the nineteenth aspect, the steps (b) and (c) are performed by the same process.

[0031] In the semiconductor device according to the first or second aspect, the defect density is very low at a position not more than 2 μm from the boundary between the isolator and the semiconductor film, or a position where the isolator is not formed. This allows great reduction of the leakage current at the pn junction formed at the position.

[0032] The semiconductor device according to the third aspect can improve the flexibility in layout of the semiconductor device.

[0033] In the semiconductor device according to the fourth aspect, a diode with reduced leakage current can be obtained.

[0034] In the semiconductor device according to the fifth aspect, a CMOS transistor with reduced leakage current can be obtained.

[0035] In the semiconductor device according to the sixth or seventh aspect, it is possible to prevent the second and fourth semiconductor layer from being silicided when siliciding the first and third semiconductor layers.

[0036] In the semiconductor device according to the eighth aspect, a resistor with reduced leakage current can be obtained.

[0037] In the semiconductor device according to the ninth aspect, the defect density is very low at a position not more than 2 μm from the boundary between the metallic compound and the semiconductor film. This allows great reduction of the leakage current at the pn junction formed at the position.

[0038] In the semiconductor device according to the tenth aspect, the pn junction is prevented from being shorted.

[0039] In the semiconductor device according to the eleventh aspect, it is possible to improve flatness of the interlayer insulating film to be formed on the semiconductor layer.

[0040] In the resistor according to the twelfth to fourteenth aspects, the pn junction is formed separately from the isolator, and the third semiconductor layer functions as a contact with respect to the resistor formed by the second semiconductor layer. Therefore, a resistor with reduced leakage current can be obtained.

[0041] In the resistor according to the fifteenth aspect, the first and second semiconductor layers can be prevented from being shorted even with silicidation performed.

[0042] With the method according to the sixteenth aspect, the semiconductor device of the sixth aspect can be manufactured.

[0043] With the method according to the seventeenth or eighteenth aspect, the semiconductor device of the sixth aspect can be manufactured easily.

[0044] With the method according to the nineteenth aspect, the semiconductor device of the eleventh aspect can be manufactured.

[0045] With the method according to the twentieth aspect, the semiconductor device of the eleventh aspect can be manufactured.

[0046] Consequently, the present invention is directed to a semiconductor device for controlling where the pn junction is positioned and suppressing occurrence of the leakage current.

[0047] These and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0048] FIG. 1 is a sectional view showing a basic idea of the present invention;

[0049] FIG. 2 is an explanatory graph of the basic idea of the present invention;

[0050] FIGS. 3 through 5 are plan views showing the basic idea of the present invention;

[0051] FIG. 6 is a sectional view showing the basic idea of the present invention;

[0052] FIG. 7 is an explanatory graph of the basic idea of the present invention;

[0053] FIGS. 8 through 11 are plan views showing the basic idea of the present invention;

[0054] FIG. 12 is a plan view showing a structure of a semiconductor device according to a first preferred embodiment of the present invention;

[0055] FIG. 13 is a sectional view showing the structure of the semiconductor device according to the first preferred embodiment;

[0056] FIG. 14 is a plan view showing a structure of a semiconductor device according to a second preferred embodiment of the present invention;

[0057] FIG. 15 is a sectional view showing the structure of the semiconductor device according to the second preferred embodiment;

[0058] FIG. 16 is an enlarged sectional view showing a part of FIG. 15;

[0059] FIG. 17 is a plan view showing a structure of a semiconductor device according to a third preferred embodiment of the present invention;

[0060] FIG. 18 is a sectional view showing the structure of the semiconductor device according to the third preferred embodiment;

[0061] FIGS. 19 through 21 are sectional views showing a method of forming the semiconductor device according to the third preferred embodiment in sequential order of steps;

[0062] FIG. 22 is a plan view showing a structure of a semiconductor device according to a fourth preferred embodiment of the present invention;

[0063] FIG. 23 is a sectional view showing the structure of the semiconductor device according to the fourth preferred embodiment;

[0064] FIG. 24 is a plan view showing another structure of the semiconductor device according to the fourth preferred embodiment;

[0065] FIG. 25 is a sectional view showing another structure of the semiconductor device according to the fourth preferred embodiment;

[0066] FIG. 26 is a plan view showing still another structure of the semiconductor device according to the fourth preferred embodiment;

[0067] FIG. 27 is a sectional view showing still another structure of the semiconductor device according to the fourth preferred embodiment;

[0068] FIGS. 28 and 29 are sectional views showing a method of forming a semiconductor device according to a fifth preferred embodiment of the present invention in sequential order of steps;

[0069] FIGS. 30 and 31 are sectional views showing a method of forming another semiconductor device according to the fifth preferred embodiment in sequential order of steps;

[0070] FIGS. 32 through 34 are sectional views showing a structure of a resistor according to the fifth preferred embodiment;

[0071] FIG. 35 is a plan view showing a structure of a semiconductor device according to a sixth preferred embodiment of the present invention;

[0072] FIG. 36 is a sectional view showing the structure of the semiconductor device according to the sixth preferred embodiment;

[0073] FIGS. 37 through 39 are sectional views showing another structure of the semiconductor device according to the sixth preferred embodiment;

[0074] FIG. 40 is a plan view showing a structure of a semiconductor device according to a seventh preferred embodiment of the present invention;

[0075] FIG. 41 is a sectional view showing the structure of the semiconductor device according to the seventh preferred embodiment;

[0076] FIG. 42 is a sectional view showing another structure of the semiconductor device according to the seventh preferred embodiment;

[0077] FIG. 43 is a plan view showing a structure of a semiconductor device according to an eighth preferred embodiment of the present invention;

[0078] FIG. 44 is a sectional view showing the structure of the semiconductor device according to the eighth preferred embodiment;

[0079] FIG. 45 is sectional view showing another structure of the semiconductor device according to the eighth preferred embodiment;

[0080] FIGS. 46 through 51 are sectional views showing a first method of forming a partial isolator in sequential order of steps;

[0081] FIGS. 52 through 56 are sectional views showing a second method of forming a partial isolator in sequential order of steps;

[0082] FIGS. 57 through 60 are sectional views showing a third method of forming a partial isolator in sequential order of steps;

[0083] FIG. 61 is a sectional view showing an effect of the partial isolator obtained by the third method; and

[0084] FIG. 62 is a sectional view showing a structure of a conventional CMOS transistor.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Basic Idea of the Invention

[0085] A basic idea of the present invention will be described below before explaining preferred embodiments of the present invention. Of course, the basic idea falls within the scope of the present invention.

[0086] In the present invention, a pn junction is formed at a position where the defect density is low so as to reduce the leakage current. To reduce the defect density at the position where the pn junction is to be formed in the present invention, an influence of stress should be considered. For instance, formation of a partial isolator on a surface of a semiconductor will lead to an increase in stress on the surface of the semiconductor at a position away from the partial isolator, resulting in an increase in the defect density. Stress may be increased also in a semiconductor having its surface combined with metal such as silicided silicon. Thus, fixation of a defect or gettering of an impurity occurs.

[0087] Accordingly, the present invention is directed to provide a semiconductor device in which the defect density is low at a pn junction by forming the pn junction away from a position where stress is generated or in the vicinity of a position where stress is generated.

[0088] FIG. 1 is a sectional view showing a structure in the vicinity of the partial isolator 40. The N⁻ type semiconductor layer 10 and the P⁻ type semiconductor layer 20 form any one of pn junctions J10a, J10b, J10c and J10d. The pn junctions J10a to J10d have one end on a surface of the insulator 9, respectively, and extend in the thickness direction of a semiconductor film formed by the semiconductor layers 10 and 20. The insulative partial isolator 40 is formed at least on a surface of the semiconductor layer 10 on the far side from the insulator 9, separately from the insulator 9.

[0089] On a boundary between the semiconductor film formed by the semiconductor layers 10, 20 and the partial isolator 40, the position nearest to the semiconductor layer 20 or the position most distant from the semiconductor layer 10 is defined as an end of the partial isolator 40. A direction from the end toward the partial isolator 40 in parallel to the surface of the insulator 9 is taken as a positive direction and a distance from the end is indicated by d. Generally speaking, the distance d may be understood as extending from a so-called active region obtained by dividing the semiconductor layers 10 and 20 by the partial isolator 40 toward the partial isolator 40.

[0090] FIG. 2 is a graph showing the dependence of the defect density of the semiconductor layers 10 and 20 on the distance d. As understood from the graph, the defect density suddenly increases when the value d exceeds 2 μ m. It is considered that formation of the partial isolator 40 causes stress on the semiconductor layers 10 and 20, resulting in such an increase in the defect density.

[0091] Referring to FIG. 1, the value δ represents 2 μ m. The leakage current is very low in the case that the semiconductor layers 10 and 20 form the pn junction J10a where a maximum value da of the distance d is not more than the value 6. However, reduction of the leakage current cannot be expected in the case that the semiconductor layers 10 and 20 form the pn junction J10b where a maximum value db of the distance d exceeds the value 6. It can be said that there is an effect of reducing the leakage current compared to the case that the semiconductor layers 10 and 20 form the pn junction J10c where even a minimum value of the distance d exceeds the value δ .

[0092] The pn junction J10d is at a position where a maximum value of the distance d is negative. This is the case that the pn junction J10d is not positioned under the partial isolator 40 but in the active region as a whole. It is needless to say that the leakage current is very low also at the pn junction J10d.

[0093] As described above, the two semiconductor layers and the partial isolator are designed to have such positional relationship that satisfies a condition in which a pn junction is positioned in a range of distance not more than 2 μ m from the end of the partial isolator in the above described direction, in other words, a condition in which a maximum value of a distance between the pn junction and the boundary between the partial isolator and the semiconductor film made by the two semiconductor layers having conductivity types different from each other is not more than 2 μ m, seeing a direction from the boundary toward the partial isolator as a positive direction. This enables to greatly reduce the leakage current at the pn junction.

[0094] FIG. 3 is a plan view showing a structure where active regions 31a and 31b is exposed by a partial isolator 45. The semiconductor layers 10 and 20 are positioned at the back of the drawing. A boundary M1 shown by chain lines in the drawing indicates a position 2 μ m from the active regions 31a and 31b.

[0095] The semiconductor layers 10 and 20 are in contact with an insulator not shown (corresponding to the insulator 9 in FIG. 1) and form a pn junction J41 or J42. Since both of the pn junctions J41 and J42 are positioned on the side of the active regions 31a and 31b with respect to the boundary M1, the leakage current at J41 and J42 can be reduced. The pn junction J41 is covered by the partial isolator 45 without being exposed in the active regions 31a and 31b, while the pn

junction **J42** is exposed in the active regions **31a** and **31b**. As described above, a portion of the pn junction **J42** exposed in the active regions **31a** and **31b** represents the case that the distance d is a negative value in view of FIGS. 1 and 2.

[0096] FIG. 4 is a plan view showing the case that the active regions **31a** and **31b** are separated from each other by $2\delta=4\ \mu\text{m}$. Boundaries **M1a** and **M1b** are defined at a position $\delta=2\ \mu\text{m}$ from the active regions **31a** and **31b**, respectively. The semiconductor layers **10** and **20** form either of pn junctions **J43** and **44** which extend from the partial isolator **45** to the insulator **9**. Since the pn junction **J43** is positioned on the side of the active region **31b** with respect to the boundary **M1b**, the leakage current at the pn junction **J43** can be reduced. In the case that the semiconductor layers **10** and **20** form the pn junction **J44**, however, the pn junction **J44** is distant from the active regions **31a** and **31b** at a position A with respect to the boundaries **M1a** and **M1b**. Therefore, the leakage current at the position A cannot be reduced. Consequently, such a pn junction that straddles the boundaries **M1a** and **M1b** as described above is not preferable for reducing the leakage current.

[0097] FIG. 5 is a plan view exemplifying the case that sides of the active regions **31a** and **31b** are not opposed to each other. The boundaries **M1a** and **M1b**, positioned $21m$ from the active regions **31a** and **31b**, respectively, overlap between two corners of the active regions **31a** and **31b** most proximate to each other, and form one boundary **M1** as a whole. The semiconductor layers **10** and **20** form either of pn junctions **J45** and **J46** which extend from the partial isolator **45** to the insulator **9**. Even when the active regions **31a** and **31b** are not lined in a direction that the pn junction **J45** extends, the pn junction **J45** is positioned on either side of the active region **31a** or **31b** with respect to the boundary **M1**. Therefore, the leakage current at the pn junction **J45** can be reduced.

[0098] In the case that the semiconductor layers **10** and **20** form the pn junction **J46**, however, the active regions **31a** and **31b** are not lined in a direction that the pn junction **J46** extends. The pn junction **J46** is nearer to the active region **31b** than the boundary **M1b** at a portion, whereas it is more distant from the active region **31a** than the boundary **M1a** at another portion. Therefore, it is more preferable to form the pn junction **J45** rather than **J46** for reducing the leakage current.

[0099] FIG. 6 is a sectional view showing a structure in which a semiconductor having its surface combined with metal forms a pn junction. The N^- type semiconductor layer **10** and the P^- type semiconductor layer **20**, e.g. mainly made of silicon, form either one of pn junctions **J50a** and **J50b**. A silicide film **20s** is formed at least on a part of a surface of the P^- type semiconductor layer **20**, separately from the insulator **9**. The pn junctions **50a** and **50b** have one end on the surface of the insulator **9**, respectively, and extend in the thickness direction of a semiconductor film formed by the semiconductor layers **10** and **20**.

[0100] On a boundary between the silicide film **20s** and the semiconductor film formed by the semiconductor layers **10** and **20**, the position nearest to the semiconductor layer **20** or the position most distant from the semiconductor layer **10** is defined as an end of the silicide film **20s**. A direction from the end toward the semiconductor layer **10** in parallel to the surface of the insulator **9** is taken as a positive direction and a distance from the end is indicated by t . Generally speaking, the distance t may be understood as extending from the silicide film **20s** toward the semiconductor layer **10**.

[0101] FIG. 7 is a graph showing the dependence of the defect density of the semiconductor layers **10** and **20** on the distance t . As understood from the graph, the defect density suddenly increases when the value t exceeds $2\ \mu\text{m}$. The reason is considered as follows: as described above, stress generated inside the silicide film **20s** with formation of the film gives rise to the fixation of a defect and gettering of an impurity, which suppresses occurrence of crystal defect within a range around the silicide film **20s**.

[0102] Referring to FIG. 6, the value τ represents $2\ \mu\text{m}$. In the case that the semiconductor layers **10** and **20** form the pn junction **J50a**, the leakage current is very low at **J50a**. This is because, even at the distance $t=t_a$ where the pn junction **50a** is most distant from the silicide film **20s**, the relation $t_a \geq \tau$ is satisfied. However, reduction of the leakage current cannot be expected in the case that the semiconductor layers **10** and **20** form the pn junction **J50b** where a maximum value t_b of the distance t exceeds the value τ .

[0103] The pn junction **50a** has such a form that the distance t has a negative value in the vicinity of the insulator **9**. The effect of the present invention can be obtained even with a pn junction having a position where $t < 0$ on the condition that the pn junction is not in contact with the silicide film **20s** to avoid short circuit as the pn junction **50a**.

[0104] As described above, the two semiconductor layers and the silicide film are designed to have such positional relationship that satisfies a condition in which a pn junction is positioned in a range of distance not more than $2\ \mu\text{m}$ from the end of the silicide film in the above described direction, in other words, a condition in which a maximum value of a distance, along a surface of a semiconductor film made by the two semiconductor layers forming a pn junction, between the pn junction and the boundary between the semiconductor film and the silicide film formed on the surface of the semiconductor film is not more than $2\ \mu\text{m}$, seeing a direction from the boundary toward the surface of the semiconductor film on which the silicide film is not formed as a positive direction. This enables to greatly reduce the leakage current at the pn junction. To reduce the leakage current, it is desirable that the above condition should be satisfied at all of pn junctions to which voltage is applied, at least including a pn junction formed by a P well and an N well.

[0105] FIG. 8 is a plan view showing the positional relationship between the silicide film and a pn junction. The semiconductor layers **10** and **20** form a pn junction **J51** or **J52**. The silicide film **20s** is selectively provided on the surface of the semiconductor layer **20**. A boundary **N1** shown by chain lines in the drawing indicates a position $2\ \mu\text{m}$ from the silicide film **20s**.

[0106] Since the semiconductor layers **10** and **20** are in contact with an insulator not shown (corresponding to the insulator **9** in FIG. 6) and the pn junction **J51** is positioned on the side of the silicide film **20s** with respect to the boundary **N1**, the leakage current at **J51** is reduced. Since the pn junction **J52** is positioned on the side of the semiconductor layer **10** with respect to the boundary **N1**, reduction of the leakage current at **J52** cannot be expected.

[0107] FIG. 9 is a plan view showing the case that two silicide films are separated from each other by $2\tau=4\ \mu\text{m}$. Boundaries **N1a** and **N1b** are defined at a position $\tau=2\ \mu\text{m}$ from the silicide films shown separately on top and bottom of the drawing, respectively. The semiconductor layers **10** and **20** form a pn junction **J53** shown by solid line or a pn junction **J54** shown by dashed lines.

[0108] In the case that the pn junction J53 is formed, the silicide films shown separately on top and bottom of the drawing are silicide films 20s and 10s formed on the surface of the semiconductor layers 20 and 10, respectively. Since the pn junction J53 is positioned on the side of the silicide film 10s with respect to the boundary N1b, the leakage current at J53 is reduced. On the other hand, in the case that the pn junction J54 is formed, the silicide films shown separately on top and bottom of the drawing are both the silicide film 20s formed on the semiconductor layer 20 (reference character 20s in parenthesis in the silicide film shown on bottom of the drawing applies to the case that the pn junction J54 shown by dashed lines is formed). Since the pn junction J54 is distant from the silicide films 20s at a position C with respect to the boundaries N1a and N1b, the leakage current at the position C cannot be reduced. Consequently, such a pn junction that straddles the boundaries N1a or N1b is not preferable for reducing the leakage current.

[0109] FIG. 10 is a plan view exemplifying the case that sides of the silicide films are not opposed to each other. The boundaries N1a and N1b, positioned 2 μm from the silicide films 10s and 20s formed on the semiconductor layers 10 and 20, respectively, overlap between two corners of the silicide films 10s and 20s most proximate to each other, and form one boundary N1 as a whole. The drawing exemplifies the case that either one of pn junctions J55 and J56 is formed to extend from the surface of the semiconductor film formed by the semiconductor layers 10 and 20 to the insulator 9. Even if the silicide films 10s and 20s are not lined in a direction that the pn junction J55 extends, the pn junction J55 is positioned on either side of the silicide film 10s or 20s with respect to the boundary N1. Therefore, the leakage current at the pn junction J55 is reduced.

[0110] In the case that the semiconductor layers 10 and 20 form the pn junction J56, however, the silicide films 10s and 20s are not lined in a direction that the pn junction J56 extends. The pn junction J56 is nearer to the silicide film 20s than the boundary N1b at a portion, whereas it is more distant from the silicide film 10s than the boundary N1a at another portion. Therefore, it is more preferable to form the pn junction J55 rather than J56 for reducing the leakage current.

[0111] A semiconductor element may or may not be formed on the active regions 31a and 31b. In addition, a semiconductor device having the silicide films 10s and 20s as electrodes may or may not be formed. Such loose restriction is desirable for improving the flexibility in layout of a semiconductor device.

[0112] FIG. 11 is a plan view exemplifying the case that a silicide film is formed which does not serve as an electrode of the semiconductor device. The semiconductor layers 10 and 20 form a pn junction J61. A partial isolator 45 covers part of the surfaces of the semiconductor layers 10 and 20 on which silicide films 10s₁ to 10s₄ are not formed with the exception to be described later. In other words, the silicide films 10s₁ to 10s₄ are formed on the surface of the semiconductor layer 10 at a position selectively exposed by the partial isolator 45 with the exception to be described later.

[0113] The silicide films 10s₁, 10s₃ and 10s₄ do not serve as electrodes of the semiconductor device, and the silicide film 10s₂ functions as source/drain of a transistor Q6. The exception mentioned above is the semiconductor layer 10 below a gate G6 of the transistor Q6. Though not covered by the partial isolator 45, this part of the semiconductor layer 10 is covered by the gate G6, which is therefore not silicided.

[0114] In this way, the silicide films 10s₁, 10s₃ and 10s₄ which do not serve as electrodes of the semiconductor device also contain the pn junction J61 in a region defined by a boundary N2 not more than 2 μm from the silicide films, thereby performing the function of reducing the leakage current.

[0115] Of course, the active regions 31a, 31b, the silicide films 10s and 20s do not need to be rectangular. A partial isolator may or may not be formed on the surfaces of the semiconductor layers 10 and 20 on which the silicide films 10s and 20s are not formed.

[0116] In view of the fact that the defect density is very low at a position within the range 2 μm from the end of the partial isolator or the silicide films, the above-described basic idea of the present invention employs a structure in which a pn junction is not positioned beyond the above position, thereby reducing the leakage current.

First Preferred Embodiment

[0117] FIG. 12 is a plan view showing a structure of a diode D1 being a semiconductor device according to the present embodiment. FIG. 13 is a sectional view taken along the line P1-P1 shown in FIG. 12. A P⁺ type semiconductor layer 20 is provided on the insulator 9.

[0118] A partial isolator 43 is provided on a surface of the semiconductor layer 20 on the far side from the insulator 9 in a hollow, substantially rectangular shape, for example, to divide an active region. Provided inside the hollow portion of the partial isolator 43 are a P⁺ type semiconductor layer 15, a P type semiconductor layer 14 having an impurity concentration lower than that of the semiconductor layer 15, an N type semiconductor layer 25 and an N⁺ type semiconductor layer 24 having an impurity concentration higher than that of the semiconductor layer 25, in this order from outside to inside, each of which has a hollow, substantially rectangular shape. All of the semiconductor layers 15, 14, 24 and 25 are in contact with the insulator 9, while being completely exposed on the side where the partial isolator 43 is positioned.

[0119] Provided over the semiconductor layers 14 and 25 is a gate G4 that opposes the semiconductor layers 14 and 25 with a gate insulating film (not shown) interposed therebetween. In addition, the semiconductor layers 14 and 25 are in contact with a surface of the insulator 9, while forming a pn junction J2 exposed on the side where the partial isolator 43 is positioned. The semiconductor layers 24 and 15 have a function of making contact with the n side and p side of the pn junction J2, respectively.

[0120] Since the pn junction J2 is separated from the partial isolator 43 with the semiconductor layer 15 interposed therebetween, the crystal defect is very small at the pn junction J2 and the leakage current at the diode D1 (reverse bias current) is very low, as described in Basic Idea of the Invention.

Second Preferred Embodiment

[0121] FIG. 14 is a plan view showing a structure of a diode D2 being a semiconductor device according to the present embodiment. FIG. 15 is a sectional view taken along the line P2-P2 shown in FIG. 14. A P type semiconductor layer 16 is provided on the insulator 9.

[0122] A partial isolator 45 is provided on a surface of the semiconductor layer 16 on the far side from the insulator 9, in a hollow, substantially rectangular shape, for example, to divide an active region. An N type semiconductor layer 17 is

selectively formed inside the hollow portion of the partial isolator **45** and forms a pn junction **J4** with the semiconductor layer **16**. The pn junction **J4** is in contact with the insulator **9**, while being exposed on the side where the partial isolator **45** is positioned. However, the pn junction **J4** is partly positioned under the partial isolator **45** (on the side of the insulator **9**).

[0123] Formed inside the semiconductor layer **17** is an N⁺ type semiconductor layer **28** that is in contact with the insulator **9** while being exposed on the side where the partial isolator **45** is positioned. Formed in the semiconductor layer **16** inside the hollow portion of the partial isolator **45** is a P⁺ type semiconductor layer **27** that is in contact with the insulator **9** while being exposed on the side where partial isolator **45** is positioned. The semiconductor layer **27** has the same P type conductivity as that of the semiconductor layer **16** and higher impurity concentration. The semiconductor layer **28** has the same N type conductivity as that of the semiconductor layer **16** and higher impurity concentration. Therefore, the semiconductor layers **28** and **27** have a function of making contact with the n side and p side of the pn junction **J4**, respectively.

[0124] FIG. **16** is an enlarged sectional view showing a region **B** in the vicinity of the pn junction **J4** positioned on the right side in FIG. **15**. Provided that a maximum value **d1** of a distance between the pn junction **J4** and a boundary between the partial isolator **45** and the semiconductor layer **17** is not more than 2 μm , the crystal defect at the pn junction **J4** is very small as described in Basic Idea of the Invention. This also applies to a portion of the pn junction **J4** which does not appear in FIG. **15**. As in the first preferred embodiment, the crystal defect is very small also at the pn junction **J4** positioned on the left in FIG. **15**, and the leakage current (reverse bias current) at the diode **D2** is very low.

Third Preferred Embodiment

[0125] FIG. **17** is a plan view showing a structure of a CMOS transistor **100** being a semiconductor device according to the present embodiment. FIG. **18** is a sectional view taken along the line P3-P3 shown in FIG. **17**.

[0126] The N⁻ type semiconductor layer **10** and the P⁻ type semiconductor layer **20** are formed on the insulator **9**. An end **10t** of the semiconductor layer **10** and an end **20t** of the semiconductor layer **20** form a pn junction **J5** that is in contact with the insulator **9** while being exposed on an opposite side to the insulator **9**.

[0127] Partial isolators **41** and **42** are provided on the surface of the semiconductor layers **16**, on the far side from the insulator **9**, respectively. Formed in an active region which is divided by the partial isolator **41** are a semiconductor element **Q1** including gates **G1** and **G2**, and a PMOS transistor **1**. Formed in an active region which is divided by the partial isolator **42** are a semiconductor element **Q2** including a gate **G3**, and an NMOS transistor **2**. There is a region **30** on which the pn junction **J5** and the ends **10t** and **20t** are partly exposed between the partial isolator **41** and **42**.

[0128] Referring to the PMOS transistor **1**, P⁺ type source/drain layers **11** and **12** are formed on the active region which is divided by the partial isolator **41**, and a gate electrode **13** is formed on the semiconductor layer **10** with a gate insulating film interposed therebetween. Referring to the NMOS transistor **2**, P⁺ type source/drain layers **21** and **22** are formed on the active region which is divided by the partial isolator **42**, and a gate electrode **23** is formed on the semiconductor layer **20** with a gate insulating film interposed therebetween. In the

interest of simplicity, the gate insulating films and sidewalls on sides of the gate electrodes **13** and **23** are omitted in FIG. **17**.

[0129] In the CMOS transistor **100** formed by the PMOS transistor **1** and the NMOS transistor **2**, the pn junction **J5**, formed by the end **20t** of the semiconductor layer **20** having the same P type conductivity as those of the source/drain layers **11** and **12** with lower impurity concentration and by the end **10t** of the semiconductor layer **10** having the same N type conductivity as those of the source/drain layers **21** and **22** with lower impurity concentration, is separated from both of the partial isolators **41** and **42**. Consequently, the crystal defect is very small at the pn junction **J5** as described in Basic Idea of the Invention, which enables to greatly reduce an abnormal leakage current compared to a CMOS transistor **200** shown in FIG. **62**.

[0130] Referring to FIGS. **17** and **18**, the region **30** where the pn junction **J5** is positioned is illustrated as a dummy region in which a semiconductor element is not formed. As described in the first and second preferred embodiments, however, it is possible to obtain the effect described in Basic Idea of the Invention also in the case that an element may be formed by a pn junction formed separately from a partial isolator or formed under the partial isolator with a distance not more than 2 μm .

[0131] FIGS. **19** to **21** are sectional views showing a method of forming the CMOS transistor **100** in sequential order of steps. A semiconductor film **3** made of single crystalline silicon is mounted on the insulator **9**. The insulator is made of an oxide layer, for example. Thereafter, an underlying oxide film **49** is formed entirely on a surface of the semiconductor film **3** that is on the far side from the insulator **9**. In addition, the partial isolators **41** and **42** are formed separately from the insulator **9**. A structure shown in FIG. **19** is thus obtained. Various methods of forming a partial isolator will be described later. U.S. patent application Ser. Nos. 09/466,934 and 09/639,953, the disclosures of which are herein incorporated by reference, disclose methods of forming a partial isolator applicable to the partial isolator of this specification.

[0132] Referring to FIG. **20**, the partial isolator **42** and the semiconductor film **3** which is divided by the partial isolator **42** and on which the NMOS transistor **2** is to be formed later are covered by a resist **81**. An ion implantation **61** with phosphorus or arsenic is carried out for the semiconductor film **3** using the resist **81** as a mask through the underlying oxide film **49**, or further through the partial isolator **41**. By means of the ion implantation **61**, a portion under the partial isolator **41** and the semiconductor film **3** which is divided by the partial isolator **41** and on which the PMOS transistor **1** is to be formed later form the N⁻ type semiconductor layer **10**.

[0133] Referring to FIG. **21**, the N⁻ type semiconductor layer **10** and the partial isolator **41** are covered by a resist **82**. An ion implantation **62** with boron is carried out for the semiconductor film **3** through the underlying oxide film **49**, or further through the partial isolator **42**. By means of the ion implantation **62**, a portion under the partial isolator **42** and the semiconductor film **3** which is divided by the partial isolator **42** and on which the NMOS transistor **2** is to be formed later form the P⁻ type semiconductor layer **20**.

[0134] Thereafter, the underlying oxide film **49** is removed and the gate insulating film, gate electrodes **13**, **23**, source/

drain layers 11, 12, 21 and 22 are formed by means of a well-known method, thereby obtaining a structure shown in FIG. 12.

Fourth Preferred Embodiment

[0135] FIG. 22 is a plan view showing a structure of a resistor R1 being a semiconductor device according to the present embodiment. FIG. 23 is a sectional view showing a cross section taken along the line P4-P4 shown in FIG. 22 and a cross section at a position which does not appear in FIG. 22. The former section is illustrated on the right, and the latter section on the left, adjacently to each other with a fracture portion Z interposed therebetween. The P⁻ type semiconductor layer 20 is formed on the insulator 9.

[0136] A partial isolator 44 is provided on a surface of the semiconductor layer 20 on the far side from the insulator 9, in a hollow, substantially rectangular shape, for example, to divide an active region. An N type semiconductor layer 25 is formed inside the hollow portion of the partial isolator 44 separately from the partial isolator 44. Provided in the semiconductor layer 25 are N⁺ type semiconductor layers 26a and 26b having the same conductivity type as that of the semiconductor layer 25 and higher impurity concentration. Therefore, the semiconductor layers 26a and 26b have a function of making contact with a resistive element formed by the semiconductor layer 25.

[0137] The semiconductor layers 20 and 25 form a pn junction J3 in the present embodiment.

[0138] Since the pn junction J3 is separated from the partial isolator 44, the conditions described in Basic Idea of the Invention are satisfied and the same effect is obtained. Of course, the leakage current can be reduced as far as the conditions described in Basic Idea of the Invention are satisfied, even when the semiconductor layer 25 is in contact with the partial isolator 44 and the pn junction J3 is partly formed under the partial isolator 44.

[0139] The above-described first to third preferred embodiments exemplify the case when there are semiconductor layers, one having a high impurity concentration and the other having a low impurity concentration in each of a pair of conductivity types different from each other, i.e., at least four kinds of semiconductor layers in total, and that a pn junction formed by the pair of semiconductor layers having lower impurity concentrations satisfies the conditions described in Basic Idea of the Invention. However, particularly in the case that a resistor is formed as a semiconductor device as in the present embodiment, the effect described in Basic Idea of the Invention can be obtained without necessarily requiring the above-described four kinds of semiconductor layers.

[0140] FIG. 24 is a plan view showing a structure of a resistor R11 being another semiconductor device according to the present embodiment. FIG. 25 is a sectional view taken along the line P41-P41 shown in FIG. 24. The resistor R11 has an N⁺ type semiconductor layer 251 in place of the N type semiconductor layer 25 in the resistor R1, and does not have the N⁺ type semiconductor layers 26a and 26b. Wirings 26c and 26d are provided separately on an upper surface of the N⁺ type semiconductor layer 251. The semiconductor layer 251 has an increased impurity concentration in order to make an ohmic contact between the wirings 26c and 26d.

[0141] On the other hand, there are few cases that a resistor is used solely in an integrated circuit. In many cases, a CMOS transistor is also formed, and thus, a PMOS transistor is also formed on the insulator 9. For instance, it may be understood

that the above-described four kinds of semiconductor layers are present in an integrated circuit on which the PMOS transistor 1 such as that shown on the left side in FIG. 23, for example, is mounted together with the resistor R1 shown on the right. Of course, it can be understood that the above-described four kinds of semiconductor layers are also present in an integrated circuit in which semiconductor layers forming the resistor have conductivity types opposite to those in the above case and on which the resistor and an NMOS transistor are mounted.

[0142] FIG. 26 is a plan view showing a structure of a resistor R2 being another semiconductor device according to the present embodiment. FIG. 27 is a sectional view taken along the line P5-P5 shown in FIG. 26. The resistor R2 has a structure in which the resistor R1 additionally comprises a gate electrode G5 that is opposed to the pn junction J3 and the semiconductor layer 25 with a gate insulating film (not shown) interposed therebetween. Such a structure, of course, can reduce the leakage current.

Fifth Preferred Embodiment

[0143] Silicidation of surfaces of the source/drain layers 11, 12, 21 and 22 in the CMOS transistor 100 shown in FIG. 17 would result in silicidation of surfaces of the ends 10t and 20t exposed in the region 30, causing conduction between the semiconductor layers 10 and 20. In order to prevent such a short circuit, it is preferable that an exposed pn junction formed separately from the partial isolators 41 and 42 as the pn junction J5 is covered with an insulator when performing silicidation.

[0144] FIG. 28 is a sectional view showing a structure of a semiconductor device according to the present embodiment in which the CMOS transistor 100 shown in FIG. 17 additionally comprises an insulating film 48 covering the region 30. A nitride film, an oxide film or a nitride film having an oxide film as an underlying layer, for example, may be used for the insulating film 48.

[0145] The insulating film 48, after being formed all over the structure shown in FIG. 17, may be remained only in the region 30 by patterning. Alternatively, it may be formed in the step of forming sidewalls of the gate electrodes 13 and 23, and thus, it can be made easily. For instance, the insulating film 48 may be remained by covering the region 30 with a mask when anisotropically etching an insulating film to be a material for a sidewall.

[0146] FIG. 29 is a sectional view showing a structure obtained by siliciding the CMOS transistor 100 constructed as shown in FIG. 28. It is possible to form silicide films 13s, 23s, 11s, 12s, 21s and 22s on the surfaces of the gate electrodes 13, 23 and the source/drain layers 11, 12, 21 and 22, respectively. However, the ends 10t and 20t are not exposed so that a silicide film that shorts the both ends is not formed.

[0147] When performing the silicidation, it is sufficient to provide a cover for covering the region 30 with a material having an insulative surface that is in contact with the ends 10t and 20t. The cover does not need to be insulative as a whole.

[0148] FIG. 30 is a sectional view showing a structure of another semiconductor device according to the present embodiment in which the CMOS transistor 100 shown in FIG. 17 additionally comprises a dummy gate DG covering the region 30. The dummy gate DG has a gate insulating film thereunder similarly to the gate electrodes 13 and 23 so that the ends 10t and 20t are not shorted. Such a structure can be formed in the step of forming the gate insulating film and that

of forming the gate electrodes **13** and **23**, and thus, it can be made easily. For instance, the gate electrodes **13**, **23** and the dummy gate DG are made of polysilicon.

[0149] FIG. **31** is a sectional view showing a structure obtained by siliciding the CMOS transistor **100** constructed as shown in FIG. **30**. Silicide films **13s**, **23s**, DGs, **11s**, **12s**, **21s** and **22s** can be formed on the surfaces of the gate electrodes **13**, **23**, the dummy gate DG, and the source/drain layers **11**, **12**, **21** and **22**, respectively. However, the ends **10t** and **20t** are not exposed so that a silicide film that shorts the both ends is not formed.

[0150] As described above, when performing silicidation, it is preferable to provide the above-noted cover on the pn junction formed separately from the partial isolator. This is true for the pn junction **J3** of the resistor **R1**, and the pn junction **J3** is prevented from being shorted at silicidation. It is sufficient that the insulating film **48** at least covers the junction **J3**. As shown in FIG. **32**, after being covered with the insulating film **48**, the semiconductor layer **26** may be exposed by making an opening on the insulating film **48**. Alternatively, an opening may be previously made on a portion of the insulating film **48** to be silicided later as shown in FIG. **33**. Of course, the insulating film **48** may be in contact with the partial isolator **44** as shown in FIG. **34**. Referring to the pn junction **J42** shown in FIG. **3**, it is preferable to provide the above-noted cover for covering a portion of the pn junction **J42** exposed in the active regions **31a** and **31b**.

[0151] Referring to a pn junction covered by a partial isolator, however, the pn junction **J41** shown in FIG. **3**, the pn junction **J43** shown in FIG. **4** and the pn junction **J45** shown in FIG. **5**, for example, are formed on the side of the insulator **9** with respect to the partial isolator **45**. Thus, the junctions are not exposed so that there is an advantage that the above-noted cover is unnecessary. Moreover, even in the case that a wiring is laid on such a pn junction, the presence of the partial isolating allows reduction in parasitic capacitance of the wiring.

Sixth Preferred Embodiment

[0152] FIG. **35** is a plan view exemplifying an arrangement of a pn junction and a silicide film according to the present embodiment. FIG. **36** is a sectional view taken along the line P6-P6 shown in FIG. **35**. The semiconductor layers **10** and **20** function as, for example, an N well and a P well, respectively, and form a pn junction **J57**. A partial isolator **72** having opening windows **32** and **33** is formed on the semiconductor layers **10** and **20**. The opening window **32** is provided to straddle the pn junction **J57**, and the opening window **33** is provided on the semiconductor layer **10**.

[0153] The semiconductor layers **10** and **20**, silicided at the opening windows **32** and **33**, have the silicide layers **10s** and **20s**, respectively, on their surfaces. The opening window **32** is formed to straddle the pn junction **J57**. It is necessary to prevent short circuit of the silicide films **10s** and **20s** in order to prevent short circuit in the pn junction **57**. Thus, in order to prevent short circuit of the silicide films **10s** and **20s**, an insulating film **71** to be a mask for preventing silicidation is provided on the pn junction **J57** at the opening window **32**. Silicidation is thereafter performed.

[0154] Referring to FIG. **36**, if at least one of the distance **t1** from an end of the silicide film **10s** to the pn junction **J57** in a direction toward the silicide film **20s** and the distance **t2** from an end of the silicide film **20s** to the pn junction **J57** in a direction toward the silicide film **10s** is not more than $r=2\text{ }\mu\text{m}$,

the effect of the present invention is obtained. To reduce the leakage current, it is preferable that the relation $t1 \leq r$ or $t2 \leq r$ should be satisfied at all the positions where the pn junction **J57** extends. When regions $2\text{ }\mu\text{m}$ from the silicide films **10s** and **20s**, respectively, are formed to be connected to each other, the silicide films **10s**, **20s** and the insulating film **71** may not necessarily continue in the extending direction of the pn junction **J57**. FIG. **35** shows the case that the silicide films **10s** and **20s** are adjacent to each other in the extending direction of the pn junction **J57** to the extent that the boundaries **N3** $2\text{ }\mu\text{m}$ from the silicide film **10s** and **20s**, respectively, are connected to each other. Thus, in this case, the insulating film **71** does not need to be provided continuously in the extending direction of the pn junction **J57**.

[0155] In the present embodiment, the insulating film **71** for covering the pn junction **J57** is provided to the opening window **32** opened by the partial isolator **72** to straddle the pn junction **J57**. The semiconductor layers **10** and **20** are silicided using the insulating film **71** as a mask, which allows reduction of the leakage current at the pn junction **J57**.

[0156] A dummy gate may be employed as a mask for preventing the pn junction from silicidation in place of an insulating film. FIG. **37** is a sectional view taken along the line P3-P3 in FIG. **17**, which shows the similar structure to that shown in FIG. **31**. The difference from the structure of FIG. **31** lies in that the dummy gate DG does not cover all of the region **30**, nor the semiconductor layers **10t**, **20t**, and that an insulating film **77** covers the semiconductor layer **20t** at the region **30**. FIG. **37** exemplifies the case that a sidewall is added to the dummy gate DG.

[0157] Silicidation is performed using such dummy gate DG and insulating film **77**, so that the silicide film **10s** is formed on the surface of the semiconductor layer **10t** at the region **30**. If the distance between the silicide film **10s** and the pn junction **J5** is not more than $2\text{ }\mu\text{m}$, a silicide film does not need to be formed on the semiconductor layer **20t** as in FIG. **37**, which allows reduction in parasitic capacitance.

[0158] Of course, the semiconductor layer **20t** may be covered by the dummy gate DG as shown in FIG. **38**, or alternatively, both of the pn junction **J5** and the semiconductor layer **20t** may be covered by the insulating film **77** as shown in FIG. **39**.

Seventh Preferred Embodiment

[0159] FIG. **40** is a plan view exemplifying an arrangement of a pn junction and a silicide film according to the present embodiment. FIGS. **41** and **42** are sectional views showing two exemplary sections at the position taken along the line P7-P7 shown in FIG. **40**. The semiconductor layers **10** and **20** function as, for example, an N well and a P well, respectively, and form a pn junction **J58**. A partial isolator **73** is formed on the semiconductor layers **10** and **20**, and exposes the semiconductor layer **10** and the silicide film **10s** at an opening window **34**.

[0160] The opening window **34** is selectively covered by a mask **74**. FIG. **41** and FIG. **42** show the cases of employing an insulating film **74a** and a dummy gate **74b**, respectively, as the mask **74**.

[0161] Referring to FIG. **41**, the insulating film **74a** selectively exposes the semiconductor layer **10** in conjunction with the partial isolator **73**, similarly to the insulating film **71** shown in FIG. **36** according to the sixth preferred embodiment, and functions as a mask for preventing silicidation.

[0162] The silicide film does not need to be formed on the entire surface of a semiconductor layer which is not covered by a partial isolator. It is sufficient if the silicide film is formed at such a position that the pn junction is provided in a range of distance 2 μ m from the position. Such a selective silicidation of the surface of the semiconductor layer reduces an area to be silicided. This allows reduction in parasitic capacitance between the silicide film and another conductor such as wiring provided over the silicide film.

[0163] Referring to FIG. 42, before silicidation, the dummy gate 74b includes: an insulating film 743 formed in the step of forming a gate insulating film of another MOS transistor not shown; and a conductive film 742 formed in the step of forming a gate electrode of the MOS transistor. When siliciding the semiconductor layer 10, the dummy gate 74b functions as a mask for preventing silicidation of the semiconductor layer 10, while a silicide film 741 is formed on a surface of the conductive film 742. This allows the gate of the MOS transistor and the dummy gate 74b to have the same structure in the thickness direction. Comparing to the insulating film 74a, the use of the dummy gate 74b as a mask at silicidation of the semiconductor layer 10 allows the structure on the semiconductor layer 10 to have a uniform thickness, whether the semiconductor layer 10 functions as a dummy or is provided with the MOS transistor. Accordingly, it is possible to improve flatness of an interlayer insulating film to be formed on the semiconductor layer 10.

Eighth Preferred Embodiment

[0164] FIG. 43 is a plan view exemplifying an arrangement of a pn junction and a silicide film according to the present embodiment. FIGS. 44 and 45 are sectional views showing two exemplary sections at the position taken along the line P8-P8 shown in FIG. 43. The semiconductor layers 10 and 20 function as, for example, an N well and a P well, respectively, and form a pn junction J59. A partial isolator 75 having opening windows 35 and 36 is formed on the semiconductor layers 10 and 20.

[0165] A PMOS transistor Q4 and an NMOS transistor Q5 are formed on the semiconductor layers 10 and 20, respectively, at the opening 36. The opening window 35 is covered by a mask 76 except its edge.

[0166] The semiconductor layers 10 and 20 can be seen from the partial isolator 75 through the opening window 35 which serves as a dummy, on which no semiconductor device is formed. Any dummy of any size and shape may be employed. In FIG. 43, the square opening window 35 is employed, and a plurality of the opening windows are provided in a matrix form except for the positions occupied by the transistors Q4 and Q5. The arrangement of the opening windows 35 with such a pattern can easily be realized by automatic pattern arrangement. However, needless to say the opening window 36, at which the transistors Q4 and Q5 are formed, the opening windows 35 are not provided to straddle the pn junction J59 in the present embodiment.

[0167] FIG. 44 and FIG. 45 show the cases of employing an insulating film 76a and a dummy gate 76b, respectively, as the mask 76.

[0168] Referring to FIG. 44, the insulating film 76a selectively exposes the semiconductor layer 10 in conjunction with the partial isolator 75, similarly to the insulating film 71 shown in FIG. 36 according to the sixth preferred embodiment, and functions as a mask for preventing silicidation. To obtain the same effect as in the seventh preferred embodi-

ment, the opening window 35 may be formed at such a position that the pn junction is provided in a range of distance 21m from the position.

[0169] Referring to FIG. 45, before silicidation, the dummy gate 76b includes: an insulating film 763 formed in the step of forming gate insulating films of the transistors Q4 and Q5; a conductive film 762 formed in the step of forming gate electrodes of the transistors; and a sidewall 764 formed in the step of forming sidewalls of the transistors. When siliciding the semiconductor layers 10 and 20, the dummy gate 76b functions as a mask for preventing silicidation of the semiconductor layers 10 and 20, while a silicide film 761 is formed on a surface of the conductive film 762. The dummy gate 76b, when used as a mask for preventing silicidation of the semiconductor layers 10 and 20, can be formed in the same height as gates G7 and G8 of the transistors Q4 and Q5. Accordingly, it is possible to improve flatness of the interlayer insulating film as in the seventh preferred embodiment.

Formation of a Partial Isolator

[0170] Various methods of forming a partial isolator will be described below. The partial isolators explained in the above preferred embodiments may be formed by the following methods.

[0171] FIGS. 46 through 51 are sectional views showing a first method of forming a partial isolator in sequential order of steps. First, a semiconductor substrate 501 is prepared, and a buried oxide film 90 is formed therein using a method such as SIMOX method accompanied by an ion implantation with oxygen, or the like. The buried oxide film 90 divides the semiconductor substrate 501 in the thickness direction thereof into semiconductor layers 501a and 501b. The structure shown in FIG. 46 is thus obtained. For instance, the buried oxide film 90 and the semiconductor layer 501b correspond to the above-described insulator 9 and the semiconductor film 3 and, for example, are set to be 100 to 400 nm and 50 to 200 nm in thickness, respectively. Of course, a structure shown in FIG. 32 may be obtained by using a bonding method.

[0172] Next, an oxide film 502 having a thickness of 20 nm and a nitride film 503 having a thickness of approximately 200 nm, for example, are deposited on the semiconductor layer 501b. Further formed thereon is a resist 504 that has an opening, thereby obtaining a structure shown in FIG. 47. The oxide film 502 may be formed either by CVD method or by heat oxidation of the semiconductor layer 501b. The nitride film 503 may be formed by CVD method, and may be substituted with a nitride oxide film.

[0173] Subsequently, the nitride film 503 and oxide film 502 are etched using a resist 504 as a mask. The semiconductor layer 501b is further etched to reduce its thickness while remained on the buried oxide film 90. A trench 510 shown in FIG. 48 is thus obtained.

[0174] The resist 504 is then removed, and an oxide film 505 is deposited from the side of the trench 510 in a thickness sufficient for burying the trench 510 (e.g., 500 nm), thereby obtaining a structure shown in FIG. 49.

[0175] CMP processing is then carried out in a similar manner to a conventional trench isolation for polishing the nitride film 503 as well to reduce its thickness. A structure shown in FIG. 50 is thus obtained.

[0176] The nitride film 503 and oxide film 502 are etched and removed. Thereby, as shown in FIG. 51, the oxide film

505 remained on a surface of the semiconductor layer **501b** provided on the buried oxide film **90** functions as a partial isolator.

[0177] FIGS. **52** through **56** are sectional views showing a second method of forming a partial isolator in sequential order of steps. A structure shown in FIG. **33** is obtained in the same way as the first method of forming the partial isolator. Thereafter, the nitride film **503**, oxide film **502** and semiconductor layer **501b** are etched using the resist **504** as a mask, thereby forming a trench **511** that exposes the buried oxide film **90**. A structure shown in FIG. **52** is thus obtained.

[0178] The resist **504** is then removed to deposit a semiconductor layer **506** at least covering the buried oxide film **90** which is a bottom of the trench **511**, which covers, for example, the bottom and an inner wall of the trench **511** and a surface of the nitride film **503**. Polysilicon is used for the semiconductor layer **506**, for example, when the semiconductor substrate **501** is made of silicon. The oxide film **505** is then deposited on the semiconductor layer **506** for burying the trench **511** with the semiconductor layer **506** interposed therebetween. A structure shown in FIG. **53** is thus obtained.

[0179] CMP processing is then carried out in a similar manner to the conventional trench isolation for polishing the nitride film **503** as well to reduce its thickness, thereby obtaining a structure shown in FIG. **54**.

[0180] The nitride film **503** and the oxide film **502** are etched and removed, thereby obtaining a structure shown in FIG. **55**.

[0181] Thereafter, an oxidation treatment is given so that a surface of the semiconductor layer **501b** and a portion of the semiconductor layer **506** which are on the far side from the buried oxide film **90** are oxidized and turned into oxide films **508** and **507**, respectively. A structure shown in FIG. **56** is thus obtained. The oxide film **508** is then removed to obtain a partial isolator formed by the oxide films **505** and **507**. In the present method, the semiconductor layers **506** and **501b** remained without being oxidized correspond to the above-noted semiconductor film **3**.

[0182] FIGS. **57** through **60** are sectional views showing a third method of forming a partial isolator in sequential order of steps. The trench **510** is formed in the same way as in the first method of forming the partial isolator. In the present method, however, a semiconductor layer **509** made of silicon having a thickness of 10 to 100 nm, for example, is interposed between the nitride film **503** and the oxide film **502** (FIG. **57**). Retreated from the trench **510** is an end of the semiconductor layer **509** exposed to the trench **510** with the etching of the semiconductor layer **501b** which is performed when forming the trench **510**.

[0183] Next, an oxide film **520** is formed on an inner wall of the trench **510** to obtain a structure shown in FIG. **58**. The oxide film **502** is formed by heat oxidation at 800 to 1350° C., for example, while the oxide film **520** is formed by wet oxidation at 700 to 900° C. or oxidation in an atmosphere including hydrochloric acid and oxygen. Thereby, the oxide film **520** extends deeply between the semiconductor layer **509** and oxide film **502** and between the oxide film **502** and semiconductor layer **501b**, which remarkably presents a contour of a so-called bird's beak.

[0184] An oxide film **521** is then deposited for burying the trench **510** and flattened by carrying out CMP processing. A structure shown in FIG. **59** is thus obtained. In order that a surface of the oxide film **521** shall not be excessively low also due to an overetching to be described below, an amount of

polishing of the oxide film **521** is adjusted in the CMP processing in such a manner that a flat surface of the oxide film **521** is not excessively lower than a main surface of the nitride film **503**.

[0185] Subsequently, the nitride film **503** and semiconductor layer **509** are removed by wet etching, and the oxide film **502** is further removed by etching. At the etching of the oxide film **502**, 50 to 100% of overetching is carried out, so that the contour of the bird's beak of the oxide film **521** is smoothed out and is made correspond to those of the semiconductor layer **509** and nitride film **503**, thereby forming depressions **523** and **524**, respectively. Thereby, a partial isolator **522** shown in FIG. **60** can be obtained.

[0186] FIG. **61** is a sectional view showing a structure in which a gate electrode **G10** extends over the partial isolator **522**. As shown in a position **601**, the depressions **523** and **524** are positioned at portions sloping substantially upward in a direction from an end of the bird's beak to the partial isolator **522**. This enhances an effect of preventing an unnecessary gate material from remaining on a surface when forming the gate electrode **G10**, and reduces differences in level in the vicinity of the bird's beak due to the upward slope at the position **601**. Consequently, it is easy to form the gate electrode **G10**.

[0187] Further, as shown in a position **602**, the partial isolator **522** has a rounded shape projecting to the semiconductor layer **501b** at a portion sloping downward in a direction from the end of the bird's beak to the partial isolator **522**. Accordingly, it is possible to ease stress imposed around an interface between the semiconductor layer **501b** and the partial isolator **522** due to the heat treatment and oxidation treatment performed in process steps of forming a semiconductor element. This enables to suppress occurrence of the crystal defect in the semiconductor layer **501b** due to the stress.

[0188] While the invention has been shown and described in detail, the foregoing description is in all aspects illustrative and not restrictive. It is therefore understood that numerous modifications and variations can be devised without departing from the scope of the invention.

What is claimed:

1. A semiconductor device comprising:

a substrate at least having an insulative surface;

a semiconductor film provided on said surface of said substrate comprising a first semiconductor layer of a first conductivity type, a second semiconductor layer of said first conductivity type having an impurity concentration lower than that of said first semiconductor layer, a third semiconductor layer of a second conductivity type opposite to said first conductivity type and a fourth semiconductor layer of said second conductivity type having an impurity concentration lower than that of said third semiconductor layer; and

an insulative isolator formed on a surface of said semiconductor film on the far side from said substrate, separately from said surface of said substrate, wherein

said second and fourth semiconductor layers form a pn junction extending in the thickness direction of said semiconductor film, said pn junction has a portion separated from said isolator,

a maximum value of a distance between said pn junction and a boundary between said isolator and said semiconductor film is not more than 2 μm, when a direction from said boundary to said isolator along said surface of said substrate is taken as a positive direction,

- said second semiconductor layer is provided in said fourth semiconductor layer,
- said first semiconductor layer includes a pair of first semiconductor layers being formed in said second semiconductor layer, and
- said pair of first semiconductor layers function as a contact with respect to said second semiconductor layer.
2. A resistor comprising:
- a substrate at least having an insulative surface;
 - a first semiconductor layer of a first conductivity type provided on said surface of said substrate;
 - an insulative isolator formed on a surface of said first semiconductor film on the far side from said substrate, separately from said surface of said substrate; and
 - a second semiconductor layer of a second conductivity type opposite to said first conductivity type formed in said first semiconductor layer, said second semiconductor layer forming a pn junction in conjunction with said first semiconductor layer, said pn junction extending from said surface of said first semiconductor layer to said surface of said substrate and being separated from said isolator.
3. The resistor according to claim 2, further comprising a pair of third semiconductor layers of said second conductivity type formed in said second semiconductor layer, having an impurity concentration higher than that of said second semiconductor layer.
4. The resistor according to claim 3, further comprising a gate electrode covering said pn junction.
5. The resistor according to claim 3, further comprising a cover having an insulative surface in contact with said portion of said pn junction separated from said isolator.
6. A semiconductor element in which a substrate, an insulator and a semiconductor layer are formed in this order comprising:
- a pn junction provided in said semiconductor layer to extend in a thickness direction of said semiconductor layer; and
 - a metallic compound layer formed on said semiconductor layer, being a compound of said semiconductor layer and metal, wherein
 - a maximum value of a distance between said pn junction and a boundary between said metallic compound layer and said semiconductor layer along a surface of said semiconductor layer is not more than 2 μm .
7. The semiconductor element according to claim 6, wherein
- said pn junction is positioned away from a boundary between an end of said metallic compound layer and said semiconductor layer toward said semiconductor layer within 2 μm .
8. The semiconductor element according to claim 7, wherein said pn junction is applied with voltage.
9. A resistor in which a substrate, an insulator and a semiconductor layer are formed in this order, comprising:
- a pn junction provided in said semiconductor layer to extend in a thickness direction of said semiconductor layer; and
 - a metallic compound layer formed on said semiconductor layer, being a compound of said semiconductor layer and metal, wherein
 - a maximum value of a distance between said pn junction and a boundary between said metallic compound layer and said semiconductor layer along a surface of said semiconductor layer is not more than 2 μm .
10. The resistor according to claim 9, wherein
- said pn junction is positioned away from a boundary between an end of said metallic compound layer and said semiconductor layer toward said semiconductor layer within 2 μm .
11. The resistor according to claim 10, wherein said pn junction is applied with voltage.
12. A semiconductor element in which a substrate, an insulator and a semiconductor layer are formed in this order, comprising:
- a pn junction provided in said semiconductor layer to extend in a thickness direction of said semiconductor layer; and
 - a partial isolator formed on said semiconductor layer, underlaid with said semiconductor layer, wherein
 - a maximum value of a distance between said pn junction and a boundary between said partial isolator and said semiconductor layer along a surface of said semiconductor layer is not more than 2 μm .
13. The semiconductor element according to claim 12, wherein
- said pn junction is positioned away from a boundary between an end of said partial isolator and said semiconductor layer toward said partial isolator within 2 μm .
14. The semiconductor element according to claim 13, wherein said pn junction is applied with voltage.
15. A resistor in which a substrate, an insulator and a semiconductor layer are formed in this order, comprising:
- a pn junction provided in said semiconductor layer to extend in a thickness direction of said semiconductor layer; and
 - a partial isolator formed on said semiconductor layer, underlaid with said semiconductor layer, wherein
 - a maximum value of a distance between said pn junction and a boundary between said partial isolator and said semiconductor layer along a surface of said semiconductor layer is not more than 2 μm .
16. The resistor according to claim 15, wherein
- said pn junction is positioned away from a boundary between an end of said partial isolator and said semiconductor layer toward said partial isolator within 2 μm .
17. The resistor according to claim 16, wherein said pn junction is applied with voltage.

* * * * *