

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 February 2012 (02.02.2012)

PCT

(10) International Publication Number
WO 2012/015588 A1

- (51) **International Patent Classification:**
A43B 23/22 (2006.01) B32B 7/02 (2006.01)
A43B 23/02 (2006.01)
- (21) **International Application Number:**
PCT/US2011/043653
- (22) **International Filing Date:**
12 July 2011 (12.07.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12/847,836 30 July 2010 (30.07.2010) US
- (71) **Applicant (for all designated States except US):** NIKE INTERNATIONAL LTD.; One Bowerman Drive, Beaverton, OR 97005-6453 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** DOJAN, Frederick, J. [US/US]; c/o Nike, Inc., One Bowerman Drive, Beaverton, OR 97005-6453 (US). MESCHTER, James, C. [US/US]; c/o Nike, Inc., One Bowerman Drive, Beaverton, OR 97005-6453 (US).
- (74) **Agents:** KUZARA, Byron, S. et al.; Plumsea Law Group, LLC, 10411 Motor City Drive, Suite 320, Bethesda, MD 20817 (US).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) **Title:** FOOTWEAR INCORPORATING ANGLED TENSILE STRAND ELEMENTS

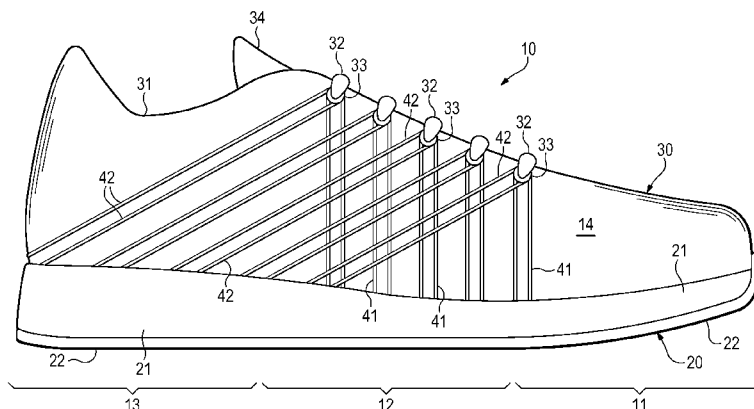


Figure 1

(57) **Abstract:** An article of footwear (10) may include various first strands (41) and second strands (42). The cutting and second strands may extend from an area proximal to lace - receiving elements to an area proximal to the sole structure. The first strands may have a substantially vertical orientation and the second strands may have a rearwardly - angled orientation. The first strands may be located in a midfoot region of the footwear and the second strands may be located in both the midfoot region and a heel region of the footwear. Angles between the first strands and the second strands may be at least 40 degrees. Additionally, the second strands may have at least fifty percent greater tensile strength than the first strands.



WO 2012/015588 A1

FOOTWEAR INCORPORATING ANGLED TENSILE STRAND ELEMENTS

BACKGROUND

- [01]** Articles of footwear generally include two primary elements: an upper and a sole structure. The upper is often formed from a plurality of material elements (e.g., textiles, polymer sheet layers, foam layers, leather, synthetic leather) that are stitched or adhesively bonded together to form a void on the interior of the footwear for comfortably and securely receiving a foot. More particularly, the upper forms a structure that extends over instep and toe areas of the foot, along medial and lateral sides of the foot, and around a heel area of the foot. The upper may also incorporate a lacing system to adjust fit of the footwear, as well as permitting entry and removal of the foot from the void within the upper. In addition, the upper may include a tongue that extends under the lacing system to enhance adjustability and comfort of the footwear, and the upper may incorporate a heel counter.
- [02]** The various material elements forming the upper impart different properties to different areas of the upper. For example, textile elements may provide breathability and may absorb moisture from the foot, foam layers may compress to impart comfort, and leather may impart durability and wear-resistance. As the number of material elements increases, the overall mass of the footwear may increase proportionally. The time and expense associated with transporting, stocking, cutting, and joining the material elements may also increase. Additionally, waste material from cutting and stitching processes may accumulate to a greater degree as the number of material elements incorporated into an upper increases. Moreover, products with a greater number of material elements may be more difficult to recycle than products formed from fewer material elements. By decreasing the number of material elements, therefore, the mass

of the footwear and waste may be decreased, while increasing manufacturing efficiency and recyclability.

- [03]** The sole structure is secured to a lower portion of the upper so as to be positioned between the foot and the ground. In athletic footwear, for example, the sole structure includes a midsole and an outsole. The midsole may be formed from a polymer foam material that attenuates ground reaction forces (i.e., provides cushioning) during walking, running, and other ambulatory activities. The midsole may also include fluid-filled chambers, plates, moderators, or other elements that further attenuate forces, enhance stability, or influence the motions of the foot, for example. The outsole forms a ground-contacting element of the footwear and is usually fashioned from a durable and wear-resistant rubber material that includes texturing to impart traction. The sole structure may also include a sockliner positioned within the upper and proximal a lower surface of the foot to enhance footwear comfort.

SUMMARY

- [04]** An article of footwear is described below as having an upper and a sole structure secured to the upper. The upper includes various first strands and second strands. The cutting and second strands may extend from an area proximal to lace-receiving elements to an area proximal to the sole structure. In some configurations, the first strands have a substantially vertical orientation and the second strands have a rearwardly-angled orientation. In some configurations, the first strands are located in a midfoot region of the footwear and the second strands are located in both the midfoot region and a heel region of the footwear. In some configurations, angles between the first strands and the second strands are at least 40 degrees. In some configurations, the second strands have at least fifty percent greater tensile strength than the first strands.

[05] The advantages and features of novelty characterizing aspects of the invention are pointed out with particularity in the appended claims. To gain an improved understanding of the advantages and features of novelty, however, reference may be made to the following descriptive matter and accompanying figures that describe and illustrate various configurations and concepts related to the invention.

FIGURE DESCRIPTIONS

[06] The foregoing Summary and the following Detailed Description will be better understood when read in conjunction with the accompanying figures.

[07] Figure 1 is a lateral side elevational view of an article of footwear.

[08] Figure 2 is a medial side elevational view of the article of footwear.

[09] Figure 3 is a cross-sectional view of the article of footwear, as defined by section line 3-3 in Figure 2.

[10] Figure 4 is a lateral side elevational view of the article of footwear in a flexed configuration.

[11] Figure 5 is a plan view of a tensile strand element utilized in an upper of the article of footwear.

[12] Figure 6 is a perspective view of a portion of the tensile strand element, as defined in Figure 5.

[13] Figure 7 is an exploded perspective view of the portion of the tensile strand element.

[14] Figures 8A and 8B are a cross-sectional views of the portion of the tensile strand element, as defined by section lines 8A and 8B in Figure 6.

- [15] Figures 9A-9J are lateral side elevational views corresponding with Figure 1 and depicting further configurations of the article of footwear.
- [16] Figures 10A-10D are cross-sectional views corresponding with Figure 3 and depicting further configurations of the article of footwear.
- [17] Figure 11 is a plan view of a tensile element.

DETAILED DESCRIPTION

- [18] The following discussion and accompanying figures disclose an article of footwear having an upper that includes tensile strand elements. The article of footwear is disclosed as having a general configuration suitable for walking or running. Concepts associated with the footwear, including the upper, may also be applied to a variety of other athletic footwear types, including baseball shoes, basketball shoes, cross-training shoes, cycling shoes, football shoes, tennis shoes, soccer shoes, and hiking boots, for example. The concepts may also be applied to footwear types that are generally considered to be non-athletic, including dress shoes, loafers, sandals, and work boots. The concepts disclosed herein apply, therefore, to a wide variety of footwear types.
- [19] General Footwear Structure
- [20] An article of footwear 10 is depicted in Figures 1-3 as including a sole structure 20 and an upper 30. For reference purposes, footwear 10 may be divided into three general regions: a forefoot region 11, a midfoot region 12, and a heel region 13, as shown in Figures 1 and 2. Footwear 10 also includes a lateral side 14 and a medial side 15. Forefoot region 11 generally includes portions of footwear 10 corresponding with the toes and the joints connecting the metatarsals with the phalanges. Midfoot region 12 generally includes portions of footwear 10 corresponding with the arch area of the foot, and heel region 13

corresponds with rear portions of the foot, including the calcaneus bone. Lateral side 14 and medial side 15 extend through each of regions 11-13 and correspond with opposite sides of footwear 10. Regions 11-13 and sides 14-15 are not intended to demarcate precise areas of footwear 10. Rather, regions 11-13 and sides 14-15 are intended to represent general areas of footwear 10 to aid in the following discussion. In addition to footwear 10, regions 11-13 and sides 14-15 may also be applied to sole structure 20, upper 30, and individual elements thereof.

- [21]** Sole structure 20 is secured to upper 30 and extends between the foot and the ground when footwear 10 is worn. The primary elements of sole structure 20 are a midsole 21, an outsole 22, and an sockliner 23. Midsole 21 is secured to a lower surface of upper 30 and may be formed from a compressible polymer foam element (e.g., a polyurethane or ethylvinylacetate foam) that attenuates ground reaction forces (i.e., provides cushioning) when compressed between the foot and the ground during walking, running, or other ambulatory activities. In further configurations, midsole 21 may incorporate fluid-filled chambers, plates, moderators, or other elements that further attenuate forces, enhance stability, or influence the motions of the foot, or midsole 21 may be primarily formed from a fluid-filled chamber. Outsole 22 is secured to a lower surface of midsole 21 and may be formed from a wear-resistant rubber material that is textured to impart traction. Sockliner 23 is located within upper 30 and is positioned to extend under a lower surface of the foot. Although this configuration for sole structure 20 provides an example of a sole structure that may be used in connection with upper 30, a variety of other conventional or nonconventional configurations for sole structure 20 may also be utilized. Accordingly, the structure and features of sole structure 20 or any sole structure utilized with upper 30 may vary considerably.

[22] The various portions of upper 30 may be formed from one or more of a plurality of material elements (e.g., textiles, polymer sheets, foam layers, leather, synthetic leather) that are stitched or bonded together to form a void within footwear 10 for receiving and securing a foot relative to sole structure 20. The void is shaped to accommodate the foot and extends along the lateral side of the foot, along the medial side of the foot, over the foot, around the heel, and under the foot. Access to the void is provided by an ankle opening 31 located in at least heel region 13. A lace 32 extends through various lace apertures 33 and permits the wearer to modify dimensions of upper 30 to accommodate the proportions of the foot. More particularly, lace 32 permits the wearer to tighten upper 30 around the foot, and lace 32 permits the wearer to loosen upper 30 to facilitate entry and removal of the foot from the void (i.e., through ankle opening 31). As an alternative to lace apertures 33, upper 30 may include other lace-receiving elements, such as loops, eyelets, and D-rings. In addition, upper 30 includes a tongue 34 that extends between the interior void and lace 32 to enhance the comfort of footwear 10. In some configurations, upper 30 may incorporate a heel counter that limits heel movement in heel region 13 or a wear-resistant toe guard located in forefoot region 11.

[23] Strand Configuration

[24] Although a variety of material elements or other components may be incorporated into upper 30, areas of one or both of lateral side 14 and medial side 15 incorporate various first strands 41 and second strands 42 that extend downward from the various lace apertures 33. More generally, strands 41 and 42 extend from a lace region of upper 30 (i.e., the region where lace apertures 33 or other lace-receiving elements are located) to a lower region of upper 30 (i.e., the region where sole structure 20 joins with upper 30). Although the number of strands 41 and 42 may vary significantly, Figures 1 and 2 depict two first strands 41 and two second strands 42 extending downward from each lace aperture 33

and toward sole structure 20. Whereas first strands 41 are oriented in a generally vertical direction in an area between lace apertures 33 and sole structure 20, second strands 42 are oriented in a rearwardly-angled direction in the area between lace apertures 33 and sole structure 20. As discussed in greater detail below, these orientations for strands 41 and 42 assist with, for example, cutting motions (i.e., side-to-side movements of the wearer) and braking motions (i.e., slowing the forward momentum of the wearer).

[25] When incorporated into upper 30, strands 41 and 42 are located between a base layer 43 and a cover layer 44, as depicted in Figure 3. Whereas base layer 43 forms a surface of the void within upper 30, cover layer 44 forms a portion of an exterior or exposed surface of upper 30. The combination of first strands 41, second strands 42, base layer 43, and cover layer 44 may, therefore, form substantially all of a thickness of upper 30 in some areas.

[26] During activities that involve walking, running, or other ambulatory movements (e.g., cutting, braking), a foot within the void in footwear 10 may tend to stretch upper 30. That is, many of the material elements forming upper 30 may stretch when placed in tension by movements of the foot. Although strands 41 and 42 may also stretch, strands 41 and 42 generally stretch to a lesser degree than the other material elements forming upper 30 (e.g., base layer 43 and cover layer 44). Each of strands 41 and 42 may be located, therefore, to form structural components in upper 30 that (a) resist stretching in specific directions or locations, (b) limit excess movement of the foot relative to sole structure 20 and upper 30, (c) ensure that the foot remains properly positioned relative to sole structure 20 and upper 30, and (d) reinforce locations where forces are concentrated.

[27] First strands 41 extend between lace apertures 33 and sole structure 20 to resist stretch in the medial-lateral direction (i.e., in a direction extending around upper 30). Referring to Figures 1 and 2, first strands 41 are oriented in a generally

vertical direction in an area between lace apertures 33 and sole structure 20. Although sides 14 and 15 of upper 30 may bulge, protrude, or otherwise extend outward to form a somewhat curved surface, first strands 41 have a generally vertical orientation and follow a relatively short path between lace apertures 33 and sole structure 20. When performing a cutting motion (i.e., side-to-side movement of the wearer), first strands 41 assist with resisting sideways movement of the foot to ensure that the foot remains properly positioned relative to footwear 10. That is, first strands 41 resist stretch in upper 30 that may otherwise allow the foot to roll off of sole structure 20. Accordingly, first strands 41 resist stretch in upper 30 due to cutting motions and ensure that the foot remains properly positioned relative to footwear 10.

[28] Second strands 42 are oriented in a rearwardly-angled direction in the area between lace apertures 33 and sole structure 20. When performing a braking motion (i.e., slowing the forward momentum of the wearer), second strands 42 assist with resisting stretch in upper 30 that may allow the foot to slide forward or separate from sole structure 20. Second strands 42 also resist stretch in upper 30 due to flexing of footwear 10 in the area between forefoot region 11 and midfoot region 12. Referring to Figure 4, footwear 10 is depicted in a flexed configuration that occurs when the wearer is jumping or running, for example. When flexed or bent in this manner, the heel area of the foot may tend to separate from sole structure 20 or otherwise lift away from the area where sole structure 20 is secured to upper 30. The rearwardly-angled orientation of second strands 41, however, ensure that the heel area of the foot remains properly positioned in upper 30 and relative to sole structure 20. Accordingly, second strands 42 resist stretch in upper 30 due to braking motions, as well as jumping and running motions that flex or otherwise bend footwear 10.

[29] First strands 41 are oriented in a generally vertical direction and second strands 41 are oriented in a rearwardly-angled direction in the area between lace

apertures 33 and sole structure 20. With regard to first strands 41, the upper portions of first strands 41 (i.e., the portions located proximal to lace apertures 33) are generally aligned with the lower portions of first strands 41 (i.e., the portions located proximal to sole structure 20). In this configuration, the upper portions of first strands 41 are located at approximately the same distance from a front of footwear 10 as the lower portions of first strands 41. In this configuration also, a majority of first strands 41 are wholly located in midfoot region 12. Although first strands 41 may have a vertical orientation, the angle of first strands 41 may also have a substantially vertical orientation between zero and fifteen degrees from vertical. As utilized herein, the term “substantially vertical orientation” and similar variants thereof is defined as an orientation wherein first strands 41 are oriented between zero and fifteen degrees from vertical when viewed from a side of footwear 10 (as in Figures 1 and 2).

[30] With regard to second strands 42, the upper portions of second strands 42 (i.e., the portions located proximal to lace apertures 33) are offset from the lower portions of second strands 42 (i.e., the portions located proximal to sole structure 20). In this configuration, the upper portions of second strands 42 are located closer to a front of footwear 10 than the lower portions of first strands 41. In this configuration also, a majority of second strands 42 extend from midfoot region 12 to heel region 13. Although the orientation of second strands 42 may vary, the angle of second strands 42 may be from between twenty to more than seventy degrees from vertical.

[31] Given the orientations and angles of strands 41 and 42 discussed above, the angle formed between strands 41 and 42 may range from twenty to more than sixty degrees, for example. Whereas first strands 41 assist with cutting motions, second strands 42 assist with braking motions. In order for strands 41 and 42 to assist with these different motions, the angle formed between strands 41 and 42 may be large enough to counter or otherwise resist stretch in upper 20

associated with these motions. Although the angle formed between strands 41 and 42 may range from twenty to more than sixty degrees, the angle formed between strands 41 and 42 will often be greater than 40 degrees in order to effectively assist with both cutting and braking motions.

[32] As discussed in greater detail below, suitable materials for strands 41 and 42 include various filaments, fibers, yarns, threads, cables, or ropes that are formed from rayon, nylon, polyester, polyacrylic, silk, cotton, carbon, glass, aramids (e.g., para-aramid fibers and meta-aramid fibers), ultra high molecular weight polyethylene, liquid crystal polymer, copper, aluminum, or steel, for example. Although strands 41 and 42 may be formed from similar materials, second strands 42 may be formed to have a greater tensile strength than first strands 41. As an example, strands 41 and 42 may be formed from the same material, but the thickness of second strands 42 may be greater than the thickness of first strands 41 to impart greater tensile strength. As another example, strands 41 and 42 may be formed from different materials, with the tensile strength of the material forming second strands 42 being greater than the tensile strength of the material forming first strands 41. The rationale for this difference between strands 41 and 42 is that the forces induced in upper 30 during braking motions are often greater than the forces induced in upper 30 during cutting motions. In order to account for the differences in the forces from braking and cutting, strands 41 and 42 may exhibit different tensile strengths.

[33] Various factors may affect the relative tensile strengths of strands 41 and 42, including the size of footwear 10, the athletic activity for which footwear 10 is designed, and the degree to which layers 43 and 44 stretch. Additionally, the tensile strengths of strands 41 and 42 may depend upon (a) the number of strands 41 and 42 present in footwear 10 or in an area of footwear 10, (b) the specific locations of individual strands 41 and 42 or groups of strands 41 and 42, and (c) the materials forming strands 41 and 42. Although variable, the tensile

strength of second strands 42 may range from fifty to more than three hundred percent greater than the tensile strength of first strands 41. In order to achieve different tensile strengths between strands 41 and 42, different materials or thicknesses of materials may be utilized for strands 41 and 42, for example. As an example of suitable materials, first strands 41 may be formed from a bonded nylon 6.6 with a breaking or tensile strength of 3.1 kilograms and a weight of 45 tex (i.e., a weight of 45 grams per kilometer of material) and second strands 42 may be formed from a bonded nylon 6.6 with a breaking or tensile strength of 6.2 kilograms and a tex of 45. In this configuration, the tensile strength of second strands 42 is one hundred percent greater than the tensile strength of first strands 41.

[34] Tensile Strand Element

[35] A tensile strand element 40 that may be incorporated into upper 30 is depicted in Figure 5. Additionally, a portion of element 40 is depicted in each of Figures 6-8B. Element 40 may form, for example, a majority of lateral side 14. As a result, element 40 has a configuration that (a) extends from upper to lower areas of lateral side 14 and through each of regions 11-13, (b) defines the various lace apertures 33 in lateral side 14, and (c) forms both an interior surface (i.e., the surface that contacts the foot or a sock worn by the foot when footwear 10 is worn) and an exterior surface (i.e., an outer, exposed surface of footwear 10). A substantially similar element may also be utilized for medial side 15. In some configurations of footwear 10, element 40 may only extend through a portion of lateral side 14 (e.g., limited to midfoot region 12) or may be expanded to form a majority of lateral side 14 and medial side 15. That is, a single element having the general configuration of element 40 and including strands 41 and 42 and layers 43 and 44 may extend through both lateral side 14 and medial side 15. In other configurations, additional elements may be joined to element 40 to form portions of lateral side 14.

- [36]** Base layer 43 and cover layer 44 lay adjacent to each other, with strands 41 and 42 being positioned between layers 43 and 44. Strands 41 and 42 lie adjacent to a surface of base layer 43 and substantially parallel to the surface of base layer 43. In general, strands 41 and 42 also lie adjacent to a surface of cover layer 44 and substantially parallel to the surface of cover layer 44. As discussed above, strands 41 and 42 form structural components in upper 30 that resist stretch. By being substantially parallel to the surfaces of base layer 43 and cover layer 44, strands 41 and 42 resist stretch in directions that correspond with the surfaces of layers 43 and 44. Although strands 41 and 42 may extend through base layer 43 (e.g., as a result of stitching) in some locations, areas where strands 41 and 42 extend through base layer 43 may permit stretch, thereby reducing the overall ability of strands 41 and 42 to limit stretch. As a result, each of strands 41 and 42 generally lie adjacent to a surface of base layer 43 and substantially parallel to the surface of base layer 43 for distances of at least twelve millimeters, and may lie adjacent to the surface of base layer 43 and substantially parallel to the surface of base layer 43 throughout distances of five centimeters or more.
- [37]** Base layer 43 and cover layer 44 are depicted as being coextensive with each other. That is, layers 43 and 44 may have the same shape and size, such that edges of base layer 43 correspond and are even with edges of cover layer 44. In some manufacturing processes, (a) strands 41 and 42 are located upon base layer 43, (b) cover layer 44 is bonded to base layer 43 and strands 41 and 42, and (c) element 40 is cut from this combination to have the desired shape and size, thereby forming common edges for base layer 43 and cover layer 44. In this process, ends of strands 41 and 42 may also extend to edges of layers 43 and 44. Accordingly, edges of layers 43 and 44, as well as ends of strands 41 and 42, may all be positioned at edges of element 40.
- [38]** Each of base layer 43 and cover layer 44 may be formed from any generally two-dimensional material. As utilized with respect to the present invention, the term

“two-dimensional material” or variants thereof is intended to encompass generally flat materials exhibiting a length and a width that are substantially greater than a thickness. Accordingly, suitable materials for base layer 43 and cover layer 44 include various textiles, polymer sheets, or combinations of textiles and polymer sheets, for example. Textiles are generally manufactured from fibers, filaments, or yarns that are, for example, either (a) produced directly from webs of fibers by bonding, fusing, or interlocking to construct non-woven fabrics and felts or (b) formed through a mechanical manipulation of yarn to produce a woven or knitted fabric. The textiles may incorporate fibers that are arranged to impart one-directional stretch or multi-directional stretch, and the textiles may include coatings that form a breathable and water-resistant barrier, for example. The polymer sheets may be extruded, rolled, or otherwise formed from a polymer material to exhibit a generally flat aspect. Two-dimensional materials may also encompass laminated or otherwise layered materials that include two or more layers of textiles, polymer sheets, or combinations of textiles and polymer sheets. In addition to textiles and polymer sheets, other two-dimensional materials may be utilized for layers 43 and 44. Although two-dimensional materials may have smooth or generally untextured surfaces, some two-dimensional materials will exhibit textures or other surface characteristics, such as dimpling, protrusions, ribs, or various patterns, for example. Despite the presence of surface characteristics, two-dimensional materials remain generally flat and exhibit a length and a width that are substantially greater than a thickness. In some configurations, mesh materials or perforated materials may be utilized for either or both of layers 43 and 44 to impart greater breathability or air permeability.

[39] First strands 41 and second strands 42 may be formed from any generally one-dimensional material. As utilized with respect to the present invention, the term “one-dimensional material” or variants thereof is intended to encompass generally elongate materials exhibiting a length that is substantially greater than

a width and a thickness. Accordingly, suitable materials for strands 41 and 42 include various filaments, fibers, yarns, threads, cables, or ropes that are formed from rayon, nylon, polyester, polyacrylic, silk, cotton, carbon, glass, aramids (e.g., para-aramid fibers and meta-aramid fibers), ultra high molecular weight polyethylene, liquid crystal polymer, copper, aluminum, and steel. Whereas filaments have an indefinite length and may be utilized individually as strands 41 and 42, fibers have a relatively short length and generally go through spinning or twisting processes to produce a strand of suitable length. An individual filament utilized in strands 41 and 42 may be formed from a single material (i.e., a monocomponent filament) or from multiple materials (i.e., a bicomponent filament). Similarly, different filaments may be formed from different materials. As an example, yarns utilized as strands 41 and 42 may include filaments that are each formed from a common material, may include filaments that are each formed from two or more different materials, or may include filaments that are each formed from two or more different materials. Similar concepts also apply to threads, cables, or ropes. The thickness of strands 41 and 42 may also vary significantly to range from less than 0.03 millimeters to more than 5 millimeters, for example. Although one-dimensional materials will often have a cross-section where width and thickness are substantially equal (e.g., a round or square cross-section), some one-dimensional materials may have a width that is greater than a thickness (e.g., a rectangular, oval, or otherwise elongate cross-section). Despite the greater width, a material may be considered one-dimensional if a length of the material is substantially greater than a width and a thickness of the material. As discussed above as an example, first strands 41 may be formed from a bonded nylon 6.6 with a breaking or tensile strength of 3.1 kilograms and a weight of 45 tex and second strands 42 may be formed from a bonded nylon 6.6 with a breaking or tensile strength of 6.2 kilograms and a tex of 45.

[40] As examples, base layer 43 may be formed from a textile material and cover layer 44 may be formed from a polymer sheet that is bonded to the textile

material, or each of layers 43 and 44 may be formed from polymer sheets that are bonded to each other. In circumstances where base layer 43 is formed from a textile material, cover layer 44 may incorporate thermoplastic polymer materials that bond with the textile material of base layer 43. That is, by heating cover layer 44, the thermoplastic polymer material of cover layer 44 may bond with the textile material of base layer 43. As an alternative, a thermoplastic polymer material may infiltrate or be bonded with the textile material of base layer 43 in order to bond with cover layer 44. That is, base layer 43 may be a combination of a textile material and a thermoplastic polymer material. An advantage of this configuration is that the thermoplastic polymer material may rigidify or otherwise stabilize the textile material of base layer 43 during the manufacturing process of element 40, including portions of the manufacturing process involving laying strands 41 and 42 upon base layer 43. Another advantage of this configuration is that a backing layer (see backing layer 48 in Figure 10D) may be bonded to base layer 43 opposite cover layer 44 using the thermoplastic polymer material in some configurations. This general concept is disclosed in U.S. Patent Application Number 12/180,235, which was filed in the U.S. Patent and Trademark Office on 25 July 2008 and entitled Composite Element With A Polymer Connecting Layer, such prior application being entirely incorporated herein by reference.

- [41]** Based upon the above discussion, element 40 generally includes two layers 43 and 44 with strands 41 and 42 located between. Although strands 41 and 42 may pass through one of layers 43 and 44, strands 41 and 42 generally lie adjacent to surfaces of layers 43 and 44 and substantially parallel to the surfaces layers 43 and 44 for more than twelve millimeters and even more than five millimeters. Whereas a variety of one dimensional materials may be used for strands 41 and 42, one or more two dimensional materials may be used for layers 43 and 44.

[42] Further Footwear Configurations

[43] The orientations, locations, and quantity of strands 41 and 42 in Figures 1 and 2 are intended to provide an example of a suitable configuration for footwear 10. In other configurations of footwear 10, various strands 41 and 42 may be absent, or additional strands 41 and 42 may be present to provide further structural components in footwear 10. In Figures 1 and 2, two first strands 41 and two second strands 42 are associated with each lace aperture 33. Referring to Figure 9A, a single cutting strand 41 and braking strand 42 extends outward from each lace apertures 33. A configuration wherein three first strands 41 and second strands 42 are associated with each lace aperture 33 is depicted in Figure 9B. Although the same number of strands 41 and 42 may be associated with each lace aperture 33, Figure 9C depicts a configuration wherein two first strands 41 and one braking strand 42 extends from each lace aperture 33. Moreover, the number of strands 41 and 42 may vary among the various lace apertures 33, as depicted in Figure 9D, or some lace apertures 33 may not be associated with strands 41 and 42, as depicted in Figure 9E. Accordingly, the number of strands 41 and 42 may vary considerably.

[44] In the various configurations discussed above, strands 41 and 42 extend from lace apertures 33. Although strands 41 and 42 may contact or be in close relation to lace apertures 33, strands 41 and 42 may also extend from areas that are proximal to lace apertures 33. Referring to Figure 9F, for example, upper portions of strands 41 and 42 are located between or to the side of lace apertures 33. Although strands 41 and 42 cooperatively provide a suitable system for footwear 10, additional strands may also be present in footwear 10. For example, Figure 9G depicts various longitudinal strands 45 as extending between forefoot region 11 and heel region 13. In the various configurations discussed above, first strands 41 are generally parallel to each other and second strands 42 are generally parallel to each other. Referring to Figure 9H, however,

first strands 41 angle with respect to each other and second strands 42 angle with respect to each other. Although strands 41 and 42 may generally be linear, a configuration wherein portions of strands 41 and 42 are wavy or otherwise non-linear is depicted in Figure 9I. As discussed above, strands 41 and 42 may resist stretch in upper 30, but the non-linear areas of strands 41 and 42 may allow some stretch in upper 30. As strands 41 and 42 straighten due to the stretch, however, strands 41 and 42 may then resist stretch in upper 30.

[45] Footwear 10 is disclosed as having a general configuration suitable for walking or running. Concepts associated with footwear 10, may also be applied to a variety of other athletic footwear types. As an example, Figure 9J depicts footwear 10 as having the configuration of a basketball shoe.

[46] Various aspects relating to strands 41 and 42 and layers 43 and 44 in Figure 3 are intended to provide an example of a suitable configuration for footwear 10. In other configurations of footwear 10, additional layers or the positions of strands 41 and 42 with respect to layers 43 and 44 may vary. Referring to Figure 10A, cover layer 44 is absent such that at least strands 42 are exposed on an exterior of upper 30. In this configuration, adhesives or a thermoplastic polymer material that infiltrates base layer 43, as discussed above, may be utilized to secure strands 42 to base layer 43. In some configurations, strands 42 may rest loosely against base layer 43. In Figure 3, base layer 43 is substantially planar, whereas cover layer 44 protrudes outward in the areas of strands 42. Referring to Figure 10B, both of layers 43 and 44 protrude outward due to the presence of strands 42. In another configuration, depicted in Figure 10C, additional layers 46 and 47 are located to form an interior portion of upper 30 that is adjacent to the void. Although layers 46 and 47 may be formed from various materials, layer 46 may be a polymer foam layer that enhances the overall comfort of footwear 10 and layer 47 may be a moisture-wicking textile that removes perspiration or other moisture from the area immediately adjacent to the foot. Referring to Figure

10D, an additional set of strands 42 is located on an opposite side of base layer 43, with a backing layer 48 extending over the additional set of strands 42. This configuration may arise when an embroidery process is utilized to locate strands 41 and 42.

[47] A tensile element 50 that may be utilized in place of strands 41 and 42 is depicted in Figure 11. Tensile element 50 is formed from two joined polymer members. One of the polymer members forms a plurality of first strands 51, and the other polymer member forms a plurality of second strands 52. Moreover, the polymer members are joined to form the various lace apertures 33. Accordingly, structures other than strands 41 and 42 may be utilized to assist with cutting motions and braking motions.

[48] The running style or preferences of an individual may also determine the orientations, locations, and quantity of strands 41 and 42. For example, some individuals may have a relatively high degree of pronation (i.e., an inward roll of the foot), and having a different configuration of strands 41 and 42 may reduce the degree of pronation. Some individuals may also prefer greater stretch resistance during cutting and braking, and footwear 10 may be modified to include further strands 41 and 42 or different orientations of strands 41 and 42 on both sides 14 and 15. Some individuals may also prefer that upper 30 fit more snugly, which may require adding more strands 41 and 42 throughout upper 30. Accordingly, footwear 10 may be customized to the running style or preferences of an individual through changes in the orientations, locations, and quantity of strands 41 and 42.

[49] Manufacturing Method

[50] A variety of methods may be utilized to manufacture upper 30 and, particularly, element 40. As an example, an embroidery process may be utilized to locate strands 41 and 42 relative to base layer 43. Once strands 41 and 42 are

positioned, cover layer 44 may be bonded to base layer 43 and strands 41 and 42, thereby securing strands 41 and 42 within element 40. This general process is described in detail in U.S. Patent Application Number 11/442,679, which was filed in the U.S. Patent and Trademark Office on 25 May 2006 and entitled Article Of Footwear Having An Upper With Thread Structural Elements, such prior application being entirely incorporated herein by reference. As an alternative to an embroidery process, other stitching processes may be utilized to locate strands 41 and 42 relative to base layer 43, such as computer stitching. Additionally, processes that involve winding strands 41 and 42 around pegs on a frame around base layer 43 may be utilized to locate strands 41 and 42 over base layer 43. Accordingly, a variety of methods may be utilized to locate strands 41 and 42 relative to base layer 43.

[51] Footwear comfort is generally enhanced when the surfaces of upper 30 forming the void have relatively smooth or otherwise continuous configurations. In other words, seams, protrusions, ridges, and other discontinuities may cause discomfort to the foot. Referring to Figure 3, base layer 43 has a relatively smooth aspect, whereas cover layer 44 protrudes outward in the areas of strands 42. In contrast, Figure 10B depicts a configuration wherein base layer 43 and cover layer 44 protrude outward in the areas of strands 42. In general, the configuration of Figure 3 may impart greater footwear comfort due to the greater smoothness to the surface forming the void within upper 30. A process disclosing a manner of forming a relatively smooth aspect to base layer 43 is described in detail in U.S. Patent Application Number 12/419,985, which was filed in the U.S. Patent and Trademark Office on 7 April 2009 and entitled Method For Molding Tensile Strand Elements, such prior application being entirely incorporated herein by reference.

[52] Conclusion

[53] The invention is disclosed above and in the accompanying figures with reference to a variety of configurations. The purpose served by the disclosure, however, is to provide an example of the various features and concepts related to the invention, not to limit the scope of the invention. One skilled in the relevant art will recognize that numerous variations and modifications may be made to the configurations described above without departing from the scope of the present invention, as defined by the appended claims.

CLAIMS

1. An article of footwear having an upper and a sole structure secured to the upper, at least a portion of the upper comprising:
 - a plurality of lace-receiving elements;
 - a base layer extending from the lace-receiving elements to the sole structure, the base layer having at least one surface;
 - a plurality of first strands having a substantially vertical orientation and extending from an area proximal to the lace-receiving elements to an area proximal to the sole structure, the first strands laying substantially parallel to the surface of the base layer in a region between the lace-receiving elements and the sole structure, and the first strands having a first tensile strength; and
 - a plurality of second strands having a rearwardly-angled orientation and extending from the area proximal to the lace-receiving elements to the area proximal to the sole structure, the second strands laying substantially parallel to the surface of the base layer in the region between the lace-receiving elements and the sole structure, and the second strands having a second tensile strength that is at least fifty percent greater than the first tensile strength.
2. The article of footwear recited in claim 1, wherein the lace-receiving elements are apertures that extend through the base layer.
3. The article of footwear recited in claim 1, wherein angles formed between the cutting stands and the second strands are greater than 40 degrees.
4. The article of footwear recited in claim 1, wherein a majority of the first strands are substantially located in a midfoot region of the article of footwear.

5. The article of footwear recited in claim 4, wherein a majority of the second strands extend from the midfoot region to a heel region of the article of footwear.
6. The article of footwear recited in claim 1, wherein at least one of the first strands and at least one of the second strands lays substantially parallel to the surface of the base layer for a distance of at least five centimeters.
7. The article of footwear recited in claim 1, wherein a cover layer forms at least a portion of an exterior surface of the upper and is bonded to the base layer, and the first strands and the second strands are located between the cover layer and the base layer.
8. The article of footwear recited in claim 7, wherein the base layer is a textile and the cover layer is a polymer sheet.
9. An article of footwear having an upper and a sole structure secured to the upper, at least a portion of the upper comprising:
 - a plurality of lace-receiving elements;
 - a plurality of first strands extending from an area proximal to the lace-receiving elements to an area proximal to the sole structure, a majority of the first strands being wholly located in a midfoot region of the article of footwear, and the first strands having a first tensile strength; and
 - a plurality of second strands extending from the area proximal to the lace-receiving elements to the area proximal to the sole structure, a majority of the second strands having a rearwardly-angled orientation and extending from the midfoot region to a heel region of the article of footwear, and the second strands having a second tensile strength that is at least fifty percent greater than the first tensile strength.

10. The article of footwear recited in claim 9, wherein the upper further includes a base layer extending from the lace-receiving elements to the sole structure, and the first strands and the second strands lay substantially parallel to a surface of the base layer for a distance of at least five centimeters.

11. The article of footwear recited in claim 10, wherein a cover layer is bonded to the base layer, and the first strands and the second strands are located between the cover layer and the base layer.

12. The article of footwear recited in claim 10, wherein the lace-receiving elements are apertures that extend through the base layer.

13. The article of footwear recited in claim 9, wherein the first strands have a substantially vertical orientation.

14. The article of footwear recited in claim 9, wherein angles formed between the first strands and the second strands are greater than 40 degrees.

15. An article of footwear having an upper and a sole structure secured to the upper, at least a portion of the upper comprising:

a pair of layers that lay adjacent to each other, the layers defining at least one aperture for receiving a lace; and

a first strand and a second strand that are located between the layers and lay substantially parallel to surfaces of the layers for a distance of at least five centimeters, the first strand and the second strand extending from the aperture to an area proximal to the sole structure, the second strand having a rearwardly-angled orientation that forms an angle with the first strand of at least 40 degrees, and the second strand having at least fifty percent greater tensile strength than the first strand.

16. The article of footwear recited in claim 15, wherein the first strand has a substantially vertical orientation.

17. The article of footwear recited in claim 15, wherein the first strand is wholly located in a midfoot region of the article of footwear.

18. The article of footwear recited in claim 17, wherein the second strands extends from the midfoot region to a heel region of the article of footwear.

1/18

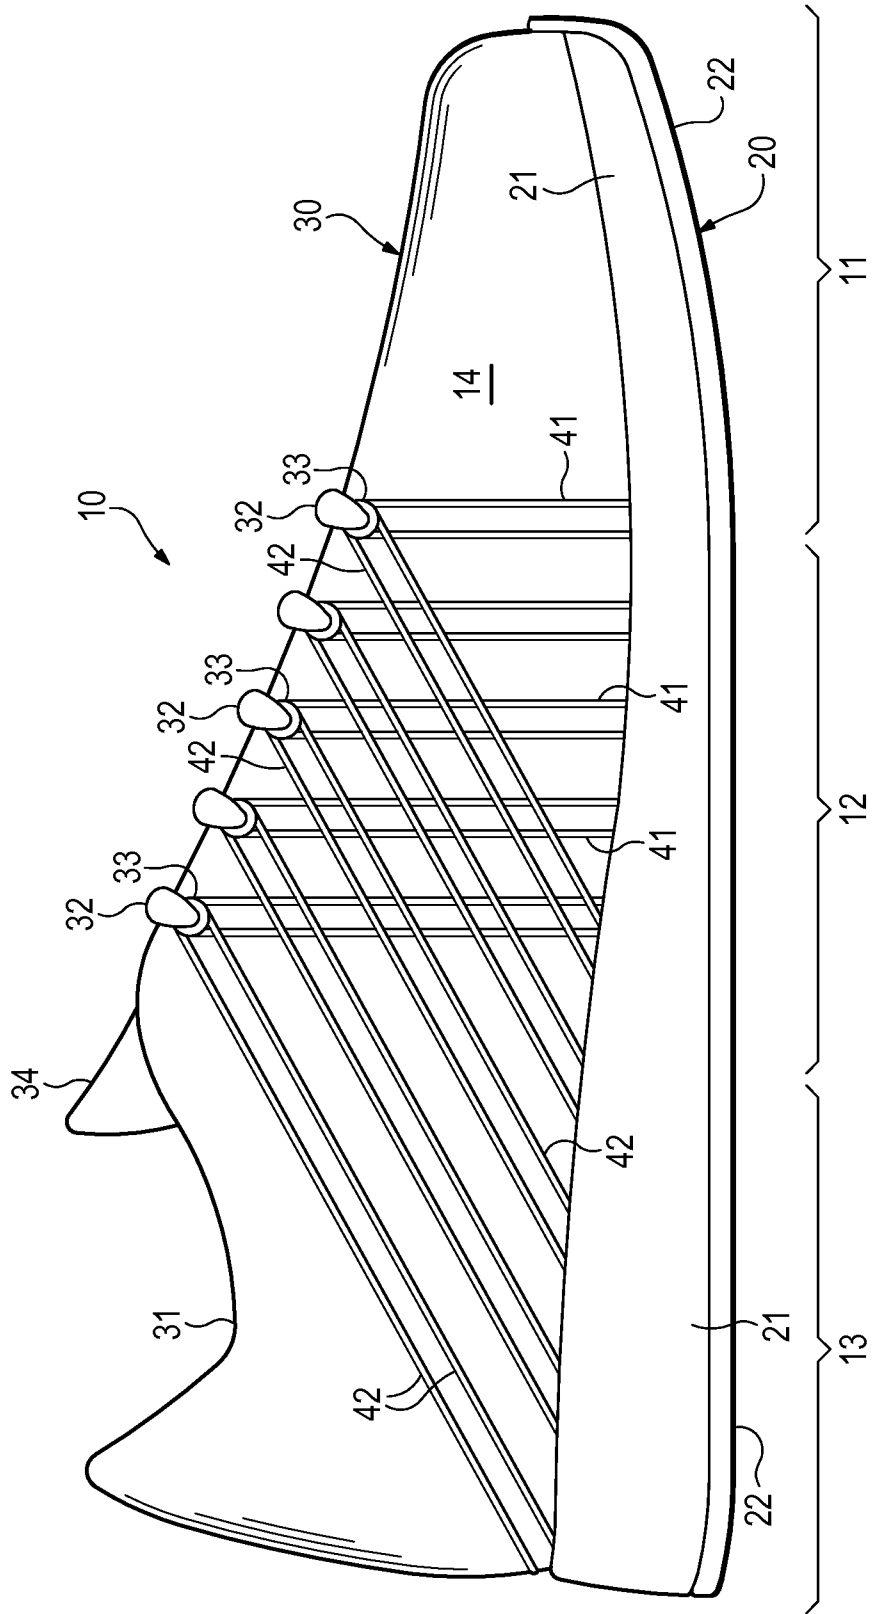


Figure 1

2/18

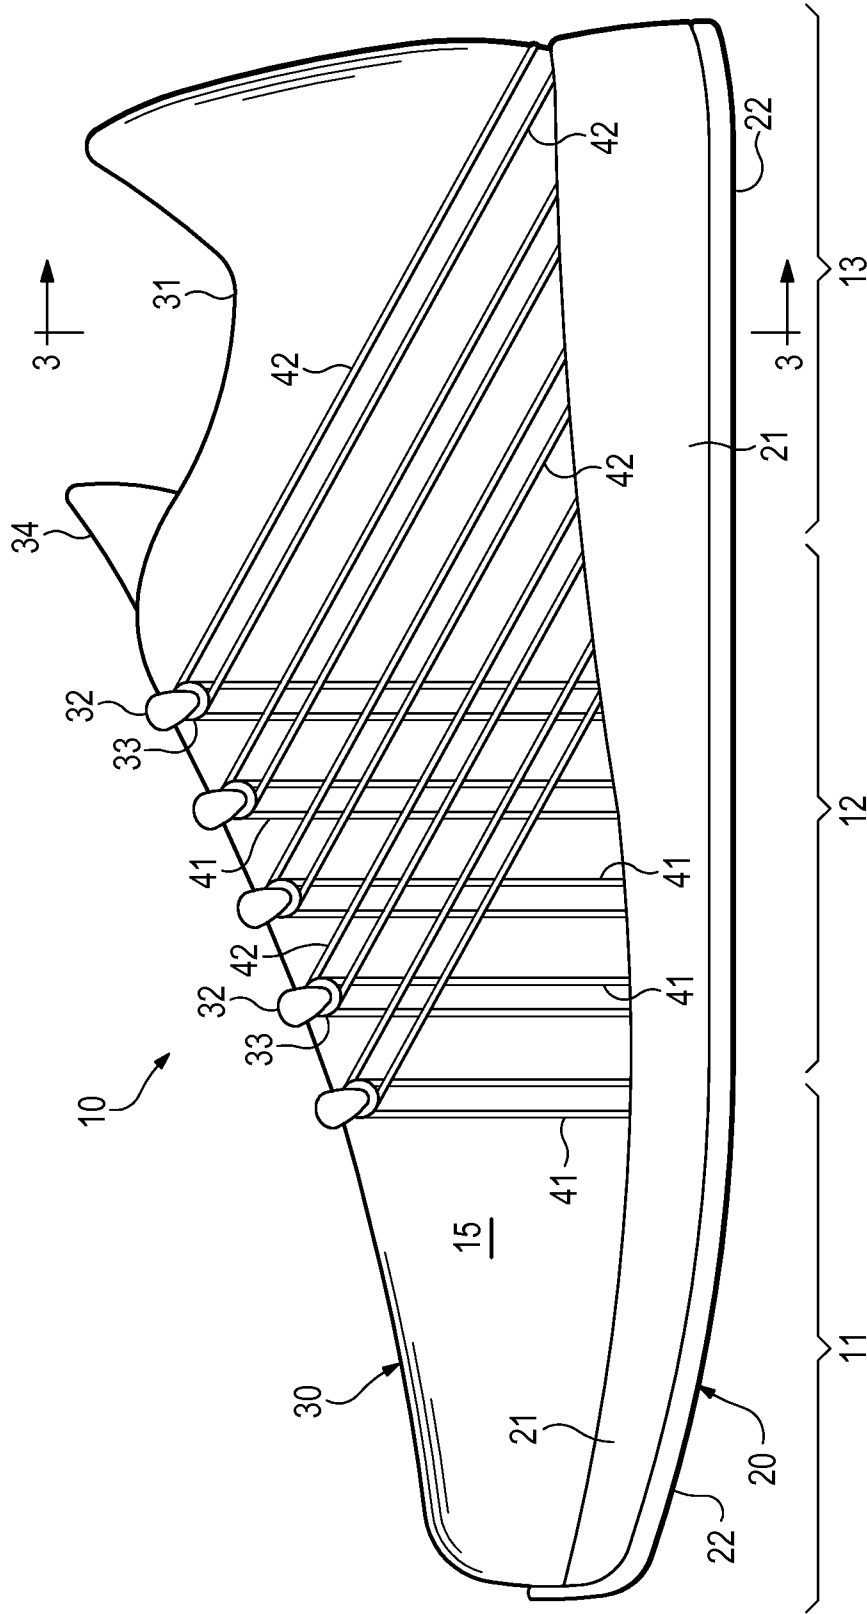


Figure 2

3/18

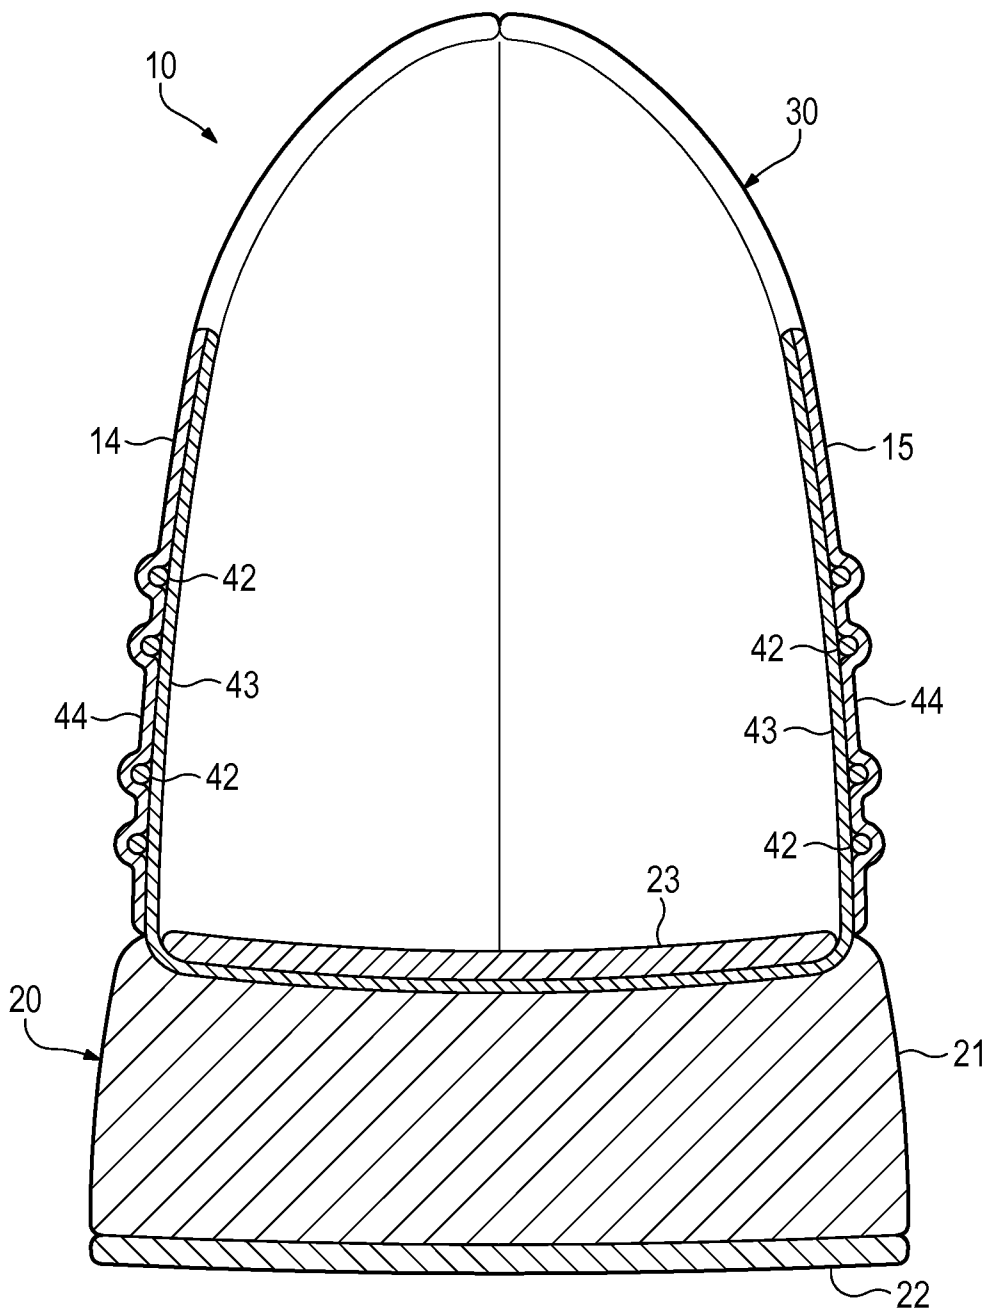


Figure 3

4/18

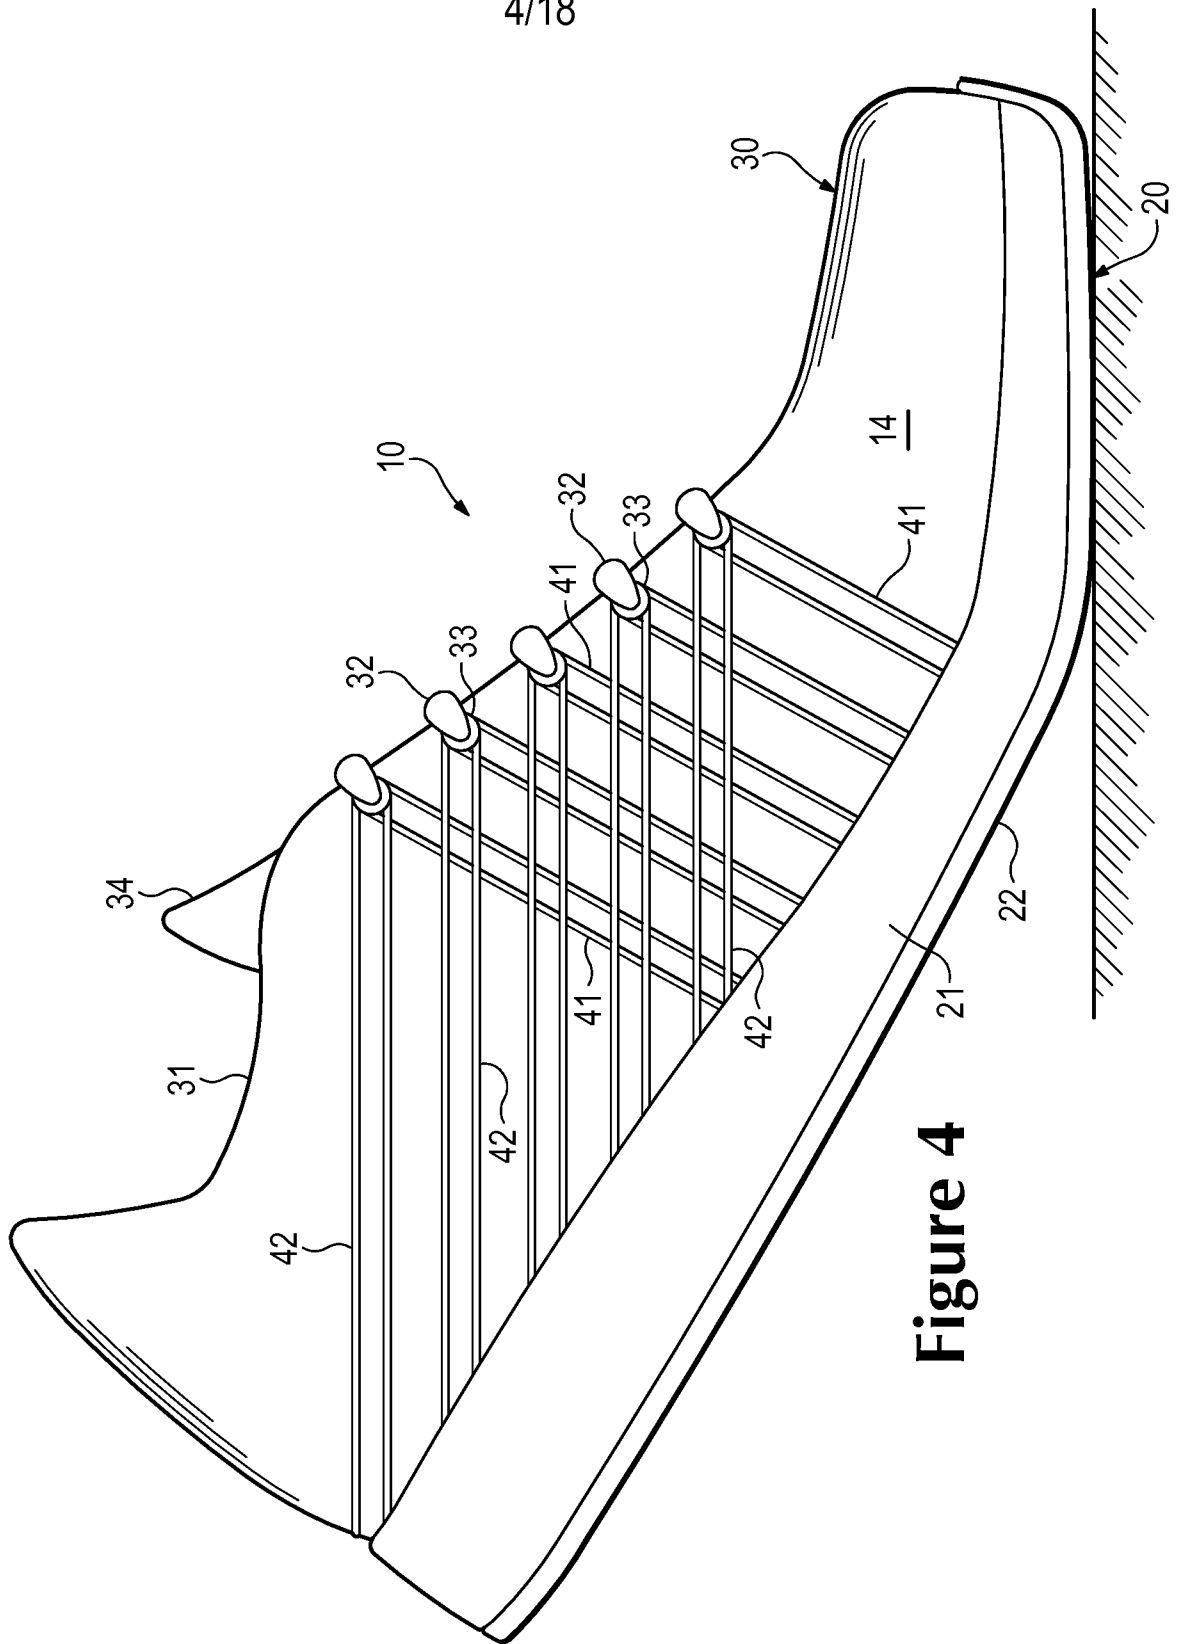


Figure 4

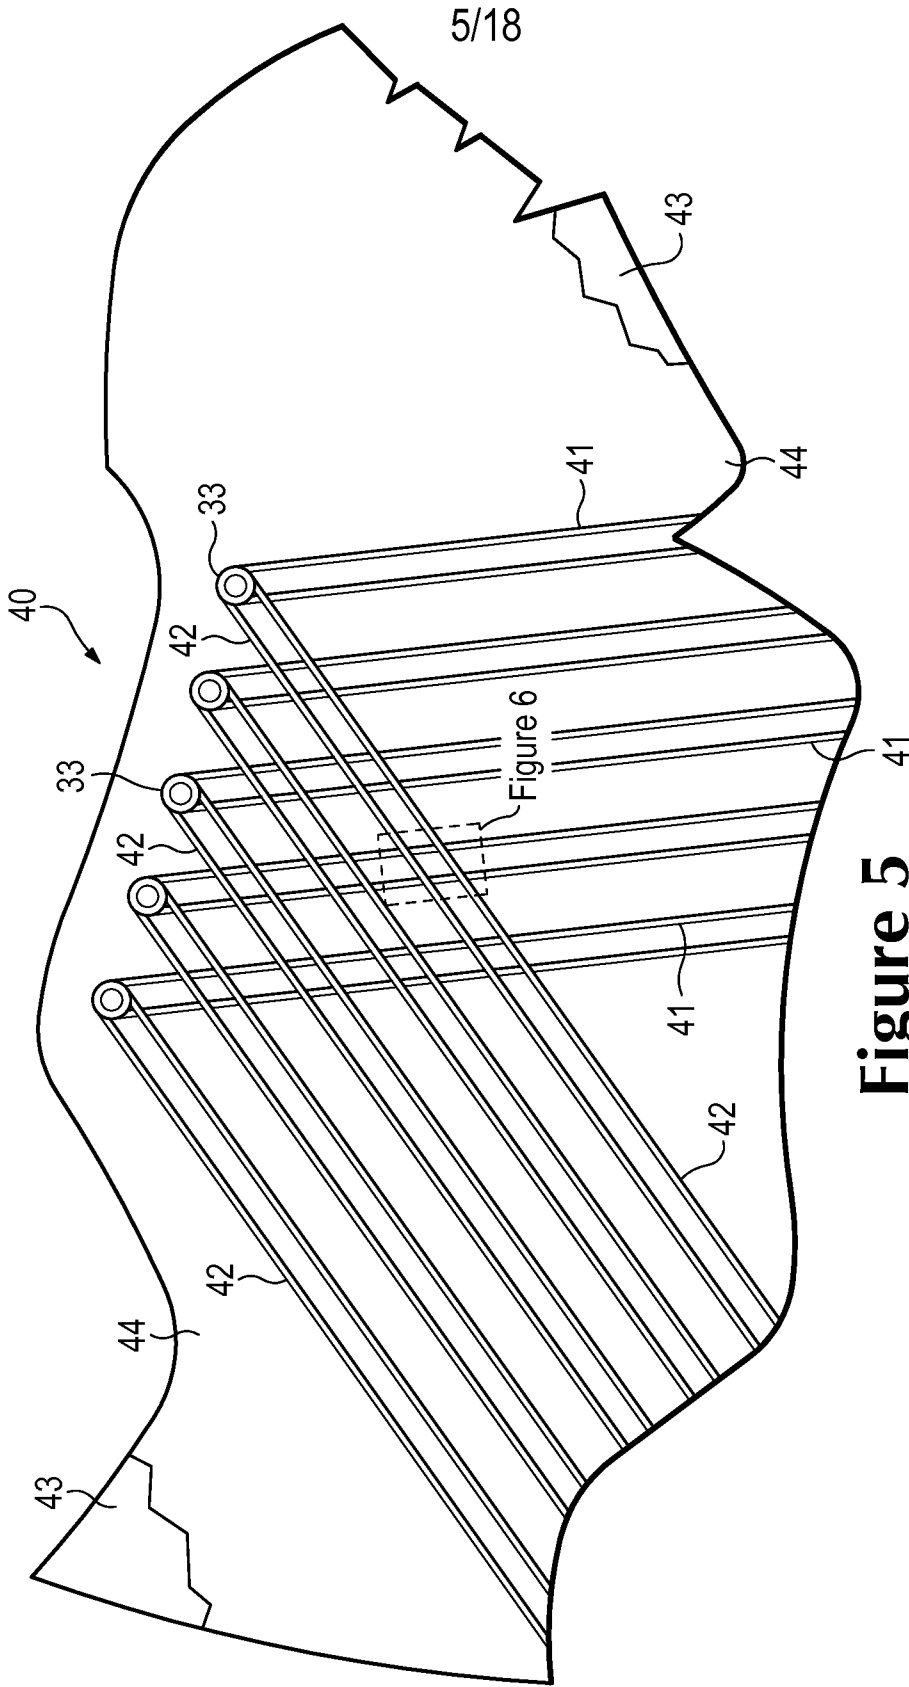


Figure 5

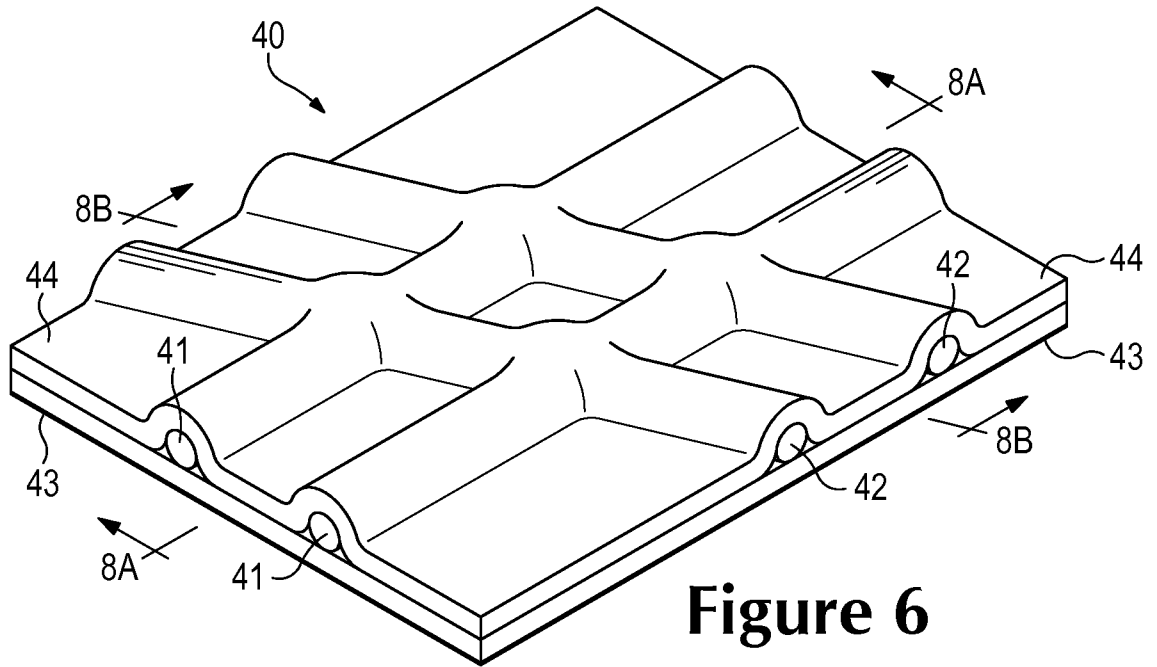
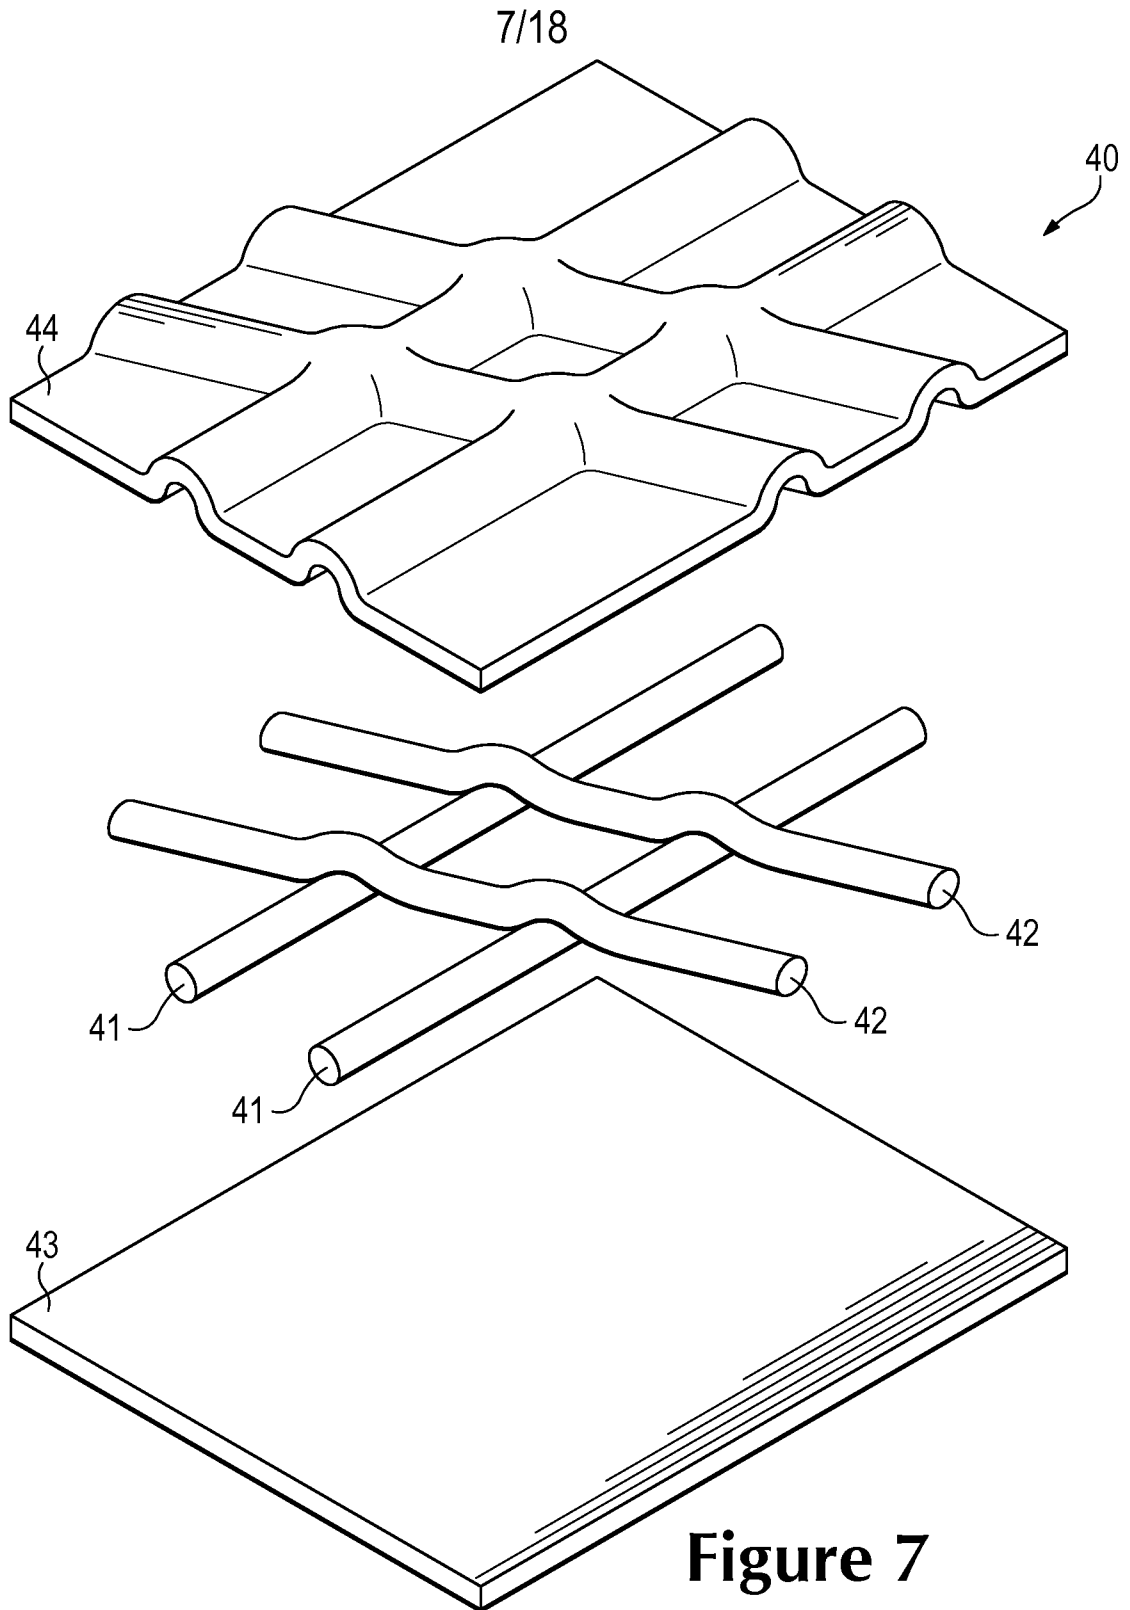


Figure 6



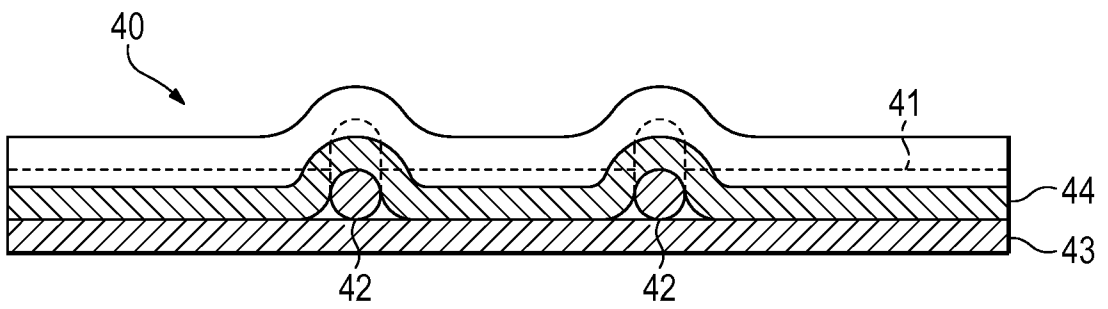


Figure 8A

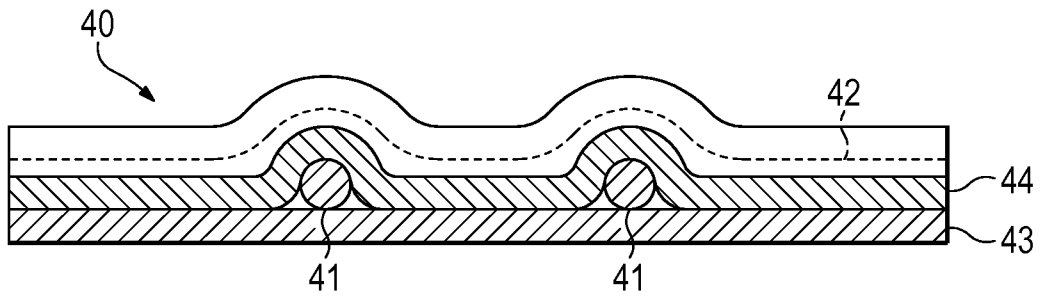


Figure 8B

9/18

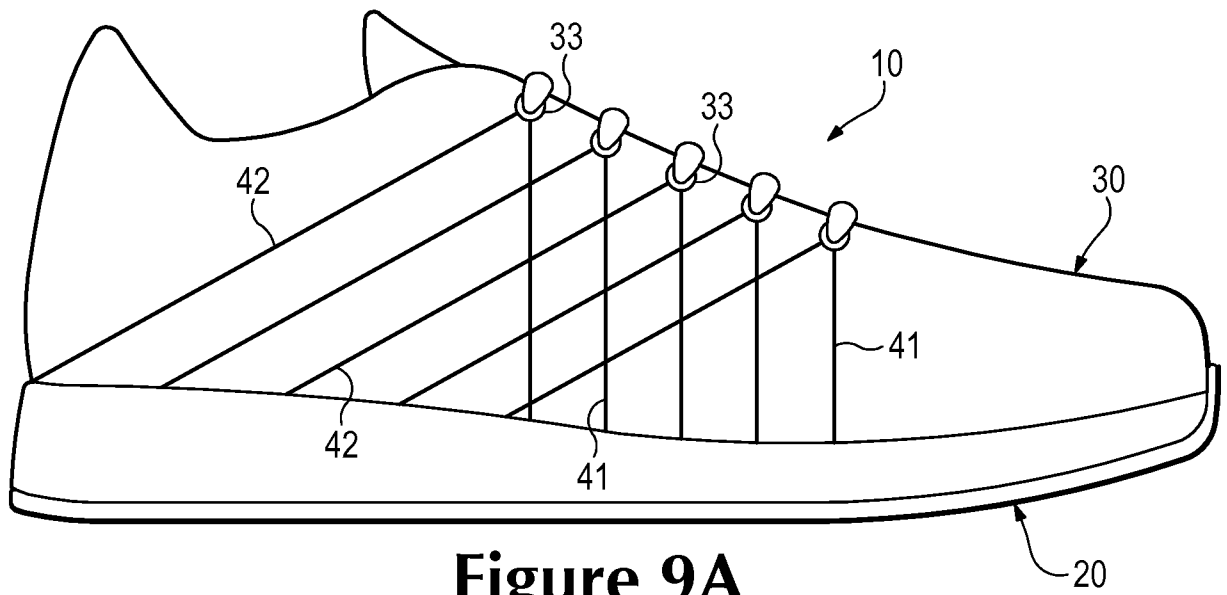


Figure 9A

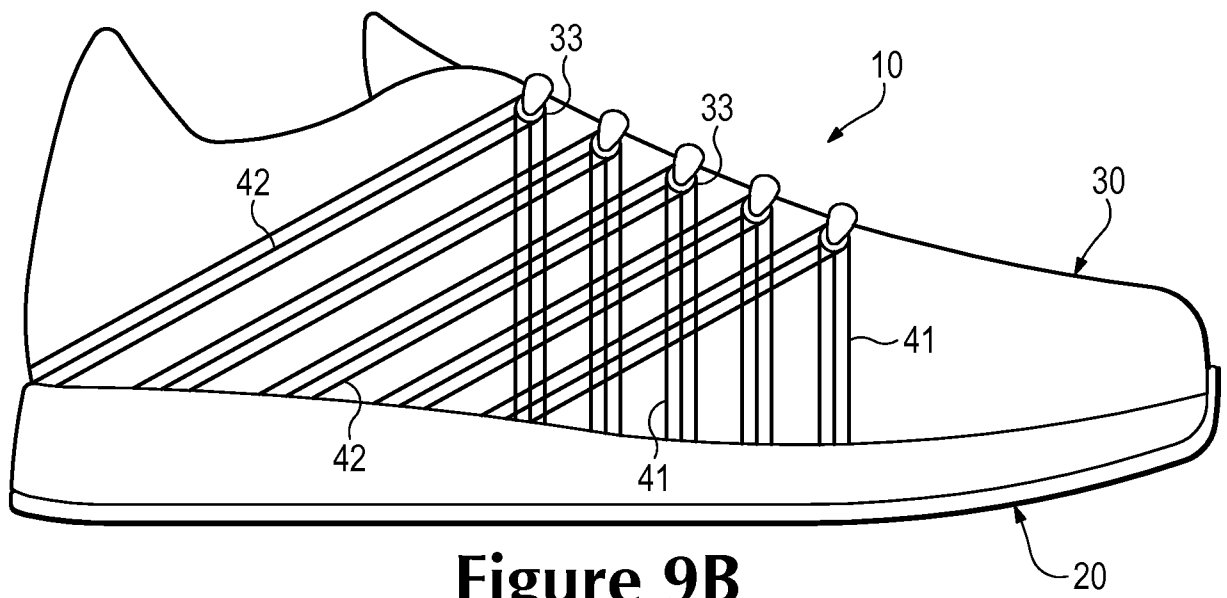


Figure 9B

10/18

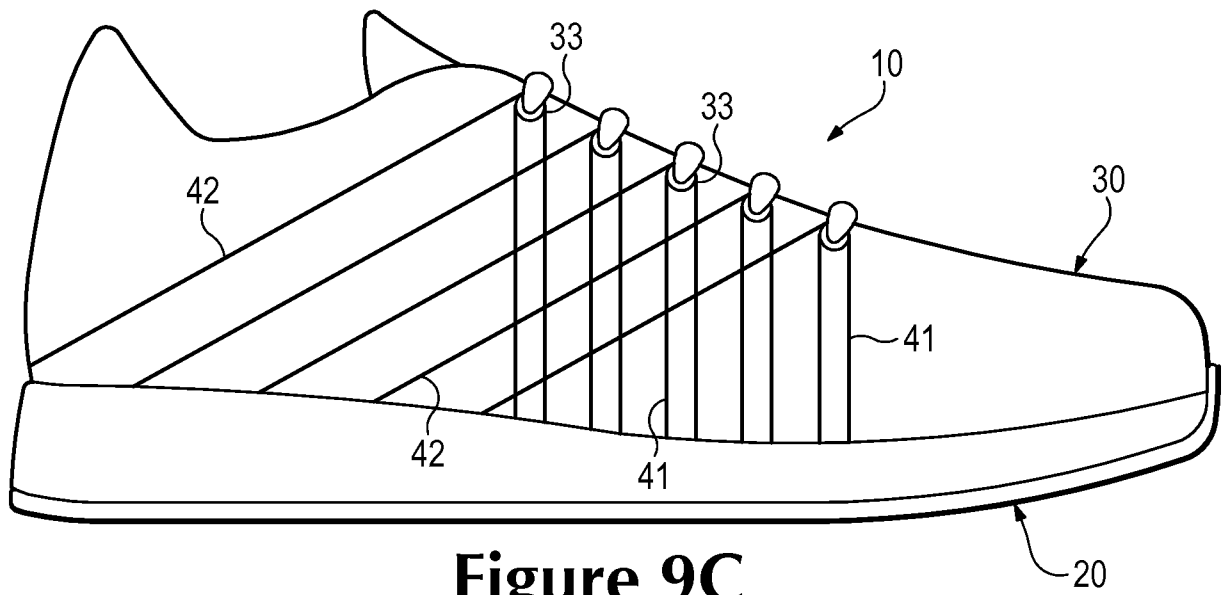


Figure 9C

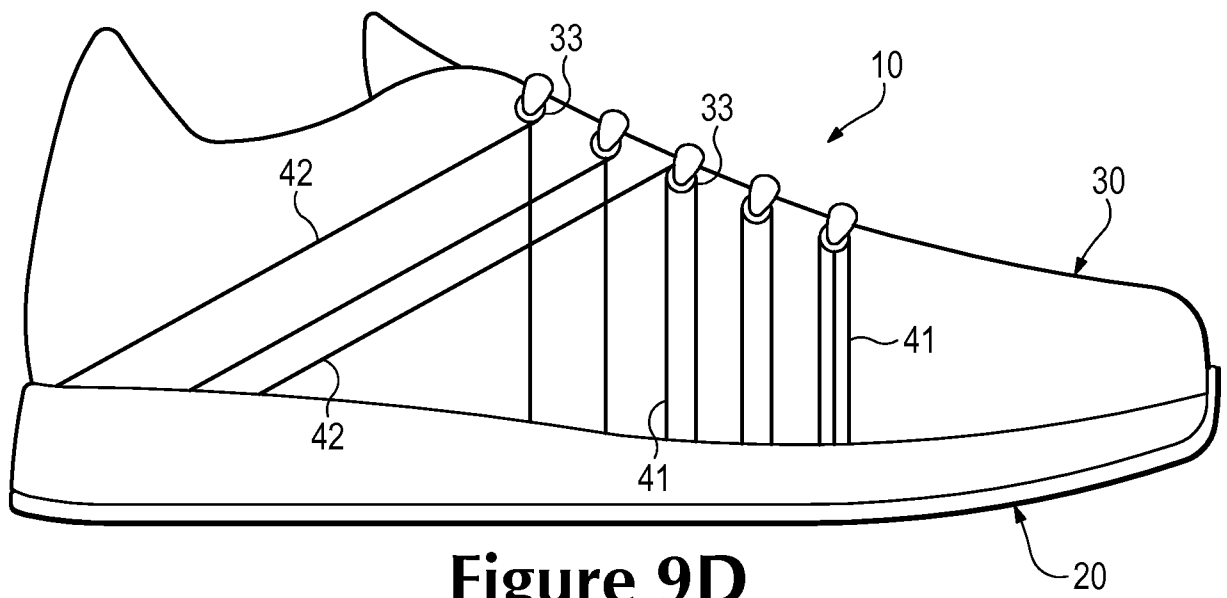


Figure 9D

11/18

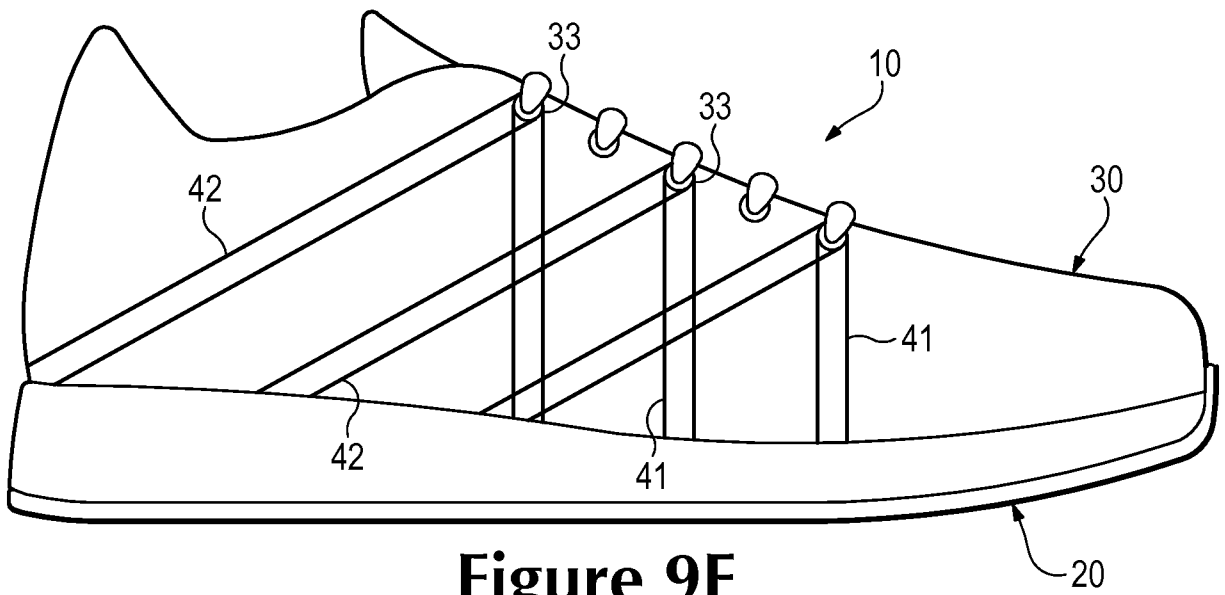


Figure 9E

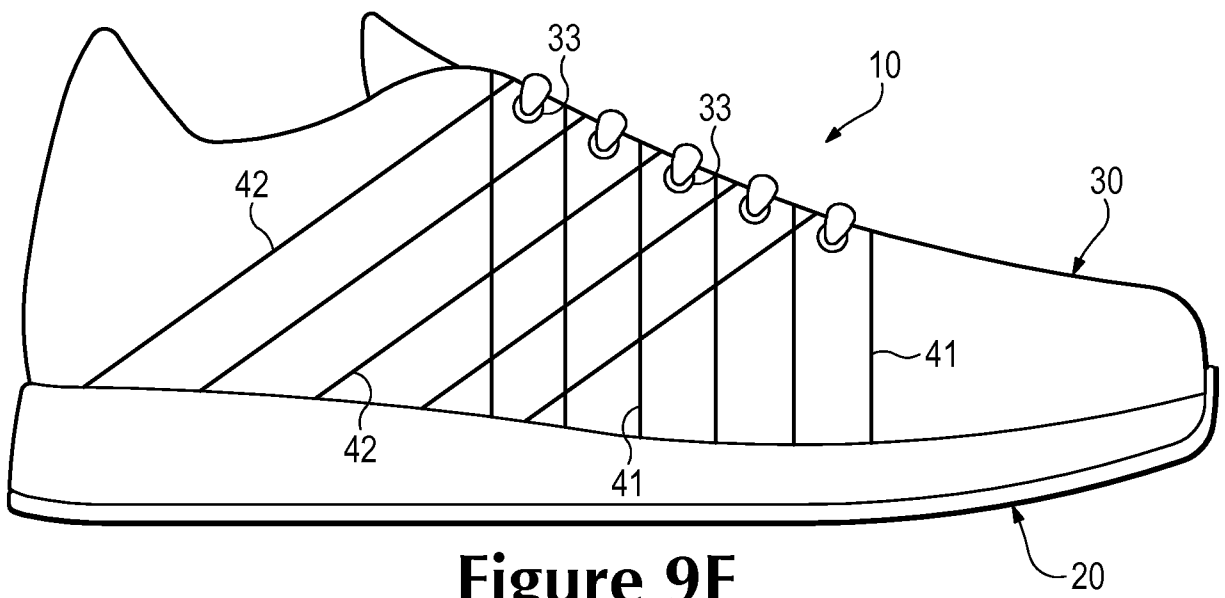


Figure 9F

12/18

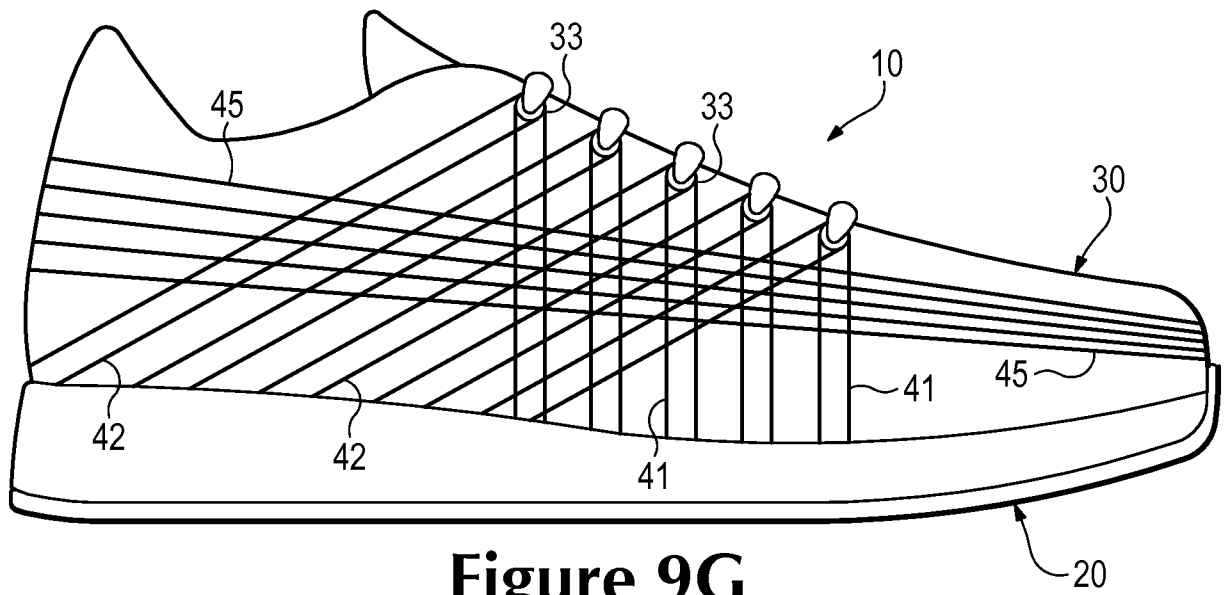


Figure 9G

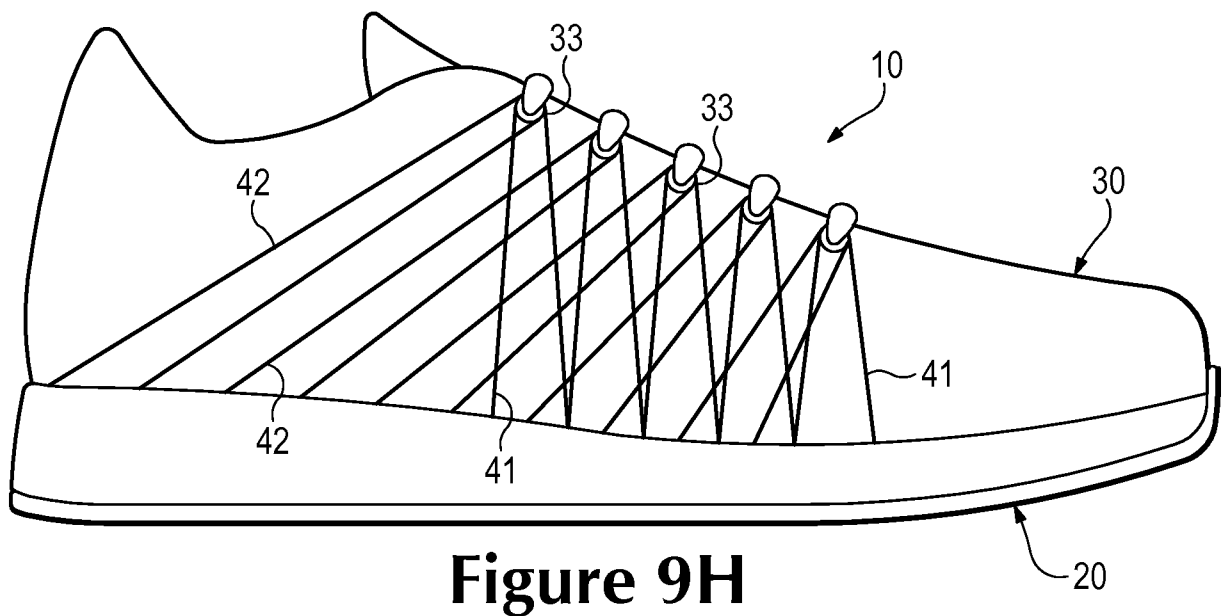


Figure 9H

13/18

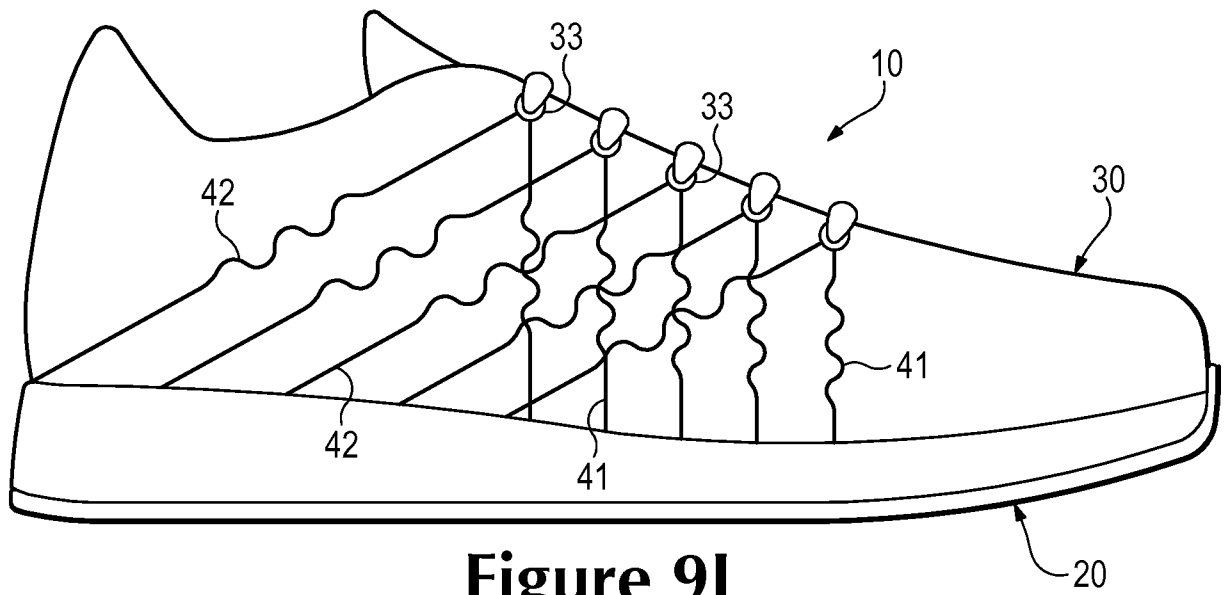


Figure 9I

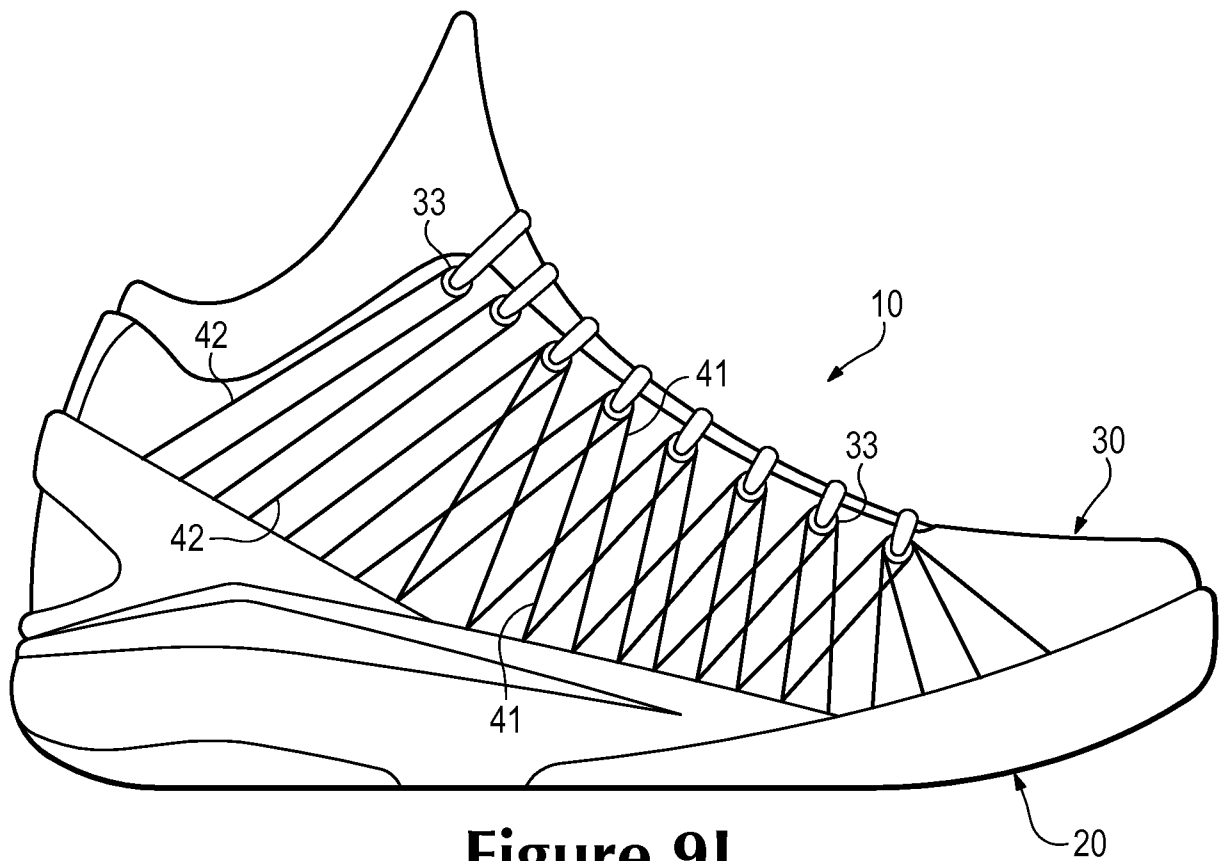


Figure 9J

14/18

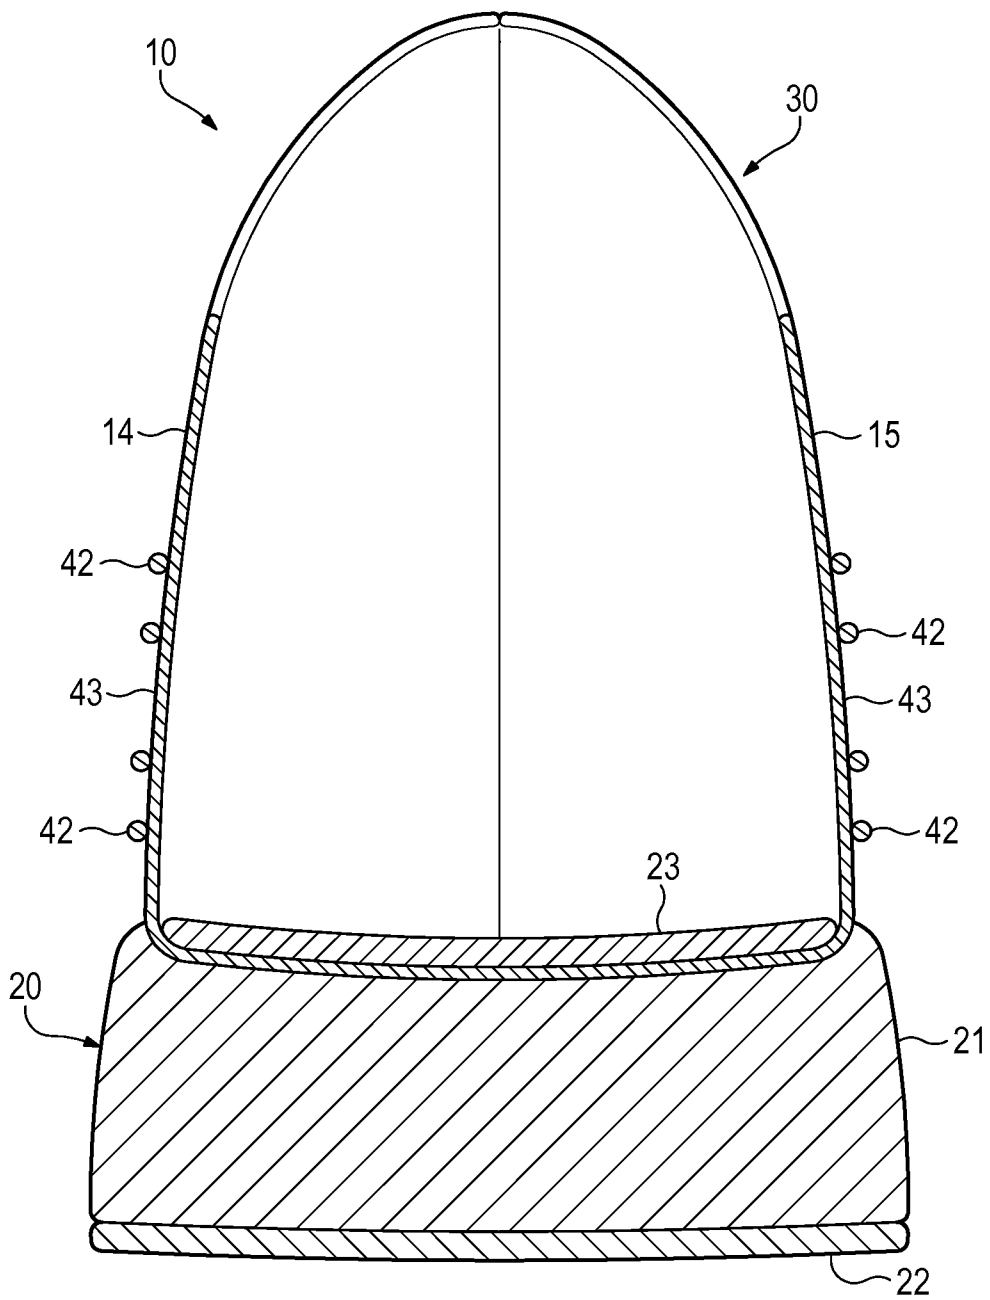


Figure 10A

15/18

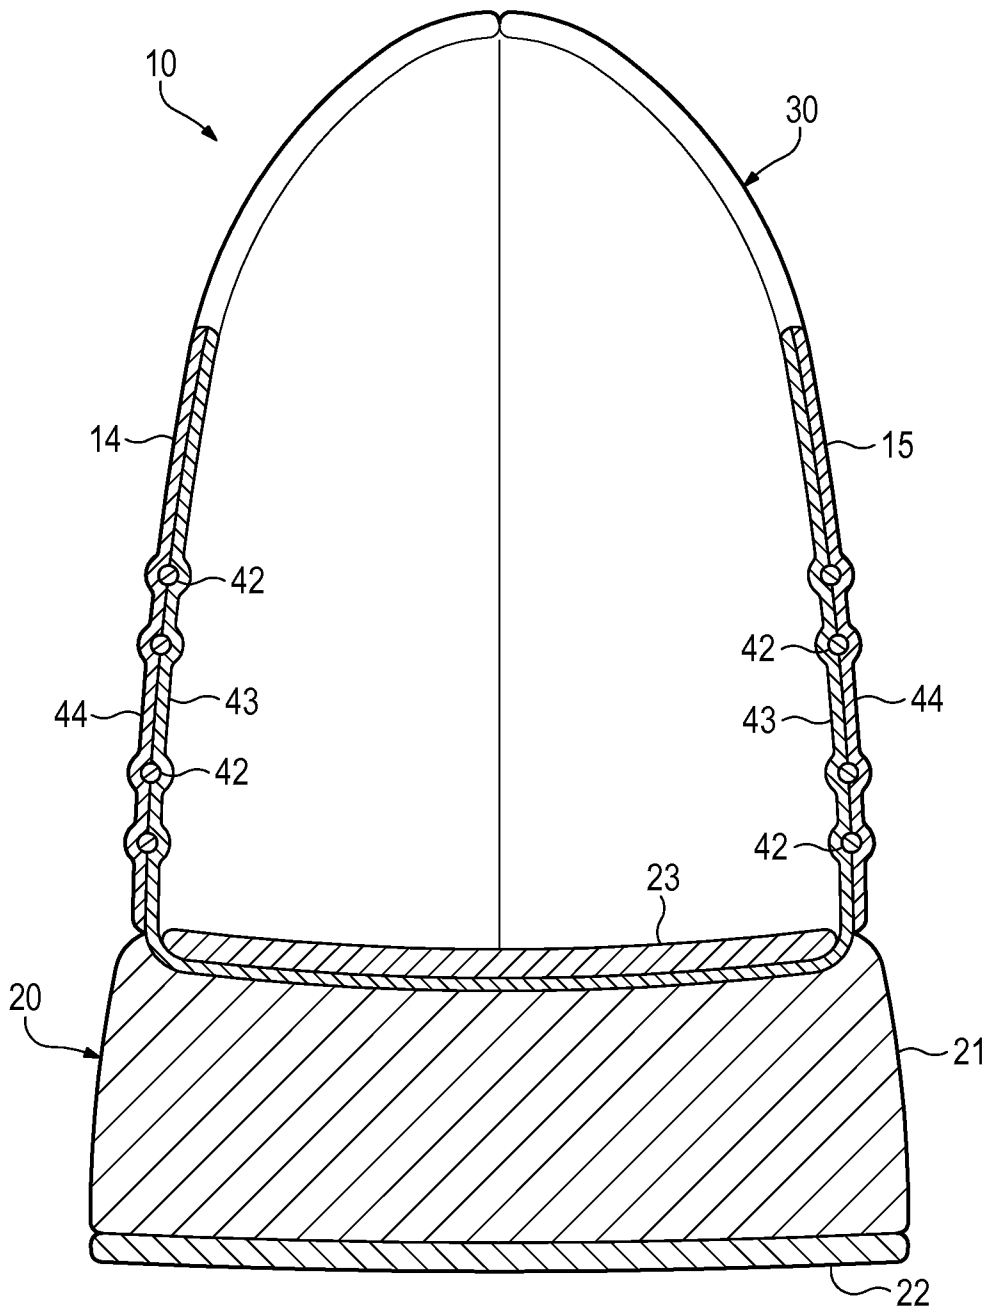


Figure 10B

16/18

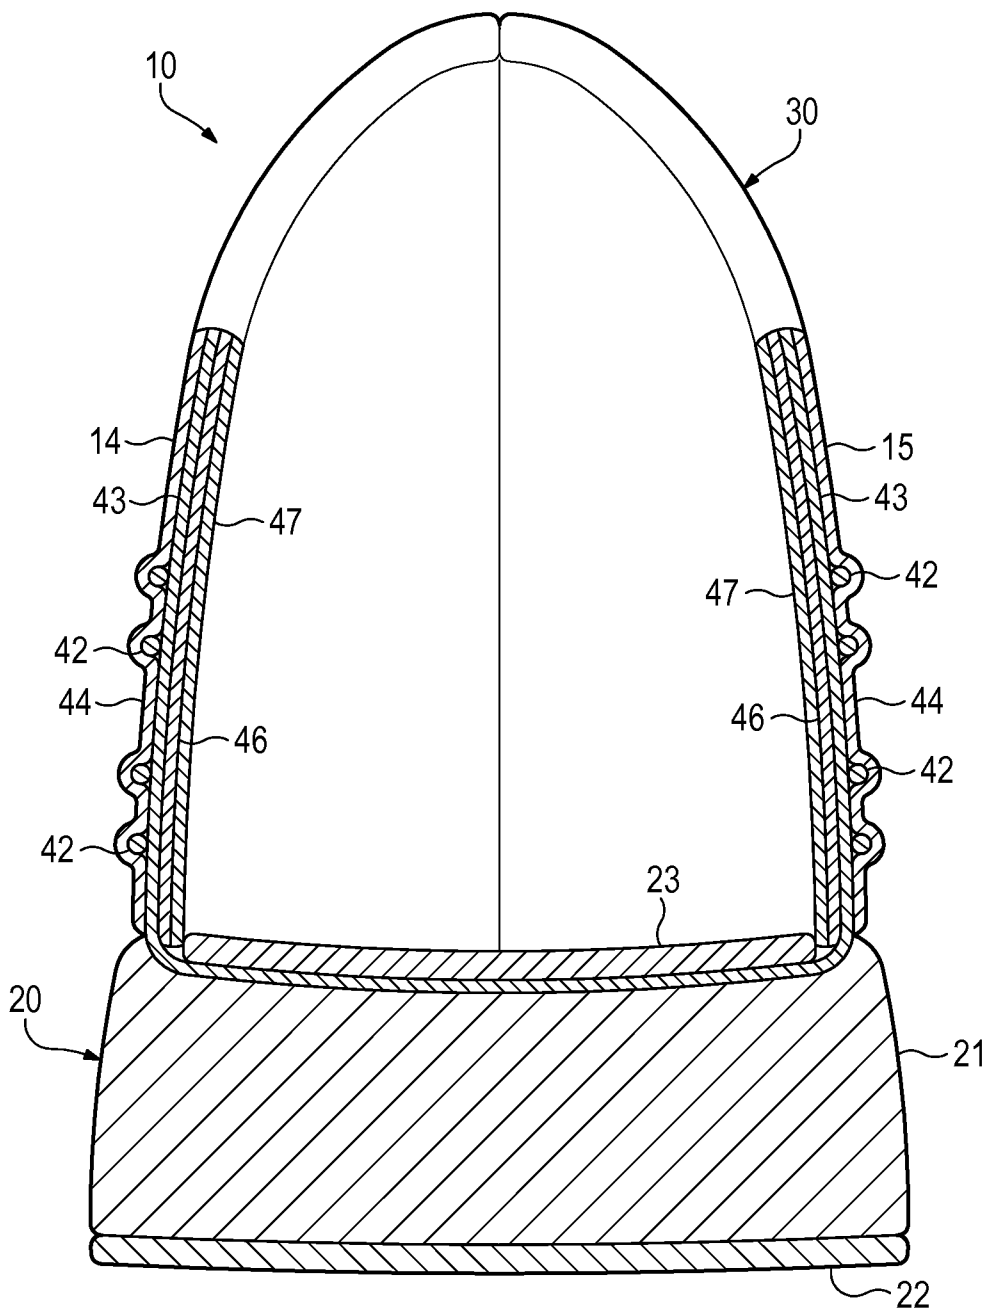


Figure 10C

17/18

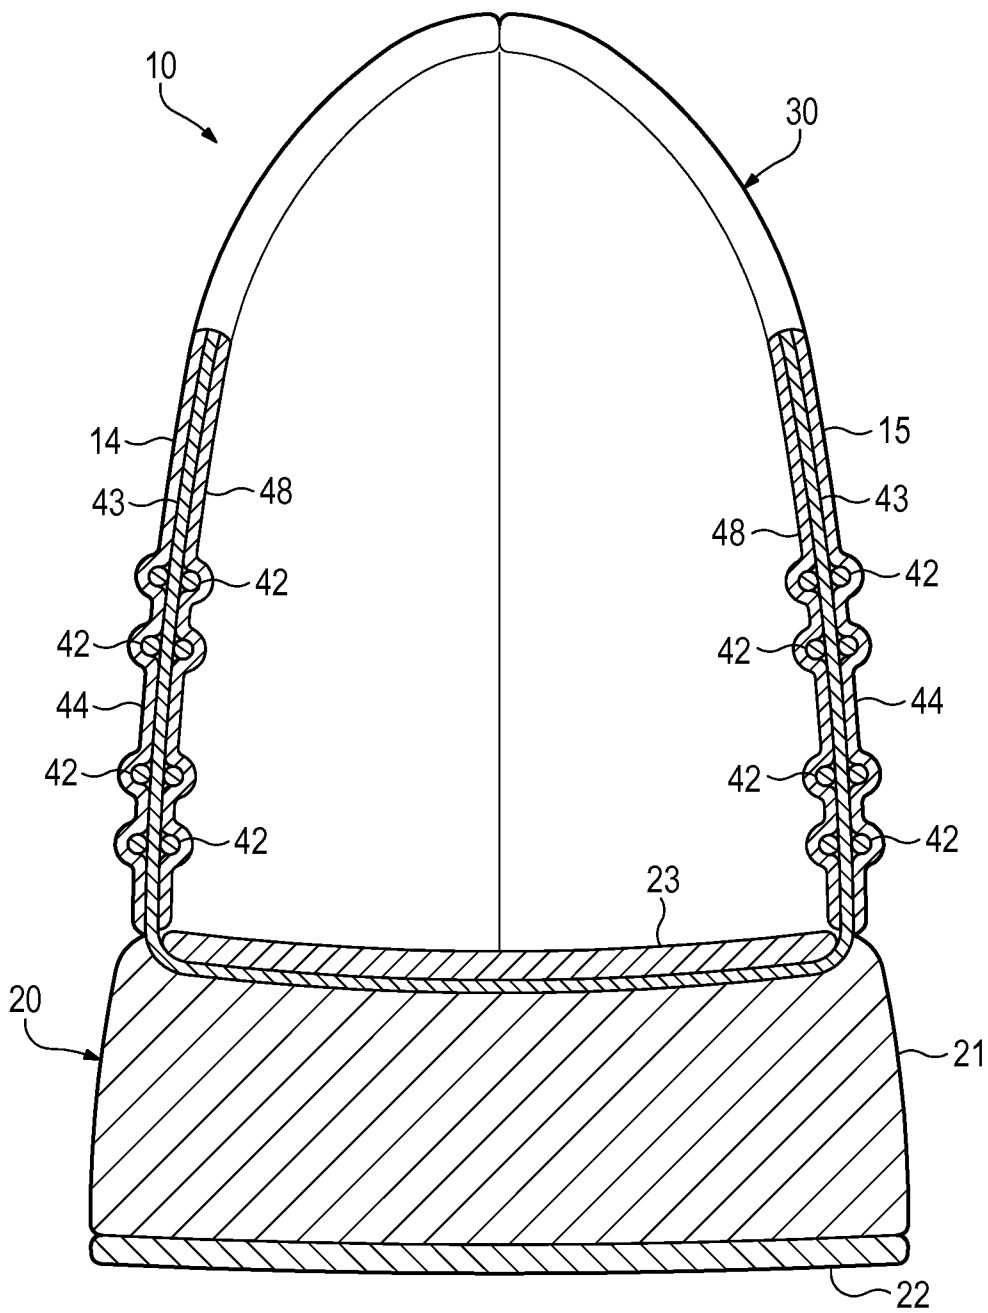


Figure 10D

18/18

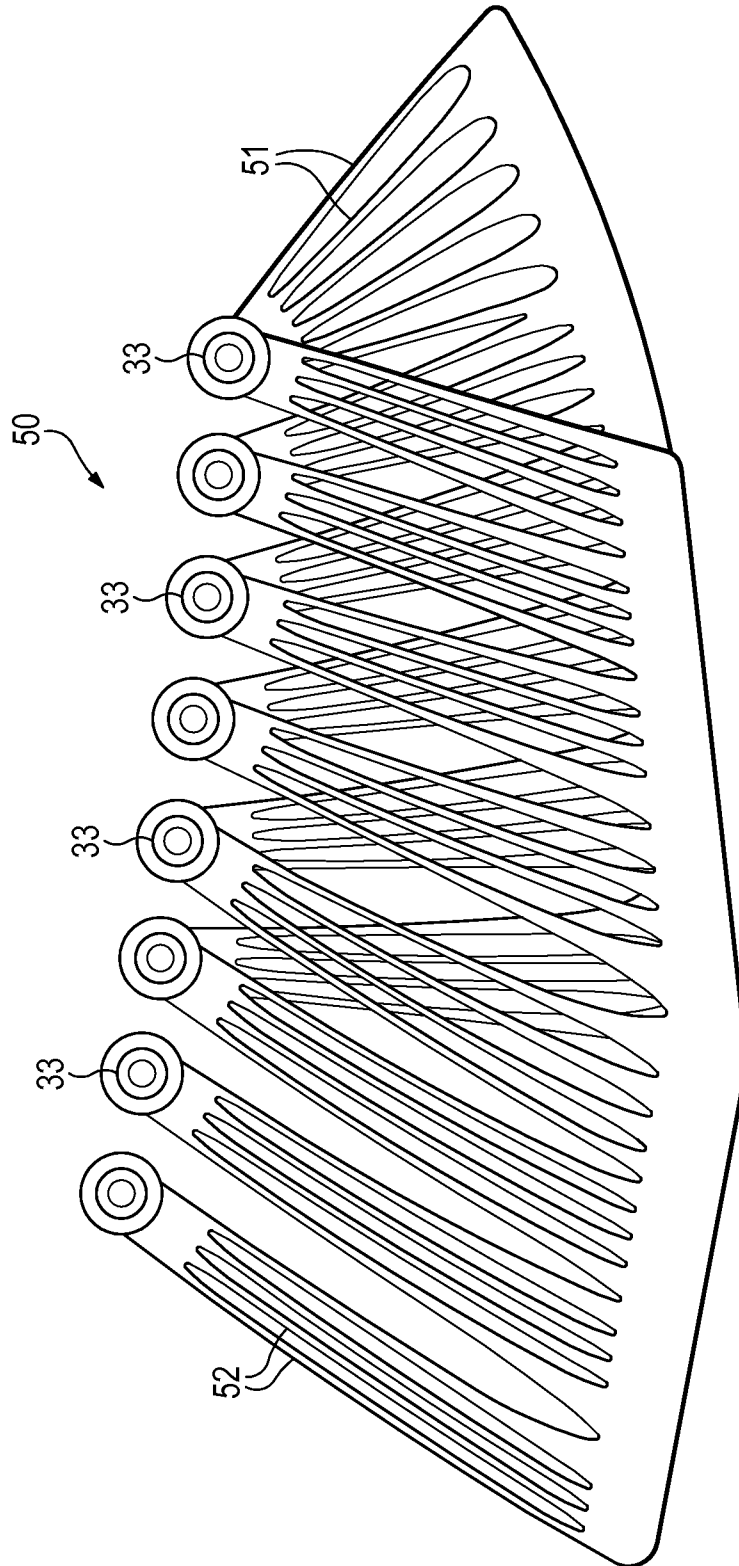


Figure 11

INTERNATIONAL SEARCH REPORT

International application No PCT/US2011/043653

A. CLASSIFICATION OF SUBJECT MATTER
 INV. A43B23/22 A43B23/02 B32B7/02
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 A43B B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010/043253 A1 (DOJAN FREDERICK J [US] ET AL) 25 February 2010 (2010-02-25) paragraph [0037] - paragraph [0041]; figures -----	1-18
A	US 2006/048413 A1 (SOKOLOWSKI SUSAN L [US] ET AL) 9 March 2006 (2006-03-09) paragraphs [0034], [0049], [0055]; figures -----	1-18
A	WO 98/43506 A1 (FILA USA INC [US]) 8 October 1998 (1998-10-08) the whole document -----	1-18
A	US 3 439 434 A (TANGORRA GIORGIO) 22 April 1969 (1969-04-22) the whole document -----	1-18

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- | | |
|--|--|
| <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> | <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> |
|--|--|

Date of the actual completion of the international search

26 October 2011

Date of mailing of the international search report

04/11/2011

Name and mailing address of the ISA/
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

 Herry, Manuel

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2011/043653

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010043253 A1	25-02-2010	US 2010043253 A1 WO 2011028443 A1	25-02-2010 10-03-2011

US 2006048413 A1	09-03-2006	US 2006048413 A1 US 2010287790 A1 WO 2006028664 A1	09-03-2006 18-11-2010 16-03-2006

WO 9843506 A1	08-10-1998	NONE	

US 3439434 A	22-04-1969	AT 288913 B CH 464734 A DE 1685731 A1 ES 137296 Y FR 1549875 A JP 48023293 B US 3439434 A	25-03-1971 31-10-1968 19-08-1971 01-03-1969 13-12-1968 12-07-1973 22-04-1969
