

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 March 2011 (10.03.2011)

(10) International Publication Number
WO 2011/028286 A1

(51) International Patent Classification:

C08J 3/02 (2006.01)

(21) International Application Number:

PCT/US2010/002426

(22) International Filing Date:

1 September 2010 (01.09.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/275,726 1 September 2009 (01.09.2009) US

(71) Applicant (for all designated States except US): **RHO-DIA OPERATIONS** [FR/FR]; 40, rue de la Haie Coq, F-93300 Aubervilliers (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WU, Dan** [CN/US]; 421 Arbor Drive, Carmel, IN 46032 (US). **SHANMUGANANDAMURTHY, Krishnamurthy** [IN/US]; 115 Hampshire Drive, Plainsboro, NJ 08536 (US). **GOYAL, Rajesh** [IN/US]; 639 Hemlock Court, Bensalem, PA 19020 (US).

(74) Agent: **MCVEIGH, Kevin**; Rhodia Inc., CN 7500, 8 Cedar Brook Drive, Cranbury, NJ 08512 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))



WO 2011/028286 A1

(54) Title: POLYMER COMPOSITIONS

(57) Abstract: A composition contains an incompletely hydrated water soluble polymer suspended in a liquid medium.

POLYMER COMPOSITIONS

Field of the Invention

[0001] This invention relates to polymer compositions.

Background of the Invention

[0002] Water soluble polymers, particularly polysaccharide polymers, such as, for example, guar, guar derivatives, starches, and cellulosic polymers, are commercially available materials used in a variety of applications, including as ingredients in food products, personal care compositions, agricultural pesticide compositions, and compositions, such as fracturing fluids, for use in oilfield applications.

[0003] In many applications, a polymer in the form of a dry powder is added to an aqueous medium and dissolved to form a viscous aqueous solution.

[0004] In some applications, it would desirable to provide a liquid concentrate that has a high polymer content and that could simply be diluted to the desired end-use concentration. This approach can be difficult, for example, concentrated aqueous polysaccharide polymer solutions tend to be highly viscous and difficult to handle.

[0005] There is a continuing interest in providing polymer in a convenient form that exhibits good handling properties and good storage stability.

Summary of the Invention

[0006] In a first aspect, the present invention is directed to a composition comprising, based on 100 parts by weight of the composition, greater than 2.5 parts by weight of an incompletely hydrated water soluble polymer suspended in a liquid medium.

[0007] In a second aspect, the present invention is directed to a composition, comprising, based on 100 parts by weight of the composition, from greater than 2.5 to about 8 parts by weight of a guar polymer suspended in an aqueous medium, said polymer having a weight average molecular weight of from about 100,000 to about 5,000,000 grams per mole and said composition exhibiting:

- (a) a viscosity of greater than or equal to 5 Pa.s at a shear rate of less than 0.01 s⁻¹, and
- (b) a viscosity of less than 5 Pa.s at a shear rate of greater than 10 s⁻¹.

[0008] In a third aspect, the present invention is directed to a method for making a polysaccharide composition that comprises a mixture of an aqueous liquid medium, an incompletely hydrated water soluble polymer dispersed in the aqueous liquid medium, and a hydration inhibitor for inhibiting hydration of the water soluble polymer, comprising:

mixing the hydration inhibitor with the liquid medium, and
mixing the water soluble polymer with the mixture of aqueous liquid and hydration inhibitor to disperse the water soluble polymer.

[0009] In a fourth aspect, the present invention is directed to a composition, comprising, based on 100 parts by weight of the composition: an aqueous liquid medium, up to 2.5 parts by weight of an incompletely hydrolyzed water soluble polymer selected from non-derivatized guar polymers and derivatized guar polymers, dispersed in the liquid medium,

a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polysaccharide polymers other than the non-derivatized or derivatized guar polymer, and mixtures thereof, and

a hydration inhibitor selected from surfactant compounds, non-surfactant water soluble salts, water dispersible organic solvents, and mixtures thereof.

[00010] In a fifth aspect, the present invention is directed to a composition, comprising:

an aqueous liquid medium that comprises water and a water immiscible organic liquid,

an emulsifier for emulsifying the water and water immiscible liquid, and

an incompletely hydrolyzed water soluble polymer dispersed in the liquid medium,

wherein the composition is in the form of an emulsion, a microemulsion, or a suspoemulsion.

[00011] In a sixth aspect, the present invention is directed to a composition, comprising:

a non-aqueous liquid medium comprising a non-aqueous liquid selected from vegetable oils, alkylated vegetable oils, polar protic organic liquids, and mixtures thereof, and

an incompletely hydrolyzed water soluble polymer dispersed in the non-aqueous liquid medium.

[00012] In a seventh aspect, the present invention is directed to a composition, comprising, based on 100 parts by weight of the composition:

a liquid medium,

greater than 2.5 parts by weight of a water soluble polymer, wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed in the liquid medium, and

optionally, a suspending agent dissolved or dispersed in the liquid medium, and optionally, a hydration inhibitor dissolved or dispersed in the liquid medium.

[00013] In an eighth aspect, the present invention is directed to a composition, comprising, based on 100 parts by weight of the composition:

an aqueous liquid medium
, up to 2.5 parts by weight of a water soluble polymer, wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed in the liquid medium,
a suspending agent dissolved or dispersed in the liquid medium, and
a hydration inhibitor dissolved or dispersed in the liquid medium.

[00014] In a ninth aspect, the present invention is directed to a composition, comprising:

a liquid medium comprising water and a water immiscible organic liquid,
an emulsifier for emulsifying the water and a water immiscible organic liquid,
a water soluble polysaccharide polymer selected from polyacrylamide polymers, non-derivatized guar polymers, derivatized guar polymers, and mixtures thereof, wherein at least a portion of the water soluble polysaccharide polymer is in the form of particles of the water soluble polymer and wherein at least a portion of such particles are dispersed in the liquid medium, and
optionally, a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polysaccharide polymers other than derivatized or non-derivatized guar polymers, and mixtures thereof, dissolved or dispersed in the liquid medium,
wherein the composition is in the form of an emulsion, a microemulsion, or a suspoemulsion.

[00015] In a tenth aspect, the present invention is directed to a composition, comprising :

a non-aqueous liquid medium comprising a non-aqueous liquid selected from vegetable oils, alkylated vegetable oils, polar protic organic liquids, and mixtures thereof,

a water soluble polysaccharide polymer selected from polyacrylamide polymers, non-derivatized guar polymers, derivatized guar polymers, and mixtures thereof, wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed in the non-aqueous liquid medium, and

optionally, a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, and mixtures thereof, dispersed in the non-aqueous liquid medium.

Brief description of the Drawings

[00016] FIG. 1 shows a plot of viscosity, expressed in Pascal-seconds (Pa.s), vs. shear rate, expressed in reciprocal seconds (1/s), for the aqueous hydroxypropyl guar suspension of Example 1.

[00017] FIG. 2 shows a plot of shear rate (in reciprocal seconds (1/s)) vs. shear stress, expressed in Pascals (Pa), for the aqueous hydroxypropyl guar suspension of Example 1.

[00018] FIG. 3 shows a plot of viscosity, expressed in Pascal-seconds (Pa.s), vs. shear rate, expressed in reciprocal seconds (1/s), for the aqueous polyacrylamide suspension of Example 2.

[00019] FIG. 4 shows a plot of shear rate (in reciprocal seconds (1/s)) vs. shear stress, expressed in Pascals (Pa), for the aqueous polyacrylamide suspension of Example 2.

[00020] FIG. 5(a) shows a photograph of a sample of the compositions of Example 3.

[00021] FIG. 5(b) shows a photograph of a sample of the Comparative Example C3.

[00022] FIG. 6 shows a plot of viscosity, expressed in Pascal-seconds ("Pa.s") vs shear rate, expressed in reciprocal seconds ("s⁻¹"), for the composition of Example 3.

[00023] FIG. 7 shows a plot of viscosity, expressed in Pascal-seconds ("Pa.s") vs shear rate, expressed in reciprocal seconds ("s⁻¹"), composition of comparative Example C4.

[00024] FIG. 8 shows a plot of viscosity, expressed in Pascal-seconds ("Pa.s") vs shear rate, expressed in reciprocal seconds ("s⁻¹"), for composition of Example 5.

[00025] FIG. 9(a) shows a photomicrograph of the composition of Example 6.

[00026] FIG. 9(b) shows a photomicrograph of the composition of Example C6.

Detailed Description of Invention and Preferred Embodiments

[00027] As used herein, "liquid medium" means a medium that is in the liquid phase at a temperature of 25°C and a pressure of one atmosphere. The liquid medium may be a non-aqueous liquid medium or an aqueous liquid medium.

[00028] In one embodiment, the liquid medium is a non-aqueous liquid medium. As used herein, the terminology "non-aqueous medium" means a

single phase liquid medium that contains no more than trace amounts of water, typically, based on 100 parts by weight ("pbw") of the non-aqueous medium, no more than 0.1 pbw water. Suitable non-aqueous liquid media include organic liquids, including non-polar organic liquids, such as hexanes, cyclohexane, benzene, toluene, chloroform, diethyl ether, hydrocarbon oils, polar aprotic organic liquids, such as dichloromethane, ethyl acetate, acetone, tetrahydrofuran, and polar protic organic liquids, such as methanol, ethanol, propanol, glycerol, ethylene glycol, propylene glycol, diethylene glycol, poly(ethylene glycol)s, ethylene glycol monobutyl ether, dipropylene glycol methyl ether, and ethylene glycol phenyl ether, as well as mixtures of such liquids.. In one embodiment, the non-aqueous medium comprises an organic liquid that is not miscible in all proportions with water (a "water immiscible organic liquid"), such as, for example, non-polar organic liquids, long chain, e.g., C₈ or greater, alcohols, fatty acid esters and alkylated fatty acid esters. Suitable fatty acid esters include alkyl or hydroxyalkyl esters of (C₁₂-C₂₂)carboxylic acids, such as butyl myristate, cetyl palmitate, decylolate, glyceryl laurate, glyceryl ricinoleate, glyceryl stearate, glyceryl isostearate, hexyl laurate, isobutyl palmitate, isocetyl stearate, isopropyl isostearate, isopropyl laurate, isopropyl linoleate, isopropyl myristate, isopropyl palmitate, isopropyl stearate, propylene glycol monolaurate, propylene glycol ricinoleate, propylene glycol stearate, and propylene glycol isostearate, and mixtures thereof, including vegetable oils, such as castor oil, coconut oil, corn oil, cotton seed oil, olive oil, palm kernel oil, rapeseed oil, safflower seed oil, sesame seed oil, and soybean oil, and (C₁-C₃)alkylated esters of (C₁₂-C₂₂)carboxylic acids, such as methylated rapeseed oil and methylated soybean oil.

[00029] In one embodiment, the liquid medium is an aqueous liquid medium. As used herein, the terminology "aqueous medium" means a single phase liquid medium that contains more than a trace amount of water, typically, based on 100 pbw of the aqueous medium, more than 0.1 pbw water. Suitable aqueous media more typically comprise, based on 100 pbw of the aqueous medium, greater than about 5 pbw water, even more typically

greater than 10 pbw water. In one embodiment, the aqueous emulsion comprises, based on 100 pbw of the aqueous medium, greater than 40 pbw water, more typically, greater than 50 pbw water. The aqueous medium may, optionally, further comprise water soluble or water miscible components dissolved in the aqueous medium. The terminology "water miscible" as used herein means miscible in all proportions with water. Suitable water miscible organic liquids include, for example, (C₁-C₆)alcohols, such as methanol, ethanol, propanol, and (C₁-C₆)polyols, such as glycerol, ethylene glycol, propylene glycol, and diethylene glycol. The composition of the present invention may, optionally, further comprise one or more water insoluble or water immiscible components, such as a water immiscible organic liquid, wherein the combined aqueous medium and water insoluble or water immiscible components form a micro emulsion, or a multi-phase system such as, for example, an emulsion, a suspension or a suspension-emulsion, in which the aqueous medium is in the form of a discontinuous phase dispersed in a continuous phase of the water insoluble or water immiscible component, or, more typically, the water insoluble or water immiscible component is in the form of a discontinuous phase dispersed in a continuous phase of the aqueous medium.

[00030] As used herein, the term "hydration" in reference to the water soluble polymer component of the present invention means association of substituent groups, typically hydrophilic substituent groups, such as hydroxyl groups, of the water soluble polymer with water molecules, such as water molecules of the aqueous medium through, for example, hydrogen bonding. The degree to which the water soluble polymer is hydrated can range from non-hydrated to completely hydrated, with degrees of partial hydration extending between the two extremes. As discussed more fully below, the water soluble polymer is capable of contributing to the viscosity of the composition of the present invention with the magnitude of the contribution being dependent on the degree of hydration of the water soluble polymer. The degree of hydration of the water soluble polymer can thus be

characterized based on the magnitude of the contribution that the water soluble polymer makes to the viscosity of the composition:

- (a) As referred to herein a "non-hydrated" water soluble polymer makes no significant contribution to the viscosity of the composition. In general, the non-hydrated water soluble polymer would be in the form of a discontinuous phase, for example, discrete particles, that is dispersed in a continuous phase of the liquid medium, ideally with no interaction between the hydrophilic substituents of the polymer and any water molecules present in the liquid medium. In the case of an aqueous medium, there will generally be at least some interaction between the hydrophilic groups of polymer and water molecules of the aqueous medium at interfaces between the phases, for example, at the outer surfaces of the particles. It is believed that in the case of a non-hydrated water soluble polymer, interaction among the hydrophilic substituent groups of the non-hydrated water soluble polymer dominates over interaction between the hydrophilic substituent groups of the polymer and any water molecules present in the aqueous medium, the polymer chains of the non-hydrated water soluble polymer are in a compact, folded conformation, and, in the case where the liquid medium is an aqueous medium, the non-hydrated water soluble polymer is not dissolved in the aqueous medium and remains in the form of a discontinuous phase dispersed in the continuous phase of the aqueous medium.
- (b) As referred to herein, a "completely hydrated" water soluble polymer makes the maximum contribution to the viscosity of the composition that the water soluble polymer is capable of making. It is believed that in a completely hydrated water soluble polymer, association between the hydrophilic substituent groups of the water soluble polymer and water molecules dominates over interaction among the hydrophilic substituent groups, that the polymer chains of a completely hydrated water soluble polymer are thus in an unfolded, random coil conformation, and in the case where the liquid medium is an aqueous medium, the aqueous medium and completely hydrated

water soluble polymer form a single phase, that is, the completely hydrated water soluble polymer is dissolved in the aqueous medium.

- (c) As referred to herein, a "partially hydrated" water soluble polymer is a water soluble polymer wherein some of the hydrophilic substituent groups of the polymer are associated with water molecules. At a relatively low level of hydration, the partially hydrated water soluble polymer makes a relatively small contribution to the viscosity of the composition, while at a relatively high level of hydration, the viscosity contribution of a given amount of a partially hydrated water soluble polymer in a given medium approaches, but is less than, the maximum contribution that the amount of water soluble polymer is capable of making in that medium when completely hydrated. It is believed that with increasing hydration, particles of the water soluble polymer swell, an increasing number of hydrophilic substituent groups of the water soluble polymer, including hydrophilic substituent groups within the mass of swollen water soluble polymer, become associated with water molecules, and, as complete hydration is approached, the water soluble polymer chains progressively unfold and approach an unfolded, randomly coiled configuration.

[00031] "Non-hydrated" and "partially hydrated" are collectively referred to herein as "incompletely hydrated".

[00032] The degree of hydration of the water soluble polymer can be characterized by viscosity measurements. For example, the viscosity of a given amount of a water soluble polymer, in a given amount of an aqueous medium, in the presence of a given amount of a proposed hydration inhibitor, and under given shear conditions, as described in more detail below (the "test composition"), can be compared to the viscosity of the same amount of the water soluble polymer in the same amount of the aqueous medium in the absence of the proposed hydration inhibitor (the "baseline composition"). If the viscosity of the test composition is equal to that of the baseline composition, then the water soluble polymer of the test composition is

deemed to be completely hydrated (and the proposed hydration inhibitor is ineffective in the amount tested to inhibit hydration of the polymer). If the viscosity of the test composition is less than that of the baseline composition, then the water soluble polymer of the test composition is deemed to be incompletely hydrated (and the proposed hydration inhibitor is effective in the amount tested to inhibit hydration of the polymer).

[00033] In one embodiment, the liquid medium is an aqueous liquid medium and at least a portion of the water soluble polymer is in the form of particles of the water soluble polymer. In one embodiment, the liquid medium is an aqueous liquid medium, at least a portion of the water soluble polymer is in the form of particles of the water soluble polymer, and at least a portion of such particles are dispersed, more typically suspended, in the aqueous liquid medium. The presence of such particles in the composition of the present invention may be detected by, for example, optical microscopy.

[00034] In one embodiment, the composition of the present invention exhibits a viscosity of less than 10 Pa.s, more typically from about 0.1 to less than 10 Pa.s, and even more typically from about 0.1 to less than 5 Pa.s, at a shear rate of greater than or equal to 10 s^{-1} .

[00035] In one embodiment, the composition of the present invention exhibits a non-Newtonian "shear thinning" viscosity, that is, a viscosity that, within a given range of shear stress, decreases with increasing shear stress. Two general generally recognized categories of flow behavior, that is, plastic flow behavior and pseudoplastic flow behavior, each include shear thinning flow behavior.

[00036] In one embodiment, the composition of the present invention exhibits plastic flow behavior. As used herein, the term "plastic" in reference to flow behavior of a composition means the composition that exhibits a characteristic "yield strength", that is, a minimum shear stress required to initiate flow of the composition, and exhibits shear thinning behavior over

some range of shear stress above the yield strength. A plastic composition exhibits no flow when subjected to shear stress below its yield strength, and flows when subjected to shear stress above its yield strength, wherein, over an intermediate range of shear stress above its yield strength, the composition typically exhibits a non-Newtonian viscosity that decreases with increasing shear stress, that is, shear thinning behavior, and, at shear stresses above the intermediate range of shear stress, the composition may exhibit a viscosity that does not vary with shear stress, that is, Newtonian flow behavior.

[00037] In one embodiment the composition of the present invention exhibits pseudoplastic flow behavior. As used herein, the term "pseudoplastic" in reference to the flow behavior of a composition means that the composition exhibits a viscosity that decreases with increasing shear stress, that is, shear thinning behavior.

[00038] In each case, a composition having plastic or pseudoplastic rheological properties resists flow at low shear stress, but that when subjected to an elevated shear stress, such as being shaken in a bottle or squeezed through an orifice, the composition flows and can be easily pumped, poured, or otherwise dispensed from a container. In general, sedimentation or storage condition is a low shear process, having a shear rate in the range of from about 10^{-6} reciprocal seconds (1/s or, equivalently, s^{-1}) to about $0.01\ s^{-1}$ and pumping or pouring is a relatively high shear process with a shear rate in the range of greater than or equal to about $1\ s^{-1}$, more typically from $100s^{-1}$ to $10,000\ s^{-1}$, and even more typically, from $100s^{-1}$ to $1,000\ s^{-1}$.

[00039] In one embodiment, the composition of the present invention comprises from about 1 pbw, or from about 1.5 pbw, or from about 2 pbw, or from greater than 2.5 pbw, to about 30 pbw, or to about 25 pbw, or to about 20 pbw, or to about 15 pbw, or to about 12 pbw, of the water soluble polymer and exhibits a viscosity of less than or equal to about 10 Pa.s, more typically

from about 0.1 to less than or equal to 10 Pa.s, and even more typically from about 0.1 to less than or equal to 5 Pa.s, at a shear rate of greater than or equal to 10 s⁻¹.

[00040] In one embodiment, the composition of the present invention resists sedimentation or separation under low shear stress storage conditions yet is pumpable under elevated shear stress condition. In one such embodiment, the composition of the present invention exhibits a viscosity of from about 1 to about 1000 Pa.s, more typically from 5 to about 800 Pa.s, even more typically from about 10 to about 500 Pa.s, at a shear rate of less than or equal to 0.01 s⁻¹ and exhibits a viscosity that is less than the viscosity exhibited at a shear rate of less than or equal to 0.01 s⁻¹, typically a viscosity of less than 10 Pa.s, more typically from about 0.1 to less than 10 Pa.s, and even more typically from about 0.1 to less than 5 Pa.s, at a shear rate of greater than or equal to 10 s⁻¹, more typically, greater than or equal to 100 s⁻¹.

[00041] In one embodiment, the composition of the present invention exhibits a viscosity greater than or equal to 10 Pa.s at a shear rate of less than or equal to 0.01 s⁻¹ and exhibits a viscosity of less than 10 Pa.s at a shear rate of greater than or equal to 10 s⁻¹, more typically, greater than or equal to 100 s⁻¹.

[00042] In one embodiment, the composition of the present invention exhibits a viscosity greater than or equal to 5 Pa.s at a shear rate of less than or equal to 0.01 s⁻¹ and exhibits a viscosity of less than 5 Pa.s at a shear rate of greater than or equal to 10 s⁻¹, more typically, greater than or equal to 100 s⁻¹.

[00043] In one embodiment, the composition of the present invention exhibits a viscosity greater than or equal to 1 Pa.s at a shear rate of less than or equal to 0.01 s⁻¹ and exhibits a viscosity of less than 1 Pa.s at a

shear rate of greater than or equal to 10 s⁻¹, more typically, greater than or equal to 100 s⁻¹.

[00044] In one embodiment, the composition exhibits a yield strength of greater than 0 Pa, more typically greater than 0.01 Pa, even more typically from about 0.01 to about 10 Pa, still more typically from about 0.1 to about 5 Pa.

[00045] In one embodiment, the composition of the present invention also exhibits thixotropic properties. As used herein, the term "thixotropic" in reference to the flow properties of a composition means that the composition exhibits non-Newtonian shear thinning viscosity that is time dependent, i.e., the decrease in the viscosity of the composition that is brought about by increasing shear stress is reversible and the composition returns to its original state when the shear stress is discontinued.

[00046] In one embodiment, the composition of the present invention further comprises a suspending agent, typically dispersed in the liquid medium, in an amount effective to impart shear thinning viscosity, to impart yield strength, or to impart shear thinning viscosity and yield strength to the composition, generally in an amount, based on 100 pbw of the composition of the present invention, of from greater than 0 to about 10 pbw, more typically from about 0.2 to about 5 pbw, and even more typically, from about 0.5 to about 5 pbw of the suspending agent.

[00047] In one embodiment, the suspending agent is selected from silica, more typically fumed silica, inorganic colloidal or colloid-forming particles, more typically clays, rheology modifier polymers, and mixtures thereof. In one embodiment, wherein the liquid medium is an aqueous medium, the suspending agent comprises a polysaccharide polymer that differs from the water soluble polymer and that is more readily hydrolyzed than the water soluble polymer. For example, Xanthan gum may be

dissolved in an aqueous medium and used as a suspending agent to suspend incompletely hydrolyzed guar particles in the aqueous medium.

[00048] In one embodiment, wherein the liquid medium is an aqueous medium and the water soluble polymer is incompletely hydrolyzed and itself performs the function of suspending agent by forming a water swollen, viscous mass, said viscous mass having a lower viscosity than would the same amount of the same water soluble polymer in a fully hydrated state, and a separate suspending agent is not required.

[00049] In one embodiment, the composition of the present invention further comprises a hydration inhibitor, typically dissolved in the liquid medium, in an amount effective to inhibit hydration of the water soluble polysaccharide in the liquid medium so that the polysaccharide polymer component of the composition of the present invention is incompletely hydrated, generally in an amount, based on 100 pbw of the aqueous medium, of from greater than 0 to about 70 pbw, more typically from about 15 to about 60 pbw, and even more typically, from about 20 to about 50 pbw of the hydration inhibitor. Use of a hydration inhibitor component is typically of most benefit in those embodiments of the composition of the present invention wherein the liquid medium is an aqueous medium.

[00050] In one embodiment, the hydration inhibitor is selected from surfactants, water soluble non-surfactant salts, water dispersible organic solvents, and mixtures thereof. The terminology "non-surfactant salts" as used herein means salts that are not anionic, cationic, zwitterionic or amphoteric surfactants and includes active ingredients, such as a pesticidal active ingredient or a pharmaceutical active ingredient, that are salts and whose primary activity is other than modification of interfacial surface tension. The terminology "water dispersible organic solvents" includes water miscible organic liquids and water immiscible organic liquids that may be dispersed in water, such as for example, in the form of an emulsion of the water immiscible organic liquid in water.

[00051] It will be appreciated that the suspending agent and/or the hydration inhibitor component of the composition of the present invention may each perform more than one function. For example, a surfactant compound that functions as a hydration inhibitor in the composition of the present invention may also perform a desired function, for example, detergency, in an end use application, such as a cleaning composition, or a salt that functions as a hydration inhibitor in the composition of the present invention may also perform a desired function, for example, biological activity, in an end use application, such as a pharmaceutical or pesticide composition.

[00052] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition, of from greater than 0 pbw, more typically from about 1 pbw, even more typically from about 2 pbw, and still more typically from greater than 2.5 pbw, to about 30 pbw, more typically to about 25, even more typically to about 20 pbw, and still more typically about 12 pbw, of the water soluble polymer.

[00053] In one embodiment, the polymer is a polysaccharide polymer. Polysaccharide polymer typically have a large number of hydrophilic, typically, hydroxyl, substituent groups, per molecule, more typically one or more hydroxyl group per monomeric unit of the polysaccharide polymer.

[00054] In one embodiment, wherein the polysaccharide polymer is a polymer having a weight average molecular weight of up to about 10,000,000 grams per mole (g/mol) more typically of up to about 5,000,000 grams per mole, more typically from about 100,000 to about 4,000,000 g/mol, even more typically from about 500,000 to about 3,000,000 g/mol, the composition of the present invention comprises, based on 100 pbw of the composition, up to about 15 pbw, more typically from about 1 to about 12 pbw, and even more typically, from about 2 to about 10 pbw, and still more typically from greater than 2.5 to about 8 pbw, of the polysaccharide

polymer. The weight average molecular weight of a polysaccharide polymer may be determined by known methods, such as by gel permeation chromatography with light scattering or refractive index detection. As generally used herein, i.e., in the absence of an explicit limitation such as "derivatized" or "non-derivatized", the term "guar polymer" refers collectively to non-derivatized polysaccharide polymers and derivatized polysaccharide polymers.

[00055] In one embodiment, wherein the polysaccharide polymer is a depolymerized guar having a molecular weight of less than about 100,000 g/mol, the composition of the present invention comprises, based on 100 pbw of the composition, up to about 50 pbw or to about 30 pbw, more typically from about 0.1 pbw or from about 1 pbw to about 25 pbw, even more typically, from about 1.5 to about 20 pbw, still more typically from about 2 pbw to about 15 pbw, and still more typically greater than 2.5 pbw to about 12 pbw, of the polysaccharide polymer.

[00056] In one embodiment, the composition of the present invention comprises from greater than 2.5 to about 8 pbw of a guar polymer suspended in a liquid medium, more typically an aqueous medium, wherein the polymer has a weight average molecular weight of from about 100,000 g/mol, more typically from about 500,000 g/mol, to about 5,000,000 g/mol, more typically to about 4,000,000 g/mol, and even more typically to about 3,000,000 g/mol, and the composition exhibits a viscosity of greater than or equal to 5 Pa.s, more typically greater than or equal to 10 Pa.s, at a shear rate of less than 0.01 s⁻¹, more typically less than 0.001 s⁻¹, and a viscosity that is less than the viscosity exhibited at a shear rate of less than or equal to 0.01 s⁻¹, typically a viscosity of less than 10 Pa.s, more typically less than 5 Pa.s, at a shear rate of greater than 10 s⁻¹, more typically greater than 100 s⁻¹.

[00057] In one embodiment, the composition of the present invention comprises:

- (a) a liquid medium,
- (b) an incompletely hydrated water soluble polymer, more typically wherein at least a portion of a water soluble polymer is in the form of particles of the water soluble polymer, at least a portion of which are dispersed, more typically suspended in the liquid medium, and
- (c) a suspending agent in an amount effective to impart shear thinning properties to the composition.

[00058] In one embodiment, the liquid medium is a non-aqueous medium and the polymer is a polysaccharide polymer.

[00059] In one embodiment, the liquid medium is an aqueous medium and the polymer is a polysaccharide polymer.

[00060] In one embodiment, the liquid medium is an aqueous medium and composition of the present invention comprises, based on 100 pbw of the composition:

- (a) greater than 0 pbw, more typically greater than or equal to about 10 pbw, even more typically greater than or equal to about 30 pbw, and still more typically greater than or equal to about 40 pbw water,
- (b) from greater than 0 pbw, more typically from about 0.1 pbw or from about 1 pbw, more typically from about 1.5 pbw, even more typically from about 2 pbw, and still more typically from greater than 2.5 pbw, or from about 3 pbw or from about 4 pbw, to about 50 pbw or to about 30 pbw, more typically to about 25 pbw, more typically to about 20 pbw, even more typically to about 15 pbw, and still more typically, to about 12 pbw, of the incompletely hydrated water soluble polysaccharide polymer, more typically wherein at least a portion of the water soluble polymer is in the form of particles, and at least a portion of such particles are dispersed, more typically, suspended, in the liquid medium, and
- (c) from greater than 0 pbw, more typically from about 0.1 pbw, even more typically from about 0.2 pbw, and still more typically from about

0.5 pbw, to about 10 pbw and, more typically, to about 5 pbw, of the suspending agent.

[00061] In one embodiment, the composition of the present invention comprises:

- (a) an aqueous medium,
- (b) an incompletely hydrated water soluble polysaccharide polymer, more typically wherein at least a portion of a water soluble polymer is in the form of particles of the water soluble polymer, at least a portion of which are dispersed, more typically suspended in the aqueous medium,
- (c) a suspending agent in an amount effective to impart shear thinning properties to the composition, and
- (d) a hydration inhibitor in an amount effective to inhibit hydration of the water soluble polysaccharide in the aqueous medium.

[00062] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition:

- (a) greater than 0 pbw, more typically greater than or equal to about 10 pbw, even more typically greater than or equal to about 30 pbw, and still more typically greater than or equal to about 40 pbw, water,
- (b) from greater than 0 pbw, more typically from about 0.1 pbw or from about 1 pbw, more typically from about 1.5 pbw, even more typically from about 2 pbw, and still more typically from greater than 2.5 pbw, or from about 3 pbw or from about 4 pbw, to about 50 pbw or to about 30 pbw, more typically to about 25 pbw, more typically to about 20 pbw, even more typically, to about 15 pbw, and still more typically, to about 12 pbw, of the incompletely hydrated polysaccharide polymer, more typically wherein at least a portion of the water soluble polymer is in the form of particles, and at least a portion of such particles are dispersed, more typically, suspended, in the liquid medium,
- (c) from greater than 0 pbw, more typically from about 0.1 pbw, even more typically from about 0.2 pbw, and still more typically from about

0.5 pbw, to about 10 pbw and, and more typically to about 5 pbw, of the suspending agent, and

- (d) from greater than 0 pbw, more typically from about 10 pbw, even more typically from about 15 pbw, and still more typically from about 20 pbw, to about 70 pbw, more typically to about 60 pbw, and even more typically to about 50 pbw, of the hydration inhibitor.

[00063] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition:

- (a) greater than 0 pbw, more typically greater than or equal to about 10 pbw, even more typically greater than or equal to about 30 pbw, and still more typically greater than or equal to about 40 pbw, water,
- (b) from greater than 0 or from about 0.1 pbw to about 50 pbw or to about 30 pbw, more typically from about 1 to about 25 pbw, more typically, from about 1.5 to about 20 pbw, even more typically, from about 2 to about 15 pbw, and still more typically from greater than 2.5 to about 12 pbw, of the incompletely hydrated polysaccharide polymer, more typically wherein at least a portion of the water soluble polymer is in the form of particles, and at least a portion of such particles are dispersed, more typically, suspended, in the liquid medium,
- (c) from greater than 0 to about 10 pbw, more typically from about 0.1 to about 10 pbw, even more typically from about 0.2 to about 5 pbw, and still more typically, from about 0.5 to about 5 pbw, of the suspending agent, and
- (d) from greater than 0 to about 70 pbw, more typically from about 10 to about 70 pbw, even more typically from about 15 to about 60 pbw, and still more typically from about 20 to about 50 pbw, of the hydration inhibitor.

[00064] In one embodiment, the suspending agent is a silica and the hydration inhibitor is a non-surfactant salt, a surfactant, a water dispersible organic solvent, a mixture of a non-surfactant salt and a surfactant, a mixture of a non-surfactant salt and a water dispersible organic solvent, or a mixture

of a non-surfactant salt, a surfactant, and a water dispersible organic solvent.

[00065] In one embodiment, the suspending agent is a silica and the hydration inhibitor is a mixture of a non-surfactant salt and a surfactant.

[00066] In one embodiment, the suspending agent is a clay and the hydration inhibitor is a non-surfactant salt, a surfactant, a water dispersible organic solvent, a mixture of a non-surfactant salt and a surfactant, a mixture of a non-surfactant salt and a water dispersible organic solvent, or a mixture of a non-surfactant salt, a surfactant, and a water dispersible organic solvent.

[00067] In one embodiment, the suspending agent is a rheology modifier polymer and the hydration inhibitor is a non-surfactant salt, a surfactant, a water dispersible organic solvent, a mixture of a non-surfactant salt and a surfactant, a mixture of a non-surfactant salt and a water dispersible organic solvent, or a mixture of a non-surfactant salt, a surfactant, and a water dispersible organic solvent.

[00068] In one embodiment, the suspending agent is a mixture of a silica and a clay and the hydration inhibitor is a non-surfactant salt, a surfactant, a water dispersible organic solvent, a mixture of a non-surfactant salt and a surfactant, a mixture of a non-surfactant salt and a water dispersible organic solvent, or a mixture of a non-surfactant salt, a surfactant, and a water dispersible organic solvent.

[00069] In one embodiment, the suspending agent is a mixture of a silica and a rheology modifier and the hydration inhibitor is a non-surfactant salt, a surfactant, a water dispersible organic solvent, a mixture of a non-surfactant salt and a surfactant, a mixture of a non-surfactant salt and a water dispersible organic solvent, or a mixture of a non-surfactant salt, a surfactant, and a water dispersible organic solvent.

[00070] In one embodiment, the suspending agent is a mixture of a clay and a rheology modifier and the hydration inhibitor is a non-surfactant salt, a surfactant, a water dispersible organic solvent, a mixture of a non-surfactant salt and a surfactant, a mixture of a non-surfactant salt and a water dispersible organic solvent, or a mixture of a non-surfactant salt, a surfactant, and a water dispersible organic solvent.

[00071] In one embodiment, the suspending agent is a mixture of a silica, a clay, and a rheology modifier and the hydration inhibitor is a non-surfactant salt, a surfactant, a water dispersible organic solvent, a mixture of a non-surfactant salt and a surfactant, a mixture of a non-surfactant salt and a water dispersible organic solvent, or a mixture of a non-surfactant salt, a surfactant, and a water dispersible organic solvent.

[00072] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition:

from greater than 0 pbw, or greater than or equal to about 10 pbw, or greater than or equal about 30 pbw of an aqueous medium, more typically water or a mixture of water and a water miscible organic liquid,

from greater than 2.5 pbw, or from about 3 pbw, or from about 4 pbw to about 50 pbw, or to about 30 pbw, or to about 25 pbw, or to about 20 pbw, or to about 15 pbw, or to about 12 pbw, of a water soluble polymer, more typically a water soluble polymer selected from water soluble polysaccharide polymers and water soluble non-polysaccharide polymers, and even more typically a water soluble polymer selected from polyacrylamide polymers, non-derivatized guars, derivatized guars, and mixtures thereof, wherein such water soluble polymer is incompletely hydrated, more typically wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed, more typically, suspended, in the liquid medium,

from 0 pbw, or from greater than 0 pbw, or from about 0.1 pbw, or from about 0.2 pbw, or from about 0.5 pbw, to about 10 pbw, or to about 5

pbw, of a suspending agent, more typically of a suspending agent selected from silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polymers other than the water soluble polymer, and mixtures thereof dissolved or dispersed in the liquid medium, and

from 0 pbw, or from greater than 0 pbw, or from about 2 pbw, or from about 5 pbw, to about 30 pbw or to about 15 pbw, or to about 10 pbw, of a hydration inhibitor, more typically a hydration inhibitor selected from surfactants, water soluble non-surfactant salts, water dispersible organic solvents, and mixtures thereof dissolved or dispersed in the liquid medium.

[00073] In one embodiment, the composition of the present invention comprises, based on 100 parts by weight of the composition:

from greater than 0 pbw, or greater than or equal to about 10 pbw, or greater than or equal to about 30 pbw an aqueous liquid medium comprising a mixture of water and a water immiscible organic liquid,

an emulsifier, more typically one or more emulsifiers comprising a nonionic surfactant, even more typically comprising a nonionic surfactant selected from sorbitan fatty acid esters, aryl alkoxylates, alkoxylated fatty alcohols, alkoxylated fatty acids, alkoxylated triglycerides, alkoxy copolymers, alkylpolyglucosides, alkoxylated fatty amines, and ether amines, and, and mixtures thereof, in an amount effective to emulsify the water and water immiscible organic liquid, more typically from greater than 0 pbw, or from about 2 pbw, to about 8 pbw or to about 6 pbw, of the surfactant,

from 0 pbw, or from greater than 0 pbw, or from about 0.1 pbw, or from about 1 pbw, or from about 1.5 pbw, or from about 2 pbw, or from greater than 2.5 pbw, or from about 4 pbw, to about 50 pbw to about 30 pbw, or to about 25 pbw, or to about 20 pbw, or to about 15 pbw, or to about 12 pbw, of a first water soluble polymer, more typically a water soluble polymer selected from water soluble polysaccharide polymers and water soluble non-polysaccharide polymers, and even more typically a water soluble polymer selected from polyacrylamide polymers, non-derivatized guars, derivatized guars, and mixtures thereof, wherein such water soluble polymer is incompletely hydrated, more typically wherein at least a portion of the water

soluble polymer is in the form of particles of the water soluble polymer and wherein at least a portion of such particles is dispersed, more typically, suspended, in the liquid medium,

from 0 pbw, or from greater than 0 pbw, or from about 0.1 pbw, or from about 0.2 pbw, or from about 0.5 pbw, to about 10 pbw, or to about 5 pbw, of a suspending agent selected from silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, second water soluble polymers other than the selected first water soluble polymer, and mixtures thereof dissolved or dispersed in the liquid medium, and

from 0 pbw, or from greater than 0 pbw, or from about 2 pbw, or from about 5 pbw, to about 30 pbw or to about 15 pbw, or to about 10 pbw, of a hydration inhibitor selected from surfactants, water soluble non-surfactant salts, water dispersible organic solvents, and mixtures thereof dissolved or dispersed in the liquid medium, wherein the composition is in the form of an emulsion, a microemulsion, or a suspoemulsion.

[00074] In one embodiment, the composition of the present invention comprises, based on 100 parts by weight of the composition:

from greater than 0 pbw, or greater than or equal to about 10 pbw, or greater than or equal to about 30 pbw of a non-aqueous liquid medium, more typically of a water immiscible organic liquid,

from greater than 0 pbw, or from about 0.1 pbw, or from about 1 pbw, or from about 1.5 pbw, or from about 2 pbw, or from greater than 2.5 pbw, or from about 4 pbw, to about 50 pbw, or to about 30 pbw, or to about 25 pbw, or to about 20 pbw, or to about 15 pbw, or to about 12 pbw, of a water soluble polymer, more typically a water soluble polymer selected from water soluble polysaccharide polymers and water soluble non-polysaccharide polymers, and even more typically a water soluble polymer selected from polyacrylamide polymers, non-derivatized guars, derivatized guars, and mixtures thereof, wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed, more typically, suspended, in the non-aqueous liquid medium, and

from 0 pbw, or from greater than 0 pbw, or from about 0.1 pbw, or from about 0.2 pbw, or from about 0.5 pbw, to about 10 pbw or to about 5 pbw, of a suspending agent, more typically a suspending agent selected from selected from silicas, inorganic colloidal or colloid-forming particles, and mixtures thereof, dispersed in the non-aqueous liquid medium.

[00075] Suitable water soluble polysaccharide polymers are include, for example, galactomannans such as guars, including guar derivatives, xanthans, polyfructoses such as levan, starches, including starch derivatives, such as amylopectin, and cellulose, including cellulose derivatives, such as methylcellulose, ethylcellulose, carboxymethylcellulose, hydroxyethylcellulose, cellulose acetate, cellulose acetate butyrate, and cellulose acetate propionate.

[00076] Galactomannans are polysaccharides consisting mainly of the monosaccharides mannose and galactose. The mannose-elements form a chain consisting of many hundreds of (1,4)- β -D-mannopyranosyl-residues, with 1,6 linked -D-galactopyranosyl-residues at varying distances, dependent on the plant of origin. Naturally occurring galactomannans are available from numerous sources, including guar gum, guar splits, locust bean gum and tara gum. Additionally, galactomannans may also be obtained by classical synthetic routes or may be obtained by chemical modification of naturally occurring galactomannans.

[00077] Guar gum refers to the mucilage found in the seed of the leguminous plant *Cyamopsis tetragonolobus*. The water soluble fraction (85%) is called "guaran," which consists of linear chains of (1,4)- β -D mannopyranosyl units-with α -D-galactopyranosyl units attached by (1,6) linkages. The ratio of D-galactose to D-mannose in guaran is about 1:2. Guar gum typically has a weight average molecular weight of between 2,000,000 and 5,000,000 g/mol. Guars having a reduced molecular weight, such as for example, from about 50,000 to about 2,000,000 g/mol are also known.

[00078] Guar seeds are composed of a pair of tough, non-brittle endosperm sections, hereafter referred to as "guar splits," between which is sandwiched the brittle embryo (germ). After dehulling, the seeds are split, the germ (43–47% of the seed) is removed by screening, and the splits are ground. The ground splits are reported to contain about 78–82% galactomannan polysaccharide and minor amounts of some proteinaceous material, inorganic non-surfactant salts, water-insoluble gum, and cell membranes, as well as some residual seedcoat and embryo.

[00079] Locust bean gum or carob bean gum is the refined endosperm of the seed of the carob tree, *Ceratonia siliqua*. The ratio of galactose to mannose for this type of gum is about 1:4. Locust bean gum is commercially available.

[00080] Tara gum is derived from the refined seed gum of the tara tree. The ratio of galactose to mannose is about 1:3. Tara gum is commercially available.

[00081] Other galactomannans of interest are the modified galactomannans, including derivatized guar polymers, such as carboxymethyl guar, carboxymethylhydroxypropyl guar, cationic hydroxpropyl guar, hydroxyalkyl guar, including hydroxyethyl guar, hydroxypropyl guar, hydroxybutyl guar and higher hydroxylalkyl guars, carboxylalkyl guars, including carboxymethyl guar, carboxylpropyl guar, carboxybutyl guar, and higher carboxyalkyl guars, the hydroxyethylated, hydroxypropylated and carboxymethylated derivative of guaran, the hydroxethylated and carboxymethylated derivatives of carubin, and the hydroxypropylated and carboxymethylated derivatives of cassia-gum.

[00082] Xanthans of interest are xanthan gum and xanthan gel. Xanthan gum is a polysaccharide gum produced by *Xanthomonas campestris*

and contains D-glucose, D-mannose, D-glucuronic acid as the main hexose units, also contains pyruvate acid, and is partially acetylated.

[00083] Levan is a polyfructose comprising 5-membered rings linked through β -2,6 bonds, with branching through β -2,1 bonds. Levan exhibits a glass transition temperature of 138°C and is available in particulate form. At a molecular weight of 1-2 million, the diameter of the densely-packed spherulitic particles is about 85 nm.

[00084] Modified celluloses are celluloses containing at least one functional group, such as a hydroxy group, hydroxycarboxyl group, or hydroxyalkyl group, such as for example, hydroxymethyl cellulose, hydroxyethyl celluloses, hydroxypropyl celluloses or hydroxybutyl celluloses.

[00085] Processes for making derivatives of guar gum splits are generally known. Typically, guar splits are reacted with one or more derivatizing agents under appropriate reaction conditions to produce a guar polysaccharide having the desired substituent groups. Suitable derivatizing reagents are commercially available and typically contain a reactive functional group, such as an epoxy group, a chlorohydrin group, or an ethylenically unsaturated group, and at least one other substituent group, such as a cationic, nonionic or anionic substituent group, or a precursor of such a substituent group per molecule, wherein substituent group may be linked to the reactive functional group of the derivatizing agent by bivalent linking group, such as an alkylene or oxyalkylene group. Suitable cationic substituent groups include primary, secondary, or tertiary amino groups or quaternary ammonium, sulfonium, or phosphinium groups. Suitable nonionic substituent groups include hydroxyalkyl groups, such as hydroxypropyl groups. Suitable anionic groups include carboxyalkyl groups, such as carboxymethyl groups. The cationic, nonionic and/ or anionic substituent groups may be introduced to the guar polysaccharide chains via a series of reactions or by simultaneous reactions with the respective appropriate derivatizing agents.

[00086] The guar may be treated with a crosslinking agent, such for example, borax (sodium tetra borate) is commonly used as a processing aid in the reaction step of the water-splits process to partially crosslink the surface of the guar splits and thereby reduces the amount of water absorbed by the guar splits during processing. Other crosslinkers, such as, for example, glyoxal or titanate compounds, are known.

[00087] In one embodiment, the polysaccharide component of the composition of the present invention is a non-derivatized galactomannan polysaccharide, more typically a non-derivatized guar gum.

[00088] In one embodiment, the polysaccharide is a derivatized galactomannan polysaccharide that is substituted at one or more sites of the polysaccharide with a substituent group that is independently selected for each site from the group consisting of cationic substituent groups, nonionic substituent groups, and anionic substituent groups.

[00089] In one embodiment, the polysaccharide component of the composition of the present invention is derivatized galactomannan polysaccharide, more typically a derivatized guar. Suitable derivatized guars include, for example, hydroxypropyl trimethylammonium guar, hydroxypropyl lauryldimethylammonium guar, hydroxypropyl stearylidimethylammonium guar, hydroxypropyl guar, carboxymethyl guar, guar with hydroxypropyl groups and hydroxypropyl trimethylammonium groups, guar with carboxymethyl hydroxypropyl groups and mixtures thereof.

[00090] The amount of derivatizing groups in a derivatized polysaccharide polymer may be characterized by the degree of substitution of the derivatized polysaccharide polymer or the molar substitution of the derivatized polysaccharide polymer.

[00091] As used herein, the terminology "degree of substitution" in reference to a given type of derivatizing group and a given polysaccharide polymer means the number of the average number of such derivatizing groups attached to each monomeric unit of the polysaccharide polymer. In one embodiment, the derivatized galactomannan polysaccharide exhibits a total degree of substitution ("DS_T") of from about 0.001 to about 3.0, wherein:

DS_T is the sum of the DS for cationic substituent groups ("DS_{cationic}"), the DS for nonionic substituent groups ("DS_{nonionic}") and the DS for anionic substituent groups ("DS_{anionic}"),

DS_{cationic} is from 0 to about 3, more typically from about 0.001 to about 2.0, and even more typically from about 0.001 to about 1.0,

DS_{nonionic} is from 0 to 3.0, more typically from about 0.001 to about 2.5, and even more typically from about 0.001 to about 1.0, and

DS_{anionic} is from 0 to 3.0, more typically from about 0.001 to about 2.0.

[00092] As used herein, the term "molar substitution" or "ms" refers to the number of moles of derivatizing groups per moles of monosaccharide units of the guar. The molar substitution can be determined by the Zeisel-GC method. The molar substitution utilized by the present invention is typically in the range of from about 0.001 to about 3.

[00093] In one embodiment, the polysaccharide polymer is in the form of particles. In one embodiment, the particles of polysaccharide polymer have an initial, that is, determined for dry particles prior to suspension in the aqueous medium, average particle size of about 5 to 200 μm , more typically about 20 to 200 μm as measured by light scattering, and exhibit a particle size in the aqueous medium of greater than or equal to the initial particle size, that is greater than or equal to 5 μm , more typically greater or equal to than 20 μm , with any increase from the initial particle size being due to swelling brought about by partial hydration of the polysaccharide polymer in the aqueous medium.

[00094] In one embodiment, the water soluble polymer is a water soluble non-polysaccharide polymer. Suitable water soluble non-polysaccharide polymers include, for example, lecithin polymers, poly(alkyleneoxide) polymers, such as poly(ethylene oxide) polymers, and water soluble polymers derived from ethylenically unsaturated monomers. Suitable water soluble polymers derived from ethylenically unsaturated monomers include water soluble polymers derived from acrylamide, methacrylamide, 2-hydroxy ethyl acrylate, and/or N-vinyl pyrrolidone, including homopolymers of such monomers, such as poly(acrylamide) polymers and poly(vinyl pyrrolidone) polymers, as well as copolymers of such monomers with one or more comonomers. Suitable water soluble copolymers derived from ethylenically unsaturated monomers include water soluble cationic polymers made by polymerization of at least one cationic monomer, such as a diamino alkyl (meth)acrylate or diamino alkyl (meth)acrylamide, or mixture thereof and one or more nonionic monomers, such as acrylamide or methacrylamide. In one embodiment, the non-polysaccharide polymer exhibits a weight average molecular weight of greater than about 1,000,000 g/mol, more typically greater than about 2,000,000 g/mol to about 20,000,000 g/mol, more typically to about 10,000,000 g/mol.

[00095] In one embodiment, the suspending agent component of the composition of the present invention comprises a fumed silica. Fumed silica is typically produced by the vapor phase hydrolysis of a silicon compound, e.g., silicon tetrachloride, in a hydrogen oxygen flame. The combustion process creates silicon dioxide molecules that condense to form particles. The particles collide, attach, and sinter together. The result of these processes is typically a three dimensional branched chain aggregate, typically having an average particles size of from about 0.2 to 0.3 micron. Once the aggregates cool below the fusion point of silica (1710°C), further collisions result in mechanical entanglement of the chains, termed agglomeration.

[00096] In one embodiment, suitable fumed silica has a BET surface area of from 50-400 square meters per gram (m²/g), more typically from, from about 100 m²/g to about 400 m²/g.

[00097] In one embodiment, the suspending agent component of the composition of the present invention comprises a fumed silica in an amount that is effective, either alone or in combination with one or more other suspending agents, to impart shear thinning viscosity to the composition, typically in an amount, based on 100 pbw of the composition, of from greater than 0 pbw, more typically from about 0.1 pbw, and even more typically from about 0.5 pbw, to about 10 pbw, more typically to about 5 pbw, and even more typically to about 2.5 pbw, of fumed silica.

[00098] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition, from greater than 0 to about 10 pbw, more typically from about 0.1 to about 5 pbw, and even more typically from about 0.5 to about 2.5 pbw, of fumed silica.

[00099] In one embodiment, the suspending agent component of the composition of the present invention comprises an inorganic, typically aluminosilicate or magnesium silicate, colloid-forming clay, typically, a smectite (also known as montmorillonoid) clay, an attapulgite (also known as palygorskite) clay, or a mixture thereof. These clay materials can be described as expandable layered clays, wherein the term "expandable" as used herein in reference to such clay relates to the ability of the layered clay structure to be swollen, or expanded, on contact with water.

[00100] Smectites are three-layered clays. There are two distinct classes of smectite-type clays. In the first class of smectites, aluminum oxide is present in the silicate crystal lattice and the clays have a typical formula of Al₂(Si₂O₅)₂(OH)₂. In the second class of smectites, magnesium oxide is present in the silicate crystal lattice and the clays have a typical formula of Mg₃(Si₂O₅)₂(OH)₂. The range of the water of hydration in the above formulas

can vary with the processing to which the clay has been subjected. This is immaterial to the use of the smectite clays in the present compositions in that the expandable characteristics of the hydrated clays are dictated by the silicate lattice structure. Furthermore, atomic substitution by iron and magnesium can occur within the crystal lattice of the smectites, while metal cations such as Na^+ , Ca^{+2} , as well as H^+ , can be present in the water of hydration to provide electrical neutrality. Although the presence of iron in such clay material is preferably avoided to minimize chemical interaction between clay and optional composition components, such cation substitutions in general are immaterial to the use of the clays herein since the desirable physical properties of the clay are not substantially altered thereby.

[000101] The layered expandable aluminosilicate smectite clays useful herein are further characterized by a dioctahedral crystal lattice, whereas the expandable magnesium silicate smectite clays have a trioctahedral crystal lattice.

[000102] Suitable smectite clays, include, for example, montmorillonite (bentonite), volchonskoite, nontronite, beidellite, hectorite, saponite, saucomite and vermiculite, are commercially available.

[000103] Attapulgites are magnesium-rich clays having principles of superposition of tetrahedral and octahedral unit cell elements different from the smectites. An idealized composition of the attapulgite unit cell is given as: $(\text{H}_2\text{O})_4(\text{OH})_2\text{Mg}_5\text{Si}_8\text{O}_{24}\text{H}_2\text{O}$. Attapulgite clays are commercially available.

[000104] As noted above, the clays employed in the compositions of the present invention contain cationic counter ions such as protons, sodium ions, potassium ions, calcium ions, magnesium ions and the like. It is customary to distinguish between clays on the basis of one cation which is predominately or exclusively absorbed. For example, a sodium clay is one in

which the absorbed cation is predominately sodium. Such absorbed cations can become involved in exchange reactions with cations present in aqueous solutions.

[000105] Commercially obtained clay materials can comprise mixtures of the various discrete mineral entities. Such mixtures of the minerals are suitable for use in the present compositions. In addition, natural clays sometimes consist of particles in which unit layers of different types of clay minerals are stacked together (interstratification). Such clays are called mixed layer clays, and these materials are also suitable for use herein.

[000106] In one embodiment, suspending agent component of the composition of the present invention comprises an inorganic colloid forming clay in an amount that is effective, either alone or in combination with one or more other suspending agents, to impart shear thinning viscosity to the composition, typically in an amount, based on 100 pbw of the composition, of from greater than 0 pbw, more typically from about 0.1 pbw, and even more typically from about 0.5 pbw, to about 10 pbw, more typically to about 5 pbw, and even more typically to about 2.5 pbw, of inorganic colloid forming clay.

[000107] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition, from greater than 0 to about 10 pbw, more typically from about 0.1 to about 5 pbw, and even more typically from about 0.5 to about 2.5 pbw, of inorganic colloid forming clay.

[000108] A fumed silica or clay suspending agent is typically introduced to the liquid medium and mixed to disperse the fumed silica or clay suspending agent in the liquid medium.

[000109] In one embodiment, the suspension agent component of the composition of the present invention comprises a rheology modifier polymer. Rheology modifier polymers are polymers used to thicken aqueous compositions. Suitable rheology modifier polymers are known and typically

fall within one of three general classes, that is, alkali swellable polymers, hydrogen bridging rheology modifiers, and hydrophobic associative thickeners.

[000110] Alkali swellable polymers are pH-responsive polymers that swell when placed in an alkali medium and include, for example, homopolymers and copolymers comprising units derived from ethylenically unsaturated carboxylic acid monomers such as acrylic acid, methacrylic acid, maleic acid,.

[000111] Suitable hydrogen bridging rheology modifiers include, for example, hydrocolloids such as cellulose and hydrophilic cellulose derivatives, such as carboxymethylcellulose and hydroxyethylcellulose, and natural gums and gum derivatives, such as guar gum, hydroxypropyl guar, xanthan gun, Rheozan, and carrageenan. In one embodiment, the hydrogen bridging rheology modifier is a second water soluble polymer that is different from the incompletely hydrated water soluble polymer component of the composition of the present invention. For example, in an embodiment wherein the incompletely hydrated water soluble polymer is a first polysaccharide polymer, the hydrogen bridging rheology modifier may be a second polysaccharide polymer that is more readily hydrated than the first polysaccharide polymer.

[000112] Suitable hydrophobic associative rheology modifiers are known and include hydrophobically modified natural or synthetic polymers that contain both hydrophobic and hydrophilic substituent groups, such as hydrophobically modified cellulose derivatives and polymers having a synthetic hydrophilic polymer backbone, such as a poly(oxyalkylene), such as a poly(oxyethylene) or poly(oxypropylene) backbone and hydrophobic pendant groups, such as (C₁₀-C₃₀) hydrocarbon groups. Nonionic associate thickeners are typically preferred, due to their relative insensitivity to high salt concentrations, and include, for example, PEG-200 glyceryl tallowate, PEG-

200 hydrogenated glyceryl palmitate, PPG-14 palmeth-60 hexyl dicarbamate, PEG-160 sorbitan triisostearate.

[000113] In one embodiment, the suspending agent component of the composition of the present invention comprises a rheology modifier polymer in an amount that is effective, either alone or in combination with one or more other suspending agents, to impart shear thinning viscosity to the composition, typically in an amount, based on 100 pbw of the composition, of from greater than 0 pbw, more typically from about 0.1 pbw, and even more typically from about 1 pbw, to about 10 pbw, more typically to about 5 pbw, of rheology modifier polymer.

[000114] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition, from greater than 0 to about 10 pbw, more typically from about 0.1 to about 10 pbw, and even more typically from about 1 to about 5 pbw, of rheology modifier polymer.

[000115] An rheology modifier suspending agent is typically introduced to the liquid medium and subjected mixing to disperse the rheology modifier polymer in the aqueous medium.

[000116] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a surfactant. As used herein the term "surfactant" means a compound that is capable of lowering the surface tension of water, more typically, a compound selected from one of five classes of compounds, that is, cationic surfactants, anionic surfactants, amphoteric surfactants, zwitterionic surfactants, and nonionic surfactants, as well as mixtures thereof, that are known for their detergent properties.

[000117] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a cationic surfactant. Suitable cationic surfactants are known in the art, and include, for example, amine salts, such as, ethoxylated tallow amine, cocoalkylamine, and

oleylamine, quaternary ammonium compounds such as cetyl trimethyl ammonium bromide, myristyl trimethyl ammonium bromide, stearyl dimethyl benzyl ammonium chloride, lauryl/myristyl trimethyl ammonium methosulfate, stearyl octyldimonium methosulfate, dihydrogenated palmoylethyl hydroxyethylmonium methosulfate, isostearyl benzylimidonium chloride, cocoyl benzyl hydroxyethyl imidazolinium chloride, cocoyl hydroxyethylimidazolinium, and mixtures thereof.

[000118] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises an anionic surfactant. Suitable anionic surfactants are known in the art, and include, for example, ammonium lauryl sulfate, ammonium laureth sulfate, triethylamine lauryl sulfate, triethylamine laureth sulfate, triethanolamine lauryl sulfate, triethanolamine laureth sulfate, monoethanolamine lauryl sulfate, monoethanolamine laureth sulfate, diethanolamine lauryl sulfate, diethanolamine laureth sulfate, lauric monoglyceride sodium sulfate, sodium lauryl sulfate, sodium laureth sulfate, potassium lauryl sulfate, potassium laureth sulfate, sodium lauryl sarcosinate, sodium lauroyl sarcosinate, lauryl sarcosine, cocoyl sarcosine, ammonium cocoyl sulfate, ammonium lauroyl sulfate, sodium cocoyl sulfate, sodium lauroyl sulfate, potassium cocoyl sulfate, potassium lauryl sulfate, triethanolamine lauryl sulfate, triethanolamine lauryl sulfate, monoethanolamine cocoyl sulfate, monoethanolamine lauryl sulfate, sodium tridecyl benzene sulfonate, sodium dodecyl benzene sulfonate, and mixtures thereof.

[000119] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises an amphoteric surfactant. Suitable amphoteric surfactants are known in the art, and include those surfactants broadly described as derivatives of aliphatic secondary and tertiary amines in which the aliphatic radical can be straight or branched chain and wherein one of the aliphatic substituents contains from about 8 to about 18 carbon atoms and one contains an anionic water solubilizing group such as carboxyl, sulfonate, sulfate, phosphate, or phosphonate. In one

embodiment, the amphoteric surfactant comprises at least one compound selected from cocoamphoacetate, cocoamphodiacetate, lauroamphoacetate, and lauroamphodiacetate.

[000120] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a zwitterionic surfactant. Suitable zwitterionic surfactants are known in the art, and include, for example, those surfactants broadly described as derivatives of aliphatic quaternary ammonium, phosphonium, and sulfonium compounds, in which the aliphatic radicals can be straight or branched chain, and wherein one of the aliphatic substituents contains from about 8 to about 18 carbon atoms and one contains an anionic group such as carboxyl, sulfonate, sulfate, phosphate or phosphonate. Specific examples of suitable Zwitterionic surfactants include alkyl betaines, such as cocodimethyl carboxymethyl betaine, lauryl dimethyl carboxymethyl betaine, lauryl dimethyl alpha-carboxy-ethyl betaine, cetyl dimethyl carboxymethyl betaine, lauryl bis-(2-hydroxy-ethyl)carboxy methyl betaine, stearyl bis-(2-hydroxy-propyl)carboxymethyl betaine, oleyl dimethyl gamma-carboxypropyl betaine, and lauryl bis-(2-hydroxypropyl)alpha-carboxyethyl betaine, alkyl amidopropyl betaines, and alkyl sultaines, such as cocodimethyl sulfopropyl betaine, stearyldimethyl sulfopropyl betaine, lauryl dimethyl sulfoethyl betaine, lauryl bis-(2-hydroxy-ethyl)sulfopropyl betaine, and alkylamidopropylhydroxy sultaines.

[000121] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a nonionic surfactant. Suitable nonionic surfactants are known in the art, and include, for example, long chain alkyl glucosides having alkyl groups containing about 8 carbon atoms to about 22 carbon atoms, coconut fatty acid monoethanolamides such as cocamide MEA, coconut fatty acid diethanolamides, alcohol alkoxylates, and mixtures thereof.

[000122] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a mixture of two or more surfactants selected from cationic surfactants, anionic surfactants, amphoteric surfactants, zwitterionic surfactants, nonionic surfactants, and mixtures thereof.

[000123] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a surfactant in an amount that is effective, either alone or in combination with one or more other hydration inhibitors, to prevent or to at least inhibit hydration of the polysaccharide, typically in an amount, based on 100 pbw of the composition, of from greater than 0 pbw, more typically from about 2 pbw, and even more typically from about 5 pbw, to about 60 pbw, more typically to about 50 pbw, and even more typically, to about 40 pbw, of surfactant.

[000124] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition, from greater than 0 to about 60 pbw, more typically from about 2 to about 50 pbw, and even more typically, from about 5 to about 40 pbw, of surfactant.

[000125] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a water soluble non-surfactant salt. Suitable water soluble non-surfactant salts include organic non-surfactant salts, inorganic non-surfactant salts, and mixtures thereof, as well as polyelectrolytes, such as uncapped polyacrylates, polymaleates, or polycarboxylates, lignin sulfonates or naphthalene sulfonate formaldehyde copolymers. The water soluble non-surfactant salt comprises an cationic component and an anionic component. Suitable cations may be monovalent or multivalent, may be organic or inorganic, and include, for example, sodium, potassium, lithium, calcium, magnesium, cesium, and lithium cations, as well as mono-, di- tri- or quaternary ammonium or pyridinium cation. Suitable anions may be a monovalent or multivalent, may be organic or inorganic, and include, for example, chloride, sulfate, nitrate, nitrite,

carbonate, citrate, cyanate acetate, benzoate, tartarate, oxalate, carboxylate, phosphate, and phosphonate anions. Suitable water soluble non-surfactant salts include, for example, non-surfactant salts of multivalent anions with monovalent cations, such as potassium pyrophosphate, potassium tripolyphosphate, and sodium citrate, non-surfactant salts of multivalent cations with monovalent anions, such as calcium chloride, calcium bromide, zinc halides, barium chloride, and calcium nitrate, and non-surfactant salts of monovalent cations with monovalent anions, such as sodium chloride, potassium chloride, potassium iodide, sodium bromide, ammonium bromide, ammonium sulfate, alkali metal nitrates, and ammonium nitrates.

[000126] In one embodiment, the composition of the present invention does not contain any cationic surfactant, anionic surfactant, amphoteric surfactant, zwitterionic surfactant that is a water soluble salt.

[000127] In one embodiment, the composition of the present invention comprises a cationic surfactant, anionic surfactant, amphoteric surfactant, or zwitterionic surfactant, such as, for example, sodium lauryl sulfate, that is a water soluble salt. The amount of surfactant that is a water soluble salt is to be included in the total amount of water soluble salt for purposes of determining the total amount of water soluble salt component of the composition of the present invention.

[000128] As discussed, below, in one embodiment, the composition is a concentrated, dilutable form of an end use composition and further comprises one or more active ingredients, such as, for example, a personal care benefit agent, a pesticidal active ingredient, or a pharmaceutical active ingredient, appropriate to the intended end use. Such active ingredients may be water soluble non-surfactant salts. The amount of active ingredient that is a water soluble non-surfactant salt is to be included in the total amount of water soluble for purposes of determining the total amount of water soluble salt component of the composition of the present invention.

[000129] In one embodiment, the composition of the present invention comprises a water soluble salt in an amount that is effective, either alone or in combination with one or more other hydration inhibitors, to prevent or to at least inhibit hydration of the polysaccharide, typically in an amount, based on 100 pbw of the composition and including the amount of any water soluble non-surfactant salt, the amount of any of the surfactant component of the composition of the present invention that is a water soluble salt and the amount of any of the active ingredient component of the composition of the present invention that is a water soluble salt, of from greater than 0 pbw, more typically, from about 2 pbw and even more typically, from about 5 pbw, to about 70 pbw, more typically to about 65 pbw and even more typically, to about 60 pbw, of water soluble salt.

[000130] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition and including the amount of any water soluble non-surfactant salt, the amount of any of the surfactant component of the composition of the present invention that is a water soluble and the amount of any active ingredient component of the composition of the present invention that is a water soluble salt, from greater than 0 to about 70 pbw, more typically, from about 2 to about 65 pbw and even more typically, from about 5 to about 60 pbw, of water soluble salt.

[000131] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a water dispersible organic solvent. Suitable water dispersible organic solvents include, for example, (C₁-C₁₈)alcohols, such as, for example, monohydric alcohols, such as methanol, ethanol, isopropanol, cetyl alcohol, stearyl alcohol, benzyl Alcohol, oleyl alcohol, and polyhydric alcohols, such as, for example, 2-butoxyethanol, ethylene glycol, and glycerol, alkylether diols such as, for example, ethylene glycol monoethyl ether, propylene glycol monoethyl ether, and diethylene glycol monomethyl ether, and mixtures thereof.

[000132] In one embodiment, the hydration inhibitor component of the composition of the present invention comprises a water dispersible, more typically, water soluble, organic solvent. Suitable water dispersible organic solvents include, for example, monohydric alcohols, polyhydric alcohols, alkylether diols, and mixtures thereof.

[000133] In one embodiment, the composition of the present invention comprises a water dispersible organic solvent, in an amount that is effective, either alone or in combination with one or more other hydration inhibitors, to prevent or to at least inhibit hydration of the polysaccharide, typically in an amount, based on 100 pbw of the composition, of from greater than 0 pbw, more typically from about 2 pbw, and even more typically, from about 5 pbw to about 40 pbw, more typically to about 30 pbw, and even more typically to about 25 pbw, of water dispersible organic solvent.

[000134] In one embodiment, the composition of the present invention comprises, based on 100 pbw of the composition, from greater than 0 to about 40 pbw, more typically from about 2 to about 30 pbw, and even more typically, from about 5 to about 25 pbw, of water dispersible organic solvent.

[000135] The composition of the present invention is typically made by mixing the components of the composition together.

[000136] In one embodiment, wherein the liquid medium is an aqueous medium that comprises water or water and a water miscible organic liquid, the composition is typically made by:

mixing any optional hydration inhibitor with the aqueous liquid medium,

mixing the water soluble polymer with the mixture of aqueous liquid medium, and, if used, the optional hydration inhibitor, and

mixing any optional suspending agent with the mixture of the aqueous liquid medium, the optional hydration inhibitor, if used, and the water soluble polymer. This manner of addition avoids hydration of the water soluble

polymer and avoids the risk formation of an intermediate composition having an intractably high viscosity.

[000137] In another embodiment, wherein the liquid medium is an aqueous medium comprising water and a water immiscible organic liquid, the composition is typically made by:

mixing, optionally, all or a portion of the emulsifier, and optionally, a suspending agent, with the water,

mixing the water soluble polymer, optionally all or a portion of the emulsifier, and optionally, a suspending agent, with the water immiscible organic liquid, and

combining the water-based mixture and the water immiscible organic liquid-based mixture to form the composition. The emulsifier may be added to either the water mixture or the water immiscible organic liquid mixture, or a portion of the emulsifier may be added to each of the mixtures. If the optional suspending agent is used, all of the suspending agent may all be added to the water, all of the suspending agent may be added to the water immiscible organic liquid, or a first portion of the suspending agent may be added to the water and a second portion of the suspending agent added to the water immiscible organic liquid. Any optional hydration inhibitor that may be used in addition to the water immiscible organic liquid may be added to either the water or the water immiscible organic liquid. This manner of addition avoids hydration of the water soluble polymer and avoids the risk formation of an intermediate composition having an intractably high viscosity.

[000138] In another embodiment, wherein the liquid medium is a non aqueous liquid medium, more typically a water immiscible organic liquid, the pesticide, water soluble polymer, optional suspending agent and optional hydration inhibitor are typically added to the non-aqueous liquid medium and mixed to form the composition.

[000139] In one embodiment, the composition of the present invention exhibits dilution thickening behavior, that is, as the composition of the

present invention is diluted with water, the viscosity of the viscosity of the composition initially increases with increasing dilution, reaches a maximum value and then decreases with further dilution. The increasing viscosity with increasing dilution corresponds to an increasing concentration of dissolved water soluble polysaccharide as the concentration of the surfactant and or salt component of the composition decreases with increasing dilution.

[000140] In one embodiment, the composition of the present invention is useful as a pumpable liquid source of polysaccharide with a high polysaccharide content for formulating aqueous end use compositions, such as, for example, personal care compositions, home care compositions, agricultural pesticide compositions, compositions for use in oilfield applications.

[000141] In one embodiment, the composition of the present invention is an agricultural adjuvant composition that stable, has a low viscosity, is easily transportable, is pourable and pumpable under field conditions, and is dilutable with water under agricultural field conditions.

[000142] In one embodiment, the composition of the present invention is mixed with a pesticide active ingredient and, optionally other adjuvant ingredients, and water to form a dilute pesticide composition for spray application to target pests.

[000143] In one embodiment, the composition is a concentrated, dilutable form of an end use composition and further comprises one or more active ingredients, such as, for example, a personal care benefit agent, a pesticidal active ingredient, or a pharmaceutical active ingredient, appropriate to the intended end use. In one embodiment, the concentrate is diluted to form an end use composition, the end use composition is contacted with a target substrate, such as skin, hair, or plant foliage, and the water soluble polymer component of the concentrate enhances delivery of the active ingredient onto the substrate.

[000144] In one embodiment, the composition of the present invention is prepared on an as needed basis and is sufficiently stable, that is, a quiescent sample of the composition shows no evidence, by visual inspection, of gravity driven separation, such as, separation into layers and/or precipitation of components, such as, for example, incompletely hydrated water soluble polymer, from the liquid medium, within the anticipated time period, for example, one hour, more typically two hours, between preparation and use.

[000145] In one embodiment, the composition of the present invention exhibits good storage stability and a quiescent sample of the composition shows no evidence, by visual inspection, of gravity driven separation within a given time, such as, for example, one week, more typically, one month, even more typically 3 months, under given storage conditions, such as, for example, at room temperature.

[000146] In one embodiment, the composition of the present invention exhibits good storage stability and a quiescent sample of the composition shows no evidence, by visual inspection, of gravity driven separation within a given time, such as, for example, 24 hours, more typically, four days, even more typically, one week, under accelerated aging conditions at an elevated storage temperature of up to, for example, 54°C, more typically, 45°C.

Example 1 and Comparative Example C1

[000147] The composition of Example 1 was an aqueous suspension of hydroxypropyl guars in the presence of surfactants and suspending agent, fumed silica. The composition of Comparative Example C1 was an aqueous suspension analogous to that of Example 1, except that the composition of comparative Example C1 lacked the fumed silica suspending agent component.

[000148] The aqueous suspensions of Example 1 and Comparative Example C1 were made by gradually adding a dry mixture of hydroxypropyl guar particles, one guar having a molar substitution of 1.2, the other having a molar substitution of 0.12, each having a weight average molecular weight of about 2,000,000 g/mol, into an aqueous solution of surfactant ((C₁₂-C₁₄) alkyl dimethyl betaines) and salts (ammonium sulfate and sodium chloride), with stirring. A preservative (Proxel™ GXL, Arch Chemicals Inc.) was added to provide biostability. The aqueous solution was under stirring until a substantially uniform suspension was formed. The presence of surfactant and salt in aqueous solution prevented or limited the hydration of guar gum in aqueous solution. In the composition of Example 1, a suspending agent (Aerosil™ 200, Evonik DeGussa), was added to the aqueous suspension, with stirring to impart shear thinning properties to the composition.

[000149] The stability of each of the compositions was evaluated by allowing a sample of the composition to sit undisturbed in a 100 milliLiter (mL) glass container under room temperature conditions on the lab bench top and visually observing the composition to detect separation of the components of the composition due to gravity. Separation of the components of the composition was taken as evidence of instability. Compositions that did not exhibit separation within a given period of time were characterized as being stable for that period of time. Comparative Example C1 was not stable, with separation, that is, precipitation of incompletely hydrated guar, being observed within a few hours. Example 1 was stable and showed no evidence of precipitation or separation into layers for at least one month.

[000150] The materials and their relative amounts used to make the compositions of Examples 1 and C1 and the stability results for each of Example 1 and Comparative Example C1 are set forth in TABLE I below.

TABLE I Aqueous Hydroxypropyl Guar Formulations

Material	Ex C1 Amount (wt %)	EX 1 Amount (wt %)
Ammonium sulfate	25.646	25.646
(C ₁₂ -C ₁₄) alkyl dimethyl betaines	5.129	5.129
Sodium chloride	1.197	1.197
Preservative (Proxel TM GXL, Arch Chemicals Inc.)	0.082	0.082
Hydroxypropyl guar (m.s. 1.20)	2.056	2.056
Hydroxypropyl guar (m.s. 0.12)	2.056	2.056
Water	63.8	63.012
Fumed silica (Aerosil TM 200, Evonik DeGussa)	--	0.822
Stability	Not stable; precipitation of incompletely hydrated guar within a few hours	Stable, with no precipitation for at least one month

[000151] The composition of Example 1 was subjected to rheological measurements, performed on an AR-G2 stress-controlled rheometer (TA Instruments) using Cross Hatched steel plate geometry equipped with a Peltier-based temperature control. The sample temperature was maintained at 25°C. The steady rate sweep test was applied.

[000152] A plot of viscosity (in Pascal seconds (Pa.s)) vs. shear rate (in reciprocal seconds (1/s)) for the composition of Example 1 is shown FIGURE 1. The composition of Example 1 was found to be a shear-thinning system with high viscosity under low shear conditions and low viscosity under high shear conditions. As shown in FIG. 1, the viscosity of the composition of Example 1 was relatively high under low shear conditions (e.g., about 150 Pa.s at a shear rate of 10^{-2} s^{-1}), which provides resistance to separation of the components of the composition, such as the settling of the guar particles, during storage, and the viscosity of this composition was relatively low under high shear conditions (e.g., about 0.4 Pa.s at a shear rate of 100 s^{-1}), which renders the composition is quite pumpable and easy to handle under high shear conditions.

[000153] A plot of shear rate (in reciprocal seconds (1/s)) vs. shear stress (in Pascals (Pa)) for the composition of Example 1 is shown in FIG. 2. Based on the shear rate/ shear stress results, the composition of Example 1 was found to have a yield value of about 1.2 Pa.

[000154] The stability of the composition of Example 1 was evaluated at several different temperatures. Samples of the composition of Example 1 were allowed to sit undisturbed in 20 mL glass vials under different storage conditions, that is, at room temperature, at -16°C , at 4°C , at 45°C , at 54°C , and under "freeze-thaw" cycling, that is, cycling between -12°C and 25°C with an 8 hour ramp between the temperature extremes and 4 hour dwell at temperature and were visually inspected at 24 hours, 4 days, one week, 2 weeks, 3 weeks and 4 weeks, for evidence of separation. Samples that did not show visual evidence of separation, such as, e.g., precipitation of incompletely hydrated polymer, were classified as being stable. The results of the evaluation are summarized in TABLE II below. The results showed the composition of Example 1 exhibited good storage stability under each of the different storage conditions.

TABLE II: Stability Results for Composition of Example 1

	54°C	45 °C	RT ¹	FT ²	4 °C	-16 °C
24 hrs	stable	stable	stable	stable	stable	stable and flowable
4 days	stable	stable	stable	stable	stable	stable and flowable
1 week	stable	stable	stable	stable	stable	stable and flowable
2 weeks	slight separation	stable	stable	stable	stable	stable and flowable
3 weeks	slight separation	stable	stable	stable	stable	stable and flowable
4 weeks	slight separation	slight separation	stable	stable	stable	stable and flowable

1. RT = room temperature

2. FT = with 'freeze-thaw' cycling (4 hour dwell, 8 hour ramp) between-12°C and 25°C

[000155] Samples of the composition of Example 1 were diluted with water and the viscosity of the diluted samples was tested using a Brookfield DV II viscometer at room temperature. The viscosity results are set forth in TABLE III below. As observed above, the undiluted composition was pumpable. After moderate dilution, i.e., to 2 to 5 times the original sample volume with water, the shear viscosity increased significantly relative to the undiluted composition. At relatively high dilution, such as 10 times the original sample volume, the shear viscosity decreased relative to the undiluted composition.

TABLE III: Viscosity (η) of Composition of Example 1 and Aqueous Dilutions

Sample	HP Guar (wt%)	η (cps) 20 rpm	η (cps) 10 rpm	η (cps) 5 rpm	η (cps) 2 rpm	η (cps) 1 rpm
EX 1	4.112	1765	2620	3740	6100	9000
2 X aqueous dilution of EX 1	2.056	3500	5080	7120	10200	12600
5 X aqueous dilution of EX 1	0.8224	1920	2640	3520	4800	5700
10 X aqueous dilution of EX 1	0.4112	197	233	264	305	330

Example 2 and Comparative Example C2

[000156] The compositions of Example 2 and Comparative Example C2 each contained 3.0 wt% polyacrylamide having a weight average molecular weight of about 5,000,000 to 6,000,000 g/mol in the presence of surfactants (C₁₂-C₁₄ alkyl dimethyl betaines and sodium salt of polycarboxylic acid) and other salt (sodium chloride). In the composition of Example 2, a suspending agent (AerosilTM 200, Evonik DeGussa), was added to the aqueous suspension, with stirring, to impart shear thinning properties to the composition. The relevant materials and their relevant amounts are summarized for each of the compositions in TABLE IV below.

TABLE IV Aqueous Polyacrylamide Formulations

Materials	EX C2 Amount (wt%)	EX 2 Amount (wt %)
C ₁₂ -C ₁₄ alkyl dimethyl betaines	10.8	10.8
Sodium chloride	2.5	2.5
Sodium salt of polycarboxylic acid (Geropon TM T-36, Rhodia Inc.)	0.7	0.7
Preservative (Proxel TM GXL, Arch chemicals Inc.)	0.1	0.1
Polyacrylamide (Polysciences Inc)	3.0	3.0
Water	82.9	82.4
Xanthan gum	--	0.5
Stability	Not stable	Stable for at least one week

[000157] A concentrated aqueous polyacrylamide solution (4.77 wt %) was first prepared by the addition of polyacrylamide polymer into deionized water with constant stirring. The concentrated polyacrylamide solution was extremely viscous and not quite flowable. A solution of the surfactant and salt components and the preservative component were then gradually added into concentrated polyacrylamide aqueous solution, with constantly stirring, to form the compositions of Examples 2 and C2. The polyacrylamide polymer was desolubilized in the presence of the surfactant and salt components and a slightly hazy composition was formed. In the composition of Example 2, a suspension agent (xanthan gum) was added to the aqueous polyacrylamide, surfactant and salt mixture, followed by constantly stirring

with heating to about 50°C. No suspension agent was added to the composition of Comparative Example C2.

[000158] The stability of each of the compositions was evaluated by allowing a sample of the composition to sit undisturbed in a 20 mL glass vial under room temperature conditions on the lab bench top and visually observing the composition to detect separation of the components of the composition due to gravity. Separation of the components of the composition was taken as evidence of instability. Compositions that did not exhibit separation within a given period of time were characterized as being stable for that period of time. The composition of Example 2 was found to be stable, with the poly(acrylamide) remaining suspended in the aqueous medium and with no gravity separation of the composition, e.g., no precipitation or separation into layers, observed for at least one week. In the absence of the suspension agent, the composition of Comparative Example C2 was found to be unstable, with gravity separation of the composition observed within a few hours.

[000159] Rheological measurements were performed on an AR-G2 stress-controlled rheometer (TA Instruments) using Cross Hatched steel plate geometry equipped with a Peltier-based temperature control. The sample temperature was maintained at 25°C. The steady rate sweep test was applied. FIG. 3 shows the viscosity of the composition of Example 2 was plotted versus shear rate. As shown in FIG. 3, the composition of Example 2 exhibited shear-thinning, wherein the viscosity was relatively high under low shear conditions (e.g., about 190 Pa·s at a shear rate of 10^{-2} s $^{-1}$), which provides resistance to gravity driven separation of the components of the composition during storage, and the viscosity was relatively low under high shear conditions (e.g., about 0.3 Pa·s at a shear rate of 100 s $^{-1}$), which renders the composition pumpable and easy to handle under high shear conditions.

[000160] A plot of shear rate (in reciprocal seconds (1/s)) vs. shear stress (in Pascals (Pa)) for the composition of Example 1 is shown in FIG. 4. Based on the shear rate/ shear stress results, the composition of Example 2 was found to exhibit a yield strength of about 0.7 Pa.

[000161] The stability of the composition of Example 2 was evaluated at several different temperatures. Samples of the composition of Example 2 were allowed to sit undisturbed in 20 L glass vials under different storage conditions, that is, at room temperature, at -16°C, at 4°C, at 45°C, at 54°C, and under "freeze-thaw" cycling, that is, cycling between -12°C and 25°C with an 8 hour ramp between the temperature extremes and 4 hour dwell at temperature and were visually inspected at 24 hours, 4 days, one week, and 2 weeks, for evidence of separation. Samples that did not show visual evidence of separation, such as, e.g., precipitation of incompletely hydrated polymer, were classified as being stable. The results of the evaluation are summarized in TABLE V below. The results showed the composition of Example 2 exhibited good storage stability under each of the different storage conditions.

TABLE V Stability Results for Composition of Example 2

	54°C	45 °C	RT ¹	FT ²	4 °C	-16 °C
24 hrs	Stable	Stable	Stable	Stable	Stable	Stable but not flowable
4 days	Stable	Stable	Stable	Stable	Stable	Stable but not flowable
1 week	Stable	Stable	Stable	Stable	Stable	Stable but not flowable
2 weeks	Stable	Stable	Stable	Stable	Stable	Stable but not flowable

1. RT: room temperature

2. FT: Two-three 'freeze-thaw' cycles (-12°C -- 25°C)

Example 3 and Comparative Example C3

[000162] The compositions of Example 3 and Comparative Example C3 each contained about 2.2% guar (mixture of hydroxypropyl guar having molar substitutions 1.2 and 0.15, each having molecular weight of about 2,000,000 g/mol) in the presence of surfactant (C₁₂-C₁₄ Alkyl dimethyl betaine), ammonium sulfate and other ingredients, are listed in TABLE VI below. In the composition of Example 3, a suspending agent (Aerosil 200, Evonik DeGussa), was added to the aqueous suspension, while the Comparative Example C3 lacked the suspending agent component.

TABLE VI

Material	EX 3 Amount (wt%)	CEX C3 Amount (wt%)
Ammonium Sulfate	26.07	26.06
Surfactant (C ₁₂ -C ₁₄ Alkyl dimethyl betaine)	16.81	16.81
Preservative (Proxel GXL, Arch chemicals Inc.)	0.10	0.10
Water	52.86	48.16
Hydroxypropyl guar (m.s. 1.2)	1.66	1.64
Hydroxypropyl guar (m.s. 0.15)	0.52	0.52
Suspension aid: Fumed Silica (Aerosil 200, Evonik DeGussa)	0.00	4.73
Antifoam, Foam Ban 2588G	0.97	0.97
Glycerin	1.00	1.00
Stability	Not stable; precipitation of incompletely hydrated guar within a few hours	Stable, with no precipitation for at least two weeks at room temperature

[000163] The compositions of Example 3 and Comparative Example C3 were made by gradually adding a dry mixture of hydroxypropyl guar particles into an aqueous solution of the surfactant, ammonium sulfate, glycerin, antifoam agent, and preservative, with stirring. The aqueous solution was under stirring until a substantially uniform suspension was formed. In the

composition of Example 3, a suspending agent was added to the aqueous suspension, with stirring to make substantially uniform suspension. No suspending agent was added to the Comparative Example C3.

[000164] Rheological measurements were performed on an AR-G2 stress-controlled rheometer (TA Instruments) using a 60 mm diameter cross-hatched plate geometry. The sample temperature was maintained at 25°C. The steady sweep test was applied. FIG. 6 shows the viscosity curve as a function of shear rate for the composition of Example 3. The composition exhibits a shear-thinning behavior, wherein the viscosity was high at low shear rate conditions (e.g. 48.18 Pa. at a shear rate of 0.13 s⁻¹), which provides resistance to separation of the components of the composition, such as settling of guar particles, during storage, and the viscosity of this composition was relatively under high shear conditions (e.g., 0.12 Pa.s at a shear rate of 79.59 s⁻¹), which renders the composition pumpable and easy to handle under high shear conditions.

[000165] The stability of the compositions of Example 3 and Comparative Example C3 was evaluated by allowing a sample of each of the compositions to sit undisturbed in a 50 mL glass container under room temperature conditions on the lab bench top and visually observing the composition to detect separation of the components of the compositions due to gravity. Comparative Example C3 was not stable, and guar precipitated within few hours. Example 3 was stable and did not show evidence of precipitation or separation into layers for at least two weeks. FIG 5(a) shows a photograph of Example 3, showing no evidence of separation or precipitation, and FIG 5(b) shows a photograph of comparative Example C3, showing separation into layers.

Examples 4 and 5 and Comparative Example C4

[000166] The compositions of Examples 4, comparative Example C4, and Example 5, contained about 6.1% guar (Example 4 and C4) and 9.66%

guar (Example 5), respectively, in the presence of surfactant (C₁₂-C₁₄ Alkyl dimethyl betaine), ammonium sulfate and other ingredients, in the amounts listed in TABLES VII and VIII below. In the compositions of Example 4 and Example 5, a suspending agent (Aerosil 200, Evonik DeGussa) was added to the aqueous suspension. Comparative Example C4 lacked the suspending agent.

TABLE VII

Material	Example 4 Amount (wt%)	Example C4 Amount (wt%)
Ammonium Sulfate	30.58	30.89
Surfactant (C ₁₂ -C ₁₄ Alkyl dimethyl betaine)	13.28	13.42
Preservative (Proxel GXL, Arch chemicals Inc.)	0.10	0.10
Water	46.88	47.34
Hydroxypropyl guar (m.s. 1.2)	2.08	2.10
Hydroxypropyl guar (m.s. 0.15)	4.04	4.08
Suspension aid: Fumed Silica (Aerosil 200, Evonik DeGussa)	0.98	0.00
Antifoam, Foam Ban 2588G	1.02	1.03
Glycerin	1.04	1.05
Stability	Stable, with no precipitation for at least four weeks at room temperature	Stable, with no precipitation for at least four weeks at room temperature

TABLE VIII

Material	Example 5 Amount (wt%)
Ammonium Sulfate	28.91
Surfactant (C ₁₂ -C ₁₄ Alkyl dimethyl betaine)	12.56
Preservative (Proxel GXL, Arch chemicals Inc.)	0.09
Water	44.32
Underivatized guar	9.66
Suspension aid: Fumed Silica (Aerosil 200, Evonik DeGussa)	2.51
Antifoam, Foam Ban 2588G	0.97
Glycerin	0.98
Stability	Stable, with no precipitation for at least four weeks at room temperature

[000167] The aqueous compositions of Examples 4 and 5 and comparative Example C4 were made by gradually adding a dry mixture of guar particles, into an aqueous solution of surfactant, ammonium sulfate, glycerin, an antifoam agent, and preservative, with stirring. The aqueous solution was under stirring until a substantially uniform suspension was formed. In the composition of Examples 4 and 5, a suspending agent was added to the aqueous suspension, with stirring to make substantially uniform solution. No suspending agent was added to the comparative Example C4.

[000168] The stability of each of the composition of Examples 4 and 5 and Comparative Example C4 was evaluated by allowing a sample of the composition to sit undisturbed in a 50 mL glass container under room

temperature conditions on the lab bench top and visually observing the composition to detect separation of the components of the compositions due to gravity. Each of the compositions was stable for at least four weeks at room temperature.

[000169] Rheological measurements were performed on an AR-G2 stress-controlled rheometer (TA Instruments) using a 60 mm diameter cross-hatched plate geometry. The sample temperature was maintained at 25°C. The steady sweep test was applied on all compositions. FIGS. 7 and 8 show the viscosity curve as a function of shear rate for the composition of comparative Example C4 and Example 5, respectively. Both compositions exhibit a shear-thinning behavior. For composition of Example C4, the viscosity was 271.2 Pa. at a shear rate of 0.13 s⁻¹, and 0.68 Pa.s at a shear rate of 79.59 s⁻¹. For composition of Example 5, the viscosity was 128.4 Pa. at a shear rate of 0.13 s⁻¹ and 0.26 Pa.s at a shear rate of 79.59 s⁻¹.

Example 6 and Comparative Example C6

[000170] The compositions of Example 6 and Comparative Example C6 contained 4% guar (mixture of hydroxypropyl guar having molar substitutions 1.2 and 0.15, each having molecular weight of about 2,000,000 g/mol) and the other ingredients listed in TABLE IX below, and were prepared in the same manner as the composition of Example 3. The composition of Comparative Example C6 lacked guar. In this case, the suspending agent was added to the aqueous suspension directly in the aqueous solution of surfactant, salt, glycerin and antifoam. The composition was left for stirring to make substantially uniform composition.

Table IX

Material	Example 6 Amount (wt%)	Example C6 Amount (wt%)
Ammonium Sulfate	30.0	29.96
Surfactant (C ₁₂ -C ₁₄ Alkyl dimethyl betaine)	17.0	17.0
Preservative (Proxel GXL, Arch chemicals Inc.)	0.10	0.1
Water	45.40	49.3
Hydroxypropyl guar (m.s. 1.2)	2.00	0
Hydroxypropyl guar (m.s. 0.12)	2.00	0
Suspension aid: Fumed Silica (Aerosil 200, Evonik DeGussa)	1.50	1.5
Foam Ban 2588G	1.00	1.08
Glycerin	1.0	1.06
Total	100.0	100.0

[000171] Samples of the compositions of Example 6 and Comparative Example C6 were left at room temperature without being disturbed to allow air bubbles to dissipate. The samples were then observed under a Leica Bright-field microscope with a 2.5x objective. Images at different area were observed and found to be very similar. Representative images of formulation of Examples 6 and Comparative Example C6 are shown in FIGS. 9(a) and 9(b).

[000172] The formulation for Example 6 contains incompletely hydrated guar polymer guar, while the composition of Example C6 is analogous to that of Example 6, except that the composition of Comparative Example C6 does not contain guar. FIG. 9(a) shows the presence of particles of the order of

100 microns in Example 6, while no particles are evident in FIG. 9(b) for the composition of Comparative Example C6, which indicates that particles visible in FIG. 9(a) are of guar only.

Examples 7 and 8

[000173] The composition of Examples 7 and 8 were made as follows. Guar powders was added into a mixture of vegetable oil (and Polyethylene glycol for Example 8) and emulsifier and mixed. A suspending agent (Bentonite clay) is then added in the solution to stabilize the formulation. The mixture was then mixed using a high-speed mixer. The stability of the compositions was evaluated by allowing a sample of the composition to sit undisturbed in a 50 mL glass container at room temperature and visually observing the composition to detect separation of the components of the compositions due to gravity. The viscosity of the compositions was measured at room temperature using a Brookfield viscometer equipped with a RV2 spindle at 20 revolutions per minute ("rpm"). The compositions were found to be flowable and stable with minimal separation (less than or equal to 10%) for at least 1 month. The materials and their relative amounts are set forth in TABLE X below.

TABLE X

Material	EX 7 Amount (wt%)	EX 8 Amount (wt%)
Non-derivatized guar (Jaguar 308NB, Rhodia Inc)	20	25
Suspending agent (clay, Bentonite AG/8W, Dalcin)	5	4
Solvent, Polyethylene Glycol (PEG 300, Ametech)		11
Vegetable oil (Phytorob PHT, Ametech)	55	50
Emulsifier (polyalkoxylated fatty acid ester, Alkamuls VO/2003, Rhodia Inc.)	20	10
Stability	Stable, ≤ 10% separation for ≥ 1 month at room temperature	Stable, ≤ 10% separation for ≥ 1 month at room temperature
Viscosity (RT, Brookfield viscometer, spindle RV2 @ 20 rpm)	0.82 Pa.s	1.22 Pa.s

Claims:

1. A composition, comprising, based on 100 parts by weight of the composition, greater than 2.5 parts by weight of an incompletely hydrated water soluble polymer suspended in a liquid medium.
2. The composition of claim 1, wherein the liquid medium is an aqueous medium and the polymer is a water soluble polysaccharide polymer.
3. The composition of claim 2, wherein, the composition comprises a suspending agent in an amount effective to impart shear thinning properties to the composition.
4. The composition of claim 3, wherein the suspending agent is selected from fumed silica, inorganic colloidal or colloid-forming particles, rheology modifier polymers, and mixtures thereof.
5. The composition of claim 3, wherein, the liquid medium is an aqueous medium and the composition further comprises a hydration inhibitor in an amount effective to inhibit hydration of the water soluble polysaccharide in the aqueous medium.
6. The composition of claim 5, wherein the hydration inhibitor is selected from surfactant compounds, water soluble non-surfactant salts, water dispersible organic solvents, and mixtures thereof.
7. The composition of claim 1, further comprising a personal care benefit agent, a pesticide active ingredient, or a pharmaceutical active ingredient, wherein the water soluble polymer enhances delivery of the benefit agent or active ingredient from the liquid medium to a target substrate.

8. The composition of claim 1, wherein the liquid medium is an aqueous liquid medium that comprises water or water and a water miscible organic liquid.

9. The composition of claim 1, wherein the liquid medium is an aqueous liquid medium that comprises water and a water immiscible organic liquid and the composition is in the form of an emulsion, a microemulsion, or a suspoemulsion.

10. The composition of claim 1, wherein the liquid medium is a non-aqueous liquid medium comprising a non-aqueous liquid selected from vegetable oils, alkylated vegetable oils, polar protic organic liquids, and mixtures thereof.

11. The composition of claim 1, wherein:

the liquid medium is an aqueous liquid medium,

the water soluble polymer is selected from polyacrylamide polymers, non-derivatized guar polymers, derivatized guar polymers, and mixtures thereof, and

the composition further comprises a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polysaccharide polymers other than the non-derivatized or derivatized guar polymer, and mixtures thereof.

12. The composition of claim 11, further comprising a hydration inhibitor selected from surfactant compounds, non-surfactant water soluble salts, water dispersible organic solvents, and mixtures thereof.

13. The composition of claim 1, wherein:

the liquid medium is an aqueous liquid medium,

the water soluble polymer is a water soluble polysaccharide polymer selected from non-derivatized guar polymers, derivatized guar polymers, and mixtures thereof, and

14. The composition of claim 13, wherein the composition further comprises a hydration inhibitor selected from surfactant compounds, non-surfactant water soluble salts, water dispersible organic solvents, and mixtures thereof.
15. The composition of claim 13, further comprising a suspending agent selected from fumed silica, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polysaccharide polymers other than non-derivatized guar polymers or derivatized guar polymers.
16. The composition of claim 1, wherein composition exhibits a viscosity of less than 10 Pa.s at a shear rate of greater than or equal to 10 s⁻¹.
17. A composition, comprising, based on 100 parts by weight of the composition, from greater than 2.5 to about 8 parts by weight of a guar polymer suspended in aqueous medium, said guar polymer having a weight average molecular weight of from about 100,000 to about 5,000,000 grams per mole and said composition exhibiting:
 - (a) a viscosity of greater than or equal to 5 Pa.s at a shear rate of less than 0.01 s⁻¹, and
 - (b) a viscosity of less than 5 Pa.s at a shear rate of greater than 10 s⁻¹.
18. A method for making a polysaccharide composition that comprises a mixture of an aqueous liquid medium, an incompletely hydrated water soluble polymer dispersed in the aqueous liquid medium, and a hydration inhibitor for inhibiting hydration of the water soluble polymer, comprising:
 - mixing the hydration inhibitor with the liquid medium, and
 - mixing the water soluble polymer with the mixture of aqueous liquid and hydration inhibitor to disperse the water soluble polymer.
19. The method of claim 18, further comprising mixing a suspending agent with the mixture of aqueous liquid medium, water soluble polymer, and hydration inhibitor.

20. A composition, comprising, based on 100 parts by weight of the composition:
- an aqueous liquid medium,
 - up to 2.5 parts by weight of an incompletely hydrolyzed water soluble polymer selected from polyacrylamide polymers, non-derivatized guar polymers and derivatized guar polymers, dispersed in the liquid medium, and
 - a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polysaccharide polymers other than the non-derivatized or derivatized guar polymer, and mixtures thereof, and
 - a hydration inhibitor selected from surfactant compounds, non-surfactant water soluble salts, water dispersible organic solvents, and mixtures thereof.
21. A composition, comprising:
- an aqueous liquid medium that comprises water and a water immiscible organic liquid,
 - an emulsifier for emulsifying the water and water immiscible liquid,
 - an incompletely hydrolyzed water soluble polymer dispersed in the liquid medium,
- wherein the composition is in the form of an emulsion, a microemulsion, or a suspoemulsion.
22. The composition of claim 21, further comprising a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polysaccharide polymers other than the non-derivatized or derivatized guar polymer, and mixtures thereof.
23. A method for making the composition of claim 21, comprising:
- optionally, mixing all or a portion of the emulsifier with the water,
 - mixing the water soluble polymer and, optionally all or a portion of the emulsifier with the water immiscible organic liquid, and

combining the water or mixture of water and emulsifier with the mixture of water soluble polymer and water immiscible organic liquid or mixture of water soluble polymer, water immiscible organic liquid and emulsifier to form the composition.

24. A composition, comprising:

a non-aqueous liquid medium comprising a non-aqueous liquid selected from fatty acid esters, alkylated fatty acid esters, and mixtures thereof, and

an incompletely hydrolyzed water soluble polymer dispersed in the non-aqueous liquid medium.

25. The composition of claim 24, further comprising a suspending agent selected from fumed silicas and inorganic colloidal or colloid-forming particles.

26. A composition, comprising, based on 100 parts by weight of the composition:

a liquid medium,

greater than 2.5 parts by weight of a water soluble polymer, wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed in the liquid medium,

optionally, a suspending agent dissolved or dispersed in the liquid medium, and

optionally, a hydration inhibitor dissolved or dispersed in the liquid medium.

27. A method for making an agricultural pesticide composition, comprising mixing the composition of claim 26 with an agricultural pesticide compound, optionally other agricultural adjuvants, and water to form an pesticide composition for spray application to target pests.

28. The composition of claim 26, wherein

the liquid medium is an aqueous medium,

the water soluble polymer is selected from polyacrylamide polymers, non-derivatized guar polymers, derivatized guar polymers, and mixtures thereof, wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed in the liquid medium,

optionally, a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polysaccharide polymers other than derivatized or non-derivatized guar polymers, and mixtures thereof dissolved or dispersed in the liquid medium, and

optionally, a hydration inhibitor selected from surfactants, water soluble non-surfactant salts, water dispersible organic solvents, and mixtures thereof, dissolved or dispersed in the liquid medium.

29. The composition of claim 26, wherein the composition exhibits a viscosity of less than or equal to 10 Pa.s at a shear rate of greater than or equal to 10 s^{-1} .

30. A composition, comprising, based on 100 parts by weight of the composition:

an aqueous liquid medium,

up to 2.5 parts by weight of a water soluble polymer, wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed in the liquid medium,

a suspending agent dissolved or dispersed in the liquid medium, and a hydration inhibitor dissolved or dispersed in the liquid medium.

31. A method for making an agricultural pesticide composition, comprising mixing the composition of claim 30 with an agricultural pesticide compound, optionally other agricultural adjuvants, and water to form an pesticide composition for spray application to target pests.

32. A composition, comprising:
- a liquid medium comprising water and a water immiscible organic liquid,
 - an emulsifier for emulsifying the water and a water immiscible organic liquid,
 - a water soluble polysaccharide polymer selected from polyacrylamide polymers, non-derivatized guar polymers, derivatized guar polymers, and mixtures thereof, wherein at least a portion of the water soluble polysaccharide polymer is in the form of particles of the water soluble polymer and wherein at least a portion of such particles are dispersed in the liquid medium, and
 - optionally, a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, rheology modifier polymers, water soluble polysaccharide polymers other than derivatized or non-derivatized guar polymers, and mixtures thereof dissolved or dispersed in the liquid medium,
- wherein the composition is in the form of an emulsion, a microemulsion, or a suspoemulsion.

33. The composition of claim 32, wherein the composition comprises, based on 100 parts by weight of the composition:
- from about 0.1 part by weight to about 50 parts by weight of the water soluble polysaccharide polymer, and
 - from about 0.1 part by weight to about 10 parts by weight of the suspending agent.

34. The composition of claim 32, wherein the composition exhibits a viscosity of less than or equal to 10 Pa.s at a shear rate of greater than 10 s⁻¹.

35. A method for making an agricultural pesticide composition, comprising mixing the composition of claim 32 with an agricultural pesticide compound,

optionally other agricultural adjuvants, and water to form an pesticide composition for spray application to target pests.

36. A composition, comprising :

a non-aqueous liquid medium comprising a non-aqueous liquid selected from fatty acid esters, alkylated fatty acid esters, and mixtures thereof,

a water soluble polysaccharide polymer selected from polyacrylamide polymers, non-derivatized guar polymers, derivatized guar polymers, and mixtures thereof, wherein at least a portion of the water soluble polymer is in the form of particles and at least a portion of such particles are dispersed in the non-aqueous liquid medium, and

optionally, a suspending agent selected from fumed silicas, inorganic colloidal or colloid-forming particles, and mixtures thereof, dispersed in the non-aqueous liquid medium.

37. The composition of claim 36, wherein the composition comprises, based on 100 parts by weight of the composition:

from about 0.1 part by weight to about 50 parts by weight of the water soluble polysaccharide polymer, and


from about 0.1 part by weight to about 10 parts by weight of the suspending agent.

38. The composition of claim 36, wherein the composition exhibits a viscosity of less than or equal to 10 Pa.s at a shear rate of greater than or equal to 10 s^{-1} .

39. A method for making an agricultural pesticide composition, comprising mixing the composition of claim 36 with an agricultural pesticide compound, optionally other agricultural adjuvants, and water to form an pesticide composition for spray application to target pests.


1 / 9

FIG. 1

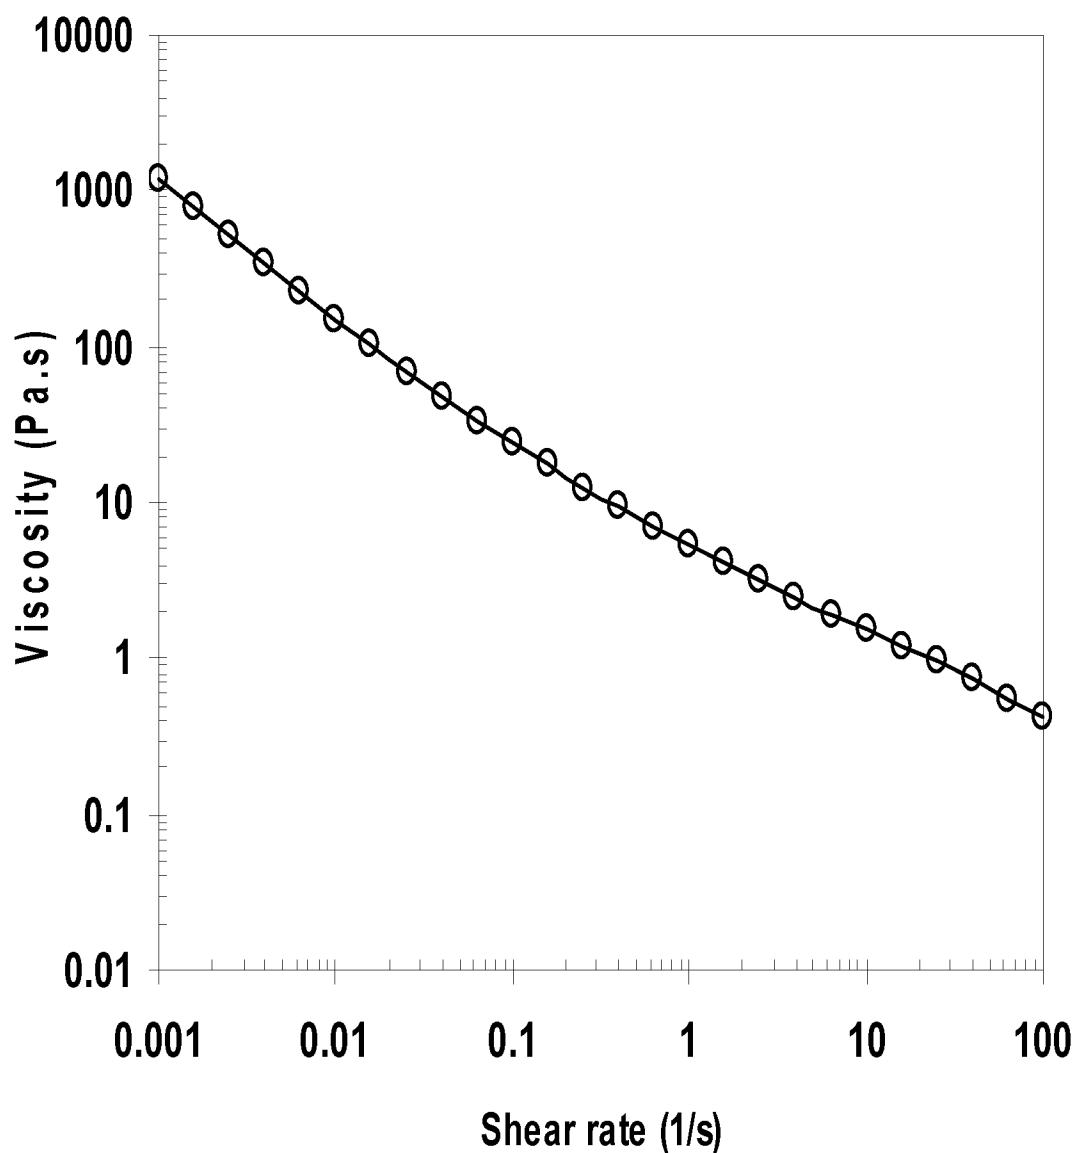


2 / 9

FIG. 2

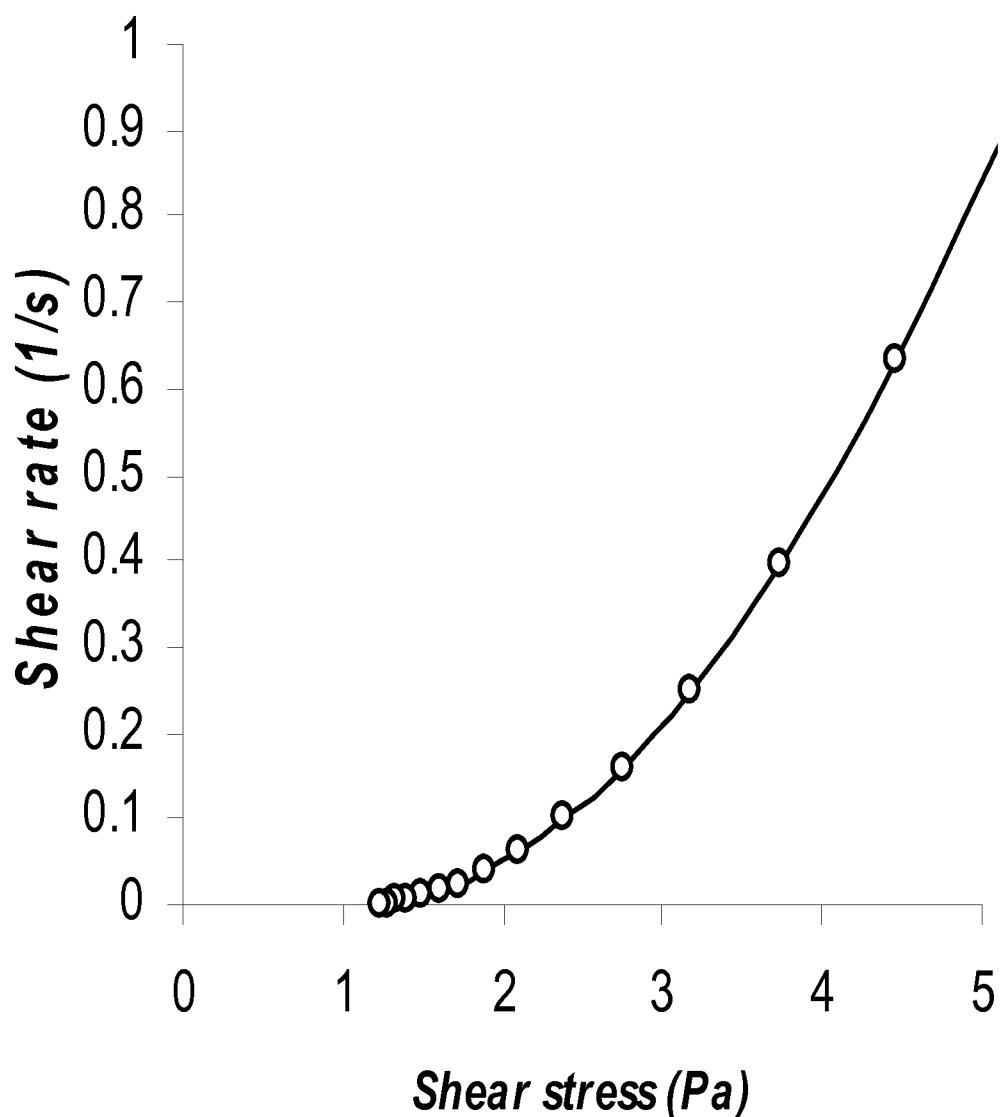

3 / 9

FIG. 3

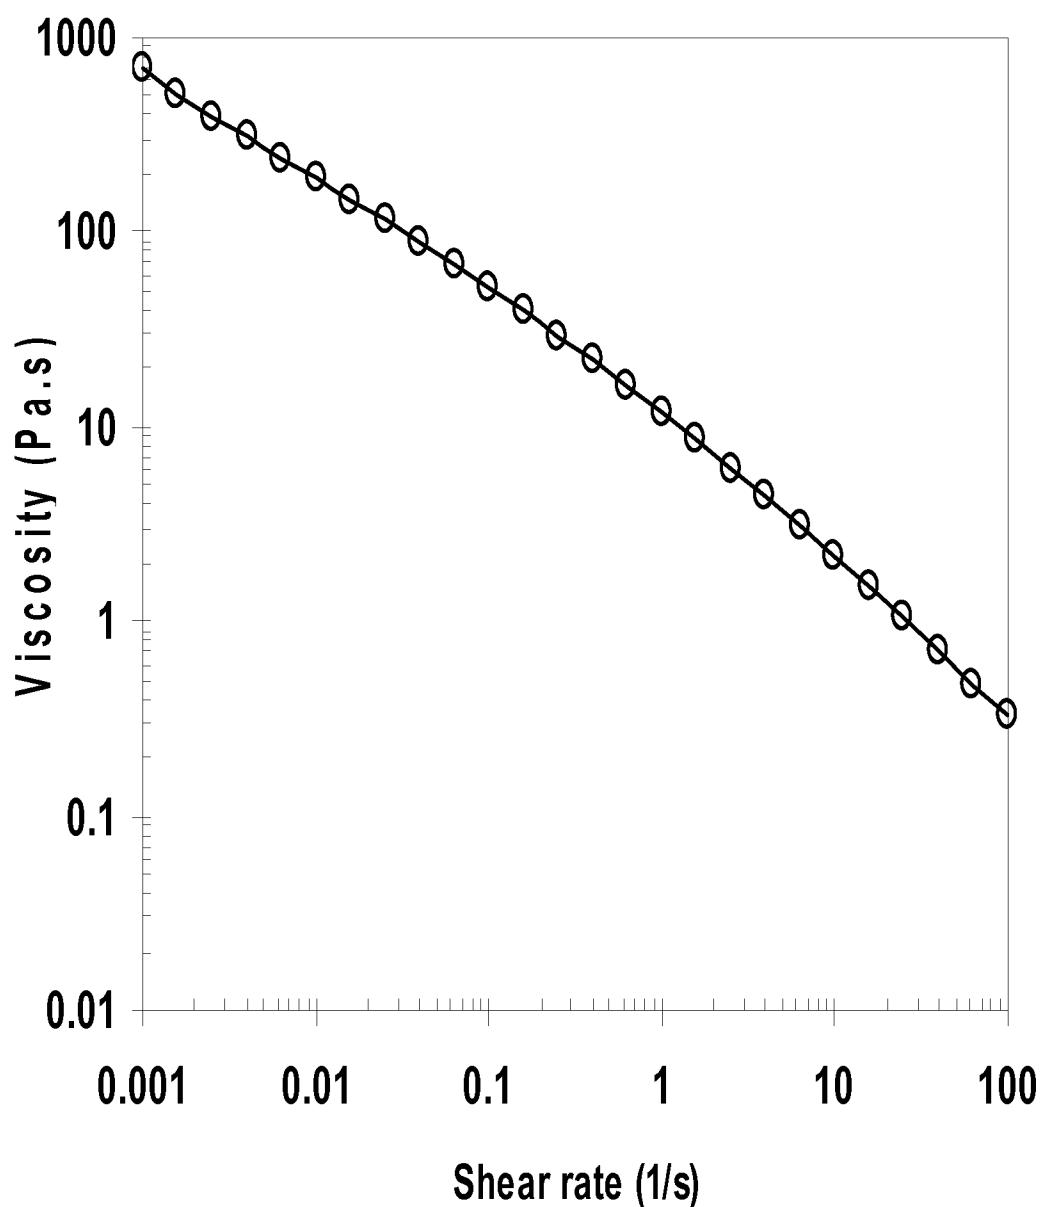

4 / 9

FIG. 4

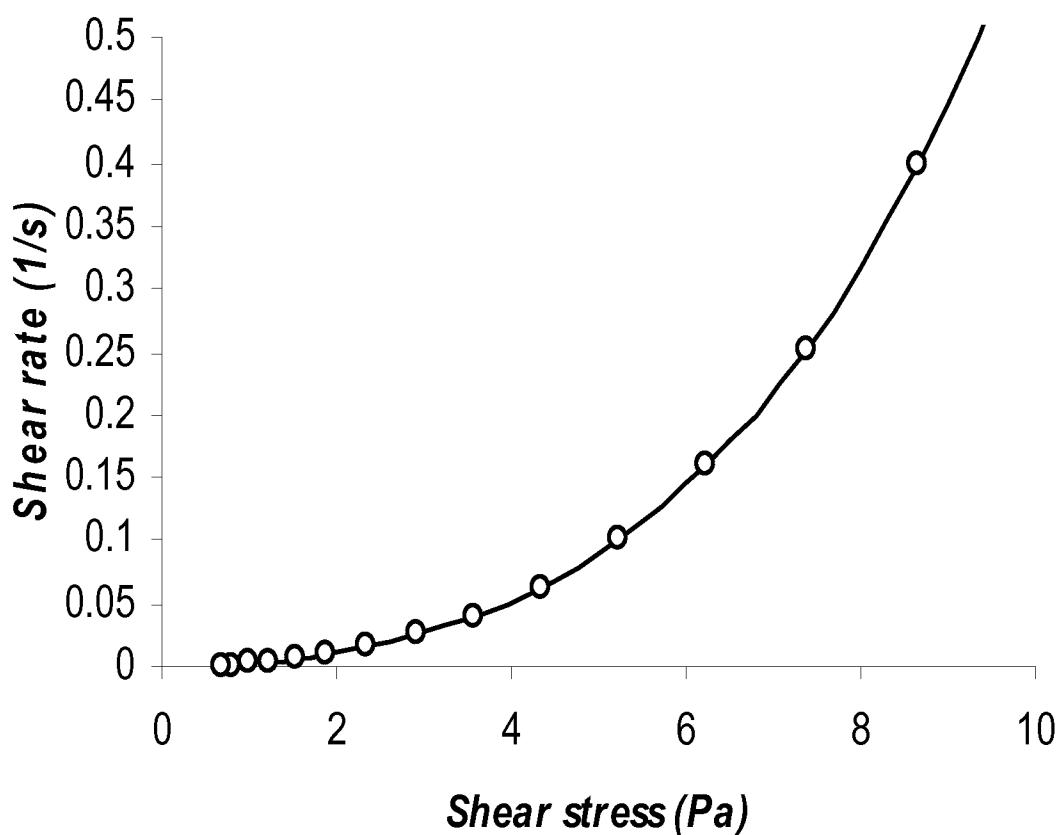


FIG. 5(a)



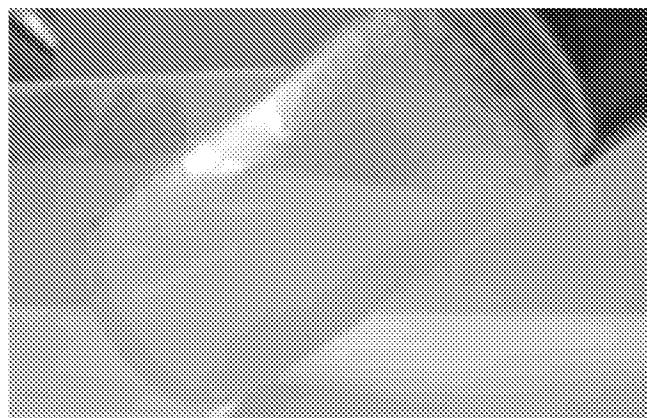


FIG. 5(b)

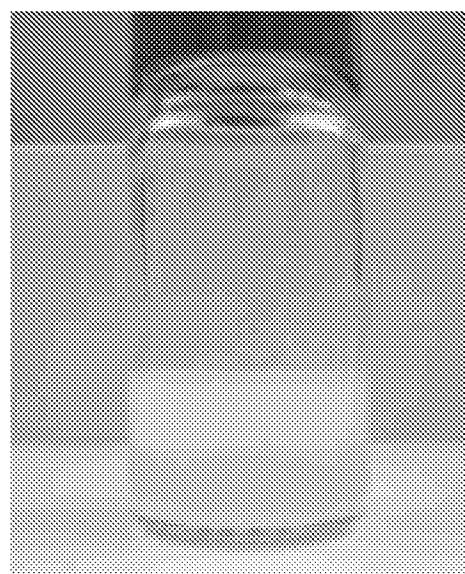


6 / 9

FIG. 6

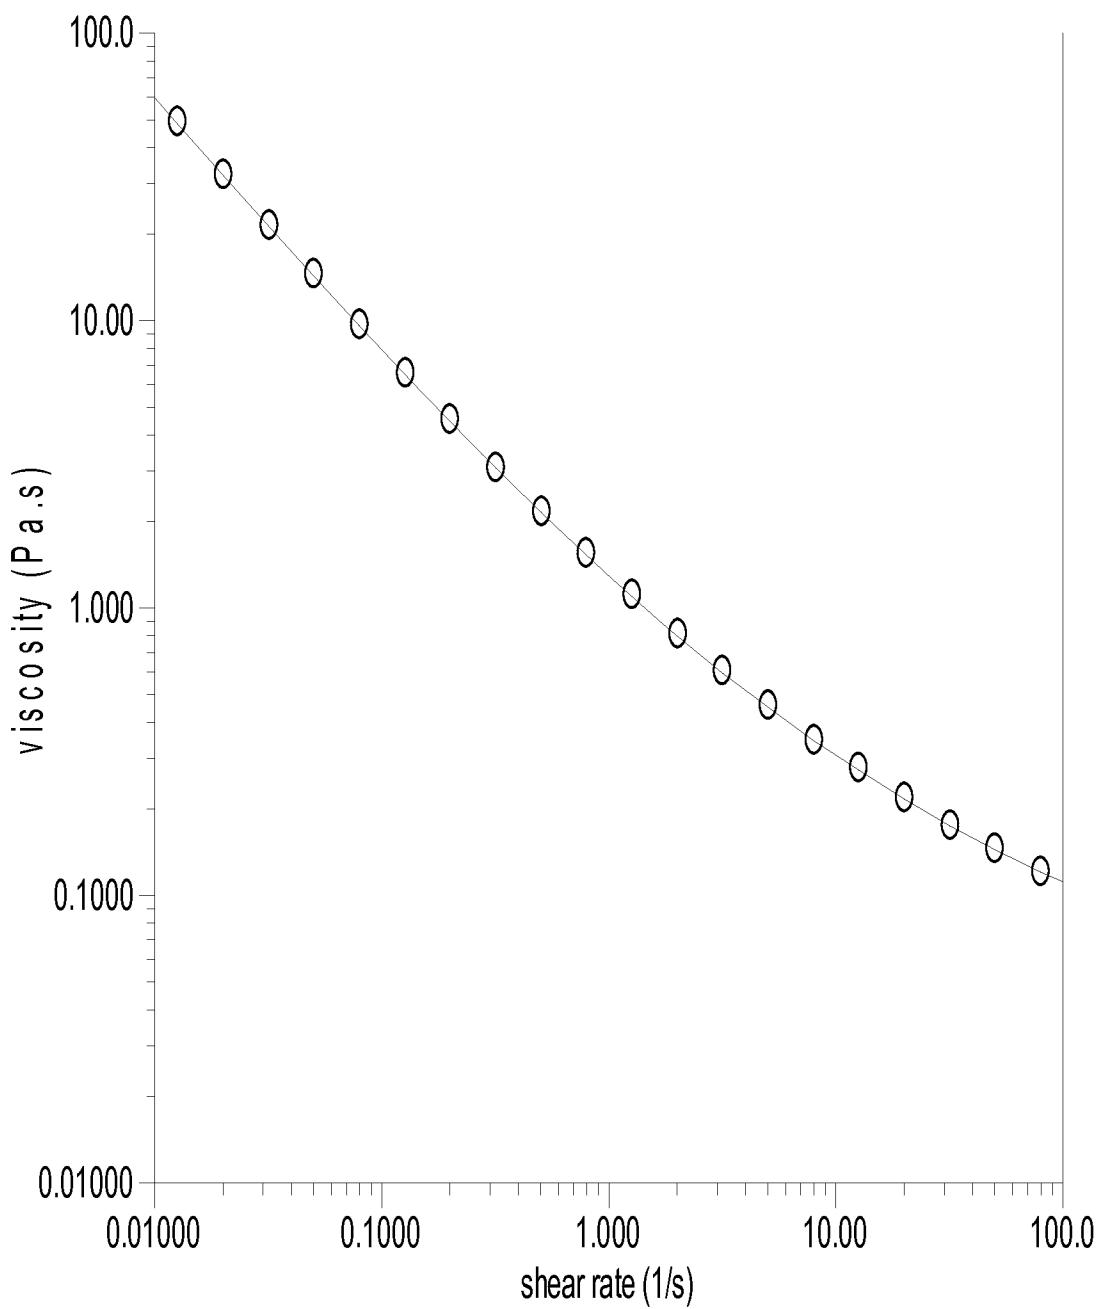


7 / 9

FIG. 7

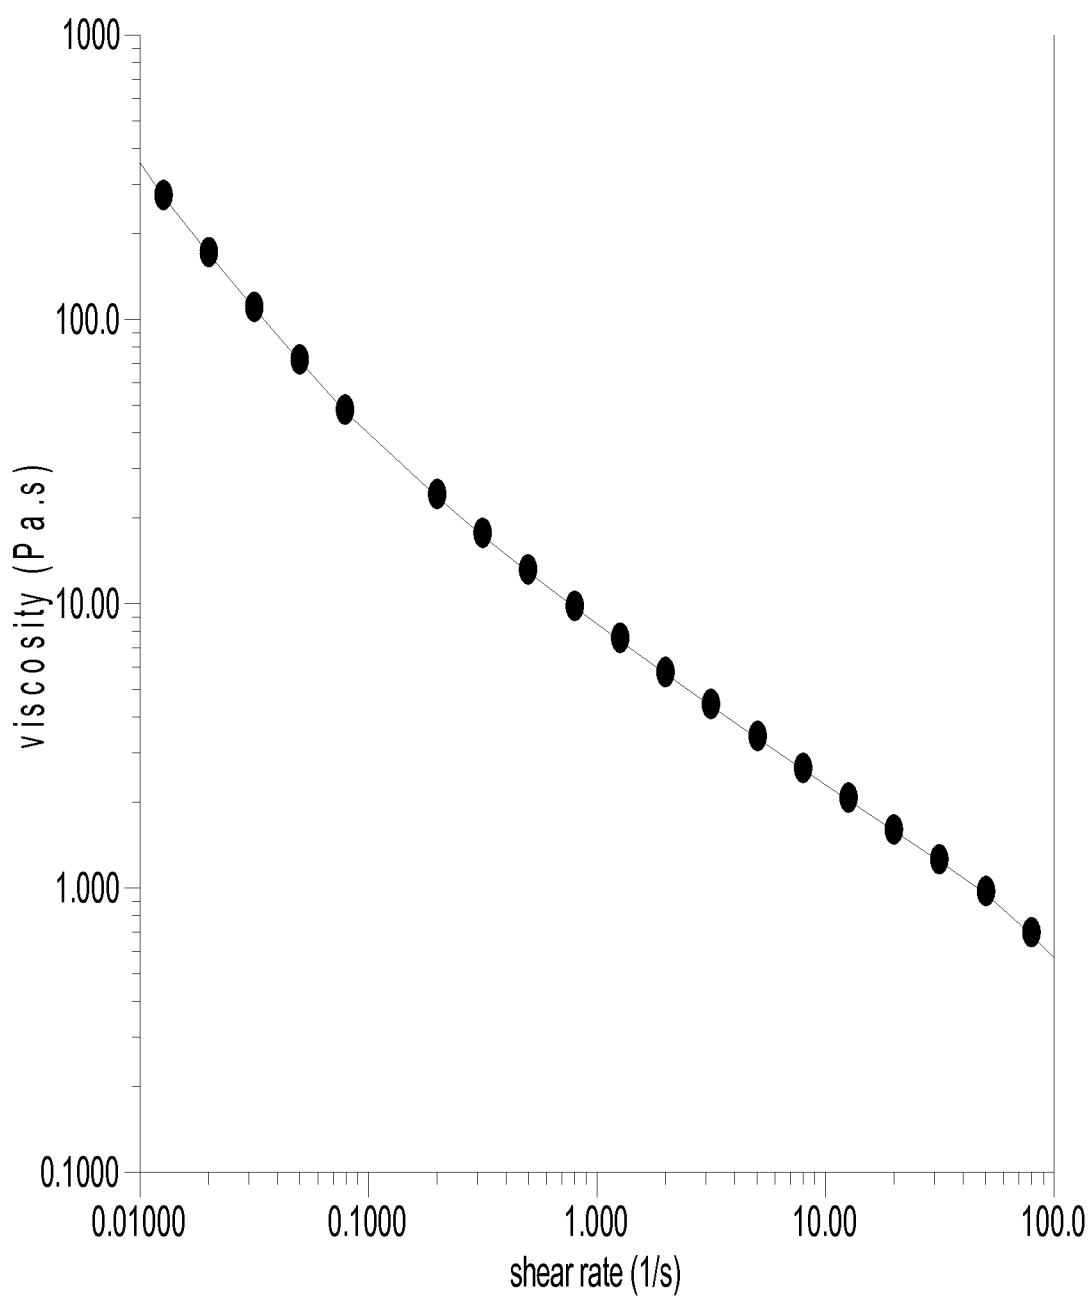

8 / 9


FIG. 8

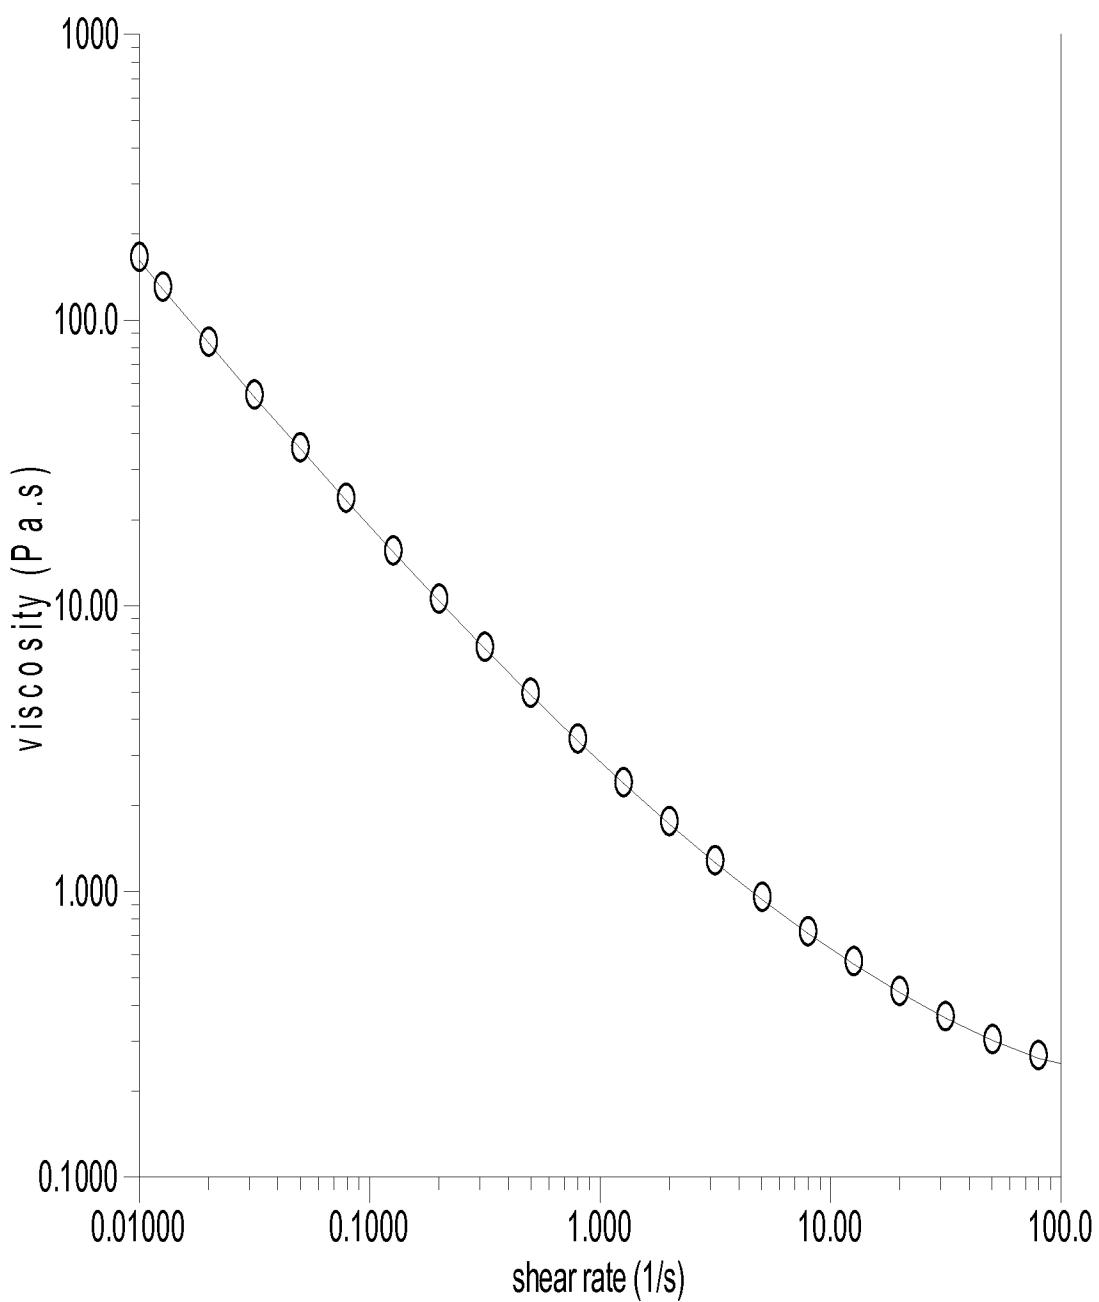

9 / 9

FIG. 9

(b)

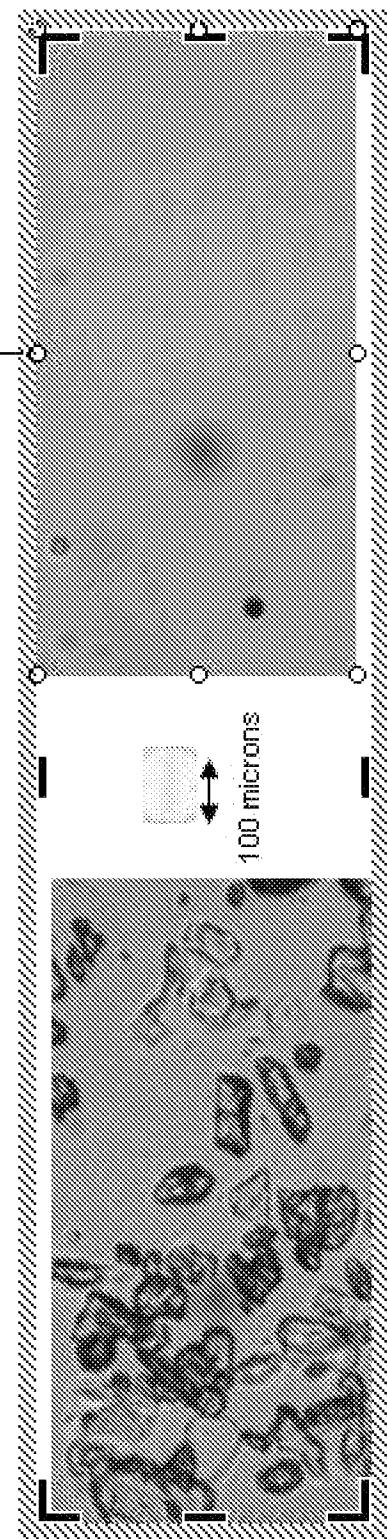

(a)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 10/02426

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - C08J 3/02 (2010.01)

USPC - 106/238, 106/239

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
USPC: 106/238, 106/239

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Electronic Database Searched: PUBWEST (PGPUB, USPT, EPAB, JPAB, USOC), Google. Search Terms Used polymer suspend\$ near3 liquid, polysaccharide\$, guar, starche\$, cellulosic, personal care, pesticide, pharmaceutical\$, fumed silica, inorganic colloidal, colloid-forming particle\$, rheology modifier polymer, incompletely hydrated polymer, composition

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4,418,090 A (Bohrmann et al.) 29 November 1983 (29.11.1983) entire document especially col 6, ln 43-56; col 12, ln 21-39	1, 2, 13 ----- 3-12, 14-16
X	US 4,415,599 A (Bos) 15 November 1983 (15.11.1983) especially col 2, ln 11-37; example 1; col 3 ln 60 to col 4 ln 33	1, 2, 13
Y	US 4,435,217 A (House) 6 March 1984 (06.03.1984) abstract; claim 10; col 1 ln 6-8; col 2 ln 31-39; col 3 ln 8-43, 65-68; col 8 ln 5-10; col 9 ln 5-8, 15-18, 66-67; col 20 ln 7-17	3-16
Y	US 5,663,123 A (Goodhue Jr. et al.) 02 September 1997 (02.09.1997) col 7 ln 54-65; col 8 ln 60-66	7
A	US 2004/0170750 A1 (Bunick et al.) 02 September 2004 (02.09.2004) entire document	1-16

 Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

- “A” document defining the general state of the art which is not considered to be of particular relevance
- “E” earlier application or patent but published on or after the international filing date
- “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- “O” document referring to an oral disclosure, use, exhibition or other means
- “P” document published prior to the international filing date but later than the priority date claimed

- “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- “&” document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
17 December 2010 (17.12.2010)	05 JAN 2011
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201	Authorized officer: Lee W. Young PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 10/02426

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

(please see supplemental box)

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US 10/02426

Lack of Unity (box III)

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I: claims 1-16: directed to a composition comprising: greater than 2.5 % of an incompletely hydrated water soluble polymer suspended in a liquid medium.

Group II: claims 17: directed to composition comprising: 2.5-8 % of a guar polymer suspended in aqueous medium, said guar polymer having a specified molecular weight and viscosity.

Group III: claims 18-20 and 26-31: directed to a composition comprising: an aqueous liquid medium; a water soluble polymer, wherein a portion of the water soluble polymer is in the form of particles; a portion of such particles are dispersed in the liquid medium; a suspending agent dissolved or dispersed in the liquid medium; and a hydration inhibitor dissolved or dispersed in the liquid medium.

Group IV: claims 21-25 and 32-39: directed to a composition comprising: an aqueous liquid medium; a water soluble polymer, wherein a portion of the water soluble polymer is in the form of particles; a portion of such particles are dispersed in the liquid medium; a suspending agent dissolved or dispersed in the liquid medium; an emulsifier, and an immiscible liquid.

The inventions listed as Groups I - IV do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons:

Group I does not include the inventive concept of a specified molecular weight or viscosity; a portion of the water soluble polymer is in the form of particles dispersed in the liquid medium; a suspending agent; an immiscible liquid, and a hydration inhibitor, as required by Groups II - VI.

Group II does not include the inventive concept of a hydration inhibitor, a suspending agent, an emulsifier, or an immiscible liquid, as required by Groups I, III, and IV.

Group III does not include the inventive concept of an immiscible liquid, as required by Group IV.

Group IV does not include the inventive concept of a hydration inhibitor, as required by Group III.

Groups I - IV share the technical features of
an incompletely hydrated water soluble polymer (or particles) suspended in a liquid medium;
a suspending agent; and
a dispersion or emulsion.

However, these shared technical features do not represent a contribution over the prior art of US 5,676,994 A to Eskins et al. (14 October 1997), which teaches an incompletely hydrated water soluble polymer (or particles) suspended in a liquid medium at col 1 ln 9-16 and col 11 ln 34-38; a dispersion or emulsion, and a suspending agent; (abstract). As the above features were known, as evidenced by the teaching of Eskins, these cannot be considered a special technical feature that would otherwise unify the groups.

Groups I - IV therefore lack unity under PCT Rule 13 because they do not share a same or corresponding special technical feature.