

(12) **United States Patent**  
**Coleman**

(10) **Patent No.:** **US 10,745,939 B2**  
(45) **Date of Patent:** **Aug. 18, 2020**

(54) **WIRELESS TRANSMITTER AND RELATED SYSTEMS AND METHODS**

6,832,072 B2	12/2004	Buckingham et al.
7,019,241 B2	3/2006	Grassl et al.
7,391,135 B2	6/2008	Schmidt
7,891,641 B1 *	2/2011	Miller ..... B66D 1/16 254/344
9,713,231 B2	7/2017	Kelly et al.
2005/0275581 A1 *	12/2005	Grassl ..... H01L 41/1136 341/173
2006/0185404 A1 *	8/2006	Hansen ..... E05B 9/084 70/38 A
2017/0032593 A1 *	2/2017	Patel ..... G07C 9/00309
2017/0076888 A1 *	3/2017	Ruff ..... H01H 23/143

(71) Applicant: **Won-Door Corporation**, Salt Lake City, UT (US)

(72) Inventor: **William Michael Coleman**, Salt Lake City, UT (US)

(73) Assignee: **Won-Door Corporation**, Salt Lake City, UT (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/031,817**

(22) Filed: **Jul. 10, 2018**

(65) **Prior Publication Data**  
US 2020/0018095 A1 Jan. 16, 2020

(51) **Int. Cl.**  
**H04B 1/40** (2015.01)  
**E05B 47/00** (2006.01)  
**E05B 27/00** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **E05B 47/0012** (2013.01); **E05B 27/0007** (2013.01); **E05B 2047/0051** (2013.01)

(58) **Field of Classification Search**  
CPC ..... E05B 47/0012; E05B 27/0007; E05B 2047/0051; E05B 81/14  
See application file for complete search history.

(56) **References Cited**  
U.S. PATENT DOCUMENTS

5,057,657 A \* 10/1991 Skulic ..... H01H 13/705  
200/342  
6,747,573 B1 6/2004 Gerlach et al.

**OTHER PUBLICATIONS**

PTM 210U/ PTM 215/ PTM210U/ PTM 210J Pushbutton Transmitter Modules User Manual, May 2017, 20 pages, Dolphin Self-powered IoT by EnOcean.  
PTM 210U Push button multi-channel switch module Data Sheet, Dec. 2017, 1 page, Dolphin Self-powered IoT by EnOcean.

\* cited by examiner


*Primary Examiner* — Nhan T Le

(74) *Attorney, Agent, or Firm* — TraskBritt

(57) **ABSTRACT**

A wireless transmitter including a rotating actuator, a plate connected to the rotating actuator, and a wireless switch. The wireless switch may include at least one actuating panel and at least one transducer element. The at least one transducer element may be configured to convert mechanical energy to electrical energy. The at least one actuating panel may be configured to transmit mechanical energy to the at least one transducer element. The plate may be configured to contact the wireless switch at a rotational end point of the rotating actuator.

**19 Claims, 6 Drawing Sheets**

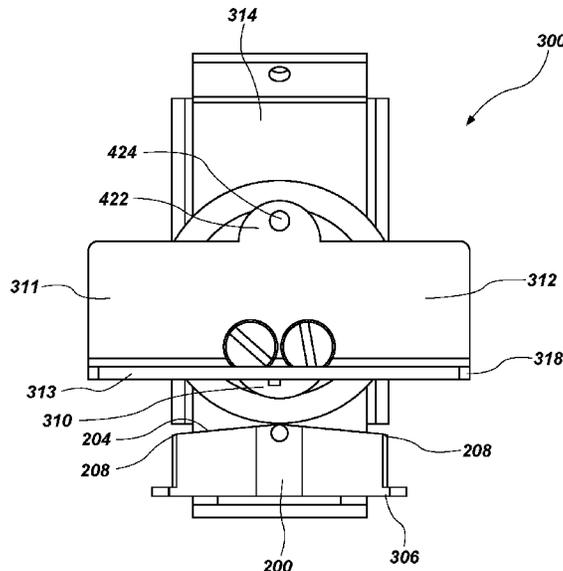

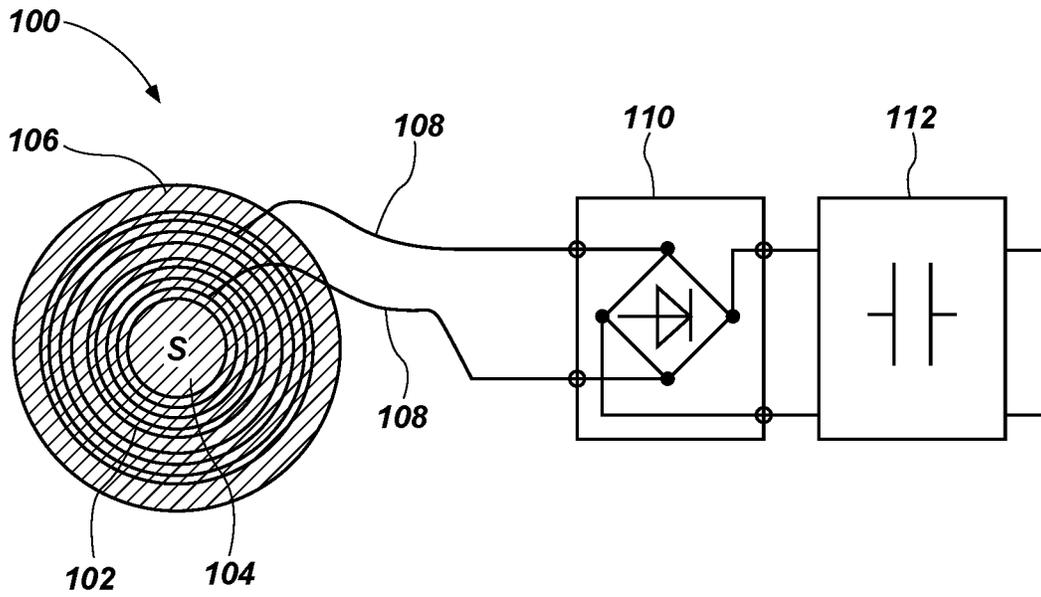


FIG. 1

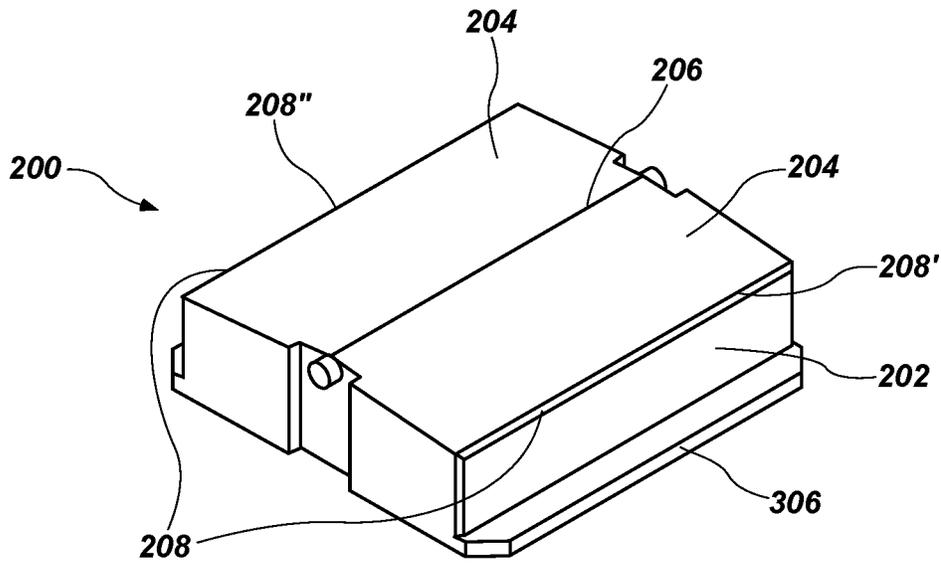


FIG. 2

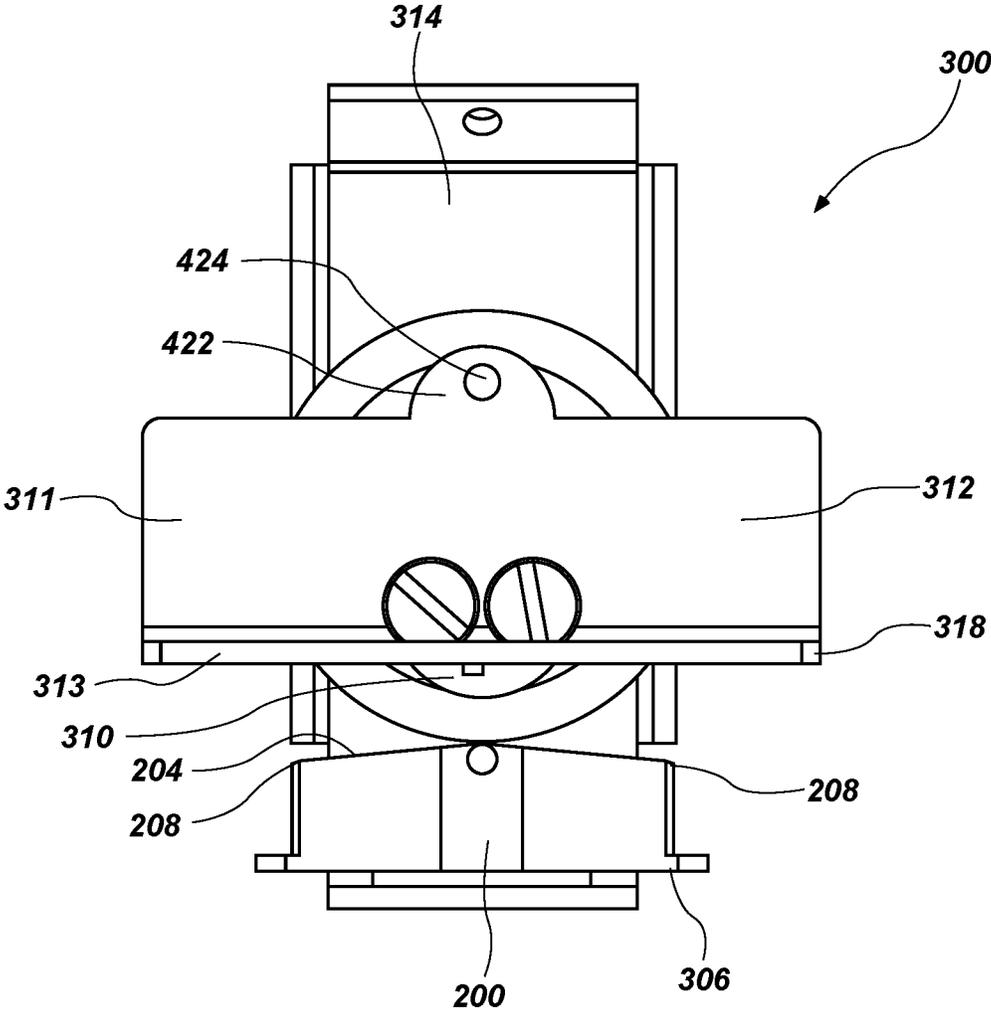


FIG. 3A

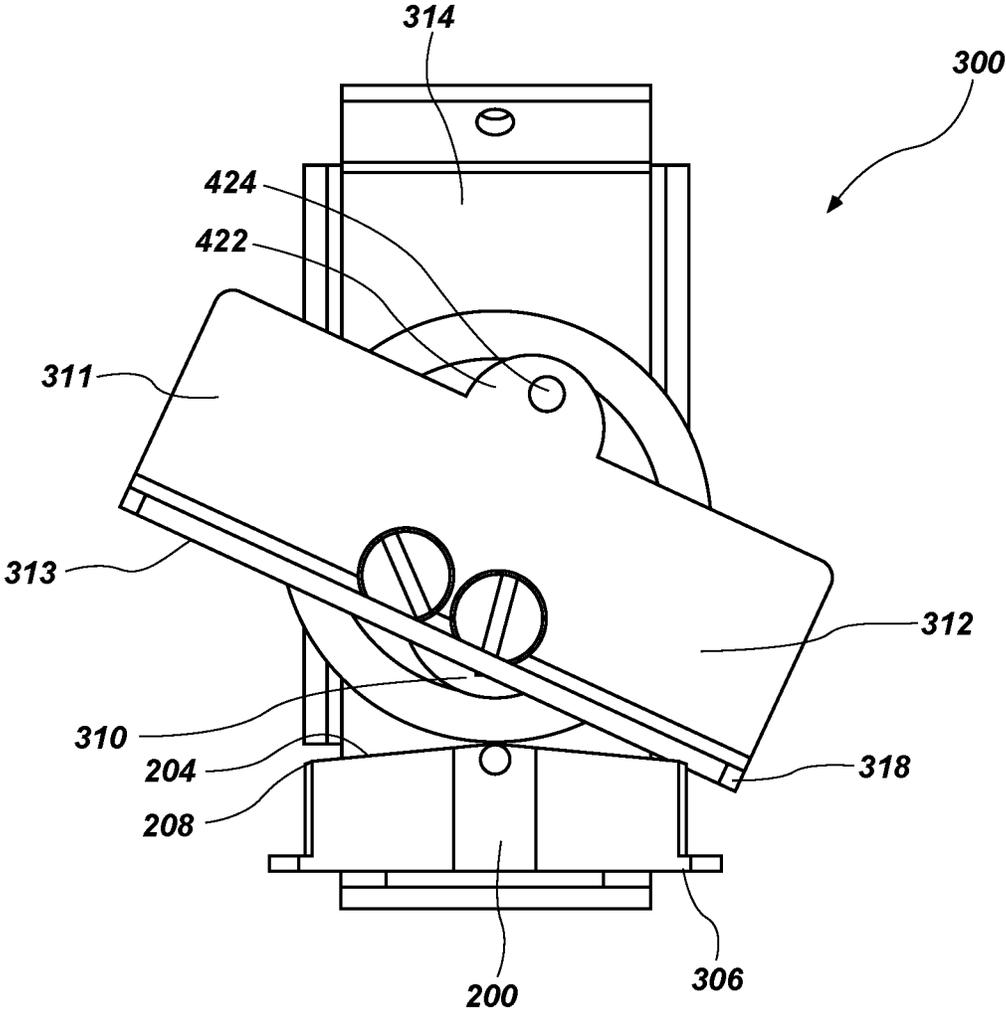


FIG. 3B

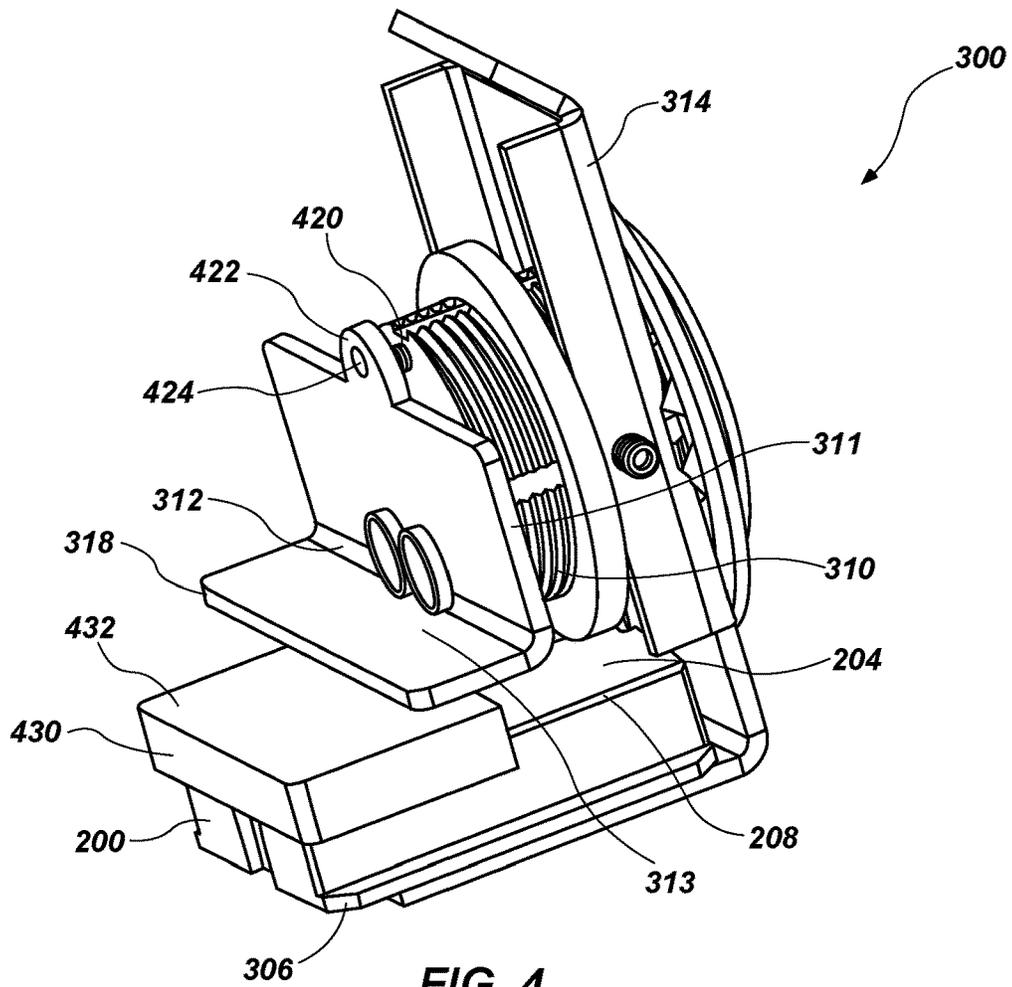


FIG. 4

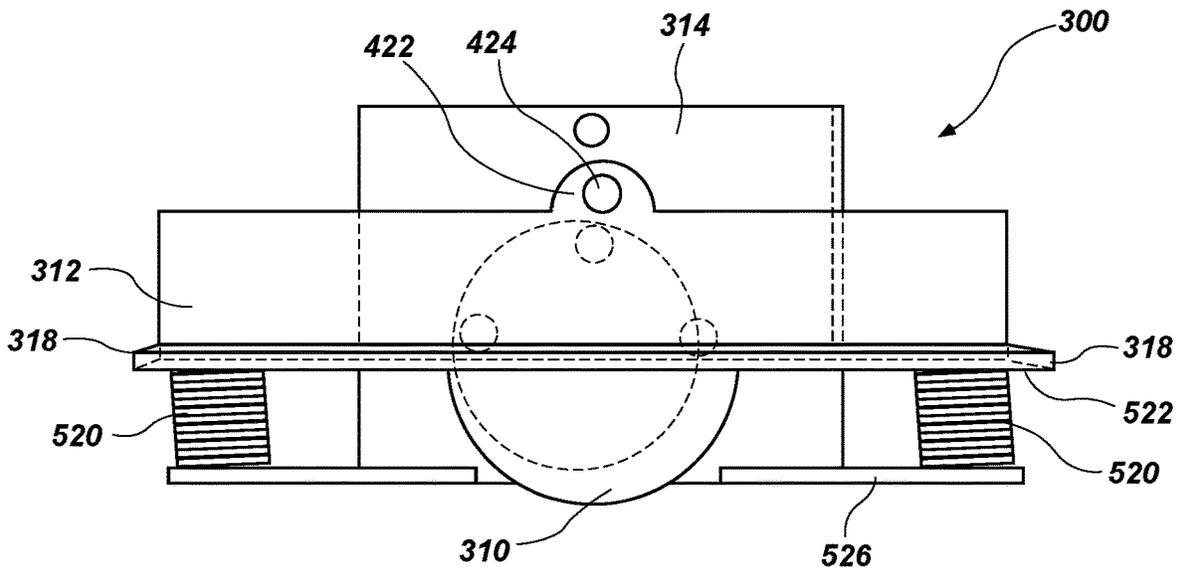


FIG. 5

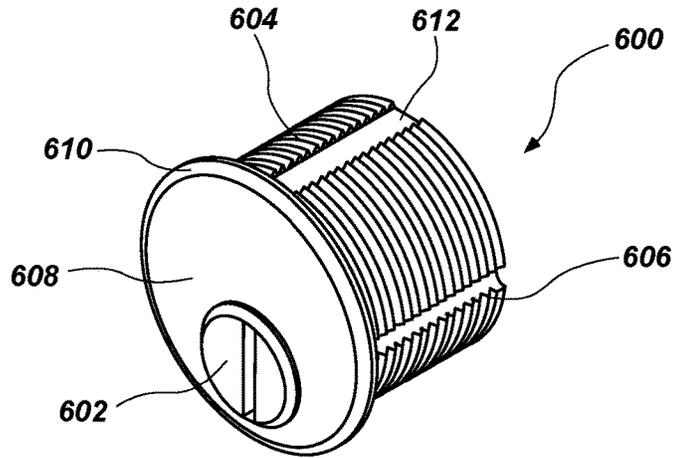


FIG. 6

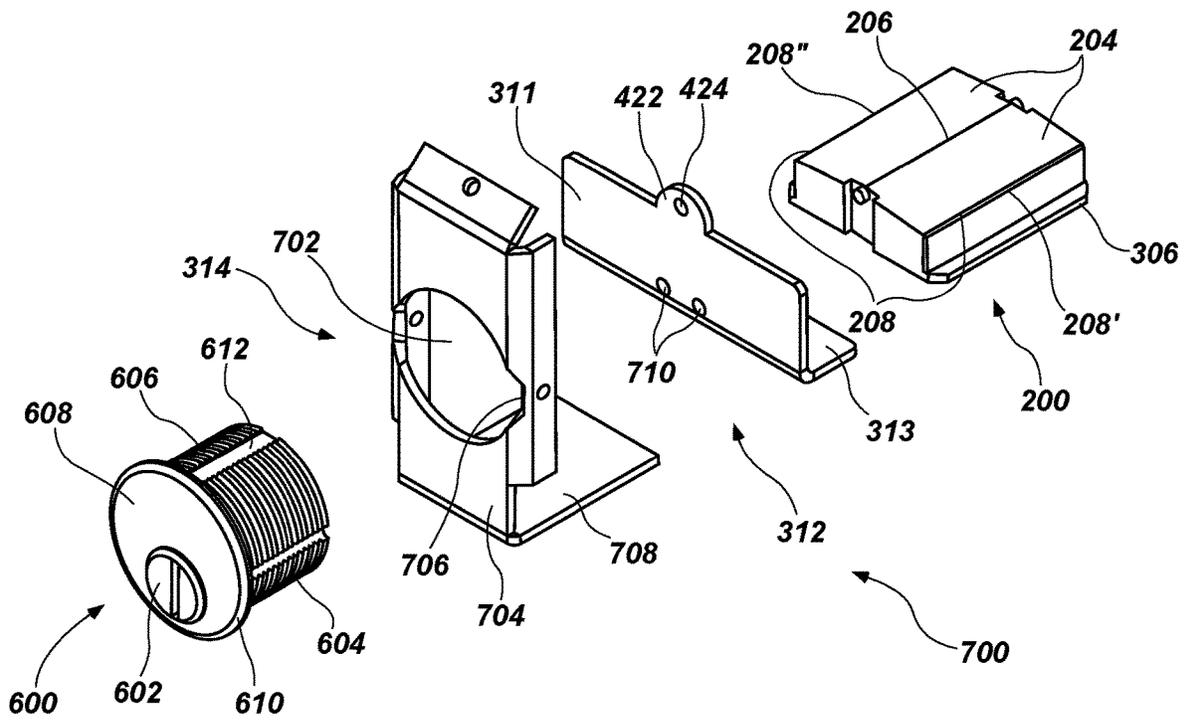


FIG. 7

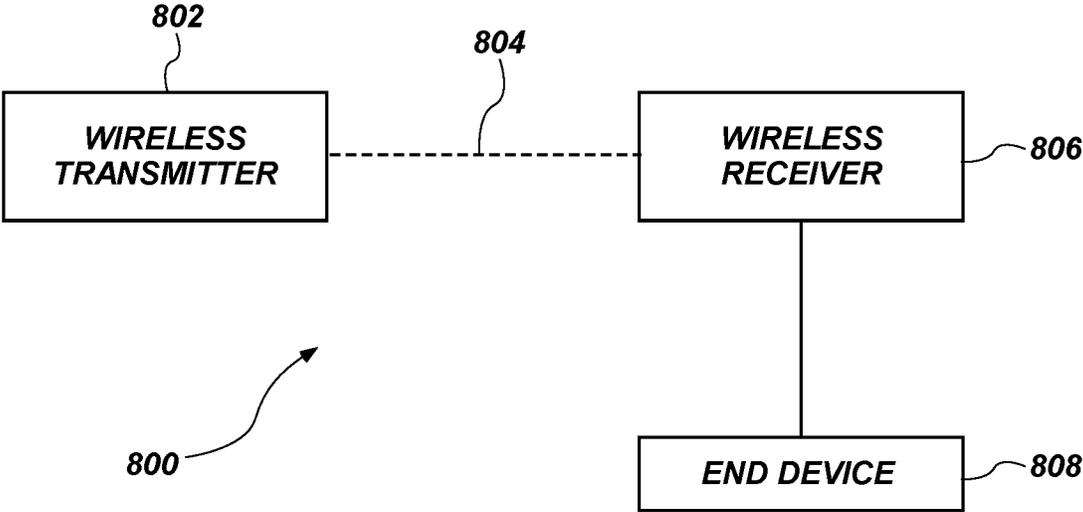


FIG. 8

## WIRELESS TRANSMITTER AND RELATED SYSTEMS AND METHODS

### TECHNICAL FIELD

The disclosure relates to wireless transmitters and related systems and methods. In particular, embodiments of the disclosure relate to wireless transmitters, wireless switches, wireless communication systems, and related methods.

### BACKGROUND

Many systems utilize remote switches or sensors. Some examples of remote switches or sensors include light switches, door switches, override switches, temperature sensors, pressure sensors, etc. Generally, the remote switches or sensors require a wired connection between the switches or sensors and a device or control system with which the switches or sensors are communicating. In some systems the switch or sensor may be directly connected to the device it is controlling. For example, a light switch may be directly connected to the light it turns on and off.

The wired connection can be cumbersome during installation. Generally, a wired connection is installed or prepared for installation before walls are completed during construction. When walls are completed before the wired connection is prepared for installation (e.g., roughed in) the installation may require additional time and effort to install wires within the wall (e.g., fishing wires into wall). Additionally, some walls are formed from materials that cannot be penetrated once complete (e.g., concrete) or include barriers (e.g., fire breaks, studs, windows, side lights, etc.) within the wall making installation after the wall is completed impossible. Often installing wired connections into completed walls results in damage to the walls and additional repair costs.

### BRIEF SUMMARY

Some embodiments of the present disclosure may include a wireless transmitter. The wireless transmitter may include a rotating actuator, a plate connected to the rotating actuator, and a wireless switch. The wireless switch may include at least one actuating panel and at least one transducer element. The at least one transducer element may be configured to convert mechanical energy to electrical energy. The at least one actuating panel may be configured to transmit mechanical energy to the at least one transducer element. The plate may be configured to contact the wireless switch at a rotational end point of the rotating actuator.

Some embodiments of the present disclosure may include a wireless communication system. The wireless communication system may include an energy-autonomous wireless transmitter and a receiver. The energy-autonomous wireless transmitter may include a rotating actuator, a rocker arm, and a wireless switch. The rocker arm may be connected to the rotating actuator. The wireless switch may include at least one actuating panel and at least one transducer element. The at least one transducer element may be configured to convert mechanical energy to electrical energy. The at least one actuating panel may be configured to transmit mechanical energy to the at least one transducer element. The rocker arm may be configured to contact the wireless switch at a rotational end point of the rotating actuator. The energy-autonomous transmitter may be configured to transmit a signal and the receiver may be configured to receive the signal. The receiver may be configured to perform an operation based on the signal.

Some embodiments of the present disclosure may include a method of transmitting a wireless signal. The method may include rotating a lock cylinder attached to a rocker arm. The distal end of the rocker arm may contact an energy-autonomous wireless transmitter at an end point of a rotational range of the lock cylinder. The contact between the energy-autonomous wireless switch and the distal end of the rocker arm may input mechanical energy into the energy-autonomous wireless switch. The mechanical energy may be converted into electrical energy and a signal may be transmitted with the electrical energy.

### BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming embodiments of the present disclosure, the advantages of embodiments of the disclosure may be more readily ascertained from the following description of embodiments of the disclosure when read in conjunction with the accompanying drawings in which:

FIG. 1 shows a plan view of an embodiment of an electromagnetic energy converter;

FIG. 2 shows an isometric view of an embodiment of a wireless switch;

FIG. 3A shows a perspective view of an embodiment of a rotating actuator interfacing with an embodiment of a wireless switch;

FIG. 3B shows a perspective view of an embodiment of a rotating actuator interfacing with an embodiment of a wireless switch;

FIG. 4 shows an isometric view of an embodiment of a rotating actuator;

FIG. 5 shows a perspective view of an embodiment of a rotating actuator;

FIG. 6 shows an isometric view of an embodiment of a rotational input;

FIG. 7 shows an exploded view of an embodiment of a wireless transmitter assembly; and

FIG. 8 shows a diagram of an embodiment of a wireless communication system.

### DETAILED DESCRIPTION

The illustrations presented herein are not meant to be actual views of any particular wireless transmitter, wireless communication system, or component thereof, but are merely idealized representations employed to describe illustrative embodiments. The drawings are not necessarily to scale. Elements common between figures may retain the same numerical designation.

As used herein, any relational term, such as “first,” “second,” “over,” “beneath,” “top,” “bottom,” “underlying,” “up,” “down,” “front,” “back,” etc., is used for clarity and convenience in understanding the disclosure and accompanying drawings, and does not connote or depend on any specific preference, orientation, or order, except where the context clearly indicates otherwise. For example, these terms may refer to an orientation of elements relative to each other (e.g., as illustrated in the figures).

As used herein, the terms “vertical” and “horizontal” may refer to a drawing figure as oriented on the drawing sheet, and are in no way limiting of orientation of an apparatus, or any portion thereof, unless it is apparent that a particular orientation of the apparatus is necessary or desirable for operation in view of gravitational forces. For example, when referring to elements illustrated in the figures, the terms

“vertical” or “horizontal” may refer to an orientation of elements with respect to each other.

As used herein, the term “and/or” means and includes any and all combinations of one or more of the associated listed items.

As used herein, the terms “substantially” or “about” in reference to a given parameter means and includes to a degree that one skilled in the art would understand that the given parameter, property, or condition is met with a small degree of variance, such as within acceptable manufacturing tolerances. For example, a parameter that is substantially met may be at least about 90% met, at least about 95% met, or even at least about 99% met.

As used herein, the term lock means and includes security or controlled access devices that may be actuated with keys (e.g., pin tumbler, mortise, lever tumbler, cylinder, bored cylinder, magnetic coded, etc.), specialized tools (e.g., tamperproof screw drivers, tamperproof wrench, etc.), proximity systems (e.g., proximity cards, fobs, mobile IDs, etc.), combination locks (e.g. single dial lock, multi dial lock, key pad locks, etc.).

Some embodiments of the present disclosure may include wireless transmitters or switches that may be engaged by a rotational input (e.g., key switch, knob, dial, etc.). Wireless transmitters allow remote switches or sensors to be installed after a wall is completed without damaging the wall or fishing wires into the wall. Some wireless transmitters known in the art may include an external power source such as a battery, as described in U.S. Pat. No. 6,832,072 to Buckingham et al., issued Dec. 14, 2004, and U.S. Patent Publication 2015/0382436 to Kelly et al., published Dec. 31, 2015, now U.S. Pat. No. 9,713,231, issued Jul. 18, 2017, the disclosure of each of which is incorporated herein in its entirety by this reference. Wireless transmitters may provide a signal to a receiver that may then be translated into an operation at an end device.

Wireless transmitters that include an external power source may present additional problems such as the need for constant maintenance to check, recharge, and/or change batteries, and a range that reduces as the battery discharges and reduces the power behind the signal. The reducing range eventually results in an inoperative system when the signal is sufficiently weak that it fails to be detected by the receiver. If an alternative external power source is used often it requires providing power wires to the transmitter which defeats the purpose of avoiding pulling wires through finished walls.

Some embodiments of the present disclosure may include energy autonomous wireless transmitters. Some wireless transmitters utilize energy harvesting techniques to convert mechanical energy into electrical energy and provide a wireless signal from the electrical energy as described in U.S. Pat. No. 7,019,241 to Grassl et al., issued Mar. 28, 2006, and U.S. Pat. No. 7,391,135 to Schmidt, issued Jun. 24, 2008, the disclosure of each of which is incorporated herein in its entirety by this reference.

FIG. 1 illustrates an embodiment of an electromagnetic energy converter **100** (e.g. transducer). In some embodiments, the electromagnetic energy converter **100** may be used as an energy harvester to convert mechanical energy into electrical energy. The electromagnetic energy converter **100** may include an electrical coil **102** concentrically located between a first permanent magnet **104** and a second permanent magnet **106**. In some embodiments, the first permanent magnet **104** may be configured to move relative to the second permanent magnet **106** and the electrical coil **102** along a common axis. As the first permanent magnet **104**

moves relative to the second permanent magnet **106** and the electrical coil **102** a current may be induced in the electrical coil **102**. In some embodiments, the current induced may be passed through electrical connections **108** to additional circuitry to power radio switches and/or radio sensors that can be operated briefly without an energy storage device.

In some embodiments, the additional circuitry may include an electrical converter **110** (e.g., rectifier, bridge rectifier) and/or an energy storage device **112** (e.g., capacitor). In some embodiments, the energy storage device **112** or the electrical converter **110** may be connected to a signal transmitting device (e.g., radio switches, radio sensors, etc.). In some embodiments, the electrical connections **108** may be directly connected to the signal transmitting device without any intervening circuitry.

In some embodiments, the first permanent magnet **104** may include a biasing element (e.g., spring, washers, compressible fluids, magnetic biasing, resilient materials, etc.) configured to bias the first permanent magnet **104** toward an initial position. The biasing element may allow a first current to be induced when a force is applied to the first permanent magnet **104** to induce the movement and a second current to be induced when the force is released and the first permanent magnet **104** returns to the initial position under the influence of the biasing element. In some embodiments, the second permanent magnet **106** may move relative to the first permanent magnet **104** and the electrical coil **102** in the same manner. In some embodiments, both the first permanent magnet **104** and the second permanent magnet **106** may be configured to move relative to each other.

FIG. 2 illustrates a wireless switch **200**. The wireless switch **200** may include a casing **202** configured to protect sensitive electronics within the casing **202** and/or facilitate interaction between external and internal components of the wireless switch **200**. In some embodiments, the wireless switch **200** may be a wireless switch module PTM-210U manufactured by EnOcean headquartered in Oberhaching Germany with a North American Office in Cottonwood Heights, Utah and sold by Ad Hoc Electronics in Linton, Utah among other distributors. In some embodiments, at least one energy harvester element (e.g. transducer, electromagnetic energy converter, etc.) may be housed within the casing **202**. In some embodiments, the casing **202** may include switching panels **204** configured to transmit a force to the at least one energy harvester element to induce a signal. In some embodiments, the switching panels **204** may be connected along a center line **206** (e.g., hinge, joint), such that a distal edge **208** of the switching panels **204** depresses into the casing **202** while an edge adjacent to the center line **206** remains stationary relative to the casing **202**. In some embodiments, the switching panels **204** may move as independent units into or out of the casing **202** similar to a button. In other embodiments, the at least one energy harvester element may be engaged through buttons, a flexible membrane, levers, rocker arms, etc.

In some embodiments, the wireless switch **200** may include at least two energy harvester elements. The switching panels **204** may include a first distal edge **208'** and a second distal edge **208''**. The first distal edge **208'** may be coupled to a first energy harvester element and the second distal edge **208''** may be coupled to a second energy harvester element. The first distal edge **208'** and the second distal edge **208''** may be individually actuated thereby engaging the at least two energy harvester elements individually.

In some embodiments, a user interface may include a rotational input. FIGS. 3A and 3B illustrate an embodiment

of a rotating actuator **300** interfacing with an embodiment of a wireless switch **200**. In some embodiments, the rotating actuator **300** may include a rotational input **310** (e.g., cylinder, tumbler, lock cylinder, shaft, spindle, etc.). The rotational input **310** may be attached to a rocker arm **312** (e.g., plate, shelf, lever, cam plate, etc.). The rocker arm **312** may be attached to the rotational input **310** through a hardware connection (e.g., screws, bolts, rivets, brads, nails, pins, clips, etc.), an adhesive (e.g., glue, epoxy, etc.), and/or a welded connection (e.g., brazed, soldered, etc.). In some embodiments, the rocker arm **312** may be integrally formed as part of the rotational input **310**.

In some embodiments, the rocker arm **312** may be a straight member with an L-shaped cross-section where a vertical side **311** is configured to attach to the rotational input **310** and a horizontal side **313** is configured to interact with the wireless switch **200**. The rocker arm **312** may be formed from a rigid material such as metal (e.g., steel, stainless steel, brass, zinc, nickel, aluminum, etc.), hard plastic (e.g., polyvinyl chloride, high-density polyethylene, polypropylene, acrylonitrile butadiene styrene, etc.), or wood. The rocker arm **312** may have a length between about 1 in (2.54 cm) and about 4 in (10.16 cm), such as between about 2 in (5.08 cm) and about 3 in (7.62 cm). In some embodiments, the rocker arm **312** may be formed from a flat piece of material (e.g., flat stock, square stock, etc.), a cylindrical member (e.g., pipe, round stock, dowel, rod, etc.), or other forms of material.

In an initial position, illustrated in FIG. 3A, the rocker arm **312** may be substantially parallel with a bottom surface **306** of the wireless switch **200**. A bracket **314** (e.g., mount, clamp, retainer, etc.) may be configured to secure the rotating actuator **300** a distance (e.g., specified distance, height, gap) from the bottom surface **306** of the wireless switch **200**. In some embodiments, the distance between a center point of the rotating actuator **300** and the bottom surface **306** of the wireless switch may be between about 0.1 in (0.254 cm) and about 2 in (5.08 cm) such as between about 1 in (2.54 cm) and about 1.5 in (3.81 cm), or between about 1.25 in (3.175 cm) and about 1.325 in (3.37 cm). The distance may define the amount of rotation available for the rotating actuator **300** before the rocker arm **312** contacts the wireless switch **200**. The distance may allow the rotating actuator **300** to rotate through an angle from vertical of at least 10° such as, at least 20°, at least 30°, or at least 45°. In some embodiments, the bracket **314** may be configured to allow adjustment of the distance (e.g., through an adjustable mount, movable member, or slot) resulting in an adjustment of the angle of rotation available for the rotating actuator **300**.

FIG. 3B illustrates the rotating actuator **300** at a rotational end point. When the rotating actuator **300** reaches the rotational end point, as defined by the distance between the rotating actuator **300** and the bottom surface **306** of the wireless switch **200**, a distal end **318** of the rocker arm **312** may contact a distal edge **208** of the switching panel **204** of the wireless switch **200**. When the distal end **318** of the rocker arm **312** contacts the distal edge **208** of the switching panel **204** the rocker arm **312** may cause the distal edge **208** of the switching panel **204** to depress into the wireless switch **200**. As the distal edge **208** of the switching panel **204** depresses into the wireless switch **200** it may engage an energy harvester element within the wireless switch **200**. When the energy harvester element is engaged it may transmit a signal. After the rotating actuator **300** reaches the rotational end point, the rotating actuator **300** may be returned to the initial position. When the rotating actuator

**300** returns to the initial position the rocker arm **312** may release the switching panel **204**, which may in turn release the energy harvester element generating a second signal.

FIG. 4 illustrates an embodiment of the rotating actuator **300**. In some embodiments, the rotating actuator **300** may include a biasing element **420** (e.g., spring, washers, compressible fluid, magnetic biasing, resilient material, etc.) configured to bias the rotating actuator **300** to an initial position. In some embodiments, the biasing element **420** may connect the rocker arm **312** to the bracket **314**. The rocker arm **312** may include a top mount **422** configured to couple the rocker arm **312** to the biasing element **420**. The top mount **422** may include a hole **424** (e.g., notch, eyelet, ring, opening, slot) configured to couple the biasing element **420** to the rocker arm **312**. In some embodiments, the bracket **314** may also include a hole configured to couple the biasing element **420** to the bracket **314**. In some embodiments, the biasing element may be permanently attached (e.g., welded, attached with adhesive, integrally formed) to at least one of the bracket **314** and/or the rocker arm **312**.

In some embodiments, the wireless switch **200** may include a button extension **430**. The button extension **430** may be configured to provide an interface between the rocker arm **312** and the wireless switch. The button extension **430** may have a top surface **432** configured to provide a planar surface that the rocker arm **312** may contact after rotation. When the top surface **432** of the button extension **430** is contacted by the rocker arm **312** the button extension **430** may then activate the wireless switch **200** through the switching panels **204**. In some embodiments, the wireless switch **200** may include buttons (e.g., contacts, contact pads, momentary switch, etc.). The button extension **430** may provide an interface between the rocker arm **312** and the buttons on the wireless switch **200** configured to ensure the buttons are activated when the rocker arm **312** rotates and contacts the top surface **432** of the button extension **430**.

FIG. 5 illustrates an embodiment of the rotating actuator **300**. In some embodiments, the rotating actuator **300** may include at least one biasing element **520**. In some embodiments, the at least one biasing element **520** may be positioned between the distal end **318** of the rocker arm **312** and the bracket **314**. For example, the bracket **314** may include a shelf **526** configured to retain the at least one biasing element **520** on at least one end of the at least one biasing element **520** while a bottom surface **522** of the rocker arm **312** on an opposite end of the at least one biasing element **520** may be configured to retain the at least one biasing element **520** on the opposite end. In some embodiments, the at least one biasing element **520** may include at least two biasing elements **520** positioned on opposite distal ends **318** of the rocker arm **312**. In some embodiments, the at least two biasing elements **520** may be connected to the bracket **314** at a central location and extend at an angle to the distal ends **318** of the rocker arm **312**.

FIG. 6 illustrates an embodiment of a rotational input **600**. In some embodiments, the rotational input **600** may include a lock actuator **602**. For example, the rotational input **600** may be a lock cylinder. In some embodiments, the lock actuator **602** may be inserted into the rotational input **600**. An exterior portion **604** of the rotational input **600** may be configured to secure the rotational input **600** to a bracket or frame. In some embodiments, the exterior portion **604** may remain stationary relative to the bracket or frame while the lock actuator **602** rotates relative to the exterior portion **604** and/or the bracket or frame.

In some embodiments, the lock actuator **602** may include a keyed cylinder. The keyed cylinder may include a keyway

and pin tumblers configured to ensure that only specific keys may turn the lock actuator **602**. In some embodiments, the keyed cylinder may allow for the use of multiple different key cuts. For example, the keyed cylinder may allow for the use of a master key, a sub master key, and/or a specific key.

FIG. 7 illustrates an exploded view of an embodiment of a wireless transmitter assembly **700**. In some embodiments, the wireless transmitter assembly may include the rotational input **600** with the lock actuator **602**, a bracket **314** configured to secure the rotational input **600**, and a rocker arm **312** configured to convert the rotational motion of the rotational input **600** to linear motion when the rocker arm interacts with the wireless switch **200**.

In some embodiments, the bracket **314** may include an opening **702** (e.g., hole, orifice, notch, slot, or passage) that is complementary to the exterior portion **604** of the rotational input **600**. In some embodiments, a face **608** of the rotational input **600** may form a ridge **610** with a diameter greater than a dimension of the opening **702** in the bracket **314** such that the ridge **610** may rest against a front surface **704** of the bracket **314** when the rotational input **600** is inserted into the bracket **314**. In some embodiments, the exterior portion **604** may include helical threads **606** (e.g., straight threads, tapered threads, screw threads, etc.). The rotational input **600** may be secured to the bracket **314** with a fastener (e.g., nut with complementary threads, screw, bolt, wing nut, jam nut, or speed nut). In some embodiments, the bracket **314** may include complementary threads configured to allow the rotational input **600** to be threaded into the bracket **314**. In some embodiments, the exterior portion **604** of the rotational input **600** may include an annular groove (e.g., recess) configured to receive a retaining element (e.g., spring washer, spring clip, wave washer, collar, etc.) on a side of the bracket **314** opposite the front surface **704** securing a side of the rotational input **600** opposite the face **608** of the rotational input **600**. In some embodiments, the exterior portion **604** of the retaining element may include locating grooves **612** (e.g., channels, furrows, etc.). The bracket **314** may include complementary protrusions **706** (e.g., tabs) configured to interact with the locating groove **612** in the exterior portion **604** of the rotational input **600** to rotationally secure the rotational input **600** relative to the bracket **314**.

In some embodiments, the bracket **314** may include a bottom portion **708** configured to secure the wireless switch **200** relative to the rotational input **600**. The rocker arm **312** may be secured to the lock actuator **602** of the rotational input **600** such that when the lock actuator **602** rotates relative to the bracket **314** the rocker arm **312** also rotates relative to the bracket **314**. In some embodiments, the rocker arm **312** may include mounting holes **710** through which mounting hardware (e.g., screws, bolts, rivets, brads, nails, pins, clips, etc.) may be inserted to secure the rocker arm **312** to the lock actuator **602** of the rotational input **600**. In some embodiments, the rocker arm **312** may be secured to the lock actuator **602** by other methods such as, epoxy, welding, or adhesives.

When the rocker arm **312** and the lock actuator **602** rotate relative to the bracket **314** and wireless switch **200**, the rocker arm **312** may contact the distal edges **208** of the switching panels **204** as described above actuating the energy harvester elements housed within the wireless switch **200**. In some embodiments, the lock actuator **602** may provide additional security for systems where restricted access is desired or required before actuating the wireless switch **200**.

FIG. 8 illustrates an embodiment of a wireless communication system **800**. In some embodiments, the wireless communication system **800** may include a wireless transmitter **802**. The wireless transmitter **802** may transfer a signal **804**. The wireless communication system may include a wireless receiver **806** configured to receive the signal **804** from the wireless transmitter **802**. The wireless receiver **806** may communicate with an end device **808** and cause the end device **808** to perform a function responsive to the signal **804**.

In some embodiments, the signal **804** may be transmitted over radio waves. For example, the signal **804** may be transmitted over a frequency between about 1 MHz and about 100 GHz, such as between about 100 MHz and about 1 GHz, or between about 300 MHz and about 900 MHz. The signal **804** generated by the wireless transmitter **802** may be strong enough to travel a distance of at least 30 meters, such as at least 60 meters, or at least 90 meters. Therefore, the wireless receiver **806** may be positioned a distance of up to 90 meters from the wireless transmitter **802** such as a distance up to about 60 meters, or a distance up to about 30 meters.

Now referring to FIGS. 7 and 8. In some embodiments, the wireless transmitter **802** may include the components of the wireless transmitter assembly **700**. In some embodiments, the wireless transmitter assembly **700** may be configured to send different signals **804** responsive to different actions of the rotational input **600**. For example, the wireless transmitter assembly **700** may send a first signal **804** when the rocker arm **312** contacts a first distal edge **208'** of the switching panels **204**; a second signal **804** when the rocker arm **312** releases the first distal edge **208'** of the switching panels **204**; a third signal **804** when the rocker arm **312** contacts a second distal edge **208''** of the switching panels **204**; and a fourth signal **804** when the rocker arm **312** releases the second distal edge **208''** of the switching panels **204**. In some embodiments, the wireless receiver **806** may translate the different signals **804** into different commands for the end device **808**. For example, in some embodiments, the end device may be a powered door. The first signal may cause the door to begin opening; the second signal may cause the door to stop opening; the third signal may cause the door to start closing; and the fourth signal may cause the door to stop closing.

In some embodiments, there may be multiple end devices. For example, the first signal **804** may be interpreted by the wireless receiver **806** to cause a first end device to perform an operation such as opening a door, turning on a light, overriding a piece of equipment, activating an alarm system, etc. The second signal **804** may be translated by the wireless receiver **806** to determine if the wireless switch **200** returned to a neutral position. For example, the wireless receiver **806** may interpret the first signal **804** to perform an operation and then produce a notification (e.g., alarm, output, contact) to a monitoring system (e.g., fire alarm system, building automation system, security system, lighting system, etc.) if the second signal **804** is not received indicating that the switch has failed to return to the neutral position.

In some embodiments, the wireless receiver **806** may perform multiple processes responsive to each signal. For example, the wireless receiver may open a door, turn on lights and activate an HVAC system responsive to the first signal **804**. In some embodiments, the wireless receiver may perform an operation such as opening a door, turning on a light, overriding a piece of equipment, and reporting the signal **804** to a monitoring system.

The embodiments of the present disclosure may allow rotational input to activate energy-autonomous wireless switches. Rotational input may be required for retrofitting equipment using dials and knobs, adhering to aesthetic requirements of dials and/or knobs, or access restriction using keys, and/or wireless key switches. Some embodiments of the present disclosure may allow restricted access to wireless switches or transmitters for use in different systems. Many users may desire or even require restricted access to switches. For example, door switches for electronically actuated doors may need to restrict access to the switches for actuating the doors. Medical equipment may require restricted access to switches that turn the equipment on and off or engage or disengage portions of the equipment. Buildings may desire restricted access to switches for occupying a system or floor and/or turning HVAC, lights, and/or equipment on and off. Industrial plants may desire restricted access to switches for enabling or disabling equipment.

The embodiments of the disclosure described above and illustrated in the accompanying drawings do not limit the scope of the disclosure, which is encompassed by the scope of the appended claims and their legal equivalents. Any equivalent embodiments are within the scope of this disclosure. Indeed, various modifications of the disclosure, in addition to those shown and described herein, such as alternative useful combinations of the elements described, will become apparent to those skilled in the art from the description. Such modifications and embodiments also fall within the scope of the appended claims and equivalents.

What is claimed is:

1. A wireless transmitter comprising:  
a rotating actuator;  
a plate connected to the rotating actuator; and  
a wireless switch comprising at least one actuating panel configured to transmit mechanical energy to at least one transducer element configured to convert mechanical energy to electrical energy with an energy harvesting element;  
wherein the plate is configured to contact the wireless switch on rotation of the rotating actuator and the wireless switch is configured to transmit a wireless signal generated by the electrical energy.
2. The wireless transmitter of claim 1, wherein the rotating actuator further comprises a biasing element configured to return the rotating actuator to a starting position.
3. The wireless transmitter of claim 1, wherein the rotating actuator further comprises a lock actuator.
4. The wireless transmitter of claim 3, wherein the lock actuator requires a key inserted into the lock actuator before allowing the rotating actuator to rotate.
5. The wireless transmitter of claim 1, further comprising a bracket configured to mount the rotating actuator and define a specified distance between the wireless switch and the rotating actuator.
6. The wireless transmitter of claim 5, wherein the specified distance is configured to allow at least 10 degrees of rotation of the rotational engagement before the plate contacts the wireless switch.
7. The wireless transmitter of claim 5, wherein the bracket comprises an adjustable member configured to adjust the specified distance between the wireless switch and the rotational engagement.
8. The wireless transmitter of claim 1, wherein the wireless transmitter does not comprise a battery or other power source other than the at least one transducer.

9. A wireless communication system comprising:  
an energy-autonomous wireless transmitter configured to transmit a signal comprising:  
a rotating actuator;  
a plate connected to the rotating actuator; and  
a wireless switch comprising at least one actuating panel configured to transmit mechanical energy to at least one transducer element configured to convert the mechanical energy to electrical energy with an energy harvesting element and produce the signal from the electrical energy;  
wherein the plate is configured to rotate with the rotating actuator and contact the wireless switch on rotation of the rotating actuator and transmit the signal produced from the electrical energy; and  
a receiver configured to receive the signal and perform an operation based on the signal.

10. The wireless communication system of claim 9, wherein the energy-autonomous wireless transmitter is configured to transmit the signal between 100 MHz and 1 GHz.

11. The wireless communication system of claim 9, wherein the signal is configured to travel a distance of at least 30 meters.

12. The wireless communication system of claim 9, wherein the wireless switch comprises at least two transducer elements.

13. The wireless communication system of claim 12, wherein the at least one actuating panel is configured to transmit the mechanical energy to the at least two transducer elements individually and the energy-autonomous wireless transmitter is configured to transmit a different signal depending upon which of the at least two transducer elements receive the mechanical energy from the at least one actuating panel.

14. The wireless communication system of claim 13, wherein the receiver is configured to perform different operations depending upon which signal is received from the energy-autonomous wireless transmitter.

15. A method of transmitting a wireless signal, comprising:

- rotating a rotating actuator attached to a plate;
- contacting a wireless switch with the plate on rotation of the rotating actuator;
- inputting mechanical energy to the wireless switch through the contact between the wireless switch and the plate;
- converting the mechanical energy into electrical energy with an energy harvesting element; and
- transmitting a signal with the electrical energy.

16. The method of transmitting a wireless signal of claim 15, further comprising defining the rotational range of the rotating actuator with a mounting bracket configured to define a distance between the rotating actuator and the wireless switch.

17. The method of transmitting a wireless signal of claim 15, further comprising returning the rotating actuator to an initial position after rotating the rotating actuator.

18. The method of transmitting a wireless signal of claim 17, wherein returning the rotating actuator to the initial position comprises engaging the rotating actuator with a biasing element.

19. The method of transmitting a wireless signal of claim 17 comprising:  
releasing the contact between the wireless switch and the plate;

11

inputting a second mechanical energy through the release  
of the contact between the wireless switch and the  
plate;  
converting the second mechanical energy into a second  
electrical energy; and  
transmitting a second signal with the second electrical  
energy.

5

\* \* \* \* \*

12