



(12) **United States Patent**
Clark et al.

(10) **Patent No.:** **US 9,853,019 B2**
(45) **Date of Patent:** **Dec. 26, 2017**

(54) **INTEGRATED CIRCUIT DEVICE BODY
BIAS CIRCUITS AND METHODS**

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,958,266 A 5/1976 Athanas
4,000,504 A 12/1976 Berger
(Continued)

FOREIGN PATENT DOCUMENTS

EP 0274278 7/1988
JP 59193066 1/1984
(Continued)

OTHER PUBLICATIONS

Tschanz et al., "Adaptive Body Bias for Reducing Impacts of Die-to-Die and Within-Die Parameter Variations on Microprocessor Frequency and Leakage," IEEE Journal of Solid-State Circuits, vol. 37, No. 11, Nov. 2002.

(Continued)

Primary Examiner — Thomas J Hiltunen

(74) *Attorney, Agent, or Firm* — Baker Botts L.L.P.

(57) **ABSTRACT**

A system having an integrated circuit (IC) device can include a die formed on a semiconductor substrate and having a plurality of first wells formed therein, the first wells being doped to at least a first conductivity type; a global network configured to supply a first global body bias voltage to the first wells; and a first bias circuit corresponding to each first well and configured to generate a first local body bias for its well having a smaller setting voltage than the first global body bias voltage; wherein at least one of the first wells is coupled to a transistor having a strong body coefficient formed therein, which transistor may be a transistor having a highly doped region formed below a substantially undoped channel, the highly doped region having a dopant concentration greater than that the corresponding well.

3 Claims, 14 Drawing Sheets

(71) Applicant: **Mie Fujitsu Semiconductor Limited,**
Kuwana, MIE (JP)

(72) Inventors: **Lawrence T. Clark**, Phoenix, AZ (US);
David A. Kidd, San Jose, CA (US);
Augustine Kuo, Berkeley, CA (US)

(73) Assignee: **Mie Fujitsu Semiconductor Limited,**
Kuwana (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/337,876**

(22) Filed: **Oct. 28, 2016**

(65) **Prior Publication Data**

US 2017/0047100 A1 Feb. 16, 2017



Related U.S. Application Data

(63) Continuation of application No. 14/799,715, filed on Jul. 15, 2015, now Pat. No. 9,548,086, which is a
(Continued)

(51) **Int. Cl.**
H03K 17/06 (2006.01)
H01L 27/02 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01L 27/0222** (2013.01); **G05F 3/205**
(2013.01); **G06F 17/5045** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC G11C 5/146; H02M 2003/078; H02M
2003/076; H03K 2217/0018
See application file for complete search history.

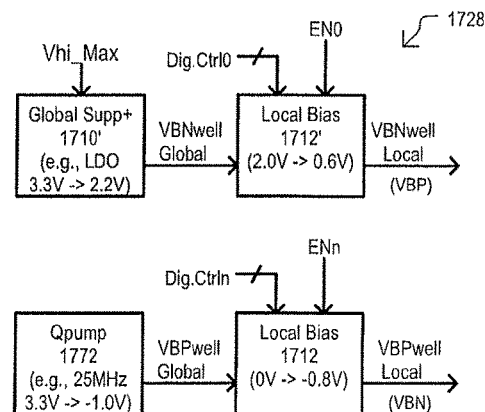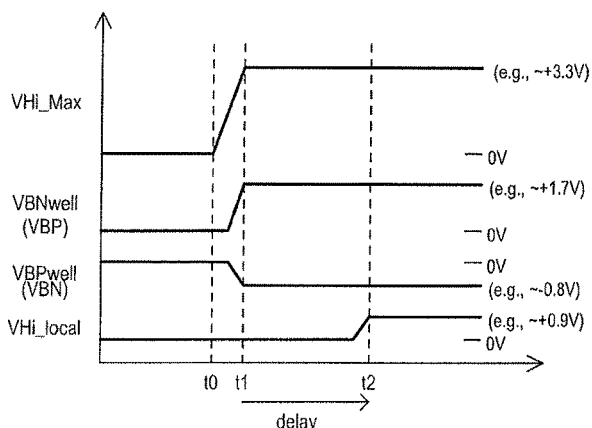

Related U.S. Application Data

continuation of application No. 13/838,221, filed on
Mar. 15, 2013, now Pat. No. 9,112,495.

(51) Int. Cl.

G11C 5/14 (2006.01)

H03K 3/012 (2006.01)

G06F 17/50 (2006.01)

G05F 3/20 (2006.01)

H01L 27/092 (2006.01)

G11C 5/02 (2006.01)

H02M 3/07 (2006.01)

(52) U.S. Cl.

CPC **G11C 5/025** (2013.01); **G11C 5/146**
(2013.01); **G11C 5/147** (2013.01); **G11C 5/148**
(2013.01); **H01L 27/0928** (2013.01); **H03K**
3/012 (2013.01); **H03K 17/063** (2013.01);
H02M 2003/076 (2013.01); **H02M 2003/078**
(2013.01); **H03K 2217/0018** (2013.01)

(56) References Cited**U.S. PATENT DOCUMENTS**

4,021,835 A 5/1977 Etoh et al.
4,208,728 A 6/1980 Blahut et al.
4,242,691 A 12/1980 Kotani
4,276,095 A 6/1981 Beilstein, Jr. et al.
4,315,781 A 2/1982 Henderson
4,578,128 A 3/1986 Mundt et al.
4,617,066 A 10/1986 Vasudev
4,761,384 A 8/1988 Nepl et al.
4,819,043 A 4/1989 Yazawa et al.
5,034,337 A 7/1991 Mosher et al.
5,144,378 A 9/1992 Hikosaka
5,156,989 A 10/1992 Williams et al.
5,156,990 A 10/1992 Mitchell
5,166,765 A 11/1992 Lee et al.
5,208,473 A 5/1993 Komori et al.
5,298,763 A 3/1994 Shen et al.
5,369,288 A 11/1994 Usuki
5,384,476 A 1/1995 Nishizawa et al.
5,461,338 A 10/1995 Hirayama et al.
5,557,231 A * 9/1996 Yamaguchi G11C 5/146
257/E27.081

5,559,368 A 9/1996 Hu et al.
5,608,253 A 3/1997 Liu et al.
5,663,583 A 9/1997 Matloubian et al.
5,712,501 A 1/1998 Davies et al.
5,719,422 A 2/1998 Burr et al.
5,726,488 A 3/1998 Watanabe
5,763,921 A 6/1998 Okumura et al.
5,780,899 A 7/1998 Hu et al.
5,847,419 A 12/1998 Imai et al.
5,856,003 A 1/1999 Chiu
5,861,334 A 1/1999 Rho
5,877,049 A 3/1999 Liu
5,889,315 A 3/1999 Farrenkopf et al.
5,895,954 A 4/1999 Yasumura et al.
5,923,987 A 7/1999 Burr
5,926,703 A 7/1999 Yamaguchi et al.
5,989,963 A 11/1999 Luning et al.
6,020,227 A 2/2000 Bulucea
6,046,627 A * 4/2000 Itoh G11C 5/146
257/E27.062

6,087,210 A 7/2000 Sohn
6,087,691 A 7/2000 Hamamoto
6,096,611 A 8/2000 Wu
6,103,562 A 8/2000 Son et al.
6,121,153 A 9/2000 Kikkawa
6,140,839 A 10/2000 Kaviani et al.
6,147,383 A 11/2000 Kuroda
6,157,073 A 12/2000 Lehongres
6,175,582 B1 1/2001 Naito et al.

6,184,112 B1 2/2001 Maszara et al.
6,190,979 B1 2/2001 Radens et al.
6,194,259 B1 2/2001 Nayak et al.
6,218,895 B1 4/2001 De et al.
6,229,188 B1 5/2001 Aoki et al.
6,245,618 B1 6/2001 An et al.
6,288,429 B1 9/2001 Iwata et al.
6,300,177 B1 10/2001 Sundaresan et al.
6,301,184 B1 * 10/2001 Sasaki G11C 7/1045
365/226

6,313,489 B1 11/2001 Letavic et al.
6,320,222 B1 11/2001 Forbes et al.
6,326,666 B1 12/2001 Bernstein et al.
6,358,806 B1 3/2002 Puchner
6,380,019 B1 4/2002 Yu
6,391,752 B1 5/2002 Colinge et al.
6,426,279 B1 7/2002 Huster et al.
6,444,550 B1 9/2002 Hao et al.
6,444,551 B1 9/2002 Ku
6,461,920 B1 10/2002 Shirahata
6,461,928 B2 10/2002 Rodder
6,472,278 B1 10/2002 Marshall et al.
6,482,714 B1 11/2002 Hieda et al.
6,484,252 B1 11/2002 Watanabe
6,489,224 B1 12/2002 Burr
6,492,232 B1 12/2002 Tang et al.
6,500,739 B1 12/2002 Wang et al.
6,503,801 B1 1/2003 Rouse et al.
6,506,640 B1 1/2003 Ishida et al.
6,518,623 B1 2/2003 Oda et al.
6,534,373 B1 3/2003 Yu
6,541,829 B2 4/2003 Nishinohara et al.
6,548,842 B1 4/2003 Bulucea et al.
6,551,885 B1 4/2003 Yu
6,573,129 B2 6/2003 Hoke et al.
6,600,200 B1 7/2003 Lustig et al.
6,620,671 B1 9/2003 Wang et al.
6,624,488 B1 9/2003 Kim
6,630,710 B1 10/2003 Augusto
6,630,857 B2 * 10/2003 Mizuno H03K 19/0016
327/391

6,660,605 B1 12/2003 Liu
6,667,200 B2 12/2003 Sohn et al.
6,670,260 B1 12/2003 Yu et al.
6,693,333 B1 2/2004 Yu
6,730,568 B2 5/2004 Sohn
6,737,724 B2 5/2004 Hieda et al.
6,743,291 B2 6/2004 Ang et al.
6,753,230 B2 6/2004 Sohn et al.
6,770,944 B2 8/2004 Nishinohara et al.
6,787,424 B1 9/2004 Yu
6,788,130 B2 * 9/2004 Pauletti H02M 3/073
327/536

6,797,994 B1 9/2004 Hoke et al.
6,808,994 B1 10/2004 Wang
6,821,825 B2 11/2004 Todd et al.
6,822,297 B2 11/2004 Nandakumar et al.
6,831,292 B2 12/2004 Currie et al.
6,881,641 B2 4/2005 Wieczorek et al.
6,881,987 B2 4/2005 Sohn
6,893,947 B2 5/2005 Martinez et al.
6,916,698 B2 7/2005 Mocuta et al.
6,930,007 B2 8/2005 Bu et al.
6,930,360 B2 8/2005 Yamauchi et al.
6,963,090 B2 11/2005 Passlack et al.
7,002,214 B1 2/2006 Boyd et al.
7,008,836 B2 3/2006 Algotsson et al.
7,013,359 B1 3/2006 Li
7,015,546 B2 3/2006 Herr et al.
7,057,216 B2 6/2006 Ouyang et al.
7,061,058 B2 6/2006 Chakravarthi et al.
7,064,039 B2 6/2006 Liu
7,064,399 B2 6/2006 Babcock et al.
7,071,103 B2 7/2006 Chan et al.
7,078,325 B2 7/2006 Curello et al.
7,078,776 B2 7/2006 Nishinohara et al.
7,089,515 B2 8/2006 Hanafi et al.
7,106,128 B2 9/2006 Tschanz et al.
7,119,381 B2 10/2006 Passlack et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

7,138,851 B2	11/2006	Sumita	7,723,750 B2	5/2010	Zhu
7,164,307 B2	1/2007	Tschanz et al.	7,750,405 B2	7/2010	Nowak
7,170,120 B2	1/2007	Datta et al.	7,750,670 B2	7/2010	Goodnow et al.
7,176,745 B2	2/2007	Itoh et al.	7,750,682 B2	7/2010	Bernstein et al.
7,186,598 B2	3/2007	Yamauchi et al.	7,755,146 B2	7/2010	Helm et al.
7,189,627 B2	3/2007	Wu et al.	7,759,714 B2	7/2010	Itoh et al.
7,199,430 B2	4/2007	Babcock et al.	7,795,677 B2	9/2010	Bangsaruntip et al.
7,202,517 B2	4/2007	Dixit et al.	7,800,404 B2	9/2010	Verma et al.
7,211,871 B2	5/2007	Cho	7,812,662 B2 *	10/2010	Lundberg G05F 3/205 327/534
7,221,021 B2	5/2007	Wu et al.	7,818,702 B2	10/2010	Mandelman et al.
7,223,646 B2	5/2007	Miyashita et al.	7,829,402 B2	11/2010	Matocha et al.
7,226,833 B2	6/2007	White et al.	7,867,835 B2	1/2011	Lee et al.
7,226,843 B2	6/2007	Weber et al.	7,883,977 B2	2/2011	Babcock et al.
7,235,822 B2	6/2007	Li	7,888,747 B2	2/2011	Hokazono et al.
7,236,045 B2	6/2007	Tschanz et al.	7,897,495 B2	3/2011	Ye et al.
7,247,896 B2	7/2007	Oh et al.	7,906,413 B2	3/2011	Cardone et al.
7,294,877 B2	11/2007	Rueckes et al.	7,906,813 B2	3/2011	Kato et al.
7,297,994 B2	11/2007	Wieczorek et al.	7,919,791 B2	4/2011	Flynn et al.
7,301,208 B2	11/2007	Handa et al.	7,948,008 B2	5/2011	Liu et al.
7,304,350 B2	12/2007	Misaki	7,952,147 B2	5/2011	Ueno et al.
7,312,500 B2	12/2007	Miyashita et al.	7,960,232 B2	6/2011	King et al.
7,323,754 B2	1/2008	Ema et al.	7,960,238 B2	6/2011	Kohli et al.
7,330,049 B2 *	2/2008	Perisetty H01L 27/0921 257/E27.063	7,968,400 B2	6/2011	Cai
7,332,439 B2	2/2008	Lindert et al.	7,968,411 B2	6/2011	Williford
7,348,629 B2	3/2008	Chu et al.	7,978,001 B2 *	7/2011	Bertram H03K 19/0013 327/534
7,354,833 B2	4/2008	Liaw	8,004,024 B2	8/2011	Furukawa et al.
7,355,437 B2 *	4/2008	Perisetty H03K 19/00315 326/14	8,012,827 B2	9/2011	Yu et al.
7,427,788 B2	9/2008	Li et al.	8,039,332 B2	10/2011	Bernard et al.
7,442,971 B2	10/2008	Wirbeleit et al.	8,048,791 B2	11/2011	Hargrove et al.
7,443,641 B2	10/2008	Suzuki	8,048,810 B2	11/2011	Tsai et al.
7,462,908 B2	12/2008	Bol et al.	8,067,279 B2	11/2011	Sadra et al.
7,485,536 B2	2/2009	Jin et al.	8,105,891 B2	1/2012	Yeh et al.
7,491,988 B2	2/2009	Tolchinsky et al.	8,106,424 B2	1/2012	Schruefer
7,494,861 B2	2/2009	Chu et al.	8,106,481 B2	1/2012	Rao
7,498,637 B2	3/2009	Yamaoka et al.	8,112,551 B2	2/2012	Sullam et al.
7,501,324 B2	3/2009	Babcock	8,119,482 B2	2/2012	Bhalla et al.
7,501,849 B2 *	3/2009	Perisetty H03K 19/00315 326/15	8,120,069 B2	2/2012	Hyncecek
7,507,999 B2	3/2009	Kusumoto et al.	8,129,246 B2	3/2012	Babcock et al.
7,510,932 B2	3/2009	Oh et al.	8,129,797 B2	3/2012	Chen et al.
7,514,953 B2	4/2009	Perisetty	8,134,159 B2	3/2012	Hokazono
7,521,323 B2	4/2009	Surdeanu	8,143,120 B2	3/2012	Kerr et al.
7,531,393 B2	5/2009	Doyle	8,143,124 B2	3/2012	Challa
7,538,412 B2	5/2009	Schulze	8,143,678 B2	3/2012	Kim
7,555,667 B1	6/2009	Burney	8,148,774 B2	4/2012	Mori et al.
7,564,105 B2	7/2009	Chi	8,163,619 B2	4/2012	Yang et al.
7,592,241 B2	9/2009	Takao	8,173,502 B2	5/2012	Yan et al.
7,592,832 B2 *	9/2009	Perisetty H03K 19/0013 326/37	8,178,430 B2	5/2012	Kim et al.
7,598,142 B2	10/2009	Ranade	8,183,096 B2	5/2012	Wirbeleit
7,605,041 B2	10/2009	Ema	8,183,107 B2	5/2012	Mathur et al.
7,605,060 B2	10/2009	Meunier-Beillard et al.	8,217,427 B2	7/2012	Chuang et al.
7,605,429 B2	10/2009	Bernstein et al.	8,236,661 B2	8/2012	Dennard et al.
7,608,496 B2	10/2009	Chu	8,970,289 B1	3/2015	Lee
7,615,802 B2	11/2009	Elpelt et al.	9,112,495 B1 *	8/2015	Clark H03K 17/063
7,622,341 B2	11/2009	Chudzik et al.	9,251,866 B2 *	2/2016	Chun G11C 5/146
7,639,041 B1 *	12/2009	Perisetty H03K 19/0016 326/38	9,431,068 B2 *	8/2016	Clark G11C 5/146
7,642,140 B2	1/2010	Bae et al.	2001/0014495 A1	8/2001	Yu
7,645,665 B2	1/2010	Kubo et al.	2003/0122203 A1	7/2003	Nishinohara et al.
7,651,920 B2	1/2010	Siprak	2003/0183856 A1	10/2003	Wieczorek et al.
7,655,523 B2	2/2010	Babcock et al.	2004/0075118 A1	4/2004	Heinemann et al.
7,667,527 B2	2/2010	Clark et al.	2004/0084731 A1	5/2004	Matsuda et al.
7,675,126 B2	3/2010	Cho	2004/0263205 A1	12/2004	Park
7,675,317 B2	3/2010	Perisetty	2005/0097196 A1	5/2005	Wronski et al.
7,678,638 B2	3/2010	Chu et al.	2005/0116282 A1	6/2005	Pattanayak
7,681,628 B2	3/2010	Joshi et al.	2005/0250289 A1	11/2005	Babcock et al.
7,682,887 B2	3/2010	Dokumaci et al.	2006/0022270 A1	2/2006	Boyd et al.
7,683,442 B1	3/2010	Burr et al.	2006/0049464 A1	3/2006	Rao
7,696,000 B2	4/2010	Liu et al.	2006/0066388 A1	3/2006	Tschanz et al.
7,704,844 B2	4/2010	Zhu et al.	2006/0068555 A1	3/2006	Zhu et al.
7,709,828 B2	5/2010	Braithwaite et al.	2006/0068586 A1	3/2006	Pain
			2006/0071278 A1	4/2006	Takao
			2006/0154428 A1	7/2006	Dokumaci
			2007/0004107 A1	1/2007	Lee et al.
			2007/0040222 A1	2/2007	Van Camp et al.
			2007/0158790 A1	7/2007	Rao
			2007/0238253 A1	10/2007	Tucker
			2008/0001171 A1	1/2008	Tezuka et al.
			2008/0067589 A1	3/2008	Ito et al.

(56)

References Cited**U.S. PATENT DOCUMENTS**

2008/0143423	A1	6/2008	Komatsu et al.
2008/0169493	A1	7/2008	Lee et al.
2008/0197439	A1	8/2008	Goerlach et al.
2008/0227250	A1	9/2008	Ranade et al.
2008/0246533	A1	10/2008	Barrows et al.
2008/0258198	A1	10/2008	Bojarczuk et al.
2008/0272409	A1	11/2008	Sonkusale et al.
2009/0057746	A1	3/2009	Sugli et al.
2009/0108350	A1	4/2009	Cai et al.
2009/0134468	A1	5/2009	Tsuchiya
2009/0179692	A1	7/2009	Hidaka
2009/0302388	A1	12/2009	Cai
2009/0311837	A1	12/2009	Kapoor
2009/0321849	A1	12/2009	Miyamura et al.
2010/0012988	A1	1/2010	Yang et al.
2010/0038724	A1	2/2010	Anderson et al.
2010/0055886	A1	3/2010	Izumida et al.
2010/0073073	A1	3/2010	Bertram
2010/0187641	A1	7/2010	Zhu et al.
2011/0073961	A1	3/2011	Dennard et al.
2011/0074498	A1	3/2011	Thompson
2011/0079860	A1	4/2011	Verhulst et al.
2011/0079861	A1	4/2011	Shifren et al.
2011/0169082	A1	7/2011	Zhu et al.
2011/0175170	A1	7/2011	Wang et al.
2011/0180880	A1	7/2011	Chudzik et al.
2011/0193164	A1	8/2011	Zhu
2012/0021594	A1	1/2012	Gurtej et al.
2012/0056275	A1	3/2012	Cai et al.
2012/0108050	A1	5/2012	Chen et al.
2012/0190177	A1	7/2012	Kim et al.
2014/0119099	A1	5/2014	Clark
2014/0307513	A1*	10/2014	Chun G11C 5/146 365/189.09
2015/0318026	A1	11/2015	Clark

FOREIGN PATENT DOCUMENTS

JP	4186774	3/1992
JP	8288508	1/1996
JP	8153873	6/1996
JP	2004087671	3/2004
KR	1020040024599	10/2005
WO	2011062788	5/2011

OTHER PUBLICATIONS

Werner, P. et al., "Carbon Diffusion in Silicon," Applied Physics Letters, vol. 73, No. 17, pp. 2465-2467, Oct. 1998.

Yan, Ran-Hong et al., "Scaling the Si MOSFET: From Bulk to SOI to Bulk," IEEE Transactions on Electron Devices, vol. 39, No. 7, Jul. 1992.

Abiko, H. et al., "A Channel Engineering Combined with Channel Epitaxy Optimization and RED Suppression for 0.15 μ m n-n Gate

CMOS Technology," 1995 Symposium on VLSI Technology Digest of Technical Papers, pp. 23-24, 1995.

Chau, R. et al., "A 50nm Depleted-Substrate CMOS Transistor (DST)," Electron Device Meeting 2001, IEDM Technical Digest, IEEE International, pp. 29.1.1-29.1.4, 2001.

Ducroquet, F. et al., "Fully Depleted Silicon-On Insulator nMOSFETs with Tensile Strained High Carbon Content Sil-yCy Channel", ECS 210th Meeting, Abstract 1033, 2006.

English Translation of JP 815383, 1996.

Ernst, T. et al., "Nanoscaled MOSFET Transistors on Strained Si, SiGe, Ge Layers: Some Integration and Electrical Properties Features", ECS Trans. 2006, vol. 3, Issue 7, pp. 947-961, 2006.

Goessele, U. et al., "Diffusion Engineering by Carbon in Silicon", Mat. Res. Soc. Symp. vol. 610, pp. 1-12, 2000.

Hokazono, A. et al., "Steep Channel & Halo Profiles Utilizing Boron-Diffusion-Barrier Layers (Si:C) for 32 nm Node and Beyond", 2008 Symposium on VLSI Technology Digest of Technical Papers, pp. 112-113, 2008.

Hokazono, A. et al., "Steep Channel Profiles in n/pMOS Controlled by Boron-Doped Si:C Layers for Continual Bulk-CMOS Scaling", IEDM09-676 Symposium, pp. 29.1.1-29.1.4, 2009.

Holland, OW and Thomas, DK "A Method to Improve Activation of Implanted Dopants in SiC", Oak Ridge National Laboratory, Oak Ridge, TN, pp. 1-9, 2001.

Kotaki, H., et al., "Novel Bulk Dynamic Threshold Voltage MOSFET (B-DTMOS) with Advanced Isolation (SITOS) and Gate to Shallow-Well Contact (SSS-C) Processes for Ultra Low Power Dual Gate CMOS", IEDM 96, pp. 459-462, 1996.

Lav  ant, P. "Incorporation, Diffusion and Agglomeration of Carbon in Silicon", Solid State Phenomena, vols. 82-84, pp. 189-194, 2002.

Noda, K. et al., "A 0.1- μ m Delta-Doped MOSFET Fabricated with Post-Low-Energy Implanting Selective Epitaxy" IEEE Transactions on Electron Devices, vol. 45, No. 4, pp. 809-814, Apr. 1998.

Ohguro, T. et al., "An 0.18- μ m CMOS for Mixed Digital and Analog Applications with Zero-Volt-Vth Epitaxial-Channel MOSFET's", IEEE Transactions on Electron Devices, vol. 46, No. 7, pp. 1378-1383, Jul. 1999.

Pinacho, R. et al., "Carbon in Silicon: Modeling of Diffusion and Clustering Mechanisms", Journal of Applied Physics, vol. 92, No. 3, pp. 1582-1588, Aug. 2002.

Robertson, LS et al., "The Effect of Impurities on Diffusion and Activation of Ion Implanted Boron in Silicon", Mat. Res. Soc. Symp. vol. 610, 2000.

Scholz, R. et al., "Carbon-Induced Undersaturation of Silicon Self-Interstitials", Appl. Phys. Lett. 72(2), pp. 200-202, Jan. 1998.

Scholz, RF et al., "The Contribution of Vacancies to Carbon Out-Diffusion in Silicon", Appl. Phys. Lett., vol. 74, No. 3, pp. 392-394, Jan. 1999.

Stolk, PA et al., "Physical Mechanisms of Transient Enhanced Dopant Diffusion in Ion-Implanted Silicon", J. Appl. Phys. 81(9), pp. 6031-6050, May 1997.

Thompson, S. et al., "MOS Scaling: Transistor Challenges for the 21st Century", Intel Technology Journal Q3' 1998, pp. 1-19, 1998.

Wann, C., et al., "Channel Profile Optimization and Devices Design for Low-Power High-Performance Dynamic Threshold MOSFET", IEDM 96, pp. 113-116.

* cited by examiner

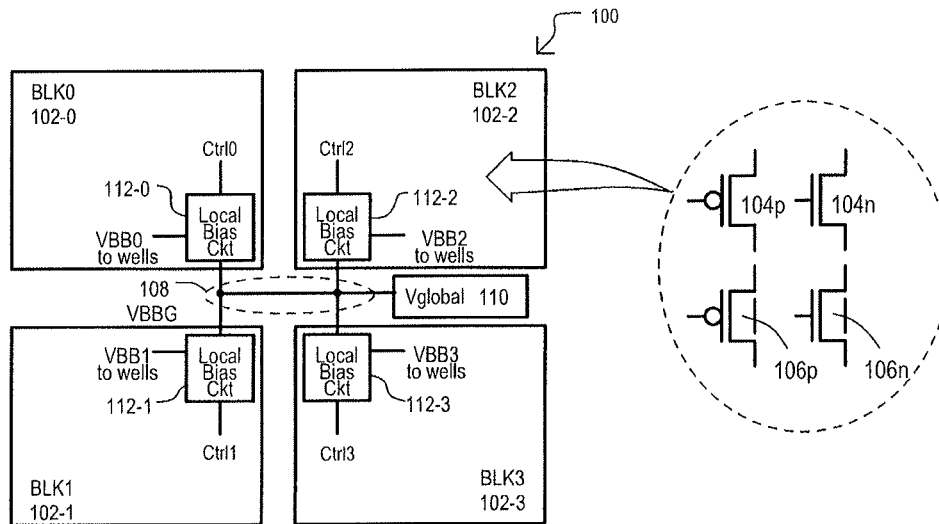


FIG. 1




FIG. 2A

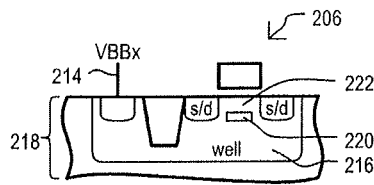


FIG. 2B

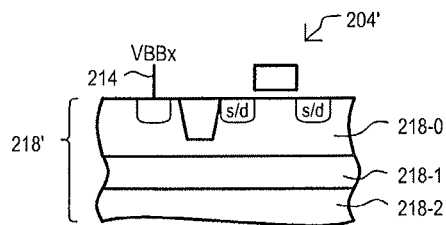


FIG. 2C

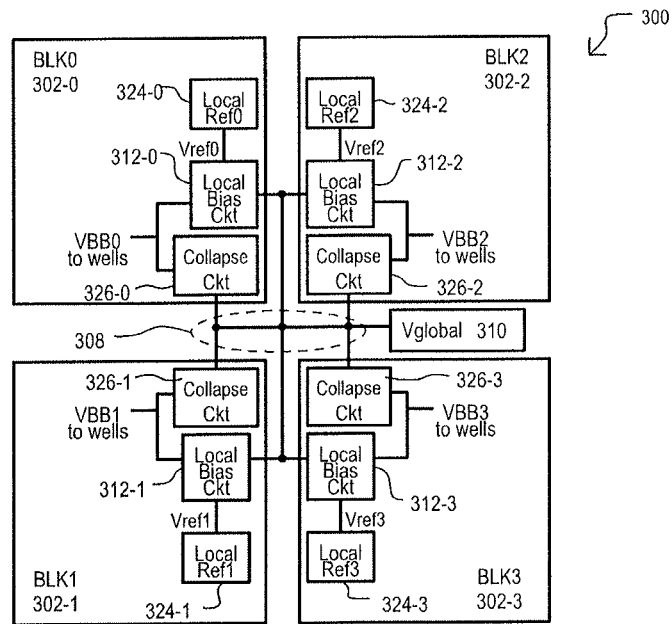


FIG. 3

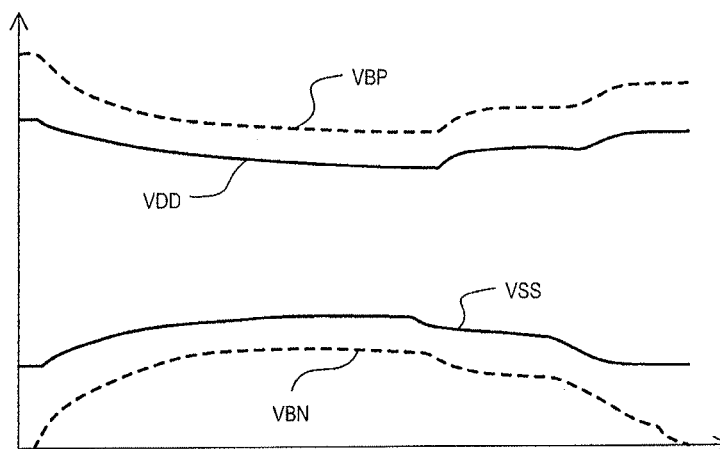


FIG. 4

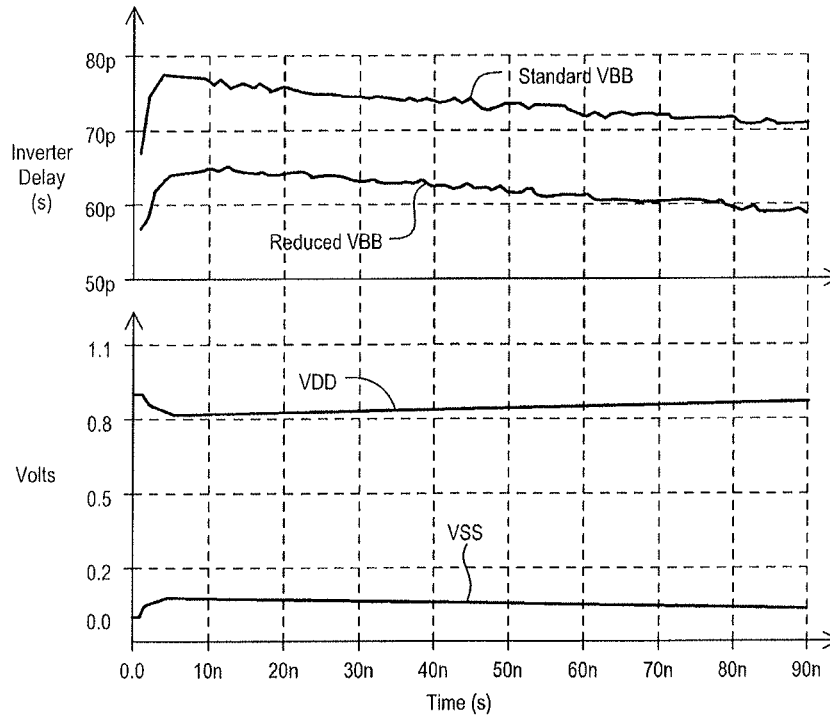


FIG. 5

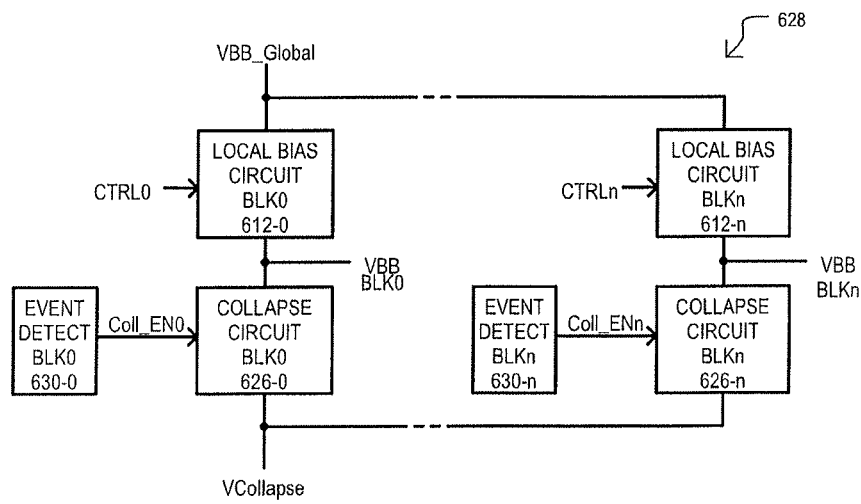


FIG. 6

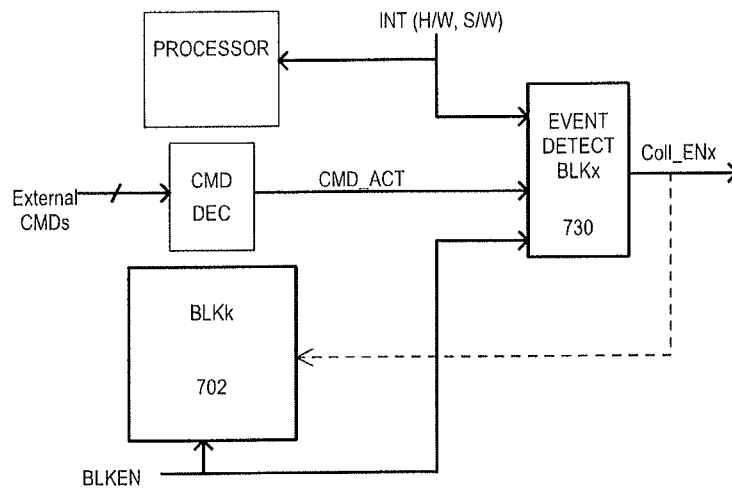


FIG. 7

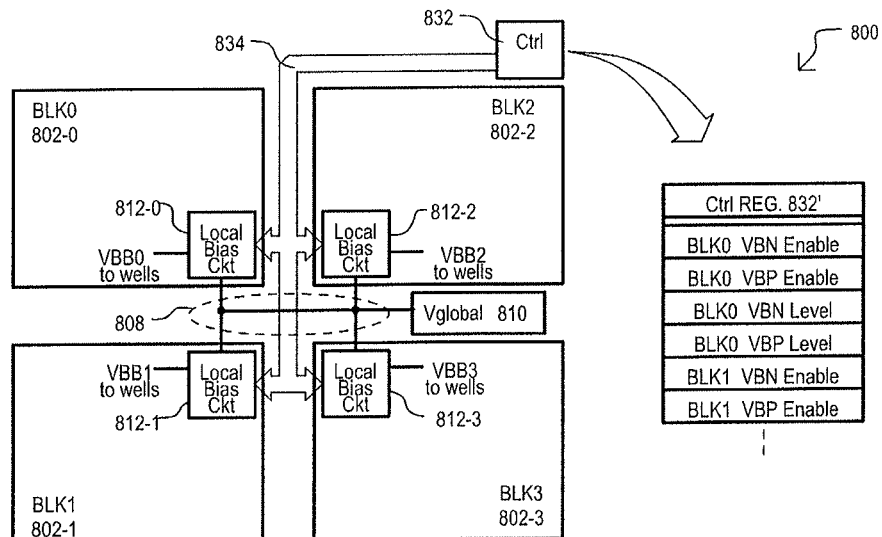


FIG. 8

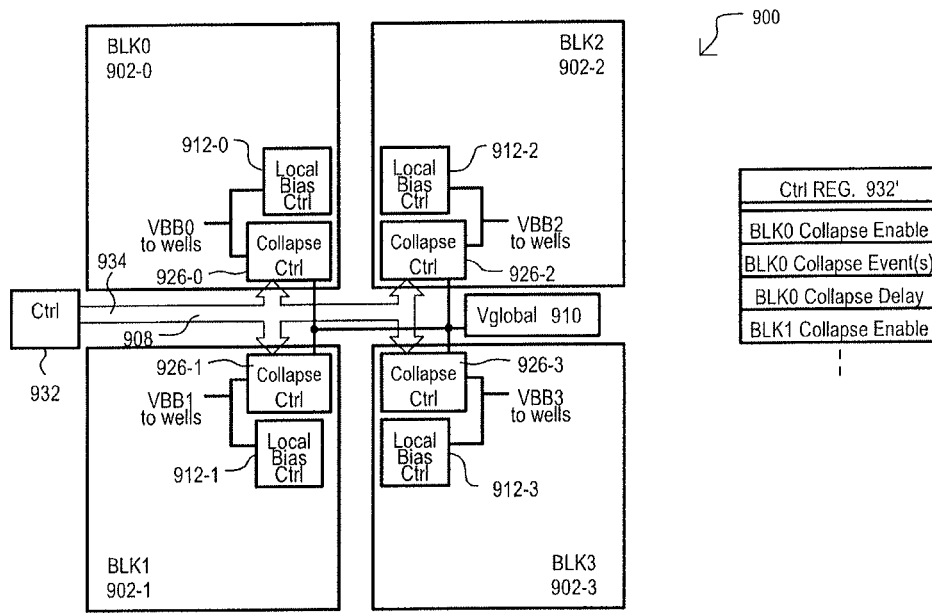


FIG. 9

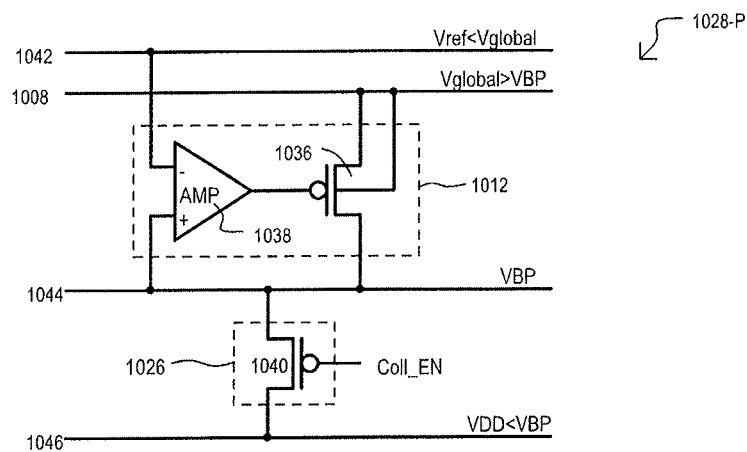


FIG. 10A

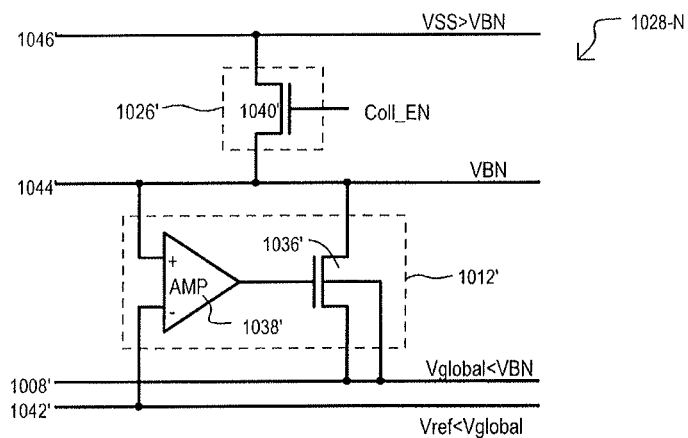


FIG. 10B

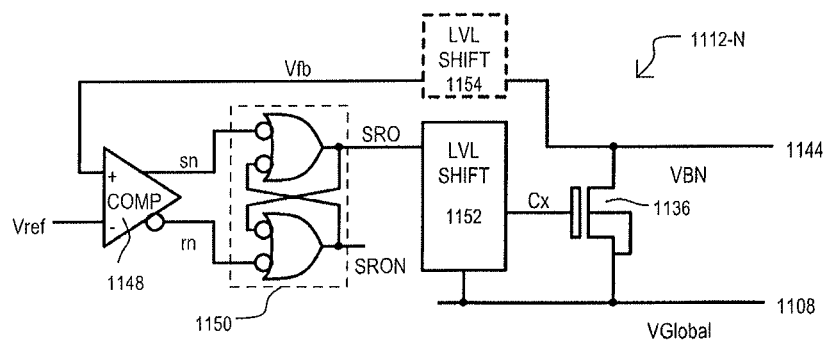


FIG. 11A

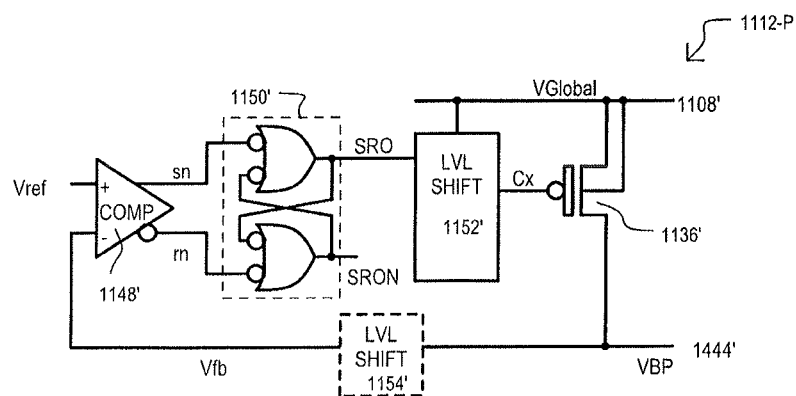


FIG. 11B

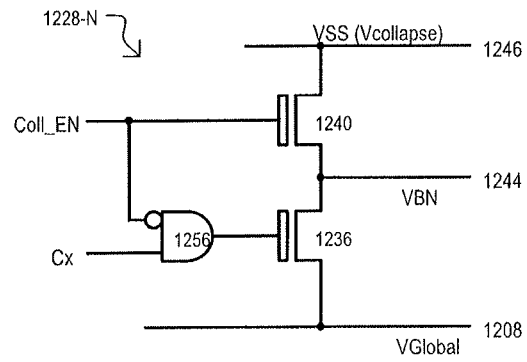


FIG. 12A

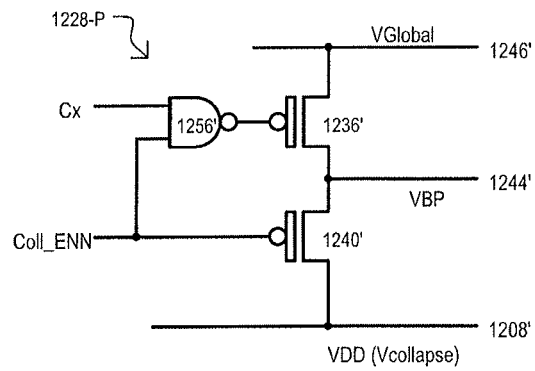


FIG. 12B

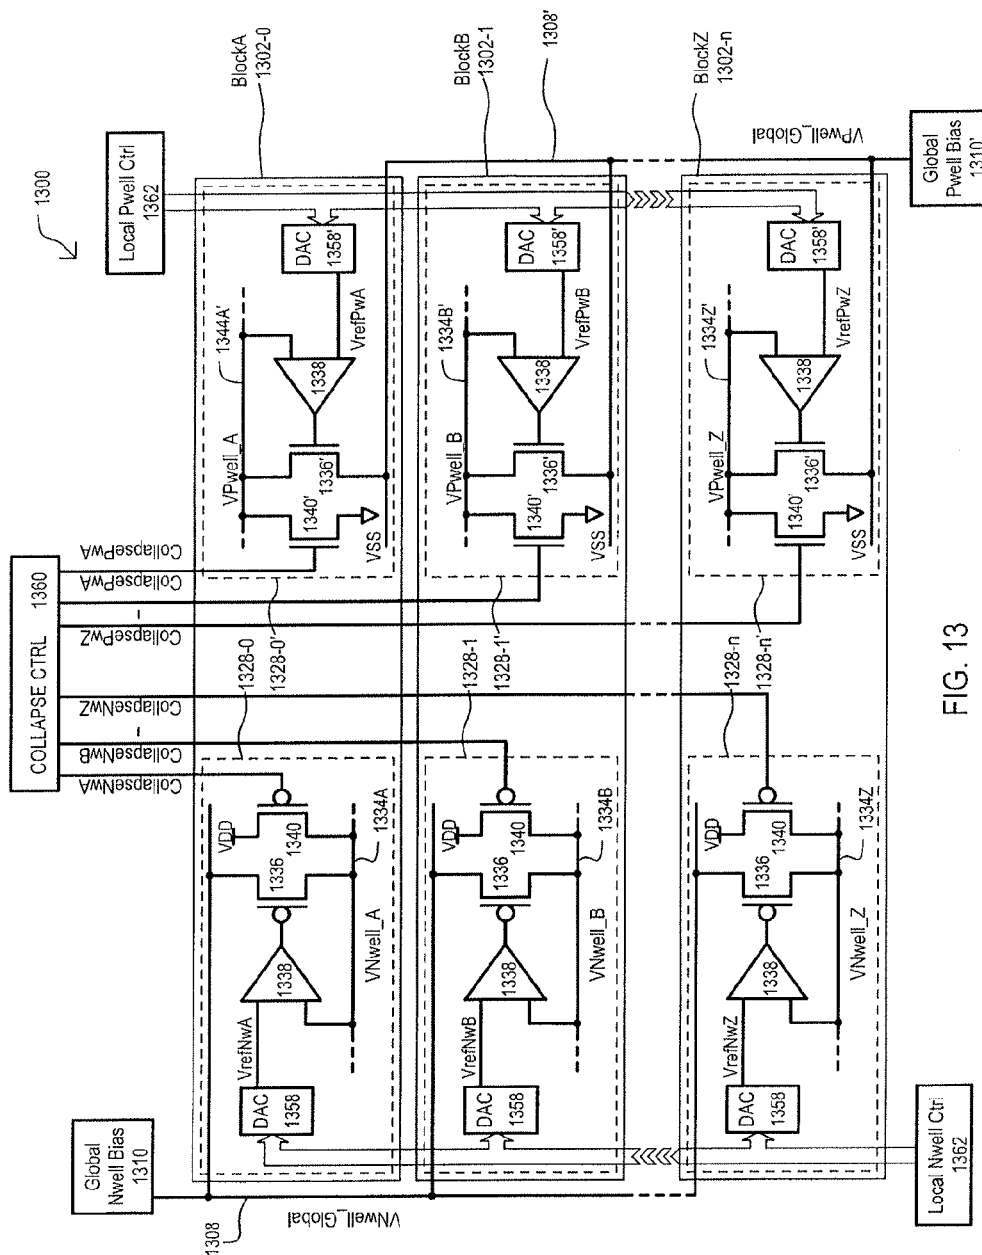


FIG. 13

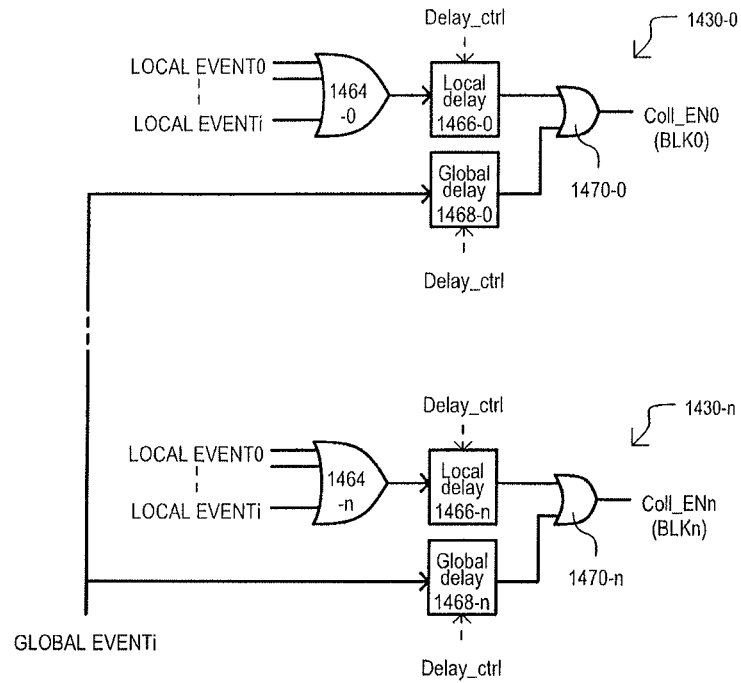


FIG. 14

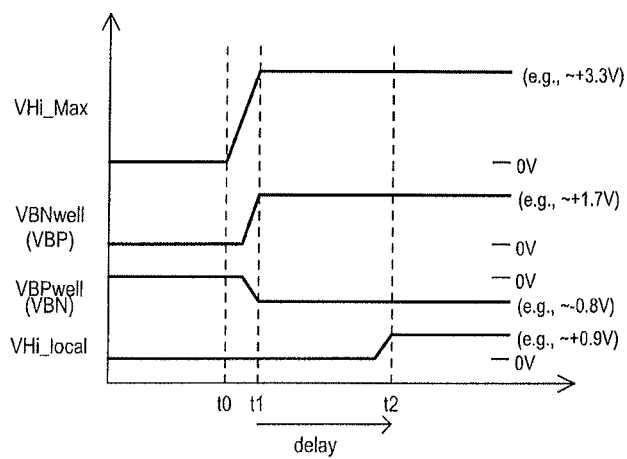


FIG. 15

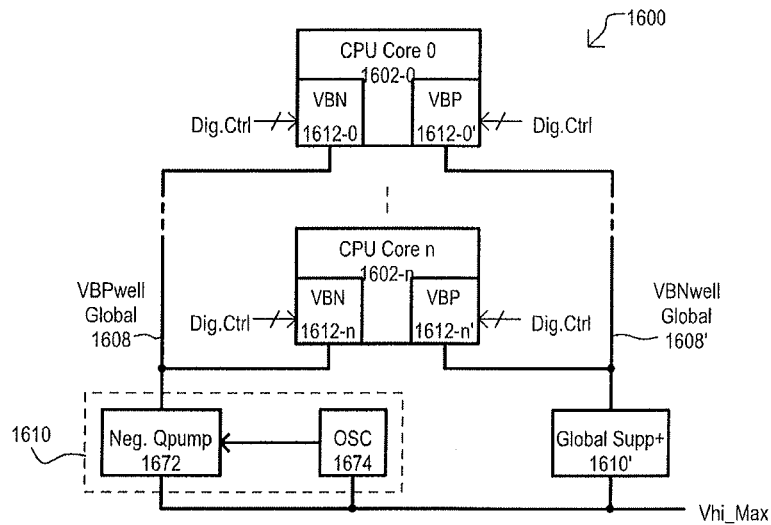


FIG. 16

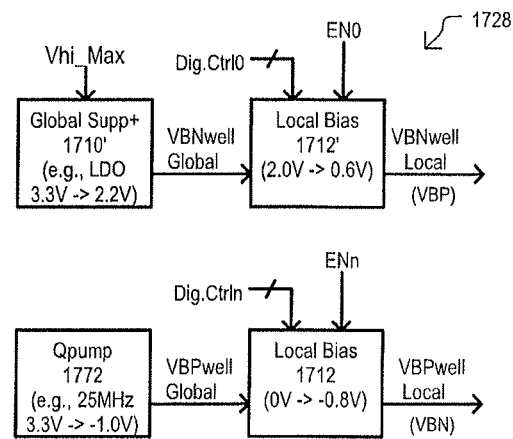


FIG. 17

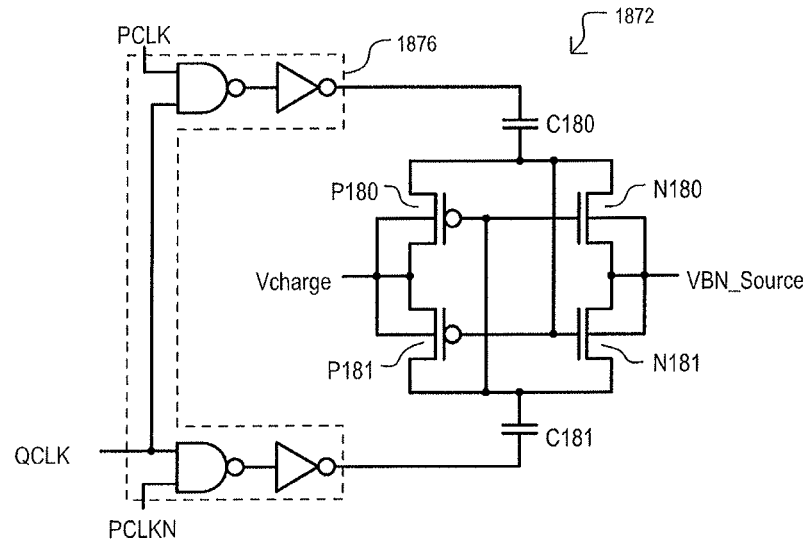


FIG. 18

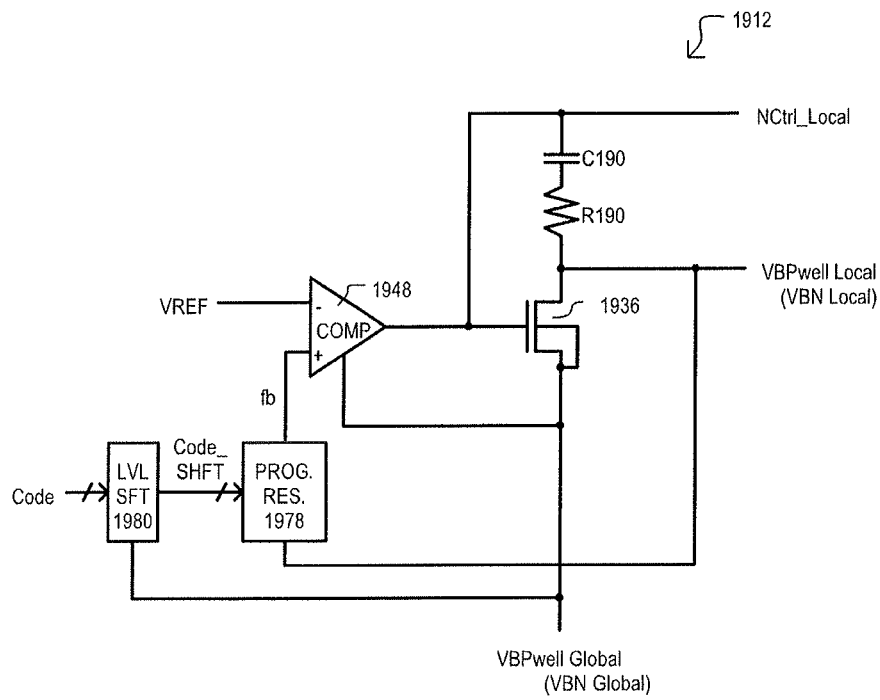


FIG. 19

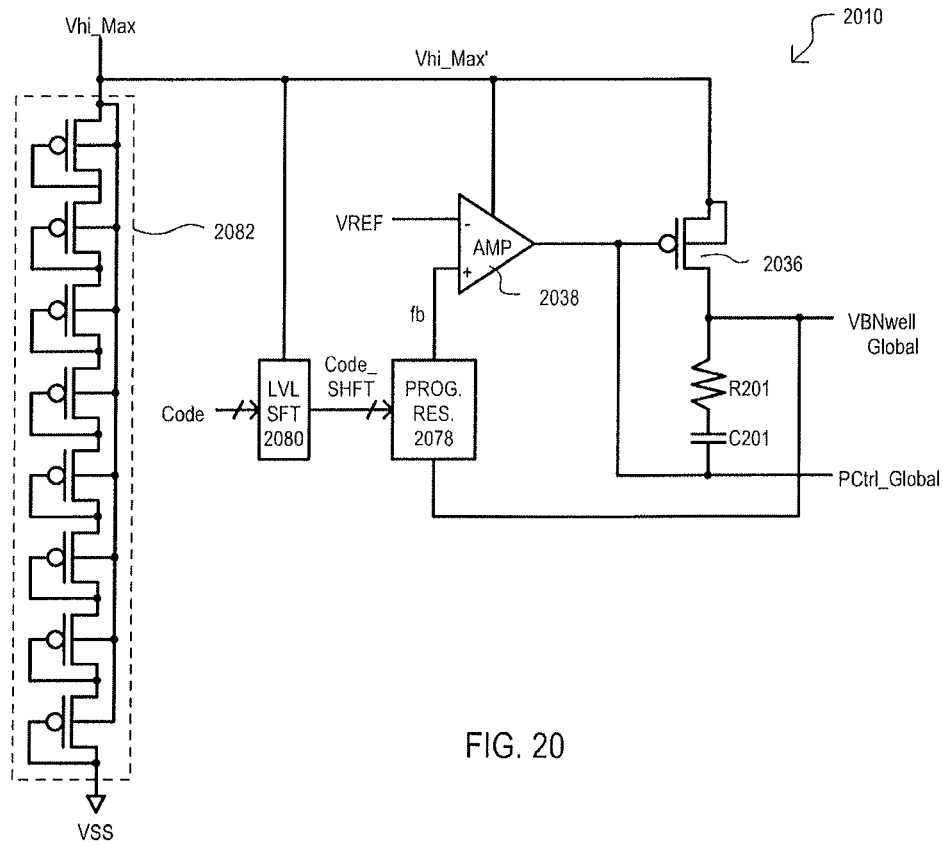


FIG. 20

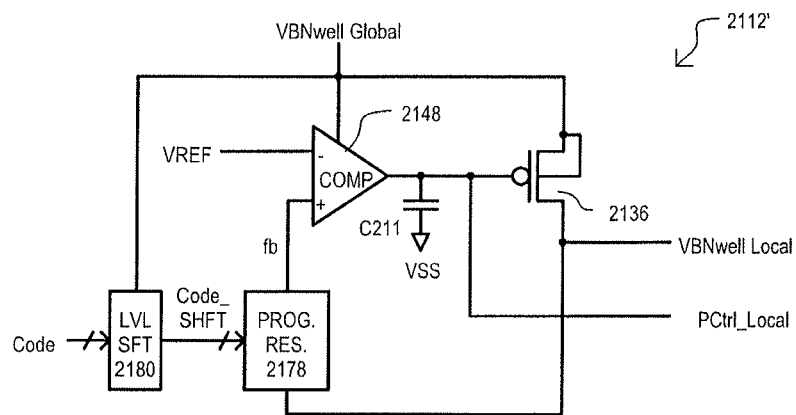


FIG. 21

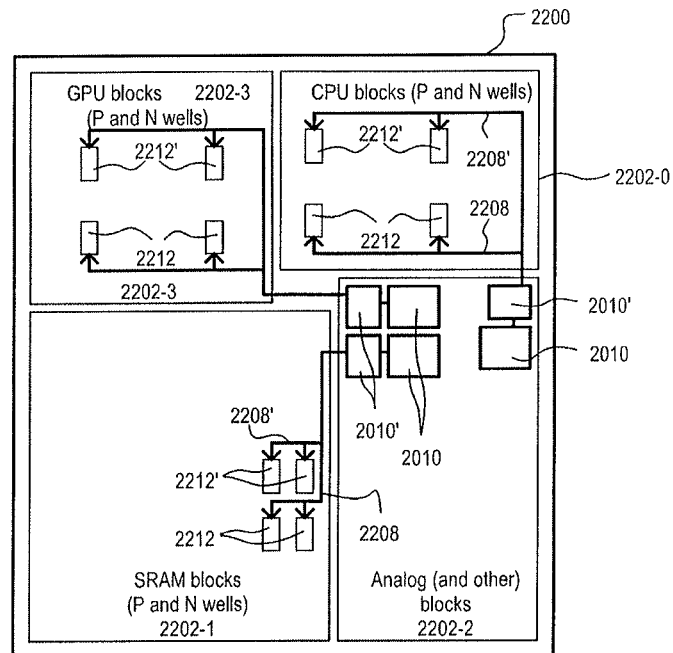


FIG. 22

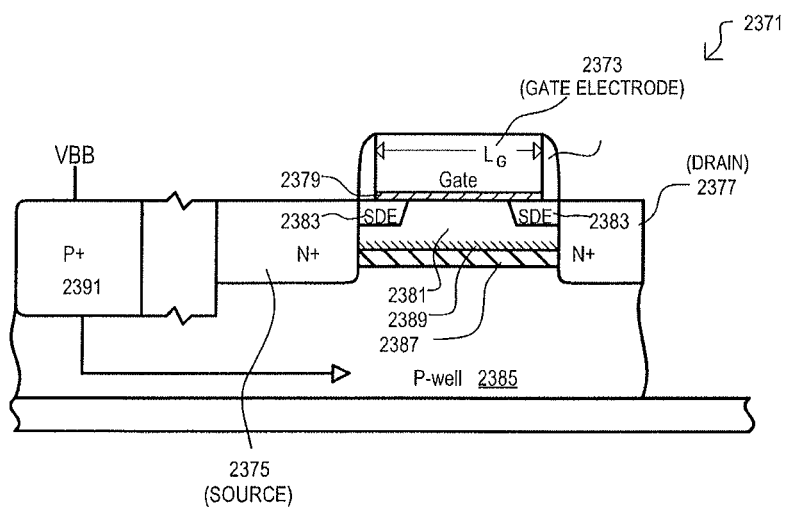


FIG. 23A

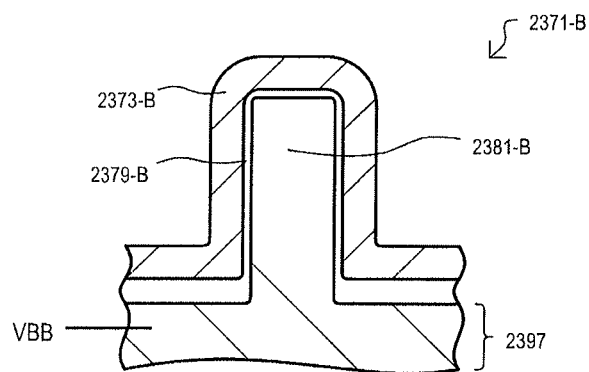


FIG. 23B

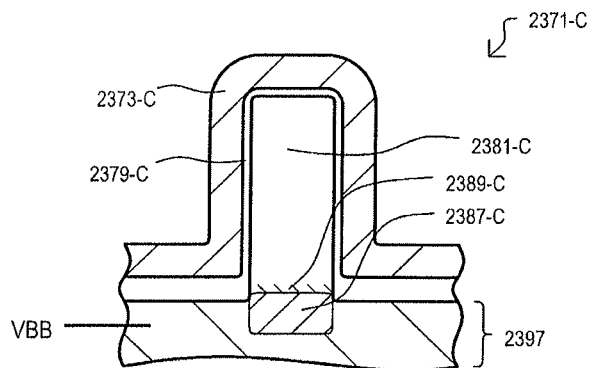


FIG. 23C

1

INTEGRATED CIRCUIT DEVICE BODY BIAS CIRCUITS AND METHODS

RELATED APPLICATIONS

This application is a continuation of U.S. Application Ser. No. is a continuation of U.S. application Ser. No. 14/799,715 filed Jul. 15, 2015 and entitled “Integrated Circuit Device Body Bias Circuits and Methods” which is a continuation of Ser. No. 13/838,221 filed Mar. 15, 2013 and entitled “Integrated Circuit Device Body Bias Circuits and Methods”, now U.S. Pat. No. 9,112,495 which issued Aug. 18, 2015, the entirety of which is hereby incorporated by reference.

TECHNICAL FIELD

The present invention relates generally to body biasing circuit solutions for systems including an integrated circuit (IC) device, and more particularly to body biasing circuit techniques that provide different body bias voltages to different blocks of an IC device.

BACKGROUND

Integrated circuit (IC) devices can include n-channel and p-channel transistors. In some IC devices, one or both types of transistors can be formed in wells. To increase the absolute value of the threshold voltage, the wells can be reverse biased (“back” biased). Thus, n-wells containing p-channel transistors can be reverse biased to a positive voltage greater than a high power supply for the transistors. Conversely, p-wells containing n-channel transistors can be reverse biased to a voltage more negative than their low source voltage (i.e., a voltage lower than ground).

Under certain operating conditions, IC devices can be subject to current transient events. Such events can result in a “droop” of a power supply voltage, which can slow the operation of some circuits. Conventionally, such circuits are designed with a timing “guard band”, at the cost of performance, to ensure proper operation in the event of a current transient event. Further, in some conventional approaches, in response to current transient events, the IC device can increase a reverse body bias voltage (increase the setting of a reverse body bias).

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block schematic diagram of an integrated circuit (IC) device according to one embodiment.

FIGS. 2A to 2C are side cross sectional representations showing body bias connections that can be included in embodiments.

FIG. 3 is a block schematic diagram of an IC device according to another embodiment.

FIG. 4 is a graph showing reductions in body bias voltage during current transient events according to one particular embodiment.

FIG. 5 shows graphs of how reductions in body bias voltage can increase circuit speed during current transient events.

FIG. 6 is a block schematic diagram of a body bias control circuit according to an embodiment.

FIG. 7 is block schematic diagram of an event detect circuit that can be included in embodiments.

FIG. 8 is a block schematic diagram of an IC device according to another embodiment.

2

FIG. 9 is a block schematic diagram of an IC device according to a further embodiment.

FIGS. 10A and 10B are schematic diagrams of body bias control circuits according to embodiments.

FIGS. 11A and 11B are schematic diagrams of local bias circuits according to embodiments.

FIGS. 12A and 12B are schematic diagrams of body bias control circuits according to further embodiments.

FIG. 13 is a block schematic diagram of an IC device according to another embodiment.

FIG. 14 is block schematic diagram of event detect circuits that can be included in embodiments.

FIG. 15 is a timing diagram showing a power-up operation of an IC device according to an embodiment.

FIG. 16 is a block schematic diagram of an IC device according to another embodiment.

FIG. 17 is a block schematic diagram of a body bias control circuit that can be included in an IC device like that of FIG. 16, according to an embodiment.

FIG. 18 is a schematic diagram of a charge pump circuit that can be included in embodiments.

FIG. 19 is a block schematic diagram of a local bias circuit that can be included in an IC device like that of FIG. 16, according to an embodiment.

FIG. 20 is a block schematic diagram of a global bias supply circuit that can be included in an IC device like that of FIG. 16, according to an embodiment.

FIG. 21 is a block schematic diagram of another local bias circuit that can be included in an IC device like that of FIG. 16, according to an embodiment.

FIG. 22 is a top plan view of an IC device like that of FIG. 16, according to one particular embodiment.

FIGS. 23A to 23C are side cross sectional views of transistors that can receive a body bias according to embodiments.

DETAILED DESCRIPTION

Various embodiments of the present invention will now be described in detail with reference to a number of drawings. The embodiments show integrated circuit devices, body bias control and generation circuits and related methods, including power up sequences. Body bias values can be varied between circuit blocks to vary (e.g., optimize) circuit block performance. According to some embodiments, in response to current transient events, body bias voltages for circuit blocks can be “collapsed” to lower body bias voltage levels.

In the various embodiments described below, like items are referred to with the same reference character but with the leading digits corresponding to the figure number.

FIG. 1 is a top plan view of an integrated circuit (IC) device 100 according to an embodiment. An IC device 100 can include a number of blocks (102-0 to -3), each of which can include a number of transistors having body regions which can be reverse biased. Transistors can include any suitable insulated gate field effect transistor having sufficiently strong body coefficients (referred to herein as “MOS” type transistors, but not implying any particular gate or gate dielectric material). Accordingly, transistors can include any of: conventional p-channel (PMOS) transistors (e.g., 104n), conventional n-channel (NMOS) transistors (e.g., 104p), the conventional transistors having strong body coefficients, or deeply depleted channel (DDC) PMOS transistors (e.g., 106p), or DDC NMOS transistors (e.g., 106n) (which by way of a typical architecture of such transistor, has strong body coefficient). An embodiment of a DDC transistor will be described in more detail below. Other

transistor types, for instance, transistors with a three-dimensional gate and a heavily doped body region can be used. It is understood that there is inevitably be a certain degree of variation among conventional transistor construction (e.g., variations in threshold voltage, gate insulator thickness, source-drain diffusion profiles, etc.). DDC transistor constructions can have their own variation as well, though the degree of variation for DDC transistors is generally less than conventional counterparts. Though embodiments are provided contemplating a mix of transistor designs, preferably, DDC transistors are used wherever possible in IC device 100. Note that transistors having strong body coefficient and particularly with body biasing, are amenable for use in circuit applications operating in the subthreshold region or near-threshold computing (having a supply voltage sufficiently low as to be near the threshold voltage setting).

Transistors receiving a body bias can also have a predetermined threshold voltage relationship with respect to a received power supply voltage. In some embodiments, transistors can have a threshold voltage setting that is less than or equal to 0.2V less than a supply voltage to the transistor.

Blocks (102-0 to 102-3) can include circuits of different types. According to particular embodiments, the blocks (102-0 to 102-3) can include but are not limited to any of: memory circuits; e.g., dynamic random access memory, (DRAM), static RAM (SRAM) or nonvolatile memory; processor circuits, e.g., one or more central processing units (CPUs), application PUs (APUs), graphic PUs (GPUs); application specific logic circuits; or analog circuits. Such different types of blocks can have transistors with different threshold voltages, and can have different responses to current transient events. In some embodiments, an IC device 100 can be a system-on-chip (SoC) type device, integrating processor circuits, memory circuits and other application specific circuits. In other embodiments, IC device 100 may be a system with one or more blocks segregated on individual die and assembled on one or more system boards.

IC device 100 includes a global body bias supply 110, which can provide one or more global body bias voltages (VBBG) to each block (102-0 to -3) via a global network 108. A global body bias supply 110 can be a voltage generating circuit, or can be an IC device connection (e.g., bond pad, pin, etc.) that receives an external voltage. A global body bias voltage generating circuit can generally include a charge pump circuit, a switched capacitor circuit, or a voltage regulator.

Each block (102-0 to -3) can include its own local bias circuit 112-0 to -3. Each local bias circuit (112-0 to -3) can generate one or more local body bias voltages (VBB0 to VBB3) from global body bias voltage(s) VBBG. Such local body bias voltages can be reverse body bias voltages that are applied to bodies of transistors within its block (102-0 to -3). Accordingly, body bias voltages for each block (102-0 to -3) can be tuned for the performance of the transistors within the block. Local body bias voltages (VBB0 to VBB3) can be static voltages, that generally do not change once the IC device is operational (but can vary between blocks) and/or can be dynamic voltages that change (e.g., change in response to an IC device mode or event).

According to some embodiments, local body bias voltages (VBB0 to VBB3) can have smaller settings than the global body bias voltage (VBBG) from which they are generated. For example, if a global body bias voltage is a positive voltage for p-channel transistors, corresponding local body bias voltages can have a lower positive voltage.

Similarly, if a global body bias voltage is a negative voltage for n-channel transistors, corresponding local body bias voltages can have a higher voltage (i.e., can be less negative).

In the particular embodiment shown, each local bias circuit (112-0 to -3) can generate a local body bias voltage (VBB0 to VBB3) that varies in response to a control value (Ctrl0 to Ctrl3). Thus, a local body bias voltage (VBB0 to VBB3) can be set according to such a value. A control value (Ctrl0 to Ctrl3) can be an analog value or can be a digital value. In this way, a body bias voltage to each different section can be adjusted independently.

It is understood that any of the blocks (102-0 to -3) can include transistors without a reverse body bias voltage (i.e., transistors with bodies biased to a power supply level).

FIGS. 2A to 2C are side cross sectional representations of body bias connections to transistors of a block that can be included in the embodiments described herein. FIG. 2A shows a conventional transistor 204 formed in a well 216. A well 216 can be of opposite conductivity type to a substrate 218 (or larger well) in which it is formed. A body bias voltage for the transistor can be applied via a body bias connection 214 to the well 216.

FIG. 2B is one very particular representation of a DDC transistor 206 formed in a well 216. As in the case of FIG. 2A, well 216 can be of opposite conductivity type to a substrate 218 (or larger well) in which it is formed. A body bias voltage for the transistor can be applied via a body bias connection 214 to the well 216. A DDC transistor 206 can include a highly doped screening region 220 and substantially undoped channel 222. Again, there are various embodiments of DDC transistors, some of which will be described in more detail below.

FIG. 2C shows a semiconductor on insulator (SOI) transistor 204' formed on an SOI substrate 218'. An SOI substrate 218' can include an active layer 218-0, insulating layer 218-1, and base substrate 218-2. Transistor 204' can be formed in active layer 218-0. A body bias voltage for the transistor can be applied via a body bias tap 214 to the active layer 218-0.

The various body bias connections shown in FIGS. 2A to 2C are intended to be exemplary and not limiting. A local body bias voltage as described herein can be applied to bias the body voltage of a transistor using any suitable means for the given transistor.

FIG. 3 is a top plan view of an IC device 300 according to another embodiment. An IC device 300 can include a number of blocks (302-0 to -3), global body bias supply 310, and global body bias network 308. Further, each block (302-0 to -3) can include a local body bias circuit (312-0 to -3). Such sections can be the same as, and subject to the same variations as those of FIG. 1. It is noted that in alternate embodiments, features shown as on the IC device 300 may be part of a system, for instance, a board having IC device(s) thereon; by way of example, global body bias supply 310 may be remote from IC device 300 and may feed in to IC device 300 from a system that includes IC device 300 assembled therein.

FIG. 3 further shows a local reference supply 324-0 to -3 and collapse circuit 326-0 to -3 corresponding to each block (302-0 to -3). A local reference supply (324-0 to -3) can provide a reference value (Vref0 to Vref3) to each local bias circuit (312-0 to -3). A local bias circuit (312-0 to -3) can control its body bias voltage (VBB0 to VBB3) by comparing a current body bias voltage to a reference voltage. A reference value (Vref0 to Vref3) can be a voltage, current, or digital value. In some embodiments, a reference value

5

(Vref0 to Vref3) remains constant, and body bias voltage can be adjusted by programming an allowable difference between the reference value and the body bias voltage. Alternatively, a reference value (Vref0 to Vref3) can be adjustable, and a body bias voltage can track the reference value.

Each collapse circuit (326-0 to -3) can selectively connect the bodies of transistors of its section to a “collapse” voltage. A collapse voltage can be a voltage having a setting less than the body bias voltage. In some embodiments, a collapse voltage can be a low power supply voltage level. As but one example, n-channel transistors can have a collapse voltage of zero volts (e.g., a low power supply level VSS), while p-channel transistors can have a collapse voltage of a high supply voltage (e.g., VDD, VCC). According to embodiments, collapse circuits (326-0 to -3) can collapse a body bias voltage to a collapse voltage in response to predetermined events. Such events can include events which can cause a current transient. In this way, a body bias voltage setting for transistors can be reduced in the event of a current transient event. This is in contrast to conventional approaches which either do not modify or can increase a body bias voltage setting in such cases.

In some embodiments, collapse circuits (326-0 to -3) can be programmable, being enabled in response to a selected set of events or modes of operation. In addition or alternatively, collapse circuits (326-0 to -3) can have a programmable delay between an event and the collapse operation.

FIG. 4 is a timing diagram showing a collapse operation according to one very particular embodiment. In the embodiment of FIG. 4, collapse circuits can enable reverse body bias voltages to be selected to track a power supply level in the event of a current transient event.

FIG. 4 includes the following waveforms: VDD can be a high power supply voltage; VSS can be a low power supply voltage (e.g., ground); VBN can be a reverse body bias voltage for n-channel transistors; and VBP can be a reverse body bias voltage for p-channel transistors. As shown, in the event of a transient event, power supply levels (VDD/VSS) can “droop”, moving towards each other. In response, collapse circuits can cause the body bias voltages (VBN/VBP) to track such power levels.

As noted above, in very particular embodiments, such a tracking can be accomplished by having VBN collapse to VSS and VBP collapse to VDD.

FIG. 5 is a timing diagram showing how reducing the setting of a reverse body bias voltage can increase circuit speed over high body bias levels.

FIG. 5 includes the following waveforms: an inverter delay with a standard reverse body bias (Standard VBB), an inverter delay with a reduced reverse body bias (i.e., a body bias having a lower setting than the Standard VBB) (Reduced VBB); as well as power supply levels (VDD/VSS) simulating a current transient event (i.e., droop).

As shown, reducing the setting of the reverse body bias can result in faster performance than maintaining the reverse body bias level. In this way, reducing a reverse body bias level during current transient events can increase performance, which can result in reduced guard-banding against such events.

FIG. 6 is a block schematic diagram of a body bias control circuit 628 according to an embodiment. Body bias control circuit 628 can include local body bias circuits (612-0 to 612-n), collapse circuits (626-0 to 626-n), and event detect circuits (630-0 to -n). Each local body bias control circuit (612-0 to 612-n) can provide a reverse body bias VBB

6

BLK0 to VBB BLKn to a corresponding group of transistors, as described herein, or equivalents.

A collapse circuit (626-0 to 626-n) can collapse body bias voltages to a set of transistors to a collapse voltage (VCollapse) as described herein, or equivalents. A collapse voltage (VCollapse) can be static voltage or can be a dynamic voltage (e.g., a voltage that tracks power supply droop). In the embodiment shown, each collapse circuit (626-0 to 626-n) can collapse its body bias voltage in response to an enable signal (Coll_EN0 to Coll_ENn) generated by a corresponding event detect circuit (630-0 to -n).

Each event detect circuit (630-0 to -n) can activate its collapse enable signal (Coll_EN0 to Coll_ENn) in response to one or more predetermined conditions. Such conditions can include operations on an IC device and/or signals received from sources external to the IC device.

FIG. 7 is a block schematic diagram showing a collapse event detect arrangement of an IC device according to an embodiment. An event detect circuit 730 can activate its collapse enable signal Coll_ENx in response to a number of events (or combinations of such events). In the particular embodiment shown, an event detect circuit 730 can receive an interrupt signal (INT). An interrupt signal INT can be generated by hardware (e.g., in response to circuits operations) or in response to software (e.g., instructions executed by a processor). Event detect circuit 730 can also receive signals applied from a source external to the integrated circuit device. In the particular embodiment shown, one or more signals external to the IC device (External CMDs) can be received by an intermediate circuit (in this embodiment a command decoder), in response to such external signal(s), a signal CMD_ACT can be activated as an input to event detect circuit 730.

An event detect circuit 730 can also receive a block enable signal BLKEN as an input. A block enable signal BLKEN can enable a block 702 of the IC device. Enabling a block can include changing a state of the block, including from a “sleep” mode to an active mode. A block enable signal BLKEN can be for the block that includes the event detect circuit, or can be an entirely different block.

FIG. 8 is a top plan view of an IC device 800 according to another embodiment. An IC device 800 can include a number of blocks (802-0 to -3), global body bias supply 810, global body bias network 808, and local body bias circuits 812-0 to -3. Such sections can be the same as, and subject to the same variations as those of FIG. 1.

The embodiment of FIG. 8 also includes a digital bus 834 and control store 832. Local body bias circuits (812-0 to -3) can be controlled in response to multi-bit control values transmitted over digital bus 834, including values stored in control store 832. Note, that in embodiments that provide body biases for both NMOS and PMOS transistors, such blocks will have at least two local bias circuits, one for PMOS device and one for NMOS devices. A control store 832 can include any circuit structure suitable to provide digital values to digital bus 834. All or a portion of values within control store 832 can be writable from locations external to an IC device 800. In addition or alternatively, all or a portion of the values of control store 832 can be established by a manufacturing step of the IC device (i.e., mask option, assembly option etc.). It is noted that in some embodiments, an IC device 800 may be subdivided into components that are on die and are off die and feed in from a system in which IC device 800 is placed. For instance, control store 832 may be implemented on a system and coupled to IC device 800 via digital bus 834, without control

store **832** being fabricated onto the a die together with other components shown in IC device **800**.

FIG. **8** shows a control store **832'** according to one very particular embodiment. A control store **832'** can be a register set that can store local bias control values for each block. In the embodiment shown, control store **832'** can include a body bias enable value for different conductivity type transistors (BLKx VBN Enable, BLKx VBP Enable, where x is a block identifier). Such values can enable or disable reverse body bias for transistors of the block. Control store reg. **832'** can also include a body bias level value for different conductivity type transistors (BLKx VBN Level, BLKx VBP Level, where x is a block identifier). Such values can establish the level of the reverse body bias for transistors of the block.

FIG. **9** is a top plan view of an IC device **900** according to another embodiment. An IC device **900** can include a number of blocks (**902-0** to **-3**), global body bias supply **910**, global body bias network **908**, and local body bias circuit **912-0** to **-3**. IC device **900** can be on the same die or may be subdivided so that some components are on a die and other components are off die and located on a system on which the die is assembled. Such sections can be the same as, and subject to the same variations as those of FIG. **1**.

The embodiment of FIG. **9** also includes a digital bus **934** and control store **932**. Collapse circuits (**926-0** to **-3**) for each block can be controlled in response to multi-bit control values transmitted over digital bus **934**, including values stored in control store **932**. A control store **932** can include circuit structures such as those noted for **832** in FIG. **8**, or equivalents.

FIG. **9** shows a control store **932'** according to one very particular embodiment. A control store **932'** can be a register set that can store local collapse control values for each block. In the embodiment shown, control store **932'** can include a collapse enable value for each block (BLKx Collapse Enable, where x is a block identifier). Such values can enable or disable the collapse circuit for block. Control store **932'** can also include a collapse event value (BLKx Collapse Event(s)). Such a value can establish for which events/inputs a collapse operation can occur. Control store **932'** can also include a collapse delay value (BLKx Collapse Delay). Such a value can establish a delay between an input to a collapse circuit, and the resulting collapse operation.

It is understood that embodiments can combine items of FIGS. **8** and **9**, to provide an IC device with digital control of both reverse body bias levels, as well as collapse operations.

FIG. **10A** is a block schematic diagram of a body bias control circuit **1028-P** for p-channel transistors according to an embodiment. Body bias control circuit **1028-P** can include local body bias circuits **1012** and a collapse circuit **1026**. A local body bias circuit **1012** can be a low dropout regulator (LDO) type circuit, and can include an amplifier **1038** and a bias device **1036**. Amplifier **1038** can have a (−) input connected to receive a reference voltage (Vref), a (+) input connected to receive the generated body bias voltage VBP (i.e., a feedback value), and an output that drives the bias device. Reference voltage (Vref) can be carried on a reference line **1042** that can be for transistors of one block, or multiple blocks. A reference voltage (Vref) can establish a reverse body bias voltage VBP. As shown, a reference voltage Vref can be less than a global body bias voltage Vglobal.

A bias device **1036** can be a p-channel transistor having source and body connected to receive a global body bias value (Vglobal), a gate coupled to the output of amplifier

1038, and a drain connected to provide the body bias voltage (VBP) on body bias line **1044** (i.e., the drain is connected to one or more wells or other active regions containing p-channel transistors). A global body bias voltage (Vglobal) can be provided on a global body bias network **1008**, which can provide such a value to multiple different blocks. In particular embodiments, a bias device **1036** can be a high voltage transistor (i.e., a transistor designed to withstand higher voltage levels than other transistors of the IC device, such as a thicker gate insulator, for example).

According to a difference between Vref and VBP, amplifier **1038** can drive bias device to raise or lower VBP with respect to Vglobal. In particular, as VBP falls below Vref, amplifier **1038** will increase the conductivity of bias device **1036** until VBP reaches a desired level.

A collapse circuit **1026** can include a collapse device **1040**. A collapse device **1040** can drive VBP to a lower power supply level VDD in response to signal Coll_EN. A lower power supply (VDD) level can be lower than VBP.

To avoid large current draw through device **1036** (a contention state) the body bias control circuit may have a disable (not shown, but discussed for another embodiment below) asserted when Coll_EN is asserted. Alternatively, Vref may be set to the local VDD value during collapse events, which will also essentially turn off bias device **1036**.

FIG. **10B** is a block schematic diagram of a body bias control circuit **1028-N** like that of FIG. **10A**, but for n-channel transistors. The operation of body bias control circuit **1028-N** is understood from the description of FIG. **10A**.

While embodiments can include continuous (e.g., analog) control of local reverse body bias voltages, alternate embodiments can include pulsed (e.g., digital) control of reverse body bias voltages. FIGS. **11A** and **11B** show particular examples of such embodiments.

FIG. **11A** shows a local bias circuit **1112-N** for n-channel transistors according to an embodiment. Local body bias circuit **1112-N** can include a comparator **1148**, toggle logic **1150**, a level shifter **1152**, a bias device **1136**, and optionally, a second level shifter **1154**. A comparator **1148** can have a (+) input connected to receive a feedback voltage (Vfb), that corresponds to the local body bias voltage VBN, a (−) input connected to receive a reference voltage (Vref), and an output connected to toggle logic **1150**.

Toggle logic **1150** can toggle between high and low values based on an output of comparator **1148**. In the particular embodiment shown, toggle logic **1150** can be an SR type flip-flop circuit, with an output to level shifter **1152**. Level shifter **1152** can shift output values from a lower voltage domain to a higher voltage domain. In the embodiment shown, level shifter **1152** can ensure a low value from toggle logic **1150** is driven to VGlobal. An output of level shifter **1152** can turn bias device **1136** off and on.

Bias device **1136** can be an n-channel transistor having source and body connected to VGlobal, a gate connected to receive the output of level shifter **1152** (Cx), and a drain connected to provide the body bias voltage (VBN) on body bias line **1144** (i.e., the drain is connected to one or more wells or other active regions containing n-channel transistors). A global body bias voltage (Vglobal) can be provided on a global body bias network **1108**, which can provide such a value to multiple different blocks. Optional level shifter **1154** can shift a body bias voltage VBN to ensure compatibility with the common mode input range of comparator **1148**. A bias device **1136** can be a high voltage transistor. The comparator may be continuous-time as shown, or clocked (i.e., a dynamic comparator).

If VBN is above a predetermined level, Vfb will be greater than Vref, and the output of comparator **1148** will be driven high. Toggle logic **1150** will drive level shifter **1152** accordingly, which will drive signal Cx high. This turns on the bias device **1136**, resulting in the local body bias VBN being driven lower. Once VBN is above a predetermined level, Vfb will be below Vref, and the output of comparator **1148** will be driven low. By operation of toggle logic **1150** and level shifter **1152**, signal Cx will be driven low, turning off bias device **1136**. Thus, bias device **1136** can be continually turning on and off to maintain VBN at a desired level.

FIG. **11B** is a block schematic diagram of a local bias circuit **1112-P** like that of FIG. **11A**, but for p-channel transistors. The operation of local bias circuit **1112-P** is understood from the description of FIG. **11A**.

In some embodiments, the activation of a bias device (which establishes a body bias level from a global body bias) and the activation of a collapse device can be interlocked with one another. In particular, a bias device will be disabled when the corresponding collapse device is enabled. Particular examples of such embodiments will now be described.

FIG. **12A** is a block schematic diagram of a body bias control circuit **1228-N** for n-channel transistors according to an embodiment. Body bias control circuit **1228-N** can include a bias device **1240**, a collapse device **1236**, and interlock logic **1256**. Bias device **1240** can be an n-channel transistor having a source-drain path connected between a global body bias voltage (VGlobal) and a local body bias output **1244**, and a gate connected to an output of interlock logic. Collapse device **1236** can have a source-drain path connected between a collapse voltage (which is a lower power supply voltage VSS in this particular embodiment) and the local body bias output **1244**. In particular embodiments, either or both of bias and collapse devices (**1240/1236**) can be high voltage tolerant transistors.

Interlock logic **1256** can ensure that bias device **1240** is turned off whenever a collapse operation occurs (i.e., Coll_EN is high). Further, interlock logic **1256** can ensure that bias device **1240** is turned on only when there is no collapse operation (i.e., Coll_EN is low).

FIG. **12B** is a block schematic diagram of a body bias control circuit **1228-P** like that of FIG. **12A**, but for p-channel transistors. The operation of body bias control circuit **1228-P** is understood from the description of FIG. **12A**, where control signal Coll_ENN is asserted active low rather than high.

FIG. **13** is a block schematic diagram of an IC device **1300** according to another embodiment. In a very particular embodiment, IC device **1300** can be one implementation of a device like that shown in FIGS. **8** and/or **9**. An IC device **1300** can include a number of blocks **1302-0** to -n, each of which can include p-wells which can contain n-channel transistors, as well as n-wells which can contain p-channel transistors. Transistors can take the form of any of those described herein, or equivalents. N-wells within each block (**1302-0** to -n) can be driven to a bias voltage (VNwell_A, B . . . Z) by a corresponding bias control circuit **1328-0** to -n. Such n-well bias voltages can be connected to their n-wells via local bias lines (**1334A** to **1334Z**). In a like fashion, p-wells within each block (**1302-0** to -n) can be driven to a bias voltage (VPwell_A, B . . . Z) by a corresponding bias control circuit **1328-0'** to -n'. Such p-well bias voltages can be connected to their p-wells via local bias lines (**1334A'** to **1334Z'**).

Bias control circuits for the p-wells (**1328-0** to -n) can each include a digital-to-analog converter (DAC) **1358**, amplifier **1338**, bias device **1336**, and collapse device **1340**.

DACs **1358** can receive input digital values from a local control circuit **1362**, and from such values can generate reference voltages (VrefNwA to VrefNwZ). Amplifiers **1338** can have one input connected to receive the reference voltage (VrefNwA to VrefNwZ) and another input connected to the corresponding n-well (i.e., via **1334A** to **1334Z**). Output of amplifiers **1338** can control corresponding bias devices **1336**. Bias devices **1336** can be p-channel transistors having source-drain paths connected between a global bias voltage VNwell_Global and their corresponding n-well. In such an arrangement, based on a difference between a reference voltage (VrefNwA to VrefNwZ) and a well voltage, the conductivity of the bias device **1336** can be varied to maintain the n-well at a desired bias voltage.

Collapse devices **1340** can be p-channel transistors having source-drain paths connected between the local power supply voltage (e.g., VDD) and their corresponding n-well. Activation of collapse devices **1340** can be controlled via signals from a collapse control circuit **1360**.

Bias control circuits for the n-wells (**1328-0'** to -n') can have structures like those for the p-wells, but include n-channel bias devices **1336'** and collapse devices **1340'**. Bias control circuits (**1328-0'** to -n') can operate in a similar fashion, varying the conductivity of the bias devices **1336'** according to a difference between a reference voltage (VrefPwA to VrefPwZ) and the voltage of their corresponding p-well. Reference voltages (VrefPwA to VrefPwZ) can be generated from digital values output from local control circuit **1362'**. Collapse devices **1340'**, when activated by collapse control circuit **1360**, can collapse their corresponding well to the local power supply voltage (e.g., VSS).

FIG. **14** shows event detect circuits **1430-0** to -n according to embodiments. Each event detect circuit (**1430-0** to -n) can activate a collapse enable signal (Coll_EN0 to Coll_ENn), which can collapse a body bias (e.g., well) voltage to a predetermined level in response to particular events.

Each event detect circuit can include local logic **1464-0** to -n, local delay **1466-0** to -n, global delay **1468-0** to -n, and output logic **1470-0** to -n. Local logic (**1464-0** to -n) can combine signals corresponding to local events (i.e., events occurring on the block itself) (LOCAL EVENT0 to i). In the particular embodiment of FIG. **14**, local logic can be an OR gate, but any suitable logic can be employed. Local delay (**1466-0** to -n) can add delay to time the assertion or de-assertion of a signal. In some embodiments, such delay can be programmable. Global delay (global delay **1468-0** to -n) can delay a global event indication (i.e., an event outside of the block) (GLOBAL EVENTi). Output logic **1470-0** to -n can combine local and global event indications to generate the collapse enable signal (Coll_EN0 to Coll_ENn).

According to an embodiment, during the IC power up sequence, the charge pumps may not have time to drive the global bias values to their correct values. In this case, the core devices may be temporarily forward body biased, causing excessive power up currents. Consequently, one such GLOBAL EVENT may be the power up sequence, whereby the local body biases may be driven to the local supply voltages (applying zero body bias rather than forward body bias). When the supplies, including the global well biases, have been determined to be at their nominal voltages, the GLOBAL EVENT condition may be de-asserted to allow local well biases to be reverse biased, further reducing leakage currents.

While embodiments herein can include IC devices that generate local body bias voltages from global body bias voltages, embodiments can also include power-on sequences

11

for such devices. A power-on sequence according to one particular embodiment is shown in FIG. 15.

FIG. 15 is a timing diagram of a power on sequence for an IC device. FIG. 15 includes the following waveforms: VHi_Max shows a high power supply voltage that can be provided to particular circuits in the IC device; VBNWell can be a reverse body bias generated for p-channel devices (i.e., VBP); VBPWell can be a reverse body bias generated for n-channel devices (i.e., VBN); and VHi can be a power supply voltage less than VHi_Max, provided to circuits with transistors subject to one or both reverse body bias voltages.

In one very particular embodiment, VHi_Max can be a power supply for a charge pump circuit that generates a global negative body bias used to generate VBPWell, and can have a level of about +3.3V. A positive reverse body bias (VBNwell) can be about +1.7V (which is greater than Vhi). A reverse body bias (VBPwell) can be about -0.9V. Vhi can be about +0.9V, and can be a supply voltage to p-channel transistors having the reverse body bias voltage VBNwell (of about +1.7V).

Referring still to FIG. 15, as shown, the power voltage Vhi can be enabled only after the VHi_Max and VBNwell/VBPwell have been settled. In one particular embodiment, Vhi_Max can rise first, enabling the local body bias voltages (VBNwell/VBPwell) to be generated. Only after such actions is power supply Vhi allowed to rise (shown by "delay").

FIG. 16 is a block schematic diagram of an IC device 1600 according to another embodiment. An IC device 1600 can incorporate a power-up sequence like that shown in FIG. 15. An IC device 1600 can include a number of blocks 1602-0 to 1602-n, which in the particular embodiment shown, can be CPU cores. Each block (1602-0 to -n) can include local bias circuits 1612-0 to -n that can generate a local n-channel body bias (i.e., a p-well bias) for its block, and local bias circuits 1612-0' to -n' that can generate a local p-channel body bias (i.e., an n-well bias) for its block.

Local bias circuits (1612-0 to -n) can generate their local body bias voltages (VBN) from a negative global body bias voltage (VBPwell Global) provided to each block (1602-0 to -n) via a global network 1608. Local body bias voltages (VBN) can set with corresponding digital values (Dig. Ctrl). In a similar fashion, local bias circuits (1612-0' to -n') can generate their local body bias voltages (VBP) from a positive global body bias (VBNwell Global) provided to each block (1602-0 to -n) via a global network 1608'.

In the embodiment shown, a negative global body bias voltage (VBPwell Global) can be provided from a global source 1610, which can include a charge pump circuit 1672 controlled by an oscillator circuit 1674. Charge pump circuit 1672 and oscillator circuit 1674 can operate at a voltage Vhi_Max, which can be an externally provided high supply voltage, such as the high voltage input-output (VDDIO) power supply.

A positive global body bias voltage (VBNwell Global) can be provided from global bias circuit 1610', which in a particular embodiment can be DC-DC converter circuit, which can convert the voltage Vhi_Max, to a lower voltage level with high efficiency.

In a power up operation, Vhi_Max (e.g., ~+3.3V) can be applied. A lower power supply voltage (e.g., ~+0.9V) is not immediately enabled. In response to Vhi_Max, oscillator circuit 1674 can generate an oscillating signal as an input to charge pump circuit 1672. In response, the charge pump circuit 1672 can start to generate a negative global bias voltage (VBPwell Global). In response to negative global

12

bias voltage (VBPwell Global), local bias circuits (1612-0 to -n) can generate their local body bias voltages (VBN).

At the same time, global source 1610' can generate a positive global supply voltage (VBNwell Global) (e.g., ~+2.2V) from the Vhi_Max voltage (e.g., ~+3.3V). Once the high power supply voltage (VBNwell Global) is established, local bias circuits (1612-0' to -n') can generate their local body bias voltages (VBP).

After the local body bias voltages (VBN/VBP) are stable, a lower power supply voltage (e.g., ~+0.9V) can then be enabled. Alternatively, the body biases may be pinned to the supply voltage so as not to apply forward body biases, until such time as the global body biases are stable.

FIG. 17 is a block schematic diagram of a bias control circuit 1728 according to an embodiment. In one particular embodiment, a bias control circuit 1728 can be one implementation of that for IC device of FIG. 16. Bias control circuit 1728 can include a positive global supply 1710', local bias circuits 1712' (only one shown), a charge pump circuit 1772, and local bias circuits 1712 (only one shown).

Positive global supply 1710' can be a DC-DC converter circuit that converts a high, positive power supply voltage (Vhi_Max) to a lower positive global bias voltage (VBNwell Global). In one particular embodiment, positive global supply 1710' can be an LDO circuit that converts a voltage (Vhi_Max) of about +3.3V to a voltage (VBNwell Global) of about +2.2V.

The lower positive global bias voltage (VBNwell Global) can be provided by local bias circuits 1712'. In the particular embodiment shown, a local bias circuit 1712' can generate a local body bias voltage (VBP/VBNwell Local) that varies according to a digital control value Dig. Ctrl0. Further, local bias control circuits 1712' can be individually enabled or disabled according to an enable signal EN0. In one very particular embodiment, local bias circuits 1712' can provide a local body bias voltage (VBP/VBNwell Local) that ranges from +2.0V to +0.6V.

Charge pump circuit 1772 can generate a negative global bias voltage (VBPwell Global). In one particular embodiment, charge pump 1772 can generate a negative global bias voltage (VBPwell Global) of about -1.0V, utilizing an oscillating signal of about 25 MHz and a power supply voltage of +3.3V.

The negative global bias voltage (VBPwell Global) can be provided local bias circuits 1712. In the particular embodiment shown, a local bias circuit 1712 can generate a local negative body bias voltage (VBN/VBPwell Local) that varies according to a digital control value Dig. CtrlN. Further, local bias control circuits 1712 can be individually enabled or disabled according to an enable signal ENN. In one very particular embodiment, local bias circuits 1712 can provide a local body bias voltage (VBN/VBPwell Local) that ranges from 0V to -0.8V.

FIG. 18 is a schematic diagram of a charge pump circuit 1872 that can be included in embodiments. Charge pump circuit 1872 can be one very particular implementation of that shown as 1672 in FIG. 16 or 1772 in FIG. 17. A charge pump circuit 1872 can include pump control logic 1876, a pump circuit formed by p-channel transistors P180/P181, n-channel transistors N180/N181, and pump capacitors C180/C181. Pump control logic 1876 can generate non-overlapping pulses to drive capacitors C180/C181.

Within the pump circuit, transistors P180/P181 can have sources and bodies commonly connected to a charge voltage Vcharge. Drains of transistors P180/P181 can be cross coupled to their gates. Transistors N180/N181 can have sources and bodies commonly connected to an output node

13

VCN_Source, which can provide the negative global supply voltage. Drains of transistors N180/181 can be cross coupled to their gates.

On one pump cycle, a polarity of signal applied to C181 from pump control logic 1876 can switch from high to low, and negative charge can be transferred to VCN_Source via transistor N181. In addition, a polarity of signal applied to C180 from pump control logic 1876 can switch from low to high, and transistor C180 can charge via transistor P180. On the next pump cycle, a polarity of signal applied to C180 can switch from high to low, and negative charge can be transferred to VCN_Source via transistor N180. The polarity of the signal applied to C180 can switch from low to high, and transistor C181 can charge via transistor P181.

FIG. 19 is a schematic diagram of a local bias circuit 1912 according to an embodiment. Local bias circuit 1912 can be one very particular implementation of that shown as 1612 in FIG. 16 or 1712 in FIG. 17. A local bias circuit 1912 can include a comparator 1948, a bias device 1936, a programmable resistance circuit 1978, and a level shifter 1980. A comparator 1948 can have a (−) input connected to receive a reference voltage VREF, a (+) input connected to an output (VBPwell Local) via a feedback path that includes programmable resistance circuit 1978, and output that drives bias device 1936.

Bias device 1936 can be an n-channel transistor having a source and body connected to receive a negative global bias voltage (VBPwell Global), a gate connected to the output of the comparator 1948, and a drain that provides the local body bias voltage (VBPwell Local).

As noted above, a programmable resistance circuit 1978 can be included in a feedback path between the local body bias voltage (VBPwell Local) and (+) input to the comparator 1948. A resistance presented by programmable resistance circuit 1978 can be established via a digital code (Code) applied via level shifter 1980. The level of the local body bias voltage (VBPwell Local) can be established with the digital code (Code).

If the local body bias voltage (VBPwell Local) is above a predetermined level which is set by the digital (Code), the (+) input to the comparator 1948 will be greater than Vref, and the output of comparator 1948 will be driven high, turning on bias device 1936, to pull the local body bias voltage (VBPwell Local) lower (i.e., toward VBPwell Global). Once the local body bias voltage (VBPwell Local) is below the predetermined level (again, set by the digital (Code)), the (+) input to the comparator 1948 will be greater than Vref, and the output of comparator 1948 will be driven low, turning off bias device 1936. Once the local body bias voltage (VBPwell Local) drifts high again, the bias device will be turned on. This repeats to maintain the local body bias voltage (VBPwell Local) within a desired range.

The output of the comparator 1948 can provide a control value NCtrl_Local, which can be used to control other bias devices. In the embodiment shown, the output of the comparator 1948 can be connected to the local body bias voltage (VBPwell Local) by a capacitor C190 and resistor R190.

FIG. 20 is a schematic diagram of a global bias circuit 2010' according to an embodiment. Global bias circuit 2010' can be one very particular implementation of that shown as 1610' in FIG. 16 or 1710' in FIG. 17. Global bias circuit 2010' can be an LDO that includes an amplifier 2038, a bias device 2036, a programmable resistance circuit 2078, a level shifter 2080, and a diode ladder 2082.

Diode ladder 2082 can include a number of p-channel transistors connected in a "diode" fashion (gates connected to drains) in series with one another between a low power

14

supply voltage (VSS) and high power supply voltage (Vhi_Max). Diode ladder 2082 provides a bias voltage for amplifier 2038.

Amplifier 2038 can have a (−) input connected to receive a reference voltage VREF, a (+) input connected to an output (VCNwell Global) via a feedback path that includes programmable resistance circuit 2078, and output that drives bias device 2036.

Bias device 2036 can be a p-channel transistor having a source and body connected to receive the power-up controlled high supply voltage Vhi_Max', a gate connected to the output of amplifier 2038, and a drain that provides the positive global body bias voltage (VCNwell Global). Bias device and other constituent devices may be high voltage tolerant (e.g., thick-gate oxide).

In a manner like that of FIG. 19, programmable resistance circuit 2078 can be included in a feedback path between the global body bias voltage (VCNwell Global) and (+) input to the amplifier 2038. A resistance presented by programmable resistance circuit 2078 can be established via a digital code (Code). Thus, as the global body bias voltage (VCNwell Global) starts to move below a predetermined level (set by the digital (Code)), the (+) input to the amplifier 2038 will be less than Vref, and the output of amplifier 2038 will drive bias device 2036 to a more conductive state, to raise the global body bias voltage (VCNwell Global) higher (i.e., toward Vhi_Max'). Conversely, once the global bias voltage (VCNwell Global) returns to the predetermined level or above the level, the bias device 2036 will be driven to a less conductive state.

The output of the amplifier 2038 can provide a global value PCtrl_Global, which can be used to control other bias devices. In the embodiment shown, the output of the amplifier 2038 can be connected to the global body bias voltage (VCNwell Global) by a capacitor C201 and resistor R201.

FIG. 21 is a schematic diagram of a local bias circuit 2112' according to an embodiment. Local bias circuit 2112' can be one very particular implementation of that shown as 1612' in FIG. 16 or 1712' in FIG. 17. A local bias circuit 2112' can include a comparator 2148, a bias device 2136, a programmable resistance circuit 2178, and a level shifter 2180. A comparator 2148 can have a (−) input connected to receive a reference voltage VREF, a (+) input connected to an output (VCNwell Local) via a feedback path that includes programmable resistance circuit 2178, and output that drives bias device 2136.

Bias device 2136 can be a p-channel transistor having a source and body connected to receive a positive global bias voltage (VCNwell Global), a gate connected to the output of the comparator 2148, and a drain that provides the local body bias voltage (VBPwell Local).

Local bias circuit 2112' can operate in a manner similar to that of FIG. 19. If the local body bias voltage (VCNwell Local) is below a predetermined level (set by the digital (Code)), the (+) input to the comparator 2148 will be lower than VREF, and the output of comparator 2148 will be driven low, turning on bias device 2136, to pull the local body bias voltage (VCNwell Local) higher (i.e., toward VCNwell Global). Once the local body bias voltage (VCNwell Local) is above the predetermined level, the (+) input to the comparator 2148 will be greater than VREF, and the output of comparator 2148 will be driven high, turning off bias device 2136. This repeats to maintain the local body bias voltage (VCNwell Local) within a desired range.

The output of the comparator 2148 can provide a control value PCtrl_Local, which can be used to control other bias devices. In the embodiment shown, a capacitor C211 can be

15

connected between the output of the comparator **2148** and a low power supply voltage (VSS).

FIG. **22** is a top plan view of a system configured as an IC device **2200** according to another embodiment. An IC device **2200** can be an SoC type device, including a CPU block **2202-0**, an SRAM block **2202-1**, an analog block **2202-2**, and a GPU block **2202-3**. Analog block **2202-2** can include negative global body bias sources **2010** and positive body bias sources **2010'**. IC device **2200** can be fabricated on a single die, or can be implemented across multiple die with one or more blocks fabricated on their own die. Negative global body bias sources **2010** can take the form of any of those shown as **1610/1672** in FIG. **16** or **1772** of FIG. **17**, or equivalents. Positive global body bias sources **2010'** can take the form of any of those shown as **1610'** in FIG. **16**, **1710'** in FIG. **17**, or **2010** in FIG. **20**.

Within blocks **2202-0/1/3** a negative global body bias voltage can be provided via a network **2208**, while a positive global body bias voltage can be provided via a network **2208'**. Blocks **2202-0/1** can also include local body bias circuits **2212**, which can generate local negative body bias voltages for n-channel transistors from a global bias voltage on network **2208**, as described in embodiments herein, or equivalents. Further, local body bias circuits **2212'** can generate local positive body bias voltages for p-channel transistors from a global body bias voltage on a network **2208'**, as described in embodiments herein, or equivalents.

FIG. **23A** shows a DDC type transistor **2371** that can receive a body bias voltage as described herein. A DDC transistor **2371** can be configured to have an enhanced body coefficient, along with the ability to set a threshold voltage (V_t) with enhanced precision. A DDC transistor **2371** can include a gate electrode **2373**, source **2375**, drain **2377**, and a gate dielectric **2379** positioned over a substantially undoped channel **2381**. Optional lightly doped source and drain extensions (SDE) **2383** can be positioned respectively adjacent to source **2375** and drain **2377**. Such extensions **2383** can extend toward each other, reducing effective length of the substantially undoped channel **2381**.

In FIG. **23A**, DDC transistor **2371** is shown as an n-channel transistor having a source **2375** and drain **2377** made of n-type dopant material, formed upon a substrate such as a p-type doped silicon substrate providing a p-well **2385**. In addition, the n-channel DDC transistor **2371** in FIG. **23A** can include a highly doped screening region **2387** made of p-type dopant material, and an optional threshold voltage set region **2389** made of p-type dopant material.

A body bias voltage VBB can be applied via a tap **2391** to the p-well **2385**. P-channel DDC transistors are understood to have reverse doping types as compared to an n-channel DDC.

Further descriptions of a DDC transistor as well as an exemplary fabrication process and other aspects of a DDC transistor can be found in U.S. Pat. No. 8,273,617, titled "Electronic Devices and Systems, and Methods for Making and Using the Same." A DDC transistor provides advantages for circuit design in that, among other reasons, a DDC transistor enables designs having pulled-in corners. The reason is the tighter distribution of the threshold voltage from device-to-device. Additionally, a DDC transistor includes a strong body coefficient by which body biasing can be used to further pull in design corners. A result of using a DDC transistor is the ability to implement improved integrated circuit designs according to desired targets for power and performance whereas when using conventional transistors circuit designers resort to designing conservatively for wider design corners thereby sacrificing the potential power

16

and performance that could be otherwise achieved for a design. An advantage of using a DDC transistor as part of implementing on the embodiments described herein is in the ability to reliably design integrated circuits using a statistically-based, process variation-comprehending simulation model by which design corners could be shrunk.

FIG. **23B** shows a FinFET type transistor **2371-B** that can receive a body bias voltage according to embodiments. FinFET transistor **2371-B** can include a gate electrode **2373-B** and gate dielectric **2379-B** that surround a substantially undoped channel **2381-B** on opposing sides. The view of FIG. **23B** is taken along a channel length. Thus, it is understood that source and drain regions can extend into and out of the view shown. A body bias VBB can be applied via a connection to a substrate **2397**.

FIG. **23C** shows a FinFET type transistor **2371-C** having a screening region **2387-C**, that can receive a body bias voltage according to embodiments. As in the case of FIG. **23A**, the FinFET transistor **2371-C** has a highly doped region that can be configured to have an enhanced body coefficient, along with the ability to set a V_t with enhanced precision. The transistor **2371-C** includes a gate electrode **2373-C** and gate dielectric **2379-C** formed over a substantially undoped channel **2381-C** on opposing sides. However, unlike FIG. **23B**, a highly doped region **2387-C** can be formed in a substrate **2397** below substantially undoped channel **2381-C** rising upward three-dimensionally. Optionally, a V_t set region **2389-C** can be formed between the screening region **2387-C** and substantially undoped channel **2381-C**.

As in the case of FIG. **23B**, the view of FIG. **23C** is taken along a channel length, and source and drain regions can extend into and out of the view, separated from screening region **2387-C** by portions of undoped channel region **2381-C**. A body bias VBB can be applied via a connection to a substrate **2397**. Further descriptions of a finFET transistor having a highly doped region can be found in patent application International Application No. PCT/US12/49531 titled "Semiconductor Devices Having Fin Structures and Fabrication Methods Thereof".

It should be appreciated that in the foregoing descriptions of exemplary embodiments, various features are sometimes grouped together in a single embodiment, figure, or description thereof for the purpose of streamlining the disclosure aiding in the understanding of one or more of the various inventive aspects. This method of disclosure, however, is not to be interpreted as reflecting an intention that the claimed invention requires more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive aspects lie in less than all features of a single foregoing disclosed embodiment. Thus, the claims following the detailed description are hereby expressly incorporated into this detailed description, with each claim standing on its own as a separate embodiment of the invention.

It is also understood that the embodiments may be practiced in the absence of an element and/or step not specifically disclosed. That is, an inventive feature of the invention may be elimination of an element.

Accordingly, while the various aspects of the particular embodiments set forth herein have been described in detail, the present invention could be subject to various changes, substitutions, and alterations without departing from the spirit and scope of the invention.

What is claimed is:

1. A method, comprising:

supplying a first power supply voltage for a charge pump circuit that generates a global body bias voltage;

17

generating a local body bias voltage from the global body bias voltage;
waiting for a predetermined delay after the local body bias voltage reaching and being stable at a predetermined value, and then supplying a second power supply voltage applied for transistors having the local body bias voltage while the local body bias voltage is stable at the predetermined value, the second power supply voltage being lower than the first power supply voltage.

2. The method of claim 1, further including:
in response to at least one local event and in response to a global event, coupling bodies of the transistors to a collapse voltage that tracks the first power supply voltage.

3. The method of claim 1, wherein:
the transistors including deeply depleted channel (DDC) transistors, each DDC transistor comprises a body with a screening region of a dopant concentration of no less than 1×10^{18} dopant atoms/cm³ formed below a transistor channel.

* * * * *

18