




(86) Date de dépôt PCT/PCT Filing Date: 2011/08/22
(87) Date publication PCT/PCT Publication Date: 2012/03/01
(45) Date de délivrance/Issue Date: 2017/09/19
(85) Entrée phase nationale/National Entry: 2013/02/19
(86) N° demande PCT/PCT Application No.: KR 2011/006180
(87) N° publication PCT/PCT Publication No.: 2012/026721
(30) Priorité/Priority: 2010/08/23 (KR10-2010-0081589)

(51) Cl.Int./Int.Cl. *B01D 63/02* (2006.01)
(72) Inventeurs/Inventors:
MO, CHI JOON, KR;
LIM, SEONG HAN, KR;
JEON, YOU CHUL, KR;
LEE, JEONG JAE, KR;
KIM, DONG SEONG, KR
(73) Propriétaire/Owner:
HYOSUNG CORPORATION, KR
(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : MODULE A MEMBRANE EN FIBRES CREUSES SUBMERGEE COMPORTANT UNE MEMBRANE
DESEPARATION DOTEES D'OUVERTURES INCLINEES
(54) Title: SUBMERGED HOLLOW FIBER MEMBRANE MODULE HAVING PARTITION MEMBRANE WITH SLANTED
OPENINGS

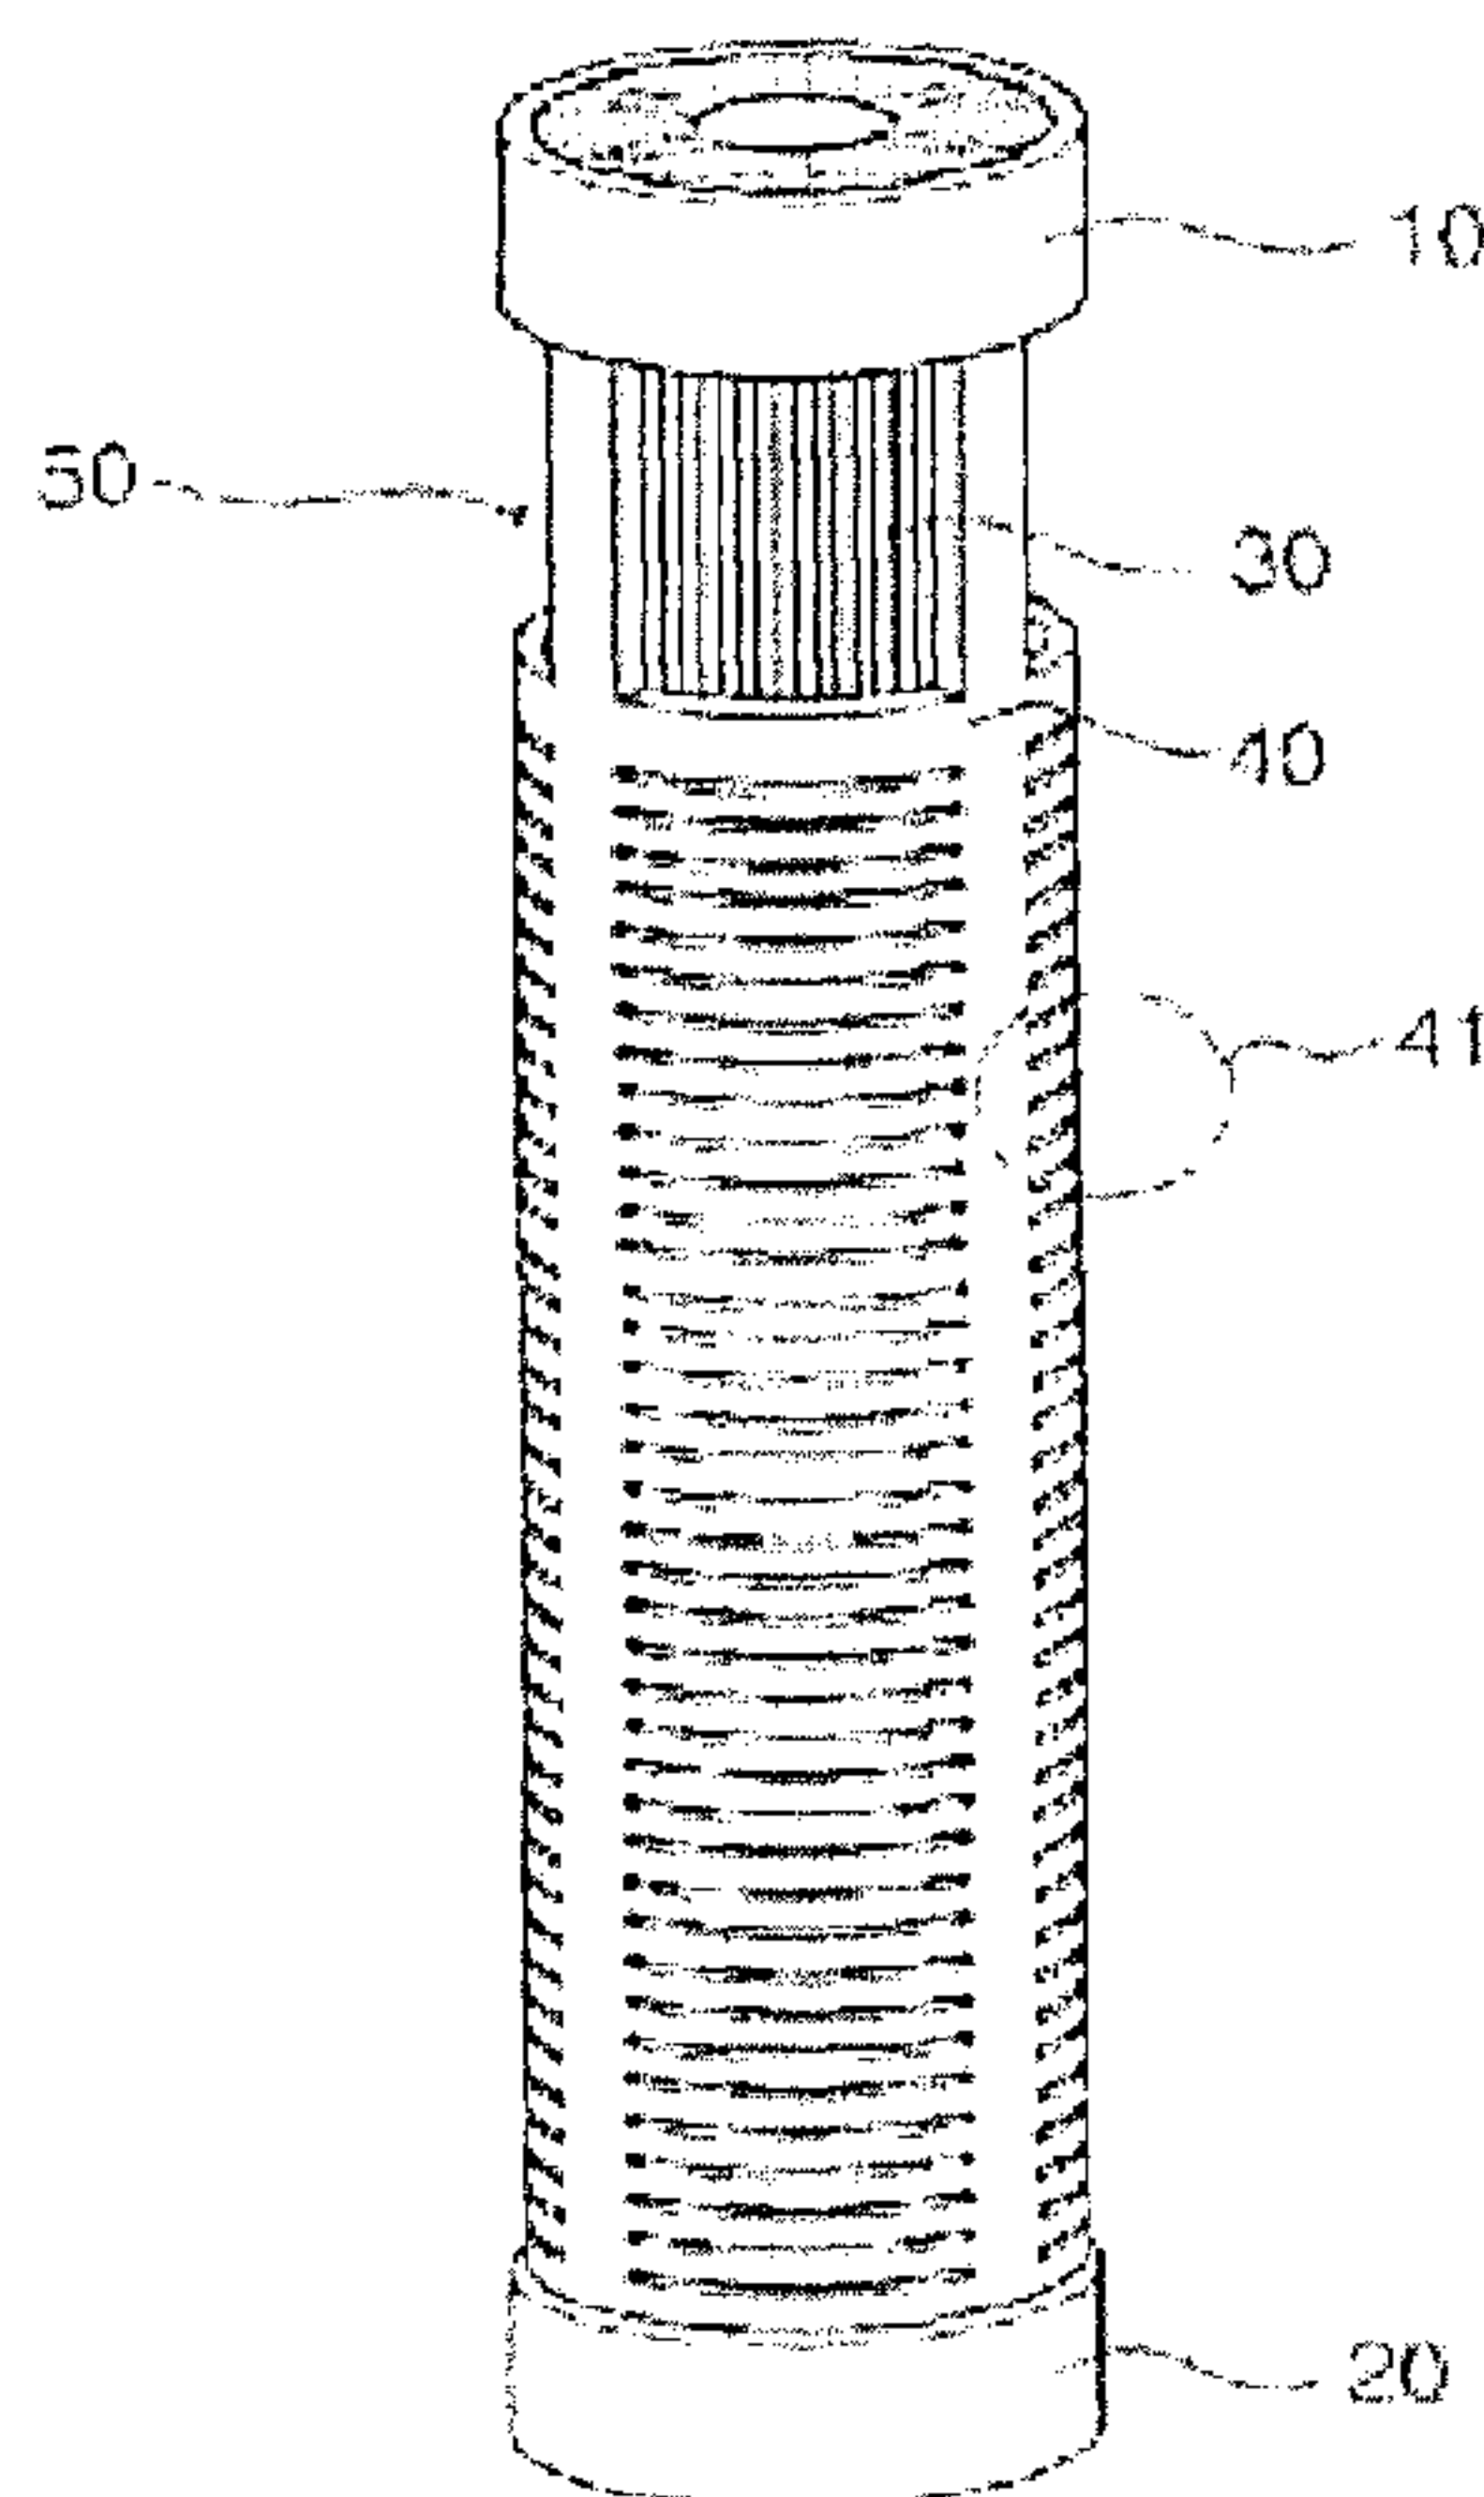

(57) **Abrégé/Abstract:**

The present invention relates to a submerged hollow fiber membrane module that includes a partition membrane having a slanted slit-shaped opening, and thus capable of not only improving operating efficiency of a hollow fiber membrane module by accelerating the water flow, but also allowing easy discharge of highly concentrated raw water around the hollow fiber membrane to the outside of the module during a reverse wash process.



ABSTRACT

The present invention relates to a submerged hollow fiber
membrane module that includes a partition membrane having a
5 slanted slit-shaped opening, and thus capable of not only
improving operating efficiency of a hollow fiber membrane
module by accelerating the water flow, but also allowing easy
discharge of highly concentrated raw water around the hollow
fiber membrane to the outside of the module during a reverse
10 wash process.

DESCRIPTION

SUBMERGED HOLLOW FIBER MEMBRANE MODULE HAVING PARTITION MEMBRANE WITH SLANTED OPENINGS

Technical Field

The present invention relates to a submerged hollow fiber membrane module, and, more particularly, to a submerged hollow fiber membrane module useful for filtration, etc., in sewage treatment plants and water treatment plants.

Background Art

A hollow fiber membrane module is a filtration device using, as separation membranes, hollow fibers which are thin fibers, the surface of which has a myriad of small pores, and the central space of which is empty. This module is configured such that, among a multi-component liquid mixture, a material larger than the pores is excluded, and only a specific material smaller than the pores is selectively passed therethrough and thus effectively recovered. Such a hollow fiber membrane module has been widely utilized in ultrafiltration or microfiltration for preparing sterile water, drinking water, etc., and is recently applied to secondary or tertiary treatment in sewage treatment plants, or to solid-liquid separation of purification tanks. The hollow fiber membrane module used for sewage treatment is classified

into an external circulation mode and a module immersion mode, depending on the type in which hollow fiber membranes are applied to aeration tanks.

When a partition membrane is provided at the lower
5 portion of a submerged membrane module, an upward water flow is formed, resulting in cross-flow. As such, when the distance between the lower header and the partition membrane of the module is increased, the upward water flow does not circulate in bundles of hollow fibers which are densely
10 packed. Also, in the case where there is no space between the lower header and the partition membrane, the size of a raw water supply hole of the lower header is limited by the space which is occupied with the bundles of hollow fibers, and thus a sufficient upward water flow is not formed, and operating
15 efficiency may decrease in a reverse washing process.

Disclosure

Technical Problem

Accordingly, an object of the present invention is to
20 provide a submerged hollow fiber membrane module, which may increase operating efficiency of the hollow fiber membrane module and which enables high-concentration raw water around hollow fiber membranes to be easily discharged to the outside of the module in a reverse washing process.

25

Technical Solution

In order to accomplish the above object, an aspect of the present invention provides a submerged hollow fiber membrane module, including an upper header and a lower header which are positioned parallel to each other by a predetermined distance therebetween; hollow fiber membranes arranged in a perpendicular direction between the upper header and the lower header; and a partition membrane provided to enclose the hollow fiber membranes and having slanted slit-shaped openings.

In a further aspect, the present invention provides a submerged hollow fiber membrane module, comprising: an upper header and a lower header which are positioned parallel to each other by a predetermined distance therebetween; hollow fiber membranes arranged in a perpendicular direction between the upper header and the lower header; and a partition membrane provided to enclose the hollow fiber membranes and having slit-shaped openings slanted relative to a longitudinal direction of the hollow fiber membranes, wherein the slit-shaped openings are slanted downwards in an outward direction from an inside of the partition membrane.

Accordingly, in one aspect the present invention resides in a submerged hollow fiber membrane module, comprising: an upper header and a lower header which are positioned parallel to each other by a predetermined distance therebetween; hollow

fiber membranes arranged in a perpendicular direction between the upper header and the lower header; and a partition membrane provided to enclose the hollow fiber membranes and having slit-shaped openings slanted relative to a longitudinal direction of the hollow fiber membranes, wherein the slit-shaped openings are slanted downwards towards the lower header in an outward direction from an inside of the partition membrane, whereby the orientation of said slit-shaped openings restricts outward diffusion of water from said inside of said partition membrane during filtration.

In yet another aspect, the present invention provides a submerged hollow fiber membrane module, comprising: an upper header and a lower header which are positioned parallel to each other by a predetermined distance therebetween; hollow fiber membranes arranged in a perpendicular direction between the upper header and the lower header; and a partition membrane provided to enclose the hollow fiber membranes and having slit-shaped openings slanted relative to the perpendicular direction, wherein the slit-shaped openings are slanted downwards towards the lower header in an outward direction from an inside of the partition membrane, whereby during filtration with an upward water flow towards the upper header, the orientation of said slit-shaped openings

restricts outward diffusion of the water from said inside of said partition membrane.

In yet another aspect, the present invention provides a submerged hollow fiber membrane module, comprising: an upper header and a lower header which are positioned parallel to each other by a predetermined distance therebetween; hollow fiber membranes arranged in a perpendicular direction between the upper header and the lower header; and a partition wall provided to enclose the hollow fiber membranes and having slit-shaped openings slanted relative to the perpendicular direction, wherein the slit-shaped openings are formed through from an inside of the partition wall to an outside of the partition wall, and slanted downwards towards the lower header in an outward direction from the inside of the partition wall, whereby during filtration with an upward water flow towards the upper header, the orientation of said slit-shaped openings restricts outward diffusion of the water from said inside of said partition wall.

In yet another aspect, the present invention provides a submerged hollow fiber membrane module, comprising: an upper header and a lower header which are positioned parallel to each other by a predetermined distance therebetween; hollow fiber membranes arranged in a perpendicular direction between the upper header and the lower header; and a partition wall provided

to enclose the hollow fiber membranes and having slit-shaped openings slanted relative to the perpendicular direction, wherein each of the slit-shaped openings includes an inlet on an outer surface side of the partition wall, and an outlet on an inner surface side of the partition wall, wherein the inlet and the outlet for each of the openings are connected at a slant so that the outlet is closer to the upper header than the inlet along a longitudinal direction of the hollow fiber membranes, such that each of the slit-shaped openings is configured to accelerate an upward water flow as water flows in via the inlet at the outer surface side of the partition wall and flows out via the inlet at the inner surface side of the partition wall, so that upon filtration, the upward water flow formed inside of the partition wall does not diffuse to the outside of the partition wall, and raw water outside of the partition wall is introduced into the inside of the partition wall.

Advantageous Effects

According to the present invention, a submerged hollow fiber membrane module is configured such that an upward water flow is formed around separation membranes even in the presence of a small amount of air, thus enabling cross-flow filtration, and consequently reducing pollution of the separation membranes due to extended operation. Thus, chemical or physical cleaning cycles can be decreased, and the lifetime of the separation

membranes can be prolonged, thereby lowering maintenance and repair costs of clean water or sewage/wastewater treatment plants.

Description of Drawings

FIG. 1 is a schematic perspective view illustrating a

submerged hollow fiber membrane module according to an embodiment of the present invention; and

FIG. 2(a) is a partially enlarged view illustrating openings 41 when viewed from the front, and FIG. (b) is a
 5 partially enlarged view illustrating the openings 41 when the module is cut in a longitudinal direction.

<Description of the Reference Numerals in the Drawings>

10:	upper header	20:	lower header
30:	hollow fiber membrane	40:	partition membrane
10 41:	slit-shaped opening	50:	upper opening

Mode for Invention

Hereinafter, a detailed description will be given of embodiments of the present invention with reference to the
 15 appended drawings. Also, in the description of the present invention, a detailed description of known general functions or constructions related thereto is omitted.

According to the present invention, a submerged hollow fiber membrane module may include a partition membrane having
 20 slanted slit-shaped openings, so that an upward water flow is accelerated, thus increasing operating efficiency of the hollow fiber membrane module, and enabling high-concentration raw water around hollow fiber membranes to be easily discharged to the outside of the module upon reverse washing.

25 FIG. 1 schematically illustrates the outer appearance of

the submerged hollow fiber membrane module according to an embodiment of the present invention. With reference to FIG. 1 the submerged hollow fiber membrane module according to the present invention may be configured such that hollow fiber
5 membranes 30 are provided in a perpendicular direction between a lower header 20 for supplying air to the hollow fiber membranes 30 and an upper header 10 connected to the hollow fiber membranes 30, and provided between the upper header 10 and the lower header 20 of the hollow fiber membrane module is
10 a partition membrane 40 having slanted slit-shaped openings 41 to enclose the hollow fiber membranes 30.

The partition membrane 40 may include the slanted slit-shaped openings 41 so that, upon filtration, an upward water flow formed in the module does not diffuse to the outside of
15 the module, and raw water outside the module is introduced into the module, thus accelerating the upward water flow, and also, upon reverse washing, high-concentration raw water around the hollow fiber membranes may be easily discharged to the outside of the module, together with a downward water flow
20 formed in the module.

The interval between the slits may be 0.1 ~ 30 cm, but is not necessarily limited thereto.

FIG. 2 is of partially enlarged views of the slanted slit-shaped openings 41 of the partition membrane of the

submerged hollow fiber membrane module of FIG. 1, wherein FIG. 2(a) is a partially enlarged view illustrating the openings 41 when viewed from the front, and FIG. 2(b) is a partially enlarged view illustrating the openings 41 when the module is
5 cut in a longitudinal direction.

With reference to FIG. 2, the slit-shaped openings 41 of the partition membrane of the submerged hollow fiber membrane module according to the embodiment of the present invention are slanted downwards in an outward direction from an inside
10 of the partition membrane, and thus, upon filtration, the upward water flow formed in the module does not diffuse to the outside of the module, and raw water outside the module may be supplied into the module. Also, because of such a configuration, upon reverse washing, high-concentration raw
15 water around the hollow fiber membranes may be easily discharged to the outside of the module together with a downward water flow formed in the module.

The partition membrane may include an upper opening 50 which is large at the top portion thereof. When such a large
20 upper opening 50 is formed in this way, air supplied from the lower portion of the module easily escapes from the upper end of the module to the outside, thus facilitating the control of flow of air.

The hollow fiber membranes 30 may be configured such that
25 the average distance between the fibers is 0.01 ~ 50 mm but is

not necessarily limited thereto. Although the hollow fiber membranes have to be arranged as densely as possible, when the distance between the membranes is excessively decreased to be not more than 0.01 mm, it is difficult to achieve flow of raw
5 water and air between the membranes, undesirably causing blockage between the membranes. In contrast, when the distance between the membranes is increased to be not less than 50 mm, the membrane packing density of the module may decrease, undesirably deteriorating water treatment
10 capability.

The lower header 20 may be provided with an air inlet (not shown), and the air inlet may have a plurality of through-holes for controlling the supply of air so that air is uniformly supplied.

15 A better understanding of the present invention may be obtained via the following examples which are set forth to illustrate, but are not to be construed as limiting the present invention.

20 Preparation Example 1: Preparation of hollow fiber membrane module

A submerged hollow fiber membrane module having a membrane area of 45 m² was prepared, including an upper header and a lower header positioned parallel to each other by a

predetermined distance therebetween, hollow fiber membranes arranged in a perpendicular direction between the upper header and the lower header, and a partition membrane provided to enclose the hollow fiber membranes and having slit-shaped openings slanted at 45° relative to the longitudinal direction of the hollow fiber membranes.

Comparative Preparation Example 1: Preparation of hollow fiber membrane module

10 A submerged hollow fiber membrane module having the same configuration was prepared as in Preparation Example 1, with the exception that the partition membrane had slit-shaped openings orthogonal to the longitudinal direction of the hollow fiber membranes.

15

[Evaluation of performance of submerged hollow fiber membrane module]

To measure water permeability of the submerged hollow fiber membrane modules of Preparation Example 1 and Comparative Preparation Example 1, a water tank was filled with pure water containing 50 ppm of skim milk powder (protein in skim milk powder is present in the form of protein molecules and aggregates thereof in an aqueous solution, and is adsorbed to the surface of a separation membrane via hydrophobic bonding and undesirably may cause membrane

20

25

blockage), and the submerged hollow fiber membrane module was mounted thereto and the water permeability thereof was measured periodically while operating the module at a suction pressure of 380 mmHg. The results are shown in Table 1 below.

[Table 1]

		Operating time							
		0 hr	0.5 hr	1 hr	1.5 hr	2 hr	4 hr	6 hr	8 hr
Prep. Ex. 1	Water permeability (LMH)	312	215	165	153	140	146	153	143
	Decrement (%)	100	69	53	49	45	47	49	46
Comp. Prep. Ex.1	Water permeability (LMH)	323	230	150	122	109	86	75	81
	Decrement (%)	100	71	46	38	34	27	23	25

As is apparent from Table 1, compared to the submerged hollow fiber membrane module of Comparative Preparation Example 1, water permeability of the submerged hollow fiber membrane module of Preparation Example 1 was less decreased because of the slit-shaped openings slanted at 45° relative to the longitudinal direction of the hollow fiber membranes, and pollution resistance became higher.

Although the preferred embodiments of the present invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope of the invention as disclosed in the accompanying claims.

We Claim:

1. A submerged hollow fiber membrane module, comprising:
an upper header and a lower header which are positioned parallel to each other by a predetermined distance therebetween;

hollow fiber membranes arranged in a perpendicular direction between the upper header and the lower header; and

a partition wall provided to enclose the hollow fiber membranes and having slit-shaped openings slanted relative to the perpendicular direction,

wherein each of the slit-shaped openings includes an inlet on an outer surface side of the partition wall, and an outlet on an inner surface side of the partition wall, wherein the inlet and the outlet for each of the openings are connected at a slant so that the outlet is closer to the upper header than the inlet along a longitudinal direction of the hollow fiber membranes,

such that each of the slit-shaped openings is configured to accelerate an upward water flow as water flows in via the inlet at the outer surface side of the partition wall and flows out via the inlet at the inner surface side of the partition wall,

so that upon filtration, the upward water flow formed inside of the partition wall does not diffuse to the outside of the partition wall, and raw water outside of the partition wall is introduced into the inside of the partition wall.

2. The submerged hollow fiber membrane module of claim 1, wherein an interval between the slit-shaped openings in an

axial direction is 0.1 - 30 cm, said slit-shaped openings being adjacent to each other.


3. The submerged hollow fiber membrane module of claim 1, wherein the partition wall includes a top portion proximate to the upper header, the top portion defining an upper opening.

4. The submerged hollow fiber membrane module of claim 1, wherein the hollow fiber membranes are configured such that an average distance between fibers is 0.01 - 50 mm, said average distance being an average amount of space between respective membrane walls of the fibers.

5. The submerged hollow fiber membrane module of claim 1, wherein the lower header includes an air inlet.

6. The submerged hollow fiber membrane module of claim 1, wherein the slit-shaped openings are slanted at 45° relative to the perpendicular direction.

【Fig. 1】

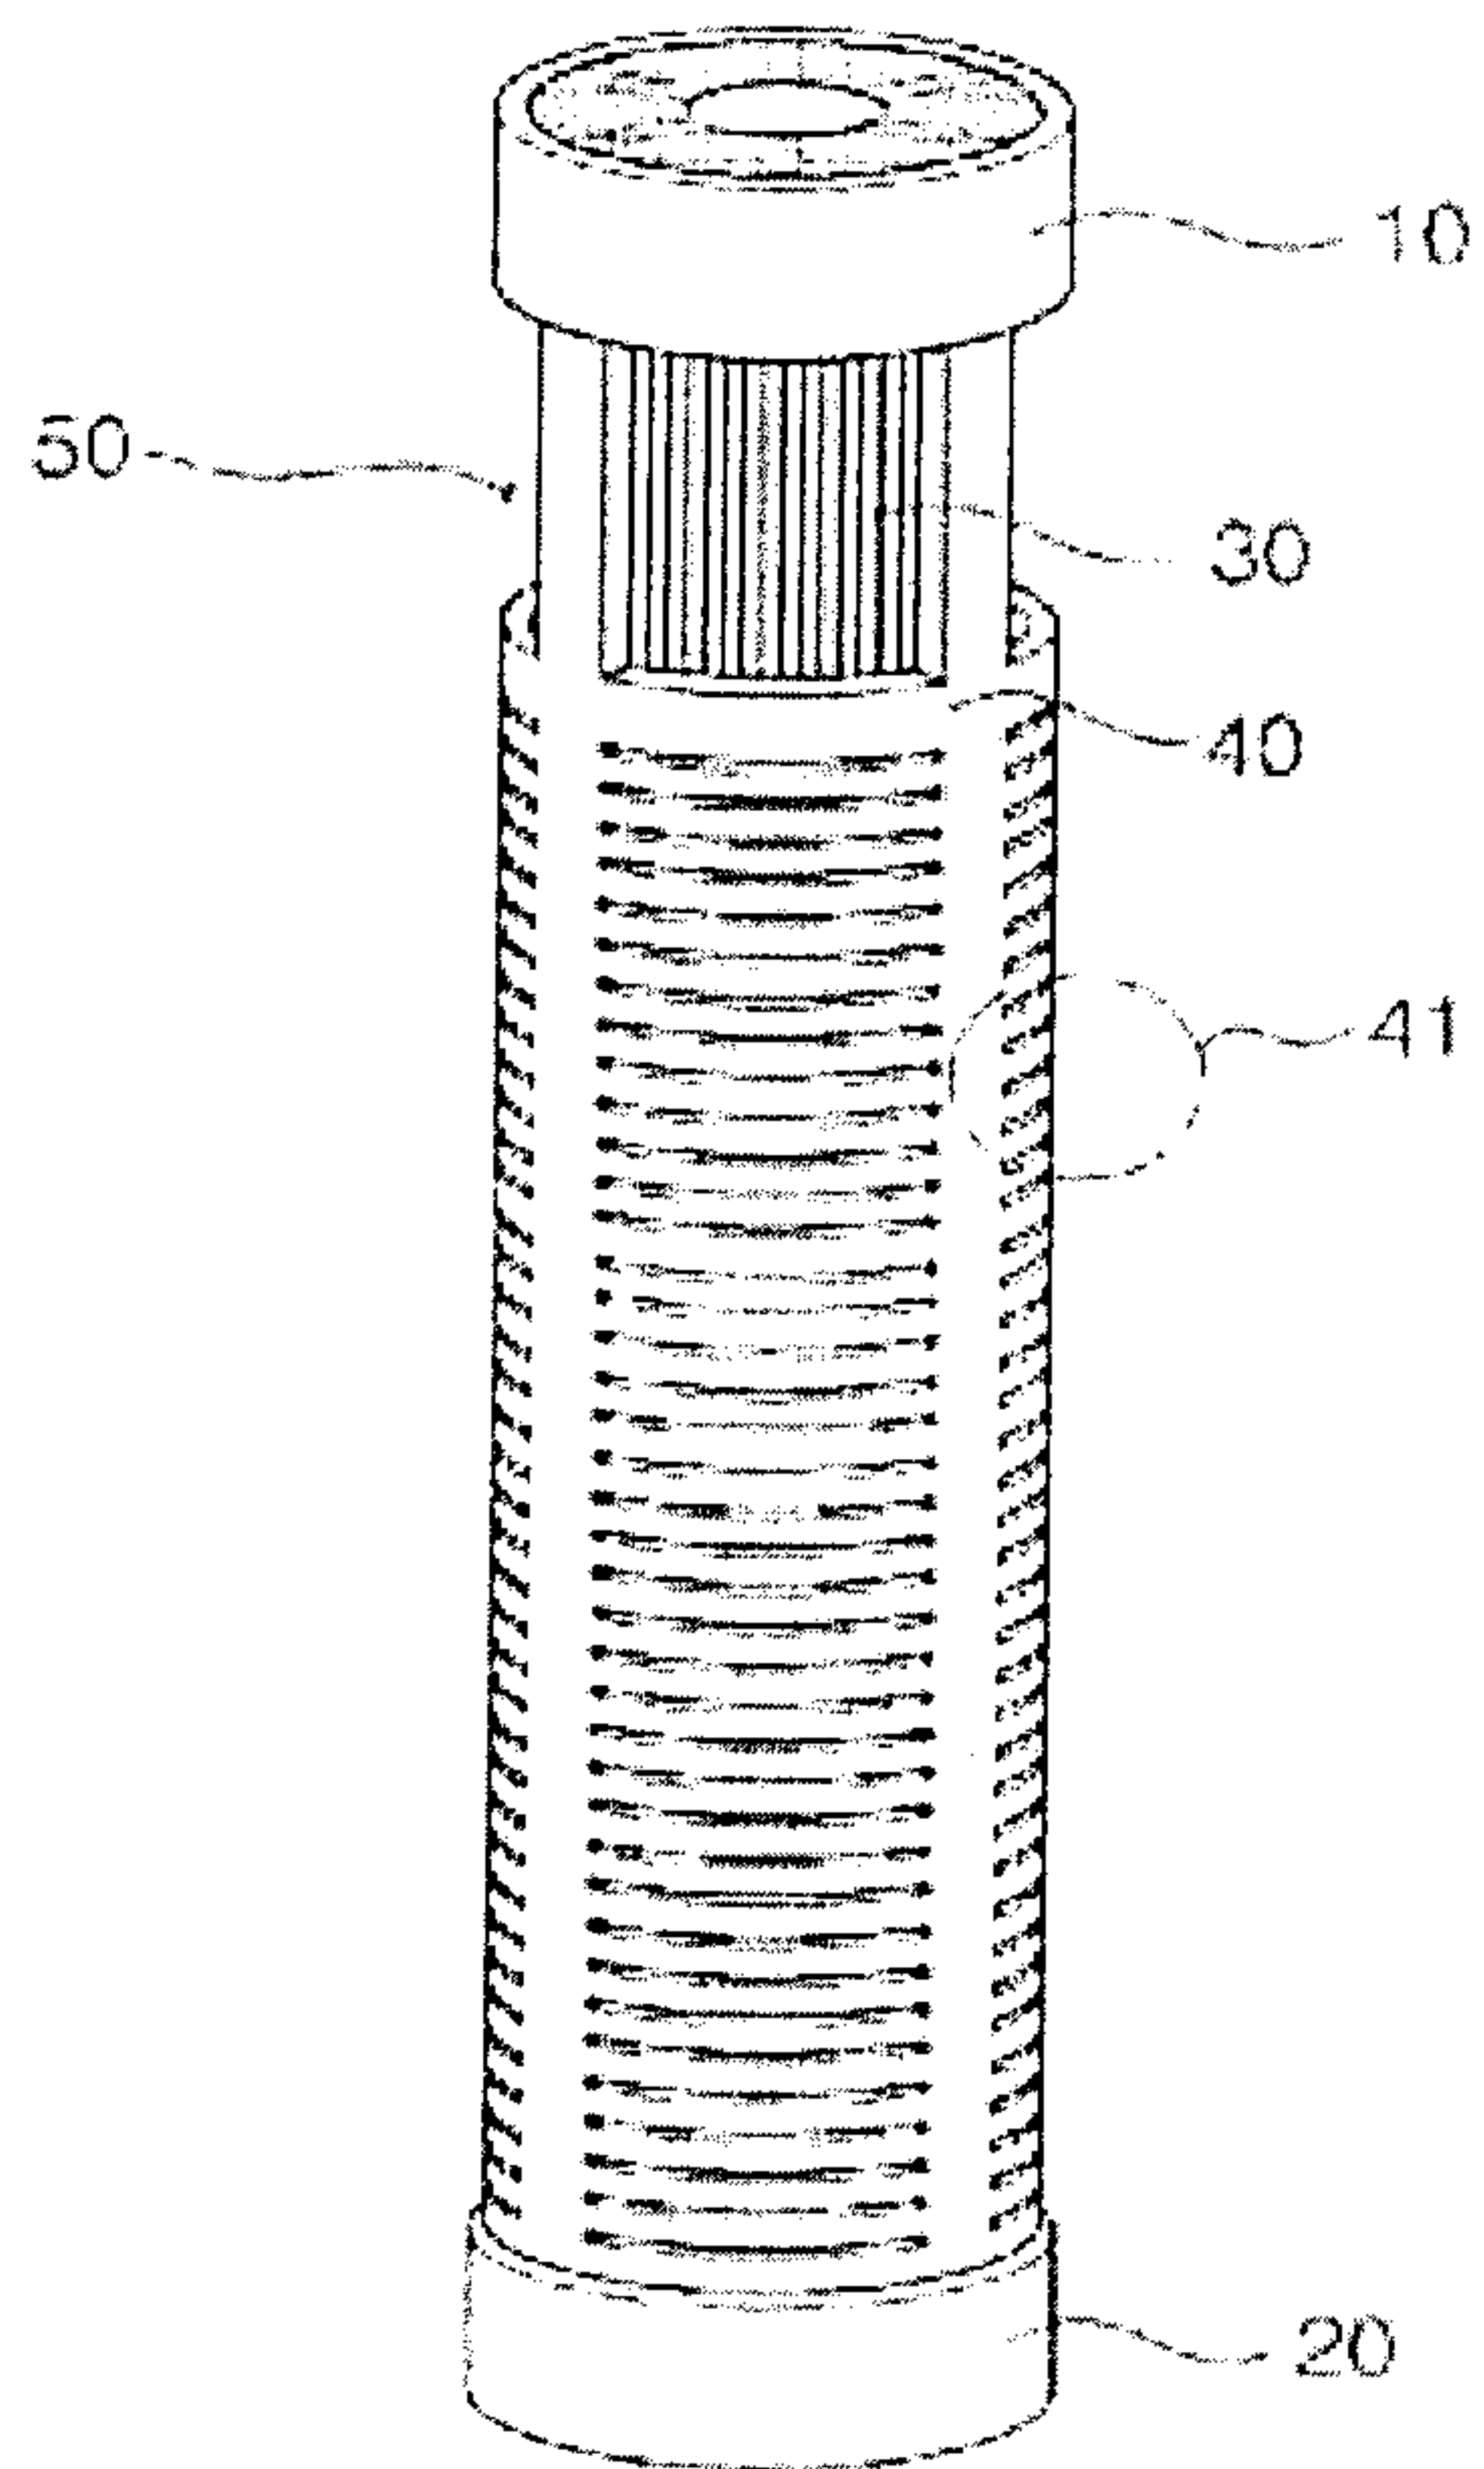

【Fig. 2】

