



US 20050233675A1

(19) **United States**

(12) **Patent Application Publication**

**Marine et al.**

(10) **Pub. No.: US 2005/0233675 A1**

(43) **Pub. Date: Oct. 20, 2005**

(54) **ANIMATED MULTI-PERSONA TOY**

**Related U.S. Application Data**

(75) Inventors: **Jon C. Marine**, Fullerton, CA (US);  
**Tara McGrath**, Hermosa Beach, CA (US);  
**Joyce Mesch**, Hamburg, NY (US);  
**Kevin W. Gray**, Thousand Oaks, CA (US);  
**Ok-Soo Choi**, Los Angeles, CA (US)

(63) Continuation of application No. 10/672,957, filed on Sep. 25, 2003.

(60) Provisional application No. 60/414,128, filed on Sep. 27, 2002. Provisional application No. 60/423,237, filed on Oct. 31, 2002.

Correspondence Address:  
**KOLISCH HARTWELL, P.C.**  
**520 S.W. YAMHILL STREET**  
**SUITE 200**  
**PORTLAND, OR 97204 (US)**

**Publication Classification**

(51) **Int. Cl.<sup>7</sup>** ..... **A63H 3/00**  
(52) **U.S. Cl.** ..... **446/268**


(73) Assignee: **Mattel, Inc.**

(57) **ABSTRACT**

(21) Appl. No.: **11/152,493**

(22) Filed: **Jun. 13, 2005**

The present invention provides animated toys adapted to imitate multiple personas.

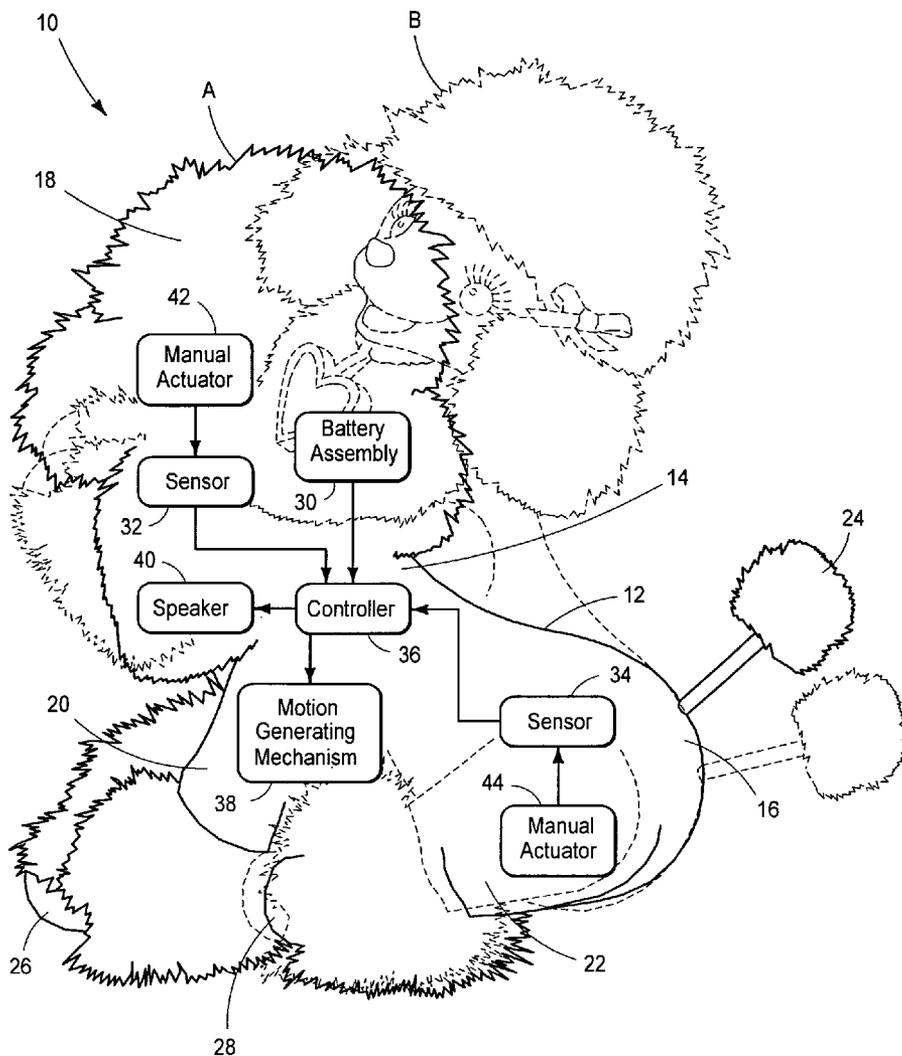

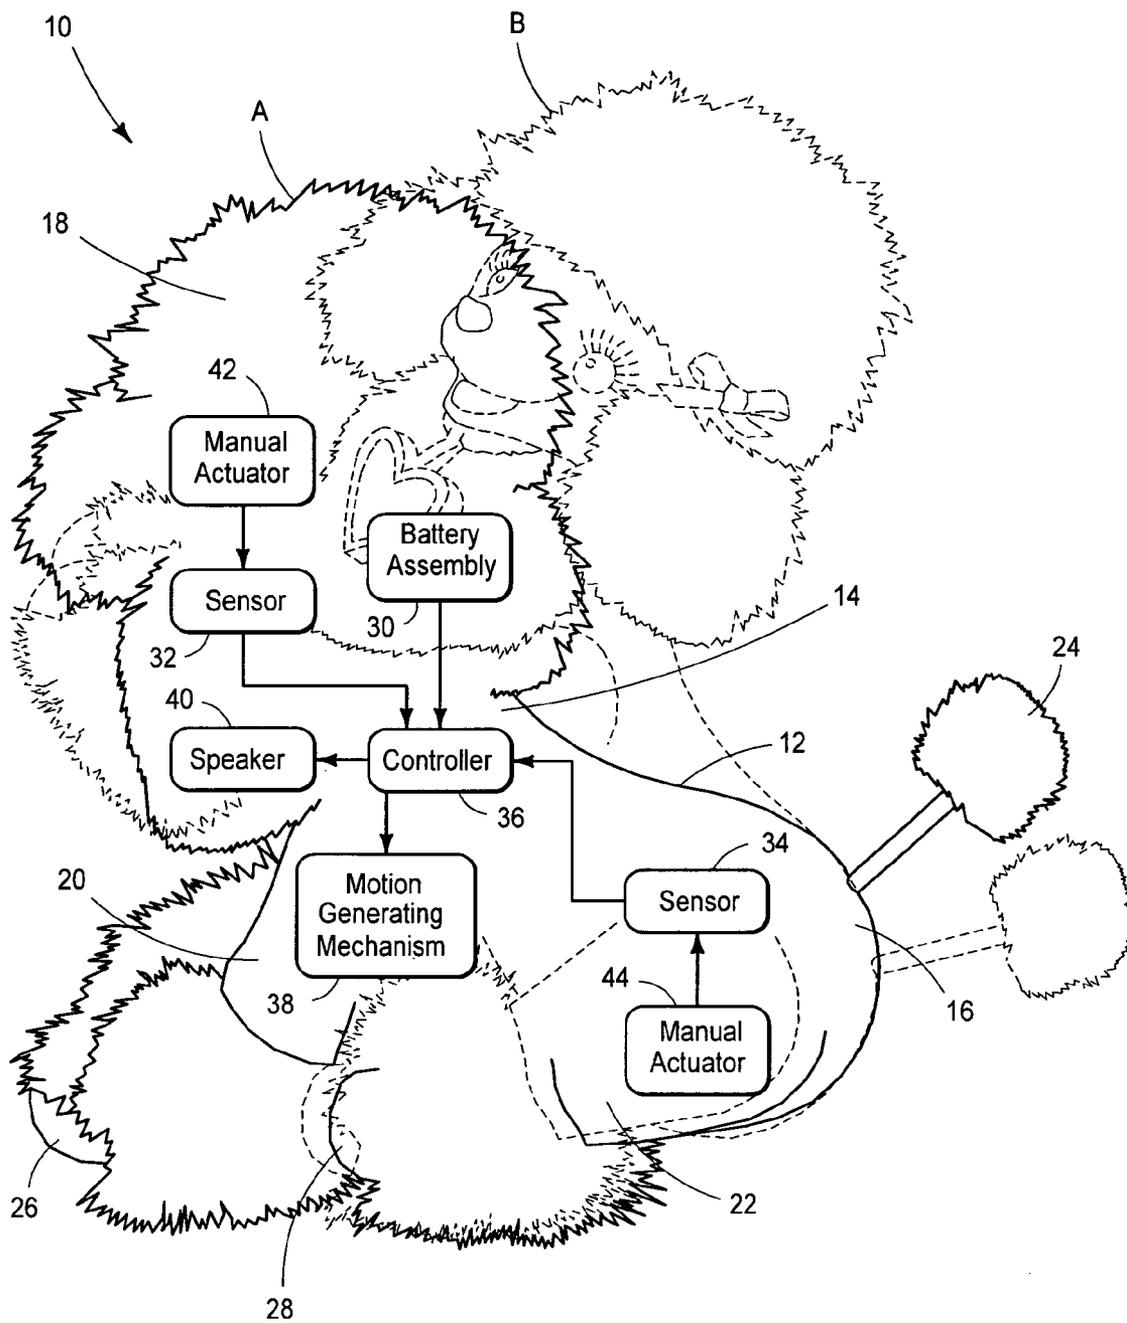


FIG. 1

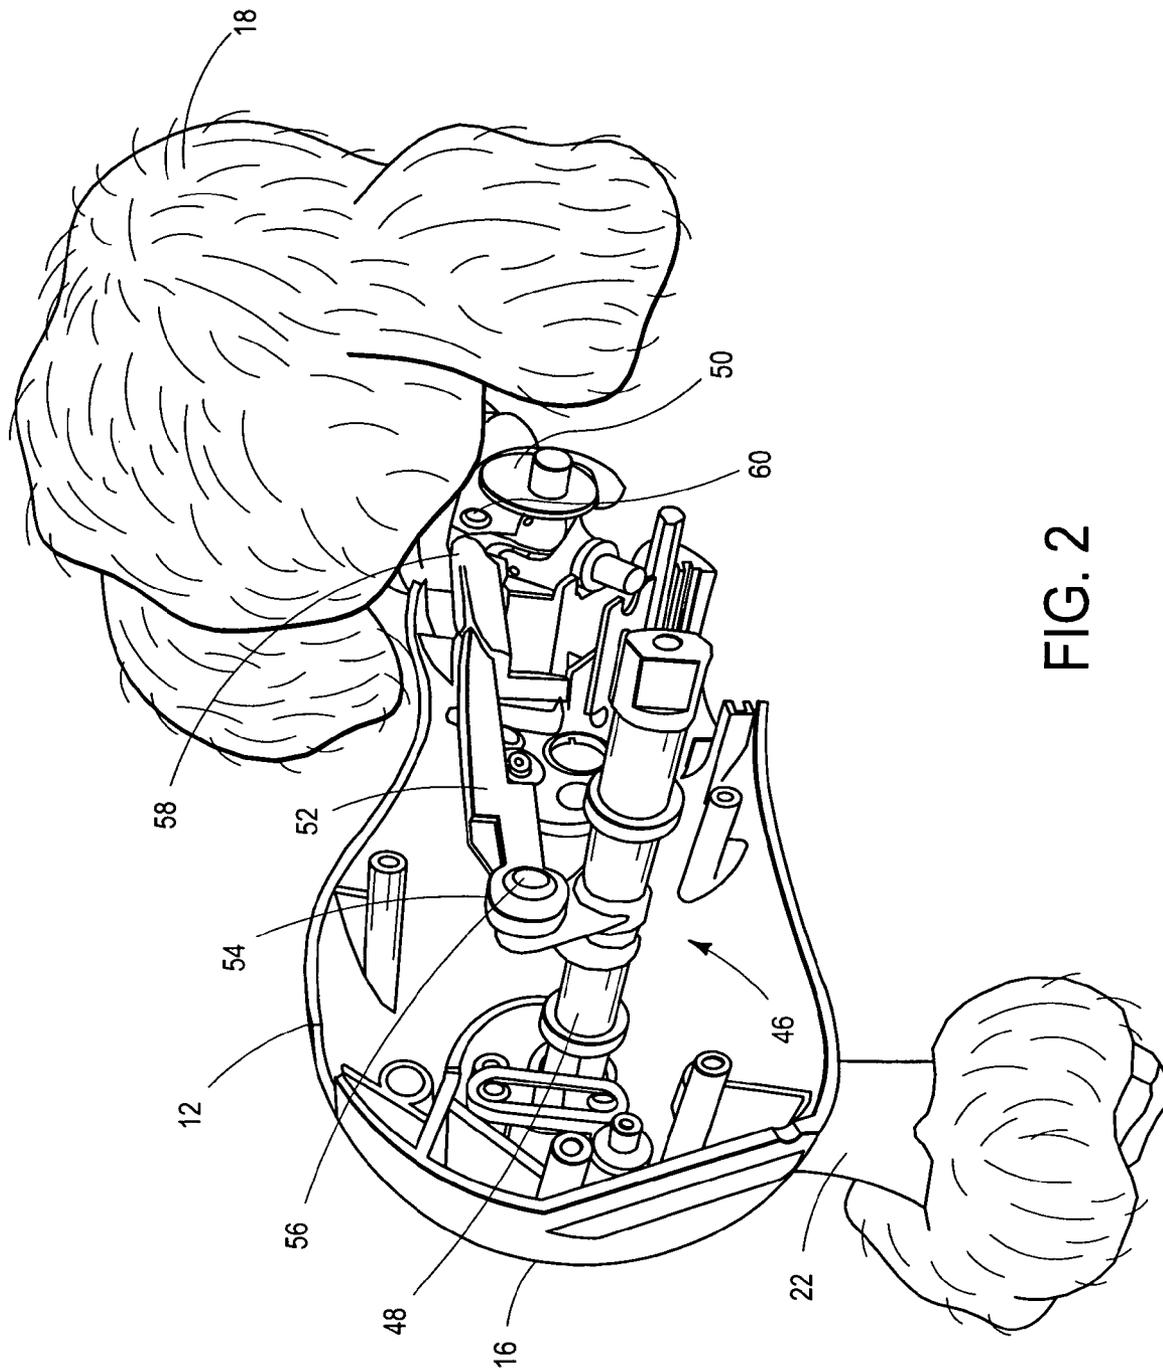


FIG. 2

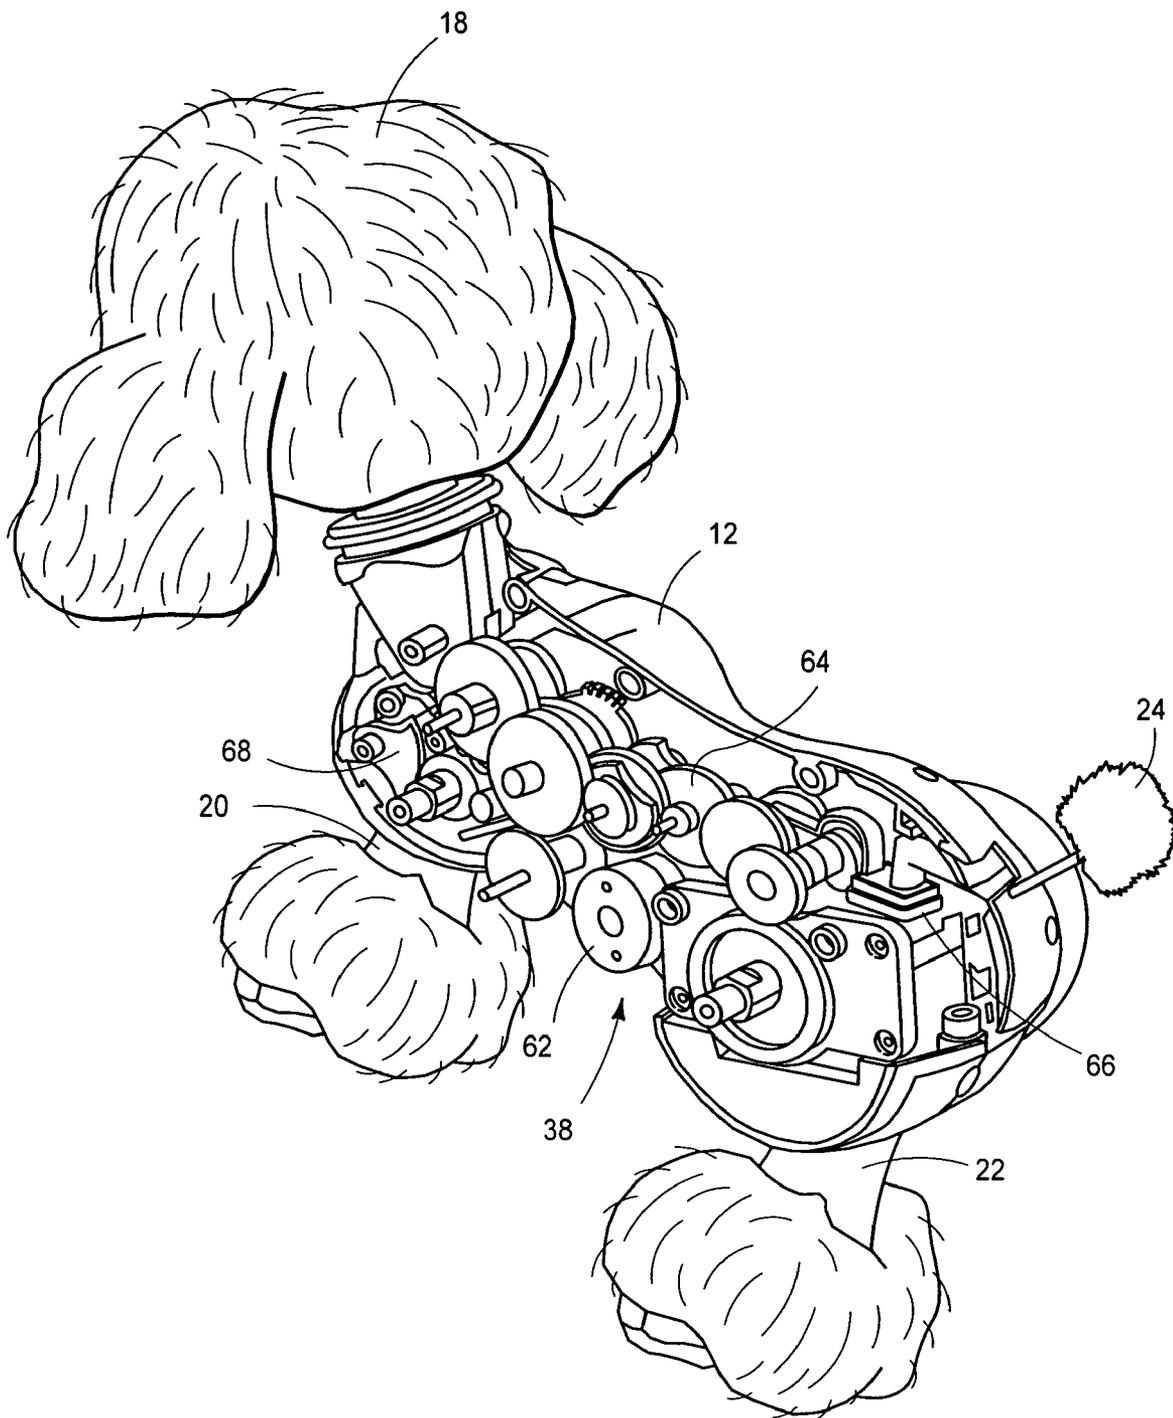


FIG. 3

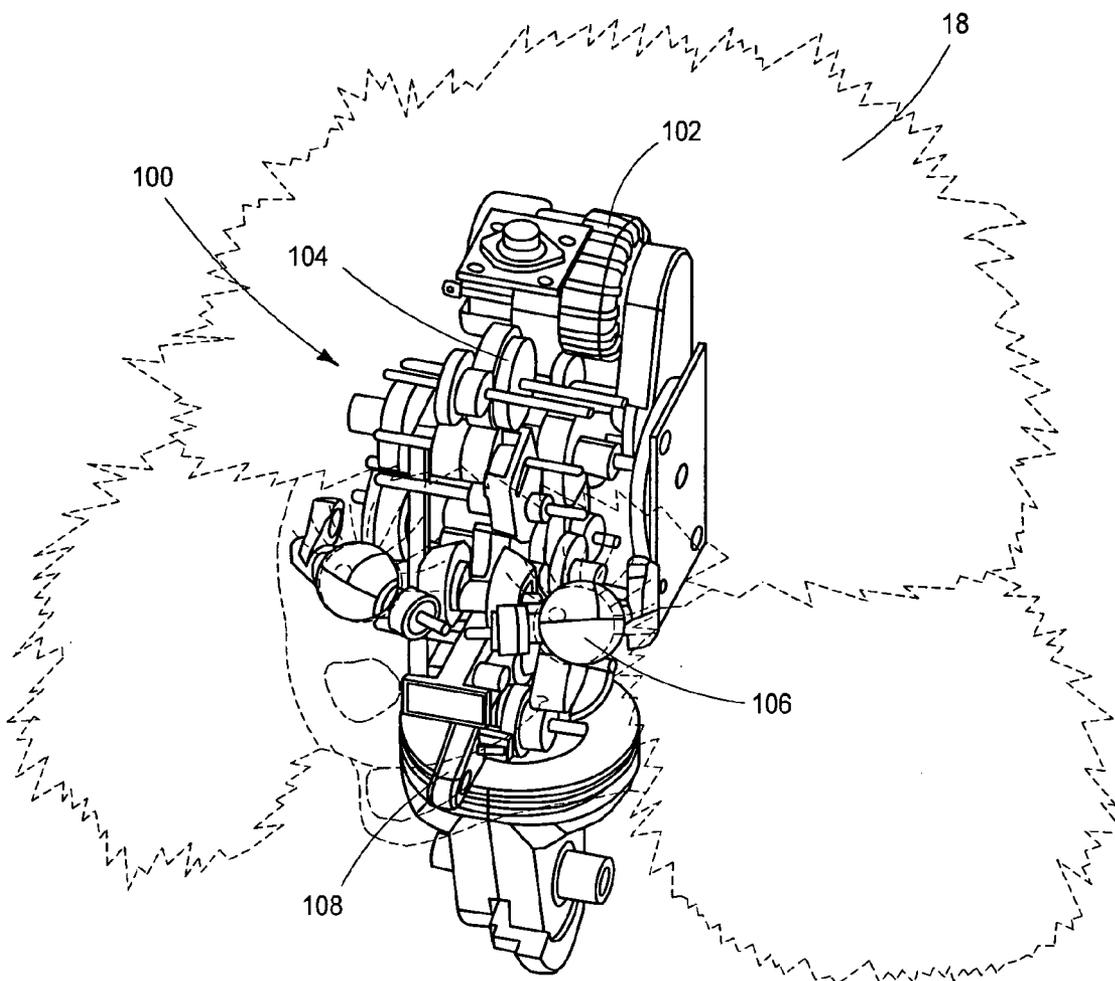


FIG. 4

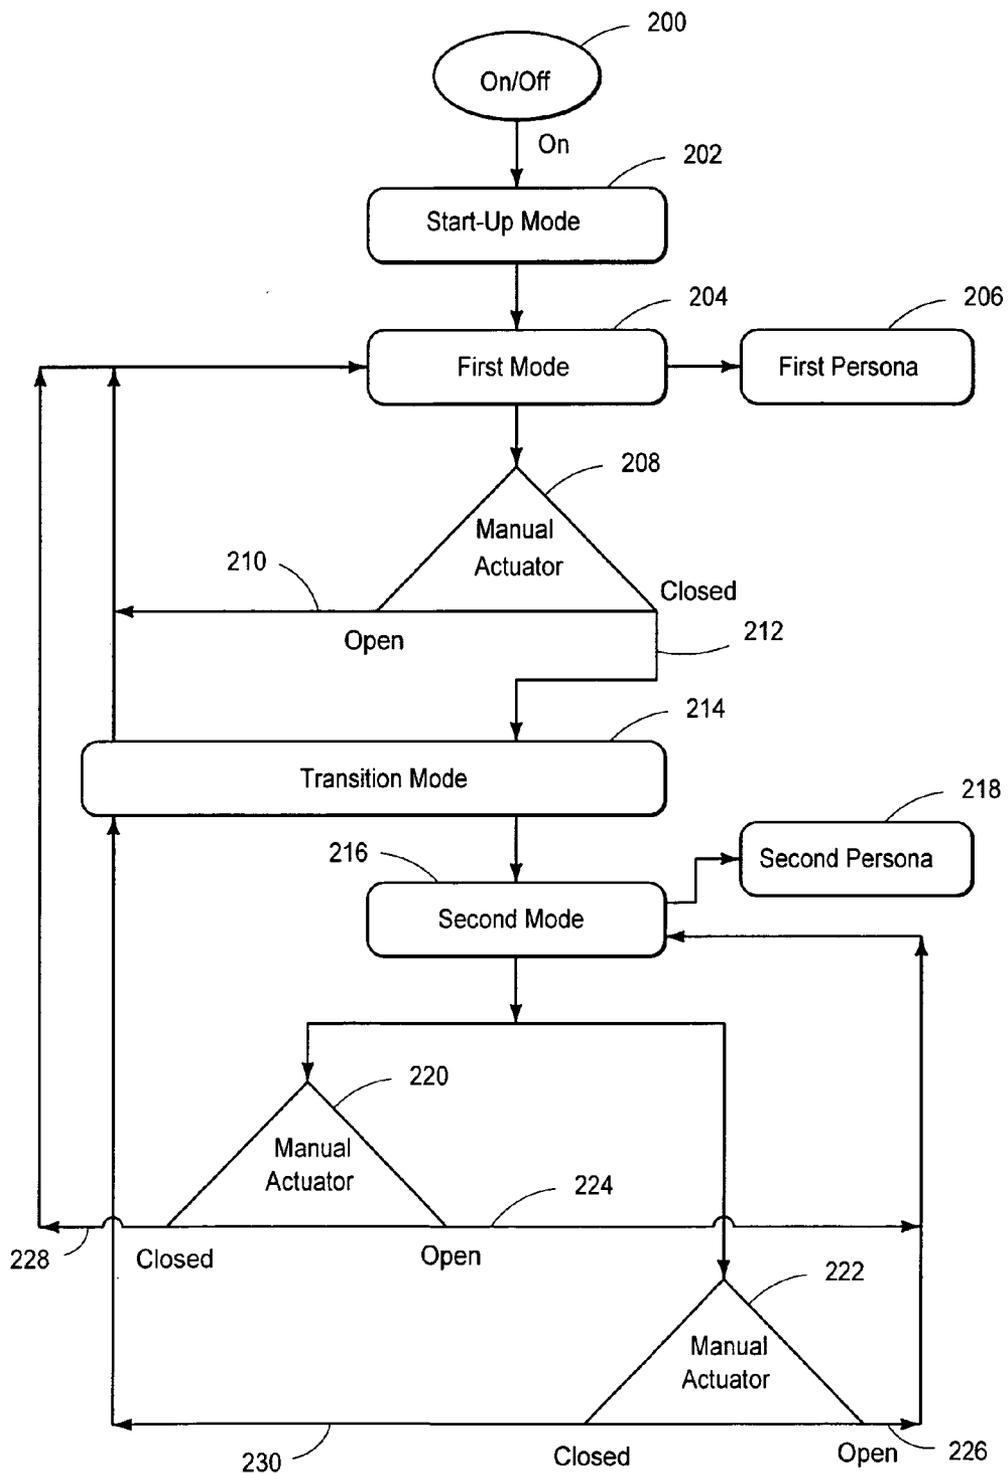


FIG. 5

**ANIMATED MULTI-PERSONA TOY**  
**CROSS-REFERENCE TO RELATED**  
**APPLICATIONS**

[0001] This application is a continuation of U.S. patent application Ser. No. 10/672,957, filed Sep. 25, 2003 and entitled "Animated Multi-Persona Toy," which claims priority under 35 U.S.C. 119(e) to U.S. Provisional Patent Application Ser. No. 60/414,128 entitled "Animated Multi-Persona Toy," filed Sep. 27, 2002; and U.S. Provisional Patent Application No. 60/423,237 entitled "Animated Multi-Persona Toy," filed Oct. 31, 2002, the entire disclosures of all three patent applications are herein incorporated by reference for all purposes.

**BACKGROUND**

[0002] The present invention relates generally to animated toys, and more particularly to those toys adapted to imitate multiple personas.

[0003] In recent years animation in children's toys has become very popular. Animated toys may include a system for generating motion, typically driven by small rotating motors that connect to gears, pulleys, or levers. Some animation systems also include electronics for controlling the animation, and for controlling speech. Examples of such toys, including those that imitate common household pets such as dogs, cats, or dragons, are disclosed in U.S. Pat. Nos. 4,808,142; 4,850,930; 4,900,289; 4,923,428; 5,074,821; 5,281,180; 5,324,225; 5,501,627; 5,636,994; 5,655,945; 5,802,488; 5,912,454; 6,149,490; and 6,322,420; and U.S. Patent Application Nos. 20020016128 and 20020078363. The disclosures of each of those patents and patent applications are herein incorporated by reference.

**SUMMARY**

[0004] The present invention provides animated toys adapted to imitate multiple personas. The advantages of the present invention will be understood more readily after a consideration of the drawings and the Detailed Description of the Preferred Embodiment.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0005] FIG. 1 is a side view of a multi-persona toy in first and second positions, including a schematic representation of its major components.

[0006] FIG. 2 is an exploded view of the body of the toy shown in FIG. 1, including a leg assembly that rotatably connects the head and hind legs of the toy.

[0007] FIG. 3 is an exploded view of the body of the toy shown in FIG. 1, including a motion generating mechanism that moves various parts of the toy.

[0008] FIG. 4 is an exploded view of the head of another embodiment of the toy shown in FIG. 1, including a motion generating mechanism that moves various parts of the toy

[0009] FIG. 5 is a schematic representation of an interactive feature of the toy shown in FIG. 1 showing different modes of interactivity.

**DETAILED DESCRIPTION OF THE**  
**PREFERRED EMBODIMENT**

[0010] Referring to FIG. 1, a toy constructed according to the present invention is indicated generally at 10, and

preferably resembles a pet. Toy 10 may be manipulated into a plurality of positions, including a first position A and a second position B. Preferably, first position A is a sitting position and second position B is an upright position. In first position A, toy 10 preferably imitates a first persona, while in second position B, toy 10 preferably imitates a second persona. The ability to manipulate toy 10 into a plurality of positions may allow the user to manually select the desired persona.

[0011] Toy 10 may include a body or torso 12 including an anterior end 14 and a posterior end 16. Body 12 may include a head 18 and may have appendages, including front legs 20, hind legs 22, and a tail 24, all of which may be rotatably connected to body 12. Preferably, head 18 and front legs 20 are adjacent to anterior end 14, and hind legs 22 and tail 24 are adjacent to posterior end 16. Head 18 may include eyes, ears, nose, and mouth to provide the external appearance of a pet and/or human. Front legs 20 may include front feet 26, and hind legs 22 may include hind feet 28.

[0012] Internal components of toy 10 are represented schematically in FIG. 1, which may include a battery assembly 30, sensors 32 and 34, a controller 36, a motion-generating mechanism 38, and a speaker 40. Preferably, those internal components allow toy 10 to interact with users via sensors 32 and 34 and imitate multiple personas via motion-generating mechanism 38 and speaker 40.

[0013] Battery assembly 30 generally includes any portion of toy 10 configured or adapted to provide electrical power, including electrical power for the sensors, controller, motion-generating mechanism, and speaker. Battery assembly 30 may be incorporated in body 12 and/or head 18. Preferably, battery assembly 30 is incorporated in head 18.

[0014] Sensors 32 and 34 generally include any portion of toy 10 configured or adapted to provide inputs to controller 36. Sensors 32 and 34 may include touch, positional, light, audio, and/or other suitable sensors. In addition, sensors 32 and 34 may be incorporated in body 12 and/or head 18.

[0015] Sensors 32 and 34 may be actuated by various manual actuators 42 and 44. Manual actuators 42 and 44 allow users to activate sensors 32 and 34, respectively. Manual actuators 42 and 44 may include push buttons, cords, levers, or any other suitable actuators. In addition, manual actuators 42 and 44 may be incorporated in front legs 20, hind legs 22, and/or tail 24, such that movement of those body parts in manipulating toy 10 from first position A to second position B, from second position B to first position A, and/or various other positions, activates sensors 32 and 34. Moreover, manual actuators 42 and 44 may be located on body 12 and/or head 18. Additional sensors and manual actuators also may be included and incorporated in and/or located on body 12, head 18, front legs 20, hind legs 22, and/or tail 24. Preferably, toy 10 includes a touch sensor with manual actuator and a positional sensor with manual actuator in body 12, and a light sensor and two touch sensors in head 18.

[0016] Controller 36 generally includes any portion of toy 10 configured or adapted to receive inputs from sensors 32 and 34 and direct the motion-generating mechanism 38 and/or provide audio output via speaker 40. Controller 36 may include a control program (not shown) that processes inputs from sensors 32 and 34 and outputs animation

through motion-generating mechanism **38** and/or audio through speaker **40**. Controller **36** may be incorporated in body **12** and/or head **18**. Preferably, controller **36** is incorporated in head **18**.

[0017] Motion-generating mechanism **38** generally includes any portion of toy **10** configured or adapted to move various parts of toy **10**, including head **18**, front legs **20**, hind legs **22**, and/or tail **24**, and/or various combinations of those parts. In addition, motion-generating mechanism **38** may move other parts of toy **10**, such as eyelids, eyes, ears, nose, and mouth on head **18**, and various combinations of those parts. Preferably, hind legs **22** are not driven by motion-generating mechanism **38** to allow manual manipulation of toy **10** into different positions, including first position A, second position B, and/or other positions. Moreover, motion-generating mechanism **38** may be incorporated in body **12** and/or head **18**. Preferably, motion-generating mechanism **38** is incorporated in head **18**.

[0018] Speaker **40** generally includes any portion of toy **10** configured or adapted to provide audio output consistent with multiple personas. Speaker **40** may be incorporated in body **12** and/or head **18**. Preferably, speaker **40** is incorporated in body **12**.

[0019] Referring to FIG. 2, body **12** also may include a leg assembly **46**. Leg assembly **46** generally includes any portion of toy **10** configured or adapted to movably connect head **18** to hind legs **22**, such that moving head **18** moves hind legs **22**, and/or moving hind legs **22** moves head **18**. Leg assembly **46** may include a first pivot member **48**, a second pivot member **50**, and a connecting rod **52**. First pivot member **48** is connected to hind legs **22** and is configured or adapted to allow hind legs **22** to be moved to different positions. First pivot member **48** may be in the form of a rotating shaft or any suitable form. Second pivot member **50** is connected to head **18** and is configured or adapted to allow head **18** to be moved to different positions. Second pivot member **50** may be in the form of a rotating shaft or any suitable form.

[0020] Connecting rod **52** may include a first end **54**, a first fastener **56**, a second end **58**, and a second fastener **60**. Connecting rod **52** is movably connected to first pivot member **48** on first end **54** by first fastener **56**. Similarly, connecting rod **52** is movably connected to second pivot member **50** on second end **58** by second fastener **60**. Connecting rod **52** may be shaped to conform to body **12** or any suitable form. First fastener **56** and second fastener **60** may be in the form of screws, pins, bolts, or any suitable fastener.

[0021] Leg assembly **46** may be configured or adapted to maintain head **18** at an approximately fixed angle relative to a support plane regardless of the position of hind legs **22**. For example, posterior end **16** of body **12** may define a support plane (not shown) and leg assembly **46** may be configured or adapted to always maintain head **18** to an approximately level orientation relative to that support plane whether toy **10** is in first position A, second position B, or any other position.

[0022] Alternatively, front legs **20** may also be connected to leg assembly **46** by connecting third pivot member via third fastener (both not shown) to connecting rod **52** such that head **18**, front legs **20**, and hind legs **22** move in unison.

In another embodiment, leg assembly **46** may be configured or adapted to movably connect head **18** to front legs **20**, such that moving head **18** moves front legs **20**, and/or moving front legs **20** moves head **18**. In still another embodiment, a second leg assembly (not shown) may be configured or adapted to maintain head **18** at an approximately fixed angle relative to a horizontal support plane regardless of the position of front legs **20**.

[0023] Referring to FIG. 3, motion-generating mechanism **38** may include a motor **62**, a gear train **64**, engagement members **66** and **68**. Motor **62** is configured or adapted to move gear train **64**. Motor **62** may be any suitable motor. Gear train **64** is configured or adapted to move engagement members **66** and **68**. Gear train **64** may include various gears, cams, levers, pulleys, and other suitable components.

[0024] Engagement members **66** and **68** are configured or adapted to move head **18**, front legs **20**, hind legs **22**, and/or tail **24**, and various combinations of those parts. Engagement members **66** and **68** may also be configured or adapted to move other parts of toy **10**, such as eyelids, eyes, ears, nose, and mouth on head **18**, and various combinations of those parts. Engagement members **66** and **68** may in the form of shafts, arms, and other suitable forms. Additional engagement members (not shown) may be provided to move additional parts of toy **10**.

[0025] In addition, a rotary encoder (not shown) may be attached to gear train **64** and may rotate 360° or less between the extremes. The rotary encoder may provide periodic feedback to controller **36** to verify position of the driven elements of toy **10**, including head **18**, front legs **20**, hind legs **22**, and/or tail **24**, and/or various combinations of those parts.

[0026] Moreover, toy **10** may include a hard shell (not shown) to protect internal components discussed below, and outer coverings, such as fur, to provide the external appearance of a pet. Furthermore, accessories (not shown) may be provided with toy **10** to increase user interactivity with toy **10**. Those accessories may include hairclips, brushes, powder puffs, sticker sheets, bracelets, and simulated pet and human food.

[0027] In another embodiment shown in FIG. 4, head **18** may have an additional motion-generating mechanism **100** incorporated therein, which is configured or adapted to move various parts of toy **10**. Preferably, motion-generating mechanism **100** moves the parts associated with head **18**. Motion-generating mechanism **100** may include a motor **102**, a gear train **104**, and engagement members **106** and **108**. Motor **102** is configured or adapted to move gear train **104**. Motor **102** may be any suitable motor. Gear train **104** is configured or adapted to move engagement members **106** and **108**. Gear train **104** may include various gears, cams, levers, pulleys, and other suitable components.

[0028] Engagement members **106** and **108** are configured or adapted to move head **18** and may also be configured or adapted to move other parts of toy **10**, such as eyelids, eyes, ears, nose, and mouth on head **18**, and various combinations of those parts. Engagement members **106** and **108** may in the form of shafts, arms, and other suitable forms. Additional engagement members (not shown) may be provided to move additional parts of toy **10**.

[0029] In addition, a rotary encoder (not shown) may be attached to gear train **104** and may rotate 360° or less

between the extremes. The rotary encoder may provide periodic feedback to controller 36 to verify position of the driven elements of toy 10, including head 18, and other parts of toy 10, such as eyelids, eyes, ears, nose, and mouth on head 18, and/or various combinations of those parts.

[0030] FIG. 5 shows interactive features of toy 10. Toy 10 may include an on/off switch 200. On/off switch 200 may be incorporated in body 12 or head 18. Preferably, on/off switch is incorporated in head 18. When on/off switch 200 is switched on, toy 10 may go to a start-up mode 202.

[0031] Start-up mode 202 may include controller 36 directing motion-generating mechanism 38 and/or providing audio output to speaker 40 to imitate multiple personas. In addition, controller 36 may receive inputs from sensors 32 and 34 and produce suitable outputs through motion-generating mechanism 38 and/or speaker 40. Start-up mode 202 may end based on a fixed length of time elapsing from when on/off switch 200 was first switched on, specific inputs from sensors 32 and 34, specific outputs from controller 36, and/or other suitable criteria. Preferably, start-up mode ends after controller 36 has produced specific outputs through motion-generating mechanism 38 and speaker 40.

[0032] After start-up mode 200 ends, toy 10 preferably goes into a first mode 204. Alternatively, toy 10 may go directly into first mode 204 when on/off switch 200 is switched on without initially going to start-up mode 202. First mode 204 may include controller 36 directing motion-generating mechanism 38 and/or providing audio output to speaker 40 to imitate a first persona 206. Preferably, first persona 206 imitates a pet. In addition, controller 36 may receive inputs from sensors 32 and 34 and produce suitable first persona 206 outputs through motion-generating mechanism 38 and speaker 40. For example, patting toy 10 on head 18 activates sensor 32 sending input to controller 36, which in turn directs motion-generating mechanism to move head 18 and/or tail 24, and produces audio output via speaker 40 to imitate first persona 206 reacting to a pat on head 18.

[0033] In addition, first mode 204 may include a standby phase (not shown) if sensors 32 or 34 are not activated within a fixed period of time. In the standby phase, controller 36 waits until either sensor 32 or 34 is activated again before it produces suitable first persona 206 outputs through motion-generating mechanism 38 and/or speaker 40. Controller 36 may provide specific first persona 206 outputs to indicate that toy 10 is going into standby phase. For example, controller 36 may provide audio output to speaker 40 that toy 10 is going into standby phase. First mode 204 may end based on a predetermined length of time elapsing from when first mode 204 started, specific inputs from sensors 32 and 34, specific outputs from controller 36, and/or other suitable criteria.

[0034] Preferably, a manual actuator 208 determines whether toy 10 remains in first mode 204. When manual actuator 208 is not activated or remains open, then an open node 210 keeps toy 10 in first mode 204. In contrast, when manual actuator 208 is activated or closed, then a closed node 212 takes toy 10 into a transition mode 214. Alternatively, additional manual actuators (not shown) may be provided to determine if toy 10 remains in first mode 204. In another embodiment, toy 10 goes directly from first mode 204 to second mode 216 without initially going to transition mode 214.

[0035] Transition mode 214 may include controller 36 directing motion-generating mechanism 38 and/or providing audio output to speaker 40 to imitate multiple personas. In addition, controller 36 may receive inputs from sensors 32 and 34 and produce suitable outputs through motion-generating mechanism 38 and/or speaker 40. Transition mode 214 may end based on a predetermined length of time elapsing from when transition mode 214 started, specific inputs from sensors 32 and 34, specific outputs from controller 36, and/or other suitable means. Preferably, transition mode 214 ends after controller 36 has produced specific outputs through motion-generating mechanism 38 and speaker 40.

[0036] After transition mode 214 ends, toy 10 may go to a second mode 216. Second mode 216 may include controller 36 directing motion-generating mechanism 38 and/or providing audio output to speaker 40 to imitate a second persona 218. Preferably, second persona 218 imitates a human. In addition, controller 36 may receive inputs from sensors 32 and 34 and produce suitable second persona 218 outputs through motion-generating mechanism 38 and/or speaker 40. For example, toy 10 may invite user via speaker 40 to scratch head 18. When user scratches head 18, that scratch activates sensor 32 sending input to controller 36, which in turn directs motion-generating mechanism to move head 18 and/or tail 24, and produces audio output via speaker 40 to imitate second persona 218 thanking the user for scratching head 18.

[0037] In addition, second mode 216 may include a standby phase (not shown) if sensors 32 and 34 are not activated within a fixed period of time. In the standby phase, controller 36 waits until either sensor 32 or 34 is activated again before it produces suitable second persona 218 outputs through motion-generating mechanism 38 and/or speaker 40. Controller 36 may provide specific second persona 218 outputs to indicate that toy 10 is going into standby phase. For example, controller 36 may provide audio output to speaker 40 that toy 10 is going into standby phase. Second mode 216 may end based on a predetermined length of time elapsing from when friend mode 204 started, specific inputs from sensors 32 and 34, specific outputs from controller 36, and/or other suitable criteria. Alternatively, additional modes imitating additional personas (not shown) may be provided.

[0038] Preferably, a manual actuator 220 or a manual actuator 222 determines whether toy 10 remains in second mode 216. If both manual actuator 220 and manual actuator 222 are not activated or remain open, then open nodes 224 and 226, respectively, keep toy 10 in the friend mode. In contrast, if either manual actuator 220 or manual actuator 222 is activated or closed, then closed nodes 228 and 230, respectively, takes toy 10 into first mode 204. In the preferred embodiment, closed node 228 takes toy 10 directly to first mode 204, whereas closed node 230 takes toy 10 initially into transition mode 214 before going to first mode 204. Alternatively, both closed nodes 228 and 230 may take toy 10 directly to dog mode or take toy 10 initially into transition mode 214 before going to first mode 204. Additional manual actuators (not shown) may be provided that determine whether toy 10 remains in second mode 216. In another embodiment, only manual actuator 222 determines whether toy 10 remains in second mode 216.

[0039] Although the invention has been disclosed in its preferred forms, the specific embodiments thereof as dis-

closed and illustrated herein are not to be considered in a limiting sense, because numerous variations are possible. The subject matter of the invention includes all novel and non-obvious combinations and subcombinations of the various elements, features, functions, and/or properties disclosed herein. No single feature, function, element or property of the disclosed embodiments is essential. The following claims define certain combinations and subcombinations of features, functions, elements, and/or properties that are regarded as novel and nonobvious. Other combinations and subcombinations may be claimed through amendment of the present claims or presentation of new claims in this or a related application. Such claims, whether they are broader, narrower, equal, or different in scope to any earlier claims, also are regarded as included within the subject matter of the invention.

We claim:

1. An animated toy, comprising:
  - a body configured to function in a plurality of modes, including a first mode imitating a first persona, and a second mode imitating a second persona;
  - a manual actuator configured to change a function of the body among the plurality of modes;
  - an appendage rotatably connected to the body; and
  - a motion-generating mechanism configured to move the appendage based, at least in part, on the function of the body.
2. The animated toy of claim 1, wherein the first mode imitates a pet.
3. The animated toy of claim 2, wherein the second mode imitates a human.
4. The animated toy of claim 1, wherein the manual actuator is incorporated in the appendage.
5. The animated toy of claim 1, wherein the appendage includes a leg.
6. The animated toy of claim 5, wherein the manual actuator is incorporated in the leg.
7. The animated toy of claim 1, further comprising a speaker configured to generate one or more audio outputs based, at least in part, on the function of the body.
8. The animated toy of claim 1, wherein the body includes a posterior end, the appendage includes a leg adjacent to the posterior end, and the leg includes a foot, and wherein the leg may be rotated to a plurality of rotational positions relative to the body.
9. The animated toy of claim 8, further comprising:
  - a support plane defined by the posterior end of the body and the foot, wherein the support plane is configured to rest on a surface, and wherein for each rotational position of the appendage, the body may be maintained in a different position relative to the support plane;
  - a head; and
  - a lever assembly operatively connecting the appendage to the head, wherein for each rotational position of the appendage, the lever assembly is configured to hold the head in a different position relative to the body that is in an approximately level orientation relative to the support plane.
10. An animated toy, comprising:
  - a body;
  - an appendage rotatably connected to the body;
  - a motion-generating mechanism configured to control movement of the appendage;
  - a controller configured to function in a plurality of modes, including:
    - a first mode, wherein the controller produces an output signal that drives the motion-generating mechanism causing the toy to imitate a first persona; and
    - a second mode, wherein the controller produces an output signal that drives the motion-generating mechanism causing the toy to imitate a second persona; and
  - at least one manual actuator configured to change a function of the controller among the plurality of modes.
11. The animated toy of claim 10, wherein the plurality of modes includes a transition mode, wherein the controller produces an output signal that converts the toy between the first mode and the second mode.
12. The animated toy of claim 10, wherein the first mode imitates a pet.
13. The animated toy of claim 12, wherein the second mode imitates a human.
14. The animated toy of claim 10, wherein the manual actuator is incorporated in the appendage.
15. The animated toy of claim 10, wherein the appendage includes a leg.
16. The animated toy of claim 15, wherein the manual actuator is incorporated in the leg.
17. The animated toy of claim 10, wherein the body includes a posterior end, the appendage includes a leg adjacent to the posterior end, and the leg includes a foot, and wherein the leg may be rotated to a plurality of rotational positions relative to the body.
18. The animated toy of claim 17, further comprising:
  - a support plane defined by the posterior end of the body and the foot, wherein the support plane is configured to rest on a surface, and wherein for each rotational position of the appendage, the body may be maintained in a different position relative to the support plane;
  - a head; and
  - a lever assembly operatively connecting the appendage to the head, wherein for each rotational position of the appendage, the lever assembly is configured to hold the head in a different position relative to the body that is in an approximately level orientation relative to the support plane.
19. An animated toy, comprising:
  - a body configured to function in a plurality of modes, including a first mode imitating a pet, and a second mode imitating a human;
  - a manual actuator configured to change a function of the body among the plurality of modes;
  - an appendage rotatably connected to the body, wherein the manual actuator is incorporated in the appendage; and
  - a motion-generating mechanism configured to move the appendage based, at least in part, on the function of the body.

20. The animated toy of claim 19, wherein the body includes a posterior end, the appendage includes a leg adjacent to the posterior end, and the leg includes a foot, and wherein the leg may be rotated to a plurality of rotational positions relative to the body, further comprising:

a support plane defined by the posterior end of the body and the foot, wherein the support plane is configured to rest on a surface, and wherein for each rotational position of the appendage, the body may be maintained in a different position relative to the support plane;

a head; and

a lever assembly operatively connecting the to the head, wherein for each rotational position of the appendage, the lever assembly is configured to hold the head in a different position relative to the body that is in an approximately level orientation relative to the support plane.

\* \* \* \* \*