



## A Blank for a Head Restraint

### FIELD OF THE INVENTION

The present invention concerns a patient immobilisation assembly for restraining a patient's head. In particular, embodiments of the present invention concern devices for immobilising the head and neck of a patient during radiotherapy.

### BACKGROUND TO THE INVENTION

Radiotherapy is a form of cancer treatment which involves the application of radiation directed to a particular situs in a patient's body. The applied radiation destroys targeted cancer cells. However, the radiation can also affect some of the normal cells nearby. Where the radiotherapy is used to treat cancers of the head and neck, the destruction and damage of nearby healthy tissue can result in severe side effects due to the presence of many critical structures and organs in that part of the body. For this reason, it is very important that radiation is targeted as far as possible so as to destroy only the cancerous cells whilst leaving other nearby structures intact.

Devices immobilising the position of a patient's head and neck are used to improve the accuracy and reproducibility of positioning the head and neck in medical diagnostic and treatment procedures. These devices are particularly important when a patient is undergoing fractionated radiation therapy where radiation is applied to a patient on a number of different occasions. When undergoing fractionated treatment it is important to try to ensure that a patient is placed in the same position for each treatment session so that the same location can be irradiated throughout the course of treatment.

One of the simplest approaches to assist a patient to maintain their position is with use of a chin strap. However, this approach fails to immobilise the head and neck completely which increases the chances of a patient moving during a treatment session and hence the dangers of detrimental side affects. A simple chin strap also fails to ensure that a patient will be positioned consistently during the course of multiple treatment sessions.

To address this problem it is known to immobilise a patient's head using a full-face mask. Such a full-face mask is normally made out of a thermoplastic material which is heated prior to an initial treatment session. The mask is then moulded to a patient's

head by being placed over the patient's face and then allowed to set. The resultant full-face mask completely encloses a patient's head and thus restricts movement and allows a patient to be placed into a fixed position for each treatment session. Examples of such full face masks are disclosed in WO03/061477 and WO04/032781.

Although a full-face mask is an improvement on immobilising a patient solely with a chin strap existing masks suffer from a number of drawbacks.

As the mask covers the vast majority or the entirety of a patient's face with only small apertures for eyeholes, some patient's find existing masks claustrophobic and uncomfortable. Further, although the full-mask approach substantially limits a patient's movement as the mask encloses a patient's head, it is still possible for small movements to occur within the mask. Further as the mask completely obscures a patient's face it is not possible to monitor for movement during treatment.

An alternative head restraint for maintaining the position of a patient during a medical procedure such as imaging by position emission tomography (PET) or magnetic resonance imaging (MRI) is disclosed in WO00/27331. WO 00/27331 is an example of a prior art head restraint for use with a tracking system as such the face leaves a portion of the face unobscured. However the design of the mask of WO 00/27331 suffers from similar problems to the chinstrap prior art.

An alternative immobilisation assembly that assists with precise positioning of the patient's head during repeated and subsequent treatments and examinations whilst increasing a patient's comfort is therefore desirable.

## SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention there is provided a blank for a head restraint comprising: a frame; and a sheet extending across the frame wherein a main aperture and a pair of auxiliary apertures are provided in the sheet, the arrangement of the apertures being such that when the sheet is deformed upon placement on a patient's head the main aperture is such to leave a patient's face substantially free of the sheet and the auxiliary apertures are such to cause a retaining

strut to be formed by portions of the sheet between said main aperture and said auxiliary apertures.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Further aspects and embodiments of the present invention will become apparent with reference to the following description and accompanying drawings in which:

Figure 1 is a frontal view of a blank for an immobilising head restraint in accordance with an embodiment of the present invention; and

Figure 2 is a perspective view of the head and neck of a patient wearing a head restraint formed from the blank of Figure 1.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 is a front view of a head restraint blank 1 in accordance with a first embodiment of the present invention. The blank 1 is also illustrated in Figure 2 which comprises a schematic perspective view of the head restraint blank 1 after deformation by a patient's head 4.

Referring to Figure 1, the blank head restraint 1 comprises a rigid U-shaped frame 2 with an integrally formed perforated sheet 3. The perforated sheet 3 is made from a thermoplastic which when heated can be deformed by being placed over a patient's head. In this embodiment the perforated sheet has three large apertures comprising a main central aperture 10 and two subsidiary triangular apertures 12, 13 provided either side of the main central aperture 10. A series of screw holes 14 are provided in the frame 2 enabling the frame 2 to be attached to a restraint platform.

As is illustrated in Figure 2, the arrangement of the apertures 10, 12, 13 in the perforated sheet 3 is such that when the blank 1 is deformed by being placed over a patient's face, the perforated sheet 3 is moulded and stretched to sculpt the contours of the patient's head whilst leaving the patient's face, including eyes, nose and mouth, to be uncovered. At the same time the portions of the perforated sheet 3 between the apertures 10, 12, 13 are stretched so as to form a chin strap 20 and a pair of accompanying side struts 22 either side of the patient's face which together act to restrain the patient's head 4 in

place whilst giving the deformed sheet 3 substantial structural rigidity thus ensuring that despite the fact that the patient's face is unenclosed, the mask acts to retain the patient's head 4 in a fixed position when it lies on a cushion 23 provided as part of a restraint platform. In addition to being more comfortable for a patient, leaving the patient's face uncovered enables movement of the patient to be detected using non-contact motion detection systems such as Vision RT's AlignRT <sup>TM</sup> system such as is disclosed in WO2004/004828.

Returning to Figure 1, before being deformed the perforated sheet 3 substantially fills the entirety of the U-shaped frame 2 with the edge 25 of the perforated sheet 3 at the open end of the U-shaped frame 2 following a serpentine curve initially running approximately perpendicularly to the arms of the frame 2 before moving away from the apex of the U-shaped frame 2 so as to provide a small additional protrusion 26 in the central portion of the sheet 3. As is shown in Figure 2 this protrusion 26 is such to enable the portion of the perforated sheet 3 to form a chin strap 20 which encloses a patient's chin when the blank 1 has been deformed.

In this embodiment, the main central aperture 10 comprises a central rectangular portion 28 and two adjacent wing portions 29, 30 where, the central rectangular portion 28 extends across the middle third of the perforated sheet 3 with the longer sides of the central rectangular portion 28 running parallel with the arms of the U-shaped frame 2. The two wing portions 29, 30 each comprise right angled triangular openings each with bases extending half way down the long sides of the central rectangular portion 28 and with each two wing portion 29, 30 having an apex level with the edge 25 of the central rectangular portion 28 remote from the edge 25 of the perforated sheet 3 half way between the long side of the central rectangular portion 28 and the edge 25 of the U-shape frame 2.

In this embodiment in order to increase the resistance of some areas of the perforated sheet 3 to deformation some areas of the sheet 3 are left free of perforations. More specifically, other than in a central area 35 of the section of the sheet 3 and a band 36 immediately adjacent to the open end of the U-shaped frame 2, the portion of the sheet 3 adjacent to the open end of the U-shaped frame 2 is left free from perforations. In use this causes the central area 35 and the section of sheet 3 immediately adjacent to the open end of the U-shaped frame 2 to deform more easily and so accommodate the

shape of a patient's chin. Also a band 37 of sheet 3 running across the edge of the main aperture 10 remote from the open end of the U-shaped frame 3 extending across to the arms of the frame 2 is also left free from perforations.

The two subsidiary triangular apertures 12, 13 each comprise a right-angled triangular opening. The two subsidiary triangular apertures 12, 13 lie either side of the main central aperture 10 with a base adjacent to the arms of the U-shaped frame 2 and apex level with the end of the edge of the central rectangular portion 28 of the main central aperture 10 with the hypotenuses of the winged portions 29, 30 of the main aperture 10 and the triangular apertures 12, 13 being parallel to each other.

In this way, the edges of main aperture 10 and the two subsidiary triangular apertures 12, 13 define the edges of a pair of strips 32, 34 of the perforated sheet 3 lying either side of the main aperture 10 connecting the U-shaped frame 2 with the portion of the sheet 3 adjacent to the open end of the U-shaped frame 2. In use as is shown in Figure 2, these strips 32, 34 are deformed so as to form the struts 22 connecting the chin strap 20 formed from the portion of the sheet 3 adjacent to the open end of the U-shaped frame 2 with a portion of the U-shaped frame 2 further from the open end of the frame 2.

Once set after being deformed the perforated sheet 3 will resist further deformation when placed under tension. In use the lower portion of the deformed sheet 3 acts to retain a patient's head 4 in position as this portion of the sheet 3 forms a chin strap 20 which prevents movement of a patient's chin away from the plane of the U-shaped frame 2. Similarly, the portion of the perforated sheet 3 remote from the open end of the U-shaped frame 2 prevents forehead of a patient 4 from being moved away the plane of the U-shaped frame 2. Finally, the portion of the perforated sheet 3 remote from the open end of the U-shaped frame 2 and the struts 22 formed from the strips 32, 34 between the main central aperture 10 and the two subsidiary apertures 12, 13 together prevent movement the direction parallel with the arms of the U-shaped frame 2.

In particular, it will be noted that by providing the two subsidiary apertures 12, 13 and the main central aperture 10 in the manner described above movement a head restraint is formed which resists motion but which has an opening which leaves a patient's face uncovered is formed. This is because the orientation of the struts 22 formed from the strips 32, 34 between the main central aperture 10 and the two subsidiary apertures 12,

13 are such to be placed under tension by any movement towards the open end of the U-shaped frame 2 and thus provide the head restraint with structural rigidity under tension even in the absence of the perforated sheet 3 covering the face of the patient.

#### FURTHER MODIFICATIONS AND EMBODIMENTS

Although in the above described embodiment the main aperture 10 consists of a central rectangular portion 28 and two adjacent wing portions 29, 30, it will be appreciated that the present invention is not limited to this arrangement and a main aperture 10 may have alternative configurations. Thus for example, embodiments could be provided where the main aperture lacks winged portions 29, 30. Alternatively the main aperture could be triangular or in the form of a parallel trapezium. Additionally rather than having straight sides any or all the edges of the main aperture 10 could be curved.

Although in the above described embodiment, the wing portions 29, 30 of the main central aperture 10 parallel to the two subsidiary apertures 12, 13, it will be appreciated that the present invention is not limited to these apertures being triangles as illustrated in Figure 1 and 2 and similar arrangements could be provided where the wing portions 29, 30 and two subsidiary apertures 12, 13 comprise of a enclosed apertures with two concave sides.

It will be appreciated that preferably the edges of the main aperture 10 and the subsidiary apertures 13 should be approximately parallel to each other to assist in the formation of a suitable retaining strut 22.

Although in the above described embodiment, use of bands free from perforation have been limited to two parallel bands, it will be appreciated that the present invention could contain more bands free from perforation in the portion remote from the open end of the U-shaped frame 2 such that the bands extend from the middle of band of free from perforations in a radially symmetrical manner.

In some embodiments, the perforated sheet 3 may have perforations of different sizes. In such embodiments the arrangement of perforations should be such that large perforations are provided in portions of the sheet 3 which are required to undergo greater amounts of deformation.

## CLAIMS:

1. A blank for a head restraint (1) comprising:
  - a frame (2); and
  - a sheet (3) extending across the frame wherein a main aperture (10) and a pair of auxiliary apertures (12,13) are provided in the sheet (3), the arrangement of the apertures (10,12,13) being such that when the sheet (3) is deformed upon placement on a patient's head the main aperture (10) is such to leave a patient's face substantially free of the sheet and the auxiliary apertures (12,13) are such to cause a retaining strut to (22) be formed by portions of the sheet (32,34) between said main aperture (10) and said auxiliary apertures (12,13).
2. The blank of claim 1 wherein said frame (2) comprises a U-shaped frame and the main aperture (10) is provided in a central portion of the sheet (3) within said U-shaped frame.
3. The blank of claim 1 or 2 wherein the main aperture (10) is triangular or trapezoid in shape.
4. The blank of claim 1 or 2 wherein the main aperture comprises a central rectangular portion (28) and a pair of winged sections (29,30) either side of the central rectangular portion (28).
5. The blank of claim 4 wherein the winged sections (29,30) either side of the central rectangular portion (28) are substantially triangular in shape.
6. The blank of any of claims 2- 5 wherein the auxiliary apertures (12,13) are substantially triangular in shape.
7. The blank of claim 6 wherein an edge of the main aperture (10) is substantially parallel with an edge of one of the auxiliary apertures.
8. The blank of any preceding claim wherein the sheet (3) comprises a thermoplastic material.

9. The blank of any preceding claim wherein the sheet (3) comprises a perforated sheet.
10. The blank of claim 9 wherein the perforations in the sheet (3) are of different sizes.
11. The blank of claim 9 or 10 wherein at least some portions (36,37) of the sheet (3) are substantially free of perforations.

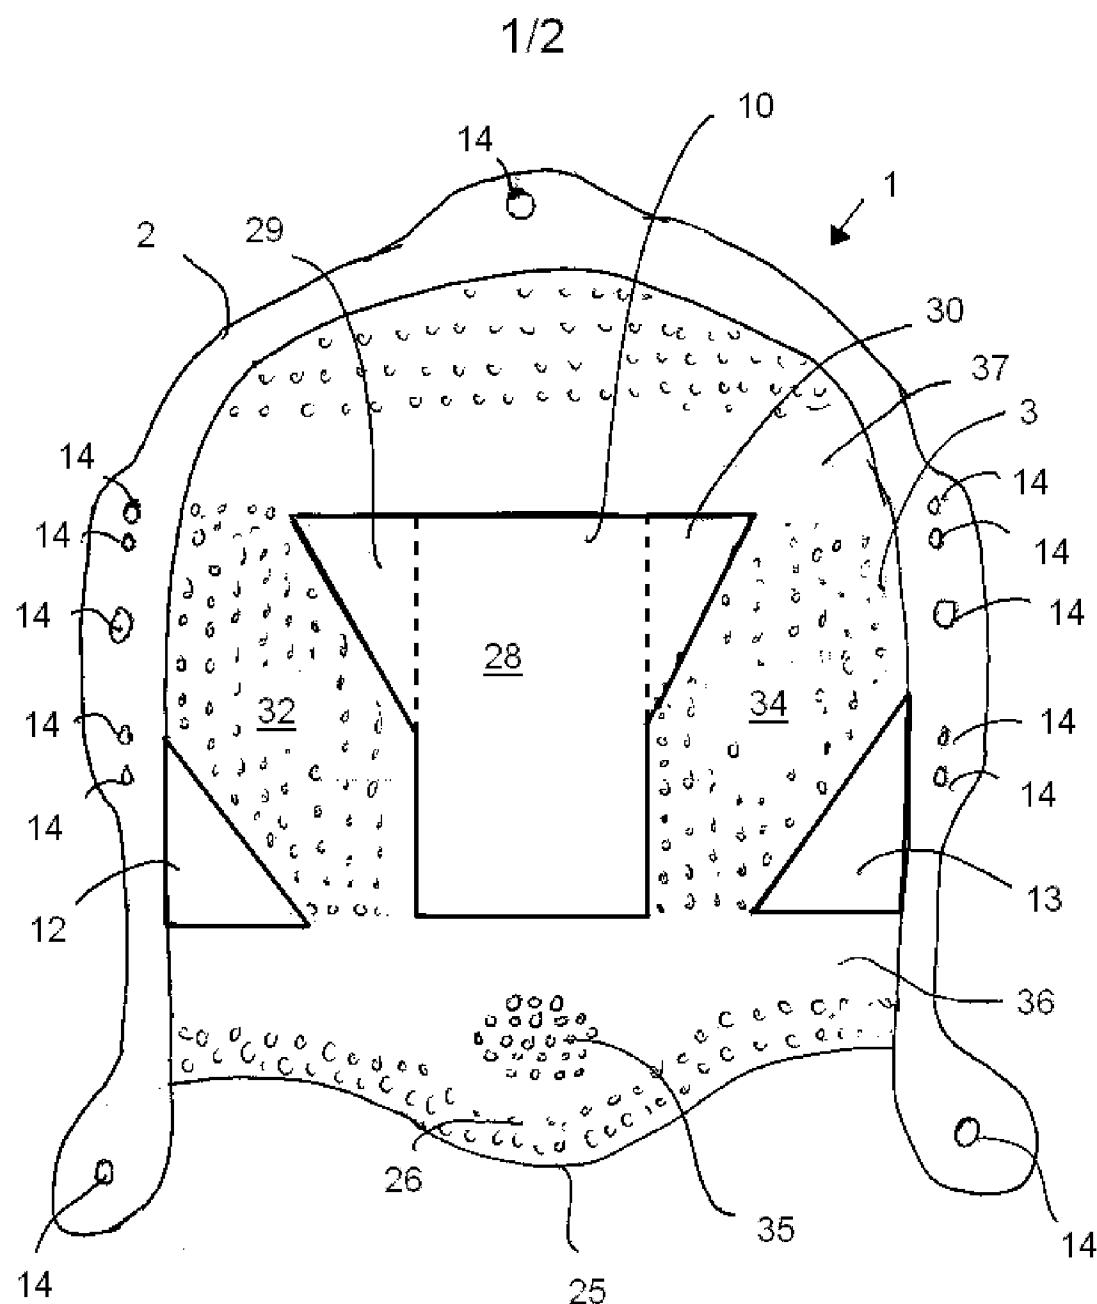


FIG. 1

2/2

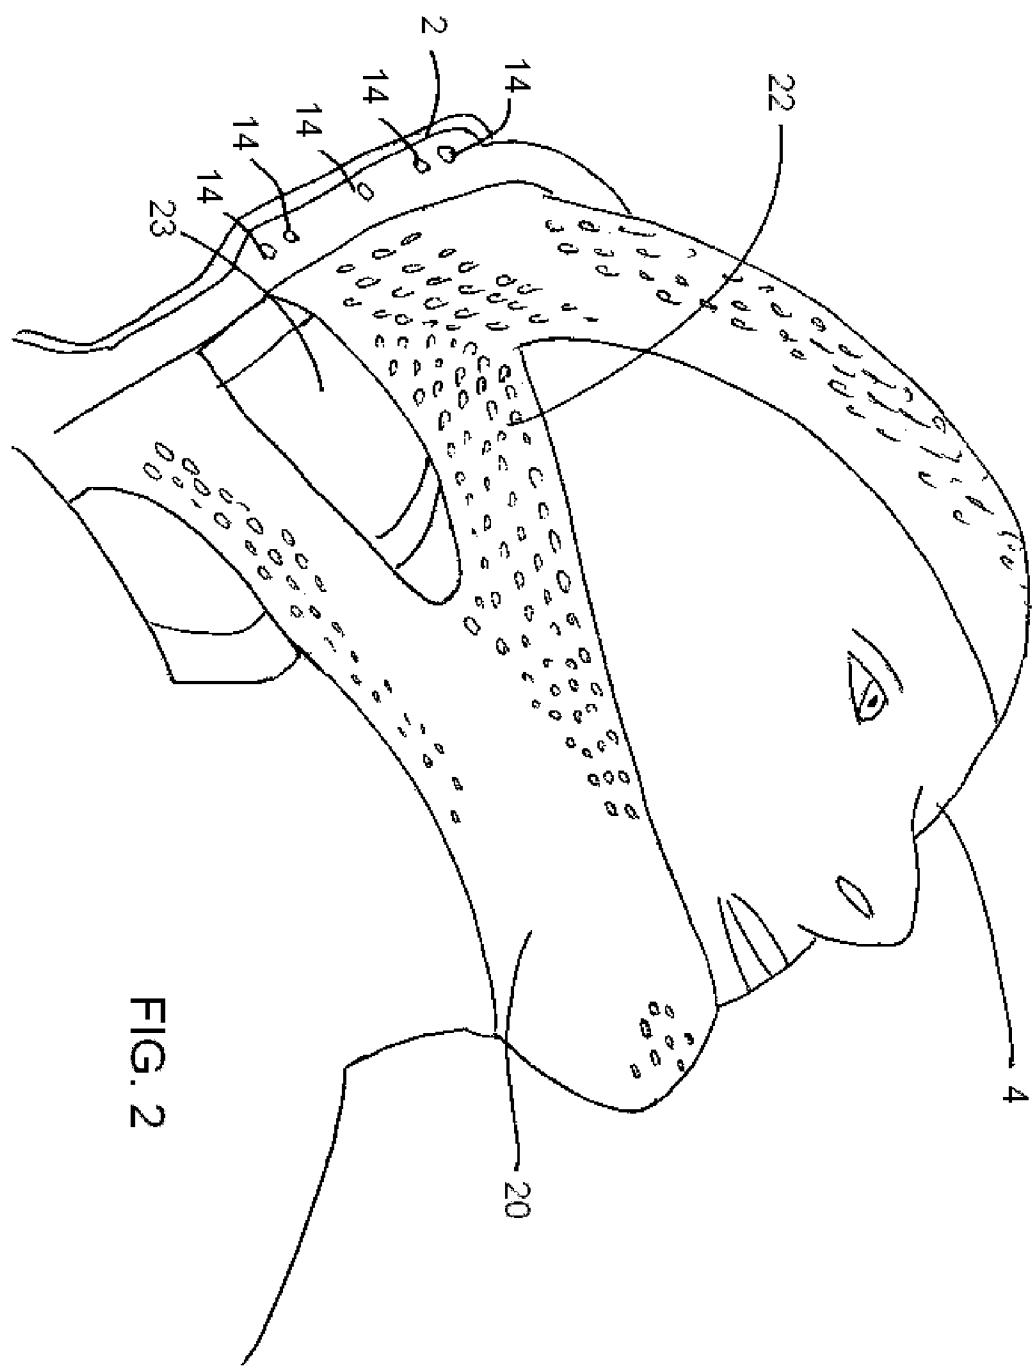


FIG. 2

# INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2010/050095

**A. CLASSIFICATION OF SUBJECT MATTER**

INV. A61B19/00

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 138 302 A (SASHIN DONALD [US] ET AL) 31 October 2000 (2000-10-31) column 4, line 46 – line 62; figures 5,6	1-11
Y	US 2006/053556 A1 (PIONTEK MANFRED [DE]) 16 March 2006 (2006-03-16) abstract; figures 11,12 paragraph [0065]	1-11
A	US 2005/284490 A1 (MOYERS MICHAEL F [US]) 29 December 2005 (2005-12-29) paragraph [0063] – paragraph [0067]	1
A	US 5 370 117 A (MCLAURIN JR ROBERT L [US]) 6 December 1994 (1994-12-06) abstract; figures 1-5	1
		-/-

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

4 June 2010

10/06/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL – 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Moers, Roelof

## INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2010/050095

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/038659 A1 (AL-KASSIM ADIL [DK]) 4 April 2002 (2002-04-04) abstract; figures 1-5 -----	2
A	US 2005/229936 A1 (UNGEMACH ROBERT [US] ET AL UNGEMACH ROBERT [US] ET AL) 20 October 2005 (2005-10-20) abstract; figures 1-5 -----	9-11
A	WO 03/061477 A1 (MED TEC IOWA INC [US]; UNGEMACH ROBERT [US]) 31 July 2003 (2003-07-31) figure 9 -----	10

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No

PCT/GB2010/050095

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 6138302	A	31-10-2000	AU WO	2022000 A 0027331 A2	29-05-2000 18-05-2000	
US 2006053556	A1	16-03-2006	AT DE WO EP ES JP JP	325595 T 20217825 U1 2004045481 A1 1562529 A1 2263997 T3 4250592 B2 2006506141 T	15-06-2006 16-01-2003 03-06-2004 17-08-2005 16-12-2006 08-04-2009 23-02-2006	
US 2005284490	A1	29-12-2005	AU CA EP US WO	2005283072 A1 2571639 A1 1773261 A2 2007039621 A1 2006028551 A2	16-03-2006 16-03-2006 18-04-2007 22-02-2007 16-03-2006	
US 5370117	A	06-12-1994		NONE		
US 2002038659	A1	04-04-2002		NONE		
US 2005229936	A1	20-10-2005	AU CN DE EP JP WO	2002330237 A1 1684636 A 60210681 T2 1545364 A1 2005537114 T 2004032781 A1	04-05-2004 19-10-2005 18-01-2007 29-06-2005 08-12-2005 22-04-2004	
WO 03061477	A1	31-07-2003		NONE		