



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : <b>C22C 21/02, 21/08</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/47789</b></p> <p>(43) International Publication Date: 17 August 2000 (17.08.00)</p>
<p>(21) International Application Number: PCT/EP99/00939</p> <p>(22) International Filing Date: 12 February 1999 (12.02.99)</p> <p>(71) Applicant (for all designated States except US): NORSK HYDRO ASA [NO/NO]; Bygdøy Allé 2, N-0240 Oslo (NO).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): TUNDAL, Ulf [NO/NO]; Fagerhaugveien 15, N-6600 Sunndalsøra (NO). ODDVIN, Reiso [NO/NO]; Hoelsandveien 42, N-6600 Sunndalsøra (NO).</p> <p>(74) Agent: BLEUKX, Luc; Hydro S.A., Avenue Marcel Thiry 83, B-1200 Brussels (BE).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i></p>	
<p>(54) Title: ALUMINIUM ALLOY CONTAINING MAGNESIUM AND SILICON</p> <p>(57) Abstract</p> <p>Aluminium alloy containing 0,5 – 2,5 % by weight on alloying mixture of Magnesium and Silicon, the molar ratio of Mg / Si lying between 0,70 and 1,25, an additional amount of Si equal to approximately 1/3 of the amount of Fe, Mn and Cr present in the alloy, and the rest being made up of aluminium, unavoidable impurities and other alloying agents, which alloy after cooling has been submitted to homogenising, preheating before extrusion, extrusion and ageing, which ageing takes place at temperatures between 160 and 220 °C. The ageing after cooling of the extruded product is performed as a dual rate ageing operation including a first stage in which the extrusion is heated with a heating rate above 30°C/hour to a temperature between 100 – 170 °C, a second stage in which the extrusion is heated with a heating rate between 5 and 50 °C/hour to the final hold temperature between 160 and 220 °C and in that the total ageing cycle is performed in a time between 3 and 24 hours.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Aluminium alloy containing aluminium and silicon**

The invention relates to aluminium alloy containing 0,5 - 2,5 % by weight of an alloying mixture of magnesium and silicon, the molar ratio of Mg / Si lying between 0,70 and 1,25, an additional amount of Si equal to approximately 1/3 of the amount of Fe, Mn and Cr present  
5 in the alloy in % by weight and the rest being made up of aluminium, unavoidable impurities and other alloying agents, which alloy after cooling has been submitted to homogenising, preheating before extrusion, extrusion and ageing, which ageing takes place at final temperatures between 160 and 220°C.

An alloy of this type has been described in WO 95.06759. According to this publication the  
10 ageing is performed at a temperature between 150 and 200°C, and the rate of heating is between 10 - 100°C / hour preferably 10 - 70°C / hour. An alternative two-step heating schedule is proposed, wherein a hold temperature in the range of 80 - 140°C is suggested in order to obtain an overall heating rate within the above specified range.

It is generally known that higher total amounts of Mg and Si will have a positive effect on the  
15 mechanical properties of the final product, whereas this has a negative effect on the extrudability of the aluminium alloy. It has previously been anticipated that the hardening phase in the Al-Mg-Si alloys had a composition close to Mg<sub>2</sub>Si. However, it was also known that an excess of Si produced higher mechanical properties.

Later experiments have shown that the precipitation sequence is quite complex and that  
20 except for the equilibrium phase, the phases involved do not have the stoichiometric ratio Mg<sub>2</sub>Si. In a publication of S.J. Andersen, et. al, Acta mater, Vol. 46 No. 9 p. 3283-3298 of 1998 it has been suggested that one of the hardening phases in Al-Mg-Si alloys has a composition close to Mg<sub>5</sub>Si<sub>6</sub>.

It is therefore an object of the invention to provide an aluminium alloy which has better  
25 mechanical properties and a better extrudability, which alloy has the minimum amount of alloying agents and a general composition which is as close as possible to the traditional aluminium alloys. This and other objects are obtained in that the ageing after cooling of the extruded product is performed as a dual rate ageing operation, including a first stage in which the extrusion is heated with a heating rate above 30°C/hour to a temperature between  
30 100 - 170°C, a second stage in which the extrusion is heated with a heating rate between 5 and 50°C/hour to the final hold temperature between 160 and 220°C and in that the total ageing cycle is performed in a time between 3 and 24 hours.

The optimum Mg/Si ratio is the one where all the available Mg and Si is transformed into  $Mg_5Si_6$  phases. This combination of Mg and Si gives the highest mechanical strength with the minimum use of the alloying elements Mg and Si. It has been found that the maximum extrusion speed is almost independent of the Mg/Si ratio. Therefore, with the optimum Mg/Si ratio the sum of Mg and Si is minimised for a certain strength requirement, and this alloy will thus also provide the best extrudability. By using the composition according to the invention combined with the dual rate ageing procedure according to the invention, it has been obtained that the strength and extrudability are maximised with a minimum total ageing time.

In addition to the  $Mg_5Si_6$  phase there is also another hardening phase which contains more Mg than the  $Mg_5Si_6$  phase. However, this phase is not as effective, and does not contribute so much to the mechanical strength as the  $Mg_5Si_6$  phase. On the Si rich side of the  $Mg_5Si_6$  phase there is most probably no hardening phase, and lower Mg/Si ratios than 5/6 will not be beneficial.

The positive effect on the mechanical strength of the dual rate ageing procedure can be explained by the fact that a prolonged time at low temperature generally enhances the formation of a higher density of precipitates of Mg-Si. If the entire ageing operation is performed at such temperature, the total ageing time will be beyond practical limits and the throughput in the ageing ovens will be too low. By a slow increase of the temperature to the final ageing temperature, the high number of precipitates nucleated at the low temperature will continue to grow. The result will be a high number of precipitates and mechanical strength values associated with low temperature ageing but with a considerably shorter total ageing time.

A two step ageing also give improvements in the mechanical strength, but with a fast heating from the first hold temperature to the second hold temperature there is substantial chance of reversion of the smallest precipitates, with a lower number of hardening precipitates and thus a lower mechanical strength as a result. Another benefit of the dual rate ageing procedure as compared to normal ageing and also two step ageing, is that a slow heating rate will ensure a better temperature distribution in the load. The temperature history of the extrusions in the load will be almost independent of the size of the load, the packing density and the wall thickness' of the extrusions. The result will be more consistent mechanical properties than with other types of ageing procedures.

As compared to the ageing procedure described in WO 95.06759 where the slow heating rate is started from the room temperature, the dual rate ageing procedure will reduce the

total ageing time by applying a fast heating rate from room temperature to temperatures between 100 and 170°C. The resulting strength will be almost equally good when the slow heating is started at an intermediate temperature as if the slow heating is started at room temperature.

- 5 Dependent upon the class of strength envisaged different compositions are possible within the general scope of the invention.

So it is possible to have an aluminium alloy with a tensile strength in the class F19 - F22, the amount of alloying mixture of magnesium or silicon being between 0,60 and 1,10 % by weight. For an alloy with a tensile strength in the class F25 - F27, it is possible to use an  
10 aluminium alloy containing between 0,80 and 1,40 by weight of an alloying mixture of magnesium and silicon and for an alloy with a tensile strength in the class F29 - F31, it is possible to use an aluminium alloy containing between 1,10 and 1,80 % by weight of the alloying mixture of magnesium and silicon.

Preferably and according to the invention a tensile strength in the class F19 (185-220 MPa)  
15 is obtained by an alloy containing between 0,60 and 0,80 % by weight of the alloying mixture, a tensile strength in the class F22 (215-250 MPa) by an alloy containing between 0,70 and 0,90 % by weight of the alloying mixture, a tensile strength in the class F25 (245-270 MPa) by an alloy containing between 0,85 and 1,15 % by weight of the alloying mixture, a tensile strength in the class F27 (265-290 MPa) by an alloy containing between  
20 0,95 and 1,25 % by weight of the alloying mixture, a tensile strength in the class F29 (285-310 MPa) by an alloy containing between 1,10 and 1,40 % by weight of the alloying mixture, and a tensile strength in the class F31 (305-330 MPa) by an alloy containing between 1,20 and 1,55 % by weight of the alloying mixture.

25 With additions of Cu, which as a rule of thumb increases the mechanical strength by 10 MPa per 0.10 wt.% Cu, the total amount of Mg and Si can be reduced and still match a strength class higher than the Mg and Si additions alone would give.

For the reason described above it is preferred that the molar ratio Mg / Si lies between 0.75 and 1.25 and more preferably between 0.8 and 1.0.

30 In a preferred embodiment of the invention the final ageing temperature is at least 165°C and more preferably the ageing temperature is at most 205°C. When using these preferred

temperatures it has been found that the mechanical strength is maximised while the total ageing time remains within reasonable limits.

5 In order to reduce the total ageing time in the dual rate ageing operation it is preferred to perform the first heating stage at the highest possible heating rate available, while as a rule is dependent upon the equipment available. Therefore, it is preferred to use in the first heating stage a heating rate of at least 100°C / hour.

10 In the second heating stage the heating rate must be optimised in view of the total efficiency in time and the ultimate quality of the alloy. For that reason the second heating rate is preferably at least 7°C / hour and at most 30°C / hour. At lower heating rates than 7°C / hour the total ageing time will be long with a low throughput in the ageing ovens as a result, and at higher heating rates than 30°C / hour the mechanical properties will be lower than ideal.

15 Preferably, the first heating stage will end up at 130-160°C and at these temperatures there is a sufficient precipitation of the Mg<sub>5</sub>Si<sub>6</sub> phase to obtain a high mechanical strength of the alloy. A lower end temperature of the first stage will generally lead to an increased total ageing time. Preferably the total ageing time is at most 12 hours.

20 In order to have an extruded product with almost all the Mg and Si in solid solution before the ageing operation, it is important to control the parameters during extrusion and cooling after extrusion. With the right parameters this can be obtained by normal preheating. However, by using a so-called overheating process described in EP 0302623, which is a preheating operation where the alloy is heated to a temperature between 510 and 560°C during the preheating operation before extrusion, after which the billets are cooled to normal extrusion temperatures, this will ensure that all the Mg and Si added to the alloy are dissolved. By proper cooling of the extruded product the Mg and Si are maintained solved and available for forming hardening precipitates during the ageing operation.

25 For low alloy compositions the solutionising of Mg and Si can be obtained during the extrusion operation without overheating if the extrusion parameters are correct. However, with higher alloy compositions normal preheating conditions are not always enough to get all Mg and Si into solid solution. In such cases overheating will make the extrusion process more robust and always ensure that the all the Mg and Si are in solid solution when the  
30 profile comes out of the press.

Other characteristics and advantages will be clear from the following description of a number of tests done with alloys according to the invention.

### **Example 1**

5 Eight different alloys with the composition given in Table 1 were cast as Ø95 mm billets with standard casting conditions for 6060 alloys. The billets were homogenised with a heating rate of approximately 250°C / hour, the holding period was 2 hours and 15 minutes at 575°C, and the cooling rate after homogenisation was approximately 350°C / hour. The logs were finally cut into 200 mm long billets.

**Table 1**

<b>Alloy</b>	<b>Si</b>	<b>Mg</b>	<b>Fe</b>	<b>Total Si+Mg</b>
1	0,34	0,40	0,20	0,74
2	0,37	0,36	0,19	0,73
3	0,43	0,31	0,19	0,74
4	0,48	0,25	0,20	0,73
5	0,37	0,50	0,18	0,87
6	0,41	0,47	0,19	0,88
7	0,47	0,41	0,20	0,88
8	0,51	0,36	0,19	0,87

10

The extrusion trial was performed in an 800 ton press equipped with a Ø100 mm container, and an induction furnace to heat the billets before extrusion.

The die used for the extrudability experiments produced a cylindrical rod with a diameter of 7 mm with two ribs of 0.5 mm width and 1 mm height, located 180° apart.

15

In order to get good measurements of the mechanical properties of the profiles, a separate trial was run with a die which gave a 2 \* 25 mm<sup>2</sup> bar. The billets were preheated to approximately 500°C before extrusion. After extrusion the profiles were cooled in still air giving a cooling time of approximately 2 min down to temperatures below 250°C. After extrusion the profiles were stretched 0.5 %. The storage time at room temperature were controlled before ageing. Mechanical properties were obtained by means of tensile testing.

20

The complete results of the extrudability tests for these alloys are shown in table 2 and 3.

**Table 2** Extrusion tests for alloys 1-4

Alloy no.	Ram Speed mm/sec.	Billet Temperature °C	Remarks
1	16	502	OK
1	17	503	OK
1	18	502	Tearing
1	17	499	OK
1	19	475	OK
1	20	473	OK
1	21	470	Tearing
2	16	504	OK
2	17	503	Small Tearing
2	18	500	Tearing
2	20	474	OK
2	19	473	OK
2	18	470	OK
2	21	469	Small Tearing
3	17	503	Tearing
3	16	505	OK
3	15	504	OK
3	19	477	OK
3	18	477	OK
3	20	472	OK
3	21	470	Tearing
4	17	504	OK
4	18	505	Tearing
4	16	502	OK
4	19	477	OK
4	20	478	OK
4	20	480	Small Tearing
4	21	474	Tearing

5 For alloys 1-4, which have approximately the same sum of Mg and Si but different Mg/Si ratios, the maximum extrusion speed before tearing is approximately the same at comparable billet temperatures.

**Table 3** Extrusion tests for alloys 5-8

Alloy no.	Ram Speed mm/sec.	Billet Temperature °C	Remarks
5	14	495	OK
5	14,5	500	Tearing
5	15	500	Tearing
5	14	500	Small Tearing
5	17	476	Tearing
5	16,5	475	OK
5	16,8	476	Small Tearing
5	17	475	Tearing
6	14	501	Small Tearing
6	13,5	503	OK
6	14	505	Tearing
6	14,5	500	Tearing
6	17	473	Tearing
6	16,8	473	Tearing
6	16,5	473	OK
6	16,3	473	OK
7	14	504	Tearing
7	13,5	506	Small Tearing
7	13,5	500	OK
7	13,8	503	Small Tearing
7	17	472	Small Tearing
7	16,8	476	Tearing
7	16,6	473	OK
7	17	475	Tearing
8	13,5	505	OK
8	13,8	505	Tearing
8	13,6	504	OK
8	14	505	Tearing
8	17	473	Small Tearing
8	17,2	474	Small Tearing
8	17,5	471	Tearing
8	16,8	473	OK

For alloys 5-8, which have approximately the same sum of Mg and Si but different Mg/Si ratios, the maximum extrusion speed before tearing is approximately the same at

comparable billet temperatures. However, by comparing alloys 1-4 which have a lower sum of Mg and Si with alloys 5-8, the maximum extrusion speed is generally higher for alloys 1-4.

The mechanical properties of the different alloy aged at different ageing cycles are shown in tables 4-11.

- 5 As an explanation to these tables, reference is made to Fig. 1 in which different ageing cycles are shown graphically and identified by a letter. In Fig. 1 there is shown the total ageing time on the x-axis, and the temperature used is along the y-axis.

Furthermore the different columns have the following meaning :

Total time = Total ageing time for the ageing cycle.

- 10 R<sub>m</sub> = ultimate tensile strength ;  
R<sub>p02</sub> = yield strength ;  
AB = elongation to fracture ;  
Au = uniform elongation .

- 15 All these data has been obtained by means of standard tensile testing and the numbers shown are the average of two parallel samples of the extruded profile.

**Table 4**

<b>Alloy 1 - 0.40Mg + 0.34Si</b>					
	<u>Total Time [hrs]</u>	<u>Rm</u>	<u>Rp02</u>	<u>AB</u>	<u>Au</u>
A	3	143,6	74,0	16,8	8,1
A	4	160,6	122,3	12,9	6,9
A	5	170,0	137,2	12,6	5,6
A	6	178,1	144,5	12,3	5,6
A	7	180,3	150,3	12,3	5,2
B	3,5	166,8	125,6	12,9	6,6
B	4	173,9	135,7	11,9	6,1
B	4,5	181,1	146,7	12,0	5,4
B	5	188,3	160,8	12,2	5,1
B	6	196,0	170,3	11,9	4,7
C	4	156,9	113,8	12,6	7,5
C	5	171,9	134,7	13,2	6,9
C	6	189,4	154,9	12,0	6,2
C	7	195,0	168,6	11,9	5,8
C	8	199,2	172,4	12,3	5,4
D	7	185,1	140,8	12,9	6,4
D	8,5	196,5	159,0	13,0	6,2
D	10	201,8	171,6	13,3	6,0
D	11,5	206,4	177,5	12,9	6,1
D	13	211,7	184,0	12,5	5,4
E	8	190,5	152,9	12,8	6,5
E	10	200,3	168,3	12,1	6,0
E	12	207,1	176,7	12,3	6,0
E	14	211,2	185,3	12,4	5,9
E	16	213,9	188,8	12,3	6,6

**Table 5**

<b>Alloy 2 - 0.36Mg + 0.37Si</b>					
	<u>Total Time [hrs]</u>	<u>Rm</u>	<u>Rp02</u>	<u>AB</u>	<u>Au</u>
A	3	150,1	105,7	13,4	7,5
A	4	164,4	126,1	13,6	6,6
A	5	174,5	139,2	12,9	6,1
A	6	183,1	154,4	12,4	4,9
A	7	185,4	157,8	12,0	5,4
B	3,5	175,0	135,0	12,3	6,3
B	4	181,7	146,6	12,1	6,0
B	4,5	190,7	158,9	11,7	5,5
B	5	195,5	169,9	12,5	5,2
B	6	202,0	175,7	12,3	5,4
C	4	161,3	114,1	14,0	7,2
C	5	185,7	145,9	12,1	6,1
C	6	197,4	167,6	11,6	5,9
C	7	203,9	176,0	12,6	6,0
C	8	205,3	178,9	12,0	5,5
D	7	195,1	151,2	12,6	6,6
D	8,5	208,9	180,4	12,5	5,9
D	10	210,4	181,1	12,8	6,3
D	11,5	215,2	187,4	13,7	6,1
D	13	219,4	189,3	12,4	5,8
E	8	195,6	158,0	12,9	6,7
E	10	205,9	176,2	13,1	6,0
E	12	214,8	185,3	12,1	5,8
E	14	216,9	192,5	12,3	5,4
E	16	221,5	196,9	12,1	5,4

**Table 6**

<b>Alloy 3 - 0.31Mg + 0.43Si</b>					
	<u>Total Time [hrs]</u>	<u>Rm</u>	<u>Rp02</u>	<u>AB</u>	<u>Au</u>
A	3	154,3	111,0	15,0	8,2
A	4	172,6	138,0	13,0	6,5
A	5	180,6	148,9	13,0	5,7
A	6	189,7	160,0	12,2	5,5
A	7	192,5	164,7	12,6	5,3
B	3,5	187,4	148,9	12,3	6,3
B	4	193,0	160,3	11,5	5,9
B	4,5	197,7	168,3	11,6	5,1
B	5	203,2	177,1	12,4	5,5
B	6	205,1	180,6	11,7	5,4
C	4	170,1	127,4	14,3	7,5
C	5	193,3	158,2	13,4	6,2
C	6	207,3	179,2	12,6	6,4
C	7	212,2	185,3	12,9	5,7
C	8	212,0	188,7	12,3	5,6
D	7	205,6	157,5	13,2	6,7
D	8,5	218,7	190,4	12,7	6,0
D	10	219,6	191,1	12,9	6,7
D	11,5	222,5	197,5	13,1	5,9
D	13	226,0	195,7	12,2	6,1
E	8	216,6	183,5	12,6	6,8
E	10	217,2	190,4	12,6	6,9
E	12	221,6	193,9	12,4	6,6
E	14	225,7	200,6	12,4	6,0
E	16	224,4	197,8	12,1	5,9

**Table 7**

<b>Alloy 4 - 0.25Mg + 0.48Si</b>					
	<u>Total Time [hrs]</u>	<u>Rm</u>	<u>Rp02</u>	<u>AB</u>	<u>Au</u>
A	3	140,2	98,3	14,5	8,6
A	4	152,8	114,6	14,5	7,2
A	5	166,2	134,9	12,7	5,9
A	6	173,5	141,7	12,8	5,7
A	7	178,1	147,6	12,3	5,2
B	3,5	165,1	123,5	13,3	6,4
B	4	172,2	136,4	11,8	5,7
B	4,5	180,7	150,2	12,1	5,2
B	5	187,2	159,5	12,0	5,6
B	6	192,8	164,6	12,1	5,0
C	4	153,9	108,6	13,6	7,7
C	5	177,2	141,8	12,0	6,5
C	6	190,2	159,7	11,9	5,9
C	7	197,3	168,6	12,3	6,1
C	8	197,9	170,6	12,5	5,6
D	7	189,5	145,6	12,3	6,4
D	8,5	202,2	171,6	12,6	6,1
D	10	207,9	178,8	12,9	6,0
D	11,5	210,7	180,9	12,7	5,6
D	13	213,3	177,7	12,4	6,0
E	8	195,1	161,5	12,8	5,9
E	10	205,2	174,1	12,5	6,4
E	12	208,3	177,3	12,8	5,6
E	14	211,6	185,9	12,5	6,3
E	16	217,6	190,0	12,4	6,2

Table 8

<b>Alloy 5 - 0.50Mg + 0.37Si</b>					
	<u>Total Time [hrs]</u>	<u>Rm</u>	<u>Rp02</u>	<u>AB</u>	<u>Au</u>
A	3	180,6	138,8	13,9	7,1
A	4	194,2	155,9	13,2	6,6
A	5	203,3	176,5	12,8	5,6
A	6	210,0	183,6	12,2	5,7
A	7	211,7	185,9	12,1	5,8
B	3,5	202,4	161,7	12,8	6,6
B	4	204,2	170,4	12,5	6,1
B	4,5	217,4	186,7	12,1	5,6
B	5	218,9	191,5	12,1	5,5
B	6	222,4	198,2	12,3	6,0
C	4	188,6	136,4	15,1	10,0
C	5	206,2	171,2	13,4	7,1
C	6	219,2	191,2	12,9	6,2
C	7	221,4	194,4	12,1	6,1
C	8	224,4	202,8	11,8	6,0
D	7	213,2	161,5	14,0	7,5
D	8,5	221,5	186,1	12,6	6,7
D	10	229,9	200,8	12,1	5,7
D	11,5	228,2	200,0	12,3	6,3
D	13	233,2	198,1	11,4	6,2
E	8	221,3	187,7	13,5	7,4
E	10	226,8	196,7	12,6	6,7
E	12	227,8	195,9	12,8	6,6
E	14	230,6	200,5	12,2	5,6
E	16	235,7	207,9	11,7	6,4

Table 9

<b>Alloy 6 - 0.47Mg + 0.41Si</b>					
	<u>Total Time [hrs]</u>	<u>Rm</u>	<u>Rp02</u>	<u>AB</u>	<u>Au</u>
A	3	189,1	144,5	13,7	7,5
A	4	205,6	170,5	13,2	6,6
A	5	212,0	182,4	13,0	5,8
A	6	216,0	187,0	12,3	5,6
A	7	216,4	188,8	11,9	5,5
B	3,5	208,2	172,3	12,8	6,7
B	4	213,0	175,5	12,1	6,3
B	4,5	219,6	190,5	12,0	6,0
B	5	225,5	199,4	11,9	5,6
B	6	225,8	202,2	11,9	5,8
C	4	195,3	148,7	14,1	8,1
C	5	214,1	178,6	13,8	6,8
C	6	227,3	198,7	13,2	6,3
C	7	229,4	203,7	12,3	6,6
C	8	228,2	200,7	12,1	6,1
D	7	222,9	185,0	12,6	7,8
D	8,5	230,7	194,0	13,0	6,8
D	10	236,6	205,7	13,0	6,6
D	11,5	236,7	208,0	12,4	6,6
D	13	239,6	207,1	11,5	5,7
E	8	229,4	196,8	12,7	6,4
E	10	233,5	199,5	13,0	7,1
E	12	237,0	206,9	12,3	6,7
E	14	236,0	206,5	12,0	6,2
E	16	240,3	214,4	12,4	6,8

Table 10

<b>Alloy 7 - 0.41Mg + 0.47Si</b>					
	<u>Total Time [hrs]</u>	<u>Rm</u>	<u>Rp02</u>	<u>AB</u>	<u>Au</u>
A	3	195,9	155,9	13,5	6,6
A	4	208,9	170,0	13,3	6,4
A	5	216,2	188,6	12,5	6,2
A	6	220,4	195,1	12,5	5,5
A	7	222,0	196,1	11,5	5,4
B	3,5	216,0	179,5	12,2	6,4
B	4	219,1	184,4	12,2	6,1
B	4,5	228,0	200,0	11,9	5,8
B	5	230,2	205,9	11,4	6,1
B	6	231,1	211,1	11,8	5,5
C	4	205,5	157,7	15,0	7,8
C	5	225,2	190,8	13,1	6,8
C	6	230,4	203,3	12,0	6,5
C	7	234,5	208,9	12,1	6,2
C	8	235,4	213,4	11,8	5,9
D	7	231,1	190,6	13,6	7,6
D	8,5	240,3	208,7	11,4	6,3
D	10	241,6	212,0	12,5	7,3
D	11,5	244,3	218,2	11,9	6,3
D	13	246,3	204,2	11,3	6,3
E	8	233,5	197,2	12,9	7,6
E	10	241,1	205,8	12,8	7,2
E	12	244,6	214,7	11,9	6,5
E	14	246,7	220,2	11,8	6,3
E	16	247,5	221,6	11,2	5,8

Table 11

<b>Alloy 8 - 0.36Mg + 0.51Si</b>					
	<u>Total Time [hrs]</u>	<u>Rm</u>	<u>Rp02</u>	<u>AB</u>	<u>Au</u>
A	3	200,1	161,8	13,0	7,0
A	4	212,5	178,5	12,6	6,2
A	5	221,9	195,6	12,6	5,7
A	6	222,5	195,7	12,0	6,0
A	7	224,6	196,0	12,4	5,9
B	3,5	222,2	186,9	12,6	6,6
B	4	224,5	188,8	12,1	6,1
B	4,5	230,9	203,4	12,2	6,6
B	5	231,1	211,7	11,9	6,6
B	6	232,3	208,8	11,4	5,6
C	4	215,3	168,5	14,5	8,3
C	5	228,9	194,9	13,6	7,5
C	6	234,1	206,4	12,6	7,1
C	7	239,4	213,3	11,9	6,4
C	8	239,1	212,5	11,9	5,9
D	7	236,7	195,9	13,1	7,9
D	8,5	244,4	209,6	12,2	7,0
D	10	247,1	220,4	11,8	6,7
D	11,5	246,8	217,8	12,1	7,2
D	13	249,4	223,7	11,4	6,6
E	8	243,0	207,7	12,8	7,6
E	10	244,8	215,3	12,4	7,4
E	12	247,6	219,6	12,0	6,9
E	14	249,3	222,5	12,5	7,1
E	16	250,1	220,8	11,5	7,0

Based upon these results the following comments apply.

5 The ultimate tensile strength (UTS) of alloy no. 1 is slightly below 180 MPa after ageing with the A - cycle and 6 hours total time. With the dual rate ageing cycles the UTS values are higher, but still not more than 190 MPa after a 5 hours B - cycle, and 195 MPa after a 7 hours C - cycle. With the D - cycle the UTS values reaches 210 MPa but not before a total ageing time of 13 hours.

10 The ultimate tensile strength (UTS) of alloy no. 2 is slightly above 180 MPa after the A - cycle and 6 hours total time. The UTS values are 195 MPa after a 5 hours B - cycle, and 205 MPa after a 7 hours C - cycle. With the D - cycle the UTS values reaches approximately 210 MPa after 9 hours and 215 MPa after 12 hours.

15 Alloy no. 3 which is closest to the  $Mg_5Si_6$  line on the Mg rich side, shows the highest mechanical properties of alloys 1 - 4. After the A - cycle the UTS is 190 MPa after 6 hours total time. With a 5 hours B - cycle the UTS is close to 205 MPa, and slightly above 210 MPa after a 7 hours C - cycle. With the D - ageing cycle of 9 hours the UTS is close to 220 MPa.

Alloy no. 4 shows lower mechanical properties than alloys 2 and 3. After the A - cycle with 6 hours total time the UTS is not more than 175 MPa. With the D - ageing cycle of 10 hours the UTS is close to 210 MPa.

20 These results clearly demonstrate that the optimum composition for obtaining the best mechanical properties with the lowest sum of Mg and Si, is close to the  $Mg_5Si_6$  line on the Mg rich side.

Another important aspect with the Mg / Si ratio is that a low ratio seem to give shorter ageing times to obtain the maximum strength.

25 Alloys 5 - 8 have a constant sum of Mg and Si that is higher than for alloys 1 - 4. As compared to the  $Mg_5Si_6$  line, all alloys 5 - 8 are located on the Mg rich side of  $Mg_5Si_6$ .

Alloy no. 5 which is farthest away from the  $Mg_5Si_6$  line shows the lowest mechanical properties of four different alloys 5 - 8. With the A - cycle alloy no. 5 has a UTS value of approximately 210 MPa after 6 hours total time. Alloy no. 8 has an UTS value of 220 MPa after the same cycle. With the C - cycle of 7 hours total time the UTS values for alloys 5 and

8 are 220 and 240 MPa, respectively. With the D - cycle of 9 hours the UTS values are approximately 225 and 245 MPa.

5 Again, this shows that the highest mechanical properties are obtained with alloys closest to the  $Mg_5Si_6$  line. As for alloys 1 - 4, the benefits of the dual rate ageing cycles seem to be highest for alloys closest to the  $Mg_5Si_6$  line.

The ageing times to maximum strength seem to be shorter for alloys 5 - 8 than for alloys 1 - 4. This is as expected because the ageing times are reduced with increased alloy content. Also, for alloys 5 - 8 the ageing times seem to be somewhat shorter for alloy 8 than for alloy 5.

10 The total elongation values seem to be almost independent of the ageing cycle. At peak strength the total elongation values, AB, are around 12%, even though the strength values are higher for the dual rate ageing cycles.

### **Example 2**

15 Example 2 shows the ultimate tensile strength of profiles from directly and overheated billets of a 6061 alloy. The directly heated billets were heated to the temperature shown in the table and extruded at extrusion speeds below the maximum speed before deterioration of the profile surface. The overheated billets were preheated in a gas fired furnace to a temperature above the solvus temperature for the alloy and then cooled down to a normal extrusion temperature shown in table 12. After extrusion the profiles were water cooled and  
20 aged by a standard ageing cycle to peak strength.

**Table 12** Ultimate tensile strength (UTS) in different positions of profiles from directly heated and overheated billets of a AA6061 alloy .

Preheating	Billet temperature °C	UTS (front) MPa	UTS (middle) MPa	UTS (rear) MPa
Dir. Heated	470	287,7	292,6	293,3
Dir. Heated	472	295,3	293,9	296,0
Dir. Heated	471	300,8	309,1	301,5
Dir. Heated	470	310,5	318,1	315,3
Dir. Heated	482	324,3	312,6	313,3
Dir. Heated	476	327,1	334,0	331,9
Dir. Heated	476	325,7	325,0	319,5
Dir. Heated	475	320,2	319,0	318,8
Dir. Heated	476	316,0	306,4	316,0
Dir. Heated	485	329,1	329,8	317,4
Dir. Heated	501	334,7	324,3	331,2
Dir. Heated	499	332,6	327,8	322,9
Dir. Heated	500	327,8	329,8	318,8
Dir. Heated	505	322,9	322,2	318,1
Dir. Heated	502	325,7	329,1	334,7
Dir. Heated	506	336,0	323,6	311,2
Dir. Heated	500	329,1	293,9	345,0
Dir. Heated	502	331,2	332,6	335,3
Dir. Heated	496	318,8	347,8	294,6
Average UTS and standard deviation for directly heated billets		<b>320,8 / 13,1</b>	<b>319,6 / 14,5</b>	<b>317,6 / 13,9</b>
Overheated	506	333,3	325,7	331,3
Overheated	495	334,0	331,9	335,3
Overheated	493	343,6	345,0	333,3
Overheated	495	343,6	338,8	333,3
Overheated	490	339,5	332,6	327,1
Overheated	499	346,4	332,6	331,2
Overheated	496	332,6	335,3	331,9
Overheated	495	330,5	331,2	322,9
Overheated	493	332,6	334,7	333,3
Overheated	494	331,2	334,0	328,4
Overheated	494	329,1	338,8	337,4
Overheated	459	345,7	337,4	344,3
Overheated	467	340,2	338,1	330,5
Overheated	462	344,3	342,9	331,9
Overheated	459	334,0	329,8	326,4
Overheated	461	331,9	326,4	324,3
Average UTS and standard deviation for overheated billets		<b>337 / 5,9</b>	<b>334,7 / 5,2</b>	<b>331,4 / 5,0</b>

By utilising the overheating process the mechanical properties will generally be higher and also more consistent than without overheating. Also, with overheating the mechanical properties are practically independent of the billet temperature prior to extrusion. This makes the extrusion process more robust with respect to providing high and consistent mechanical properties, making it possible to operate at lower alloy compositions with lower safety margins down to the requirements for mechanical properties.

## Claims

21

1. Aluminium alloy containing 0,5 - 2,5 % by weight on alloying mixture of Magnesium and Silicon, the molar ratio of Mg / Si lying between 0,70 and 1,25, an additional amount of Si equal to approximately 1/3 of the amount of Fe, Mn and Cr present in the alloy in % by weight and the rest being made up of aluminium, unavoidable impurities and other alloying agents, which alloy after cooling has been submitted to homogenising, preheating before extrusion, extrusion and ageing, which ageing takes place at temperatures between 160 and 220°C, characterized in that, the ageing after cooling of the extended product is performed as a dual rate ageing operation, including a first stage in which the extrusion is heated with a heating rate above 30°C/hour to a temperature between 100 - 170°C, a second stage in which the extrusion is heated with a heating rate between 5 and 50°C/hour to the final hold temperature between 160 and 220°C and in that the total ageing cycle is performed in a time between 3 and 24 hours.
2. Aluminium alloy according to claim 1, characterized in that it contains between 0,60 and 1,10 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F19 - F22.
3. Aluminium alloy according to claim 1, characterized in that it contains between 0,80 and 1,40 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F25 - F27.
4. Aluminium alloy according to claim 1, characterized in that it contains between 1,10 and 1,80 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F29 - F31.
5. Aluminium alloy according to claim 2, characterized in that it contains between 0,60 and 0,80 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F19 (185 - 220 MPa).
6. Aluminium alloy according to claim 2, characterized in that it contains between 0,70 and 0,90 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F22 (215 - 250 MPa).

7. Aluminium alloy according to claim 3, characterized in that it contains between 0,85 and 1,15 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F25 (245 - 270 MPa).
- 5 8. Aluminium alloy according to claim 3, characterized in that it contains between 0,95 and 1,25 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F27 (265 - 290 MPa).
9. Aluminium alloy according to claim 4, characterized in that it contains between 1,10 and 1,40 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F29 (285-310 MPa).
- 10 10. Aluminium alloy according to claim 4, characterized in that it contains between 1,20 and 1,55 % by weight of the alloying mixture of magnesium and silicon and that it has a tensile strength in the class F31 (305 - 330 MPa).
11. Aluminium alloy according to any one of the preceding claims, characterized in that the molar ratio of Mg / Si is at least 0,70.
- 15 12. Aluminium alloy according to any one of the preceding claims, characterized in that the molar ratio of Mg / Si is at most 1,25.
13. Aluminium alloy according to any one of the preceding claims, characterized in that the final ageing temperature is at least 165°C.
14. Aluminium alloy according to any one of the preceding claims,  
20 characterized in that the final ageing temperature is at most 205°C.
15. Aluminium alloy according to any one of the preceding claims, characterized in that in the first heating stage the heating rate is at least 100°C / hour.
16. Aluminium alloy according to any one of the preceding claims,  
25 characterized in that in the second heating stage the heating rate is at least 7°C / hour.

17. Aluminium alloy according to any one of the preceeding claims,  
c h a r a c t e r i z e d i n t h a t in the second heating stage the heating rate is at  
most 30°C / hour.
- 5 18. Aluminium alloy according to any one of the preceeding claims,  
c h a r a c t e r i z e d i n t h a t at the end of the first heating step the temperature  
is between 130 and 160°C.
19. Aluminium alloy according to any one of the preceeding claims,  
c h a r a c t e r i z e d i n t h a t the total ageing time is at least 5 hours.
- 10 20. Aluminium alloy according to any one of the preceeding claims,  
c h a r a c t e r i z e d i n t h a t the total ageing time is at most 12 hours.
21. Aluminium alloy according to any one of the preceeding claims,  
c h a r a c t e r i z e d i n t h a t during the preheating before extrusion the alloy has  
been heated to a temperature between 510 and 550°C, after which the alloy has been  
cooled to normal extrusion temperatures.

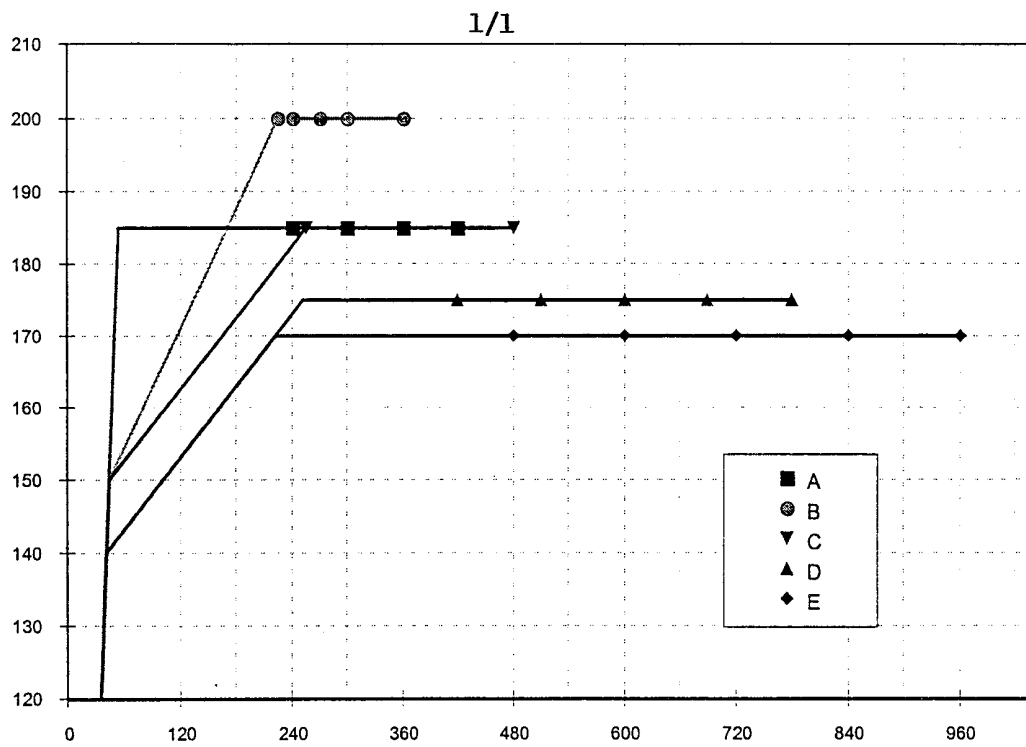


FIG. 1

INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 99/00939

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 C22C21/02 C22C21/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 C22C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 95 06759 A (ALCAN INT LTD ;YIU HANG LAM (GB); RICKS RICKY ARTHUR (GB); COURT S) 9 March 1995 (1995-03-09) cited in the application page 3, line 15 - line 16 page 5, line 15 - line 31; figure 6 ----- -/--	1-21

Further documents are listed in the continuation of box C.  Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search <b>20 October 1999</b>	Date of mailing of the international search report <b>04/11/1999</b>
---	---

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Authorized officer <b>Ashley, G</b>
--	--

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/00939

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>CHEMICAL ABSTRACTS, vol. 128, no. 8,                      23 February 1998 (1998-02-23)                      Columbus, Ohio, US;                      abstract no. 91847,                      YATSUKURA, MASASHI ET AL: "High-strength                      aluminum-zinc-magnesium-based alloy                      material for structure material showing                      improved extrusion property and its                      manufacture"                      XP002119618                      abstract                      &amp; JP 09 310141 A (NIPPON LIGHT METAL CO.,                      LTD., JAPAN) 2 December 1997 (1997-12-02)</p>	1-21
A	<p>EP 0 302 623 A (NORSK HYDRO AS)                      8 February 1989 (1989-02-08)                      cited in the application</p>	
A	<p>PATENT ABSTRACTS OF JAPAN                      vol. 1996, no. 10,                      31 October 1996 (1996-10-31)                      &amp; JP 08 144031 A (FURUKAWA ELECTRIC CO                      LTD:THE), 4 June 1996 (1996-06-04)                      abstract</p>	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/00939

Patent document cited in search report		Publication date	Patent family member(s)	Publication date			
WO 9506759	A	09-03-1995	AT 169689 T	15-08-1998			
			AU 680679 B	07-08-1997			
			AU 7504694 A	22-03-1995			
			BR 9407462 A	12-11-1996			
			CA 2169968 A	09-03-1995			
			DE 69412491 D	17-09-1998			
			DE 69412491 T	24-12-1998			
			EP 0716716 A	19-06-1996			
			JP 9501987 T	25-02-1997			
			NO 960808 A	28-02-1996			
			NZ 271423 A	24-11-1997			
			-----				
			JP 9310141	A	02-12-1997	NONE	
-----							
EP 0302623	A	08-02-1989	AT 71986 T	15-02-1992			
			CA 1306928 A	01-09-1992			
			DE 3867958 A	05-03-1992			
			US 4909858 A	20-03-1990			
			US RE34442 E	16-11-1993			
-----							
JP 08144031	A	04-06-1996	NONE				
-----							