



(11) **EP 1 119 081 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
23.07.2008 Bulletin 2008/30

(51) Int Cl.:
H01R 33/22 ^(2006.01) **H01R 13/585** ^(2006.01)

(21) Application number: **00112489.0**

(22) Date of filing: **13.06.2000**

(54) **Lamp-holder with quick-locking device for the electric cable**

Lampenfassung mit Schnellfixieranordnung für elektrische Kabel

Porte- lampe ayant un dispositif de fixation rapide pour des câbles électriques

(84) Designated Contracting States:
DE ES SE

(30) Priority: **21.01.2000 IT MI200073**

(43) Date of publication of application:
25.07.2001 Bulletin 2001/30

(73) Proprietor: **Vossloh-Schwabe Italia SPA**
47027 Sarsina (Forlì) (IT)

(72) Inventor: **Giannini, Marco**
47025 Mercato Saraceno (Forlì) (IT)

(74) Representative: **Petruzzello, Aldo et al**
Racheli & C. S.p.A
Viale San Michele del Carso, 4
20144 Milano (IT)

(56) References cited:
DE-B- 2 829 639 **DE-U- 8 805 216**
GB-A- 1 396 790

EP 1 119 081 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention refers to a lamp-holder with quick-locking device for the electric cable of the lamp.

[0002] Various lamp-holders with different systems of locking of the electric cable are widely available on the market at present. Known to the art are locking devices for the electric cable provided as additional parts of the lamp-holder, such as rings, for example, which clamp the electric cable. Such systems prove complex and costly, because said additional parts must be assembled.

[0003] Italian patent application for utility model No. MI94U000534 describes a lamp holder that provides integrally a cable clamp consisting of an internally hollow tubular part.

[0004] The electric cable is blocked automatically inside the cable clamp, when the cable clamp is inserted inside a hole of a lamp base. In fact the cable clamp comprises flexible tongues which, when pressed against the walls of the hole in the lamp base, bend inward and clamp the cord by means of serrations.

[0005] It is evident that said system can work only when the cable clamp is inserted inside the hole in a lamp base. Said system therefore depends upon the particular configuration of the lamp base which must provide a hole of a suitable diameter to accommodate the cable clamp.

[0006] Italian patent application for utility model MI98U 000005 describes a lamp-holder and a cap that is snap fastened onto the lamp-holder. The cap comprises a hollow tubular part through which the electric cable is inserted and passed through two jaws provided inside the cap. One of said jaws is connected to a cam surface.

[0007] The lamp-holder provides a box-shaped seat wherein are situated the contacts for the strands of the electric cable. When the cap is snap fastened on the lamp-holder, the cam surface of the jaw slides over the box-shaped seat of the lamp-holder and causes bending of the relative jaw which sandwiches the cable against the other jaw, locking it in position.

[0008] It is evident that said system works only if the cap is applied to a particular lamp holder with such a shape as to operate the cam to generate closing of the jaw. Said solution therefore depends upon the particular shape of the lamp-holder.

[0009] Document DE 88 05 216 U discloses a lamp-holder with a quick-locking device for an electric cable comprising three parts: a lamp-holder body, a cap including a pierced tubular part and a part where electrical connection means to the strands of the electric cable are provided and a quick-locking device, having a pierced tubular part for entry of said electric cable and bearing yielding engagement means bringing into a firm locking said electric cable.

[0010] The object of the invention is to eliminate said drawbacks, providing a lamp-holder with a quick-locking device for the electric cable that is highly versatile and can be applied to any type of lamp-holder or lamp base.

[0011] Another object of the present invention is to provide a lamp-holder with a quick-locking device for the electric cable that is economical, simple to make and does not comprise additional parts for locking of the electric cable.

[0012] These objects are achieved according to the invention with the characteristics listed in appended claim 1.

[0013] Preferred embodiments of the invention are apparent from the dependent claims.

[0014] The lamp-holder with quick-locking device for the electric cable according to the invention comprises a cap destined to be applied over the lamp-holder. The cap provides a hollow tubular part having an entry hole through which the electric cable is inserted. The electric cable is then passed through engagement means provided inside the body of the cap. Said engagement means are preferably two opposite facing jaws connected by means of small flexible bridges to the inside wall of the body of the cap.

[0015] In order to lock the cable traction is exerted thereon in the opposite direction to that of insertion. Consequently there will be elastic deformation of the engagement means which will compress the cable, preventing any movement of translation and rotation thereof.

[0016] If the cable is to be adjusted to a suitable length, after it has been locked by said engagement means, pressure is exerted with the fingers on the outer surface of the cap. Said pressure causes deformation of the bridges of the jaws which loosen, releasing the cable which can be adjusted in length.

[0017] It is obvious that said cable locking system represents a considerable evolution of the systems of the prior art. In fact, the cable is automatically locked inside the cap, regardless of whether a lamp base with relative hole is provided and regardless of the configuration and shape of the lamp-holder. The lamp-holder with quick-locking device for the electric cable according to the invention therefore proves much more versatile than electric cable locking devices of the prior art.

[0018] Further characteristics of the invention will be made clearer by the detailed description that follows, referring to a purely exemplary and therefore non-limiting embodiment thereof, illustrated in the appended drawings, in which:

Figure 1 is an axial section of a lamp-holder with quick-locking device for the electric cable according to the invention;

Figure 1a is an enlarged view of a detail of Figure 1;

Figure 2 is a front view of the lamp-holder with quick-locking device for the electric cable of Figure 1, in which the lamp holder and the quick-locking device for the electric cable are shown in a partially cutaway view;

Figure 2a is an enlarged view of a detail of Figure 2;

Figure 3 is an axonometric view of the quick-locking device for the electric cable according to the invention;

Figure 4 is a front view of the quick-locking device for the electric cable of Figure 3;

Figure 5 is section along the plane of section V-V of Figure 4;

Figure 6 is an axonometric view from below of the quick-locking device for the electric cable of Figure 3;

Figure 6a is an enlarged view of a detail of Figure 6.

[0019] The lamp-holder with quick-locking device of the electric cable according to the invention is described with the aid of the figures.

[0020] A lamp-holder 1 comprises a body of insulating material defining a bell-shaped seat with an internal thread for a screw base wherein a lamp of the type commonly available commercially is screwed. In this manner the electrical contacts of the lamp go into contact with the respective electrical contacts 2 of the lamp-holder communicating with the rear or upper part 3 of the lamp-holder 1 wherein seats 4 able to accommodate the strands 5 of an electric cable 6 are provided.

[0021] A cap 10 is positioned at the rear above the lamp-holder 1. The cap 10 is made of insulating material and comprises a substantially cylindrical hollow body 11. Above the body 11 rises a hollow tubular part 12 having an entry hole 100 for the electric cable.

[0022] The tubular part 12 has flexible serrations 13 that protrude outward to allow forced engagement inside a hole in a supporting base 14 of the lamp. As an alternative to the serrations 13 the tubular part 12 can have an outer thread for fixing to the base of the lamp by means of a nut or metal ring.

[0023] Two flexible tongues 15 disposed in diametrically opposite positions protrude downward from the body 11 for snap engagement with the lamp-holder. The tongues 15 have protrusions or small retaining teeth 16 such as to engage in corresponding seats made in the lamp-holder 1.

[0024] Two opposite jaws 20 are provided inside the body 11 of the cap. Each jaw 20 is supported by a small bridge 21 connected to the inner wall of the body 11. The small bridge 21 is made of a suitable flexible material to allow elastic yielding of the jaws 20. In the small bridge 21 are provided two reinforcing ribs 23 (Figures 6 and 7), parallel with each other, to avoid possible breakage of the small bridge.

[0025] In the wall of the body 11 of the cap toward the two bridges 21 two slits 24 are made, in diametrically opposite positions, to allow elastic yielding of the small bridges 21 when pressure is exerted.

[0026] The opposite surfaces of the jaws 20 have serrations 22 which are inclined slightly downward in order to be able to clasp the electric cable 6.

[0027] Assembly of the lamp-holder with quick-locking device for the electric cable according to the invention is described hereunder.

[0028] The electric cable 6 is inserted through the hole 100 from the top of the tubular part 12, then passes through the jaws 20 provided inside the body 11 of the cap 10. The jaws 20 are in close contact with the cable 6. Downward traction of the cable 6 causes pressure on the jaws 20 and thus downward elastic yielding of the small bridges 21 that support the jaws. Since the serrations 22 of the jaws face downward, they do not oppose downward sliding of the cable 6.

[0029] Once the desired length of the cable 6 has been reached, traction is exerted on said cable 6 in an upward direction, that is to say in the opposite direction to the direction of insertion of the cable. In this manner the serrations 22 of the jaws 20 firmly clasp the cable 6 and an upward elastic deformation of the small bridges 21 is caused. In this manner said small bridges 21 maintain the jaws 20 in such a position as to clamp the cable, with the serrations 22 which bite into the sheath of the cable 6.

[0030] If it is desired to further adjust the length of the cable 6, in order to bring about disengagement of the jaws 20, pressure is exerted with the fingers on the outer surface of the body 11 of the cap 10, exactly in the direction of the flexible tongues 15. This pressure causes elastic yielding of the small bridges 21 which bend downward causing disengagement of the jaws 20 from the cable 6. The length of the cable can then be adjusted and it can be locked again by pulling upward.

[0031] Once the length of the cable 6 has been suitably adjusted, the strands 5 of the cable are inserted in the seats 4 of the contacts of the lamp-holder 1 and the cap 10 is snap fastened onto the lamp-holder through engagement of the elastic tongues 15.

[0032] It is obvious that this system for rapid fixing of the electric cable proves extremely simple and depends neither on the lamp-holder supporting base if present nor on the particular shape of the lamp-holder.

[0033] Numerous modifications and variations within the reach of a skilled in the art can be made to the present embodiment, nevertheless remaining within the scope of the invention expressed in the appended claims.

Claims

1. A lamp-holder with a quick-locking device for the electric cable, comprising a bell-shaped lamp-holder body (1) that provides a base for a lamp and a rear part (3) in which electrical contacts (2) and seats (4) to receive the strands (5) of an electric cable (6) are provided, and a cap (10), suitable to be applied over said lamp-holder (1), having a hole (100) for entry of the electric cable (6) and bearing engagement

means (20) to lock said electric cable, **characterized in that** said engagement means (20), which are integral with the inside wall of the cap (10) by means of respective flexible small bridges (21), are elastically yielding to be brought into firm locking on said electric cable by means of simple traction on the electric cable (6) in the opposite direction to that of insertion of the cable.

2. A lamp-holder according to claim 1, **characterized in that** said engagement means (20) are two opposite jaws (20) integral with the inside walls of said cap (10). 5
3. A lamp-holder according to claim 1, **characterized in that** said flexible small bridges (21) have reinforcing ribs (23). 10
4. A lamp-holder according to claim 2 or 3, **characterized in that** the opposite surfaces of said jaws (20) comprise serrations (22), able to bite into the sheath of the cable (6). 15
5. A lamp-holder according to claim 4, **characterized in that** said serrations (22) are inclined in the direction of insertion of the electric cable (6). 20
6. A lamp-holder according to any one of the preceding claims, **characterized in that** in the body (11) of the cap, in proximity to the small bridges (21) bearing the engagement means (20), slits are provided to allow elastic yielding of said small bridges (21), by means of pressure, for disengagement of the cable (6) from said engagement means. 25
7. A lamp-holder according to any one of the preceding claims, **characterized in that** said hole (100) for entry of the electric cable (6) in said cap (10) is made in a tubular part (12) protruding upward from the cap (10). 30
8. A lamp-holder according to claim 7, **characterized in that** said tubular part (12) provides an external serration (13) for engagement in a hole in the supporting base (14) of the lamp. 35
9. A lamp-holder according to claim 7, **characterized in that** said tubular part (12) provides a threaded end for fixing by means of a ring or nut means to a supporting base (14) of the lamp. 40

Patentansprüche

1. Lampenhalter mit einer Schnellfixiervorrichtung für elektrische Kabel, umfassend einen glockenförmigen Lampenhalterkörper (1), der eine Basis für eine Lampe bereitstellt und ein Hinterteil (3), in welches 45

elektrische Kontakte (2) und Aufnahmen(4) der Litzen (5) eines elektrischen Kabels (6) vorgesehen sind, und einen Lampensockel (10) passend zum Anbringen über dem Lampenhalter (1), der ein Loch (100) zum Einführen des elektrischen Kabels (6) aufweist und Eingriffsmittel (20) trägt, um das elektrische Kabel zu fixieren, **dadurch gekennzeichnet, dass** die Eingriffsmittel (20), die durch jeweilige flexible kleine Brücken (21) einstückig mit der innen liegenden Wand des Lampensockels (10) sind, elastisch nachgeben, um in eine stabile Fixierung auf dem elektrischen Kabel durch einfaches Ziehen an dem elektrischen Kabel (6) in der gegenüberliegenden Richtung zu jener der Kabeleinführung gebracht zu werden.

2. Lampenhalter nach Anspruch 1, **dadurch gekennzeichnet, dass** die Eingriffsmittel (20) zwei sich gegenüberliegende Klemmbacken (20) sind, die einstückig mit den Innenwänden des Lampensockels (10) sind.
3. Lampenhalter nach Anspruch 1, **dadurch gekennzeichnet, dass** die flexiblen kleinen Brücken (21) Verstärkungsrippen (23) aufweisen.
4. Lampenhalter nach Anspruch 2 oder 3, **dadurch gekennzeichnet, dass** die sich gegenüberliegenden Flächen der Klemmbacken (20) Kerbungen (22) umfassen, die in der Lage sind, in die Kabelhülle (6) einzugreifen.
5. Lampenhalter nach Anspruch 1, **dadurch gekennzeichnet, dass** die Kerbungen (22) in der Richtung der Einführung des elektrischen Kabels (6) geneigt sind.
6. Lampenhalter nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** im Körper (11) des Lampensockels in der Nähe der kleinen Brücken (21), die die Eingriffsmittel (20) tragen, Schlitzte vorgesehen sind, um ein elastisches Nachgeben der kleinen Brücken (21) mittels Druck zu ermöglichen, um das Kabel (6) aus den Eingriffsmitteln zu lösen.
7. Lampenhalter nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** das Loch (100) zur Einführung des elektrischen Kabels (6) in den Lampensockel (10) in einem rohrförmigen Teil (12), das aufwärts aus dem Lampensockel (10) hervorstreckt, hergestellt ist.
8. Lampenhalter nach Anspruch 7, **dadurch gekennzeichnet, dass** das rohrförmige Teil (12) eine äußere Kerbung (13) für den Eingriff in ein Loch in der Haltebasis (14) der Lampe bereitstellt.





9. Lampenhalter nach Anspruch 7, **dadurch gekennzeichnet, dass** das rohrförmige Teil (12) ein Gewinde zur Fixierung durch einen Ring oder Gewindemuttermitteln zu einer Haltebasis (14) der Lampe bereitstellt.

Revendications

1. Douille de lampe comportant un dispositif de verrouillage rapide pour le câble électrique, comprenant un corps de douille de lampe en forme de cloche (1), qui constitue une base pour une lampe et une pièce arrière (3) dans laquelle sont placés des contacts électriques (2) et des sièges (4) destinés à recevoir les brins (5) d'un câble électrique (6), et un capuchon (10) apte à être appliqué sur ladite douille de lampe (1), présentant un trou (100) d'entrée du câble électrique (6) et supportant des moyens d'engagement (20) permettant de verrouiller ledit câble électrique, **caractérisé en ce que** lesdits moyens d'engagement (20) qui forment un bloc avec la paroi intérieure du capuchon (10) grâce à des petits ponts souples respectifs (21) fléchissent élastiquement pour être amenés en verrouillage ferme sur ledit câble électrique par une simple traction exercée sur le câble électrique (6) dans le sens opposé au sens d'insertion du câble. 10 15 20 25
2. Douille de lampe selon la revendication 1, **caractérisée en ce que** lesdits moyens d'engagement (20) sont deux mâchoires opposées (20) formant un bloc avec les parois intérieures dudit capuchon (10). 30
3. Douille de lampe selon la revendication 1, **caractérisée en ce que** lesdits petits ponts souples (21) comportent des nervures de renfort (23). 35
4. Douille de lampe selon la revendication 2 ou 3, **caractérisée en ce que** les surfaces opposées desdites mâchoires (20) comportent des dentelures (22) aptes à mordre dans la gaine du câble (6). 40
5. Douille de lampe selon la revendication 4, **caractérisée en ce que** lesdites dentelures (22) sont inclinées dans le sens d'insertion du câble électrique (6). 45
6. Douille de lampe selon l'une quelconque des revendications précédentes, **caractérisée en ce que**, dans le corps (11) du capuchon, à proximité des petits ponts (21) supportant les moyens d'engagement (20), des fentes sont pratiquées pour permettre le fléchissement élastique desdits petits ponts (21) par pression afin de dégager le câble (6) desdits moyens d'engagement. 50 55
7. Douille de lampe selon l'une quelconque des revendications précédentes, **caractérisée en ce que** ledit

trou (100) d'entrée du câble électrique (6) dans ledit capuchon (10) est pratiqué dans une pièce tubulaire (12) saillant vers le haut depuis le capuchon (10).

- 5 8. Douille de lampe selon la revendication 7, **caractérisée en ce que** ladite pièce tubulaire (12) présente une dentelure externe (13) destinée à s'engager dans un trou de la base de support (14) de la lampe.
- 10 9. Douille de lampe selon la revendication 7, **caractérisée en ce que** ladite pièce tubulaire (12) présente une extrémité filetée destinée à être fixée à l'aide d'un moyen à anneau ou à écrou sur une base de support (14) de la lampe. 15 20 25 30 35 40 45 50 55

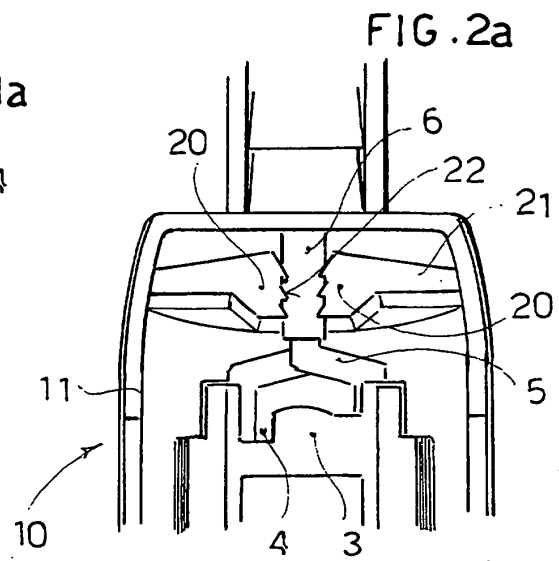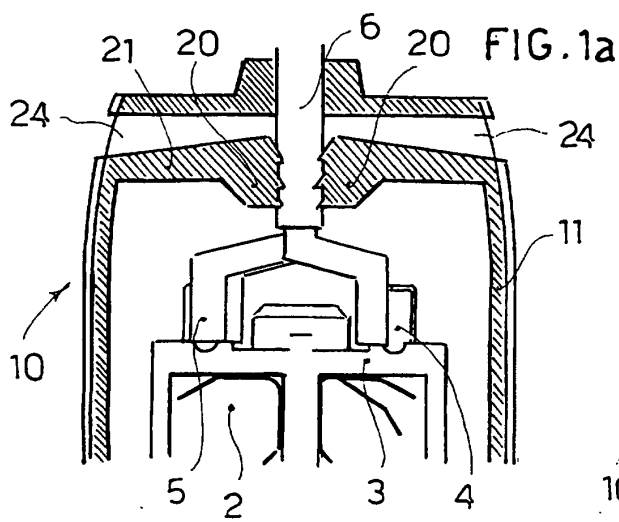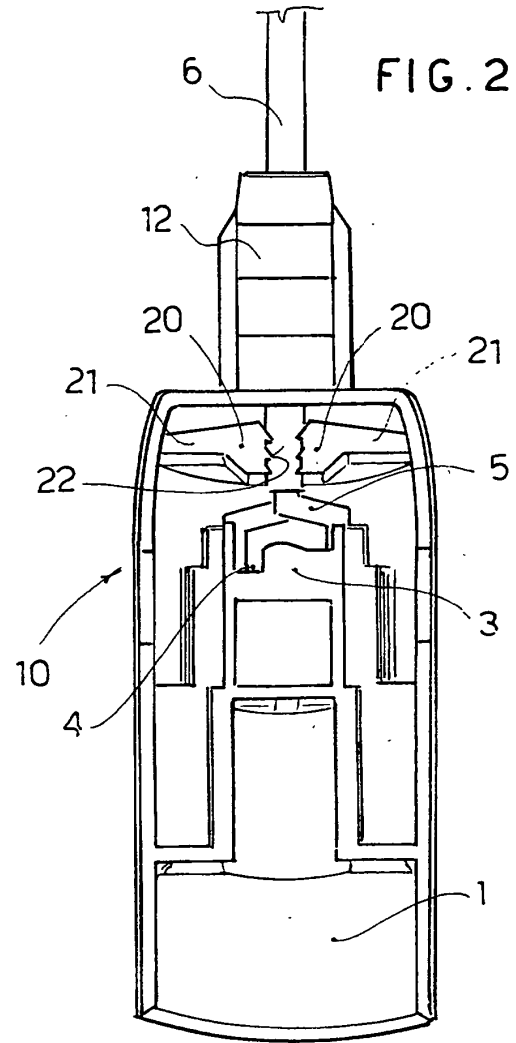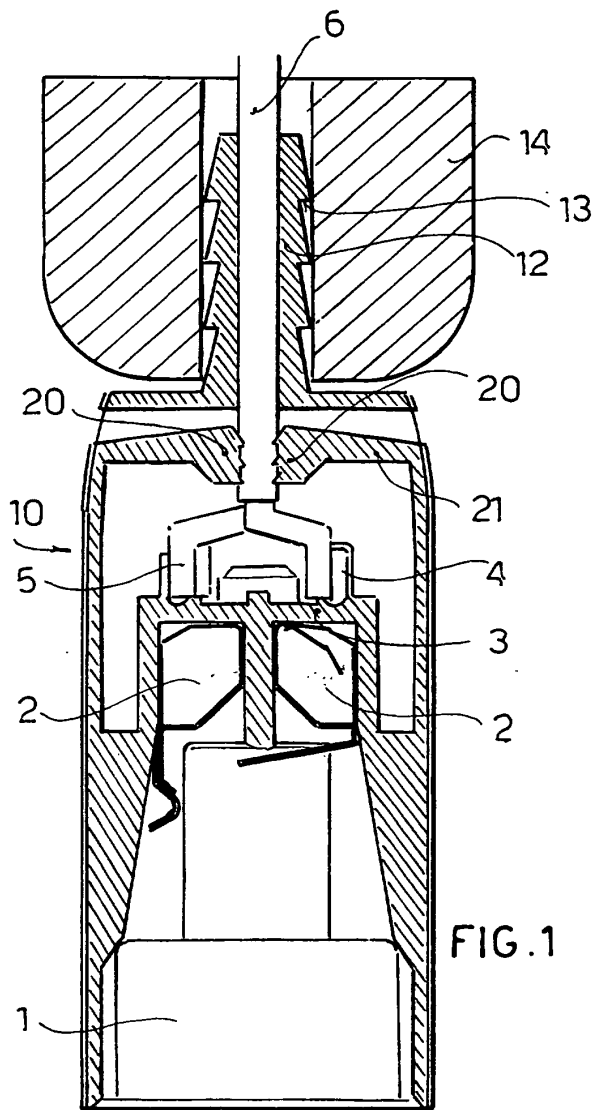

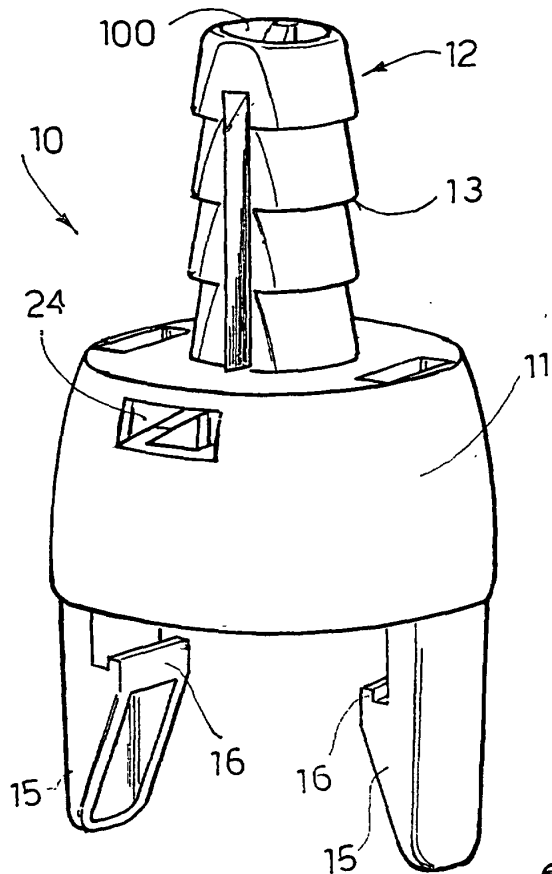


FIG. 3

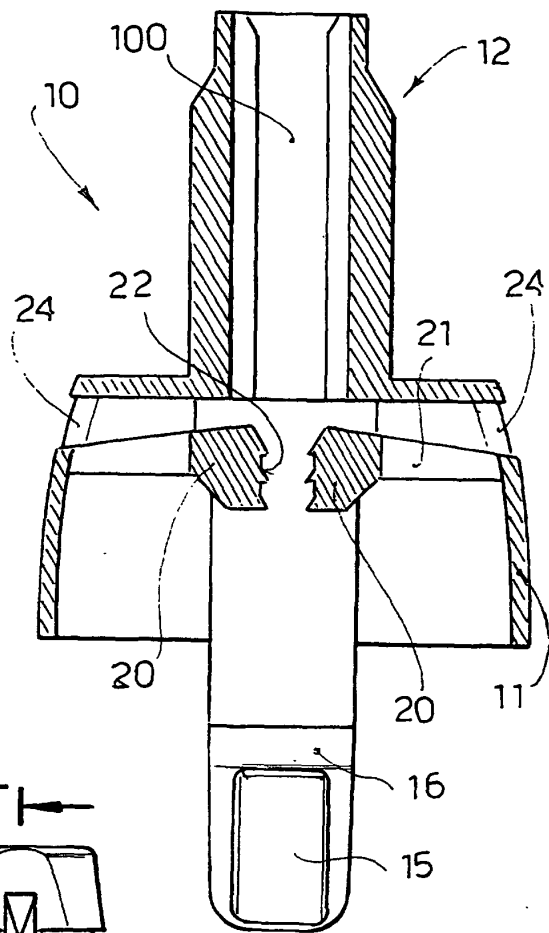


FIG. 5

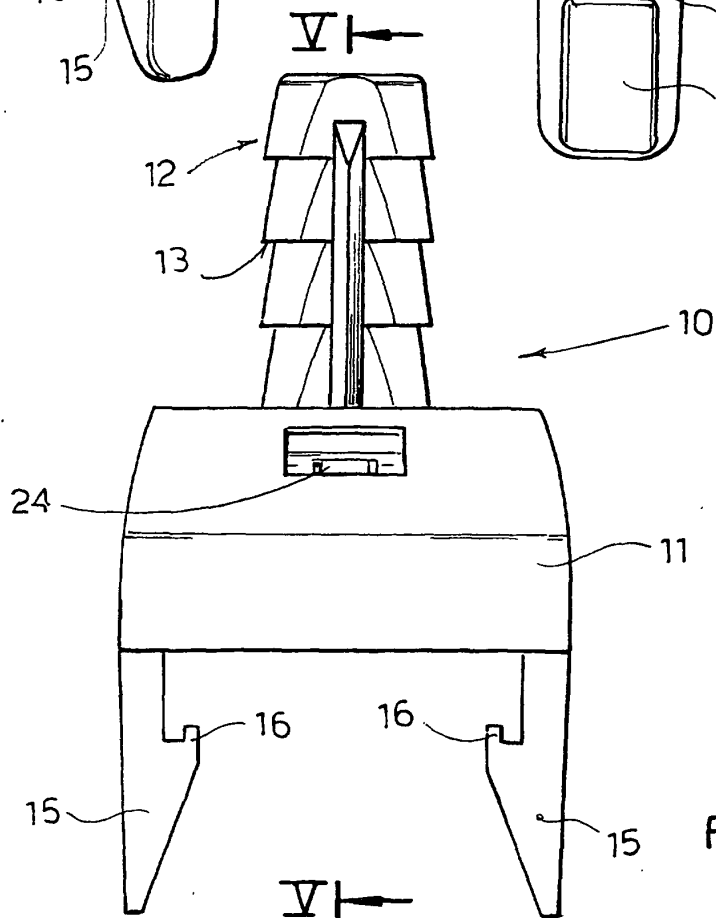


FIG. 4

FIG. 6

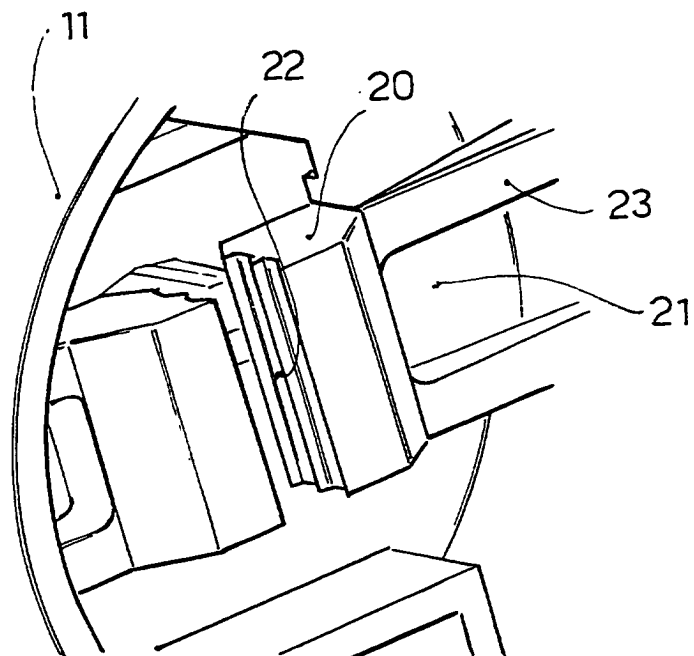
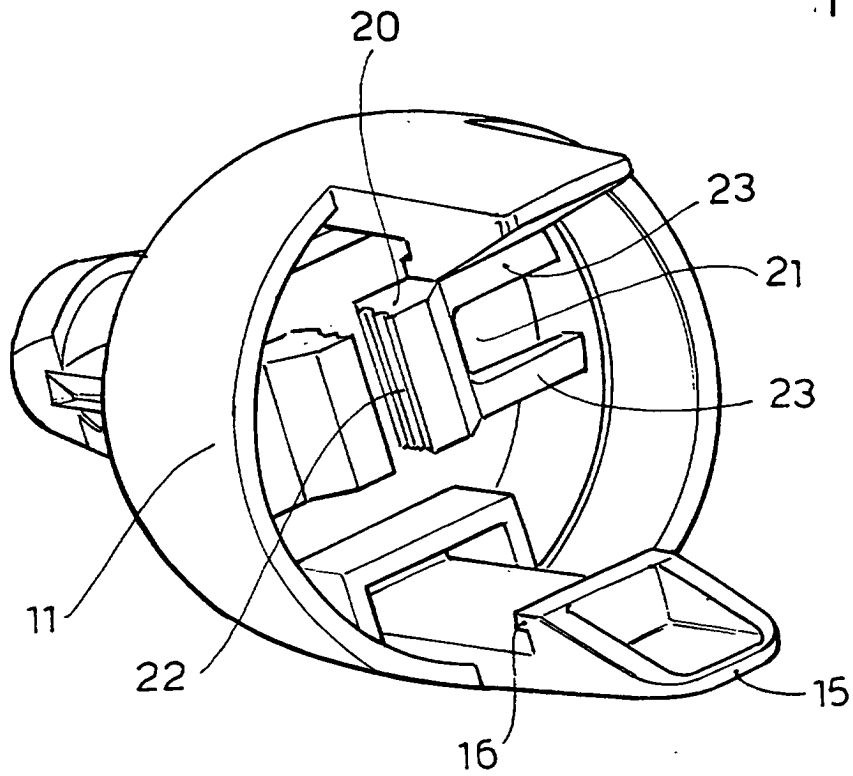


FIG. 6a

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- IT MI940534 U [0003]
- IT MI980005 U [0006]
- DE 8805216 U [0009]