



- (51) International Patent Classification:
B66B 5/04 (2006.01)
- (21) International Application Number:
PCT/EP2016/072503
- (22) International Filing Date:
22 September 2016 (22.09.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/878,511 8 October 2015 (08.10.2015) US
- (71) Applicants: **THYSSENKRUPP ELEVATOR AG** [DE/DE]; ThyssenKrupp Allee 1, 45143 Essen (DE).
THYSSENKRUPP AG [DE/DE]; ThyssenKrupp Allee 1, 45143 Essen (DE).
- (72) Inventor: **POWERS, Alison**; 1999 Linden Avenue, Memphis, Tennessee 38104 (US).
- (74) Agent: **THYSSENKRUPP INTELLECTUAL PROPERTY GMBH**; ThyssenKrupp Allee 1, 45143 Essen (DE).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: GOVERNOR INERTIA CARRIER

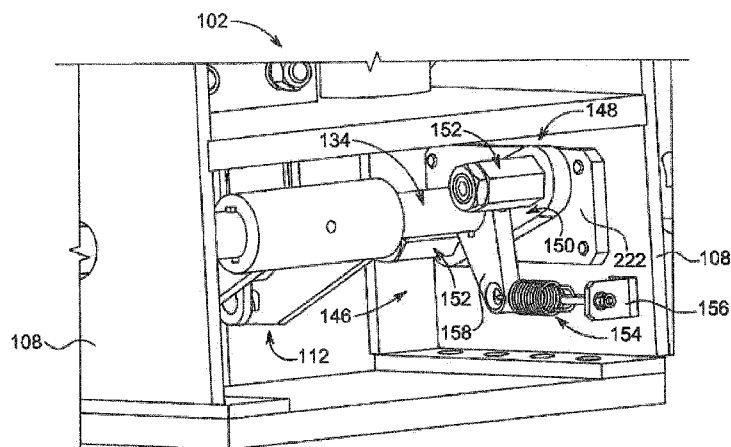


FIG. 4

- (57) Abstract: An elevator governor inertia carrier (146) comprising: a cartridge assembly (148) having a shaft opening (160) for receiving a shaft (134) through the shaft opening (160), the cartridge assembly configured for fixed attachment to the shaft (134); and at least one force-exerting element (152) associated with the cartridge assembly (148) and offset from the shaft (160) opening, the at least one force-exerting element (152) comprising: a hollow body (178) having an internal cavity (180) extending between a first open end (182) and a second end (202); an elastically-resilient element (214) retained within the internal cavity (180); and a contact member (192) at least partially disposed within the internal cavity (178) and in contact with or formed at an end of the elastically-resilient element (214), wherein the contact member (192) is retractable into the internal cavity (178) to compress the elastically-resilient element (214) when a force greater than a restoring force of the elastically-resilient element (214) is applied to the contact member (192).



GOVERNOR INERTIA CARRIER

BACKGROUND OF THE DISCLOSURE

Field of the Disclosure

The present disclosure relates generally to a system and method for an elevator safety mechanism and, more particularly, to a system and method for a governor inertia carrier used in activating an elevator safety mechanism.

Description of Related Art

In various elevator installations, a safety mechanism is installed on an elevator car to bring the descending elevator car to a stop under certain conditions, such as an uncontrolled descending of the elevator car. The safety mechanism, when actuated, typically operates upon guide rails between which the elevator car is located. The safety mechanism is actuated by a separate speed governor which is set to trip at a predetermined car speed in the down travel direction.

With reference to **FIG. 1**, an elevator installation equipped with a safety mechanism is shown according to the known state of the art. This installation has an elevator car **10** which is moved between different floors of an elevator shaft (not shown), for example by means of a motor **20** acting on a traction cable or a cluster of traction cables **21**. One end of the traction cable or cluster of traction cables **21** is connected to the elevator car **10**, while the opposing end of the traction cable or cluster of traction cables **21** is connected to a counterweight **22**. The elevator car **10** is guided by a pair of lateral rails **30** extending vertically in the elevator shaft. The elevator car **10** engages the rails **30** through guides **31**. For clarity, only one of these rails **30** is shown in **FIG. 1**.

The elevator installation has a governor assembly having a governor sheave **50** which is mounted in a top portion of the elevator shaft and a governor cable **60** wound between the governor sheave

50 and a tail sheave **51**. The governor cable **60** is tensioned by means of a tension weight **52** acting on the tail sheave **51**.

The governor cable **60** is fixed to the elevator car **10** by a plate **53**, which is also connected to a safety mechanism **15** mounted on the elevator car **10** by a governor rope lever **11**. In normal operation, such as when the speed of the elevator car **10** is less than a limit speed, the elevator car **10** drives the governor cable **60**. Such movement of the governor cable **60** rotates the governor sheave **50**. During normal operation, any stress on the plate **53** by a pulling force due to the inertia of the governor cable **60** may be offset by, for example, one or more holding tension springs.

When the speed of the car **10** reaches or exceeds a limit speed by at least a predetermined amount, such as when the car **10** starts to free fall, the governor sheave **50** locks, such as by actuation of centrifugal weights that engage a toothed fixed cylinder, and the governor cable **60** is immobilized. This causes a pulling force on the plate **53**, which actuates the governor rope lever **11**, which then acts on the safety mechanism **15** to actuate brakes **12** and **13**. The brakes **12**, **13**, in return, engage the rails **30**, such as by clamping against the rails **30**, to bring the elevator car **10** to a safe stop.

One of the drawbacks of existing safety mechanisms is that inertia of the governor assembly during normal operation can cause unintended activation of the safety mechanism. During normal acceleration of the elevator car, the inertia of the governor rope **60**, the sheaves **50**, **51**, and the tension weight **52** exerts a force on the governor rope lever **11**. In certain circumstances, the inertia of the governor assembly can activate the safety assembly even though the elevator car **10** is operated within the limit speed. One solution to this problem is to use one or more holding tension springs to hold a safety arm connected to the governor rope lever **11** and prevent its unintended engagement until the limit speed is reached or exceeded. However, space surrounding the safety mechanism **15** is critical, and multiple tension springs often require more space than what is available. In addition, the force exerted by the springs increases linearly as the safety mechanism is activated, thereby resulting in large activation forces on various components and linkages of the safety assembly.

It would be desirable to provide a new and improved safety mechanism for preventing unintended activation of the safety mechanism due to inertia of the governor assembly.

SUMMARY OF THE DISCLOSURE

In view of the disadvantages of the existing safety mechanism, there is a need in the art for an improved safety mechanism that overcomes the deficiencies of the prior art.

In accordance with some embodiments, an elevator governor inertia carrier may include a cartridge having a shaft opening for receiving a shaft through the shaft opening. The cartridge may be configured for fixed attachment to the shaft. The governor inertia carrier may further have at least one force-exerting element associated with the cartridge plate and offset from the shaft opening. The at least one force-exerting element may include a hollow body with an internal cavity extending between a first open end and a second end, an elastically-resilient element retained within the internal cavity, and a contact member at least partially disposed within the internal cavity and in contact with or formed at a first end of the elastically-resilient element. The contact member may be retractable into the internal cavity to compress the elastically-resilient element when a force greater than a restoring force of the elastically-resilient element is applied to the contact member.

In accordance with another embodiment, the second end of the hollow body of the force-exerting element may be open. The second end may be enclosed by an adjustment element that is movably adjustable relative to the hollow body and in contact with a second end of the elastically-resilient element to control compression of the elastically-resilient element between the adjustment element and the contact member. The adjustment element may have a seat for contacting the elastically-resilient element at a first end and a socket for engaging an adjustment tool at a second end. The adjustment element may be movable toward the first end of the hollow body by rotating the adjustment element in a first direction to increase the compression of the elastically-resilient element. The adjustment element may be movable toward the second end of

the hollow body by rotating the adjustment element in a second direction opposite to the first direction to decrease the compression of the elastically-resilient element. A locking element may be provided for preventing rotatable movement of the adjustment element relative to the hollow body when the locking element engages at least a portion of the hollow body and the adjustment element.

In accordance with another embodiment, the contact member may have a body with a rounded front end that is extendable from the first end of the hollow body and a radially-outwardly protruding lip that is retained within the interior cavity of the hollow body. A collar may protrude radially-inward from a sidewall of the interior cavity. The collar may have a stop surface that limits a protrusion of the pin from the first end of the hollow body. A detent plate may be facing the bottom surface of the cartridge. The detent plate may have at least one detent shaped to receive the contact member. In a first state, the contact member may be engaged within the detent. In a second state, rotation of the cartridge relative to the detent plate may force the contact member out of the detent and at least partially into the interior cavity of the hollow body. The restoring force of the elastically-resilient element may be preset or adjustable.

In accordance with another embodiment, the cartridge may have one or more through holes extending into the shaft opening. A retention member may be provided in each through hole for engaging at least a portion of the shaft and preventing axial movement of the cartridge on the shaft. The shaft opening may have a recessed portion for receiving a shaft support element. The at least one force-exerting element may be removably or non-removably connected to the cartridge. The shaft may be provided such that the shaft is received within the shaft opening of the cartridge. A housing may be provided for receiving at least a portion of the governor inertia carrier. The detent plate may be fixedly mounted to the housing, and the shaft and the cartridge may be rotatable relative to the housing and the detent plate.

In accordance with another embodiment, a safety mechanism for an elevator may include a housing attachable to at least a portion of an elevator car, a safety activation lever connecting a governor assembly to a rotatable shaft disposed within the housing, a braking assembly activated by a rotation of the shaft, and a governor inertia carrier associated with the shaft and the housing.

The governor inertia carrier may have a cartridge having a shaft opening for receiving the shaft through the shaft opening. The cartridge may be configured for fixed attachment to the shaft. At least one force-exerting element may be associated with the cartridge. The at least one force-exerting element may have a hollow body with an internal cavity extending between a first open end and a second end. An elastically-resilient element may be retained within the internal cavity. A contact member may be at least partially disposed within the internal cavity such that a first end of the contact member is in contact with or is formed with the elastically-resilient element and a second end of the contact member received in a detent associated with the housing. The contact member may be retractable out of the detent and into the internal cavity when a force greater than a restoring force of the elastically-resilient element is applied to the contact member.

In accordance with another embodiment, a safety mechanism for an elevator may have a housing attachable to at least a portion of an elevator car, a safety activation lever connecting a governor assembly to a rotatable shaft disposed within the housing, a braking assembly activated by a rotation of the shaft, and a governor inertia carrier associated with the shaft and the housing. The governor inertia carrier may have a spring-loaded contact member received within a detent associated with the housing, wherein the spring-loaded contact member is retractable out of the detent when a force greater than a spring-load force of the spring-loaded element is applied to the spring-loaded contact member.

These and other features and characteristics of a governor inertia carrier used in activating an elevator safety mechanism, as well as the methods of operation and functions of the related elements of structures and the combination of parts and economies of manufacture, will become more apparent upon consideration of the following description and the appended claims with reference to the accompanying drawings, all of which form a part of this specification, wherein like reference numerals designate corresponding parts in the various figures. It is to be expressly understood, however, that the drawings are for the purpose of illustration and description only. As used in the specification and the claims, the singular form of “a”, “an”, and “the” include plural referents unless the context clearly dictates otherwise.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view of an elevator installation having a safety mechanism in accordance with a prior art embodiment;

FIG. 2A is a front perspective view of a safety mechanism of an elevator car in accordance with one embodiment of the present disclosure;

FIG. 2B is a rear perspective view of the safety mechanism shown in **FIG. 2A**;

FIG. 3A is a perspective view of a braking assembly for use with the safety mechanism illustrated in **FIG. 2**, showing the braking assembly in an inactive state;

FIG. 3B is a perspective view of the braking assembly of the safety mechanism illustrated in **FIG. 3A**, showing the braking assembly in an activated state;

FIG. 4 is a rear perspective view of a braking mechanism of a safety mechanism having a release carrier assembly in accordance with one embodiment of the present disclosure;

FIG. 5 is a perspective view of a cartridge assembly for use with a braking assembly of a safety mechanism in accordance with one embodiment of the present disclosure;

FIG. 6 a cross-sectional view of the cartridge assembly of **FIG. 5** installed on the safety mechanism of the elevator car;

FIG. 7 is a cross-sectional, partially exploded view of a cartridge of the cartridge assembly shown in **FIG. 6**;

FIG. 8A is a perspective view of the braking assembly of the safety mechanism illustrated in **FIG. 4**, showing the braking assembly is an inactive state; and

FIG. 8B is a perspective view of the braking assembly of the safety mechanism illustrated in **FIG. 8A**, showing the braking assembly is an activated state.

DETAILED DESCRIPTION OF THE DISCLOSURE

For purposes of the description hereinafter, the terms “upper”, “lower”, “right”, “left”, “vertical”, “horizontal”, “top”, “bottom”, “lateral”, “longitudinal”, and derivatives thereof shall relate to the disclosure as it is oriented in the drawing figures. It is to be understood, however, that the disclosure may assume alternative variations and step sequences, except where expressly specified to the contrary. It is also to be understood that the specific devices and processes illustrated in the attached drawings, and described in the following specification, are simply exemplary embodiments of the disclosure. Hence, specific dimensions and other physical characteristics related to the embodiments disclosed herein are not to be considered as limiting.

Referring to the drawings in which like reference characters refer to like parts throughout the several views thereof, the present disclosure is generally directed to a system and method for an elevator safety mechanism and, more particularly, to a system and method for a governor inertia carrier used in activating an elevator safety mechanism. With reference to **FIGS. 2A-2B**, the elevator safety mechanism, hereinafter referred to as safety mechanism **100**, is configured for mounting to an elevator installation, such as the elevator car **10** shown in **FIG. 1**. In some embodiments, the safety mechanism **100** may be fixed, such as by fastening, welding, or other mechanical connection means, to at least a portion of the elevator car **10**. The safety mechanism **100** is in an inactive state during normal operation of the elevator car **10**, such as when the elevator car **10** is operated at or below the limit speed. If the limit speed is reached or exceeded, or if the elevator car **10** is in free fall, the governor assembly of the elevator installation is activated, thereby causing an activation of the safety mechanism **100**. In some embodiments, the governor may sense a free fall state before the limit speed is reached. A braking assembly of the safety mechanism **100** engages the rail, such as the guide rail **30** shown in **FIG. 1** to bring the elevator car **10** to a stop.

With continued reference to **FIGS. 2A-2B**, the safety mechanism **100** generally has a housing **102** having a top member **104** separated from a bottom member **106** by a pair of side members **108**. At least a portion of the housing **102** is configured for attachment, either directly or indirectly, to the elevator car **10** (shown in **FIG. 1**). The housing **102** defines a cavity **110** for receiving a braking assembly **112** that is acted upon, directly or indirectly, by the governor rope **60** (shown in **FIG. 1**). The braking assembly **112** is operable between an inactive state, where the braking assembly is disengaged from contacting the guide rail **30** (shown in **FIG. 1**), and an active state, where at least a portion of the braking assembly is directly engaged with the guide rail **30**, as described herein.

With reference to **FIGS. 3A-3B**, the braking assembly **112** is shown removed from the housing **102**. **FIG. 3A** illustrates the braking assembly **112** in an inactive state, while **FIG. 3B** illustrates the braking assembly **112** in an active state. The braking assembly **112** has a safety activating lever **114** having a first end **116** pivotally connected to the housing **102** (shown in **FIGS. 2A-2B**) and a second end **118** connected to at least a portion of the governor assembly, such as the governor rope **60**. A clevis rod **120** is connected to the safety activating lever **114** between the first end **116** and the second end **118**. In some embodiments, the clevis rod **120** may be connected to the safety activating lever **114** by a pinned connection **122**, or other mechanical connection means. The clevis rod **120** has a slotted end **124** opposite the pinned connection **122**. The slotted end **124** receives a pin **126** of a wedge lever arm **128** such that the pin **126** is movable within the slotted end **124** of the clevis rod **120** with movement of the clevis rod **120** when the governor rope **60** acts on the safety activating lever **114** in the direction of the arrows in **FIGS. 3A-3B**. The wedge lever arm **128** has a pair of arms **130a**, **130b** connected to a central portion **132** that is keyed to a rotatable shaft **134** by a key **136**. In this manner, rotation of the wedge lever arm **128** due to movement of the clevis rod **120** causes a corresponding rotation of the shaft **134**. A safety wedge carrier **138** is offset axially from the wedge lever arm **128** along a longitudinal axis of the shaft **134**. The safety wedge carrier **138** is also keyed to the shaft **134** such that a rotation of the shaft **134** causes a corresponding rotation of the safety wedge carrier **138**. A pair of safety wedges **140** having a braking surface **142** is attached to the safety wedge carrier **138** by arms **144a**, **144b**. Rotation of the shaft **134** due to movement of the wedge lever arm **128** causes the safety wedge carrier **138** to rotate, thereby moving the safety wedges **140**

from a first, inactive position (shown in **FIG. 3A**), where the braking surface **142** is disengaged from the guide rail **30** (shown in **FIG. 1**), to a second, active position (shown in **FIG. 3B**), where the braking surface **142** engages the guide rail **30** to stop the elevator car **10**.

With reference to **FIG. 4**, the shaft **134** is rotatably engaged between the side members **108** of housing **102**. In order to prevent unintended activation of the braking assembly **112** during normal operation of the elevator installation due to inertia of the governor assembly pulling on the safety activating lever **114**, a governor inertia carrier **146** is provided to resist against the pulling force of the governor assembly up to a predetermined force threshold. Once the predetermined force threshold is reached or exceeded, the resistance from the governor inertia carrier **146** is overcome to allow the braking assembly **112** to be activated.

With continued reference to **FIG. 4**, the governor inertia carrier **146** has a cartridge assembly **148** having a cartridge plate **150** that is keyed with the shaft **134** for rotation with the shaft **134**. The cartridge assembly **148** is pre-loaded against the housing **102** or another component attached to the housing **102**. During normal operation of the elevator installation, such as when the operating speed is at or below the limit speed, the force applied to the safety activating lever **114** due to inertia of the governor rope **60** during acceleration of the elevator car is insufficient to overcome the pre-load of the cartridge assembly **148**. In this manner, rotation of the shaft **134** and consequent activation of the braking assembly **112** is prevented. If the limit speed of the elevator car is exceeded, or if the elevator car **10** is in free fall, and the governor sheave is locked, the force exerted by the governor rope **60** on the safety activating lever **114** is sufficient to overcome the pre-load of the cartridge assembly **148** and allow the rotation of the shaft **134** and consequent activation of the braking assembly **112** to stop movement of the elevator car **10** (shown in **FIG. 1**).

In some embodiments, the cartridge assembly **148** may be used in combination with a secondary means for controlling the pre-load force that must be overcome before the braking assembly **112** can be activated. For example, the cartridge assembly **148** may be used in combination with one or more tension springs **154** connected at one end to the housing **102**, either directly or by way of a bracket **156** or other element, and at the other end to a spring arm **158** that is keyed with the

shaft **134**. The one or more tension springs **154** can be used to change the pre-load force by either increasing or decreasing the force that must be applied to the cartridge assembly **148** and the one or more tension springs **154** before the braking assembly **112** can be activated. In some embodiments, the one or more tension springs **154** may have a plurality of tension springs **154** connected in series, parallel, or a combination of both. In other embodiments, the one or more tension springs **154** may be substituted by or supplemented with a hydraulic or pneumatic element (not shown) that can be used to augment the pre-load of the cartridge assembly **148**.

With continued reference to **FIG. 4**, the cartridge assembly **148** has at least one force-exerting element **152** associated with the cartridge plate **150**. The at least one force-exerting element **152** exerts a force on at least a portion of the housing **102** or another component connected to the housing **102** to counter the unintended rotation of the shaft **134**. In some embodiments, the at least one force-exerting element **152** may have a pre-set force that is not adjustable. In other embodiments, the force exerted by the force-exerting element **152** may be adjustable to select the pre-load force of the force-exerting element **152** that must be overcome before the braking assembly **112** can be activated.

With reference to **FIG. 5**, a cartridge assembly **148** is shown isolated from the housing **102** of the safety mechanism **100**. The cartridge plate **150** has a top surface **150a** opposite a bottom surface **150b**. A shaft opening **160** extends between the top surface **150a** and the bottom surface **150b**. The shaft opening **160** may have a key slot **162**. The shaft **134** is received within the shaft opening **160** of the cartridge plate **150** such that the key **164** (shown in **FIG. 6**) on the shaft **134** engages the key slot **162** to allow the cartridge plate **150** to rotate with the shaft **134**. The shaft opening **160** is desirably coaxial with a central axis **172** of the shaft **134** (shown in **FIG. 6**). One or more through holes **166** may extend through the cartridge plate **150** into the shaft opening **160** to allow the cartridge plate **150** to be axially fixed relative to the shaft **134**, such as by a retaining element, such as a set screw (not shown), or a similar mechanical fastener. The shaft opening **160** may have a recessed portion **168** configured to provide clearance space for a shaft support element **170**, such as a bushing or a bearing, that rotatably supports the shaft **134** to the housing **102** of the safety mechanism **100**.

With reference to **FIG. 6**, and with continued reference to **FIG. 5**, the cartridge plate **150** has at least one side opening **174** that is offset from the shaft opening **160**. In some embodiments, the cartridge plate **150** may have a pair of side openings **174** offset radially on opposing sides of the shaft opening **160**. The one or more side openings **174** may be provided at a distance **D** away from the shaft opening **160**. In some embodiments, a central axis of the one or more side openings **174** may be parallel with the central axis of the shaft opening **160**. Each side opening **174** receives at least a portion of the force-exerting element **152**. At least a portion of each force-exerting element **152** protrudes from the top surface **150a** and/or the bottom surface **150b** of the cartridge plate **150**. In some embodiments, each force-exerting element **152** is removably or non-removably connected to the cartridge plate **150**. For example, the one or more force-exerting elements **152** may be connected to the respective side openings **174** on the cartridge plate by a threaded connection **176** such that the one or more force-exerting elements **152** may be removed from the respective side openings **174**. In other embodiments, the one or more force-exerting elements **152** may be permanently and non-removably connected to the cartridge plate **150**, such as by adhesive means, an interference fit, or other mechanical connection means. In further embodiments, the one or more force-exerting elements **152** may be monolithically formed with the cartridge plate **150**.

With reference to **FIG. 7**, the force-exerting element **152** has a hollow, substantially cylindrical body **178** with an internal cavity **180**. The body **178** has a first end **182** that is configured for being received within at least a portion of the side opening **174**. The first end **182** may have a male thread **184** on an outer circumference of the body **178** that engages a corresponding female thread on the side opening **174** to form the threaded connection **176**. The first end **182** may have a bushing **186** within at least a portion of the internal cavity **180**. A portion of the internal cavity **180** may have a collar **190** that narrows in a radial direction relative to a sidewall of the internal cavity **180** to define a first stop surface **188** that engages the bushing **186** to prevent axial movement of the bushing **186** into the internal cavity **180**. The bushing **186** may be retained within the internal cavity **180** by an interference fit, or other mechanical connection, to prevent the bushing **186** from sliding out of the internal cavity **180**.

With continued reference to **FIG. 7**, the collar **190** and/or the bushing **186** define a guide path for a contact member, such as a pin **192**, that is axially movable relative to the body **178**. The pin **192** has a pin body **194** with a rounded front end **196** and a rear lip **198** that protrudes radially outward relative to the pin body **194**. The rear lip **198** engages the collar **190** at a second stop surface **200** to prevent the pin **192** from being removed from the internal cavity **180** through the first end **182**. The pin **192** is movable axially within the internal cavity **180** such that at least a portion of the pin **192** may protrude relative to a plane defined by a terminal surface of the first end **182**. In some embodiments, when the rear lip **198** of the pin **192** engages the collar **190**, the rounded front end **196** protrudes from the first end **182** of the body **178**. In some embodiments, the pin **192** may have a spherical shape.

A second end **202** of the body **178** is provided opposite the first end **182**. The second end **202** has one or more first threads **204** formed on the sidewall of the internal cavity **180** for threadably engaging one or more second threads **206** on an adjustment element **208**. The adjustment element **208** has a first end **210** having a seat **212** for engaging one end of a resiliently elastic element, such as a spring **214** provided within the internal cavity **180** of the body **178**. The opposing end of the spring **214** engages at least a portion of the pin **192**, such as the lip **198** of the pin **192**. In some embodiments, the pin **192** may be formed with the spring **214**. For example, the pin **192** may be monolithically formed at the terminal end of the spring **214**. A second end **216** of the adjustment element **208** has a socket **218** for engaging an adjustment tool (not shown), such as a wrench or a key, for adjusting the position of the adjustment element **208** within the internal cavity **180** of the body **178**. In some embodiments, the spring **214** may be a linear spring, a progressive spring, a torsion spring, a volute spring, a leaf spring, a Belleville spring, or any other resiliently elastic member. In other embodiments, the springs **214** may be replaced with a pneumatically or hydraulically charged cylinder having fluid that exerts a force on the pins **192**. The stiffness of the spring **214** may be pre-selected based on the desired pre-loading of the pins **192**, or the force that is necessary to unseat the pin **192** from the collar **190**, that is desired.

The longitudinal position of the adjustment element **208** within the internal cavity **180** can be adjusted by rotating the adjustment element **208** relative to the body **178**. For example, rotating

the adjustment element **208** in a first direction, such as a clockwise direction, may move the adjustment element **208** from the second end **202** of the body **178** toward the first end **182**. Conversely, rotating the adjustment element **208** in a second direction which is opposite to the first direction, such as a counter-clockwise direction, may move the adjustment element **208** from the first end **182** of the body **178** toward the second end **202**. Position of the adjustment element **208** within the internal cavity **180** controls the compression of the spring **214**. For example, moving the adjustment element **208** toward the first end **182** of the body **178** (i.e., tightening the adjustment element **208**) increases the compression of the spring **214** and the amount of force the spring **214** exerts on the pin **192**. In other words, compression of the spring **214** increases the force that must be exerted on the pin **192** to displace the pin **192** toward the second end **202** of the body **178** in order to compress the spring **214**. Conversely, moving the adjustment element **208** toward the second end **202** of the body **178** (i.e., loosening the adjustment element **208**) decreases the compression of the spring **214** and the amount of force the spring **214** exerts on the pin **192**. A locking element, such as a lock nut **220**, may be provided to prevent movement of the adjustment element **208** once a desired position is set. The lock nut **220** may be threaded onto the adjustment element **208** such that the lock nut **220** engages the second end **202** of the body **178** when fully tightened. Various other locking devices may be provided to prevent the adjustment element **208** from inadvertently moving from its set position.

Referring back to **FIG. 6**, the cartridge assembly **148** is positioned such that the shaft **134** extends through the shaft opening **160** and the bottom surface **150b** of the cartridge plate **150** engages a detent plate **222** that is attached to the housing **102**. The detent plate **222** is substantially planar and has one or more detents **224** extending inwardly into the body of the detent plate **222**. Each detent **224** is shaped to receive at least a portion of the pin **192** of the force-exerting element **152**. Desirably, the number of detents **224** corresponds to the number of pins **192**. In some embodiments, each detent **224** may have a cavity, such as a rounded cavity, a countersink, or a through hole, configured to receive at least a portion of the rounded front end **196** of the pin **192**. While **FIG. 6** illustrates that the one or more detents **224** are formed on a detent plate **222** that is attached to the housing **102**, in other embodiments the one or more detents **224** may be formed directly on the housing **102**. The detent plate **222** has a shaft opening **226** for receiving the shaft **134** therethrough. While the cartridge assembly **148** is keyed to the

shaft **134** for rotation with the shaft **134** and relative to the housing **102**, the detent plate **222** is fixed to the housing **102** and does not rotate with the rotation of the shaft **134**.

The governor inertia carrier **146**, the housing **102**, and/or the detent plate **222** may be made from any high-strength material having desirable strength, wear, and anti-corrosion properties. In some embodiments, the governor inertia carrier **146**, the housing **102**, and/or the detent plate **222** may be made from metal or plastic. Non-limiting examples of materials suitable for use in forming the governor inertia carrier **146**, the housing **102**, and/or the detent plate **222** include, but are not limited to, the art-recognized metals, such as high strength steel, stainless steel, aluminum, and alloys thereof, and art recognized high-strength plastics, such as nylon composites, and ultra-high molecular weight polyethylene. Various coatings or surface treatments may be applied to any surface of the governor inertia carrier **146**, the housing **102**, and/or the detent plate **222**. For example, various surfaces of the governor inertia carrier **146**, the housing **102**, and/or the detent plate **222** may be chrome plated, nickel plated, or heat treated for localized hardening.

With reference to **FIGS. 8A-8B**, the braking assembly **112** is shown in an inactive state (**FIG. 8A**), where the braking assembly **112** is disengaged from the rail **30** (shown in **FIG. 1**), and an active state (**FIG. 8B**), where the braking assembly **112** is engaged with the rail **30** (shown in **FIG. 1**). In an inactive state, the governor inertia carrier **146** is positioned such that one or more pins **192** of the cartridge assembly **148** (shown in **FIG. 6**) are received within the corresponding one or more detents **224**. In this configuration, rotation of the cartridge assembly **148** caused by the rotation of the shaft **134** due to the inertia of the governor rope **60** (shown in **FIG. 1**) pulling on safety activating lever **114**, is resisted by the pins **192** and their relative positioning within the detents **224**. In some embodiments, the rotation of the cartridge assembly **148** can be further resisted by one or more tension springs **154** or other mechanical means used in combination with the cartridge assembly **148**. During normal operation of the elevator assembly, such as when the elevator car **10** is operated at or below the limit speed, the cartridge assembly **148** provides sufficient resisting force to prevent rotation of the shaft **134**, and subsequent activation of the braking assembly **112**, due to the engagement of the pins **192** within the detents **224**. The pre-load of the springs **214**, that is the force that is necessary to unseat the pins **192** from the collar

190 due to movement of the pins **192** toward the second end **202** of the body **178** through spring compression, can be controlled by adjusting the position of the adjustment element **208** within the body **178**. The stiffness of the springs **214** and the geometry of the rounded cavity of the detents **224** (such as, for example, a countersink angle) further contributes to the overall force that is necessary to unseat the pins **192** from the detents **224**. The pin **192** may retract out of the detent **224** when a force less than, equal to, or greater than a spring-load force of the spring **214** is applied to the pin **192**. The governor inertia carrier **146** is provided to resist against the pulling force of the governor assembly up to a predetermined force threshold, as determined by the pre-load of the force-exerting elements **152**. Once the predetermined force threshold is reached or exceeded, the resistance from the governor inertia carrier **146** is overcome to allow the braking assembly **112** to be activated.

When the limit speed of the elevator installation is reached or exceeded, the governor rope **60** is stopped due to the locking of the governor sheave **50** (**FIG. 1**). This causes the governor rope **60** to move the safety activating lever **114** and thereby initiates the rotation of the shaft **134**. While the governor inertia carrier **146** exerts a sufficient force through engagement of the pins **192** with the detents **224** during normal operating conditions, the force of the governor rope **60** suddenly pulling on the safety activating lever **114** is sufficient to overcome the holding force of the pins **192**. In this manner, the shaft **134** is rotated, causing the pins **192** to ride along the detent **224** sidewall, which moves the pins **192** toward the second end **202** of the body **178**. The torque exerted by the safety activating lever **114** on the shaft **134** is sufficient to displace the pins **192** from the detents **224** such that the pins **192** are at least partially withdrawn within the body **178** of the force-exerting element **152**. The shaft **134** can then rotate until the braking assembly **112** is engaged, as shown in **FIG. 8B**. Once the elevator car **10** is safely brought to a stop, the governor inertia carrier **146** can be reset by rotating the shaft **134** until the pins **192** are seated within the detents **224**. The tension springs **154** may assist in resetting the governor inertia carrier **146** to its inactive state.

Although the disclosure has been described in detail for the purpose of illustration based on what is currently considered to be the most practical and preferred embodiments, it is to be understood that such detail is solely for that purpose and that the disclosure is not limited to the disclosed

embodiments, but, on the contrary, is intended to cover modifications and equivalent arrangements. For example, it is to be understood that the present disclosure contemplates that, to the extent possible, one or more features of any embodiment can be combined with one or more features of any other embodiment.

List of reference signs

10	elevator car
11	rope lever
12	brake
13	brake
15	safety mechanism
20	motor
21	traction cable
22	counterweight
30	lateral rails
31	guides
50	governor sheave
51	tail sheave
52	tension weight
53	plate
60	governor cable
100	safety mechanism
102	housing
104	top member
106	bottom member
108	side member
110	cavity
112	braking assembly
114	activating lever
116	first end
118	second end
120	clevis rod
122	pinned connection

124	slotted end
126	pin
128	lever arm
130	arm
132	central portion
134	shaft
136	key
138	safety wedge carrier
140	safety wedge
142	braking surface
144	arm
146	governor inertia carrier
148	cartridge assembly
150	cartridge plate
152	force-exerting element
154	tension spring
156	bracket
158	spring arm
160	shaft opening
162	key slot
164	key
166	through hole
168	recessed portion
170	support element
172	central axis
174	side openings
176	threaded connection
178	cylindrical body
180	internal cavity
182	first end
184	male thread

186	bushing
188	first stop surface
190	collar
192	pin
194	pin body
196	front end
198	rear lip
200	second stop surface
202	second end
204	first threads
206	second threads
208	adjustment element
210	first end
212	seat
214	spring
216	second end
218	socket
220	nut
222	detent plate
224	detent
226	shaft opening

WHAT IS CLAIMED:

1. An elevator governor inertia carrier (146) comprising:
 - a cartridge assembly (148) having a shaft opening (160) for receiving a shaft (134) through the shaft opening (160), the cartridge assembly configured for fixed attachment to the shaft (134); and
 - at least one force-exerting element (152) associated with the cartridge assembly (148) and offset from the shaft (160) opening, the at least one force-exerting element (152) comprising:
 - a hollow body (178) having an internal cavity (180) extending between a first open end (182) and a second end (202);
 - an elastically-resilient element (214) retained within the internal cavity (180); and
 - a contact member (192) at least partially disposed within the internal cavity (178) and in contact with or formed at an end of the elastically-resilient element (214),
 - wherein the contact member (192) is retractable into the internal cavity (178) to compress the elastically-resilient element (214) when a force greater than a restoring force of the elastically-resilient element (214) is applied to the contact member (192).
2. The elevator governor inertia carrier (146) of claim 1, wherein the second end (202) of the hollow body (178) of the force-exerting element (152) is open and wherein the second end (202) is enclosed by an adjustment element (208) that is movably adjustable relative to the hollow body (178) and in contact with a second end of the elastically-resilient element (214) to control compression of the elastically-resilient element (214) between the adjustment element (208) and the contact member (196).
3. The elevator governor inertia (146) carrier of claim 2, wherein the adjustment element (208) has a seat (212) for contacting the elastically-resilient element (214) at a first end (210) and a socket (218) for engaging an adjustment tool in particular at a second end (216).

4. The elevator governor inertia carrier (146) of claim 2 or 3, wherein the adjustment element (208) is movable toward the first end of the hollow body (178) by rotating the adjustment element (208) in a first direction to increase the compression of the elastically-resilient element (214), and wherein the adjustment element is movable toward the second end of the hollow body (178) by rotating the adjustment element (208) in a second direction opposite to the first direction to decrease the compression of the elastically-resilient element (214).

5. The elevator governor inertia carrier (146) of any of claims 2 to 4, further comprising a locking element (220) for preventing rotatable movement of the adjustment element (208) relative to the hollow body (178) when the locking element (220) engages at least a portion of the hollow body (178) and the adjustment element (208).

6. The elevator governor inertia carrier (146) of any of the preceding claims, wherein the contact member (126) has a body rounded front end that is extendable from the first end (116) of the hollow body and a radially-outwardly protruding lip that is retained within the interior cavity (180) of the hollow body (178).

7. The elevator governor inertia carrier (146) of any of the preceding claims 6, further comprising a collar (190) that protrudes radially-inward from a sidewall of the interior cavity (180), in particular, wherein the collar (190) has a stop surface (180) that limits a protrusion of the contact member (192) from the first end of the hollow body (178).

8. The elevator governor inertia carrier (146) of any of the preceding claims, further comprising a detent plate (222) facing in particular a bottom surface (150b) of the cartridge assembly, the detent plate (222) comprising at least one detent (224) shaped to receive the contact member (192), in particular wherein, in an inactive state, the contact member (192) is engaged within the detent (224), and wherein, in an active state, rotation of the cartridge relative to the detent plate forces the contact member (192) out of the detent (224) and at least partially into the interior cavity (180) of the hollow body (178).

9. The elevator governor inertia carrier (146) of any of the preceding claims, wherein a restoring force of the elastically-resilient element is preset ad/or 146 adjustable.

10. The elevator governor inertia carrier (146) of any of the preceding claims, wherein the cartridge assembly (148) has one or more through holes (166) extending into the shaft opening (226), and wherein a retention member is provided in each through hole (66) for engaging at least a portion of the shaft and preventing axial movement of the cartridge assembly on the shaft, in particular 146 wherein the shaft opening (226) has a recessed portion for receiving a shaft support element.

11. The elevator governor inertia carrier (146) of claim 1, wherein the at least one force-exerting element is connected to the cartridge, in particular removably or non-removably connected to the cartridge assembly.

12. The elevator governor inertia carrier (146) of any of the preceding claims, further comprising the shaft received within the shaft opening of the cartridge.

13. The elevator governor inertia carrier (146) of any of the preceding claims, further comprising a housing (102) for receiving at least a portion of the governor inertia carrier (148), wherein in particular the detent plate (222) is fixedly mounted to the housing (102) and wherein the shaft (134) and the cartridge assembly (148) are rotatable relative to the housing and the detent plate (222).

14. A safety mechanism (100) for an elevator, the safety mechanism comprising:

a housing (102) attachable to at least a portion of an elevator car (10);

a safety activation lever (114) connecting a governor assembly to a rotatable shaft (134) disposed within the housing (104);

a braking assembly activated by a rotation of the shaft; and

a governor inertia carrier according to any of the preceding claims associated with the shaft and the housing, the governor inertia carrier in particular comprising at least one of the following components:

a cartridge assembly having a shaft opening for receiving the shaft through the shaft opening, the cartridge configured for fixed attachment to the shaft; and

at least one force-exerting element associated with the cartridge, the at least one force-exerting element comprising:

a hollow body having an internal cavity extending between a first open end and a second end;

an elastically-resilient element retained within the internal cavity; and

a contact member at least partially disposed within the internal cavity, a first end of the contact member in contact with or formed with the elastically-resilient element and a second end of the contact member received in a detent associated with the housing,

wherein in particular the contact member is retractable out of the detent and into the internal cavity when a force greater than a restoring force of the elastically-resilient element is applied to the contact member,

the governor inertia carrier in particular having a spring-loaded contact member received within a detent associated with the housing,

wherein in particular the spring-loaded contact member is retractable out of the detent when a force greater than a spring-load force of the spring-loaded contact member is applied to the spring-loaded contact member.

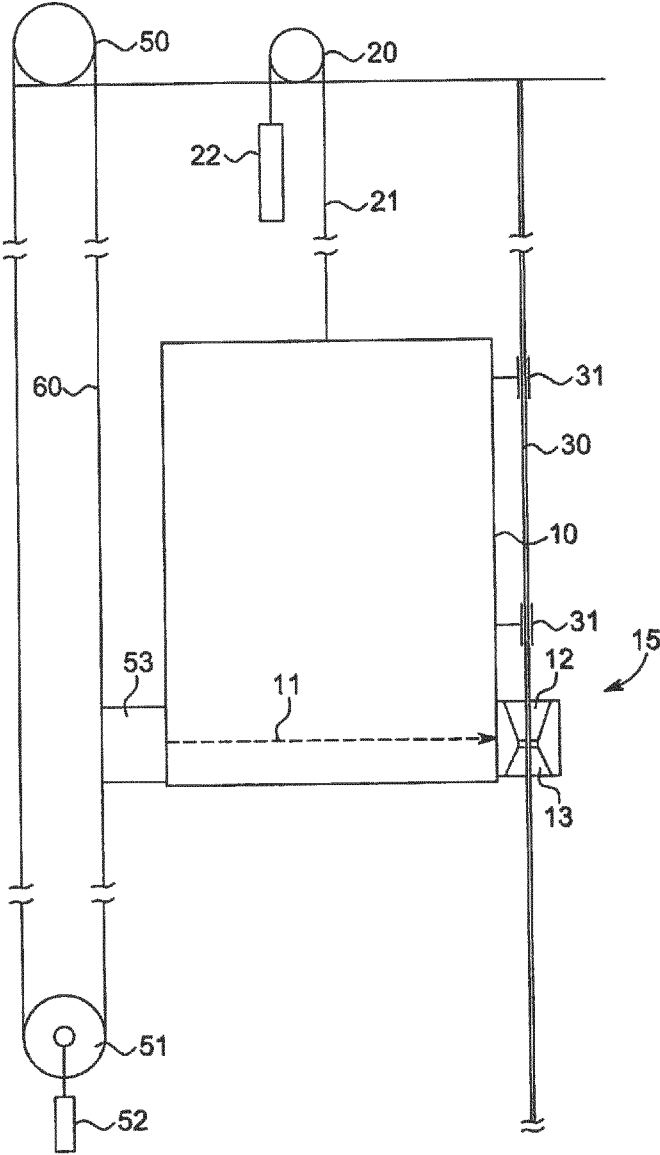


FIG. 1

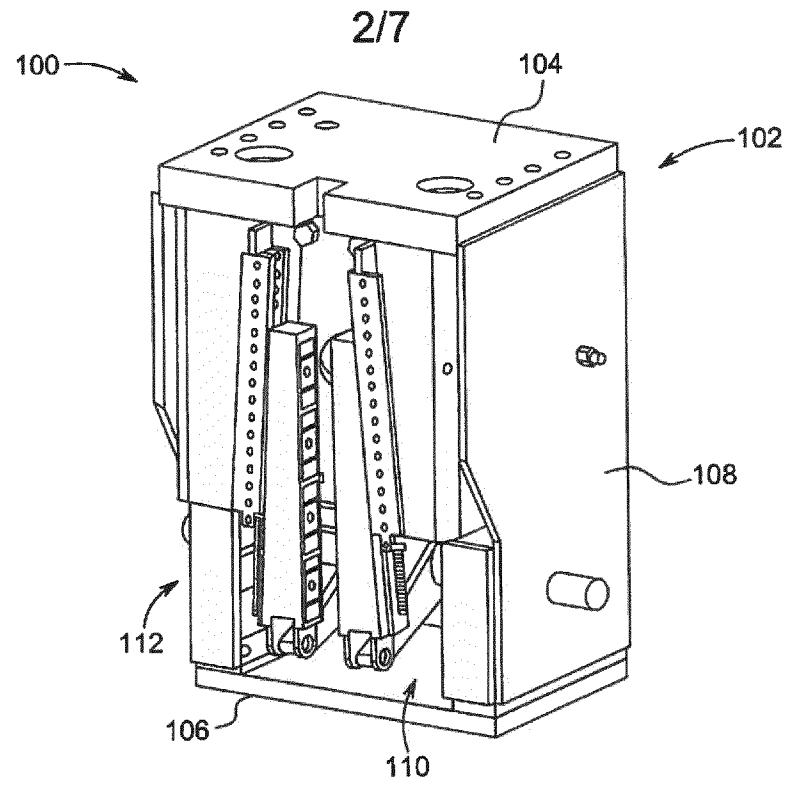


FIG. 2A

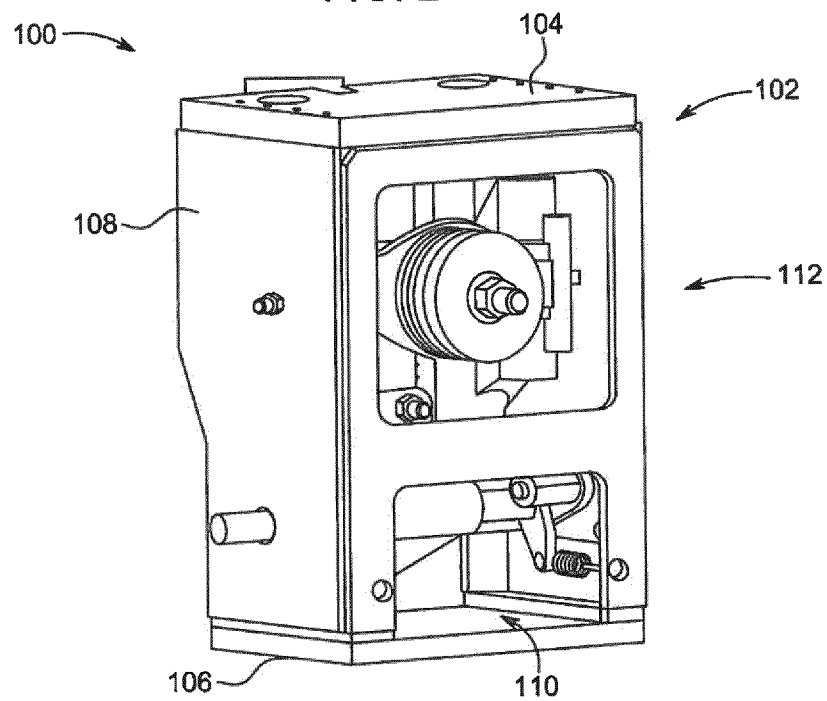


FIG. 2B

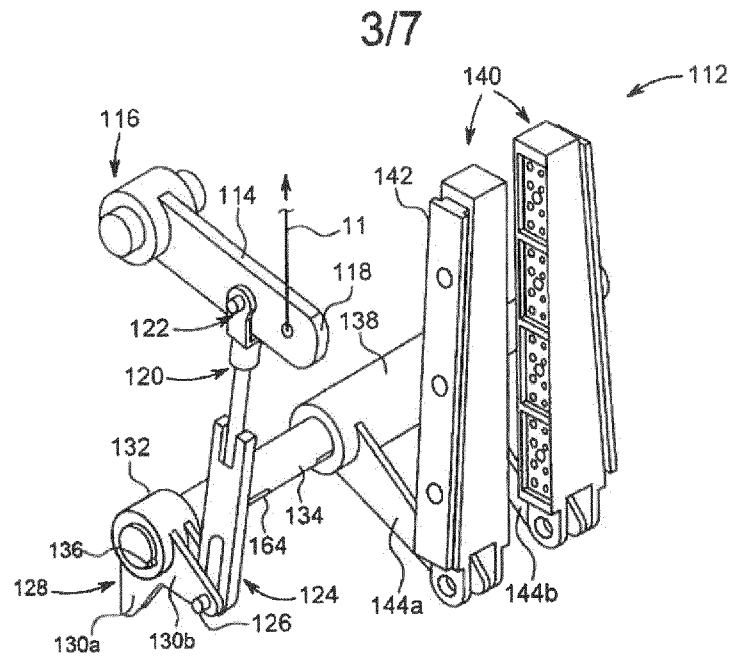


FIG. 3A

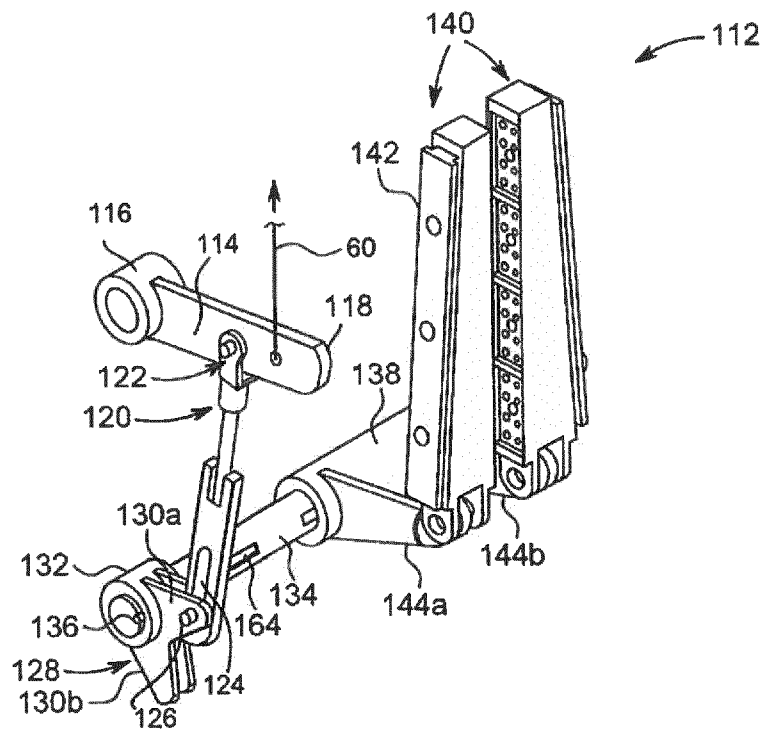


FIG. 3B

4/7

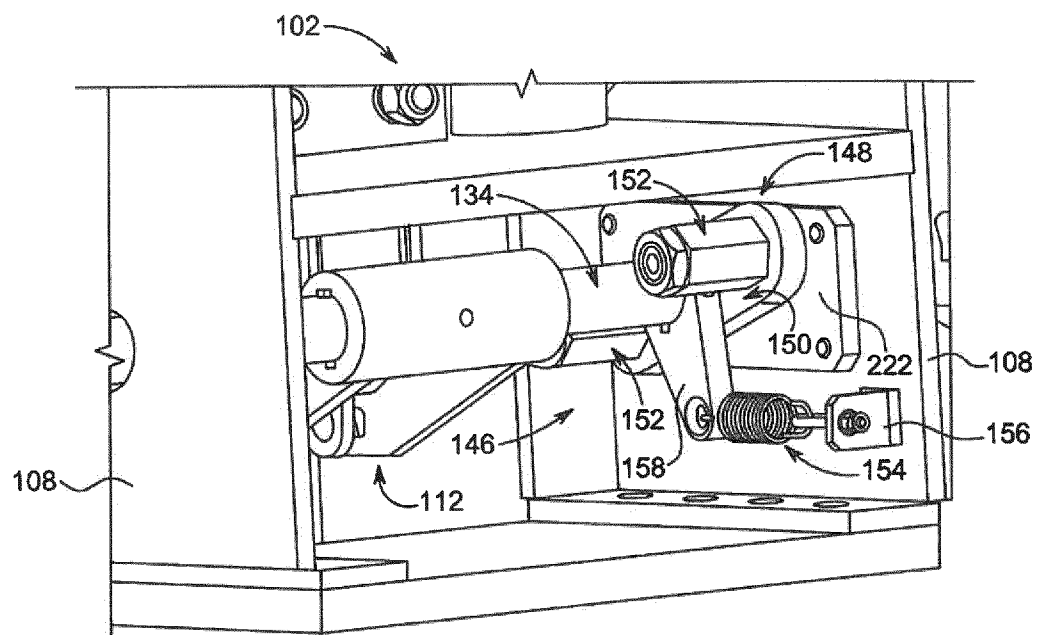


FIG. 4

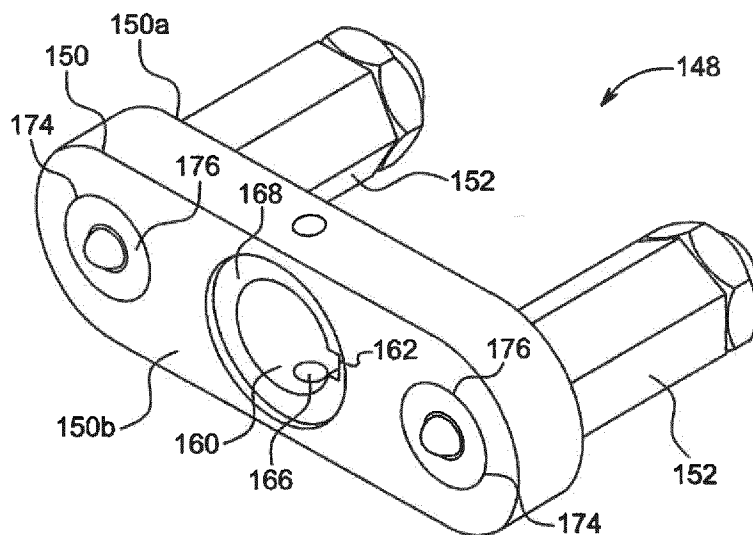


FIG. 5

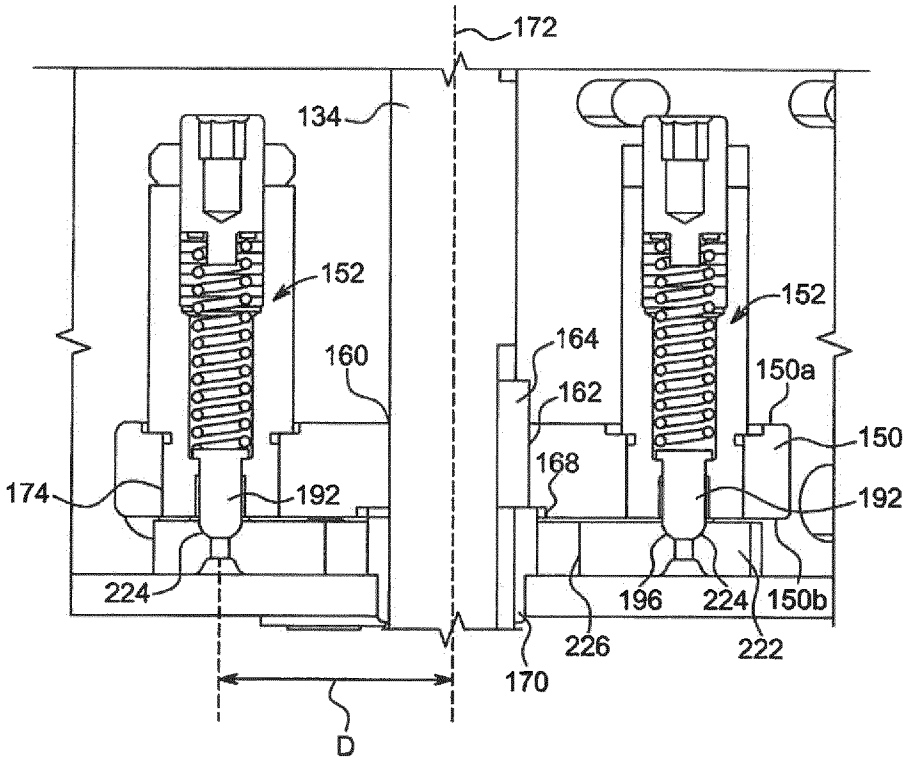


FIG. 6

6/7

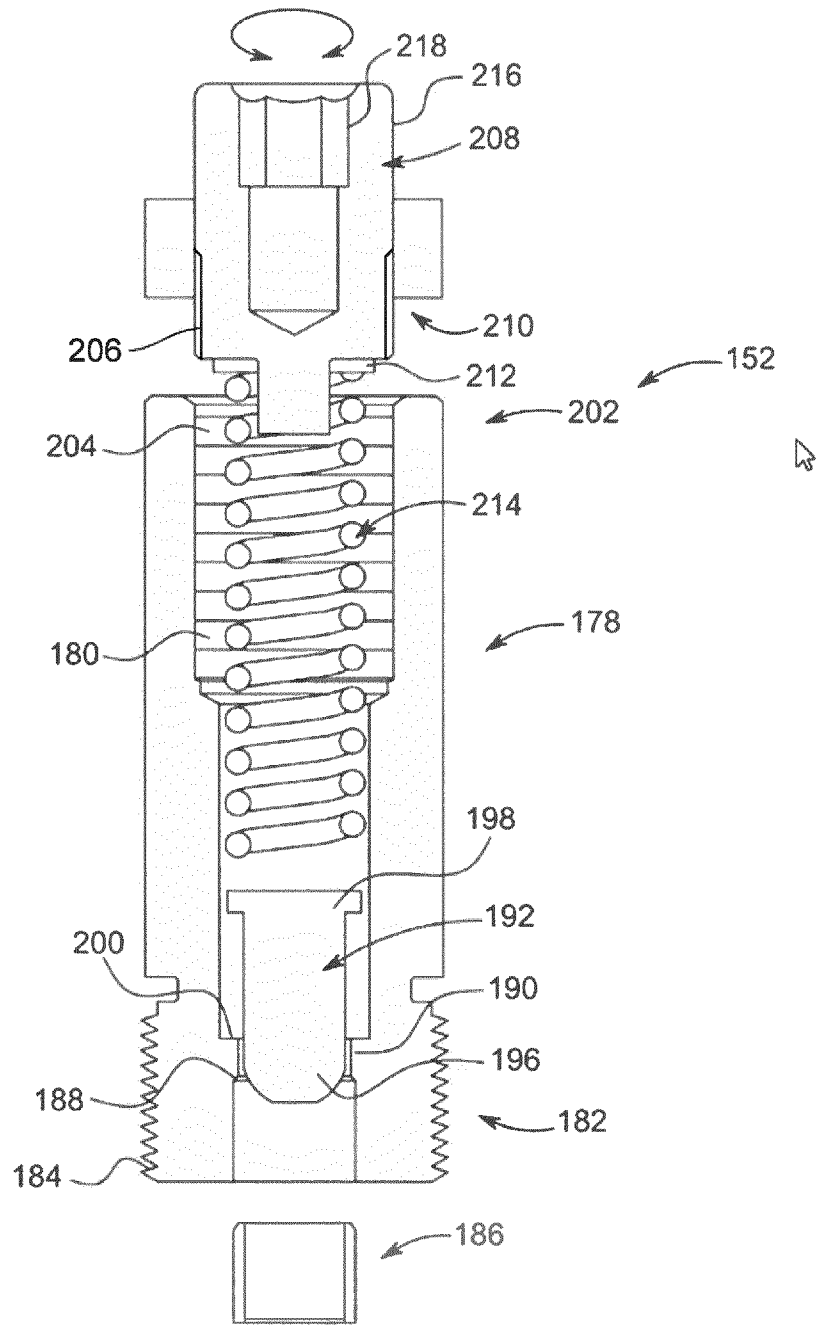


FIG. 7

7/7

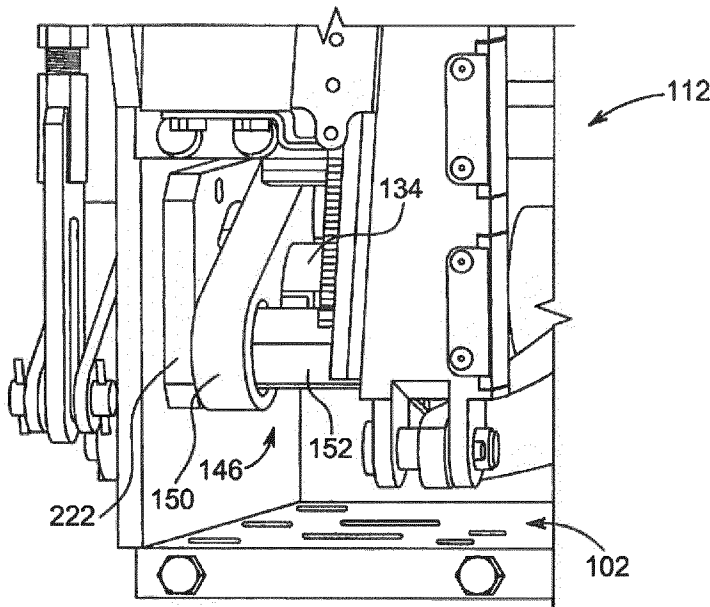


FIG. 8A

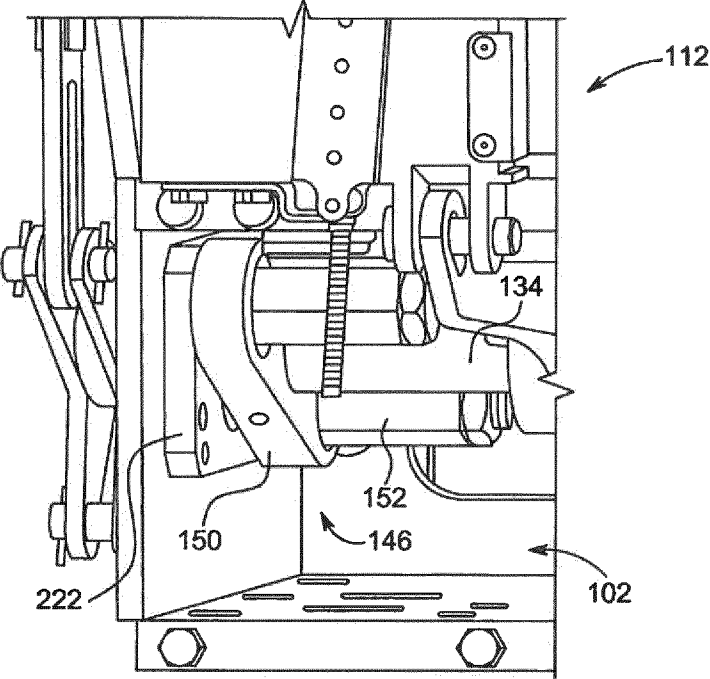


FIG. 8B

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/072503

A. CLASSIFICATION OF SUBJECT MATTER
INV. B66B5/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B66B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00/37348 A1 (OTIS ELEVATOR CO [US]) 29 June 2000 (2000-06-29) page 15, lines 1-9; figures 7-9 -----	1-14
A	US 2004/178023 A1 (MAURY JULIEN [FR]) 16 September 2004 (2004-09-16) paragraphs [0002], [0005]; figures 2-3 -----	1-14
A	JP 2000 219450 A (TOSHIBA CORP; TOSHIBA ELEVATOR CO LTD) 8 August 2000 (2000-08-08) figure 2 -----	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 December 2016

Date of mailing of the international search report

05/01/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Miklos, Zoltan

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/072503

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0037348	A1	29-06-2000	CN	1331652 A		16-01-2002
			DE	69911247 D1		16-10-2003
			DE	69911247 T2		01-07-2004
			EP	1140687 A1		10-10-2001
			ES	2203257 T3		01-04-2004
			JP	4500449 B2		14-07-2010
			JP	2002532366 A		02-10-2002
			US	6161653 A		19-12-2000
			WO	0037348 A1		29-06-2000

US 2004178023	A1	16-09-2004	AT	402901 T		15-08-2008
			AU	2004200381 A1		19-08-2004
			CA	2456627 A1		04-08-2004
			CN	1519189 A		11-08-2004
			HK	1070875 A1		24-04-2009
			JP	2004338939 A		02-12-2004
			KR	20040071619 A		12-08-2004
			MY	135853 A		31-07-2008
			US	2004178023 A1		16-09-2004

JP 2000219450	A	08-08-2000	NONE			
