



HU000027812T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 027 812**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 12 728894**(22) A bejelentés napja: **2012. 06. 07.**(51) Int. Cl.: **G02B 1/04** (2006.01)**B29D 11/00** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20120728894

(86) A nemzetközi (PCT) bejelentési szám:

PCT/US 12/041207

(97) Az európai bejelentés közzétételi adatai:

EP 2718751 A1 **2012. 12. 13.**

(87) A nemzetközi közzétételi szám:

WO 12170603

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2718751 B1 **2015. 07. 22.**

(30) Elsőbbségi adatok:

201161494914 P **2011. 06. 09.** **US**

(73) Jogosult(ak):

Novartis AG, 4056 Basel (CH)

(72) Feltaláló(k):

BAUMAN, R., Erich, Duluth, Georgia 30097 (US)
HAGMANN, Peter, 63906 Erlenbach am Main (DE)
PRUITT, John, Dallas, Suwanee, Georgia 30024 (US)
RAPPON, Joseph, Michael, Alpharetta, Georgia 30024 (US)

(74) Képviselő:

ifj. Szentpéteri Ádám, SBGK Szabadalmi
Ügyvivői Iroda, Budapest

(54)

Nano-textúrájú szilikon hidrogél lencsék

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 718 751 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
22.07.2015 Bulletin 2015/30

(21) Application number: **12728894.2**

(22) Date of filing: **07.06.2012**

(51) Int Cl.:
G02B 1/04 (2006.01) B29D 11/00 (2006.01)

(86) International application number:
PCT/US2012/041207

(87) International publication number:
WO 2012/170603 (13.12.2012 Gazette 2012/50)

(54) **SILICONE HYDROGEL LENSES WITH NANO-TEXTURED SURFACES**

SILIKON-HYDROGEL-LINSEN MIT NANOTEXTURIERTEN OBERFLÄCHEN

LENTILLES EN SILICONE HYDROGEL POURVUES DE SURFACES NANOTEXTURÉES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **09.06.2011 US 201161494914 P**

(43) Date of publication of application:
16.04.2014 Bulletin 2014/16

(73) Proprietor: **Novartis AG**
4056 Basel (CH)

(72) Inventors:
• **BAUMAN, R., Erich**
Duluth, Georgia 30097 (US)
• **HAGMANN, Peter**
63906 Erlenbach am Main (DE)
• **PRUITT, John, Dallas**
Suwanee, Georgia 30024 (US)

• **RAPPON, Joseph, Michael**
Alpharetta, Georgia 30024 (US)

(74) Representative: **Bohest AG**
Holbeinstrasse 36-38
4051 Basel (CH)

(56) References cited:
WO-A2-01/57118 US-A1- 2002 086 160
US-A1- 2003 143 335

• **HUAAI ET AL: "BIOMEDICAL APPLICATIONS OF
ELECTROSTATIC LAYER-BY-LAYER NANO-
ASSEMBLY OF POLYMERS, ENZYMES, AND
NANOPARTICLES", CELL BIOCHEMISTRY AND
BIOPHYSICS, TOTOWA, NJ, US, vol. 39, no. 1, 1
August 2003 (2003-08-01) , pages 23-43,
XP009070112, ISSN: 1085-9195**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention generally relates to a method for making a silicone hydrogel contact lens having a nano-textured surface which mimics the surface texture of cornea of human eye and silicone hydrogel contact lenses made therefrom.

BACKGROUND

[0002] Soft contact lenses have alleviated some of the problems that patients have experienced in not being able to wear hard contact lenses (e.g., RGP lenses) or in not being able to wear them for sufficiently long periods of time, because of initial discomfort (i.e., immediately after lens insertion), relatively long period of adapting time (a week or two) required for a patient to become accustomed to them, and/or improper fit (lenses become dislodged and/or are very uncomfortable).

[0003] Although soft contact lenses can improve wearing comfort, there may be some cornea health issues caused by wearing soft contact lenses. Unlike other tissues which receive oxygen from the blood supply, a cornea can only receive oxygen from the surrounding air. But, because soft contact lenses can conform closely to the shape of the eye, oxygen cannot easily circumvent the lens. If sufficient oxygen does not reach the cornea, corneal swelling occurs. Extended periods of oxygen deprivation cause the undesirable growth of blood vessels in the cornea. Soft contact lenses must allow oxygen from the surrounding air (i.e., oxygen) to reach the cornea.

[0004] Silicone hydrogel (SiHy) contact lenses have been developed recently to allow sufficient oxygen to permeate through the lens to the cornea and to have minimal adverse effects on corneal health. SiHy contact lenses are made of a hydrated, crosslinked polymeric material that contains silicone and a certain amount of water within the lens polymer matrix at equilibrium. Water in a SiHy contact lens provides the desirable softness that enables the SiHy lens to be worn for sufficiently long periods of time and provides patients with the benefits including adequate initial comfort (i.e., immediately after lens insertion), relatively short period of adapting time required for a patient to become accustomed to them, and/or proper fit. Incorporation of silicone in a SiHy contact lens material may provide the contact lens relatively-high oxygen permeability needed for a healthy cornea.

[0005] In recent years, a great number of efforts have been made to develop contact lenses with improved wearing comfort. One example is to incorporate leacheable wetting agents in contact lenses (see, e.g., U.S. Patent Nos. 4,045,547, 4,042,552, 5,198,477, 5,219,965, 6,367,929 and 6,822,016, 7,279,507 and U.S. patent application publication Nos. 2006/0079598A1 and 2006/0251696A1, herein incorporated by reference in their entireties). Another example is to incorporate bioactive agents and hydrophobic comfort agents into contact lenses (see, e.g., U.S. patent application publication No. 2008/0124376A1 and US 2010/ A1, herein incorporated by reference in their entireties).

[0006] US 2002/086160 A1 discloses a process for surface modifying a silicone hydrogel contact lens, comprising the steps of: (a) applying to the material surface a tie layer comprising a polyionic material; (b) covalently binding a bifunctional compound comprising an ethylenically unsaturated double bond to the tie layer; and (c) graft polymerizing a hydrophilic monomer onto the compound comprising the ethylenically unsaturated double bond.

[0007] Therefore, there is still a need for SiHy contact lenses with improved wearing comfort.

SUMMARY OF THE INVENTION

[0008] In one aspect, the invention provides a method for making contact lenses, preferably silicone hydrogel contact lenses, having nano-textured surfaces. A method of the invention comprises the steps of: (1) providing an organic-based coating solution including an organic-based solvent and a polymeric coating material dissolved in the organic-based solvent, wherein the polymeric coating material comprises multiple first reactive functional groups and multiple affinity groups or moieties; (2) contacting a contact lens with the organic-based coating solution to swell the contact lens and form an intermediary coating of the polymeric coating material on the contact lens, wherein the contact lens comprises, at and near the surface of the contact lens, monomeric units and/or hydrophobic moieties and/or segments capable of interacting with the affinity groups or moieties of the polymeric coating material so as to bind the polymeric coating material, wherein the average molecular weight of the polymeric coating material is selected to be sufficient high to ensure that the polymeric coating material partially penetrate into the contact lens swollen by the organic-based solvent; (3) contacting the swollen contact lens having the intermediary coating thereon with an aqueous solution or preferably water to shrink the contact lens having the intermediary coating thereon to form a prime coating having nano-textures on the contact lens; and (4) fixing the nano-textures in the prime coating by crosslinking a water-soluble and crosslinkable hydrophilic polymeric material with multiple second functional reactive functional groups onto the prime coating through the first reactive functional groups to form a crosslinked polymeric coating that preserves the nano-textures of the prime coating and provides a nano-textured surface to the contact lens, wherein one first reactive functional reactive group can react with one second reactive functional group in the presence or absence of a coupling agent to form one crosslink-

age between the polymeric coating material and the water-soluble and crosslinkable hydrophilic polymeric material.

[0009] In another aspect, the invention provides a silicone hydrogel contact comprising a silicone hydrogel lens body and a non-silicone hydrogel coating thereon, wherein the coating comprises winkle surface patterns (nano-textures) having a roughness (i.e., an arithmetical mean roughness, Ra) of from about 5 nm to about 600 nm, preferably from about 10 nm to about 400 nm, even more preferably from about 15 nm to about 200 nm, even more preferably from about 20 nm to about 100 nm.

[0010] These and other aspects of the invention including various preferred embodiments in any combination will become apparent from the following description of the presently preferred embodiments. The detailed description is merely illustrative of the invention and does not limit the scope of the invention, which is defined by the appended claims and equivalents thereof. As would be obvious to one skilled in the art, many variations and modifications of the invention may be effected without departing from the spirit and scope of the novel concepts of the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Figure 1 shows the transmission-differential-interference-contrast (TDIC) images of (A) a SiHy contact lens without nano-textured surfaces and (B) a SiHy contact lens with nano-textured surfaces of the invention according to a preferred embodiment. Both SiHy contact lenses are in hydrated states.

Figure 2 shows the reflection-differential-interference-contrast (RDIC) images of (A) a SiHy contact lens without nano-textured surfaces and (B) a SiHy contact lens with nano-textured surfaces of the invention according to a preferred embodiment. Both SiHy contact lenses are in hydrated states.

Figure 3 shows the fluorescence intensity profiles across the cross sections of a SiHy contact lens in a confocal laser fluorescence microscopy.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0012] Reference now will be made in detail to the embodiments of the invention. It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the scope or spirit of the invention. For instance, features illustrated or described as part of one embodiment, can be used on another embodiment to yield a still further embodiment. Thus, it is intended that the present invention cover such modifications and variations as come within the scope of the appended claims and their equivalents. Other objects, features and aspects of the present invention are disclosed in or are obvious from the following detailed description. It is to be understood by one of ordinary skill in the art that the present discussion is a description of exemplary embodiments only, and is not intended as limiting the broader aspects of the present invention.

[0013] Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. Generally, the nomenclature used herein and the laboratory procedures are well known and commonly employed in the art. Conventional methods are used for these procedures, such as those provided in the art and various general references. Where a term is provided in the singular, the inventors also contemplate the plural of that term. The nomenclature used herein and the laboratory procedures described below are those well known and commonly employed in the art.

[0014] A "hydrogel" refers to a crosslinked polymeric material which is not water-soluble and can contain at least 10% by weight of water within its polymer matrix when fully hydrated.


[0015] A "non-silicone hydrogel" refers to a hydrogel that is free of silicone.

[0016] A "silicone hydrogel" refers to a hydrogel containing silicone. A silicone hydrogel typically is obtained by copolymerization of a polymerizable composition comprising at least one silicone-containing vinylic monomer or at least one silicone-containing vinylic macromer or at least one silicone-containing prepolymer having ethylenically unsaturated groups.


[0017] A "silicone hydrogel contact lens" refers to a contact lens comprising a silicone hydrogel material (or silicone hydrogel).

[0018] A "vinylic monomer", as used herein, refers to a compound that has one sole ethylenically unsaturated group and can be polymerized actinically or thermally.

[0019] The term "olefinically unsaturated group" or "ethylenically unsaturated group" is employed herein in a broad sense and is intended to encompass any groups containing at least one $>C=C<$ group. Exemplary ethylenically unsaturated groups include without limitation (meth)acryloyl methacryloyl (




5 and/or



10

), allyl, vinyl (



15

), styrenyl, or other C=C containing groups.

[0020] The term "(meth)acrylamide" refers to methacrylamide and/or acrylamide.

[0021] The term "(meth)acrylate" refers to methacrylate and/or acrylate.

20

[0022] A "hydrophilic vinylic monomer", as used herein, refers to a vinylic monomer which as a homopolymer typically yields a polymer that is water-soluble or can absorb at least 10 percent by weight water.

[0023] A "hydrophobic vinylic monomer", as used herein, refers to a vinylic monomer which as a homopolymer typically yields a polymer that is insoluble in water and can absorb less than 10 percent by weight water.

25

[0024] A "macromer" or "prepolymer" refers to a medium and high molecular weight compound or polymer that contains two or more ethylenically unsaturated groups. Medium and high molecular weight typically means average molecular weights greater than 700 Daltons.

[0025] A "polymer" means a material formed by polymerizing/crosslinking one or more monomers or macromers or prepolymers.


30

[0026] "Molecular weight" of a polymeric material (including monomeric or macromeric materials), as used herein, refers to the weight-average molecular weight unless otherwise specifically noted or unless testing conditions indicate otherwise.

[0027] The term "amino group" refers to a primary or secondary amino group of formula-NHR', where R' is hydrogen or a C₁-C₂₀ unsubstituted or substituted, linear or branched alkyl group, unless otherwise specifically noted.

35

[0028] The term "phosphorylcholine" refers to a zwitterionic group of



40

in which n is an integer of 1 to 5 and R₁, R₂ and R₃ independently of each other are C₁-C₈ alkyl or C₁-C₈ hydroxyalkyl.


[0029] The term "reactive vinylic monomer" refers to a vinylic monomer having a reactive functional group selected from the group consisting of carboxyl groups (-COOH), azetidinium group, amino groups (i.e., primary and/or secondary amino groups), azlactone groups, isocyanate groups, epoxy groups, aziridine groups, or combinations thereof.

45

[0030] The term "non-reactive hydrophilic vinylic monomer" refers to a hydrophilic vinylic monomer which is free of any carboxyl group or amino group (i.e., primary or secondary amino group). A non-reactive vinylic monomer can include a tertiary or quaternium amino group.


[0031] An "azetidinium group" refers to a positively charged group of

50



[0032] An "azlactone group" refers to a mono-valent radical of

55



5

in which p is 0 or 1; R₃ and R₄ independently can be an alkyl group having 1 to 14 carbon atoms a cycloalkyl group having 3 to 14 carbon atoms, an aryl group having 5 to 12 ring atoms, an arenyl group having 6 to 26 carbon and 0 to 3 sulfur, nitrogen and/or oxygen atoms, or R₃ and R₄ taken together with the carbon to which they are joined can form a carbocyclic ring containing 4 to 12 ring atoms

10

[0033] The term "thermally-crosslinkable" in reference to a polymeric material or a functional group means that the polymeric material or the functional group can undergo a crosslinking (or coupling) reaction with another material or functional group at a relatively-elevated temperature (from about 40°C to about 140°C), whereas the polymeric material or functional group cannot undergo the same crosslinking reaction (or coupling reaction) with another material or functional group at room temperature (i.e., from about 22°C to about 28°C, preferably from about 24°C to about 26°C, in particular at about 25°C) to an extent detectable for a period of about one hour.

15

[0034] An "epichlorohydrin-functionalized polyamine" or "epichlorohydrin-functionalized polyamidoamine" refers to a polymer obtained by reacting a polyamine or polyamidoamine with epichlorohydrin to convert all or a substantial percentage of amine groups of the polyamine or polyamidoamine into azetidinium groups.

20

[0035] The term "water-soluble" in reference to a polymer means that the polymer can be dissolved in water to an extent sufficient to form an aqueous solution of the polymer having a concentration of from about 0.01% to about 30% by weight at room temperature (defined above).

[0036] A "water contact angle" refers to an average water contact angle (i.e., contact angles measured by Sessile Drop method), which is obtained by averaging measurements of contact angles with at least 3 individual contact lenses.

25

[0037] The intrinsic "oxygen permeability", Dk, of a material is the rate at which oxygen will pass through a material. In accordance with the invention, the term "oxygen permeability (Dk)" in reference to a hydrogel (silicone or non-silicone) or a contact lens means an oxygen permeability (Dk) which is corrected for the surface resistance to oxygen flux caused by the boundary layer effect according to the procedures shown in Examples hereinafter. Oxygen permeability is conventionally expressed in units of barrers, where "barrer" is defined as [(cm³ oxygen)(mm) / (cm²)(sec)(mm Hg)] x 10⁻¹⁰.

30

[0038] The "oxygen transmissibility", Dk/t, of a lens or material is the rate at which oxygen will pass through a specific lens or material with an average thickness of t [in units of mm] over the area being measured. Oxygen transmissibility is conventionally expressed in units of barrers/mm, where "barrers/mm" is defined as [(cm³ oxygen) / (cm²)(sec)(mm Hg)] x 10⁻⁹.

[0039] The "ion permeability" through a lens correlates with the Ionoflux Diffusion Coefficient. The Ionoflux Diffusion Coefficient, D (in units of [mm²/min]), is determined by applying Fick's law as follows:

35

$$D = -n' / (A \times dc/dx)$$

40

where n' = rate of ion transport [mol/min]; A = area of lens exposed [mm²]; dc = concentration difference [mol/L]; dx = thickness of lens [mm].

[0040] A "nano-textured surface" in reference to a contact lens means that a surface of the contact lens has nano-textures. The term "nano-textures" in reference to a coating on a contact lens or a surface of a contact lens is intended to describe wrinkle surface patterns that can be visually observed by examining the contact lens in hydrated state, according to the method of either reflection differential interference contrast (RDIC) or transmission differential interference contrast (TDIC) as described in Example 1, or according to atomic force microscopy (AFM) well known to a person skilled in the art. Wrinkle surface patterns can have any kind of morphology, including, e.g., random and/or ordered worm-like patterns similar to what shown in Figures 1 (B) and 2(B) of this application, hexagonal patterns (e.g., shown in Figure 3 of the article by Guvendiren et al., "Swelling-Induced Surface Patterns in Hydrogels with Gradient Crosslinking Density," Adv. Funct. Mater. 2009,19: 3038-3045, herein incorporated by reference in its entirety), or combinations thereof. The term "worm-like patterns" refers patterns composed of geometric shapes which assemble worms. The wrinkle surface patterns (nano-textures), have a roughness (i.e., an arithmetical mean roughness, Ra) of from about 5 nm to about 600 nm, preferably from about 10 nm to about 400 nm, even more preferably from about 15 nm to about 200 nm, even more preferably from about 20 nm to about 100 nm. Preferably, wrinkle surface patterns have a roughness sufficient low to have minimal adverse impact upon the visible light transmissibility of the contact lens under study. The minimal adverse impact of wrinkled surface patterns upon the visible light transmissibility of the contact lens under study

55

is characterized by a reduction in light transmissibility, $(\frac{T}{T_0} \times 100\%)$ in which T is the 400-700 nm light transmissibility

of a test lens with nano-textured surfaces and T_0 is a control lens made of the same material but without nano-textured surfaces), of about 20% or less, preferably about 15% or less, more preferably about 10% or less, even more preferably about 5% or less.

[0041] The term "partially penetrate" in reference to a polymeric coating material is intended to describe a process in which the polymeric coating material cannot penetrate into the core of a contact lens but can only be adsorbed/absorbed at and near the surface. Whether a polymeric coating material partially penetrates into a contact lens can be determined by examining fluorescence intensity profiles across the cross sections of a contact lens having a coating of the polymeric coating material labelled with a fluorescent label in a confocal laser fluorescence microscopy, as shown in Example.

[0042] The invention is generally related to a method for making contact lenses, especially SiHy contact lenses, with nano-textured surfaces which has no or minimal adverse impact on the visible light (400 - 700 nm) transmissibility of the contact lens. In the prior art, methods for producing contact lenses are generally designed to produce contact lenses having smooth surfaces. In contrast, a method of the invention can be used to produce contact lenses that do not have smooth surface on sub-micron scale but instead have wrinkle surface patterns (i.e., nano-textures), imitating the natural surface of human cornea. The external surface of the corneal epithelium is not a perfectly smooth surface on sub-micron scale but rather exhibits a certain type of surface patterns (i.e., nano-textures) due to the microvilli present on the surface. For example, Michael J. Doughty, in Current Eye Research 28(3): 203-214 (2004), reports that random worm-like patterns are observed in higher magnification SEM images (scanning electron microscopy images, Figure 5) of superficial corneal epithelial cells of recent post-mortem bovine eyes imaged by scanning electron microscopy, to be associated with the different densities of microvilli on the cell surfaces (herein incorporated by reference in its entirety). Such surface nano-structures may serve as a physico-chemical anchor for the precorneal tear film. The inventors of the invention believe that by having similar nano-textured surface, a contact lens may mimic the natural surface of cornea and provide better wearing comfort.

[0043] However, creation of nano-textures on the surface of a contact lens is difficult to achieve through conventional manufacturing processes such as molding or lathing and polishing. It is unexpectedly discovered here that a contact lens with nano-textured surfaces can be produced according a method of the invention involving creating a prime coating having nano-textures through controlled imbibition and/or depositions of a reactive polymeric coating material and fixing the nano-textures by crosslinking a hydrophilic polymeric material onto the prime coating to form a crosslinked polymeric coating that preserves the nano-textures of the prime coating and provides a nano-textured surface to the contact lens.

[0044] A contact lens with nano-textured surfaces produced according to a method of the invention may provide the following advantages. First, the nano-textures of a contact lens of the invention can increase the surface area of the contact lens, more closely mimicking that of the natural cornea, while having no or minimal adverse effects upon the light transmissibility of the contact lens. It is believed that when the roughness of the nano-textured surfaces of the contact lens is comparable to the roughness of human cornea, the adverse effects of the nano-textures upon the visible light transmissibility of a contact lens would be minimal or negligible. Like the microvilli on the corneal epithelial cells, the nano-textures may serve to increase the stability and thickness of the pre-lens tear film. Second, the nano-textured surfaces may reduce frictional interaction between the lens and the corneal epithelial surface and may further enhance the biocompatibility of the contact lens. Third, the crosslinked polymeric coating on the contact lens can be a non-silicone hydrogel with high water content when fully hydrated and may impart to the contact lens high biocompatibility, because water is highly biocompatible with the tear and because high water content (e.g., > 75% H₂O) in the crosslinked polymeric coating is located in and nears the anterior and posterior surfaces with which the eye is in direct contact and where the biocompatibility counts most. It is believed that the outer layer with much higher water content and the nano-textures may have synergy in providing a "water-loving" surface which can attract tears to be spread on the lens surface. Thus, a contact lens of the invention may provide an improved wearing comfort.

[0045] In one aspect, the invention provides a method for making contact lenses, preferably silicone hydrogel contact lenses, having nano-textured surfaces, comprising the steps of: (1) providing an organic-based coating solution including an organic-based solvent and a polymeric coating material dissolved in the organic-based solvent, wherein the polymeric coating material comprises multiple first reactive functional groups and multiple affinity groups or moieties; (2) contacting a contact lens with the organic-based coating solution to swell the contact lens and form an intermediary coating of the polymeric coating material on the contact lens, wherein the contact lens comprises, at and near the surface of the contact lens, monomeric units and/or hydrophobic moieties and/or segments capable of interacting with the affinity groups or moieties of the polymeric coating material so as to bind the polymeric coating material, wherein the average molecular weight of the polymeric coating material is selected to be sufficient high to ensure that the polymeric coating material partially penetrate into the contact lens swollen by the organic-based solvent; (3) contacting the swollen contact lens having the intermediary coating thereon with an aqueous solution or preferably water to shrink the contact lens having the intermediary coating thereon to form a prime coating having nano-textures on the contact lens; and (4) fixing the

nano-textures in the prime coating by crosslinking a water-soluble and crosslinkable hydrophilic polymeric material with multiple second functional reactive functional groups onto the prime coating through the first reactive functional groups to form a crosslinked polymeric coating that preserves the nano-textures of the prime coating and provides a nano-textured surface to the contact lens, wherein one first reactive functional reactive group can react with one second reactive functional group in the presence or absence of a coupling agent to form one crosslinkage between the polymeric coating material and the water-soluble and crosslinkable hydrophilic polymeric material.

[0046] An "organic-based solution" refers to a solution which is a homogeneous mixture consisting of an organic-based solvent and one or more solutes dissolved in the organic based solvent. An organic-based coating solution refers to an organic-based solution containing at least one polymeric coating material as a solute in the solution.

[0047] An "organic-based solvent" is intended to describe a solvent system which consists of one or more organic solvents and optionally about 30% or less, preferably about 20% or less, more preferably about 15% or less, even more preferably about 10% or less, in particular about 5% or less by weight of water relative to the weight of the solvent system.

[0048] In a preferred embodiment, an organic-based solvent used in preparing an organic-based coating solution can swell a contact lens (to be coated) by at least about 50%, preferably at least about 75%, more preferably at least about 100%, even more preferably at least about 150%. As used in this application, the swell of a contact lens in an organic-based solvent is the percentage increase in diameter of the contact lens relative to the contact lens in hydrated state (fully hydrated in water) and can be calculated by the following equation

$$\% \text{ swell} = \frac{\text{lens diameter in an organic based solvent} - \text{lens diameter in water}}{\text{lens diameter in water}} \times 100 \quad (\text{I})$$

[0049] Example of preferred organic solvents includes without limitation, tripropylene glycol methyl ether, dipropylene glycol methyl ether, ethylene glycol n-butyl ether, ketones (e.g., acetone, methyl ethyl ketone, etc.), diethylene glycol n-butyl ether, diethylene glycol methyl ether, ethylene glycol phenyl ether, propylene glycol methyl ether, propylene glycol methyl ether acetate, dipropylene glycol methyl ether acetate, propylene glycol n-propyl ether, dipropylene glycol n-propyl ether, tripropylene glycol n-butyl ether, propylene glycol n-butyl ether, dipropylene glycol n-butyl ether, tripropylene glycol n-butyl ether, propylene glycol phenyl ether dipropylene glycol dimethyl ether, polyethylene glycols, polypropylene glycols, ethyl acetate, butyl acetate, amyl acetate, methyl lactate, ethyl lactate, i-propyl lactate, a C₁-C₁₂ alcohol (e.g., 1-butanol, 2-butanol, 1-propanol, 2-propanol, methanol, ethanol, cyclohexanol, cyclopentanol, exonorborneol, 1-pentanol, 2-pentanol, 3-pentanol, 1-hexanol, 2-hexanol, 3-hexanol, 3-methyl-2-butanol, 1-heptanol, 2-heptanol, 1-octanol, 2-octanol, 1-nonanol, 2-nonanol, 1-decanol, 2-decanol, 3-octanol, norborneol, tert-butanol, tert-amyl alcohol, 2-methyl-2-pentanol, 2,3-dimethyl-2-butanol, 3-methyl-3-pentanol, 1-methylcyclohexanol, 2-methyl-2-hexanol, 3,7-dimethyl-3-octanol, 1-chloro-2-methyl-2-propanol, 2-methyl-2-heptanol, 2-methyl-2-octanol, 2,2-methyl-2-nonanol, 2-methyl-2-decanol, 3-methyl-3-hexanol, 3-methyl-3-heptanol, 4-methyl-4-heptanol, 3-methyl-3-octanol, 4-methyl-4-octanol, 3-methyl-3-nonanol, 4-methyl-4-nonanol, 3-methyl-3-octanol, 3-ethyl-3-hexanol, 3-methyl-3-heptanol, 4-ethyl-4-heptanol, 4-propyl-4-heptanol, 4-isopropyl-4-heptanol, 2,4-dimethyl-2-pentanol, 1-methylcyclopentanol, 1-ethylcyclopentanol, 1-ethylcyclopentanol, 3-hydroxy-3-methyl-1-butene, 4-hydroxy-4-methyl-1-cyclopentanol, 2-phenyl-2-propanol, 2-methoxy-2-methyl-2-propanol, 2,3,4-trimethyl-3-pentanol, 3,7-dimethyl-3-octanol, 2-phenyl-2-butanol, 2-methyl-1-phenyl-2-propanol and 3-ethyl-3-pentanol, 1-ethoxy-2-propanol, 1-methyl-2-propanol, t-amyl alcohol, isopropanol), 1-methyl-2-pyrrolidone, N,N-dimethylpropionamide, dimethyl formamide, dimethyl acetamide, dimethyl propionamide, N-methyl pyrrolidinone, 1,2-propylene glycol, polyethyleneglycol having a molecular weight of about 200 or less, tetrahydrofuran, methylene chloride, and a mixture thereof.

[0050] In accordance with the invention, a polymeric coating material must comprises (1) multiple reactive functional groups that can participate in a coupling reaction with the reactive functional groups of a reactive hydrophilic polymeric material in the presence or absence of a coupling agent to form a crosslinked polymeric coating; preferably selected from the group consisting of carboxyl groups (i.e., -COOH), azetidinium group, amino groups (i.e., primary and/or secondary amino groups), azlactone groups, isocyanate groups, epoxy groups, aziridine groups, thiol groups, hydroxyl groups, and combinations thereof, more preferably selected from the group consisting of carboxyl groups, azetidinium groups, amino groups, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, thiol groups, and combinations thereof, even more preferably selected from the group consisting of carboxyl groups, azetidinium group, amino groups, epoxy groups, thiol groups, and combinations thereof, most preferably selected from the group consisting of carboxyl groups, azetidinium group, amino groups, epoxy groups, thiol groups, and combinations thereof; and (2) multiple affinity groups or moieties that are either identical to or different from the reactive functional groups and maintains the polymeric coating material's affinity (i.e., binding) with one or more of monomeric units of a lens material to be coated so as to form a durable prime coating on the contact lens, wherein the affinity groups are selected from the group consisting of carboxyl groups, ammonium groups (i.e., acidified primary, secondary or tertiary amino groups), hydrophobic moieties (e.g., C₈-C₂₀ alkyl groups), hydrophobic segments (e.g., tris(trialkylsilyloxy)silyl, di(trialkylsilyloxy)silyl, poly-

dimethylsiloxane, polypropylene oxide, polybutylene oxide), and combinations thereof, preferably selected from the group consisting of carboxyl groups, ammonium groups, and combination thereof. The durability of a prime coating on a contact lens can be determined according to the procedures described in Example 1.

[0051] The affinity groups of a polymeric coating material can be: carboxyl groups if a contact lens to be coated contains monomeric units of an amide-containing vinylic monomer (as described below) or an ammonium-containing vinylic monomer (as described below) (i.e., acidified primary, secondary or tertiary amino groups); ammonium groups if a contact lens to be coated contains monomeric units of a carboxyl-containing vinylic monomer (as described below); hydrophobic moieties or segments if a contact lens to be coated contains silicone components. It is believed that the carboxyl groups of a polymeric coating material can interact with amide-type vinylic monomeric units in the lens material through either ionic/polar interaction or hydrogen bonding to maintain an affinity to the lens material; that the carboxyl groups of a polymeric coating material can interact with ammonium-containing vinylic monomeric units in the lens material through ionic/ionic interactions and hydrogen bonding to maintain an affinity to the lens material; that the ammonium groups of a polymeric coating material can interact with carboxyl-containing vinylic monomeric units in the lens material through either ionic/polar interaction or hydrogen bonding to maintain an affinity to the lens material; and that the hydrophobic moieties or segments of a polymeric coating material can interact with silicone components in the lens material through hydrophobic-hydrophobic interactions to maintain an affinity to the lens material.

[0052] Amide-containing vinylic monomers have been widely used in making contact lenses. Preferred examples of amide-type vinylic monomers includes without limitation N,N-dimethylacrylamide (DMA), N,N-dimethylmethacrylamide (DMMA), 2-acrylamidoglycolic acid, 3-acryloylamino-1-propanol, N-hydroxyethyl acrylamide, N-[tris(hydroxymethyl)methyl]-acrylamide, N-methyl-3-methylene-2-pyrrolidone, 1-ethyl-3-methylene-2-pyrrolidone, 1-methyl-5-methylene-2-pyrrolidone, 1-ethyl-5-methylene-2-pyrrolidone, 5-methyl-3-methylene-2-pyrrolidone, 5-ethyl-3-methylene-2-pyrrolidone, 1-n-propyl-3-methylene-2-pyrrolidone, 1-n-propyl-5-methylene-2-pyrrolidone, 1-isopropyl-3-methylene-2-pyrrolidone, 1-isopropyl-5-methylene-2-pyrrolidone, 1-n-butyl-3-methylene-2-pyrrolidone, 1-tert-butyl-3-methylene-2-pyrrolidone, N-vinyl-2-pyrrolidone (NVP), N-vinyl formamide, N-vinyl acetamide, N-vinyl isopropylamide, N-vinyl-N-methyl acetamide, and mixtures thereof.

[0053] An "ammonium group" refers to an acidified primary, secondary or tertiary amino group. Examples of ammonium-containing vinylic monomers include without limitation allylamine, vinylamine, trimethylammonium 2-hydroxy propylmethacrylate, amino-C₂-C₄ alkyl (meth)acrylate, C₁-C₄ alkylamino-C₂-C₄ alkyl (meth)acrylate, vinylamine, amino-C₂-C₄ alkyl (meth)acrylamide, C₁-C₄ alkylamino-C₂-C₄ alkyl (meth)acrylamide, di(C₁-C₄ alkyl)amino-C₂-C₄ alkyl (meth)acrylate, tri(C₁-C₄ alkyl)amino-C₂-C₄ alkyl (meth)acrylate, and mixtures thereof.

[0054] Examples of carboxyl-containing vinylic monomers include without limitation acrylic acid, a C₁-C₄ alkylacrylic acid (e.g., methacrylic acid, ethylacrylic acid, propylacrylic acid, butylacrylic acid), N,N-2-acrylamidoglycolic acid, beta methyl-acrylic acid (crotonic acid), alpha-phenyl acrylic acid, beta-acryloxy propionic acid, sorbic acid, angelic acid, cinnamic acid, 1-carboxy-4-phenyl butadiene-1,3, itaconic acid, citraconic acid, mesaconic acid, glutaconic acid, aconitic acid, maleic acid, fumaric acid, and combination thereof.

[0055] Any polymer or copolymer having above-described reactive functional and affinity groups can be used in the invention so long as it can be dissolved in an organic-based solvent at room temperature in an amount of from about 0.001% to about 1.5%, preferably from about 0.002% to about 1%, more preferably from 0.003% to about 0.5% by weight relative to the total weight of the organic-based coating solution. An organic-based coating solution can be prepared by dissolving a given amount of a polymeric coating material in an organic-based solvent (any one described above) to have a concentration described above. It is believed that an organic-based solvent can swell a contact lens so that a portion of the polymeric coating material may penetrate into the contact lens and increase the durability of the prime coating. It is also believed that the physical entanglement of the polymeric coating material with a lens material near lens surface may ensure subsequent differential shrinkage between the lens material and the polymeric coating material so as to generate nano-textures in the coating (new lens surface) during the step of contacting with water or a water-based solvent.

[0056] Examples of preferred polymeric coating materials includes without limitation: (1) homopolymers of an ammonium-containing vinylic monomer (any one of those described above) or a carboxyl-containing vinylic monomer (any one of those described above); (2) copolymer of one or more ammonium-containing and/or carboxyl-containing vinylic monomers (those described above); (3) copolymer of one or more ammonium-containing and/or carboxyl-containing vinylic monomers (those described above) with a non-reactive vinylic monomer selected from the group consisting of (meth)acrylamide, N,N-dimethyl (meth)acrylamide, N-vinylpyrrolidone (NVP), N,N-dimethylaminoethyl (meth)acrylate, N,N-dimethylaminopropyl (meth)acrylamide, glycerol methacrylate, 3-acryloylamino-1-propanol, N-hydroxyethyl acrylamide, N-[tris(hydroxymethyl)methyl]-acrylamide, N-methyl-3-methylene-2-pyrrolidone, 1-ethyl-3-methylene-2-pyrrolidone, 1-methyl-5-methylene-2-pyrrolidone, 1-ethyl-5-methylene-2-pyrrolidone, 5-methyl-3-methylene-2-pyrrolidone, 5-ethyl-3-methylene-2-pyrrolidone, 2-hydroxyethyl (meth)acrylate, hydroxypropyl (meth)acrylate, C₁-C₄-alkoxy polyethylene glycol (meth)acrylate having a weight average molecular weight of up to 1500 Daltons, N-vinyl formamide, N-vinyl acetamide, N-vinyl isopropylamide, N-vinyl-N-methyl acetamide, allyl alcohol, vinyl alcohol (hydrolyzed form of vinyl acetate in the

copolymer), a phosphorylcholine-containing vinylic monomer (including (meth)acryloyloxyethyl phosphorylcholine and those described in US patent No. 5,461,433, herein incorporated by reference in its entirety), and combinations thereof and optionally with one or more reactive vinylic monomer having a reactive functional group selected from the group consisting of azetidinium group, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, and combinations thereof; (4) polyethyleneimine (PEI); (5) polyvinylalcohol with pendant primary and/or secondary amino groups; (6) block copolymers including at least one hydrophobic segments (preferably selected from the group consisting of polydimethylsiloxane, poly(propylene oxide), poly(butylene oxide), a polymer chain or segment consisting essentially of one or more silicone-containing vinylic monomers (preferably those described below), C₈-C₁₆ alkyl (meth)acrylate, and/or C₈-C₁₆ alkyl (meth)acrylamide, and combinations thereof) and polymeric segments having reactive functional groups selected from the group consisting of azetidinium group, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, thiol groups, and combinations thereof; (7) combination thereof.

[0057] Examples of preferred silicone-containing vinylic monomers include without limitation N-[tris(trimethylsiloxy)silylpropyl]-(meth)acrylamide, N-[tris(dimethylpropylsiloxy)silylpropyl]-(meth)acrylamide, N-[tris(dimethylphenylsiloxy)silylpropyl] (meth)acrylamide, N-[tris(dimethylethylsiloxy)silylpropyl] (meth)acrylamide, N-(2-hydroxy-3-(3-(bis(trimethylsilyloxy)methylsilyl)propyloxy)propyl)-2-methyl acrylamide; N-(2-hydroxy-3-(3-(bis(trimethylsilyloxy)methylsilyl)propyloxy)propyl) acrylamide; N,N-bis[2-hydroxy-3-(3-(bis(trimethylsilyloxy)methylsilyl)propyloxy)propyl]-2-methyl acrylamide; N,N-bis[2-hydroxy-3-(3-(bis(trimethylsilyloxy)methylsilyl)propyloxy)propyl] acrylamide; N-(2-hydroxy-3-(3-(tris(trimethylsilyloxy)silyl)propyloxy)propyl)-2-methyl acrylamide; N-(2-hydroxy-3-(3-(tris(trimethylsilyloxy)silyl)propyloxy)propyl) acrylamide; N,N-bis[2-hydroxy-3-(3-(tris(trimethylsilyloxy)silyl)propyloxy)propyl]-2-methyl acrylamide; N,N-bis[2-hydroxy-3-(3-(tris(trimethylsilyloxy)silyl)propyloxy)propyl]acrylamide; N-[2-hydroxy-3-(3-(t-butyl dimethylsilyl)propyloxy)propyl]-2-methyl acrylamide; N-[2-hydroxy-3-(3-(t-butyl dimethylsilyl)propyloxy)propyl]acrylamide; N,N-bis[2-hydroxy-3-(3-(t-butyl dimethylsilyl)propyloxy)propyl]-2-methyl acrylamide; N,N-bis[2-hydroxy-3-(3-(t-butyl dimethylsilyl)propyloxy)propyl]acrylamide; 3-methacryloxy propylpentamethyldisiloxane, tris(trimethylsilyloxy)silylpropyl methacrylate (TRIS), (3-methacryloxy-2-hydroxypropyloxy)propylbis(trimethylsiloxy)methylsilane, (3-methacryloxy-2-hydroxypropyloxy)propyltris(trimethylsiloxy)silane, 3-methacryloxy-2-(2-hydroxyethoxy)-propyloxy)propylbis(trimethylsiloxy)methylsilane, N-2-methacryloxyethyl-O-(methyl-bis-trimethylsiloxy-3-propyl)silyl carbamate, 3-(trimethylsilyl)propylvinyl carbonate, 3-(vinylloxycarbonylthio)propyl-tris(trimethyl-siloxy)silane, 3-[tris(trimethylsiloxy)silyl]propylvinyl carbamate, 3-[tris(trimethylsiloxy)silyl]propyl allyl carbamate, 3-[tris(trimethylsiloxy)silyl]propyl vinyl carbonate, t-butyl dimethyl-siloxyethyl vinyl carbonate; trimethylsilylethyl vinyl carbonate, and trimethylsilylmethyl vinyl carbonate). Most preferred siloxane-containing (meth)acrylamide monomers of formula (1) are N-[tris(trimethylsiloxy)silylpropyl]acrylamide, TRIS, N-[2-hydroxy-3-(3-(t-butyl dimethylsilyl)propyloxy)propyl]acrylamide.

[0058] It is understood that a polymeric coating material can comprise monomeric units of one or more reactive vinylic monomers so as to have multiple reactive functional groups. Exemplary reactive vinylics includes azetidinium-containing vinylic monomers, azlactone-containing vinylic monomers, isocyanate-containing vinylic monomers, epoxy-containing vinylic monomers, and aziridinyl-containing vinylic monomers. Examples of aziridinyl-containing vinylic monomers include without limitation 2-(1-aziridinyl) ethyl (meth)acrylate, 3-(1-aziridinyl) propyl (meth)acrylate, 4-(1-aziridinyl) butyl (meth)acrylate, 6-(1-aziridinyl) hexyl (meth)acrylate, and 8-(1-aziridinyl) octyl (meth)acrylate. Examples of epoxy-containing vinylic monomers include without limitation glycidyl (meth)acrylate, vinyl glycidyl ether, allyl glycidyl ether. Examples of isocyanate-containing vinylic monomers include without limitation 2-isocyanatoethyl (meth)acrylate, 3-isocyanatopropyl (meth)acrylate, 4-isocyanatobutyl (meth)acrylate, 6-isocyanatohexyl (meth)acrylate, 1-methyl-2-isocyanatoethyl methacrylate, and 1,1-dimethyl-2-isocyanatoethyl methacrylate. Examples of azlactone-containing vinylic monomers include without limitation 2-vinyl-4,4-dimethyl-1,3-oxazolin-5-one, 2-isopropenyl-4,4-dimethyl-1,3-oxazolin-5-one, 2-vinyl-4-methyl-4-ethyl-1,3-oxazolin-5-one, 2-isopropenyl-4-methyl-4-butyl-1,3-oxazolin-5-one, 2-vinyl-4,4-dibutyl-1,3-oxazolin-5-one, 2-isopropenyl-4-methyl-4-dodecyl-1,3-oxazolin-5-one, 2-isopropenyl-4,4-diphenyl-1,3-oxazolin-5-one, 2-isopropenyl-4,4-pentamethylene-1,3-oxazolin-5-one, 2-isopropenyl-4,4-tetramethylene-1,3-oxazolin-5-one, 2-vinyl-4,4-diethyl-1,3-oxazolin-5-one, 2-vinyl-4-methyl-4-nonyl-1,3-oxazolin-5-one, 2-isopropenyl-4-methyl-4-phenyl-1,3-oxazolin-5-one, 2-isopropenyl-4-methyl-4-benzyl-1,3-oxazolin-5-one, 2-vinyl-4,4-pentamethylene-1,3-oxazolin-5-one, and 2-vinyl-4,4-dimethyl-1,3-oxazolin-6-one, with 2-vinyl-4,4-dimethyl-1,3-oxazolin-5-one (VDMO) and 2-isopropenyl-4,4-dimethyl-1,3-oxazolin-5-one (IPDMO) as preferred azlactone-containing vinylic monomers. Azetidinium-containing vinylic monomers can be obtained by reacting epichlorohydrin with a vinylic monomer containing primary or secondary amino groups (any those described above) according to procedures similar to what described in EP1465931 (herein incorporated by reference in its entirety).

[0059] Preferably, a polymeric coating material is a polymer or copolymer comprising at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of monomeric units of one or more carboxyl-containing vinylic monomers, wherein the one or more carboxyl-containing vinylic monomers are selected from the group consisting of acrylic acid, a C₁-C₄ alkylacrylic acid (e.g., methacrylic acid, ethylacrylic acid, propylacrylic acid, butylacrylic acid), N,N-2-acrylamidoglycolic acid, beta methylacrylic acid (crotonic acid), alpha-phenyl acrylic acid, beta-acryloxy propionic acid, sorbic acid, angelic acid, cinnamic

acid, 1-carboxy-4-phenyl butadiene-1,3, itaconic acid, citraconic acid, mesaconic acid, glutaconic acid, aconitic acid, maleic acid, fumaric acid, and combination thereof. Examples of preferred carboxyl-containing polymeric coating materials include without limitation linear or branched polyacrylic acid; linear or branched polymethacrylic acid; linear or branched poly(acrylic acid-co-acrylamide) having at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of acrylic acid; linear or branched poly(methacrylic acid-co-acrylamide) having at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of methacrylic acid; linear or branched poly(acrylic acid-co-vinylpyrrolidone) having at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of acrylic acid; linear or branched poly(methacrylic acid-co-vinylpyrrolidone) having at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of methacrylic acid.

[0060] In accordance with the invention, the weight average molecular weight M_w of a polymeric coating material is preferably at least about 25,000 Daltons, more preferably at least about 50,000 Daltons, even more preferably at least about 75,000 Daltons, most preferably from about 100,000 to 1,000,000 Daltons.

[0061] A contact lens can be any commercial contact lenses or any ones made according to any methods well known to a person skilled in the art. For example, contact lenses can be produced in a conventional "spin-casting mold," as described for example in U.S. Patent No. 3,408,429, or by the full cast-molding process in a static form, as described in U.S. Patent Nos. 4,347,198; 5,508,317; 5,583,463; 5,789,464; and 5,849,810, or by lathe cutting of silicone hydrogel buttons as used in making customized contact lenses. In cast-molding, a lens formulation typically is dispensed into molds and cured (i.e., polymerized and/or crosslinked) in molds for making contact lenses.

[0062] For production of SiHy contact lenses, a SiHy lens formulation for cast-molding or spin-cast molding or for making SiHy rods used in lathe-cutting of contact lenses generally comprises at least one components selected from the group consisting of a silicone-containing vinylic monomer, a silicone-containing vinylic macromer, a silicone-containing prepolymer, a hydrophilic vinylic monomer, a hydrophobic vinylic monomer, a crosslinking agent, a free-radical initiator (photoinitiator or thermal initiator), a hydrophilic vinylic macromer/prepolymer, and combination thereof, as well known to a person skilled in the art. A SiHy contact lens formulation can also comprise other necessary components known to a person skilled in the art, such as, for example, a UV-absorbing agent, a visibility tinting agent (e.g., dyes, pigments, or mixtures thereof), antimicrobial agents (e.g., preferably silver nanoparticles), a bioactive agent, leachable lubricants, leachable tear-stabilizing agents, and mixtures thereof, as known to a person skilled in the art. Resultant SiHy contact lenses then can be subjected to extraction with an extraction solvent to remove unpolymerized components from the resultant lenses and to hydration process, as known by a person skilled in the art.

[0063] Any suitable silicone-containing vinylic monomers or macromers can be used in the invention. In addition to silicone-containing vinylic monomers described above, polysiloxane-containing vinylic monomers or macromers and silicone-containing prepolymers can also be used in the invention. Examples of preferred polysiloxane-containing vinylic monomers or macromers are monomethacrylated or monoacrylated polydimethylsiloxanes of various molecular weight (e.g., mono-3-methacryloxypropyl terminated, mono-butyl terminated polydimethylsiloxane or mono-(3-methacryloxy-2-hydroxypropyloxy)propyl terminated, mono-butyl terminated polydimethylsiloxane); dimethacrylated or diacrylated polydimethylsiloxanes of various molecular weight; vinyl carbonate-terminated polydimethylsiloxanes; vinyl carbamate-terminated polydimethylsiloxane; vinyl terminated polydimethylsiloxanes of various molecular weight; methacrylamide-terminated polydimethylsiloxanes; acrylamide-terminated polydimethylsiloxanes; acrylate-terminated polydimethylsiloxanes; methacrylate-terminated polydimethylsiloxanes; bis-3-methacryloxy-2-hydroxypropyloxypropyl polydimethylsiloxane; N,N,N',N'-tetrakis(3-methacryloxy-2-hydroxypropyl)-alpha,omega-bis-3-aminopropyl-polydimethylsiloxane; polysiloxanyalkyl (meth)acrylic monomers; siloxane-containing macromer selected from the group consisting of Macromer A, Macromer B, Macromer C, and Macromer D described in US 5,760,100 (herein incorporated by reference in its entirety); the reaction products of glycidyl methacrylate with amino-functional polydimethylsiloxanes; hydroxyl-functionalized siloxane-containing vinylic monomers or macromers; polysiloxane-containing macromers disclosed in U.S. Patent Nos. 4,136,250, 4,153,641, 4,182,822, 4,189,546, 4,343,927, 4,254,248, 4,355,147, 4,276,402, 4,327,203, 4,341,889, 4,486,577, 4,543,398, 4,605,712, 4,661,575, 4,684,538, 4,703,097, 4,833,218, 4,837,289, 4,954,586, 4,954,587, 5,010,141, 5,034,461, 5,070,170, 5,079,319, 5,039,761, 5,346,946, 5,358,995, 5,387,632, 5,416,132, 5,451,617, 5,486,579, 5,962,548, 5,981,675, 6,039,913, and 6,762,264 (here incorporated by reference in their entirety); polysiloxane-containing macromers disclosed in U.S. Patent Nos. 4,259,467, 4,260,725, and 4,261,875 (herein incorporated by reference in their entirety). Di- and tri-block macromers consisting of polydimethylsiloxane and polyalkyleneoxides could also be of utility. For example one might use methacrylate end capped polyethyleneoxide-block-polydimethylsiloxane-block-polyethyleneoxide to enhance oxygen permeability. Suitable monofunctional hydroxyl-functionalized siloxane-containing vinylic monomers/macromers and suitable multifunctional hydroxyl-functionalized siloxane-containing vinylic monomers/macromers are commercially available from Gelest, Inc, Morrisville, PA.

[0064] Examples of preferred silicon-containing prepolymers include those described in commonly-owned US Patent

Nos. 6,039,913, 7,091,283, 7,268,189 and 7,238,750, 7,521,519; commonly-owned US patent application publication Nos. US 2008-0015315 A1, US 2008-0143958 A1, US 2008-0143003 A1, US 2008-0234457 A1, US 2008-0231798 A1, and commonly-owned US patent application Nos. 61/180,449 and 61/180,453; all of which are incorporated herein by references in their entireties.

[0065] Examples of preferred hydrophilic vinylic monomers are N,N-dimethylacrylamide (DMA), N,N-dimethylmethacrylamide (DMMA), 2-acrylamidoglycolic acid, 3-acryloylamino-1-propanol, N-hydroxyethyl acrylamide, N-[tris(hydroxymethyl)methyl]-acrylamide, N-methyl-3-methylene-2-pyrrolidone, 1-ethyl-3-methylene-2-pyrrolidone, 1-methyl-5-methylene-2-pyrrolidone, 1-ethyl-5-methylene-2-pyrrolidone, 5-methyl-3-methylene-2-pyrrolidone, 5-ethyl-3-methylene-2-pyrrolidone, 1-n-propyl-3-methylene-2-pyrrolidone, 1-n-propyl-5-methylene-2-pyrrolidone, 1-isopropyl-3-methylene-2-pyrrolidone, 1-isopropyl-5-methylene-2-pyrrolidone, 1-n-butyl-3-methylene-2-pyrrolidone, 1-tert-butyl-3-methylene-2-pyrrolidone, 2-hydroxyethylmethacrylate (HEMA), 2-hydroxyethyl acrylate (HEA), hydroxypropyl acrylate, hydroxypropyl methacrylate (HPMA), trimethylammonium 2-hydroxy propylmethacrylate hydrochloride, aminopropyl methacrylate hydrochloride, dimethylaminoethyl methacrylate (DMAEMA), glycerol methacrylate (GMA), N-vinyl-2-pyrrolidone (NVP), allyl alcohol, vinylpyridine, a C₁-C₄-alkoxy polyethylene glycol (meth)acrylate having a weight average molecular weight of up to 1500, methacrylic acid, N-vinyl formamide, N-vinyl acetamide, N-vinyl isopropylamide, N-vinyl-N-methyl acetamide, allyl alcohol, N-vinyl caprolactam, and mixtures thereof.

[0066] Examples of preferred hydrophobic vinylic monomers include methylacrylate, ethylacrylate, propylacrylate, isopropylacrylate, cyclohexylacrylate, 2-ethylhexylacrylate, methylmethacrylate, ethylmethacrylate, propylmethacrylate, vinyl acetate, vinyl propionate, vinyl butyrate, vinyl valerate, styrene, chloroprene, vinyl chloride, vinylidene chloride, acrylonitrile, 1-butene, butadiene, methacrylonitrile, vinyl toluene, vinyl ethyl ether, perfluorohexylethyl-thio-carbonyl-aminoethyl-methacrylate, isobornyl methacrylate, trifluoroethyl methacrylate, hexafluoro-isopropyl methacrylate, hexafluorobutyl methacrylate.

[0067] Examples of preferred cross-linking agents include without limitation tetraethyleneglycol diacrylate, triethyleneglycol diacrylate, ethyleneglycol diacrylate, diethyleneglycol diacrylate, tetraethyleneglycol dimethacrylate, triethyleneglycol dimethacrylate, ethyleneglycol dimethacrylate, diethyleneglycol dimethacrylate, trimethylopropane trimethacrylate, pentaerythritol tetramethacrylate, bisphenol A dimethacrylate, vinyl methacrylate, ethylenediamine dimethacrylamide, ethylenediamine diacrylamide, glycerol dimethacrylate, triallyl isocyanurate, triallyl cyanurate, allylmethacrylate, allylmethacrylate, 1,3-bis(methacrylamidopropyl)-1,1,3,3-tetrakis(trimethylsiloxy)disiloxane, N,N'-methylenebisacrylamide, N,N'-methylenebismethacrylamide, N,N'-ethylenebisacrylamide, N,N'-ethylenebismethacrylamide, 1,3-bis(N-methacrylamidopropyl)-1,1,3,3-tetrakis-(trimethylsiloxy)disiloxane, 1,3-bis(methacrylamidobutyl)-1,1,3,3-tetrakis(trimethylsiloxy)-disiloxane, 1,3-bis(acrylamidopropyl)-1,1,3,3-tetrakis(trimethylsiloxy)disiloxane, 1,3-bis(methacryloxyethylureidopropyl)-1,1,3,3-tetrakis(trimethylsiloxy)disiloxane, and combinations thereof. A preferred cross-linking agent is tetra(ethyleneglycol) diacrylate, tri(ethyleneglycol) diacrylate, ethyleneglycol diacrylate, di(ethyleneglycol) diacrylate, methylenebisacrylamide, triallyl isocyanurate, or triallyl cyanurate. The amount of a cross-linking agent used is expressed in the weight content with respect to the total polymer and is preferably in the range from about 0.05% to about 4%, and more preferably in the range from about 0.1 % to about 2%.

[0068] Examples of suitable thermal initiators include, but are not limited to, 2,2'-azobis (2,4-dimethylpentanenitrile), 2,2'-azobis (2-methylpropanenitrile), 2,2'-azobis (2-methylbutanenitrile), peroxides such as benzoyl peroxide, and the like. Preferably, the thermal initiator is 2,2'-azobis(isobutyronitrile) (AIBN).

[0069] Suitable photoinitiators are benzoin methyl ether, diethoxyacetophenone, a benzoylphosphine oxide, 1-hydroxycyclohexyl phenyl ketone and Darocur and Irgacur types, preferably Darocur 1173® and Darocur 2959®. Examples of benzoylphosphine initiators include 2,4,6-trimethylbenzoyldiphenylphosphine oxide; bis-(2,6-dichlorobenzoyl)-4-N-propylphenylphosphine oxide; and bis-(2,6-dichlorobenzoyl)-4-N-butylphenylphosphine oxide. Reactive photoinitiators which can be incorporated, for example, into a macromer or can be used as a special monomer are also suitable. Examples of reactive photoinitiators are those disclosed in EP 632 329, herein incorporated by reference in its entirety. The polymerization can then be triggered off by actinic radiation, for example light, in particular UV light of a suitable wavelength. The spectral requirements can be controlled accordingly, if appropriate, by addition of suitable photosensitizers.

[0070] Any suitable polymerizable UV-absorbing agents can be used in the invention. Preferably, a polymerizable UV-absorbing agent comprises a benzotriazole-moiety or a benzophenone-moiety. Examples of preferred polymerizable UV absorbers include without limitation 2-(2-hydroxy-5-vinylphenyl)-2H-benzotriazole, 2-(2-hydroxy-5-acryloyloxyphenyl)-2H-benzotriazole, 2-(2-hydroxy-3-methacrylamido methyl-5-tert octylphenyl)benzotriazole, 2-(2'-hydroxy-5'-methacrylamidophenyl)-5-chlorobenzotriazole, 2-(2'-hydroxy-5'-methacrylamidophenyl)-5-methoxybenzotriazole, 2-(2'-hydroxy-5'-methacryloxypropyl-3'-t-butyl-phenyl)-5-chlorobenzotriazole, 2-(2'-hydroxy-5'-methacryloxyethylphenyl)benzotriazole, 2-(2'-hydroxy-5'-methacryloxypropylphenyl)benzotriazole, 2-hydroxy-4-acryloxy alkoxy benzophenone, 2-hydroxy-4-methacryloxy alkoxy benzophenone, allyl-2-hydroxybenzophenone, 2-hydroxy-4-methacryloxy benzophenone.

[0071] The bioactive agent is any compound that can prevent a malady in the eye or reduce the symptoms of an eye malady. The bioactive agent can be a drug, an amino acid (e.g., taurine, glycine, etc.), a polypeptide, a protein, a nucleic

acid, or any combination thereof. Examples of drugs useful herein include, but are not limited to, rebamipide, ketotifen, olapitidine, cromoglycolate, cyclosporine, nedocromil, levocabastine, lodoxamide, ketotifen, or the pharmaceutically acceptable salt or ester thereof. Other examples of bioactive agents include 2-pyrrolidone-5-carboxylic acid (PCA), alpha hydroxyl acids (e.g., glycolic, lactic, malic, tartaric, mandelic and citric acids and salts thereof, etc.), linoleic and gamma

linoleic acids, and vitamins (e.g., B5, A, B6, etc.).

[0072] Examples of leachable lubricants include without limitation mucin-like materials (e.g., polyglycolic acid) and non-crosslinkable hydrophilic polymers (i.e., without ethylenically unsaturated groups). Any hydrophilic polymers or copolymers without any ethylenically unsaturated groups can be used as leachable lubricants. Preferred examples of non-crosslinkable hydrophilic polymers include, but are not limited to, polyvinyl alcohols (PVAs), polyamides, polyimides, polylactone, a homopolymer of a vinyl lactam, a copolymer of at least one vinyl lactam in the presence or in the absence of one or more hydrophilic vinylic comonomers, a homopolymer of acrylamide or methacrylamide, a copolymer of acrylamide or methacrylamide with one or more hydrophilic vinylic monomers, polyethylene oxide (i.e., polyethylene glycol (PEG)), a polyoxyethylene derivative, poly-N-N-dimethylacrylamide, polyacrylic acid, poly 2 ethyl oxazoline, heparin polysaccharides, polysaccharides, and mixtures thereof. The weight-average molecular weight M_w of the non-crosslinkable hydrophilic polymer is preferably from 5,000 to 500,000, more preferably from 10,000 to 300,000, even more preferably from 20,000 to 100,000.

[0073] Examples of leachable tear-stabilizing agents include, without limitation, phospholipids, monoglycerides, diglycerides, triglycerides, glycolipids, glyceroglycolipids, sphingolipids, sphingo-glycolipids, fatty alcohols, fatty acids, mineral oils, and mixtures thereof. Preferably, a tear stabilizing agent is a phospholipid, a monoglyceride, a diglyceride, a triglyceride, a glycolipid, a glyceroglycolipid, a sphingolipid, a sphingo-glycolipid, a fatty acid having 8 to 36 carbon atoms, a fatty alcohol having 8 to 36 carbon atoms, or a mixture thereof.

[0074] In accordance with the invention, a lens formulation can be a solution or a melt at a temperature from about 20°C to about 85°C. Preferably, a polymerizable composition is a solution of all desirable components in a suitable solvent, or a mixture of suitable solvents.

[0075] A lens formulation can be prepared by dissolving all of the desirable components in any suitable solvent known to a person skilled in the art. All of the exemplary solvents described above can be used in preparing a lens formulation.

[0076] Numerous SiHy lens formulations have been described in numerous patents and patent applications published by the filing date of this application. All of them can be used in obtaining a SiHy lens which in turn becomes the inner layer of a SiHy contact lens of the invention., so long as they will yield a SiHy material having a Dk and water content specified above. A SiHy lens formulation for making commercial SiHy lenses, such as, lotrafilcon A, lotrafilcon B, balafilcon A, galyfilcon A, senofilcon A, narafilecon A, narafilecon B, comfilcon A, enfilcon A, can also be used in making SiHy contact lenses.

[0077] Lens molds for making contact lenses are well known to a person skilled in the art and, for example, are employed in cast molding or spin casting. For example, a mold (for cast molding) generally comprises at least two mold sections (or portions) or mold halves, i.e. first and second mold halves. The first mold half defines a first molding (or optical) surface and the second mold half defines a second molding (or optical) surface. The first and second mold halves are configured to receive each other such that a lens forming cavity is formed between the first molding surface and the second molding surface. The molding surface of a mold half is the cavity-forming surface of the mold and in direct contact with lens-forming material.

[0078] Methods of manufacturing mold sections for cast-molding a contact lens are generally well known to those of ordinary skill in the art. The process of the present invention is not limited to any particular method of forming a mold. In fact, any method of forming a mold can be used in the present invention. The first and second mold halves can be formed through various techniques, such as injection molding or lathing. Examples of suitable processes for forming the mold halves are disclosed in U.S. Patent Nos. 4,444,711 to Schad; 4,460,534 to Boehm et al.; 5,843,346 to Morrill; and 5,894,002 to Boneberger et al., which are also incorporated herein by reference.

[0079] Virtually all materials known in the art for making molds can be used to make molds for making contact lenses. For example, polymeric materials, such as polyethylene, polypropylene, polystyrene, PMMA, Topas® COC grade 8007-S10 (clear amorphous copolymer of ethylene and norbornene, from Ticona GmbH of Frankfurt, Germany and Summit, New Jersey), or the like can be used. Other materials that allow UV light transmission could be used, such as quartz glass and sapphire.

[0080] In a preferred embodiment, reusable molds are used and the silicone-hydrogel lens-forming composition is cured actinically under a spatial limitation of actinic radiation to form a SiHy contact lens. Examples of preferred reusable molds are those disclosed in U.S. patent application Nos. 08/274,942 filed July 14, 1994, 10/732,566 filed December 10, 2003, 10/721,913 filed November 25, 2003, and U.S. Patent No. 6,627,124, which are incorporated by reference in their entireties. Reusable molds can be made of quartz, glass, sapphire, CaF_2 , a cyclic olefin copolymer (such as for example, Topas® COC grade 8007-S10 (clear amorphous copolymer of ethylene and norbornene) from Ticona GmbH of Frankfurt, Germany and Summit, New Jersey, Zeonex® and Zeonor® from Zeon Chemicals LP, Louisville, KY), polymethylmethacrylate (PMMA), polyoxymethylene from DuPont (Delrin), Ultem® (polyetherimide) from G.E. Plastics,

PrimoSpire®, etc..

[0081] Contacting of a contact lens with an organic-based solution of a polymeric coating material can occur by dipping the contact lens in a bath of a coating solution for a period of time or alternatively dipping the contact lens sequentially in a series of bath of coating solutions for a fixed shorter time period for each bath. The contacting time of a contact lens with a coating solution of a reactive polymer may last up to about 10 minutes, preferably from about 5 to about 360 seconds, more preferably from about 5 to about 250 seconds, even more preferably from about 5 to about 200 seconds.

[0082] An "aqueous solution" is intended to describe an homogeneous solution in which water is the solvent and at least one solute, which is selected from the group consisting of at least one organic solvent, at least one salt, at least one buffering agent, at least one lubricant (e.g., a hydrophilic polymer), at least one surfactant, and combination thereof, is dissolved in water. It should be understood that in order to form a prime coating having nano-textures (i.e., wrinkled surface patterns in the prime coating) of the contact lens, the aqueous solution used in shrinking the contact lens having the coating thereon cannot swell the contact lens by more than about 20%, preferably more than about 15%, more preferably more than about 10%, even more preferably more than about 5%; and that the amount of the at least one solute is about 30% or less, preferably about 20% or less, more preferably about 15% or less, even more preferably about 10% or less, in particular about 5% or less by weight relative to the weight of the aqueous solution. It should be understood that the above values of swelling are calculated based on Eq. (I) described above.

[0083] Contacting of the swollen contact lens having the intermediary coating thereon with water or an aqueous solution can occur by dipping the contact lens in a bath of water or an aqueous solution for a period of time or alternatively dipping the contact lens sequentially in a series of bath of water or aqueous solutions for a fixed shorter time period for each bath. The contacting time of the swollen contact lens having the intermediary coating with water or an aqueous solution may last up to about 10 minutes, preferably from about 5 to about 360 seconds, more preferably from about 5 to about 250 seconds, even more preferably from about 5 to about 100 seconds. Winkled surface patterns (i.e., nano-textures) in the prime coating can be created during the fast shrinking of the swollen contact lens having the intermediary coating thereon. However, it is found that the resultant wrinkled surface patterns in the prime coating is not permanent and can gradually disappear under certain conditions, for example, if contact lenses with prime coatings having wrinkled surface patterns are hydrated with water overnight, or if the contact lenses are soaked in an organic based solvent for up to about 1 minute and followed by hydrating in water.


[0084] The degree of nano-structures on the lens surface can be controlled in order to optimize the size and degree of the nano-structures so that they do not cause unacceptable light scattering. Methods of controlling the degree of nano-structures on the surface include but are not limited to the following. For examples, one can adjust the degree of lens swelling by appropriate selection of the organic solvent (or organic/water mixture) containing the primer coating polymer, adjust the rate at which the lens shrinks back to its equilibrium size in water by using an intermediate water/organic bath to slow the shrinkage rate, adjust the lens exposure times in the coating and rinsing baths, adjust the time between the application of the primer coating and the surface crosslinking step, and combinations thereof.

[0085] The nano-textures in the prime coating are fixed (i.e., rendering the winkle surface pattern relatively permanent) by crosslinking the polymeric coating material with a water-soluble and crosslinkable hydrophilic polymeric material having multiple second reactive functional groups, to form a crosslinked polymeric coating that preserves the nano-textures of the prime coating and provides a nano-textured surface to the contact lens. The reactive functional groups of a water-soluble and crosslinkable hydrophilic polymeric material can be: carboxyl groups, azetidinium group, amino groups, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, hydroxyl groups, thiol groups, or combinations thereof; preferably carboxyl groups, azetidinium groups, amino groups, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, thiol groups, or combinations thereof; more preferably carboxyl groups, azetidinium group, amino groups, epoxy groups, thiol groups, or combinations thereof; even more preferably azetidinium group, epoxy groups, or combinations thereof, provided that one second reactive functional group can react (in a coupling reaction) with one first reactive functional group of the polymeric coating material in the presence or preferably absence of a coupling agent to form a crosslinkage.

[0086] A "crosslinked hydrophilic polymeric coating" as used in this application means a layer of a crosslinked polymeric material having a three-dimensional network that can contain water when fully hydrated. The three-dimensional network of a crosslinked polymeric material can be formed by crosslinking of two or more linear or branched polymers through crosslinkages.

[0087] Coupling reactions between a pair of reactive functional groups are well known reactions under the conditions that are customary for formation of covalent linkages. For example, an amino group reacts with aldehyde group to form a Schiff base which may further be reduced; an amino group -NHR' reacts with an acid anhydride group to form an amide linkage (-CO-NR'-); an amino group -NHR' reacts with an isocyanate group to form a urea linkage (-NR"-C(O)-NH-); an amino group -NHR' reacts with an epoxy or aziridine group to form an amine bond (-C-NR'-); an amino group -NHR' reacts (ring-opening) with an azlactone group to form an alkylene-diamido linkage (-C(O)NH-alkylene-C(O)NR'-); an amino group -NHR' reacts with a carboxylic acid group in the presence of a coupling agent - carbodiimide (e.g., 1-ethyl-3-(3-dimethylaminopropyl) carbodiimide (EDC), N,N'-dicyclohexylcarbodiimide (DCC), 1-cylcohexyl-3-(2-morpholinoe-

thyl)carbodiimide, diisopropyl carbodiimide, or mixtures thereof) to form an amide linkage; a hydroxyl reacts with an isocyanate to form a urethane linkage; a hydroxyl reacts with an epoxy or aziridine to form an ether linkage (-O-); a hydroxyl reacts with an acid chloride or bromide group or with an acid anhydride group to form an ester linkage; an hydroxyl group reacts with an azlactone group in the presence of a catalyst to form an amidoalkylenecarboxy linkage (-C(O)NH-alkylene-C(O)-O-); a carboxyl group reacts with an epoxy group to form an ester bond; a thiol group (-SH) reacts with an isocyanate to form a thiocarbamate linkage (-NH-C(O)-S-); a thiol group reacts with an epoxy or aziridine to form a thioether linkage (-S-); a thiol group reacts with an acid anhydride group to form a thiolester linkage; a thiol group reacts with an azlactone group in the presence of a catalyst to form a linkage (-C(O)NH-CR₃R₄-(CH₂)_p-C(O)-S-). It is also understood that coupling agents with two reactive functional groups may be used in the coupling reactions. A coupling agent having two reactive functional groups can be a diisocyanate, a di-acid halide, a di-carboxylic acid compound, a di-acid halide compound, a di-azlactone compound, a di-epoxy compound, a diamine, or a diol. A person skilled in the art knows well to select a coupling reaction (e.g., anyone described above in this application) and conditions thereof to prepare a polysiloxane terminated with one or more ethylenically unsaturated groups. For example, a diisocyanate, di-acid halide, di-carboxylic acid, di-azlactone, or di-epoxy compound can be used in the coupling of two hydroxyl, two amino groups, two carboxyl groups, two epoxy groups, or combination thereof; a diamine or dihydroxyl compound can be used in the coupling of two isocyanate, epoxy, aziridine, carboxylic acid, or azlactone groups or combinations thereof. At a relatively elevated temperature (from about 40°C to about 140°C), positively-charged azetidinium groups react with functional groups such as amino groups, thiol groups, and carboxylate ion -COO⁻ (i.e., the deprotonated form of a carboxyl group) to form neutral, hydroxyl-containing covalent linkages as illustrated in the scheme I



Scheme I

in which R is the rest portion of a compound, L is -NR'⁻ in which R' is hydrogen, a C₁-C₂₀ unsubstituted or substituted, linear or branched alkyl group, -S-, or -OC(=O)-.

[0088] In accordance with the invention, the water-soluble and crosslinkable hydrophilic polymeric material preferably comprises, as the second reactive functional groups, thermally-crosslinkable groups, more preferably azetidinium groups and/or epoxy groups, even more preferably azetidinium groups. Preferably, the water-soluble and crosslinkable hydrophilic polymeric material is a partially-crosslinked hydrophilic polymeric material that comprises a three-dimensional network and crosslinkable (preferably thermally-crosslinkable) groups (such as, e.g., azetidinium and/or epoxy groups), more preferably azetidinium groups within the network. The term "partially-crosslinked" in reference to a hydrophilic polymeric material means that the crosslinkable groups of starting materials for making the hydrophilic polymeric material in a crosslinking reaction have not been fully consumed.

[0089] In a preferred embodiment, the water-soluble and crosslinkable hydrophilic polymeric material comprises (i) from about 20% to about 95%, preferably from about 35% to about 90%, more preferably from about 50% to about 85%, by weight of first polymer chains derived from an epichlorohydrin-functionalized polyamine or polyamidoamine, (ii) from about 5% to about 80%, preferably from about 10% to about 65%, even more preferably from about 15% to about 50%, by weight of hydrophilic moieties or second polymer chains derived from at least one hydrophilicity-enhancing agent having at least one reactive functional group selected from the group consisting of amino group, carboxyl group, thiol group, and combination thereof, wherein the hydrophilic moieties or second polymer chains are covalently attached to the first polymer chains through one or more covalent linkages each formed between one azetidinium group of the epichlorohydrin-functionalized polyamine or polyamidoamine and one amino, carboxyl or thiol group of the hydrophilicity-enhancing agent, and (iii) azetidinium groups which are parts of the first polymer chains or pendant or terminal groups covalently attached to the first polymer chains. The composition of the hydrophilic polymeric material is determined by the composition (based on the total weight of the reactants) of a reactants mixture used for preparing the thermally-crosslinkable hydrophilic polymeric material according to the crosslinking reactions shown in Scheme I above. For example, if a reactant mixture comprises about 75% by weight of an epichlorohydrin-functionalized polyamine or polyamidoamine and about 25% by weight of at least one hydrophilicity-enhancing agent based on the total weight of the reactants, then the resultant hydrophilic polymeric material comprise about 75% by weight of first polymer chains derived from the epichlorohydrin-functionalized polyamine or polyamidoamine and about 25% by weight of hydrophilic moieties or second polymer chains derived from said at least one hydrophilicity-enhancing agent. The azetidinium groups of the thermally-crosslinkable hydrophilic polymeric material are those azetidinium groups (of the epichlorohydrin-functionalized polyamine or polyamidoamine) which do not participate in crosslinking reactions for preparing the thermally-crosslinkable hydrophilic polymeric material.

[0090] With such a water-soluble and crosslinkable hydrophilic polymeric material, the crosslinked hydrophilic coating

can be formed by simply heating a contact lens having the prime coating having nano-textures in an aqueous solution of a water-soluble and crosslinkable hydrophilic polymeric material to and at a temperature from about 40°C to about 140°C for a period of time sufficient to covalently attach the hydrophilic polymeric material onto the prime coating on the surface of the contact lens through covalent linkages each formed between one azetidinium group of the hydrophilic polymeric material and one of the first reactive functional groups of the polymeric coating material in the prime coating on the surface of the contact lens, thereby forming a crosslinked hydrophilic coating comprising nano-textures on the contact lens.

[0091] An epichlorohydrin-functionalized polyamine or polyamidoamine can be obtained by reacting epichlorohydrin with a polyamine polymer or a polymer containing primary or secondary amino groups. For example, a poly(alkylene imines) or a poly(amidoamine) which is a polycondensate derived from a polyamine and a dicarboxylic acid (e.g., adipic acid-diethylenetriamine copolymers) can react with epichlorohydrin to form an epichlorohydrin-functionalized polymer. Similarly, a homopolymer or copolymer of aminoalkyl(meth)acrylate, mono-alkylaminoalkyl (meth)acrylate, aminoalkyl(meth)acrylamide, or mono-alkylaminoalkyl (meth)acrylamide can also react with epichlorohydrin to form an epichlorohydrin-functionalized polyamine. The reaction conditions for epichlorohydrin-functionalization of a polyamine or polyamidoamine polymer are taught in EP1465931 (herein incorporated by reference in its entirety). A preferred epichlorohydrin-functionalized polymer is polyaminoamide-epichlorohydrin (PAE) (or polyamide-polyamine-epichlorohydrin or polyamide-epichlorohydrin), such as, for example, Kymene® or Polycup® resins (epichlorohydrin-functionalized adipic acid-diethylenetriamine copolymers) from Hercules or Polycup® or Servamine® resins from Servo/Delden.

[0092] Any suitable hydrophilicity-enhancing agents can be used in the invention so long as they contain at least one amino group, at least one carboxyl group, and/or at least one thiol group.

[0093] A preferred class of hydrophilicity-enhancing agents include without limitation: amino-, carboxyl- or thiol-containing monosaccharides (e.g., 3-amino-1,2-propanediol, 1-thioglycerol, 5-keto-D-gluconic acid, galactosamine, glucosamine, galacturonic acid, gluconic acid, glucosaminic acid, mannosamine, saccharic acid 1,4-lactone, saccharide acid, Ketodeoxynonulosonic acid, *N*-methyl-D-glucamine, 1-amino-1-deoxy-β-D-galactose, 1-amino-1-deoxysorbitol, 1-methylamino-1-deoxysorbitol, *N*-aminoethyl gluconamide); amino-, carboxyl- or thiol-containing disaccharides (e.g., chondroitin disaccharide sodium salt, di(β-D-xylopyranosyl)amine, digalacturonic acid, heparin disaccharide, hyaluronic acid disaccharide, Lactobionic acid); and amino-, carboxyl- or thiol-containing oligosaccharides (e.g., carboxymethyl-β-cyclodextrin sodium salt, trigalacturonic acid); and combinations thereof.

[0094] Another preferred class of hydrophilicity-enhancing agents is hydrophilic polymers having one or more amino, carboxyl and/or thiol groups. More preferably, the content of the amino, carboxyl and/or thiol groups in a hydrophilic polymer as a hydrophilicity-enhancing agent is less than about 40%, preferably less than about 30%, more preferably less than about 20%, even more preferably less than about 10%, by weight based on the total weight of the hydrophilic polymer.

[0095] One preferred class of hydrophilic polymers as hydrophilicity-enhancing agents are amino- or carboxyl-containing polysaccharides, for example, such as, carboxymethylcellulose (having a carboxyl content of about 40% or less, which is estimated based on the composition of repeating units, $-\text{[C}_6\text{H}_{10-m}\text{O}_5(\text{CH}_2\text{CO}_2\text{H})_m\text{]}-$ in which *m* is 1 to 3), carboxyethylcellulose (having a carboxyl content of about 36% or less, which is estimated based on the composition of repeating units, $-\text{[C}_6\text{H}_{10-m}\text{O}_5(\text{C}_2\text{H}_4\text{CO}_2\text{H})_m\text{]}-$ in which *m* is 1 to 3) carboxypropylcellulose (having a carboxyl content of about 32% or less, which is estimated based on the composition of repeating units, $-\text{[C}_6\text{H}_{10-m}\text{O}_5(\text{C}_3\text{H}_6\text{CO}_2\text{H})_m\text{]}-$ in which *m* is 1 to 3), hyaluronic acid (having a carboxyl content of about 11%, which is estimated based on the composition of repeating units, $-\text{(C}_{13}\text{H}_{20}\text{O}_9\text{NCO}_2\text{H})-$), chondroitin sulfate (having a carboxyl content of about 9.8%, which is estimated based on the composition of repeating units, $-\text{(C}_{12}\text{H}_{18}\text{O}_{13}\text{NS CO}_2\text{H})-$), or combinations thereof.

[0096] Another preferred class of hydrophilic polymers as hydrophilicity-enhancing agents include without limitation: poly(ethylene glycol) (PEG) with mono-amino, carboxyl or thiol group (e.g., PEG-NH₂, PEG-SH, PEG-COOH); H₂N-PEG-NH₂; HOOC-PEG-COOH; HS-PEG-SH; H₂N-PEG-COOH; HOOC-PEG-SH; H₂N-PEG-SH; multi-arm PEG with one or more amino, carboxyl or thiol groups; PEG dendrimers with one or more amino, carboxyl or thiol groups; a diamino- or dicarboxyl-terminated homo- or co-polymer of a non-reactive hydrophilic vinylic monomer; a monoamino- or monocarboxyl-terminated homo- or co-polymer of a non-reactive hydrophilic vinylic monomer; a copolymer which is a polymerization product of a composition comprising (1) about 60% by weight or less, preferably from about 0.1 % to about 30%, more preferably from about 0.5% to about 20%, even more preferably from about 1 % to about 15%, by weight of one or more reactive vinylic monomers and (2) at least one non-reactive hydrophilic vinylic monomer; and combinations thereof. Reactive vinylic monomer(s) and non-reactive hydrophilic vinylic monomer(s) are those described previously.

[0097] More preferably, a hydrophilic polymer as a hydrophilicity-enhancing agent is PEG-NH₂; PEG-SH; PEG-COOH; H₂N-PEG-NH₂; HOOC-PEG-COOH; HS-PEG-SH; H₂N-PEG-COOH; HOOC-PEG-SH; H₂N-PEG-SH; multi-arm PEG with one or more amino, carboxyl or thiol groups; PEG dendrimers with one or more amino, carboxyl or thiol groups; a monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated homo- or copolymer of a non-reactive hydrophilic vinylic monomer selected from the group consisting of acryamide (AAm), *N,N*-dimethylacrylamide (DMA), *N*-vinylpyrrolidone (NVP), *N*-vinyl-*N*-methyl acetamide, glycerol (meth)acrylate, hydroxyethyl (meth)acrylate, *N*-hydroxyethyl (meth)acry-

lamide, C₁-C₄-alkoxy polyethylene glycol (meth)acrylate having a weight average molecular weight of up to 400 Daltons, vinyl alcohol, N-methyl-3-methylene-2-pyrrolidone, 1-methyl-5-methylene-2-pyrrolidone, 5-methyl-3-methylene-2-pyrrolidone, N,N-dimethylaminoethyl (meth)acrylate, N,N-dimethylaminopropyl (meth)acrylamide, (meth)acryloyloxyethyl phosphorylcholine, and combinations thereof; a copolymer which is a polymerization product of a composition comprising (1) from about 0.1 % to about 30%, preferably from about 0.5% to about 20%, more preferably from about 1 % to about 15%, by weight of (meth)acrylic acid, allylamine and/or amino-C₂-C₄ alkyl (meth)acrylate, and (2) at least one non-reactive hydrophilic vinylic monomer selected from the group consisting of acryamide, N,N-dimethylacrylamide, N-vinylpyrrolidone, (meth)acryloyloxyethyl phosphorylcholine, N-vinyl-N-methyl acetamide, glycerol (meth)acrylate, hydroxyethyl (meth)acrylate, N-hydroxyethyl (meth)acrylamide, C₁-C₄-alkoxy polyethylene glycol (meth)acrylate having a weight average molecular weight of up to 400 Daltons, vinyl alcohol, and combination thereof.

[0098] Most preferably, the hydrophilicity-enhancing agent as a hydrophilicity-enhancing agent is PEG-NH₂; PEG-SH; PEG-COOH; monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated polyvinylpyrrolidone; monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated polyacrylamide; monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(DMA); monoamino- or monocarboxyl-, diamino- or dicarboxyl-terminated poly(DMA-co-NVP); monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(NVP-co-N,N-dimethylaminoethyl (meth)acrylate); monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(vinylalcohol); monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly[(meth)acryloyloxyethyl phosphorylcholine] homopolymer or copolymer; monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(NVP-co-vinyl alcohol); monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(DMA-co-vinyl alcohol); poly[(meth)acrylic acid-co-acrylamide] with from about 0.1 % to about 30%, preferably from about 0.5% to about 20%, more preferably from about 1 % to about 15%, by weight of (meth)acrylic acid; poly[(meth)acrylic acid-co-NVP] with from about 0.1 % to about 30%, preferably from about 0.5% to about 20%, more preferably from about 1% to about 15%, by weight of (meth)acrylic acid; a copolymer which is a polymerization product of a composition comprising (1) (meth)acryloyloxyethyl phosphorylcholine and (2) from about 0.1% to about 30%, preferably from about 0.5% to about 20%, more preferably from about 1% to about 15%, by weight of (meth)acrylic acid, allylamine and/or amino-C₂-C₄alkyl (meth)acrylate; and combination thereof.

[0099] PEGs with functional groups and multi-arm PEGs with functional groups can be obtained from various commercial suppliers, e.g., Polyscience, and Shearwater Polymers, zinc., etc.

[0100] Monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated homo- or copolymers of one or more non-reactive hydrophilic vinylic monomers or of a phosphorylcholine-containing vinylic monomer can be prepared according to procedures described in U.S. Patent No. 6,218,508, herein incorporated by reference in its entirety. For example, to prepare a diamino- or dicarboxyl-terminated homo- or co-polymer of a non-reactive hydrophilic vinylic monomer, the non-reactive vinylic monomer, a chain transfer agent with an amino or carboxyl group (e.g., 2-aminoethanethiol, 2-mercaptopropionic acid, thioglycolic acid, thiolactic acid, or other hydroxymercaptanes, aminomercaptans, or carboxyl-containing mercaptanes) and optionally other vinylic monomer are copolymerized (thermally or actinically) with a reactive vinylic monomer (having an amino or carboxyl group), in the presence of a free-radical initiator. Generally, the molar ratio of chain transfer agent to that of all of vinylic monomers other than the reactive vinylic monomer is from about 1:5 to about 1:100, whereas the molar ratio of chain transfer agent to the reactive vinylic monomer is 1:1.

[0101] In such preparation, the chain transfer agent with amino or carboxyl group is used to control the molecular weight of the resultant hydrophilic polymer and forms a terminal end of the resultant hydrophilic polymer so as to provide the resultant hydrophilic polymer with one terminal amino or carboxyl group, while the reactive vinylic monomer provides the other terminal carboxyl or amino group to the resultant hydrophilic polymer. Similarly, to prepare a monoamino- or monocarboxyl-terminated homo- or co-polymer of a non-reactive hydrophilic vinylic monomer, the non-reactive vinylic monomer, a chain transfer agent with an amino or carboxyl group (e.g., 2-aminoethanethiol, 2-mercaptopropionic acid, thioglycolic acid, thiolactic acid, or other hydroxymercaptanes, aminomercaptans, or carboxyl-containing mercaptanes) and optionally other vinylic monomers are copolymerized (thermally or actinically) in the absence of any reactive vinylic monomer.

[0102] Copolymers containing monomeric units derived from methacryloyloxyethyl phosphorylcholine and carboxyl, amino and/or thiol reactive functional groups can be obtained from NOP Corporation (e.g., LIPIDURE® -A and -AF).

[0103] The weight average molecular weight M_w of the hydrophilic polymer having at least one amino, carboxyl or thiol group (as a hydrophilicity-enhancing agent) as hydrophilicity-enhancing agent is preferably from about 500 to about 1,000,000, more preferably from about 1,000 to about 500,000, even more preferably from about 5,000 to about 250,000 Daltons.

[0104] It is understood that the reaction between a hydrophilicity-enhancing agent and an epichlorohydrin-functionalized polyamine or polyamidoamine is carried out at a temperature of from about 40°C to about 100°C for a period of time sufficient (from about 0.3 hour to about 24 hours, preferably from about 1 hour to about 12 hours, even more preferably from about 2 hours to about 8 hours) to form a water-soluble and thermally-crosslinkable hydrophilic polymeric material containing azetidinium groups.

[0105] It is also understood that the concentration of a hydrophilicity-enhancing agent relative to an epichlorohydrin-

functionalized polyamine or polyamidoamine must be selected not to render a resultant hydrophilic polymeric material water-insoluble (i.e., a solubility of less than 0.005 g per 100 ml of water at room temperature) and not to consume more than about 99%, preferably about 98%, more preferably about 97%, even more preferably about 96% of the azetidinium groups of the epichlorohydrin-functionalized polyamine or polyamidoamine.

[0106] In accordance with the invention, heating for forming a crosslinked hydrophilic coating is performed preferably by autoclaving a contact lens, preferably a SiHy contact lens that comprises a prime coating including nano-textures and is immersed in a packaging solution (i.e., a buffered aqueous solution) including a water-soluble thermally crosslinkable hydrophilic polymeric material in a sealed lens package at a temperature of from about 118°C to about 125°C for approximately 20-90 minutes. In accordance with this embodiment of the invention, the packaging solution is a buffered aqueous solution which is ophthalmically safe after autoclave. Alternatively, is performed preferably by autoclaving a SiHy contact lens, which comprises a base coating and a layer of a water-soluble thermally crosslinkable hydrophilic polymeric material on top of the base coating, immersed in a packaging solution (i.e., a buffered aqueous solution) in a sealed lens package at a temperature of from about 118°C to about 125°C for approximately 20-90 minutes.

[0107] Lens packages (or containers) are well known to a person skilled in the art for autoclaving and storing a soft contact lens. Any lens packages can be used in the invention. Preferably, a lens package is a blister package which comprises a base and a cover, wherein the cover is detachably sealed to the base, wherein the base includes a cavity for receiving a sterile packaging solution and the contact lens.

[0108] Lenses are packaged in individual packages, sealed, and sterilized (e.g., by autoclave at about 120°C or higher for at least 30 minutes) prior to dispensing to users. A person skilled in the art will understand well how to seal and sterilize lens packages.

[0109] In accordance with the invention, a packaging solution contains at least one buffering agent and one or more other ingredients known to a person skilled in the art. Examples of other ingredients include without limitation, tonicity agents, surfactants, antibacterial agents, preservatives, and lubricants (or water-soluble viscosity builders) (e.g., cellulose derivatives, polyvinyl alcohol, polyvinyl pyrrolidone).

[0110] The packaging solution contains a buffering agent in an amount sufficient to maintain a pH of the packaging solution in the desired range, for example, preferably in a physiologically acceptable range of about 6 to about 8.5. Any known, physiologically compatible buffering agents can be used. Suitable buffering agents as a constituent of the contact lens care composition according to the invention are known to the person skilled in the art. Examples are boric acid, borates, e.g. sodium borate, citric acid, citrates, e.g. potassium citrate, bicarbonates, e.g. sodium bicarbonate, TRIS (2-amino-2-hydroxymethyl-1,3-propanediol), Bis-Tris (Bis-(2-hydroxyethyl)-imino-tris-(hydroxymethyl)-methane), bis-aminopolyols, triethanolamine, ACES (N-(2-hydroxyethyl)-2-aminoethanesulfonic acid), BES (N,N-Bis(2-hydroxyethyl)-2-aminoethanesulfonic acid), HEPES (4-(2-hydroxyethyl)-1-piperazineethanesulfonic acid), MES (2-(N-morpholino)ethanesulfonic acid), MOPS (3-[N-morpholino]-propanesulfonic acid), PIPES (piperazine-N,N'-bis(2-ethanesulfonic acid), TES (N-[Tris(hydroxymethyl)methyl]-2-aminoethanesulfonic acid), salts thereof, phosphate buffers, e.g. Na_2HPO_4 , NaH_2PO_4 , and KH_2PO_4 or mixtures thereof. A preferred bis-aminopolyol is 1,3-bis(tris[hydroxymethyl]methylamino)propane (bis-TRIS-propane). The amount of each buffer agent in a packaging solution is preferably from 0.001 % to 2%, preferably from 0.01% to 1%; most preferably from about 0.05% to about 0.30% by weight.

[0111] The packaging solution has a tonicity of from about 200 to about 450 milliosmol (mOsm), preferably from about 250 to about 350 mOsm. The tonicity of a packaging solution can be adjusted by adding organic or inorganic substances which affect the tonicity. Suitable ocularly acceptable tonicity agents include, but are not limited to sodium chloride, potassium chloride, glycerol, propylene glycol, polyols, mannitols, sorbitol, xylitol and mixtures thereof.

[0112] A packaging solution of the invention has a viscosity of from about 1 centipoise to about 10 centipoises, preferably from about 1 centipoise to about 5 centipoises, more preferably from about 1.2 centipoises to about 2.5 centipoises, at 25°C.

[0113] In a preferred embodiment, the packaging solution comprises preferably from about 0.01 % to about 2%, more preferably from about 0.05% to about 1.5%, even more preferably from about 0.1% to about 1%, most preferably from about 0.2% to about 0.5%, by weight of a water-soluble and thermally-crosslinkable hydrophilic polymeric material of the invention.

[0114] A packaging solution of the invention can contain a viscosity-enhancing polymer, a surfactant, and/or other components known to a person skilled in the art.

[0115] It should be understood that although in this aspect of the invention various embodiments including preferred embodiments of the invention may be separately described above, they can be combined and/or used together in any desirable fashion to arrive at different embodiments of a silicone hydrogel contact lenses of the invention.

[0116] In another aspect, the invention provides a silicone hydrogel (SiHy) contact comprising a silicone hydrogel lens body and a non-silicone hydrogel coating thereon, wherein the coating comprises winkle surface patterns (nano-textures) having a roughness (i.e., an arithmetical mean roughness, R_a) of from about 5 nm to about 600 nm, preferably from about 10 nm to about 400 nm, even more preferably from about 15 nm to about 200 nm, even more preferably from about 20 nm to about 100 nm. In a preferred embodiment, a SiHy contact lens of the invention has at least one of

properties selected from the group consisting of (1) a surface hydrophilicity/wettability characterized by having an averaged water contact angle of preferably about 90 degrees or less, more preferably about 80 degrees or less, even more preferably about 70 degrees or less, most preferably about 60 degrees or less; (2) an oxygen transmissibility of at least about 50, preferably at least about 70, more preferably at least about 80, even more preferably at least about 90 barrers/mm; (3) an elastic modulus of about 1.5 MPa or less, preferably about 1.2 MPa or less, more preferably about 1.0 or less, even more preferably from about 0.3 MPa to about 1.0 MPa; (4) a water content of preferably from about 18% to about 70%, more preferably from about 20% to about 60% by weight when fully hydrated; and (5) combinations thereof. The water content of a silicone hydrogel contact lens can be measured according to Bulk Technique as disclosed in US 5,849,811.

[0117] It should be understood that although in this aspect of the invention various embodiments including preferred embodiments of the invention may be separately described above, they can be combined and/or used together in any desirable fashion to arrive at different embodiments of a silicone hydrogel contact lenses of the invention. All of the various embodiments described above for the previous aspect of the invention can be used alone or in combination in any desirable fashion in this aspect of the invention.

[0118] Although various embodiments of the invention have been described using specific terms, devices, and methods, such description is for illustrative purposes only. The words used are words of description rather than of limitation. It is to be understood that changes and variations may be made by those skilled in the art without departing from the spirit or scope of the present invention, which is set forth in the following claims. In addition, it should be understood that aspects of the various embodiments may be interchanged either in whole or in part or can be combined in any manner and/or used together. Therefore, the spirit and scope of the appended claims should not be limited to the description of the preferred versions contained therein.

Example 1

Oxygen Permeability Measurements

[0119] The apparent oxygen permeability of a lens and oxygen transmissibility of a lens material is determined according to a technique similar to the one described in U.S. Patent No. 5,760,100 and in an article by Winterton et al., (The Cornea: Transactions of the World Congress on the Cornea 111, H.D. Cavanagh Ed., Raven Press: New York 1988, pp273-280), both of which are herein incorporated by reference in their entireties. Oxygen fluxes (J) are measured at 34°C in a wet cell (i.e., gas streams are maintained at about 100% relative humidity) using a Dk1000 instrument (available from Applied Design and Development Co., Norcross, GA), or similar analytical instrument. An air stream, having a known percentage of oxygen (e.g., 21 %), is passed across one side of the lens at a rate of about 10 to 20 cm³ /min., while a nitrogen stream is passed on the opposite side of the lens at a rate of about 10 to 20 cm³ /min. A sample is equilibrated in a test media (i.e., saline or distilled water) at the prescribed test temperature for at least 30 minutes prior to measurement but not more than 45 minutes. Any test media used as the overlayer is equilibrated at the prescribed test temperature for at least 30 minutes prior to measurement but not more than 45 minutes. The stir motor's speed is set to 1200±50 rpm, corresponding to an indicated setting of 400±15 on the stepper motor controller. The barometric pressure surrounding the system, P_{measured}, is measured. The thickness (t) of the lens in the area being exposed for testing is determined by measuring about 10 locations with a Mitotoya micrometer VL-50, or similar instrument, and averaging the measurements. The oxygen concentration in the nitrogen stream (i.e., oxygen which diffuses through the lens) is measured using the DK1000 instrument. The apparent oxygen permeability of the lens material, Dk_{app}, is determined from the following formula:

$$Dk_{app} = Jt / (P_{oxygen})$$

where J=oxygen flux [microliters O₂ /cm² -minute]

$$P_{oxygen} = (P_{measured} - P_{water\ vapor}) = (\%O_2 \text{ in air stream}) [\text{mm Hg}] = \text{partial pressure of oxygen in the air stream}$$

P_{measured} = barometric pressure (mm Hg)

P_{water vapor} = 0 mm Hg at 34 °C (in a dry cell) (mm Hg)

P_{water vapor} = 40 mm Hg at 34 °C (in a wet cell) (mm Hg)

t = average thickness of the lens over the exposed test area (mm)

Dk_{app} is expressed in units of barrers.

[0120] The apparent oxygen transmissibility (Dk/t) of the material may be calculated by dividing the apparent oxygen permeability (Dk_{app}) by the average thickness (t) of the lens.

[0121] The above described measurements are not corrected for the so-called boundary layer effect which is attributable to the use of a water or saline bath on top of the contact lens during the oxygen flux measurement. The boundary layer effect causes the reported value for the apparent Dk of a silicone hydrogel material to be lower than the actual intrinsic Dk value. Further, the relative impact of the boundary layer effect is greater for thinner lenses than with thicker lenses. The net effect is that the reported Dk appear to change as a function of lens thickness when it should remain constant.

[0122] The intrinsic Dk value of a lens can be estimated based on a Dk value corrected for the surface resistance to oxygen flux caused by the boundary layer effect as follows.

[0123] Measure the apparent oxygen permeability values (single point) of the reference lotrafilcon A (Focus® N&D® from CIBA VISION CORPORATION) or lotrafilcon B (AirOptix™ from CIBA VISION CORPORATION) lenses using the same equipment. The reference lenses are of similar optical power as the test lenses and are measured concurrently with the test lenses.

[0124] Measure the oxygen flux through a thickness series of lotrafilcon A or lotrafilcon B (reference) lenses using the same equipment according to the procedure for apparent Dk measurements described above, to obtain the intrinsic Dk value (Dk_i) of the reference lens. A thickness series should cover a thickness range of approximately 100 μm or more. Preferably, the range of reference lens thicknesses will bracket the test lens thicknesses. The Dk_{app} of these reference lenses must be measured on the same equipment as the test lenses and should ideally be measured contemporaneously with the test lenses. The equipment setup and measurement parameters should be held constant throughout the experiment. The individual samples may be measured multiple times if desired.

[0125] Determine the residual oxygen resistance value, R_r , from the reference lens results using equation 1 in the calculations.

$$R_r = \frac{\sum \left(\frac{t}{Dk_{app}} - \frac{t}{Dk_i} \right)}{n} \quad (1)$$

in which t is the thickness of the test lens (i.e., the reference lens too), and n is the number of the reference lenses measured. Plot the residual oxygen resistance value, R_r vs. t data and fit a curve of the form $Y = a + bX$ where, for the j th lens, $Y_j = (\Delta P / J)_j$ and $X = t_j$. The residual oxygen resistance, R_r is equal to a .

[0126] Use the residual oxygen resistance value determined above to calculate the correct oxygen permeability Dk_c (estimated intrinsic Dk) for the test lenses based on Equation 2.

$$Dk_c = t / [(t / Dk_a) - R_r] \quad (2)$$

[0127] The estimated intrinsic Dk of the test lens can be used to calculate what the apparent Dk (Dk_{a_std}) would have been for a standard thickness lens in the same test environment based on Equation 3. The standard thickness (t_{std}) for lotrafilcon A = 85 μm . The standard thickness for lotrafilcon B = 60 μm .

$$Dk_{a_std} = t_{std} / [(t_{std} / Dk_c) + R_{r_std}] \quad (3)$$

[0128] Surface hydrophilicity/wettability Tests. Water contact angle on a contact lens is a general measure of the surface hydrophilicity (or wettability) of the contact lens. In particular, a low water contact angle corresponds to more hydrophilic surface. Average contact angles (Sessile Drop) of contact lenses are measured using a VCA 2500 XE contact angle measurement device from AST, Inc., located in Boston, Massachusetts. This equipment is capable of measuring advancing or receding contact angles or sessile (static) contact angles. The measurements are performed on fully hydrated contact lenses and immediately after blot-drying as follows. A contact lens is removed from the vial and washed 3 times in ~200ml of fresh DI water in order to remove loosely bound packaging additives from the lens surface. The lens is then placed on top of a lint-free clean cloth (Alpha Wipe TX1009), dabbed well to remove surface water, mounted on the contact angle measurement pedestal, blown dry with a blast of dry air and finally the sessile drop contact angle

is automatically measured using the software provided by the manufacturer. The DI water used for measuring the contact angle has a resistivity $> 18\text{M}\Omega\text{cm}$ and the droplet volume used is $2\mu\text{l}$. Typically, uncoated silicone hydrogel lenses (after autoclave) have a sessile drop contact angle around 120 degrees. The tweezers and the pedestal are washed well with Isopropanol and rinsed with DI water before coming in contact with the contact lenses.

[0129] Coating Intactness Tests. The intactness of a coating on the surface of a contact lens can be tested according to Sudan Black stain test as follow. Contact lenses with a coating (an LbL coating, a plasma coating, or any other coatings) are dipped into a Sudan Black dye solution (Sudan Black in vitamin E oil) and then rinsed extensively in water. Sudan Black dye is hydrophobic and has a great tendency to be adsorbed by a hydrophobic material or onto a hydrophobic lens surface or hydrophobic spots on a partially coated surface of a hydrophobic lens (e.g., silicone hydrogel contact lens). If the coating on a hydrophobic lens is intact, no staining spots should be observed on or in the lens. All of the lenses under test are fully hydrated.

[0130] Tests of coating durability. The lenses are digitally rubbed with Solo-care® multi-purpose lens care solution for 30 times and then rinsed with saline: The above procedure is repeated for a given times, e.g., from 1 to 30 times, (i.e., number of consecutive digital rubbing tests which imitate cleaning and soaking cycles). The lenses are then subjected to Sudan Black test (i.e., coating intactness test described above) to examine whether the coating is still intact. To survive digital rubbing test, there is no significantly increased staining spots (e.g., staining spots covering no more than about 5% of the total lens surface). Water contact angles are measured to determine the coating durability.

[0131] Determination of azetidinium content. The azetidinium content in PAE can be determined according to one of the following assays.

[0132] PPVS assays. PAE charge density (i.e., azetidinium content) can be determined according to PPVS assay, a colorimetric titration assay where the titrant is potassium vinyl sulfate (PPVS) and Toluidine Blue is the indicator. See, S-K Kam and J. Gregory, "Charge determination of synthetic cationic polyelectrolytes by colloid titration," in *Colloid & Surface A: Physicochem. Eng. Aspect*, 159: 165-179 (1999). PPVS binds positively-charged species e.g., Toluidine Blue and the azetidinium groups of PAE. Decreases in Toluidine Blue absorbance intensities are indicative of proportionate PAE charge density (azetidinium content).

[0133] PES-Na Assay. PES-Na assay is another colorimetric titration assay for determining PAE charge density (azetidinium content). In this assay, the titrant is Sodium-polyethylsulphonate (PES-Na) instead of PPVS. The assay is identical to the PPVS assay described above.

[0134] PCD assays. PCD assay is a potentiometric titration assay for determining PAE charge density (azetidinium content). The titrant is Sodium-polyethylsulphonate (PES-Na), PPVS or other titrant. PAE charge is detected by an electrode, for example using the Mutek PCD-04 Particle Charge Detector from BTG. The measuring principle of this detector can be found in BTG's website <http://www.btg.com/products.asp?language=1&app-li=5&numProd=357&cat=prod>.

[0135] NMR method. The active positively charged moiety in PAE is the azetidinium group (AZR). The NMR ratio method is a ratio of the number of AZR group-specific protons versus the number of non-AZR related protons. This ratio is an indicator of the charge or AZR density for PAE.

Characterization of the Nano-textured Surfaces of Contact Lens

[0136] Transmission-Differential-Interference-Contrast (TDIC) Method. Contact lenses are placed on a glass slide and flattened by compressing the lens between the slide and a glass cover slip. Contact lens surfaces are located and examined by focusing through the lens using a Nikon ME600 microscope with transmission differential interference contrast optics using a 40x objective lens. The obtained TDIC images are then evaluated to determine the presence of wrinkled surface patterns as shown in Figure 1.

[0137] Reflection-Differential-Interference-Contrast (RDIC) Method. Lenses are placed on a glass slide and flattened by making 4 radial cuts every ~ 90 degrees. Excess saline is blown off the surface using compressed air. Lens surface is then examined using Nikon Optiphot-2 with reflection differential interference contrast optics for the presence of wrinkled surface patterns on the surfaces of a contact lens using 10x, 20x and 50x objective lenses. A representative image of each side is acquired using 50x objective lens. The contact lens is then flipped over, excess saline removed and the other side of the contact lens and is inspected in the same way. The obtained RDIC images are then evaluated to determine the presence of wrinkled surface patterns as shown in Figure 2.

[0138] Dark Field Light Microscopy (DFLM). DFLM is generally based on dark field illumination which is a method of enhancing contrast in observed samples. This technique consists of a light source outside or blocked from the observer's field of view in order to illuminate a sample at an angle relative to normal transmitted light. Since the un-scattered light from the source is not gathered by the objective lens, it is not part of the image and the background of the image appears dark. Since the light source is illuminating the sample at an angle, the light observed in the sample image is that which is scattered by the sample toward the observer, contrast is then created between this scattered light from the sample and the dark background of the image. This contrast mechanism makes dark illumination especially useful for the observation

of scattered phenomena such as haze.

[0139] DFLM is used to evaluate the haziness of contact lenses as follows. It is believed that since the dark-field setup involves scattered light, dark-field data could provide the worst-case estimate of haziness. In 8-bit grey scale digital images each image pixel is assigned a grey scale intensity (GSI) value in the range from 0-255. Zero represents a pixel that is perfectly black and 255 represents a pixel that is perfectly white. An increase in the scattered light captured in the image will produce pixels with higher GSI values. This GSI value can then be used as a mechanism to quantify the amount of scattered light observed in a dark field image. The haziness is expressed by averaging the GSI values of all pixels in an area of interest (AOI) (e.g., a whole lens or the lenticular zone or optical zone of a lens). The experimental set-up consists of a microscope or equivalent optics, an attached digital camera and a dark field stand with ring light and variable intensity light source. Optics is designed/arranged so that the entirety of the contact lens to be observed fills the field of view (typically ~15mmx20mm field of view). Illumination is set to a level appropriate to observe the desired changes in the relevant samples. Light intensity is adjusted /calibrated to the same level for each set of samples using a density/light scattering standard as known to a person skilled in the art. For example, a standard is composed of two overlapping plastic cover slips (identical and slight or moderately frosted). Such standard consists of areas with three different averaged GSI that include two areas with intermediate grey scale levels and saturated white (edges). The black areas represent the empty dark field. The black and saturated white areas can be used to verify gain and offset (contrast and brightness) settings of camera. The intermediate grey levels can provide three points to verify the linear response of the camera. Light intensity is adjusted so that the average GSI of the empty dark field approaches 0 and that of a defined AOI in a digital image of the standard is the same each time within ± 5 GSI units. After light intensity calibration, a contact lens is immersed in 0.2 μ m-filtered phosphate buffer saline in a quartz Petri dish or a dish or similar clarity which is placed on the DFLM stand. An 8-bit grey scale digital image of the lens is then acquired as viewed using the calibrated illumination and the average GSI of a defined AOI within the portion of the image containing the lens is determined. This is repeated for a sample set of contact lenses. Light intensity calibration is re-evaluated periodically over the course of a test to ensure consistency.

[0140] The level of haziness under DFLM examination refers to a DFLM haziness $\frac{\text{GSI}}{255} \times 100\%$.

Example 2

Preparation of Chain-Extended Polydimethylsiloxane Vinyllic Macromer with Terminal Methacrylate Groups (CE-PDMS Macromer)

[0141] In the first step, α,ω -bis(2-hydroxyethoxypropyl)-polydimethylsiloxane ($M_n = 2000$, Shin-Etsu, KF-6001a) is capped with isophorone diisocyanate (IPDI) by reacting 49.85 g of α,ω -bis(2-hydroxyethoxypropyl)-polydimethylsiloxane with 11.1 g IPDI in 150 g of dry methyl ethyl ketone (MEK) in the presence of 0.063g of dibutyltindilaurate (DBTDL). The reaction is kept for 4.5 h at 40° C, forming IPDI-PDMS-IPDI. In the second step, a mixture of 164.8 g of α,ω -bis(2-hydroxyethoxypropyl)-polydimethylsiloxane ($M_n = 3000$, Shin-Etsu, KF-6002) and 50 g of dry MEK are added dropwise to the IPDI-PDMS-IPDI solution to which has been added an additional 0.063 g of DBTDL. The reactor is held for 4.5 h at about 40° C, forming HO-PDMS-IPDI-PDMS-IPDI-PDMS-OH. MEK is then removed under reduced pressure. In the third step, the terminal hydroxyl-groups are capped with methacryloyloxyethyl groups in a third step by addition of 7.77 g of isocyanatoethylmethacrylate (IEM) and an additional 0.063 g of DBTDL, forming IEM-PDMS-IPDI-PDMS-IPDI-PDMS-IEM.

Alternate Preparation of CE-PDMS Macromer with Terminal Methacrylate Groups

[0142] 240.43 g of KF-6001 is added into a 1-L reactor equipped with stirring, thermometer, cryostat, dropping funnel, and nitrogen/vacuum inlet adapter, and then dried by application of high vacuum (2×10^{-2} mBar). Then, under an atmosphere of dry nitrogen, 320 g of distilled MEK is then added into the reactor and the mixture is stirred thoroughly. 0.235 g of DBTDL is added to the reactor. After the reactor is warmed to 45°C, 45.86 g of IPDI are added through an addition funnel over 10 minutes to the reactor under moderate stirring. The reaction is kept for 2 hours at 60°C. 630 g of KF-6002 dissolved in 452 g of distilled MEK are then added and stirred until a homogeneous solution is formed. 0.235 g of DBTDL are added, and the reactor is held at about 55°C overnight under a blanket of dry nitrogen. The next day, MEK is removed by flash distillation. The reactor is cooled and 22.7 g of IEM are then charged to the reactor followed by about 0.235 g of DBTDL. After about 3 hours, an additional 3.3 g of IEM are added and the reaction is allowed to proceed overnight. The following day, the reaction mixture is cooled to about 18°C to obtain CE-PDMS macromer with terminal methacrylate groups.

Example 3**Preparation of Lens Formulations**

[0143] Formulation I is prepared by dissolving components in 1-propanol to have the following composition: 33% by weight of CE-PDMS macromer prepared in Example 2, 17% by weight of N-[tris(trimethylsiloxy)-silylpropyl]acrylamide (TRIS-Am), 24% by weight of N,N-dimethylacrylamide (DMA), 0.5% by weight of N-(carbonyl-methoxypolyethylene glycol-2000)-1,2-distearoyl-sn-glycero-3-phosphoethanolamin, sodium salt) (L-PEG), 1.0% by weight Darocur 1173 (DC1173), 0.1% by weight of visitint (5% copper phthalocyanine blue pigment dispersion in tris(trimethylsiloxy)silylpropylmethacrylate, TRIS), and 24.5% by weight of 1-propanol.

[0144] Formulation II is prepared by dissolving components in 1-propanol to have the following composition: about 32% by weight of CE-PDMS macromer prepared in Example 2, about 21 % by weight of TRIS-Am, about 23% by weight of DMA, about 0.6% by weight of L-PEG, about 1% by weight of DC1173, about 0.1% by weight of visitint (5% copper phthalocyanine blue pigment dispersion in TRIS), about 0.8% by weight of DMPC, about 200 ppm H-tempo, and about 22% by weight of 1-propanol.

Preparation of Lenses

[0145] Lenses are prepared by cast-molding from a lens formulation prepared above in a reusable mold (quartz female mold half and glass male mold half), similar to the mold shown in Figs. 1-6 in U.S. patent Nos. 7,384,590 and 7,387,759 (Figs. 1-6). The UV irradiation source is a Hamamatsu lamp with the WG335 + TM297 cut off filter at an intensity of about 4 mW./cm². The lens formulation in the mold is irradiated with UV irradiation for about 25 seconds. Cast-molded lenses are extracted with methyl ethyl ketone (MEK) (or propanol or isopropanol).

Application of PAA Prime Coating onto SiHy Contact lenses

[0146] A polyacrylic acid coating solution (PAA-1) is prepared by dissolving an amount of PAA (M.W.: 450kDa, from Lubrizol) in a given volume of 1-propanol to have a concentration of about 0.1 % by weight and the pH is adjusted with formic acid to about 2.5.

[0147] Another PAA coating solution (PAA-2) is prepared by dissolving an amount of PAA (M.W.: 450kDa, from Lubrizol) in a given volume of an organic-based solvent (50/50 1-propanol/H₂O) to have a concentration of about 0.1% by weight and the pH is adjusted with formic acid to about 2.5.

[0148] Above-obtained SiHy contact lenses are subjected to one of dipping processes shown in Tables 1 and 2.

Table 1

Baths	Time	Dipping Process					
		20-0	20-1	20-2	20-3	20-4	20-5
1	56s	H ₂ O	H ₂ O	H ₂ O	H ₂ O	H ₂ O	H ₂ O
2	44s	MEK	MEK	MEK	MEK	MEK	MEK
3	56s	MEK	MEK	MEK	MEK	MEK	MEK
4	56s	MEK	MEK	MEK	MEK	MEK	MEK
5	56s	MEK	MEK	MEK	MEK	MEK	MEK
6	56s	MEK	MEK	MEK	MEK	MEK	MEK
7	56s	MEK	MEK	MEK	MEK	MEK	MEK
8	56s	H ₂ O	H ₂ O	H ₂ O	H ₂ O	H ₂ O	H ₂ O
9	44s	PAA-1	PAA-1	PAA-1	PAA-2	PAA-2	PAA-1
10	56s	PAA-1	PAA-1	PAA-1	PAA-2	PAA-2	PAA-1
11	56s	H ₂ O	PrOH	H ₂ O	H ₂ O	H ₂ O	H ₂ O
12	44s	H ₂ O	PrOH	PrOH	PrOH	50/50	50/50
13	56s	H ₂ O	H ₂ O	H ₂ O	H ₂ O	H ₂ O	H ₂ O

EP 2 718 751 B1

(continued)

Baths	Time	Dipping Process					
		20-0	20-1	20-2	20-3	20-4	20-5
14	56s	H2O	H2O	H2O	H2O	H2O	H2O
15	56s	PBS	PBS	PBS	PBS	PBS	PBS
16	56s	H2O	H2O	H2O	H2O	H2O	H2O
PrOH represents 100% 1-propanol; PBS stands for phosphate-buffered saline; MEK stands for methyl ethyl keton; 50/50 stands a solvent mixture of 50/50 1-PrOH/H ₂ O.							

Table 2

Baths	Time	Dipping Process						
		80-0	80-1	80-2	80-3	80-4	80-5	80-6
1	56s	H2O	H2O	H2O	H2O	H2O	H2O	H2O
2	44s	MEK	MEK	MEK	MEK	MEK	MEK	MEK
3	56s	MEK	MEK	MEK	MEK	MEK	MEK	MEK
4	56s	MEK	MEK	MEK	MEK	MEK	MEK	MEK
5	56s	MEK	MEK	MEK	MEK	MEK	MEK	MEK
6	56s	MEK	MEK	MEK	MEK	MEK	MEK	MEK
7	56s	MEK	MEK	MEK	MEK	MEK	MEK	MEK
8	56s	H2O	H2O	H2O	H2O	H2O	H2O	H2O
9	44s	PAA-1	PAA-1	PAA-1	PAA-1	PAA-1	PAA-1	PAA-1
10	56s	PAA-1	50/50	PrOH	50/50	PrOH	PrOH	H2O
11	56s	H2O	H2O	H2O	50/50	PrOH	50/50	50/50
12	44s	H2O	H2O	H2O	H2O	H2O	H2O	H2O
13	56s	H2O	H2O	H2O	H2O	H2O	H2O	H2O
14	56s	H2O	H2O	H2O	H2O	H2O	H2O	H2O
15	56s	PBS	PBS	PBS	PBS	PBS	PBS	PBS
16	56s	H2O	H2O	H2O	H2O	H2O	H2O	H2O
PrOH represents 100% 1-propanol; PBS stands for phosphate-buffered saline; MEK stands for methyl ethyl keton; 50/50 stands a solvent mixture of 50/50 1-PrOH/H ₂ O.								

Application of Crosslinked Hydrophilic Coating

[0149] Poly(acrylamide-co-acrylic acid) partial sodium salt, Poly(AAm-co-AA)(90/10) (~90% solid content, poly(AAm-co-AA) 90/10, Mw 200,000) is purchased from Polysciences, Inc. and used as received. PAE (Kymene, an azetidinium content of 0.46 assayed with NMR) is purchased from Ashland as an aqueous solution and used as received. An in-package-crosslinking (IPC) saline is prepared by dissolving about 0.07% w/w of poly(AAm-co-AA)(90/10) and about 0.15% of PAE (an initial azetidinium millimolar equivalents of about 8.8 millimole) in phosphate buffered saline (PBS) (about 0.044 w/w% NaH₂PO₄·H₂O, about 0.388 w/w% Na₂HPO₄·2H₂O, about 0.79 w/w% NaCl) and adjusting the pH to 7.2~7.4. Then the IPC saline is heat pre-treated for about 4 hours at about 70°C (heat pretreatment). During this heat pretreatment, poly(AAm-co-AA) and PAE are partially crosslinked to each other (i.e., not consuming all azetidinium groups of PAE) to form a water-soluble and thermally-crosslinkable hydrophilic polymeric material containing azetidinium groups within the branched polymer network in the IPC saline. After the heat pre-treatment, the IPC saline is filtered using a 0.22micron polyether sulphone [PES] membrane filter and cooled down back to room temperature: 10 ppm

hydrogen peroxide is then added to the final IPC saline to prevent bioburden growth and the IPC saline is filtered using a 0.22micron polyether sulphone [PES] membrane filter.

[0150] Lenses having a PAA prime coating thereon prepared above are placed in polypropylene lens packaging shells (one lens per shell) with 0.6 mL of the IPC saline (half of the saline is added prior to inserting the lens). The blisters are then sealed with foil and autoclaved for about 30 minutes at about 121°C, forming SiHy contact lenses with crosslinked hydrophilic coatings thereon.

Characterization of SiHy lenses.

[0151] The resultant SiHy contact lens with crosslinked hydrophilic coatings thereon and a center thickness of about 0.95 microns have an oxygen permeability (Dk_c or estimated intrinsic Dk) of about 142 to about 150 barrers, a bulk elastic modulus of about 0.72 to about 0.79 MPa, a water content of about 30% to about 33% by weight, a relative ion permeability of about 6 (relative to Alsacon lens), and a contact angle of from about 34 to about 47 degrees.

[0152] SiHy contact lenses, the PAA prime coating of which is obtained according to either of the dipping processes 20-0 and 80-0, are determined to have an averaged DFLM haziness of about 73% and show wrinkle surface patterns (Figures 1B and 2B) that can be visually observed by examining the contact lens in hydrated state, according to the method of either RDIC or TDIC as described in Example 1.

[0153] SiHy contact lenses, the PAA prime coating of which is obtained according to either of the dipping processes 20-1 to 20-4, are determined to have a low averaged DFLM haziness of about 26% (probably due to the presence of vitifint pigment particles) and show no noticeable wrinkle surface patterns (Figures 1A and 2A) when examined under either RDIC or TDIC as described in Example 1.


[0154] A high percentage of SiHy contact lenses, the PAA prime coating of which is obtained according to either of the dipping process 20-5, are determined to have a moderate averaged DFLM haziness of about 45% and show slightly noticeable wrinkle surface patterns when examined under either RDIC or TDIC as described in Example 1.

[0155] SiHy contact lenses, the PAA prime coating of which is obtained according to either of the dipping processes 80-1, 80-2, 80-3, 80-5 and 80-6, do not show noticeable wrinkle surface patterns when examined under either RDIC or TDIC as described in Example 1. But, SiHy contact lenses, the PAA prime coating of which is obtained according to either of the dipping processes 80-0 and 80-4, show noticeable wrinkle surface patterns when examined under either RDIC or TDIC as described in Example 1.

Example 4

Fluorescein tagged PAA (PAA-F).

[0156] PAA-F is synthesized in-house by covalently attaching 5-aminofluorescein to PAA (Mw 450k). The labeling degree of fluorescein is a few %, for example, about 2 mole% (or $n/(m+n)=2\%$ in the formula shown below)



Fluorescein tagged PAA (PAA-F)

X: Fluorescein moiety

Preparation of Lenses.

[0157] Lenses are prepared by cast-molding from the lens formulation prepared above in Example 3 in a reusable mold (quartz female mold half and glass male mold half), similar to the mold shown in Figs. 1-6 in U.S. patent Nos. 7,384,590 and 7,387,759 (Figs. 1-6). The lens formulation in the molds is irradiated with UV irradiation (13.0 mW/cm²) for about 24 seconds.

PAA-F coating solution.

[0158] A PAA-F coating solution is prepared by dissolving an amount of PAA-F prepared above in a given volume of 1-PrOH/water (95/5) solvent mixture to have a concentration of about 0.036% by weight and the pH is adjusted with formic acid to about 2.5. 5% water is used in order to dissolve PAA-F.

PAA-coated lenses.

[0159] Cast-molded contact lenses are extracted and coated by dipping in the following series of baths: DI water bath (about 56 seconds); 6 MEK baths (about 44, 56, 56, 56, 56, and 56 second respectively); DI water bath (about 56 seconds); one bath of PAA-F coating solution (about 0.036% by weight, acidified with formic acid to about pH 2.5) in 1-PrOH/water (95/5) solvent mixture (about 44 seconds); one bath of a water/1-propanol 50%/50% mixture (about 56 seconds); 4 DI water baths each for about 56 seconds; one PBS bath for about 56 seconds; and one DI water bath for about 56 seconds.

Application of crosslinked hydrophilic coating.

[0160] Lenses having a PAA-LbL base coating thereon prepared above are placed in polypropylene lens packaging shells (one lens per shell) with 0.6 mL of the IPC saline prepared according to the procedures described in Example 3 (half of the saline is added prior to inserting the lens). The blisters are then sealed with foil and autoclaved for about 30 minutes at about 121°C, forming SiHy contact lenses with crosslinked coatings (PAA-x-hydrophilic polymeric material) thereon.

Con-focal laser fluorescent microscopy.

[0161] A cross section of a hydrated SiHy lens with crosslinked coating (prepared above) is cut and placed between two glass cover slips and the image is collected on a con-focal laser fluorescent microscope (model # Zeiss LSM 510 Vis). It is scanned from the front curve side of the lens to the base curve side of the lens, or vice versa. The presence of PAA-F is shown by the green fluorescence and con-focal laser fluorescence microscopic images can be obtained. The examination of the con-focal laser fluorescence microscopic images reveals that the PAA-F rich layer is present on both lens surfaces (anterior and posterior surfaces) and at the peripheral edge, while no PAA-F is observed in the bulk material of the hydrated lens.

[0162] The fluorescence intensity profiles are examined across the lens cross section along a line passing through both the posterior and anterior surfaces and normal to the posterior surface. Figure 3 shows two representative the fluorescence intensity profiles along two lines across the lens cross section, one at the point where the lens thickness is about 100 μm (panel A) and the other at the point where the lens thickness is about 200 μm (panel B). The original points in Figure 3 are the center points between the anterior and posterior surfaces along the lines. It can be noticed in Figure 3 that there is a PAA-F-rich layer near the outermost surfaces of the SiHy lens with crosslinked coating, no PAA-F is present at the bulk of the lens, and the coating thickness is similar on these two cross-sections regardless the thickness of the cross-sections.

[0163] The thickness of the PAA-F rich layer is estimated from the fluorescence intensity profile shown in Figure 3 by the distance from zero intensity, after crossing the peak intensity, to zero intensity again. Considering that there are possible contribution from unknown factors (such as scattering) to the fluorescence intensity, the minimum layer thickness is the thickness for which a florescent intensity of at least 10% of the maximum peak intensity is retained. Based on such estimation, the minimum PAA-F-rich layer thickness could be at least about 5 microns.

Claims

1. A method for making contact lenses, preferably silicone hydrogel contact lenses, having nano-textured surfaces, comprising the steps of:

(1) providing an organic-based coating solution including an organic-based solvent and a polymeric coating material dissolved in the organic-based solvent, wherein the polymeric coating material comprises multiple first reactive functional groups and multiple affinity groups or moieties;

(2) contacting a contact lens with the organic-based coating solution to swell the contact lens and form an intermediary coating of the polymeric coating material on the contact lens, wherein the contact lens comprises, at and near the surface of the contact lens, monomeric units and/or hydrophobic moieties and/or segments capable of interacting with the affinity groups or moieties of the polymeric coating material so as to bind the polymeric coating material, wherein the average molecular weight of the polymeric coating material is selected to be sufficient high to ensure that the polymeric coating material partially penetrate into the contact lens swollen by the organic-based solvent (and is preferably at least about 25,000 Daltons, more preferably at least about 50,000 Daltons, even more preferably at least about 75,000 Daltons, most preferably from about 100,000 to 1,000,000 Daltons);

(3) contacting the swollen contact lens having the intermediary coating thereon with an aqueous solution or preferably water to shrink the contact lens having the intermediary coating thereon to form a prime coating having nano-textures on the contact lens; and

(4) fixing the nano-textures in the prime coating by crosslinking a water-soluble and crosslinkable hydrophilic polymeric material with multiple second functional reactive functional groups onto the prime coating through the first reactive functional groups to form a crosslinked polymeric coating that preserves the nano-textures of the prime coating and provides a nano-textured surface to the contact lens, wherein one first reactive functional reactive group can react with one second reactive functional group in the presence or absence of a coupling agent to form one crosslinkage between the polymeric coating material and the water-soluble and crosslinkable hydrophilic polymeric material.

2. The method of claim 1, wherein the organic-based solvent is a solvent system which consists of one or more organic solvents and optionally about 30% or less, preferably about 20% or less, more preferably about 15% or less, even more preferably about 10% or less, in particular about 5% or less by weight of water relative to the weight of the solvent system, wherein the one or more organic solvents are selected from the group consisting of tripropylene glycol methyl ether, dipropylene glycol methyl ether, ethylene glycol n-butyl ether, acetone, methyl ethyl ketone, diethylene glycol n-butyl ether, diethylene glycol methyl ether, ethylene glycol phenyl ether, propylene glycol methyl ether, propylene glycol methyl ether acetate, dipropylene glycol methyl ether acetate, propylene glycol n-propyl ether, dipropylene glycol n-propyl ether, tripropylene glycol n-butyl ether, propylene glycol n-butyl ether, dipropylene glycol n-butyl ether, tripropylene glycol n-butyl ether, propylene glycol phenyl ether dipropylene glycol dimethyl ether, polyethylene glycols, polypropylene glycols, ethyl acetate, butyl acetate, amyl acetate, methyl lactate, ethyl lactate, i-propyl lactate, a C₁-C₁₂ alcohol, 1-methyl-2-pyrrolidone, N,N-dimethylpropionamide, dimethyl formamide, dimethyl acetamide, dimethyl propionamide, N-methyl pyrrolidinone, 1,2-propylene glycol, polyethyleneglycol having a molecular weight of about 200 or less, tetrahydrofuran, methylene chloride, and combinations thereof.

3. The method of claim 1 or 2, wherein the contact lens is swollen by the organic-based coating solution by at least about 50%, preferably at least about 75%, more preferably at least about 100%, even more preferably at least about 150%.

4. The method of claim 1, 2 or 3, wherein the first multiple reactive functional groups are selected from the group consisting of carboxyl groups, azetidinium group, amino groups, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, thiol groups, hydroxyl groups, and combinations thereof, more preferably selected from the group consisting of carboxyl groups, azetidinium groups, amino groups, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, thiol groups, and combinations thereof, even more preferably selected from the group consisting of carboxyl groups, azetidinium group, amino groups, epoxy groups, thiol groups, and combinations thereof, most preferably selected from the group consisting of carboxyl groups, azetidinium group, amino groups, epoxy groups, thiol groups, and combinations thereof; wherein the affinity groups or moieties are either identical to or different from the first reactive functional groups and are selected from the group consisting of carboxyl groups, ammonium groups, hydrophobic moieties, hydrophobic segments, and combinations thereof, preferably selected from the group consisting of carboxyl groups, ammonium groups, and combination thereof.

5. The method of any one of claims 1 to 4, wherein the polymeric coating material is: (1) a homopolymer of an ammonium-containing vinylic monomer or a carboxyl-containing vinylic monomer; (2) a copolymer of one or more ammonium-containing and/or carboxyl-containing vinylic monomers; (3) a copolymer of one or more ammonium-containing and/or carboxyl-containing vinylic monomers with a non-reactive vinylic monomer selected from the group consisting of (meth)acrylamide, N,N-dimethyl (meth)acrylamide, N-vinylpyrrolidone (NVP), N,N-dimethylaminoethyl (meth)acrylate, N,N-dimethylaminopropyl (meth)acrylamide, glycerol methacrylate, 3-acryloylamino-1-propanol, N-hydroxyethyl acrylamide, N-[tris(hydroxymethyl)methyl]-acrylamide, N-methyl-3-methylene-2-pyrrolidone, 1-ethyl-3-methylene-2-pyrrolidone, 1-methyl-5-methylene-2-pyrrolidone, 1-ethyl-5-methylene-2-pyrrolidone, 5-methyl-3-methylene-2-pyrrolidone, 5-ethyl-3-methylene-2-pyrrolidone, 2-hydroxyethyl (meth)acrylate, hydroxypropyl (meth)acrylate, C₁-C₄-alkoxy polyethylene glycol (meth)acrylate having a weight average molecular weight of up to 1500 Daltons, N-vinyl formamide, N-vinyl acetamide, N-vinyl isopropylamide, N-vinyl-N-methyl acetamide, allyl alcohol, vinyl alcohol (hydrolyzed form of vinyl acetate in the copolymer), a phosphorylcholine-containing vinylic monomer, and combinations thereof and optionally with one or more reactive vinylic monomer having a reactive functional group selected from the group consisting of azetidinium group, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, and combinations thereof; (4) polyethyleneimine (PEI); (5) polyvinylalcohol with pendant primary and/or secondary amino groups; (6) a block copolymer including at least one hydrophobic segments (preferably selected from the group consisting of polydimethylsiloxane, poly(propylene oxide), poly(butylene oxide), a polymer chain or

segment consisting essentially of at least one of silicone-containing vinylic monomer(s), C₈-C₁₆ alkyl (meth)acrylate, C₈-C₁₆ alkyl (meth)acrylamide, and combinations thereof) and polymeric segments having reactive functional groups selected from the group consisting of azetidinium group, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, thiol groups, and combinations thereof; or (7) a combination thereof.

6. The method of any one of claims 1 to 5, wherein the polymeric coating material is a polymer or copolymer comprising at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of monomeric units of one or more carboxyl-containing vinylic monomers, wherein the one or more carboxyl-containing vinylic monomers are selected from the group consisting of acrylic acid, a C₁-C₄ alkylacrylic acid (e.g., methacrylic acid, ethylacrylic acid, propylacrylic acid, butylacrylic acid), N,N-2-acrylamidoglycolic acid, beta methyl-acrylic acid (crotonic acid), alpha-phenyl acrylic acid, beta-acryloxy propionic acid, sorbic acid, angelic acid, cinnamic acid, 1-carboxy-4-phenyl butadiene-1,3, itaconic acid, citraconic acid, mesaconic acid, glutaconic acid, aconitic acid, maleic acid, fumaric acid, and combination thereof.
7. The method of claim 6, wherein the polymeric coating material is: a linear or branched polyacrylic acid; a linear or branched polymethacrylic acid; a linear or branched poly(acrylic acid-co-acrylamide) having at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of acrylic acid; a linear or branched poly(methacrylic acid-co-acrylamide) having at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of methacrylic acid; a linear or branched poly(acrylic acid-co-vinylpyrrolidone) having at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of acrylic acid; a linear or branched poly(methacrylic acid-co-vinylpyrrolidone) having at least about 70% by mole, preferably at least about 80% by mole, more preferably at least about 90% by mole, even more preferably at least about 95% by mole of methacrylic acid.
8. The method of any one of claims 1 to 7, wherein the contact lens is a silicone hydrogel contact lens obtained by polymerization of a lens formulation comprising at least one components selected from the group consisting of a silicone-containing vinylic monomer, a silicone-containing vinylic macromer, a silicone-containing prepolymer, a hydrophilic vinylic monomer, a hydrophobic vinylic monomer, a crosslinking agent, a free-radical initiator (photoinitiator or thermal initiator), a hydrophilic vinylic macromer/prepolymer, a UV-absorbing agent, a visibility tinting agent (e.g., dyes, pigments, or mixtures thereof), antimicrobial agents (e.g., preferably silver nanoparticles), a bioactive agent, a leachable lubricant, a leachable tear-stabilizing agent, and combination thereof.
9. The method of any one of claims 1 to 8, wherein the second reactive functional groups of a water-soluble and crosslinkable hydrophilic polymeric material are: carboxyl groups, azetidinium group, amino groups, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, hydroxyl groups, thiol groups, or combinations thereof; preferably carboxyl groups, azetidinium groups, amino groups, azlactone groups, isocyanate groups, epoxy groups, aziridine groups, thiol groups, or combinations thereof; more preferably carboxyl groups, azetidinium group, amino groups, epoxy groups, thiol groups, or combinations thereof; even more preferably azetidinium group, epoxy groups, or combinations thereof, provided that one second reactive functional group can react in a coupling reaction with one first reactive functional group of the polymeric coating material in the presence or preferably absence of a coupling agent to form a crosslinkage.
10. The method of any one of claims 1 to 9, wherein the second reactive functional groups are thermally-crosslinkable groups, more preferably azetidinium groups and/or epoxy groups, even more preferably azetidinium groups.
11. The method of any one of claims 1 to 10, wherein the water-soluble and crosslinkable hydrophilic polymeric material is a partially-crosslinked hydrophilic polymeric material that comprises a three-dimensional network and the second reactive functional groups within the network.
12. The method of any one of claims 1 to 11, wherein the water-soluble and crosslinkable hydrophilic polymeric material comprises: (i) from about 20% to about 95%, preferably from about 35% to about 90%, more preferably from about 50% to about 85%, by weight of first polymer chains derived from an epichlorohydrin-functionalized polyamine or polyamidoamine, (ii) from about 5% to about 80%, preferably from about 10% to about 65%, even more preferably from about 15% to about 50%, by weight of hydrophilic moieties or second polymer chains derived from at least one hydrophilicity-enhancing agent having at least one reactive functional group selected from the group consisting of amino group, carboxyl group, thiol group, and combination thereof, wherein the hydrophilic moieties or second polymer chains are covalently attached to the first polymer chains through one or more covalent linkages each

formed between one azetidinium group of the epichlorohydrin-functionalized polyamine or polyamidoamine and one amino, carboxyl or thiol group of the hydrophilicity-enhancing agent, and (iii) azetidinium groups which are parts of the first polymer chains or pendant or terminal groups covalently attached to the first polymer chains.

- 5 **13.** The method of claim 12, wherein the hydrophilicity-enhancing agent is: an amino-, carboxyl- or thiol-containing monosaccharide (e.g., 3-amino-1,2-propanediol, 1-thioglycerol, 5-keto-D-gluconic acid, galactosamine, glucosamine, galacturonic acid, gluconic acid, glucosaminic acid, mannosamine, saccharic acid 1,4-lactone, saccharide acid, Ketodeoxynonulosonic acid, *N*-methyl-D-glucamine, 1-amino-1-deoxy- β -D-galactose, 1-amino-1-deoxysorbitol, 1-methylamino-1-deoxysorbitol, *N*-aminoethyl gluconamide); an amino-, carboxyl- or thiol-containing disaccharide (e.g., chondroitin disaccharide sodium salt, di(β -D-xylopyranosyl)amine, digalacturonic acid, heparin disaccharide, hyaluronic acid disaccharide, Lactobionic acid); an amino-, carboxyl- or thiol-containing oligosaccharide (e.g., carboxymethyl- β -cyclodextrin sodium salt, trigalacturonic acid); or a combinations thereof.
- 10 **14.** The method of claim 12, wherein the hydrophilicity-enhancing agent is: carboxymethylcellulose having a carboxyl content of about 40% or less which is estimated based on the composition of repeating units, $[-C_6H_{10-m}O_5(CH_2CO_2H)_m]-$ in which *m* is 1 to 3); carboxyethylcellulose having a carboxyl content of about 36% or less which is estimated based on the composition of repeating units, $[-C_6H_{10-m}O_5(C_2H_4CO_2H)_m]-$ in which *m* is 1 to 3; carboxypropylcellulose having a carboxyl content of about 32% or less which is estimated based on the composition of repeating units, $[-C_6H_{10-m}O_5(C_3H_6CO_2H)_m]-$, in which *m* is 1 to 3; hyaluronic acid having a carboxyl content of about 11 % which is estimated based on the composition of repeating units, $-(C_{13}H_{20}O_9NCO_2H)-$; chondroitin sulfate having a carboxyl content of about 9.8% which is estimated based on the composition of repeating units, $-(C_{12}H_{18}O_{13}NS CO_2H)-$; or a combination thereof.
- 25 **15.** The method of claim 12, wherein the hydrophilicity-enhancing agent is: PEG-NH₂; PEG-SH; PEG-COOH; H₂N-PEG-NH₂; HOOC-PEG-COOH; HS-PEG-SH; H₂N-PEG-COOH; HOOC-PEG-SH; H₂N-PEG-SH; multi-arm PEG with one or more amino, carboxyl or thiol groups; PEG dendrimers with one or more amino, carboxyl or thiol groups; a monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated homo- or copolymer of a non-reactive hydrophilic vinyl monomer selected from the group consisting of acryamide (AAm), *N,N*-dimethylacrylamide (DMA), *N*-vinylpyrrolidone (NVP), *N*-vinyl-*N*-methyl acetamide, glycerol (meth)acrylate, hydroxyethyl (meth)acrylate, *N*-hydroxyethyl (meth)acrylamide, C₁-C₄-alkoxy polyethylene glycol (meth)acrylate having a weight average molecular weight of up to 400 Daltons, vinyl alcohol, *N*-methyl-3-methylene-2-pyrrolidone, 1-methyl-5-methylene-2-pyrrolidone, 5-methyl-3-methylene-2-pyrrolidone, *N,N*-dimethylaminoethyl (meth)acrylate, *N,N*-dimethylaminopropyl (meth)acrylamide, (meth)acryloyloxyethyl phosphorylcholine, and combinations thereof; a copolymer which is a polymerization product of a composition comprising (1) from about 0.1% to about 30%, preferably from about 0.5% to about 20%, more preferably from about 1 % to about 15%, by weight of (meth)acrylic acid, allylamine and/or amino-C₂-C₄ alkyl (meth)acrylate, and (2) at least one non-reactive hydrophilic vinyl monomer selected from the group consisting of acryamide, *N,N*-dimethylacrylamide, *N*-vinylpyrrolidone, (meth)acryloyloxyethyl phosphorylcholine, *N*-vinyl-*N*-methyl acetamide, glycerol (meth)acrylate, hydroxyethyl (meth)acrylate, *N*-hydroxyethyl (meth)acrylamide, C₁-C₄-alkoxy polyethylene glycol (meth)acrylate having a weight average molecular weight of up to 400 Daltons, vinyl alcohol, and a combination thereof; or a combination thereof.
- 45 **16.** The method of claim 12, wherein the hydrophilicity-enhancing agent is: PEG-NH₂; PEG-SH; PEG-COOH; monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated polyvinylpyrrolidone; monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated polyacrylamide; monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(DMA); monoamino- or monocarboxyl-, diamino- or dicarboxyl-terminated poly(DMA-co-NVP); monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(NVP-co-*N,N*-dimethylaminoethyl (meth)acrylate); monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(vinylalcohol); monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly[(meth)acryloyloxyethyl phosphorylcholine] homopolymer or copolymer; monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(NVP-co-vinyl alcohol); monoamino-, monocarboxyl-, diamino- or dicarboxyl-terminated poly(DMA-co-vinyl alcohol); poly[(meth)acrylic acid-co-acrylamide] with from about 0.1 % to about 30%, preferably from about 0.5% to about 20%, more preferably from about 1 % to about 15%, by weight of (meth)acrylic acid; poly[(meth)acrylic acid-co-NVP] with from about 0.1 % to about 30%, preferably from about 0.5% to about 20%, more preferably from about 1% to about 15%, by weight of (meth)acrylic acid; a copolymer which is a polymerization product of a composition comprising (1) (meth)acryloyloxyethyl phosphorylcholine and (2) from about 0.1% to about 30%, preferably from about 0.5% to about 20%, more preferably from about 1% to about 15%, by weight of (meth)acrylic acid, allylamine and/or amino-C₂-C₄alkyl (meth)acrylate; and combination thereof; or a combination thereof.

17. The method of any one of claims 1 to 16, wherein the step of fixing the nano-textures in the prime coating is performed by autoclaving the contact lens that comprises the prime coating including nano-textures and is immersed in a packaging solution including the water-soluble crosslinkable hydrophilic polymeric material in a sealed lens package at a temperature of from about 118°C to about 125°C for approximately 20-90 minutes, wherein the second reactive functional groups of the water-soluble crosslinkable hydrophilic polymeric material are azetidinium groups and/or epoxy groups.
18. A silicone hydrogel contact lens obtained according to a method of any one of claims 1 to 17, wherein the silicone hydrogel contact lens comprises a silicone hydrogel lens body and a non-silicone hydrogel coating thereon, wherein the coating comprises winkle surface patterns (nano-textures) having a roughness (i.e., an arithmetical mean roughness, Ra) of from about 5 nm to about 600 nm, preferably from about 10 nm to about 400 nm, even more preferably from about 15 nm to about 200 nm, even more preferably from about 20 nm to about 100 nm.
19. The silicone hydrogel contact lens of claim 18, wherein the silicone hydrogel contact lens has at least one of properties selected from the group consisting of (1) a surface hydrophilicity/wettability **characterized by** having an averaged water contact angle of preferably about 90 degrees or less, more preferably about 80 degrees or less, even more preferably about 70 degrees or less, most preferably about 60 degrees or less; (2) an oxygen transmissibility of at least about 50, preferably at least about 70, more preferably at least about 80, even more preferably at least about 90 barrers/mm; (3) an elastic modulus of about 1.5 MPa or less, preferably about 1.2 MPa or less, more preferably about 1.0 or less, even more preferably from about 0.3 MPa to about 1.0 MPa; (4) a water content of preferably from about 18% to about 70%, more preferably from about 20% to about 60% by weight when fully hydrated; and (5) combinations thereof.
20. The silicone hydrogel contact lens of claim 19, wherein the coating comprises worm-like patterns having a roughness (i.e., an arithmetical mean roughness, Ra) of from about 5 nm to about 600 nm, preferably from about 10 nm to about 400 nm, even more preferably from about 15 nm to about 200 nm, even more preferably from about 20 nm to about 100 nm.

Patentansprüche

1. Verfahren zur Herstellung von Kontaktlinsen, vorzugsweise Silikonhydrogelkontaktlinsen, mit nanotexturierten Oberflächen, umfassend die Schritte:

- (1) Bereitstellen einer Beschichtungslösung auf organischer Basis, umfassend ein Lösungsmittel auf organischer Basis und ein polymeres Beschichtungsmaterial, das in dem Lösungsmittel auf organischer Basis gelöst ist, worin das polymere Beschichtungsmaterial mehrere erste reaktive funktionelle Gruppen und mehrere Affinitätsgruppen oder -reste umfasst;
- (2) In-Kontakt-bringen einer Kontaktlinse mit der Beschichtungslösung auf organischer Basis, um die Kontaktlinse quellen zu lassen und eine Zwischenbeschichtung aus dem polymeren Beschichtungsmaterial auf der Kontaktlinse zu bilden, worin die Kontaktlinse an oder nahe der Oberfläche der Kontaktlinse monomere Einheiten und/oder hydrophobe Reste und/oder Segmente umfasst, die mit den Affinitätsgruppen oder -resten des polymeren Beschichtungsmaterials wechselwirken können, um das polymere Beschichtungsmaterial zu binden, worin das mittlere Molekulargewicht des polymeren Beschichtungsmaterials so ausgewählt wird, dass es ausreichend hoch ist, um sicherzustellen, dass das polymere Beschichtungsmaterial teilweise in die Kontaktlinse, die durch das Lösungsmittel auf organischer Basis aufgequollen wird, eindringt (und wobei es vorzugsweise mindestens etwa 25000 Dalton, mehr bevorzugt mindestens etwa 50000 Dalton, noch mehr bevorzugt mindestens etwa 75000 Dalton, am meisten bevorzugt von etwa 100000 bis 1000000 Dalton ist);
- (3) In-Kontakt-bringen der gequollenen Kontaktlinse mit der Zwischenbeschichtung darauf mit einer wässrigen Lösung oder vorzugsweise Wasser, um die Kontaktlinse mit der Zwischenbeschichtung darauf einzuschrumpfen, um eine erste Beschichtung mit Nanotexturen auf der Kontaktlinse zu bilden; und
- (4) Fixieren der Nanotexturen in der ersten Beschichtung durch Quervernetzen eines wasserlöslichen und quervernetzbaaren hydrophilen polymeren Materials mit mehreren zweiten funktionellen reaktiven funktionellen Gruppen auf der ersten Beschichtung durch die ersten reaktiven funktionellen Gruppen, um eine quervernetzte polymere Beschichtung zu bilden, die die Nanotexturen der ersten Beschichtung beibehält und eine nanotexturierte Oberfläche für die Kontaktlinse bereitstellt, worin eine erste reaktive funktionelle Gruppe mit einer zweiten reaktiven funktionellen Gruppe in der Gegenwart oder Abwesenheit eines Kopplungsmittels reagieren kann, um eine Quervernetzung zwischen dem polymeren Beschichtungsmaterial und dem wasserlöslichen und querver-

vernetzbares hydrophilen polymeren Material zu bilden.

2. Verfahren nach Anspruch 1, worin das Lösungsmittel auf organischer Basis ein Lösungsmittelsystem ist, das aus einem oder mehreren organischen Lösungsmitteln, und optional etwa 30 % oder weniger, vorzugsweise etwa 20 % oder weniger, mehr bevorzugt etwa 15 % oder weniger, noch mehr bevorzugt etwa 10 % oder weniger, insbesondere etwa 5 % oder weniger bezüglich des Gewichts Wasser relativ zu dem Gewicht des Lösungsmittelsystems besteht, worin das eine oder die mehreren organischen Lösungsmittel ausgewählt werden aus der Gruppe, bestehend aus Tripropylenglykoldimethylether, Dipropylenglykoldimethylether, Ethylenglykol-n-butylether, Aceton, Methyl-ethylketon, Diethylenglykol-n-butylether, Diethylenglykoldimethylether, Ethylenglykolphenylether, Propylenglykoldimethylether, Propylenglykoldimethyletheracetat, Dipropylenglykoldimethyletheracetat, Propylenglykol-n-propylether, Dipropylenglykol-n-propylether, Tripropylenglykol-n-butylether, Propylenglykol-n-butylether, Dipropylenglykol-n-butylether, Tripropylenglykol-n-butylether, Propylenglykolphenylether, Dipropylenglykoldimethylether, Polyethylenglykole, Polypropylenglykole, Ethylacetat, Butylacetat, Amylacetat, Methylacetat, Ethylacetat, i-Propylacetat, ein C₁-C₁₂-Alkohol, 1-Methyl-2-Pyrrolidon, N,N-Dimethylpropionamid, Dimethylformamid, Dimethylacetamid, Diethylpropionamid, N-Methyl-pyrrolidinon, 1,2-Propylenglykol, Polyethylenglykol mit einem Molekulargewicht von etwa 200 oder weniger, Tetrahydrofuran, Methylchlorid und Kombinationen davon.
3. Verfahren nach Anspruch 1 oder 2, worin die Kontaktlinse durch die Beschichtungslösung auf organischer Basis um mindestens etwa 50 %, vorzugsweise mindestens etwa 75 %, mehr bevorzugt mindestens etwa 100 Prozent, noch mehr bevorzugt mindestens etwa 150 % gequollen wird.
4. Verfahren nach Anspruch 1, 2 oder 3, worin die ersten mehreren reaktiven funktionellen Gruppen ausgewählt werden aus der Gruppe, bestehend aus Carboxylgruppen, Azetidiniumgruppen, Aminogruppen, Azlactongruppen, Isocyanatgruppen, Epoxygruppen, Aziridingruppen, Thiolgruppen, Hydroxylgruppen und Kombinationen davon, mehr bevorzugt ausgewählt werden aus der Gruppe, bestehend aus Carboxylgruppen, Azetidiniumgruppen, Aminogruppen, Azlactongruppen, Isocyanatgruppen, Epoxygruppen, Aziridingruppen, Thiolgruppen und Kombinationen davon, noch mehr bevorzugt ausgewählt werden aus der Gruppe, bestehend aus Carboxylgruppen, Azetidiniumgruppe, Aminogruppen, Epoxygruppen, Thiolgruppen und Kombinationen davon, am meisten bevorzugt ausgewählt werden aus der Gruppe, bestehend aus Carboxylgruppen, Azetidiniumgruppe, Aminogruppen, Epoxygruppen, Thiolgruppen und Kombinationen davon, worin die Affinitätsgruppen oder -reste entweder identisch sind mit oder verschieden sind von den ersten reaktiven funktionellen Gruppen, und ausgewählt werden aus der Gruppe, bestehend aus Carboxylgruppen, Ammoniumgruppen, hydrophoben Resten, hydrophoben Segmenten und Kombinationen davon, vorzugsweise ausgewählt werden aus der Gruppe, bestehend aus Carboxylgruppen, Ammoniumgruppen und Kombinationen davon.
5. Verfahren nach einem der Ansprüche 1 bis 4, worin das polymere Beschichtungsmaterial ist: (1) ein Homopolymer von einem Ammonium-enthaltenden Vinylmonomer oder einem Carboxyl-enthaltenden Vinylmonomer; (2) ein Copolymer von einem oder mehreren Ammonium-enthaltenden und/oder Carboxyl-enthaltenden Vinylmonomeren; (3) ein Copolymer von einem oder mehreren Ammonium-enthaltenden und/oder Carboxyl-enthaltenden Vinylmonomeren mit einem nichtreaktiven Vinylmonomer, ausgewählt aus der Gruppe, bestehend aus (Meth)acrylamid, N,N-Dimethyl(meth)acrylamid, N-Vinylpyrrolidon (NVP), N,N-Dimethylaminoethyl-(meth)acrylat, N,N-Dimethylaminopropyl(meth)acrylamid, Glycerolmeth-acrylat, 3-Acryloylamino-1-propanol, N-Hydroxyethylacrylamid, N-[tris-(Hydroxymethyl)methyl]-acrylamid, N-Methyl-3-methylen-2-pyrrolidon, 1-Ethyl-3-methylen-2-pyrrolidon, 1-Methyl-5-methylen-2-pyrrolidon, 1-Ethyl-5-methylen-2-pyrrolidon, 5-Methyl-3-methylen-2-pyrrolidon, 5-Ethyl-3-methylen-2-pyrrolidon, 2-Hydroxyethyl(meth)acrylat, Hydroxypropyl(meth)acrylat, C₁-C₄-Alkoxypropyl(meth)acrylat mit einem Molekulargewicht im Gewichtsmittel von bis zu 1500 Dalton, N-Vinylformamid, N-Vinylacetamid, N-Vinylisopropylamid, N-Vinyl-N-methylacetamid, Allylalkohol, Vinylalkohol (hydrolysierte Form von Vinylacetat in dem Copolymer), ein Phosphorylcholin-enthaltendes Vinylmonomer und Kombinationen davon und optional mit einem oder mehreren reaktiven Vinylmonomeren mit einer reaktiven funktionellen Gruppe, ausgewählt aus der Gruppe bestehend aus Azetidiniumgruppe, Azlactongruppen, Isocyanatgruppen, Epoxygruppen, Aziridingruppen und Kombinationen davon; (4) Polyethylenimin (PEI); (5) Polyvinylalkohol mit anhängenden primären und/oder sekundären Aminogruppen; (6) ein Blockcopolymer, umfassend mindestens ein hydrophobes Segment (vorzugsweise ausgewählt aus der Gruppe, bestehend aus Polydimethylsiloxan, Poly(propylenoxid), Poly(butyleneoxid), einer Polymerkette oder einem Segment, bestehend im Wesentlichen aus mindestens einem Silikon-enthaltenden Vinylmonomeren, C₈-C₁₆-Alkyl(meth)acrylat, C₈-C₁₆-Alkyl(meth)acrylamid und Kombinationen davon) und polymere Segmente mit reaktiven funktionellen Gruppen, ausgewählt aus der Gruppe, bestehend aus Azetidiniumgruppe, Azlactongruppen, Isocyanatgruppen, Epoxygruppen, Aziridingruppen, Thiolgruppen und Kombinationen davon; oder (7) eine Kombination davon.

6. Verfahren nach einem der Ansprüche 1 bis 5, worin das polymere Beschichtungsmaterial ein Polymer oder Copolymer ist, umfassend mindestens etwa 70 Mol-%, vorzugsweise mindestens etwa 80 Mol-%, mehr bevorzugt mindestens etwa 90 Mol-%, noch mehr bevorzugt mindestens etwa 95 Mol-% Monomereinheiten aus einem oder mehreren Carboxyl-enthaltenden Vinylmonomeren, worin das eine oder die mehreren Carboxyl-enthaltenden Vinylmonomere ausgewählt werden aus der Gruppe, bestehend aus Acrylsäure, einer C₁-C₄-Alkylacrylsäure (z.B. Methacrylsäure, Ethylacrylsäure, Propylacrylsäure, Butylacrylsäure), N,N-2-Acrylamido-glykolsäure, beta-Methylacrylsäure (Crotonsäure), alpha-Phenylacrylsäure, beta-Acryloxypropionsäure, Sorbinsäure, Angelicasäure, Zimtsäure, 1-Carboxy-4-phenyl-1,3-butadien, Itaconsäure, Citraconsäure, Mesaconsäure, Glutaconsäure, Aconitsäure, Maleinsäure, Fumarsäure und Kombinationen davon.
7. Verfahren nach Anspruch 6, worin das polymere Beschichtungsmaterial ist: eine lineare oder verzweigte Polyacrylsäure; eine lineare oder verzweigte Polymethacrylsäure; ein lineares oder verzweigtes Poly(acrylsäure-co-acrylamid) mit mindestens etwa 70 Mol-%, vorzugsweise mindestens etwa 80 Mol-%, mehr bevorzugt mindestens etwa 90 Mol-%, noch mehr bevorzugt mindestens etwa 95 Mol-% Acrylsäure; ein lineares oder verzweigtes Poly(methacrylsäure-co-acrylamid) mit mindestens etwa 70 Mol-%, vorzugsweise mindestens etwa 80 Mol-%, mehr bevorzugt mindestens etwa 90 Mol-%, noch mehr bevorzugt mindestens etwa 95 Mol-% Methacrylsäure; ein lineares oder verzweigtes Poly(acrylsäure-co-vinylpyrrolidon) mit mindestens etwa 70 Mol-%, vorzugsweise mindestens etwa 80 Mol-%, mehr bevorzugt mindestens etwa 90 Mol-%, noch mehr bevorzugt mindestens etwa 95 Mol-% Acrylsäure; ein lineares oder verzweigtes Poly(methacrylsäure-co-vinylpyrrolidon) mit mindestens etwa 70 Mol-%, vorzugsweise mindestens etwa 80 Mol-%, mehr bevorzugt mindestens etwa 90 Mol-%, noch mehr bevorzugt mindestens etwa 95 Mol-% Methacrylsäure.
8. Verfahren nach einem der Ansprüche 1 bis 7, worin die Kontaktlinse eine Silikonhydrogelkontaktlinse ist, erhalten durch Polymerisation einer Linsenformulierung, umfassend mindestens eine Komponente, ausgewählt aus der Gruppe, bestehend aus Silikon-enthaltendem Vinylmonomer, einem Silikon-enthaltendem Vinylmakromer, einem Silikon-enthaltendem Präpolymer, einem hydrophilen Vinylmonomer, einem hydrophoben Vinylmonomer, einem Quervernetzungsmittel, einem freies- Radikal-Initiator (Photoinitiator oder thermischer Initiator), einem hydrophilen Vinylmakromer/Präpolymer, einem UV-Absorptionsmittel, einem Sichttönungsmittel (z.B. Farbstoffe, Pigmente oder Gemische davon), antimikrobiellen Mitteln (z.B. vorzugsweise Silber-Nanoteilchen), einem bioaktiven Mittel, einem auslaugbaren Gleitmittel, einem auslaugbaren Verschleißfestigmittel und Kombinationen davon.
9. Verfahren nach einem der Ansprüche 1 bis 8, worin die zweiten reaktiven funktionellen Gruppen aus einem wasserlöslichen und quervernetzbaaren hydrophilen Polymermaterial sind: Carboxylgruppen, Azetidiniumgruppe, Aminogruppen, Azlactongruppen, Isocyanatgruppen, Epoxygruppen, Aziridingruppen, Hydroxylgruppen, Thiolgruppen oder Kombinationen davon, vorzugsweise Carboxylgruppen, Azetidiniumgruppen, Aminogruppen, Azlactongruppen, Isocyanatgruppen, Epoxygruppen, Aziridingruppen, Thiolgruppen oder Kombinationen davon, mehr bevorzugt Carboxylgruppen, Azetidiniumgruppe, Aminogruppen, Epoxygruppen, Thiolgruppen oder Kombinationen davon, noch mehr bevorzugt Azetidiniumgruppe, Epoxygruppen oder Kombinationen davon, mit der Maßgabe, dass eine zweite reaktive funktionelle Gruppe in einer Kopplungsreaktion mit einer ersten reaktiven funktionellen Gruppe des polymeren Beschichtungsmaterials in der Gegenwart oder vorzugsweise in der Abwesenheit eines Kopplungsmittels reagieren kann, um eine Quervernetzung zu bilden.
10. Verfahren nach einem der Ansprüche 1 bis 9, worin die zweiten reaktiven funktionellen Gruppen thermisch quervernetzbaare Gruppen sind, mehr bevorzugt Azetidiniumgruppen und/oder Epoxygruppen, noch mehr bevorzugt Azetidiniumgruppen sind.
11. Verfahren nach einem der Ansprüche 1 bis 10, worin das wasserlösliche und quervernetzbaare hydrophile polymere Material ein teilweise quervernetztes hydrophiles polymeres Material ist, das ein dreidimensionales Netzwerk und die zweiten reaktiven funktionellen Gruppen in dem Netzwerk umfasst.
12. Verfahren nach einem der Ansprüche 1 bis 11, worin das wasserlösliche und quervernetzbaare hydrophile polymere Material umfasst: (i) von etwa 20 % bis etwa 95 %, vorzugsweise von etwa 35 % bis etwa 90 %, mehr bevorzugt von etwa 50 % bis etwa 85 % bezüglich des Gewichts der ersten Polymerketten, die von Epichlorhydrin-funktionalisiertem Polyamin oder Polyamidoamin abgeleitet sind, (ii) von etwa 5 % bis etwa 80 %, vorzugsweise von etwa 10 % bis etwa 65 %, noch mehr bevorzugt von etwa 15 % bis etwa 50 % bezüglich des Gewichts der hydrophilen Reste oder zweiten Polymerketten, die abgeleitet sind von mindestens einem Hydrophilie-verstärkenden Mittel mit mindestens einer reaktiven funktionellen Gruppe, ausgewählt aus der Gruppe, bestehend aus Aminogruppe, Carboxylgruppe, Thiolgruppe und Kombinationen davon, worin die hydrophilen Reste oder zweiten Polymerketten

kovalent gebunden werden an die ersten Polymerketten durch eine oder mehrere kovalente Bindungen, jeweils gebildet zwischen einer Azetidiniumgruppe des Epichlorhydrin-funktionalisierten Polyamins oder Polyamidoamins und einer Amino-, Carboxyl- oder Thiolgruppe des Hydrophilie-verstärkenden Mittels, und (iii) Azetidiniumgruppen, die Teile der ersten Polymerketten sind oder anhängige oder terminale Gruppen, die kovalent an die ersten Polymerketten gebunden sind.

13. Verfahren nach Anspruch 12, worin das Hydrophilie-verstärkende Mittel ist: ein Amino-, Carboxyl- oder Thiol-enthaltendes Monosaccharid (z.B. 3-Amino-1,2-propandiol, 1-Thioglycerol, 5-Keto-D-gluconsäure, Galactosamin, Glucosamin, Galacturonsäure, Gluconsäure, Glucosaminsäure, Mannosamin, Saccharinsäure-1,4-lacton, Saccharinsäure, Ketodeoxynonulosonsäure, N-Methyl-D-glucamin, 1-Amino-1-deoxy-β-D-galactose, 1-Amino-1-deoxysorbitol, 1-Methylamino-1-deoxysorbitol, N-aminoethylgluconamid); ein Amino-, Carboxyl- oder Thiol-enthaltendes Disaccharid (z.B. Chondroitindisaccharid-Natriumsalz, di(β-D-Xylopyranosyl)amin, Digalacturonsäure, Heparin-disaccharid, Hyaluronsäuredisaccharid, Lactobionsäure); ein Amino-, Carboxyl- oder Thiol-enthaltendes Oligosaccharid (z.B. Carboxymethyl-cyclodextrin-Natriumsalz, Trigalacturonsäure); oder Kombinationen davon.
14. Verfahren nach Anspruch 12, worin das Hydrophilie-verstärkende Mittel ist: Carboxymethylcellulose mit einem Carboxylgehalt von etwa 40 % oder weniger, der abgeschätzt wird, basierend auf der Zusammensetzung sich wiederholender Einheiten, $-\text{[C}_6\text{H}_{10-\text{m}}\text{O}_5(\text{CH}_2\text{CO}_2\text{H})_{\text{m}}\text{]}-$, worin m 1 bis 3 ist; Carboxyethylcellulose mit einem Carboxylgehalt von etwa 36 % oder weniger, der abgeschätzt wird, basierend auf der Zusammensetzung sich wiederholender Einheiten, $-\text{[C}_6\text{H}_{10-\text{m}}\text{O}_5(\text{C}_2\text{H}_4\text{CO}_2\text{H})_{\text{m}}\text{]}-$, worin m 1 bis 3 ist; Carboxypropylcellulose mit einem Carboxylgehalt von etwa 32 % oder weniger, der abgeschätzt wird, basierend auf der Zusammensetzung sich wiederholender Einheiten, $-\text{[C}_6\text{H}_{10-\text{m}}\text{O}_5(\text{C}_3\text{H}_6\text{CO}_2\text{H})_{\text{m}}\text{]}-$, worin m 1 bis 3 ist; Hyaluronsäure mit einem Carboxylgehalt von etwa 11 %, der abgeschätzt wird, basierend auf der Zusammensetzung sich wiederholender Einheiten, $-(\text{C}_{13}\text{H}_{20}\text{O}_9\text{NCO}_2\text{H})-$; Chondroitinsulfat mit einem Carboxylgehalt von etwa 9,8 %, der abgeschätzt wird, basierend auf der Zusammensetzung von sich wiederholenden Einheiten, $-(\text{C}_{12}\text{H}_{18}\text{O}_{13}\text{NSCO}_2\text{H})-$; oder eine Kombination davon.
15. Verfahren nach Anspruch 12, worin das Hydrophilie-verstärkende Mittel ist: PEG-NH₂; PEG-SH; PEG-COOH; H₂N-PEG-NH₂; HOOC-PEG-COOH; HS-PEG-SH; H₂N-PEG-COOH; HOOC-PEG-SH; H₂N-PEG-SH; mehrarmiges PEG mit einer oder mehreren Amino-, Carboxyl- oder Thiolgruppen; PEG-Dendrimere mit einer oder mehreren Amino-, Carboxyl- oder Thiolgruppen; ein Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminiertes Homo- oder Copolymer eines nichtreaktiven hydrophilen Vinylmonomers, ausgewählt aus der Gruppe, bestehend aus Acrylamid (AAm), N,N-Dimethylacrylamid (DMA), N-Vinylpyrrolidon (NVP), N-Vinyl-N-methylacetamid, Glycerol(meth)acrylat, Hydroxyethyl(meth)acrylat, N-Hydroxyethyl(meth)acrylamid, C₁-C₄-Alkoxypolyethylenglykol(meth)acrylat mit einem Molekulargewicht im Gewichtsmittel von bis zu 400 Dalton, Vinylalkohol, N-Methyl-3-methylen-2-pyrrolidon, 1-Methyl-5-methylen-2-pyrrolidon, 5-Methyl-3-methylen-2-pyrrolidon, N,N-Dimethylaminoethyl(meth)acrylat, N,N-Dimethylaminopropyl(meth)acrylamid, (Meth)acryloyloxyethyl-phosphorylcholin und Kombinationen davon; ein Copolymer, das ein Polymerisationsprodukt einer Zusammensetzung ist, umfassend (1) von etwa 0,1 % bis etwa 30 %, vorzugsweise von etwa 0,5 % bis etwa 20 %, mehr bevorzugt von etwa 1 % bis etwa 15 % bezüglich des Gewichts (Meth)acrylsäure, Allylamin und/oder Amino-C₂-C₄-Alkyl(meth)acrylat, und (2) mindestens ein nichtreaktives hydrophiles Vinylmonomer, ausgewählt aus der Gruppe, bestehend aus Acrylamid, N,N-Dimethylacrylamid, N-Vinylpyrrolidon, (Meth)acryloyloxyethylphosphorylcholin, N-Vinyl-N-methyl-acetamid, Glycerol(meth)acrylat, Hydroxyethyl(meth)acrylat, N-Hydroxy-ethyl(meth)acrylamid, C₁-C₄-Alkoxypolyethylenglykol(meth)acrylat mit einem Molekulargewicht im Gewichtsmittel von bis zu 400 Dalton, Vinylalkohol und eine Kombination davon; oder eine Kombination davon.
16. Verfahren nach Anspruch 12, worin das Hydrophilie-verstärkende Mittel ist: PEG-NH₂; PEG-SH; PEG-COOH, Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminiertes Polyvinylpyrrolidon; Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminiertes Polyacrylamid; Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminiertes Poly(DMA); Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminiertes Poly(DMA-co-NVP); Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminiertes Poly(NVP-co-N,N-dimethylaminoethyl(meth)acrylat); Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminierter Polyvinylalkohol; Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminiertes Poly[(meth)acryloyloxyethylphosphorylcholin]-homopolymer oder -copolymer; Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminierter Poly(NVP-co-vinylalkohol); Monoamino-, Monocarboxyl-, Diamino- oder Dicarboxyl-terminierter Poly(DMA-co-vinylalkohol); Poly[(meth)acrylsäure-co-acrylamid] mit von etwa 0,1 % bis etwa 30 %, vorzugsweise von etwa 0,5 % bis etwa 20 %, mehr bevorzugt von etwa 1 % bis etwa 15 % bezüglich des Gewichts (Meth)acrylsäure; Poly[(meth)acrylsäure-co-NVP] mit von etwa 0,1 % bis etwa 30 %, vorzugsweise von etwa 0,5 % bis etwa 20 %, mehr bevorzugt von etwa 1 % bis etwa 15 % bezüglich des Gewichts (Meth)acrylsäure; ein Copolymer, das ein Polymerisationsprodukt einer

Zusammensetzung ist, umfassend (1) (Meth)acryloyloxyethylphosphorylcholin und (2) von etwa 0,1 % bis etwa 30 %, vorzugsweise von etwa 0,5 % bis etwa 20 %, mehr bevorzugt von etwa 1 % bis etwa 15 % bezüglich des Gewichts (Meth)acrylsäure, Allylamin und/oder Amino-C₂-C₄-Alkyl(meth)acrylat; und eine Kombination davon; oder eine Kombination davon.

17. Verfahren nach einem der Ansprüche 1 bis 16, worin der Schritt des Fixierens der Nano-Texturen in der ersten Beschichtung durchgeführt wird durch Autoklavieren der Kontaktlinse, die die erste Beschichtung mit Nano-Texturen umfasst, und eingetaucht ist in eine Packungslösung, die das wasserlösliche, quervernetzbare hydrophile Polymermaterial enthält in einer verschlossenen Linsenpackung bei einer Temperatur von etwa 118 °C bis etwa 125 °C für ungefähr 20 - 90 Minuten, worin die zweiten reaktiven funktionellen Gruppen des wasserlöslichen quervernetzbaren hydrophilen Polymermaterials Azetidinium-Gruppen und/oder Epoxy-Gruppen sind.
18. Silikonhydrogelkontaktlinse, erhalten entsprechend einem Verfahren nach einem der Ansprüche 1 bis 17, worin die Silikonhydrogelkontaktlinse einen Silikonhydrogellinsenkörper und eine Nicht-Silikonhydrogel-Beschichtung darauf umfasst, worin die Beschichtung schneckenförmige (Winkle) Oberflächenmuster (Nanotexturen) aufweist, mit einer Rauigkeit (einer Rauigkeit im arithmetischen Mittel, Ra) von etwa 5 nm bis etwa 600 nm, vorzugsweise von etwa 10 nm bis etwa 400 nm, noch mehr bevorzugt von etwa 15 nm bis etwa 200 nm, noch mehr bevorzugt von etwa 20 bis etwa 100 nm.
19. Silikonhydrogelkontaktlinse, nach Anspruch 18, worin die Silikonhydrogelkontaktlinse mindestens eine der Eigenschaften aufweist, ausgewählt aus der Gruppe, bestehend aus (1) einer Oberflächenhydrophilie/-benetzbarkeit, **dadurch gekennzeichnet, dass** sie einen mittleren Wasserkontaktwinkel von vorzugsweise etwa 90 Grad oder weniger, mehr bevorzugt etwa 80 Grad oder weniger, noch mehr bevorzugt etwa 70 Grad oder weniger, am meisten bevorzugt etwa 60 Grad oder weniger aufweist; (2) eine Sauerstofftransmissibilität von mindestens etwa 50, vorzugsweise mindestens etwa 70, mehr bevorzugt mindestens etwa 80, noch mehr bevorzugt mindestens etwa 90 Barrer/mm; (3) ein elastisches Widerstandsmoment von etwa 1,5 MPa oder weniger, vorzugsweise etwa 1,2 MPa oder weniger, mehr bevorzugt etwa 1,0 MPa oder weniger, noch mehr bevorzugt von etwa 0,3 MPa bis etwa 1,0 MPa; (4) einen Wassergehalt von vorzugsweise etwa 18 % bis etwa 70 %, mehr bevorzugt von etwa 20 % bis etwa 60 % bezüglich des Gewichts, wenn vollständig hydratisiert; und (5) Kombinationen davon.
20. Silikonhydrogelkontaktlinse nach Anspruch 19, worin die Beschichtung wurmförmige Muster umfasst, mit einer Rauigkeit (d.h. einer Rauigkeit im arithmetischen Mittel, Ra) von etwa 5 nm bis etwa 600 nm, vorzugsweise von etwa 10 nm bis etwa 400 nm, noch mehr bevorzugt von etwa 15 nm bis etwa 200 nm, noch mehr bevorzugt von etwa 20 nm bis etwa 100 nm.

Revendications

1. Procédé de fabrication de lentilles de contact, de préférence, de lentilles de contact en hydrogel de silicone, ayant des surfaces nanotexturées, comprenant les étapes consistant à:

(1) partir d'une solution de revêtement à base organique renfermant un solvant à base organique et un matériau de revêtement polymère dissous dans le solvant à base organique, dans laquelle le matériau de revêtement polymère comprend de multiples premiers groupes fonctionnels réactifs et de multiples groupes ou groupements d'affinité;

(2) mettre en contact une lentille de contact avec la solution de revêtement à base organique pour faire gonfler la lentille de contact et former un revêtement intermédiaire du matériau de revêtement polymère sur la lentille de contact, la lentille de contact comprenant, au niveau et à proximité de sa surface, des motifs monomères et/ou des groupements et/ou segments hydrophobes susceptibles d'interagir avec les groupes ou groupements d'affinité du matériau de revêtement polymère de manière à lier le matériau de revêtement polymère, où le poids moléculaire moyen du matériau de revêtement polymère est choisi de façon à être suffisamment élevé pour s'assurer que le matériau de revêtement polymère pénètre partiellement dans la lentille de contact gonflée par le solvant à base organique (et est de préférence d'au moins environ 25 000 Daltons, plus préférablement, d'au moins environ 50 000 Daltons, encore plus préférablement d'au moins environ 75 000 Daltons, le plus préférablement, d'environ 100 000 à 1 000 000 de Daltons);

(3) mettre en contact la lentille de contact gonflée ayant dessus le revêtement intermédiaire avec une solution aqueuse ou, de préférence, de l'eau, pour que la lentille de contact ayant dessus le revêtement intermédiaire se rétracte pour former un revêtement d'apprêt ayant des nanotextures sur la lentille de contact; et

(4) fixer les nanotextures dans le revêtement d'apprêt par réticulation d'un matériau polymère hydrophile hydrosoluble et réticulable avec de multiples seconds groupes fonctionnels réactifs sur le revêtement d'apprêt par l'intermédiaire des premiers groupes fonctionnels réactifs pour former un revêtement polymère réticulé qui conserve les nanotextures du revêtement d'apprêt et procure une surface nanotexturée à la lentille de contact, où un premier groupe fonctionnel réactif peut réagir avec un second groupe fonctionnel réactif en présence ou en l'absence d'un agent de couplage pour former une réticulation entre le matériau de revêtement polymère et le matériau polymère hydrophile hydrosoluble et réticulable.

2. Procédé selon la revendication 1, dans lequel le solvant à base organique est un système de solvant qui est constitué d'un ou de plusieurs solvants organiques et facultativement, d'environ 30% ou moins, de préférence, d'environ 20% ou moins, plus préférablement, d'environ 15% ou moins, encore plus préférablement d'environ 10% ou moins, en particulier d'environ 5% ou moins, en poids d'eau par rapport au poids du système de solvant, où le ou les solvants organiques sont choisis dans le groupe constitué par l'éther méthyllique de tripropylèneglycol, l'éther méthyllique de dipropylèneglycol, l'éther n-butylique d'éthylèneglycol, l'acétone, la méthyléthylcétone, l'éther n-butylique de diéthylèneglycol, l'éther méthyllique de diéthylèneglycol, l'éther phénylique d'éthylèneglycol, l'éther méthyllique de propylèneglycol, l'acétate d'éther méthyllique de propylèneglycol, l'acétate d'éther méthyllique de dipropylèneglycol, l'éther n-propylique de propylèneglycol, l'éther n-propylique de dipropylèneglycol, l'éther n-butylique de tripropylèneglycol, l'éther n-butylique de propylèneglycol, l'éther n-butylique de dipropylèneglycol, l'éther n-butylique de tripropylèneglycol, l'éther phénylique de propylèneglycol, l'éther diméthyllique de dipropylèneglycol, les polyéthylèneglycols, les polypropylèneglycols, l'acétate d'éthyle, l'acétate de butyle, l'acétate d'amyle, le lactate de méthyle, le lactate d'éthyle, le lactate d'i-propyle, un alcool en C₁-C₁₂, la 1-méthyl-2-pyrrolidone, le N,N-diméthylpropionamide, le diméthylformamide, le diméthylacétamide, le diméthylpropionamide, la N-méthylpyrrolidinone, le 1,2-propylèneglycol, un polyéthylèneglycol ayant un poids moléculaire d'environ 200 ou moins, le tétrahydrofuranne, le chlorure de méthylène, et leurs combinaisons.
3. Procédé selon la revendication 1 ou 2, dans lequel la lentille de contact est gonflée par la solution de revêtement à base organique à au moins environ 50%, de préférence, au moins environ 75%, plus préférablement, au moins environ 100%, encore plus préférablement, au moins environ 150%.
4. Procédé selon la revendication 1, 2 ou 3, dans lequel les premiers groupes fonctionnels réactifs multiples sont choisis dans le groupe constitué par les groupes carboxyle, les groupes azétidinium, les groupes amino, les groupes azlactone, les groupes isocyanate, les groupes époxy, les groupes aziridine, les groupes thiol, les groupes hydroxyle, et leurs combinaisons, plus préférablement, choisis dans le groupe constitué par les groupes carboxyle, les groupes azétidinium, les groupes amino, les groupes azlactone, les groupes isocyanate, les groupes époxy, les groupes aziridine, les groupes thiol, et leurs combinaisons, encore plus préférablement, choisis dans le groupe constitué par les groupes carboxyle, les groupes azétidinium, les groupes amino, les groupes époxy, les groupes thiol, et leurs combinaisons, le plus préférablement, choisis dans le groupe constitué par les groupes carboxyle, les groupes azétidinium, les groupes amino, les groupes époxy, les groupes thiol, et leurs combinaisons; où les groupes ou groupements d'affinité sont soit identiques aux premiers groupes fonctionnels réactifs, soit différents des ceux-ci, et sont choisis dans le groupe constitué par les groupes carboxyle, les groupes ammonium, les groupements hydrophobes, les segments hydrophobes, et leurs combinaisons, de préférence, choisis dans le groupe constitué par les groupes carboxyle, les groupes ammonium, et leurs combinaisons.
5. Procédé selon l'une quelconque des revendications 1 à 4, dans lequel le matériau de revêtement polymère est: (1) un homopolymère d'un monomère vinylique contenant de l'ammonium ou d'un monomère vinylique contenant du carboxyle; (2) un copolymère d'un ou de plusieurs monomères vinyliques contenant de l'ammonium et/ou contenant du carboxyle; (3) un copolymère d'un ou de plusieurs monomères vinyliques contenant de l'ammonium et/ou contenant du carboxyle avec un monomère vinylique non réactif choisi dans le groupe constitué par un (méth)acrylamide, un N,N-diméthyl(méth)acrylamide, la N-vinylpyrrolidone (NVP), un (méth)acrylate de N,N-diméthylaminoéthyle, un N,N-diméthylaminopropyl(méth)acrylamide, le méthacrylate de glycérol, le 3-acryloylamino-1-propanol, le N-hydroxyéthylacrylamide, le N-[tris(hydroxyméthyl)méthyl]acrylamide, la N-méthyl-3-méthylène-2-pyrrolidone, la 1-éthyl-3-méthylène-2-pyrrolidone, la 1-méthyl-5-méthylène-2-pyrrolidone, la 1-éthyl-5-méthylène-2-pyrrolidone, la 5-méthyl-3-méthylène-2-pyrrolidone, la 5-éthyl-3-méthylène-2-pyrrolidone, un (méth)acrylate de 2-hydroxyéthyle, un (méth)acrylate d'hydroxypropyle, un (méth)acrylate d'alcoxy(en C₁-C₄)-polyéthylèneglycol ayant un poids moléculaire moyen en poids allant jusqu'à 1500 Daltons, le N-vinylformamide, le N-vinylacétamide, le N-vinylisopropylamide, le N-vinyl-N-méthylacétamide, un alcool allylique, un alcool vinylique (forme hydrolysée de l'acétate de vinyle dans le copolymère), un monomère vinylique contenant de la phosphorylcholine, et leurs combinaisons et facultativement, avec un ou plusieurs monomères vinyliques réactifs ayant un groupe fonctionnel réactif choisi dans le groupe

constitué par les groupes azétidinium, les groupes azlactone, les groupes isocyanate, les groupes époxy, les groupes aziridine, et leurs combinaisons; (4) une polyéthylèneimine (PEI); (5) un polyalcool vinylique ayant des groupes amino primaires et/ou secondaires pendants; (6) un copolymère séquencé incluant au moins un segment hydrophobe (de préférence, choisi dans le groupe constitué par le polydiméthylsiloxane, le poly(oxyde de propylène), le poly(oxyde de butylène), une chaîne ou un segment polymère constitué essentiellement d'au moins un parmi les monomères vinyliques contenant de la silicone, un (méth)acrylate d'alkyle en C₈-C₁₆, un alkyl(en C₈-C₁₆)(méth)acrylamide, et leurs combinaisons) et des segments polymères ayant des groupes fonctionnels réactifs choisis dans le groupe constitué par les groupes azétidinium, les groupes azlactone, les groupes isocyanate, les groupes époxy, les groupes aziridine, les groupes thiols et leurs combinaisons; ou (7) une combinaison de ceux-ci.

6. Procédé selon l'une quelconque des revendications 1 à 5, dans lequel le matériau de revêtement polymère est un polymère ou un copolymère comprenant au moins environ 70% en mole, de préférence, au moins environ 80% en mole, plus préférablement, au moins environ 90% en mole, encore plus préférablement, au moins environ 95% en mole, de motifs monomères d'un ou de plusieurs monomères vinyliques contenant du carboxyle, où le ou les monomères vinyliques contenant du carboxyle sont choisis dans le groupe constitué par l'acide acrylique, un acide alkyl(en C₁-C₄)acrylique (par exemple, l'acide méthacrylique, l'acide éthylacrylique, l'acide propylacrylique, l'acide butylacrylique), l'acide N,N-2-acrylamidoglycolique, l'acide bêta-méthylacrylique (acide crotonique), l'acide alpha-phénylacrylique, l'acide bêta-acryloxypropionique, l'acide sorbique, l'acide angélique, l'acide cinnamique, l'acide 1-carboxy-4-phénylbutadiène-1,3-itaconique, l'acide citraconique, l'acide mésaconique, l'acide glutaconique, l'acide aconitique, l'acide maléique, l'acide fumarique, et leurs combinaisons.

7. Procédé selon la revendication 6, dans lequel le matériau de revêtement polymère est: un acide polyacrylique linéaire ou ramifié; un acide polyméthacrylique linéaire ou ramifié; un poly(acide acrylique-co-acrylamide) linéaire ou ramifié ayant au moins environ 70% en mole, de préférence, au moins environ 80% en mole, plus préférablement, au moins environ 90% en mole, encore plus préférablement, au moins environ 95% en mole d'acide acrylique; un poly(acide méthacrylique-co-acrylamide) linéaire ou ramifié ayant au moins environ 70% en mole, de préférence, au moins environ 80% en mole, plus préférablement, au moins environ 90% en mole, encore plus préférablement, au moins environ 95% en mole d'acide méthacrylique; un poly(acide acrylique-co-vinylpyrrolidone) linéaire ou ramifié ayant au moins environ 70% en mole, de préférence, au moins environ 80% en mole, plus préférablement, au moins environ 90% en mole, encore plus préférablement, au moins environ 95% en mole d'acide acrylique; un poly(acide méthacrylique-co-vinylpyrrolidone) linéaire ou ramifié ayant au moins environ 70% en mole, de préférence, au moins environ 80% en mole, plus préférablement, au moins environ 90% en mole, encore plus préférablement, au moins environ 95% en mole d'acide méthacrylique.

8. Procédé selon l'une quelconque des revendications 1 à 7, dans lequel la lentille de contact est une lentille de contact en hydrogel de silicone obtenue par polymérisation d'une formulation de lentille comprenant au moins un composant choisi dans le groupe constitué par un monomère vinylique contenant de la silicone, un macromère vinylique contenant de la silicone, un prépolymère contenant de la silicone, un monomère vinylique hydrophile, un monomère vinylique hydrophobe, un agent réticulant, un initiateur de radicaux libres (photo-initiateur ou initiateur thermique), un macromère/prépolymère vinylique hydrophile, un agent absorbant les UV, un agent légèrement tintant pour la visibilité (par exemple, colorants, pigments, ou leurs mélanges), des agents antimicrobiens (par exemple, de préférence, des nanoparticules d'argent), un agent bioactif, un lubrifiant lixiviable, un agent stabilisateur de larme lixiviable, et leurs combinaisons.

9. Procédé selon l'une quelconque des revendications 1 à 8, dans lequel les seconds groupes fonctionnels réactifs d'un matériau polymère hydrophile hydrosoluble et réticulable sont: les groupes carboxyle, les groupes azétidinium, les groupes amino, les groupes azlactone, les groupes isocyanate, les groupes époxy, les groupes aziridine, les groupes hydroxyle, les groupes thiol, ou leurs combinaisons; de préférence, les groupes carboxyle, les groupes azétidinium, les groupes amino, les groupes azlactone, les groupes isocyanate, les groupes époxy, les groupes aziridine, les groupes thiol, ou leurs combinaisons; plus préférablement, les groupes carboxyle, les groupes azétidinium, les groupes amino, les groupes époxy, les groupes thiol, ou leurs combinaisons; encore plus préférablement, les groupes azétidinium, les groupes époxy, ou leurs combinaisons, pourvu qu'un second groupe fonctionnel réactif puisse réagir dans une réaction de couplage avec un premier groupe fonctionnel réactif du matériau de revêtement polymère en présence, ou de préférence, en l'absence d'un agent de couplage pour former une réticulation.

10. Procédé selon l'une quelconque des revendications 1 à 9, dans lequel les seconds groupes fonctionnels réactifs sont des groupes thermiquement réticulables, plus préférablement des groupes azétidinium et/ou des groupes époxy, encore plus préférablement, des groupes azétidinium.

11. Procédé selon l'une quelconque des revendications 1 à 10, dans lequel le matériau polymère hydrophile hydrosoluble et réticulable est un matériau polymère hydrophile partiellement réticulé qui comprend un réseau tridimensionnel et les seconds groupes fonctionnels réactifs au sein du réseau.

12. Procédé selon l'une quelconque des revendications 1 à 11, dans lequel le matériau polymère hydrophile hydrosoluble et réticulable comprend: (i) environ 20% à environ 95%, de préférence environ 35% à environ 90%, plus préférablement environ 50% à environ 85%, en poids de premières chaînes polymères dérivées d'une polyamidoamine ou polyamine à fonctionnalisation épichlorhydrine, (ii) environ 5% à environ 80%, de préférence environ 10% à environ 65%, encore plus préférablement environ 15% à environ 50%, en poids de groupements hydrophiles ou de secondes chaînes polymères dérivées d'au moins un agent d'amélioration de l'hydrophilie ayant au moins un groupe fonctionnel réactif choisi dans le groupe constitué par un groupe amino, un groupe carboxyle, un groupe thiol, et leurs combinaisons, où les groupements hydrophiles ou les secondes chaînes polymères sont liés de manière covalente aux premières chaînes polymères par l'intermédiaire d'une ou de plusieurs liaisons covalentes formées chacune entre un groupe azétidinium de la polyamidoamine ou polyamine à fonctionnalisation épichlorhydrine et un groupe amino, carboxyle ou thiol de l'agent d'amélioration de l'hydrophilie, et (iii) des groupes azétidinium qui font partie des premières chaînes polymères, ou des groupes pendants ou terminaux liés de manière covalente aux premières chaînes polymères.

13. Procédé selon la revendication 12, dans lequel l'agent d'amélioration de l'hydrophilie est: un monosaccharide contenant un groupe amino, carboxyle ou thiol (par exemple, 3-amino-1,2-propanediol, 1-thioglycérol, acide 5-céto-D-gluconique, galactosamine, glucosamine, acide galacturonique, acide gluconique, acide glucosaminique, mannosamine, acide saccharique 1,4-lactone, acide saccharidique, acide céto-désoxynonulosonique, N-méthyl-D-glucamine, 1-amino-1-désoxy-β-D-galactose, 1-amino-1-désoxysorbitol, 1-méthylamino-1-désoxysorbitol, N-aminoéthylgluconamide); un disaccharide contenant un groupe amino, carboxyle ou thiol (par exemple, sel de sodium de disaccharide de chondroïtine, di(β-xylopyranosyl)amine, acide digalacturonique, disaccharide d'héparine, disaccharide d'acide hyaluronique, acide lactobionique); un oligosaccharide contenant un groupe amino, carboxyle ou thiol (par exemple, sel de sodium de carboxyméthyl-β-cyclodextrine, acide trigalacturonique), ou une combinaison de ceux-ci.


14. Procédé selon la revendication 12, dans lequel l'agent d'amélioration de l'hydrophilie est:

une carboxyméthylcellulose ayant une teneur en carboxyle d'environ 40% ou moins, qui est estimée sur la base de la composition des motifs récurrents, $[-C_6H_{10-m}O_5(CH_2CO_2H)_m]-$ où m vaut 1 à 3; une carboxyéthylcellulose ayant une teneur en carboxyle d'environ 36% ou moins, qui est estimée sur la base de la composition des motifs récurrents, $[-C_6H_{10-m}O_5(C_2H_4CO_2H)_m]-$ où m vaut 1 à 3; une carboxypropylcellulose ayant une teneur en carboxyle d'environ 32% ou moins, qui est estimée sur la base de la composition des motifs récurrents, $[-C_6H_{10-m}O_5(C_3H_6CO_2H)_m]-$ où m vaut 1 à 3; un acide hyaluronique ayant une teneur en carboxyle d'environ 11%, qui est estimée sur la base de la composition des motifs récurrents, $-(C_{13}H_{20}O_9NCO_2H)-$; un chondroïtine-sulfate ayant une teneur en carboxyle d'environ 9,8%, qui est estimée sur la base de la composition en motifs récurrents, $[-C_{12}H_{18}O_{13}NSCO_2H)-$; ou une combinaison de ceux-ci.


15. Procédé selon la revendication 12, dans lequel l'agent d'amélioration de l'hydrophilie est: PEG-NH₂; PEG-SH; PEG-COOH; H₂N-PEG-NH₂; HOOC-PEG-COOH; HS-PEG-SH; H₂N-PEG-COOH; HOOC-PEG-SH; H₂N-PEG-SH; un PEG multi-bras avec un ou plusieurs groupes amino, carboxyle ou thiol; des dendrimères de PEG avec un ou plusieurs groupes amino, carboxyle ou thiol; un homo- ou copolymère à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle d'un monomère vinylique hydrophile non réactif choisi dans le groupe constitué par l'acrylamide (AAM), le N,N-diméthylacrylamide (DMA), la N-vinylpyrrolidone (NVP), le N-vinyl-N-méthylacétamide, le (méth)acrylate de glycérol, le (méth)acrylate d'hydroxyéthyle, le N-hydroxyéthyl(méth)acrylamide, un (méth)acrylate d'alcoxy(en C₁-C₄)polyéthylèneglycol ayant un poids moléculaire moyen en poids allant jusqu'à 400 Daltons, l'alcool vinylique, la N-méthyl-3-méthylène-2-pyrrolidone, la 1-méthyl-5-méthylène-2-pyrrolidone, la 5-méthyl-3-méthylène-2-pyrrolidone, le (méth)acrylate de N,N-diméthylaminoéthyle, le N,N-diméthylaminopropyl(méth)acrylamide, la (méth)acryloyloxyéthyl-phosphorylcholine, et leurs combinaisons; un copolymère qui est un produit de polymérisation d'une composition comprenant (1) environ 0,1% à environ 30%, de préférence, environ 0,5% à environ 20%, plus préférablement, environ 1% à environ 15%, en poids d'acide (méth)acrylique, d'allylamine et/ou de (méth)acrylate d'amino-alkyle en C₂-C₄, et (2) au moins un monomère vinylique hydrophile non réactif choisi dans le groupe constitué par l'acrylamide, le N,N-diméthylacrylamide, la N-vinylpyrrolidone, la (méth)acryloyloxyéthylphosphorylcholine, le N-vinyl-N-méthylacétamide, le (méth)acrylate de glycérol, le (méth)acrylate d'hydroxyéthyle, le N-hydroxyéthyl(méth)acrylamide, un (méth)acrylate d'alcoxy(en C₁-C₄)polyéthylèneglycol ayant un poids moléculaire

moyen en poids allant jusqu'à 400 Daltons, l'alcool vinylique, et leurs combinaisons; ou une combinaison de ceux-ci.

16. Procédé selon la revendication 12, dans lequel l'agent d'amélioration de l'hydrophilie est: PEG-NH₂; PEG-SH; PEG-COOH; une polyvinylpyrrolidone à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle; un polyacrylamide à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle; un poly(DMA) à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle; une poly(DMA-co-NVP) à terminaison monoamino ou monocarboxyle, diamino ou dicarboxyle; un poly((méth)acrylate de NVP-co-N,N-diméthylaminoéthyle) à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle; un poly(alcool vinylique) à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle; un homopolymère ou copolymère de poly[(méth)acryloyloxyéthylphosphorylcholine] à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle; un poly(NVP-co-alcool vinylique) à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle; un poly(DMA-co-alcool vinylique) à terminaison monoamino, monocarboxyle, diamino ou dicarboxyle; un poly[acide (méth)acrylique-co-acrylamide] avec environ 0,1% à environ 30%, de préférence, environ 0,5% à environ 20%, plus préférablement, environ 1% à environ 15%, en poids d'acide (méth)acrylique; une poly[acide (méth)acrylique-co-NVP] avec environ 0,1% à environ 30%, de préférence, environ 0,5% à environ 20%, plus préférablement, environ 1% à environ 15%, en poids d'acide (méth)acrylique; un copolymère qui est un produit de polymérisation d'une composition comprenant (1) une (méth)acryloyloxyéthylphosphorylcholine et (2) environ 0,1% à environ 30%, de préférence environ 0,5% à environ 20%, plus préférablement, environ 1% à environ 15%, en poids d'acide (méth)acrylique, d'allylamine et/ou de (méth)acrylate d'amino-alkyle en C₂-C₄; et leurs combinaisons; ou une combinaison de ceux-ci.
17. Procédé selon l'une quelconque des revendications 1 à 16, dans lequel l'étape de fixation des nanotextures dans le revêtement d'apprêt est réalisée par passage à l'autoclave de la lentille de contact qui comprend le revêtement d'apprêt incluant les nanotextures et qui est immergée dans une solution de conditionnement renfermant le matériau polymère hydrophile hydrosoluble réticulable dans un emballage de lentille scellé à une température d'environ 118°C à environ 125°C pendant approximativement 20-90 minutes, où les seconds groupes fonctionnels réactifs du matériau polymère hydrophile hydrosoluble réticulable sont des groupes azétidinium et/ou des groupes époxy.
18. Lentille de contact en hydrogel de silicone obtenue selon un procédé de l'une quelconque des revendications 1 à 17, où la lentille de contact en hydrogel de silicone comprend un corps de lentille en hydrogel de silicone et dessus un revêtement en hydrogel non siliconé, où le revêtement comprend des motifs de surface plissés (nanotextures) présentant une rugosité (c'est-à-dire, une rugosité moyenne arithmétique, Ra) d'environ 5 nm à environ 600 nm, de préférence, d'environ 10 nm à environ 400 nm, encore plus préférablement, d'environ 15 nm à environ 200 nm, encore plus préférablement, d'environ 20 nm à environ 100 nm.
19. Lentille de contact en hydrogel de silicone selon la revendication 18, où la lentille de contact en hydrogel de silicone possède au moins l'une des propriétés choisies dans le groupe constitué par (1) une hydrophilie/mouillabilité de surface **caractérisée par** le fait d'avoir un angle de contact moyen avec l'eau qui est, de préférence, d'environ 90 degrés ou moins, plus préférablement, d'environ 80 degrés ou moins, encore plus préférablement, d'environ 70 degrés ou moins, le plus préférablement, d'environ 60 degrés ou moins; (2) une transmissibilité de l'oxygène d'au moins environ 50, de préférence, d'au moins environ 70, plus préférablement, d'au moins environ 80, encore plus préférablement, d'au moins environ 90 barrers/mm; (3) un module élastique d'environ 1,5 MPa ou moins, de préférence, d'environ 1,2 MPa ou moins, plus préférablement, d'environ 1,0 MPa ou moins, encore plus préférablement, d'environ 0,3 MPa à environ 1,0 MPa; (4) une teneur en eau qui est, de préférence, d'environ 18% à environ 70%, plus préférablement, d'environ 20% à environ 60% en poids lorsqu'elle est complètement hydratée; et (5) leurs combinaisons.
20. Lentille de contact en hydrogel de silicone selon la revendication 19, dans laquelle le revêtement comporte des motifs vermiformes ayant une rugosité (c'est-à-dire, une rugosité moyenne arithmétique, Ra) d'environ 5 nm à environ 600 nm, de préférence, d'environ 10 nm à environ 400 nm, encore plus préférablement, d'environ 15 nm à environ 200 nm, encore plus préférablement, d'environ 20 nm à environ 100 nm.

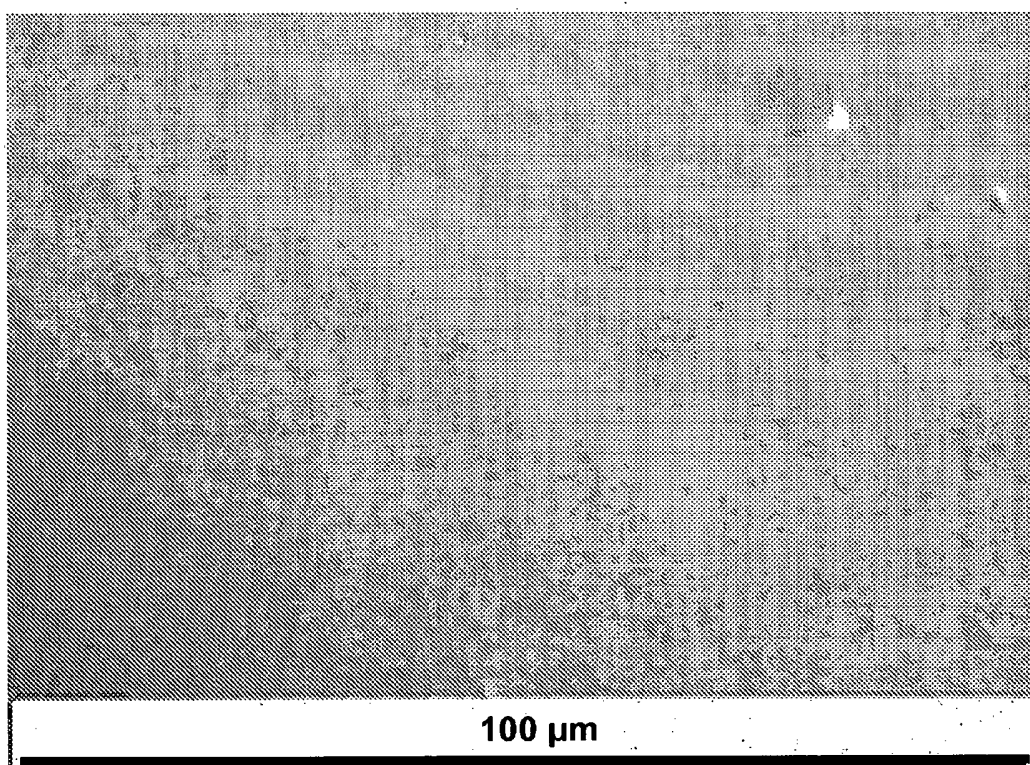


A

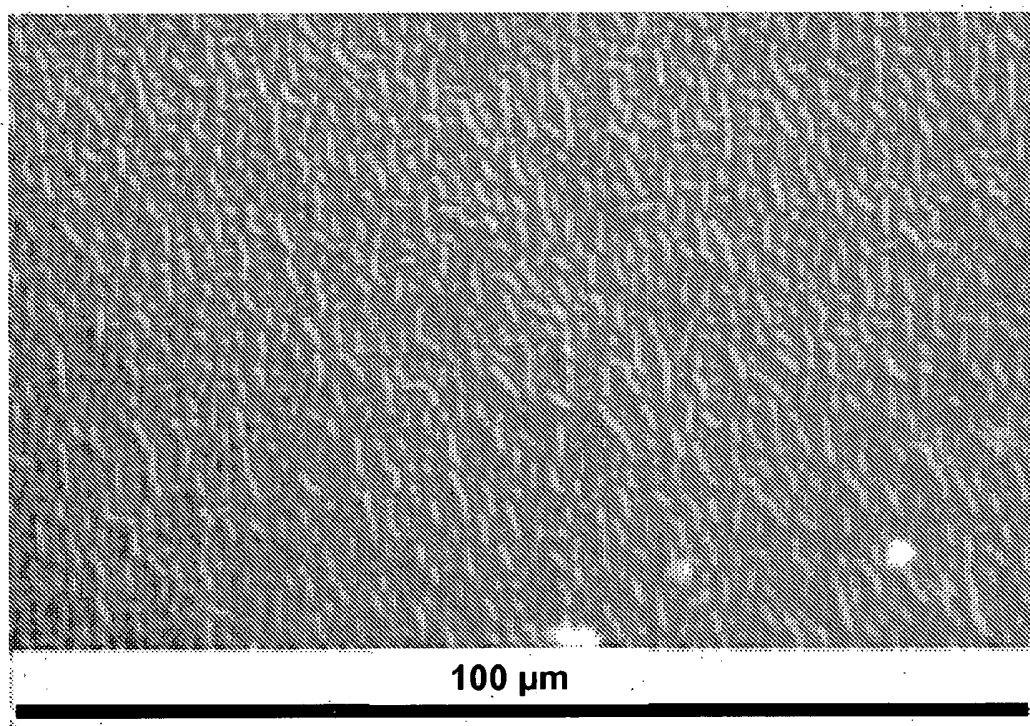


B

Figure 1

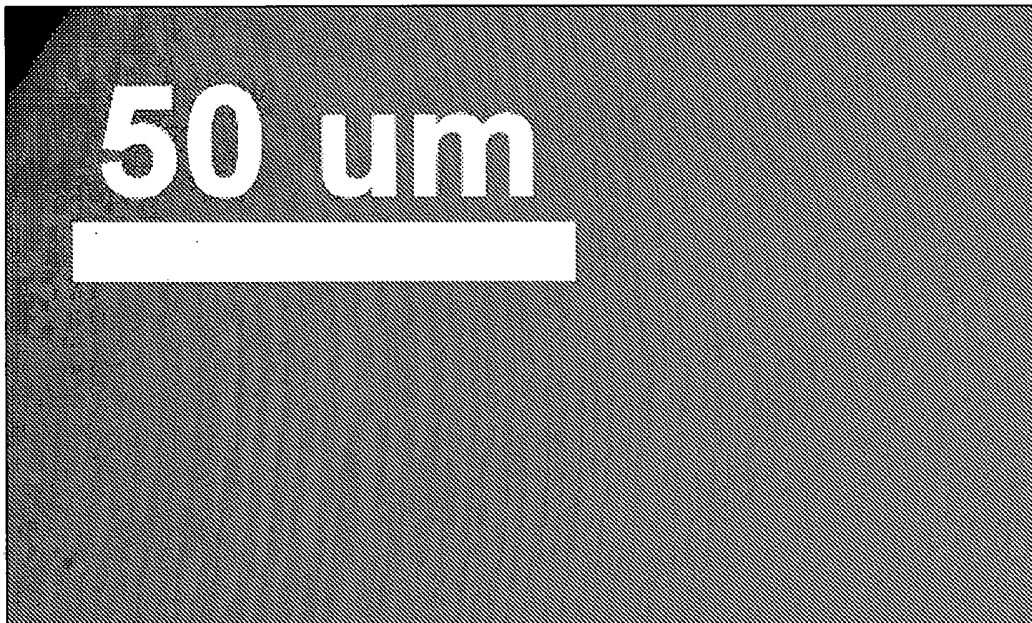

A

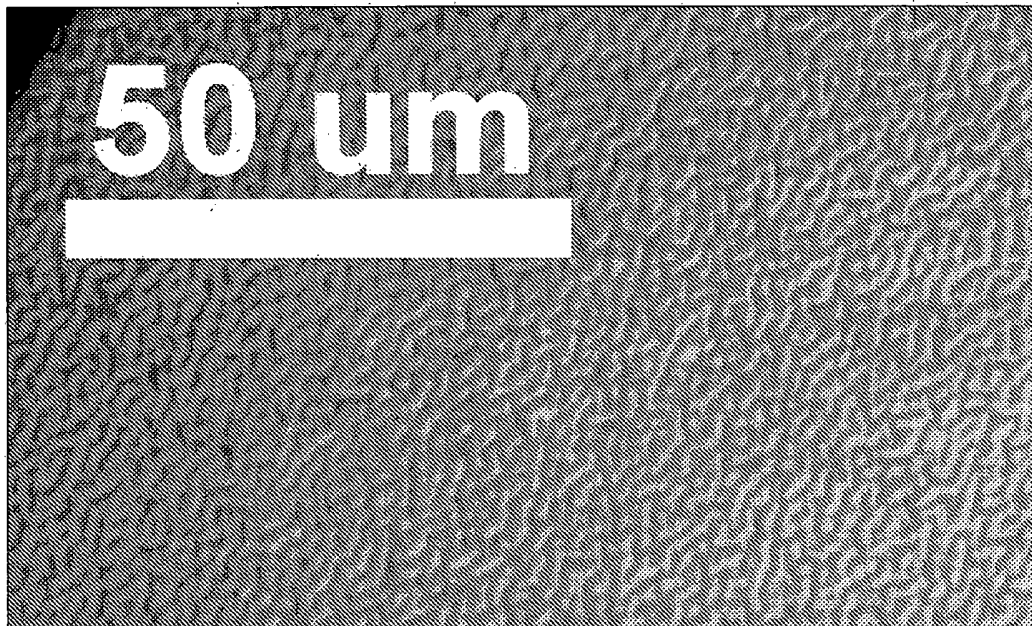

B

Figure 2

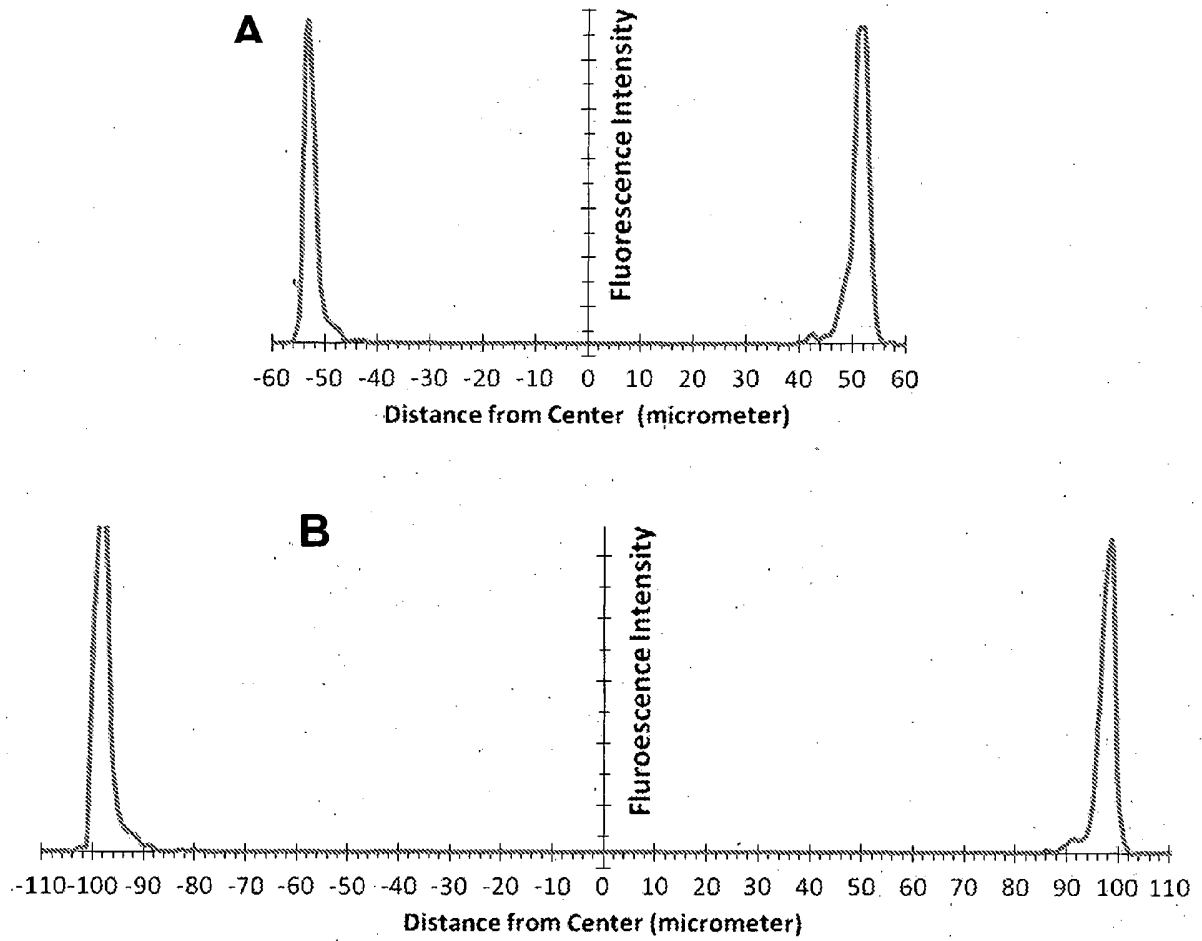


Figure 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4045547 A [0005]
- US 4042552 A [0005]
- US 5198477 A [0005]
- US 5219965 A [0005]
- US 6367929 B [0005]
- US 6822016 B [0005]
- US 7279507 B [0005]
- US 20060079598 A1 [0005]
- US 20060251696 A1 [0005]
- US 20080124376 A1 [0005]
- US 2002086160 A1 [0006]
- US 5461433 A [0056]
- EP 1465931 A [0058] [0091]
- US 3408429 A [0061]
- US 4347198 A [0061]
- US 5508317 A [0061]
- US 5583463 A [0061]
- US 5789464 A [0061]
- US 5849810 A [0061]
- US 5760100 A [0063] [0119]
- US 4136250 A [0063]
- US 4153641 A [0063]
- US 4182822 A [0063]
- US 4189546 A [0063]
- US 4343927 A [0063]
- US 4254248 A [0063]
- US 4355147 A [0063]
- US 4276402 A [0063]
- US 4327203 A [0063]
- US 4341889 A [0063]
- US 4486577 A [0063]
- US 4543398 A [0063]
- US 4605712 A [0063]
- US 4661575 A [0063]
- US 4684538 A [0063]
- US 4703097 A [0063]
- US 4833218 A [0063]
- US 4837289 A [0063]
- US 4954586 A [0063]
- US 4954587 A [0063]
- US 5010141 A [0063]
- US 5034461 A [0063]
- US 5070170 A [0063]
- US 5079319 A [0063]
- US 5039761 A [0063]
- US 5346946 A [0063]
- US 5358995 A [0063]
- US 5387632 A [0063]
- US 5416132 A [0063]
- US 5451617 A [0063]
- US 5486579 A [0063]
- US 5962548 A [0063]
- US 5981675 A [0063]
- US 6039913 A [0063] [0064]
- US 6762264 B [0063]
- US 4259467 A [0063]
- US 4260725 A [0063]
- US 4261875 A [0063]
- US 7091283 B [0064]
- US 7268189 B [0064]
- US 7238750 B [0064]
- US 7521519 B [0064]
- US 20080015315 A1 [0064]
- US 20080143958 A1 [0064]
- US 20080143003 A1 [0064]
- US 20080234457 A1 [0064]
- US 20080231798 A1 [0064]
- US 61180449 B [0064]
- US 61180453 B [0064]
- EP 632329 A [0069]
- US 4444711 A, Schad [0078]
- US 4460534 A, Boehm [0078]
- US 5843346 A, Morrill [0078]
- US 5894002 A, Boneberger [0078]
- US 27494294 A [0080]
- US 10732566 A [0080]
- US 10721913 A [0080]
- US 6627124 B [0080]
- US 6218508 B [0100]
- US 5849811 A [0116]
- US 7384590 B [0145] [0157]
- US 7387759 B [0145] [0157]

Non-patent literature cited in the description

- **GUVENTIREN et al.** Swelling-Induced Surface Patterns in Hydrogels with Gradient Crosslinking Density. *Adv. Funct. Mater.*, 2009, vol. 19, 3038-3045 [0040]
- **MICHAEL J. DOUGHTY.** *Current Eye Research*, 2004, vol. 28 (3), 203-214 [0042]

EP 2 718 751 B1

- **WINTERTON et al.** The Cornea: Transactions of the World Congress on the Cornea 111. Raven Press, 1988, 273-280 [0119]
- **S-K KAM ; J. GREGORY.** Charge determination of synthetic cationic polyelectrolytes by colloid titration. *Colloid & Surface A: Physicochem. Eng. Aspect*, 1999, vol. 159, 165-179 [0132]

Nano-texturájú szilikon hidrogél lencsék

Szabadalmi igénypontok

1. Eljárás kontaktlencsék, előnyösen szilikon-hidrogél kontaktlencsék előállítására, melyek nano-texturált felületűek, melynek során:

(1) létrehozunk egy szerves alapú oldószert és egy, szerves alapú oldószerben oldott polimer bevonat-anyagot tartalmazó szerves alapú bevonó oldatot, ahol a polimer bevonat-anyag többszörös első reaktív funkciós csoportokat és többszörös affinitásos csoportokat vagy gyököket tartalmaz;

(2) egy kontaktlencsét a szerves alapú bevonó oldattal hozzuk érintkezésbe, a kontaktlencse duzzasztására és a kontaktlencsén a polimer bevonat-anyag közbenső kialakítására, ahol a kontaktlencse felületén és felületéhez közel a polimer bevonat-anyag affinitásos csoportjaival vagy gyökeivel kölcsönhatásra lépni képes monomer egységeket és/vagy hidrofób gyököket és/vagy szegmenseket tartalmaz, oly módon, hogy a polimer bevonat-anyagot megkösse, ahol a polimer bevonat-anyag átlagos molekulatömege oly módon választott, hogy eléggé nagy ahhoz, hogy a polimer bevonat-anyag részlegesen behatoljon a szerves alapú oldattal duzzasztott kontaktlencsébe (és előnyösen legalábbis körülbelül 25,000 Dalton, előnyösebben legalább körülbelül 50,000 Dalton, még előnyösebben legalább körülbelül 75,000 Dalton, legelőnyösebben körülbelül 100,000 és 1,000,000 Dalton közötti);

(3) a felületén közbenső bevonattal rendelkező, duzzasztott kontaktlencsét egy vizes oldattal, vagy előnyösen vízzel hozzuk érintkezésbe, a felületén közbenső bevonattal rendelkező kontaktlencse zsugorítására, a kontaktlencsén egy nano-texturájú elsődleges bevonatot kialakítva; és

(4) az elsődleges bevonatban előforduló nano-texturát egy vízzoldható és többszörös második reaktív funkciós csoportokat tartalmazó térhálósítható hidrofil polimer anyaggal térhálósítva rögzítjük az elsődleges bevonatra az első reaktív funkciós csoportokon keresztül, olyan térhálósított polimer bevonat kialakítására, mely megtartja az alapozó bevonat nano-texturáját és a kontaktlencsének nano-texturált felületet biztosít, ahol az első reaktív funkciós csoport reagálhat a második reaktív funkciós csoporttal egy kapcsolószer jelenlétében vagy távollétében a polimer bevonat-anyag és a vízzoldható és térhálósítható hidrofil polimer anyag között keresztkötést létrehozva.

2. Az 1. igénypont szerinti eljárás, ahol a szerves alapú oldószer egy oldószerrendszer, mely egy vagy több szerves oldószerből, és adott esetben az oldószerrendszer összömegére

számított körülbelül 30% vagy kevesebb, előnyösen körülbelül 20% vagy kevesebb, előnyösebben körülbelül 15% vagy kevesebb, még előnyösebben körülbelül 10% vagy kevesebb, különösen körülbelül 5% vagy kevesebb vízből áll, ahol az egy vagy több szerves oldószer tripropilén-glikol metiléter, dipropilén-glikol metiléter, etilén-glikol n-butiléter, aceton, metil-etil-ke-ton, dietilén-glikol n-butiléter, dietilén-glikol metiléter, etilén-glikol feniléter, propilén-glikol metiléter, propilén-glikol metiléter acetát, dipropilén-glikol metiléter acetát, propilén-glikol n-propiléter, dipropilén-glikol n-propiléter, tripropilén-glikol n-butiléter, propilén-glikol n-butiléter, dipropilén-glikol n-butiléter, tripropilén-glikol n-butiléter, propilén-glikol feniléter, dipropilén-glikol dimetiléter, polietilén-glikolok, polipropilén-glikolok, etilacetát, butilacetát, amilacetát, metil-laktát, etil-laktát, i-propil laktát, egy 1-12 szénatomos alkohol, 1-metil-2-pirrolidon, N,N-dimetilpropionamid, dimetilformamid, dimetilacetamid, dimetilpropionamid, N-metilpirrolidinon, 1,2-propilén-glikol, körülbelül 200 vagy kisebb molekulatömegű polietilén-glikol, tetrahidrofuran, metilén-klorid, és kombinációik közül választott.

3. Az 1. vagy 2. igénypont szerinti eljárás, ahol a kontaktlencse a szerves alapú bevonó oldattal legalább körülbelül 50%, előnyösen legalább körülbelül 75%, előnyösebben legalább körülbelül 100%, még előnyösebben legalább körülbelül 150% mértékben duzzasztott.

4. Az 1., 2. vagy 3. igénypont szerinti eljárás, ahol a többszörös első reaktív funkciós csoportok karboxilcsoportok, azetidiniumcsoport, aminocsoportok, azlaktoncsoportok, izocianátcsoportok, epoxicssoportok, aziridincsoportok, tiolcsoportok, hidroxilcsoportok, és kombinációik, előnyösebben karboxilcsoportok, azetidiniumcsoportok, aminocsoportok, azlaktoncsoportok, izocianátcsoportok, epoxicssoportok, aziridincsoportok, tiolcsoportok és kombinációik, még előnyösebben karboxilcsoportok, azetidiniumcsoport, aminocsoportok, epoxicssoportok, tiolcsoportok, és kombinációik, legelőnyösebben karboxilcsoportok, azetidiniumcsoport, aminocsoportok, epoxicssoportok, tiolcsoportok, és kombinációik közül választottak; ahol az affinitásos csoportok vagy gyökök az első reaktív funkciós csoportokkal azonosak vagy azoktól eltérőek, és karboxilcsoportok, ammoniumcsoportok, hidrofób gyökök, hidrofób szegmenssek, és kombinációik, karboxilcsoportok, ammoniumcsoportok, és kombinációik közül választottak.

5. Az 1-4. igénypontok bármelyike szerinti eljárás, ahol a polimer bevonat-anyag: (1) egy ammónium-tartalmú viniles monomer vagy karboxil-tartalmú viniles monomer homopolimerje; (2) egy ammónium-tartalmú viniles monomer vagy karboxil-tartalmú viniles monomer kopolimerje; (3) egy egy vagy több ammónium-tartalmú viniles monomer és/vagy karboxil-tartalmú viniles monomernek (met)akrilamid, N,N-dimetil(met)akrilamid, N-vinilpirrolidon (NVP), N,N-dimetilaminoetil(met)akrilát, N,N-dimetilaminopropil (met)akrilamid,

glicerínmetakrilát, 3-akrilóilamino-1-propanol, N-hidroxietilakrilamid, N-[tris(hidroximetil)metil]-akrilamid, N-metil-3-metilén-2-pirrolidon, 1-etil-3-metilén-2-pirrolidon, 1-metil-5-metilén-2-pirrolidon, 1-etil-5-metilén-2-pirrolidon, 5-metil-3-metilén-2-pirrolidon, 5-etil-3-metilén-2-pirrolidon, 2-hidroxietil(met)akrilát, hidroxipropil (met)akrilát, 1500 Daltonig terjedő átlagos molekulatömegű 1-4 szénatomos-alkoxi polietilén-glikol (met)akrilát, N-vinil formamid, N-vinil acetamid, N-vinil izopropilamid, N-vinil-N-metilacetamid, allyl alkohol, vinil alkohol (a kopolimerben a vinilacetát hidrolizált formája), egy foszforilkolin-tartalmú viniles monomer, és kombinációik közül választott nem-reaktív viniles monomerrel és adott esetben egy vagy több, azetidiniumcsoport, azlaktoncsoportok, izocianátcsoporthoz, epoxicsoporthoz, aziridincsoportok, és kombinációik közül választott reaktív funkciók csoportokat tartalmazó egy vagy több reaktív viniles monomerrel képzett kopolimerje; (4) polietilénimin (PEI); (5) leágazó primer és/vagy szekunder aminocsoportokkal rendelkező polivinilalkohol; (6) legalább egy hidrofób szegmenst tartalmazó tömb-kopolimer (előnyösen polidimetilsziloxán, poli(propilén-oxid), poli(butilén-oxid), lényegében legalább egy, szilikon-tartalmú vinilmonomerekből álló polimer lánc vagy szegmens, 8-16 szénatomos alkil (met)akrilát, 8-16 szénatomos alkil (met)akrilamid, és kombinációik közül választott) és azetidiniumcsoport, azlaktoncsoportok, izocianátcsoporthoz, epoxicsoporthoz, aziridincsoportok, tiolcsoportok, és kombinációik közül választott funkciók csoportokat tartalmazó polimer szegmensek; vagy (7) ezek kombinációi.

6. Az 1-5. igénypontok bármelyike szerinti eljárás, ahol a polimer bevonat-anyag legalább körülbelül 70 mól %, előnyösen legalább körülbelül 80 mól%, előnyösebben legalább körülbelül 90 mól%, még előnyösebben legalább körülbelül 95 mól% egy vagy több karboxilcsoportot tartalmazó viniles monomer egységet tartalmazó polimer vagy kopolimer, ahol az egy vagy több karboxilcsoportot tartalmazó viniles monomer akrilsav, egy 1-4 szénatomos alkilakrilsav (például metakrilsav, etilakrilsav, propilakrilsav, butilakrilsav), N,N-2-akrilamidoglikolsav, beta metil-akrilsav (krotonsav), alfa-fenil akrilsav, beta-akriloxi propionsav, szorbinsav, angelinsav, fahéjsav, 1-karboxi-4-fenil butadién-1,3, itakonsav, citrakonsav, mezakonsav, glutakonsav, akonitinsav, maleinsav, fumársav és kombinációi közül választott.

7. A 6. igénypont szerinti eljárás, ahol a polimer bevonat-anyag: egy egyenes vagy elágazó poliakrilsav; egy egyenes vagy elágazó polimetakrilsav; egy legalább körülbelül 70 mól%, előnyösen legalább körülbelül 80 mól%, előnyösebben legalább körülbelül 90 mól%, még előnyösebben legalább körülbelül 95 mól% akrilsavat tartalmazó egyenes vagy elágazó poli(akrilsav-ko-akrilamid); egy legalább körülbelül 70 mól%, előnyösen legalább körülbelül 80 mól%, előnyösebben legalább körülbelül 90 mól%, még előnyösebben legalább körülbelül

95 mól% metakrilsavat tartalmazó egyenes vagy elágazó poli(metakrilsav-ko-akrilamid); egy legalább körülbelül 70 mól%, előnyösen legalább körülbelül 80 mól%, előnyösebben legalább körülbelül 90 mól%, még előnyösebben legalább körülbelül 95 mól% akrilsavat tartalmazó egyenes vagy elágazó poli(akrilsav-ko-vinilpirrolidon); egy legalább körülbelül 70 mól%, előnyösen legalább körülbelül 80 mól%, előnyösebben legalább körülbelül 90 mól%, még előnyösebben legalább körülbelül 95 mól% metakrilsavat tartalmazó egyenes vagy elágazó poli(metakrilsav-ko-vinilpirrolidon).

8. Az 1-7. igénypontok bármelyike szerinti eljárás, ahol a kontaktlencse egy szilikon-tartalmú viniles monomer, egy szilikon-tartalmú viniles makromer, egy szilikon-tartalmú prepolimer, egy hidrofil viniles monomer, egy hidrofób viniles monomer, egy térhálósító szer, egy szabadgyökös iniciátor (fotoiniciátor vagy hőiniciátor), egy hidrofil viniles makromer/prepolimer, egy UV-abszorbens szer, egy láthatóságot színező szer (például festékek, pigmentek vagy keverékeik), mikrobaellenes szerek (e.g., előnyösen ezüst nanorészecskék), egy bioaktív szer, egy öblíthető kenőanyag, egy öblíthető könny-stabilizáló szer, és kombinációik közül választott legalább egy komponenst tartalmazó lencse-összetétel polimerizációjával nyert szilikon hidrogél kontaktlencse.

9. Az 1-8. igénypontok bármelyike szerinti eljárás, ahol a vízzoldható és térhálósítható hidrofil polimer anyag második reaktív funkciós csoportjai a következők: karboxilcsoportok, azetidiniumcsoport, aminocsoportok, azlaktoncsoportok, izocianátcsoportok, epoxicssoportok, aziridincsoportok, hidroxilcsoportok, tiolcsoportok, vagy kombinációik; előnyösen karboxilcsoportok, azetidiniumcsoportok, aminocsoportok, azlaktoncsoportok, izocianátcsoportok, epoxicssoportok, aziridincsoportok, tiolcsoportok, vagy kombinációik; előnyösebben karboxilcsoportok, azetidiniumcsoport, aminocsoportok, epoxicssoportok, tiolcsoportok, vagy kombinációik; még előnyösebben azetidiniumcsoport, epoxicssoportok, vagy kombinációik, azzal a feltétellel, hogy egy második funkciós csoport egy kapcsolási reakcióban reagálhat a polimer bevonat-anyag egy első funkciós csoportjával egy kapcsoló szer jelenlétében vagy előnyösen távollétében egy keresztkötés létrehozására.

10. Az 1-9. igénypontok bármelyike szerinti eljárás, ahol a második reaktív funkciós csoportok hővel térhálósítható csoportok, előnyösebben azetidiniumcsoportok és/vagy epoxicssoportok, még előnyösebben azetidiniumcsoportok.

11. Az 1-10. igénypontok bármelyike szerinti eljárás, ahol a vízzoldható és térhálósítható hidrofil polimer anyag egy részlegesen térhálósított hidrofil polimer, mely egy háromdimenziós hálózatot és a második reaktív funkciós csoportokat a hálózaton belül tartalmazza.

12. Az 1-11. igénypontok bármelyike szerinti eljárás, ahol a vízdoldható és térhálósítható hidrofíli polimer anyag tartalmaz: (i) körülbelül 20 tömeg% és körülbelül 95 tömeg %, előnyösen körülbelül 35 tömeg% és körülbelül 90 tömeg%, előnyösebben körülbelül 50 tömeg% és körülbelül 85 tömeg% közötti mennyiségű, epiklórhidrin-funkcionalizált poliaminból vagy poliamidoaminból származó első polimer láncokat, (ii) körülbelül 5 tömeg% és körülbelül 80 tömeg %, előnyösen körülbelül 10 tömeg% és körülbelül 65 tömeg%, még előnyösebben körülbelül 15 tömeg% és körülbelül 50 tömeg% közötti mennyiségű hidrofíli gyököket vagy aminocsoport, karboxilcsoport, tiolcsoport, és kombinációik közül választott legalább egy reaktív funkciók csoporttal rendelkező hidrofilitást fokozó szerből származó második polimer láncot, ahol a hidrofíli gyökök vagy második polimer láncok kovalensen kapcsolódnak az első polimer láncokhoz egy vagy több, az epiklórhidrin-funkcionalizált poliamin vagy poliamidoamin egy azetidiniumcsoportján és a hidrofilitást fokozó szer egy amino, karboxil vagy tiolcsoportján keresztül, és (iii) azetidiniumcsoportokat, melyek az első polimer láncok részei, vagy az első polimer láncokhoz kovalensen kapcsolódó kinyúló vagy terminális csoportokat.

13. A 12. igénypont szerinti eljárás, ahol a hidrofilitást fokozó szer: egy amino-, karboxil- vagy tiol-tartalmú monoszaccharid (például 3-amino-1,2-propándiol, 1-tioglicerín, 5-keto-D-glükonsav, galaktózamin, glükózamin, galakturonsav acid, glukonsav, glükózaminsav, mannózamin, szaccharínsav 1,4-lakton, szaccharidsav, ketodeoxinonulózonsav, *N*-metil-D-glukamin, 1-amino-1-deoxi- β -D-galaktóz, 1-amino-1-deoxiszorbitol, 1-metilamino-1-deoxiszorbitol, *N*-aminoetilglukonamid); egy amino-, karboxil- vagy tiol-tartalmú diszaccharid (például kondroitin diszaccharid nátriumsó, di(β -D-xilopiranozil)amín, digalakturonsav, heparin diszaccharid, hialuronsav diszaccharid, laktobionsav); egy amino-, karboxil- vagy tiol-tartalmú oligoszaccharid (például karboximetil- β -ciklodextrin nátriumsó, trigalakturonsav); vagy ezek kombinációi.

14. A 12. igénypont szerinti eljárás, ahol a hidrofilitást fokozó szer: karboximetilcellulóz, melynek karboxil-tartalma körülbelül 40% vagy kevesebb, az ismétlődő $[-C_6H_{10-m}O_5(CH_2CO_2H)_m]-$ (ahol *m* értéke 1 - 3) egységek összetételére számítva; karboxietilcellulóz, melynek karboxil-tartalma körülbelül 36% vagy kevesebb, az ismétlődő $[-C_6H_{10-m}O_5(C_2H_4CO_2H)_m]-$ (ahol *m* értéke 1 - 3) egységek összetételére számítva; karboxipropilcellulóz, melynek karboxil-tartalma körülbelül 32% vagy kevesebb, az ismétlődő $[-C_6H_{10-m}O_5(C_3H_6CO_2H)_m]-$ egységek összetételére számítva, ahol *m* értéke 1-3; hialuronsav, melynek karboxil-tartalma körülbelül 11 % az ismétlődő $-(C_{13}H_{20}O_9NCO_2H)-$ egységek összetételére számítva; kondroitin-szulfát, melynek karboxil-tartalma körülbelül

9.8% az ismétlődő $-(C_{12}H_{18}O_{13}NS CO_2H)-$ egységek összetételére számítva; vagy ezek kombinációi.

15. A 12. igénypont szerinti eljárás, ahol a hidrofilitást fokozó szer: PEG-NH₂; PEG-SH; PEG-COOH; H₂NPEG-NH₂; HOOC-PEG-COOH; HS-PEG-SH; H₂N-PEG-COOH; HOOC-PEG-SH; H₂N-PEG-SH; egy vagy több amino, karboxil vagy tiolcsoporttal rendelkező többkarú PEG; egy vagy több amino, karboxil vagy tiolcsoporttal rendelkező PEG dendrimerek; akrilamid (AAm), N,N-dimetilakrilamid (DMA), N-vinilpirrolidon (NVP), N-vinil-N-metilacetamid, glicerín(met)akrilát, hidroxietil(met)akrilát, N-hidroxietil(met)akrilamid, 400-ig terjedő Dalton átlagos molekulatömegű 1-4 szénatomos-alkoxi polietilén-glikol (met)akrilát, vinilalkohol, N-metil-3-metilén-2-pirrolidon, 1-metil-5-metilén-2-pirrolidon, 5-metil-3-metilén-2-pirrolidon, N,N-dimetilaminoetil(met)akrilát, N,N-dimetilaminopropil (met)akrilamid, (met)akrilolioxietilfoszforilkolín, és kombinációik közül választott nem-hidrofil viniles monomer valamely monoamino-, monokarboxil-, diamino- vagy dikarboxil-terminális homo- vagy kopolimerje; egy kopolimer, mely (1) körülbelül 0.1 tömeg% és körülbelül 30 tömeg%, előnyösen körülbelül 0.5 tömeg% és körülbelül 20 tömeg%, előnyösebben körülbelül 1 tömeg% és körülbelül 15 tömeg%, (met)akrilsav, allilamin és/vagy amino-(2-4 szénatomos)-alkil (met)akrilát, és (2) legalább egy nem-hidrofil viniles monomer akrilamid, N,N-dimetilakrilamid, N-vinilpirrolidon, (met)akrilolioxietilfoszforilkolín, N-vinil-N-metilacetamid, glicerín(met)akrilát, hidroxietil(met)akrilát, N-hidroxietil(met)akrilamid, 400-ig terjedő Dalton átlagos molekulatömegű 1-4 szénatomos alkoxi polietilén-glikol (met)akrilát, és kombinációik közül választott összetétel polimerizációs terméke.

16. A 12. igénypont szerinti eljárás, ahol a hidrofilitást fokozó szer: PEG-NH₂; PEG-SH; PEG-COOH; monoamino-, monokarboxil-, diamino- vagy dikarboxil-terminált polivinilpirrolidon; monoamino-, monokarboxil-, diamino vagy dikarboxil-terminált poliakrilamid; monoamino-, monokarboxil-, diamino- vagy dikarboxil-terminált poli(DMA); monoamino- vagy monokarboxil-, diamino- vagy dikarboxil-terminált poli(DMA-ko-NVP); monoamino-, monokarboxil-, diamino- vagy dikarboxil-terminált poli(NVP-ko-N,N-dimetilaminoetil(met)akrilát)); monoamino-, monokarboxil-, diamino- vagy dikarboxil-terminált poli(vinilalkohol); monoamino-, monokarboxil-, diamino- vagy dikarboxil-terminált poli[(met)akrilolioxietilfoszforilkolín] homopolimer vagy kopolimer; monoamino-, monokarboxil-, diamino- vagy dikarboxil-terminált poli(NVP-ko-vinil alkohol); monoamino-, monokarboxil-, diamino- vagy dikarboxil-terminált poli(DMA-ko-vinil alkohol); körülbelül 0.1 tömeg% és körülbelül 30 tömeg%, előnyösen körülbelül 0.5 tömeg% és körülbelül 20 tömeg%, előnyösebben körülbelül 1 tömeg% és körülbelül 15 tömeg% közötti mennyiségű (met)akrilsavat tartalmazó poli[(met)akrilsav-ko-akrilamid]; körülbelül 0.1 tömeg% és körülbe-

lül 30 tömeg%, előnyösen körülbelül 0.5 tömeg% és körülbelül 20 tömeg%, előnyösebben körülbelül 1 tömeg% és körülbelül 15 tömeg% közötti mennyiségű (met)akrilsavat tartalmazó poli[(met)akrilsav-ko-NVP]; egy kopolimer, mely (1) (met)akrilolioxietilfoszforilkolint és (2) körülbelül 0.1 tömeg% és körülbelül 30 tömeg%, előnyösen körülbelül 0.5 tömeg% és körülbelül 20 tömeg%, előnyösebben körülbelül 1 tömeg% és körülbelül 15 tömeg% közötti mennyiségű (met)akrilsavat, allilamint és/vagy amino-(2-4 szénatomos)-alkil (met)akrilátot és ezek kombinációit tartalmazó összetétel polimerizációs terméke; vagy ezek kombinációi.

17. Az 1-16. igénypontok bármelyike szerinti eljárás, ahol a nano-textúrának az első bevonatban történő rögzítési lépését a nano-textúrával rendelkező első bevonatot tartalmazó, és a vízben oldható, térhálósítható hidrofíli polimer anyagot tartalmazó bevonó oldatba mártott kontaktlencse autoklávozásával végezzük, melyet lezárt csomagolásban végzünk, körülbelül 118°C és körülbelül 125°C hőmérsékleten, körülbelül 20-90 percen át, ahol a vízdoldható térhálósítható hidrofíli polimer második reaktív funkció csoportjai azetidiniumcsoportok és/vagy epoxicsoportok.

18. Az 1-17. igénypontok bármelyike szerint előállított szilikon hidrogél kontaktlencse, ahol a szilikon hidrogél kontaktlencse egy szilikon hidrogél lencse testet és egy azon elhelyezkedő nem-szilikon hidrogél bevonatot tartalmaz, ahol a bevonat csigaszzerű (winkle) felületi mintát (nano-textúrát) tartalmaz, melynek érdessége (azaz egy aritmetikus közepes érdessége, R_a) körülbelül 5 nm és körülbelül 600 nm, előnyösen körülbelül 10 nm és körülbelül 400 nm, még előnyösebben körülbelül 15 nm és körülbelül 200 nm, még előnyösebben körülbelül 20 nm és körülbelül 100 nm közötti.

19. A 18. igénypont szerinti szilikon hidrogél kontaktlencse, ahol a szilikon hidrogél kontaktlencse az alábbiak közül választott tulajdonságok közül legalább eggyel rendelkezik: (1) előnyösen körülbelül 90° vagy annál kisebb, előnyösebben körülbelül 80° vagy kisebb, még előnyösebben körülbelül 70° vagy kisebb, legelőnyösebben körülbelül 60° vagy kisebb átlagos vízkontakt szöggel jellemzett felületi hidrofilitás/nedvesíthetőség; (2) legalább körülbelül 50, előnyösen legalább körülbelül 70, előnyösebben legalább körülbelül 80, még előnyösebben legalább körülbelül 90 barrer/mm oxigén átvihetőség; (3) körülbelül 1.5 MPa vagy kevesebb, előnyösen körülbelül 1.2 MPa vagy kevesebb, előnyösebben körülbelül 1.0 vagy kevesebb, még előnyösebben körülbelül 0.3 MPa és körülbelül 1.0 MPa közötti elasztikus együttható; (4) körülbelül 18% és körülbelül 70%, előnyösebben körülbelül 20% és körülbelül 60 tömeg% közötti víztartalom teljesen hidratált állapotban; és (5) ezek kombinációi.

20. A 19. igénypont szerinti szilikon hidrogél kontaktlencse, ahol a bevonat féregszerű felületi mintát tartalmaz, melynek érdessége (azaz egy aritmetikus közepes érdessége, R_a) körülbelül 5 nm és körülbelül 600 nm, előnyösen körülbelül 10 nm és körülbelül 400 nm, még előnyösebben körülbelül 15 nm és körülbelül 200 nm, még előnyösebben körülbelül 20 nm és körülbelül 100 nm közötti.

Ny. Szentpéteri Ádám
Szerzői jogi igazgató
Szerzői jogi és Iparjogi Iroda
H-1052 Budapest, Váci utca 213.
Telefon: +36 (0)1 461-1999
Email: szentpeteri@szjg.hu