

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 May 2010 (06.05.2010)


PCT

(10) International Publication Number
WO 2010/050893 A1

- (51) **International Patent Classification:**
H04R 25/00 (2006.01)
- (21) **International Application Number:**
PCT/SG2008/000416
- (22) **International Filing Date:**
31 October 2008 (31.10.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):**
SIEMENS MEDICAL INSTRUMENTS PTE LTD [SG/SG]; Blk 28 Ayer Rajah Crescent, #06-08, Singapore 139959 (SG).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **CHUA, Swee Kim** [SG/SG]; Blk 5, Toh Yi Drive, #10-221, Singapore 590005 (SG). **KOO, Wee Haw** [MY/SG]; Blk 294, Choa Chu Kang Ave 2, #13-183, Singapore 680294 (SG).
- (74) **Agent:** **GOH, Su Lin, Audrey;** Viering, Jentschura & Partner LLP, P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))

(54) **Title:** HEARING AID

FIG 2

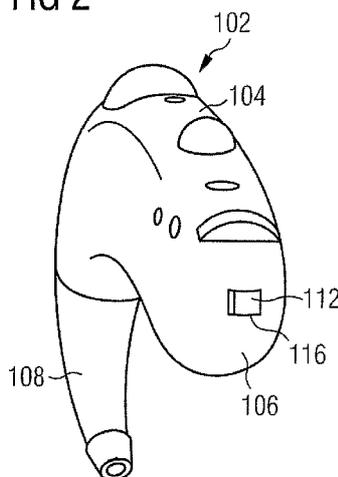

(57) **Abstract:** In an embodiment, a hearing aid (102) is provided. The hearing aid (102) may include a hearing aid housing (104), the hearing aid housing (104) including a receiving portion; a battery chamber housing (106) coupled to the hearing aid housing; and a lock (112) positioned on the battery chamber housing (106). The lock (112) may include a first engaging portion; and a second engaging portion (116) coupled to the first engaging portion, the first engaging portion may include a material of a higher tensile strength than the second engaging portion; wherein the first engaging portion may be configured to be movable relative to the battery chamber housing (106) such that the first engaging portion may be coupled to the receiving portion to lock the battery chamber housing (106).



WO 2010/050893 A1

DESCRIPTION**HEARING AID**

5 Embodiments relate to a hearing aid.

A hearing aid is usually fitted in or behind the ear of the user to amplify the sound for the user. Some popular types of hearing aids include behind-the-ear (BTE) hearing aids, in-
10 the-ear (ITE) hearing aids, in-the-canal (ITC) hearing aids, completely-in-the-canal (CIC) hearing aids, etc.

A hearing aid usually includes a hearing aid housing within which a microphone for collecting sound waves, a signal
15 processing circuit (also referred to as a speech processing circuit) for processing the collected sound waves and a loudspeaker (which may also be referred to as a receiver in the field of hearing aids) may be housed. To provide power for the microphone, the signal processing circuit and the
20 loudspeaker, the hearing aid usually includes a battery chamber housing, also referred to as a battery door, coupled to the hearing aid housing to receive a battery. The hearing aid may also include an ear hook coupled to the hearing aid housing to fix the hearing aid housing when worn by a user.

25

Fig. IA shows a conventional behind-the-ear hearing aid 100 and Fig. IB shows the conventional behind-the-ear hearing aid 100 with open battery chamber housing 103. The hearing aid 100 may include a hearing aid housing 101, a battery chamber
30 housing 103 coupled to the hearing aid housing 101 and an ear hook 105 coupled to the hearing aid housing 101 to fix the hearing aid housing 101 when worn by a hearing aid user.

The hearing aid housing 101 may accommodate a microphone, a
35 signal processing circuit and a loudspeaker. The battery chamber housing 103 may be pivoted into or out of the hearing aid housing 101. The battery chamber housing 103 may receive a battery (not shown) used for driving the hearing aid 100.

The hearing aid 100 may also include a lock (not shown) made with either plastic or metal. Due to the small size of the hearing aid 100, the lock is usually small in size. It may be
5 desired to improve the safety of the hearing aid lock while keeping the flexibility thereof.

In various embodiments, a hearing aid may be provided, which may include a lock which may provide an increased latching
10 strength for the hearing aid user.

An embodiment relates to a hearing aid. The hearing aid may include a hearing aid housing, the hearing aid housing including a receiving portion; a battery chamber housing
15 coupled to the hearing aid housing; and a lock positioned on the battery chamber housing. The lock may include a first engaging portion; and a second engaging portion coupled to the first engaging portion, the first engaging portion may include a material of a higher tensile strength than the
20 second engaging portion; wherein the first engaging portion may be configured to be movable relative to the battery chamber housing such that the first engaging portion may be coupled to the receiving portion to lock the battery chamber housing. The higher tensile strength of the first engaging
25 portion when compared to the second engaging portion may provide for an increased latching strength to the lock for the hearing aid user.

In an embodiment, the first engaging portion may include a
30 cylindrical rod. The first engaging portion may also include an elongated portion of any other suitable shape. It should be mentioned that another suitable shape of the first engaging portion may also be provided in another embodiment.

35 In an embodiment, the first engaging portion may include a metallic material. The first engaging portion may also include any other suitable material which may be able to

provide a high tensile strength for locking of the battery chamber housing.

In an embodiment, the second engaging portion may include a first portion and a second portion. The second portion may be of a larger dimension as compared to the first portion. The second portion of the second engaging portion may be positioned adjacent and/or in connection with the first portion of the second engaging portion. The second engaging portion may also include any suitable number of portions depending on design requirements.

In an embodiment, the first portion of the second engaging portion may substantially surround the first engaging portion.

In an embodiment, the second portion of the second engaging portion may include a first surface and a second surface, the second surface may be positioned opposite to the first surface. The first surface and the second surface may be planar surfaces or any suitable surfaces.

In an embodiment, the second portion of the second engaging portion may include at least one recess and at least one protrusion on the first surface. The first surface of the second portion of the second engaging portion may include any suitable number of recesses and protrusions depending on design requirements. Each recess may be positioned between two protrusions. Each of the recess and two protrusions combination may be configured to allow for a hearing aid user to insert a suitable device, for example a screw driver or a device with a sharp end, into the recess to lock or unlock the battery chamber housing. The dimensions of the recess may be configured according to the dimension of the suitable device to be inserted therein.

In an embodiment, the second portion of the second engaging portion may include a marking on the at least one protrusion

on the first surface. Each or all the protrusions may be configured to allow printing on the protrusions so as to provide an indication to the hearing aid user the position for the insertion of the screw driver to lock or unlock the battery chamber housing. The marking on the protrusion may be performed by any suitable printing processes, for example by-laser marking. Typically, the screw driver may be inserted into the recess between two protrusions with marking.

10 In an embodiment, the battery chamber housing may include at least one protrusion on the battery chamber housing. The number of protrusions on the battery chamber housing may dependent on design or user requirements. The at least one protrusion may be in contact with the lock when the lock is positioned on the battery chamber housing.

In an embodiment, the second portion of the second engaging portion may include at least one recess and at least one protrusion on the second surface. The second surface of the second portion of the second engaging portion may include any suitable number of recesses and protrusions depending on design requirements. Each recess may be positioned between two protrusions. The combination of recesses and protrusions on the second surface of the second portion with the pressure of the recesses and protrusions or the lock in general against the at least one protrusion on the battery chamber housing provide for a "click" latching feel when the second portion moves relative to the battery chamber housing when the hearing aid user locks or unlocks the battery chamber housing. Therefore, the plurality of recesses and protrusions may be configured to provide an indication to the hearing aid user of the locking status when the hearing aid user locks or unlocks the battery chamber housing. This combination of the plurality of recesses and protrusions on the second surface of the second portion of the second engaging portion may also be termed as "a tooth slider".

In an embodiment, the second engaging portion may include a plastic material or any other suitable material which may allow for configuring the second engaging portion to include the plurality of recesses and protrusions. The second
5 engaging portion may be a plastic material which may be molded to the desired shape. The second engaging portion may also include any suitable material which may allow for printing of the marking or for a change of a color of the material .

10

In an embodiment, the receiving portion may include a first recess and a second recess. The first recess may be connected to the second recess. The second recess may be of a larger surface area compared to the first recess such that the first
15 recess may be situated within the second recess. The first recess may extend to a depth greater than the second recess to accommodate the first engaging portion. The first recess may also be the same as the second recess.

20

In an embodiment, the first recess may include a through hole or a blind hole. The recess may be of any suitable shape depending on design requirements. A through hole refers to a hole that may be made completely through the hearing aid housing. In other words, a through hole may be a hole that
25 goes all the way through the hearing aid housing. In contrast, a blind hole may be a hole which does not go all the way through the hearing aid housing.

30

In an embodiment, the second recess may include a slot. The second recess may have a rectangle shape or any suitable shape, corresponding to the second engaging portion. The second recess may also be a through slot or a blind slot depending on design requirements.

35

In an embodiment, the first recess may be of a complementary shape to the first engaging portion and the second recess may be of a complementary shape to the second engaging portion.

The first recess and the second recess may be of any suitable shape or dimensions depending on user requirements.

5 In an embodiment, the first engaging portion may be coupled to the first recess and the second engaging portion may be coupled to the second recess when the lock may be coupled to the receiving portion to lock the battery chamber housing.

10 In an embodiment, the hearing aid may include a behind-the-ear hearing aid.

In an embodiment, the hearing aid may further include an ear hook coupled to the hearing aid housing.

15 In an embodiment, the hearing aid housing may be configured to receive the battery chamber housing. For example, the battery chamber housing may be used to house a battery to provide power for the microphone, signal processing circuit, loudspeaker, and other suitable components or circuits in the
20 hearing aid, etc.

In an embodiment, the battery chamber housing may be pivotally mounted or mounted via any suitable means on the hearing aid housing. The battery chamber housing may also
25 include a notch for ease of opening and closing the battery chamber housing. For example, the battery chamber housing may be pivoted out of the hearing aid housing to put in or to take out a battery in the battery chamber housing, and may then be pivoted back into the hearing aid housing.

30

In an embodiment, the battery chamber housing may include a partially circular outer shape. The shape of the battery chamber housing may correspond with the shape of the battery so as to fix the battery within the hearing aid housing when
35 the battery chamber housing may be closed. The battery chamber housing may include any other suitable shape depending on design requirements.

In an embodiment, the hearing aid housing may include a plastic material or any other suitable material.

5 In an embodiment, the battery chamber housing may include a plastic material or any other suitable material.

In an embodiment, the hearing aid housing may be of the same material as the battery chamber housing. Use of the same material for both the hearing aid housing and the battery
10 chamber housing may provide for ease of fabrication for the hearing aid housing and the battery chamber housing.

In the drawings, like reference characters generally refer to the same parts throughout the different views. The drawings
15 are not necessarily to scale, emphasis instead generally being placed upon illustrating the principles of the invention. In the following description, various embodiments of the invention are described with reference to the following drawings, in which:

20

Figure 1A shows a perspective view of a conventional behind-the-ear hearing aid and Figure 1B shows a perspective view of the conventional behind-the-ear hearing aid with open battery chamber housing;

25

Figure 2 shows a perspective view of a hearing aid according to an embodiment;

Figure 3A and Figure 3B show a respective front view and back
30 view of a lock positioned in the hearing aid of Figure 2 according to an embodiment;

35

Figure 4A shows a perspective view of a hearing aid with close battery chamber housing and with an exposed front view of a lock positioned in the battery chamber housing according to an embodiment, Figure 4B shows an open battery chamber housing and with an exposed top view of a lock positioned in the battery

chamber housing according to an embodiment and Figure 4C shows an open battery chamber housing without the lock according to an embodiment; and

5 Figure 5A shows a perspective view of a hearing aid with close battery chamber housing and a first recess in the hearing aid housing being a blind hole according to an embodiment and Figure 5B shows a perspective view of a hearing aid with close battery chamber housing and a first recess in the hearing aid housing being a through hole according to an embodiment .

10

Fig. 2 shows a perspective view of a hearing aid 102 according to an embodiment.

15

By way of example, Fig. 2 shows a behind-the-ear hearing aid 102. The hearing aid 102 may include a hearing aid housing 104, the hearing aid housing 104 including a receiving portion (not shown) . The hearing aid 102 may further include a battery chamber housing 106 coupled to the hearing aid housing 104 and a lock 112 positioned on the battery chamber housing 106. The lock 112 may include a first engaging portion (not shown) and a second engaging portion 116 coupled to the first engaging portion. The first engaging portion may include a material of a higher tensile strength than the second engaging portion 116. The first engaging portion may be configured to be movable relative to the battery chamber housing 106 such that the first engaging portion may be coupled to the receiving portion to lock the battery chamber housing 106.

20

25

30

The hearing aid 102 may further include an ear hook 108 coupled to the hearing aid housing 104. The ear hook 108 may be used to fix the hearing aid housing 104 when worn by a hearing aid user.

35

The hearing aid housing 104 may be configured to receive the battery chamber housing 106.

5 The hearing aid housing 104 may include a plastic material or any other suitable material. The battery chamber housing 106 may include a plastic material or any other suitable material. The hearing aid housing 104 may be of the same material as the battery chamber housing 106.

10 In an embodiment, the hearing aid housing 104 may accommodate a microphone, a signal processing circuit and a loudspeaker, for example, as well as other as such conventional components of a hearing aid 102. The battery chamber housing 106 may be pivoted into or out of the hearing aid housing 104. The
15 battery chamber housing 106 may receive a battery (not shown) used for driving the hearing aid 102.

Fig.3A and Fig.3B show a respective front view and back view of a lock 112 positioned in the hearing aid 102 of Fig.2
20 according to an embodiment.

The lock 112 may include a first engaging portion 114 and a second engaging portion 116 coupled to the first engaging portion 114, the first engaging portion 114 may include a
25 material of a higher tensile strength than the second engaging portion 116.

The first engaging portion 114 may include a cylindrical rod or an elongated portion of any other suitable shape. The
30 first engaging portion 114 may include a metallic material or any other suitable material.

The second engaging portion 116 may include a first portion 118 and a second portion 120. The first portion 118 of the
35 second engaging portion 116 may substantially surround the first engaging portion 114. The second portion 120 of the second engaging portion 116 may be positioned adjacent and/or in connection with the first portion 118 of the second

engaging portion 116. The second portion 120 of the second engaging portion 116 may include a first surface 122 and a second surface 124, the second surface 124 being positioned opposite to the first surface 122.

5

From the front view of the lock 112 in Fig.3A, the second portion 120 of the second engaging portion 116 may include two recesses 126 and three protrusions 128 on the first surface 122. The second portion 120 of the second engaging portion 116 may include a marking 130 on two of the three protrusions 128 on the first surface 122. One of the two recesses 126 may be positioned between the two protrusions 128 with markings 130 so as to provide an indication to the hearing aid user the position to insert a suitable device, for example a screw driver, in order to lock or unlock the battery chamber housing 106.

From the back view of the lock 112 in Fig.3B, the second portion 120 of the second engaging portion 116 may include three recesses 132 and four protrusions 134 on the second surface 124. The combination of the recesses 132 and protrusions 134 with the pressure of the recesses 132 and protrusions 134 or the lock 112 in general against the protrusions (not shown) on the battery chamber housing (not shown) may provide for a "click" latching feel when the second portion 120 moves relative to the battery chamber housing when the hearing aid user locks or unlocks the battery chamber housing. The "click" latching feel may provide an indication to the hearing aid user of the locking status when the hearing aid user locks or unlocks the battery chamber housing.

The second engaging portion 116 may include a plastic material or any other suitable material which may allow for configuring the second engaging portion 116 to include the plurality of recesses 126, 132 and protrusions 128, 134. The second engaging portion 116 may be a plastic material which may be molded to the desired shape. The second engaging

portion 116 may also include any suitable material which may allow for printing of the marking 130 or for a change of a color of the material.

5 Fig.4A shows a perspective view of a hearing aid 102 with close battery chamber housing 106 and with an exposed front view of a lock 112 positioned in the battery chamber housing 106 according to an embodiment, Fig.4B shows a perspective view of an open battery chamber housing 106 and with an
10 exposed top view of a lock 112 positioned in the battery chamber housing 106 according to an embodiment and Fig.4C shows an open battery chamber housing 106 without the lock 112 according to an embodiment.

15 The hearing aid 102 may include a hearing aid housing 104, the hearing aid housing 104 including a receiving portion 110. The hearing aid 102 may further include a battery chamber housing 106 coupled to the hearing aid housing 104 and a lock 112 positioned on the battery chamber housing 106.

20 The lock 112 may include a first engaging portion 114 and a second engaging portion 116 coupled to the first engaging portion 114. The first engaging portion 114 may include a material of a higher tensile strength than the second engaging portion 116. The first engaging portion 114 may be
25 configured to be movable relative to the battery chamber housing 106 such that the first engaging portion 114 may be coupled to the receiving portion 110 to lock the battery chamber housing 106.

30 The first engaging portion 114 may include a cylindrical rod or an elongated portion of any other suitable shape. The first engaging portion 114 may include a metallic material or any other suitable material.

35 The second engaging portion 116 may include a first portion 118 and a second portion 120. The first portion 118 of the second engaging portion 116 may substantially surround the first engaging portion 114. The second portion 120 of the

second engaging portion 116 may be positioned adjacent and/or in connection with the first portion 118 of the second engaging portion 116. The second portion 120 of the second engaging portion 116 may include a first surface 122 and a second surface 124, the second surface 124 being positioned opposite to the first surface 122.

From the exposed front view of the lock 112 positioned in the battery chamber housing 106 in Fig.4A, the second portion 120 of the second engaging portion 116 may include two recesses 126 and three protrusions 128 on the first surface 122. The second portion 120 of the second engaging portion 116 may include a marking 130 on two of the three protrusions 128 on the first surface 122. One of the two recesses 126 may be positioned between the two protrusions 128 with markings 130 so as to provide an indication to the hearing aid user the position to insert a suitable device, for example a screw driver, in order to lock or unlock the battery chamber housing 106. The direction of the locking of the battery chamber housing 106 is as shown by the arrow 140 in Fig.4A.

From the exposed top view of the lock 112 positioned in the battery chamber housing 106 in Fig.4B, the second portion 120 of the second engaging portion 116 may include three recesses 132 and four protrusions 134 on the second surface 124.

The second engaging portion 116 may include a plastic material or any other suitable material which may allow for configuring the second engaging portion 116 to include the plurality of recesses 126, 132 and protrusions 128, 134. The second engaging portion 116 may be a plastic material which may be molded to the desired shape. The second engaging portion 116 may also include any suitable material which may allow for printing of the marking or for a change of a color of the material.

From Fig.4C, the battery chamber housing 106 includes two protrusions 142 on a surface of the battery chamber housing

106. The number of protrusions may vary according to design or user requirements. The combination of the recesses 132 and protrusions 134 on the second surface 124 as shown in Fig.4B with the pressure of the recesses 132 and protrusions 134 or the lock 112 in general against the protrusions 142 of the battery chamber housing 106 may provide for a "click" latching feel when the second portion 120 moves relative to the battery chamber housing 106 when the hearing aid user locks or unlocks the battery chamber housing 106. The "click" latching feel may provide an indication to the hearing aid user of the locking status when the hearing aid user locks or unlocks the battery chamber housing 106.

Fig.5A shows a perspective view of a hearing aid 102 with close battery chamber housing 106 and a first recess 136 in the hearing aid housing 104 being a blind hole according to an embodiment and Fig.5B shows a perspective view of a hearing aid 102 with close battery chamber housing 106 and a first recess 136 in the hearing aid housing 104 being a through hole according to an embodiment.

The hearing aid 102 may include a hearing aid housing 104, the hearing aid housing 104 including a receiving portion 110. The hearing aid 102 may further include a battery chamber housing 106 coupled to the hearing aid housing 104 and a lock 112 positioned on the battery chamber housing 106. The lock 112 may include a first engaging portion (now shown) and a second engaging portion 116 coupled to the first engaging portion. The first engaging portion may include a material of a higher tensile strength than the second engaging portion 116. The first engaging portion may be configured to be movable relative to the battery chamber housing 106 such that the first engaging portion may be coupled to the receiving portion 110 to lock the battery chamber housing 106.

The first engaging portion may include a cylindrical rod or an elongated portion of any other suitable shape. The first

engaging portion may include a metallic material or any other suitable material.

5 The second engaging portion 116 may include a first portion 118 and a second portion 120. The first portion 118 of the second engaging portion 116 may substantially surround the first engaging portion. The second portion 120 of the second engaging portion 116 may be positioned adjacent and/or in connection with the first portion 118 of the second engaging
10 portion 116. The second portion 120 of the second engaging portion 116 may include a first surface 122 and a second surface 124, the second surface 124 being positioned opposite to the first surface 122.

15 From the exposed front view of the lock 112 positioned in the battery chamber housing 106 in Fig.5A and Fig.5B, the second portion 120 of the second engaging portion 116 may include two recesses 126 and three protrusions 128 on the first surface 122. The second portion 120 of the second engaging
20 portion 116 may include a marking 130 on two of the three protrusions 128 on the first surface 122. One of the two recesses 126 may be positioned between the two protrusions 128 with markings 130 so as to provide an indication to the hearing aid user the position to insert a suitable device,
25 for example a screw driver, in order to lock or unlock the battery chamber housing 106.

The second engaging portion 116 may include a plastic material or any other suitable material which may allow for
30 configuring the second engaging portion 116 to include the plurality of recesses 126, 132 and protrusions 128, 134. The second engaging portion 116 may be a plastic material which may be molded to the desired shape. The second engaging portion 116 may also include any suitable material which may
35 allow for printing of the marking 130 or for a change of a color of the material.

The receiving portion 110 may include a first recess 136 and a second recess 138. The first recess 136 may be connected to the second recess 138. The second recess 138 may be of a larger surface area or dimension compared to the first recess 136 such that the first recess 136 may be situated within the second recess 138.

The first recess 136 may include a through hole or a blind hole. The first recess 136 may be of a circular shape or be of any suitable shape depending on design requirements. Fig.5A shows the first recess 136 being a blind hole and Fig.5B shows the first recess 136 being a through hole. The second recess 138 may include a slot or any suitable shape depending on design requirements.

15

The first engaging portion may be coupled to the first recess 136 and the second engaging portion 116 may be coupled to the second recess 138 when the lock 112 may be coupled to the receiving portion 110 to lock the battery chamber housing 106.

20

While the invention has been particularly shown and described with reference to specific embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the appended claims. The scope of the invention is thus indicated by the appended claims and all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced.

30

CLAIMS

1 . A hearing aid comprising :

5 a hearing aid housing, the hearing aid housing comprising a receiving portion;

a battery chamber housing coupled to the hearing aid housing;
and

10

a lock positioned on the battery chamber housing, the lock comprising

a first engaging portion; and

15

a second engaging portion coupled to the first engaging portion, the first engaging portion comprises a material of a higher tensile strength than the second engaging portion;

20

wherein the first engaging portion is configured to be movable relative to the battery chamber housing such that the first engaging portion is being coupled to the receiving portion to lock the battery chamber housing.

25

2 . The hearing aid of claim 1 ,

wherein the first engaging portion comprises a cylindrical rod.

30

3 . The hearing aid of claim 1 or 2 ,

wherein the first engaging portion comprises a metallic material.

35

4 . The hearing aid of any one of claims 1 to 3 ,

wherein the second engaging portion comprises a first portion and a second portion.

5 . The hearing aid of claim 4 ,
wherein the first portion of the second engaging portion
5 substantially surrounds the first engaging portion.

6 . The hearing aid of claim 4 or 5 ,
wherein the second portion of the second engaging portion
10 comprises a first surface and a second surface, the second
surface being positioned opposite to the first surface.

7 . The hearing aid of claim 6 ,
15 wherein the second portion of the second engaging portion
comprises at least one recess and at least one protrusion on
the first surface.

8 . The hearing aid of claim 7 ,
20 wherein the second portion of the second engaging portion
comprises a marking on the at least one protrusion on the
first surface.

25 9 . The hearing aid of claim 6 ,
wherein the second portion of the second engaging portion
comprises at least one recess and at least one protrusion on
the second surface.

30 10 . The hearing aid of any one of claims 1 to 9 ,
wherein the second engaging portion comprises a plastic
material .

35 11 . The hearing aid of any one of claims 1 to 10 ,
wherein the receiving portion comprises a first recess and a
second recess.

12. The hearing aid of claim 11,
wherein the first recess comprises a through hole or a blind
5 hole.

13. The hearing aid of claim 11 or 12,
wherein the second recess comprises a slot.
10

14. The hearing aid of any one of claims 11 to 13,
wherein the first engaging portion is being coupled to the
first recess and the second engaging portion is being coupled
15 to the second recess when the lock is being coupled to the
receiving portion to lock the battery chamber housing.

15. The hearing aid of any one of claims 1 to 14,
20 wherein the hearing aid is a behind-the-ear hearing aid.

16. The hearing aid of any one of claims 1 to 15,
. further comprising
25 an ear hook coupled to the hearing aid housing.

17. The hearing aid of any one of claims 1 to 16,
wherein the hearing aid housing is configured to receive the
30 battery chamber housing.

18. The hearing aid of any one of claims 1 to 17,
wherein the battery chamber housing is pivotally mounted on
35 the hearing aid housing.

19. The hearing aid of any one of claims 1 to 18,
wherein the battery chamber housing comprises a partially
40 circular outer shape.

20. The hearing aid of any one of claims 1 to 19,
wherein the hearing aid housing comprises a plastic material .

5

21. The hearing aid of any one of claims 1 to 20,
wherein the battery chamber housing comprises a plastic
material .

10

22. The hearing aid of any one of claims 1 to 21,
wherein the hearing aid housing is of the same material as
the battery chamber housing.

15

20

FIG 1A

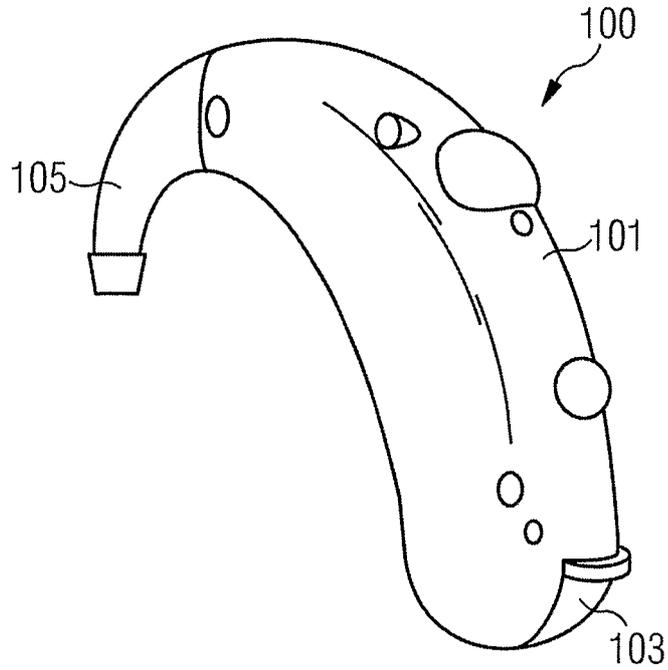


FIG 1B

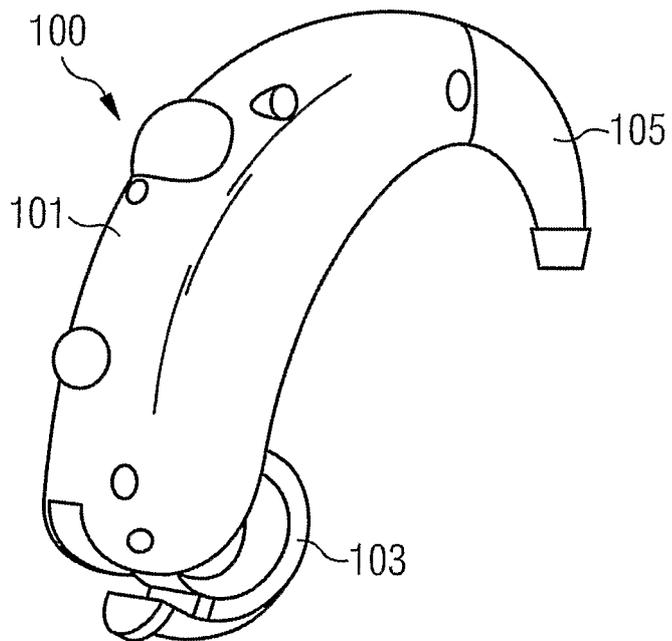


FIG 2

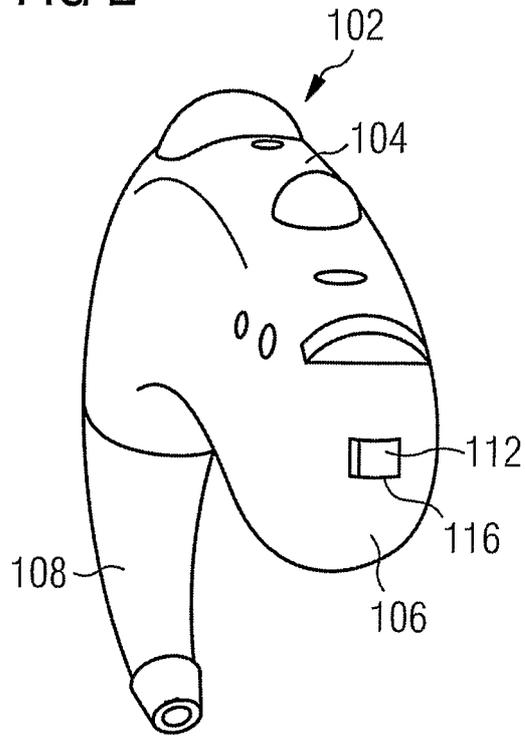


FIG 3A

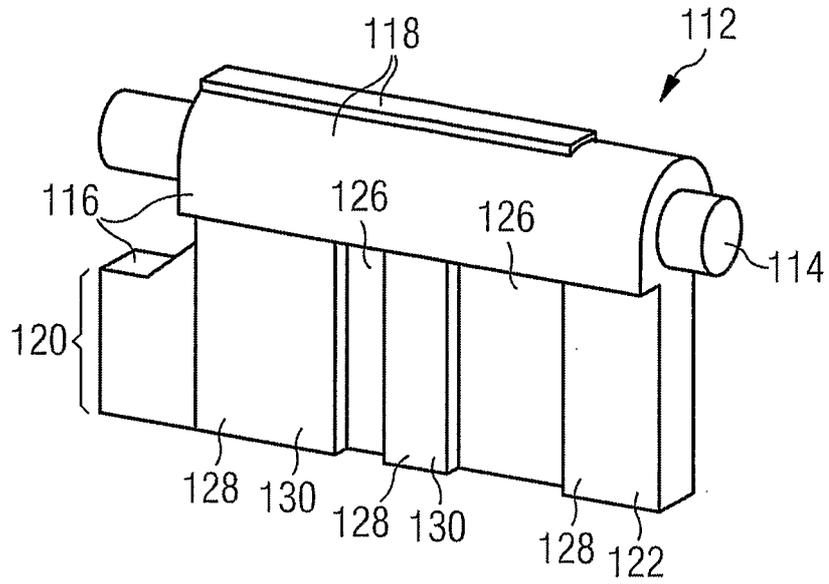


FIG 3B

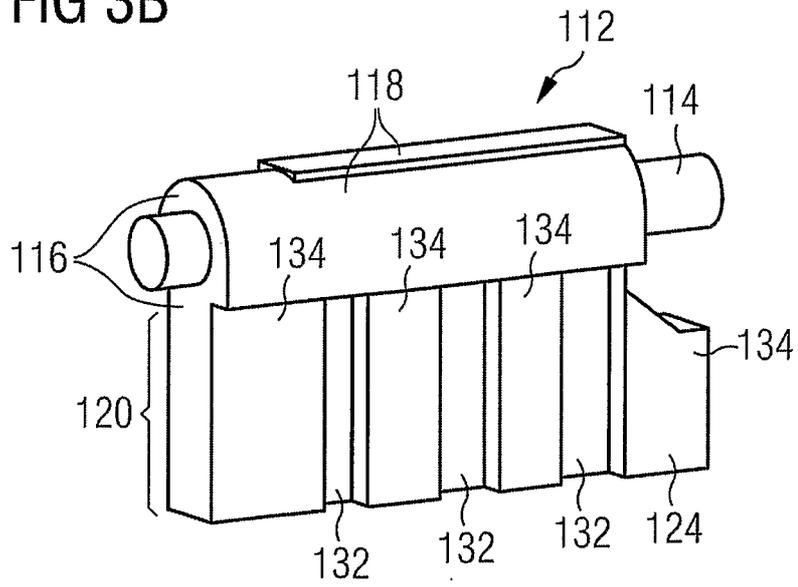


FIG 4A

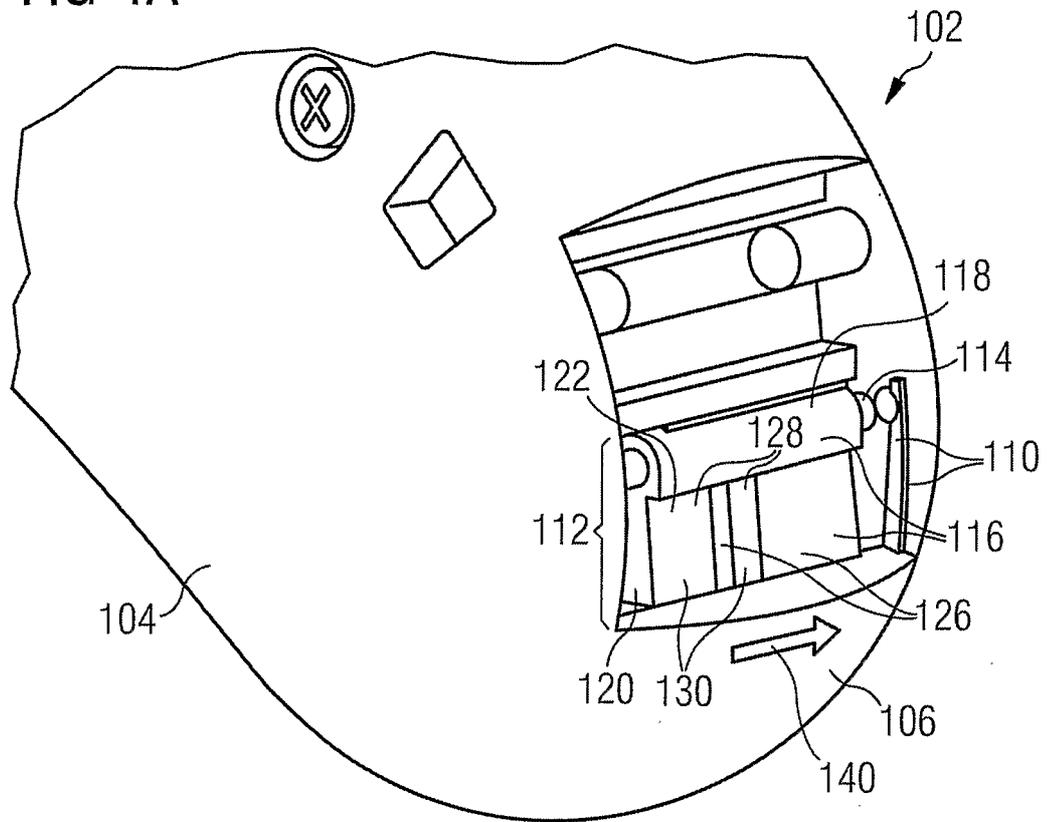


FIG 4B

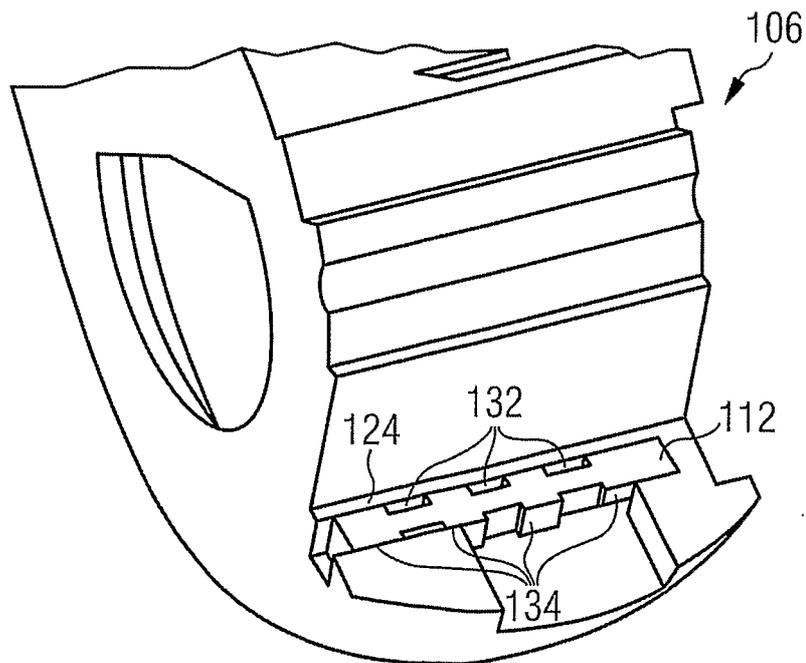


FIG 4C

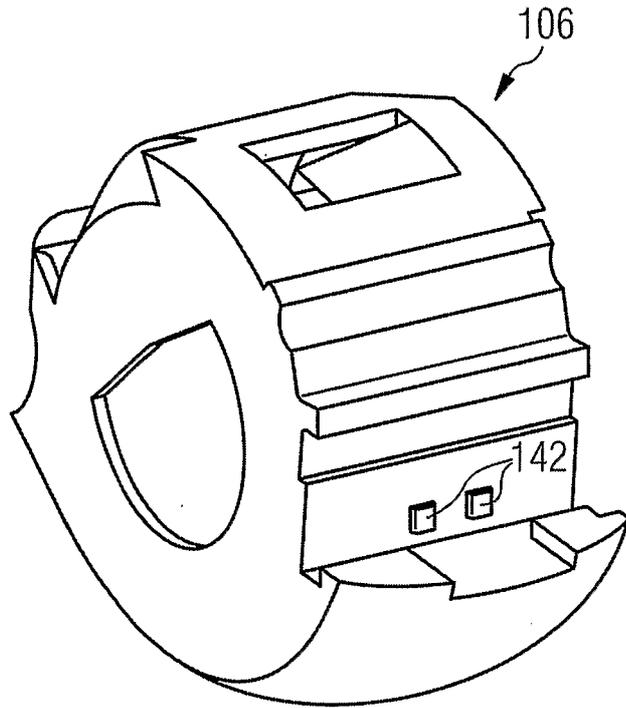


FIG 5A


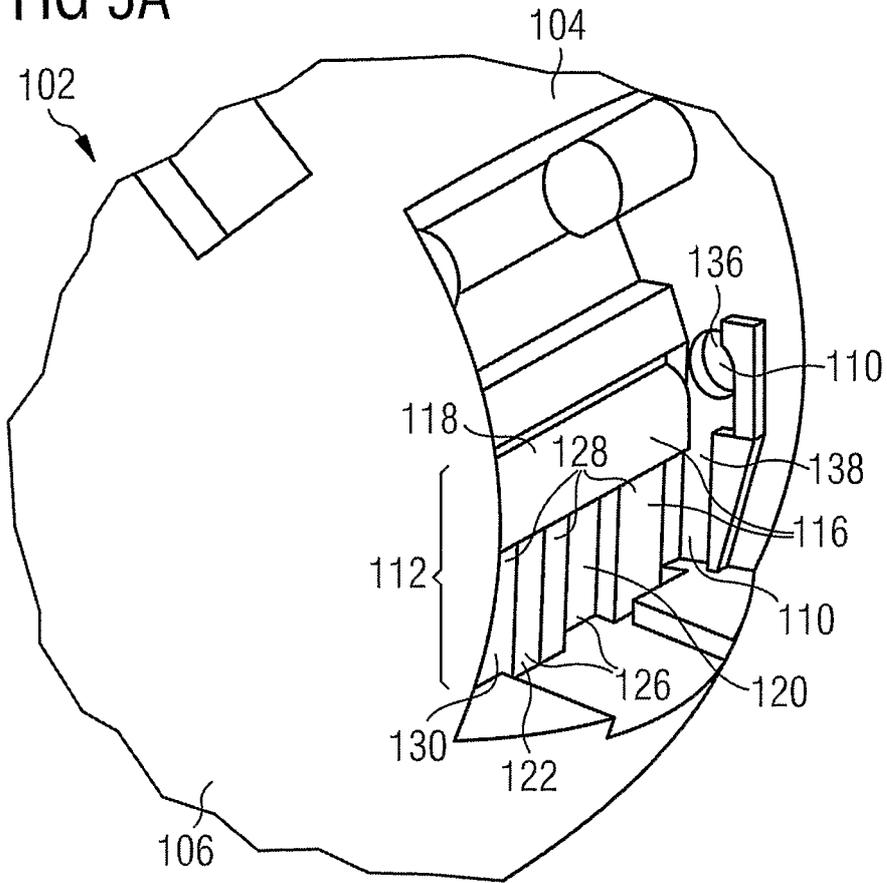


FIG 5B

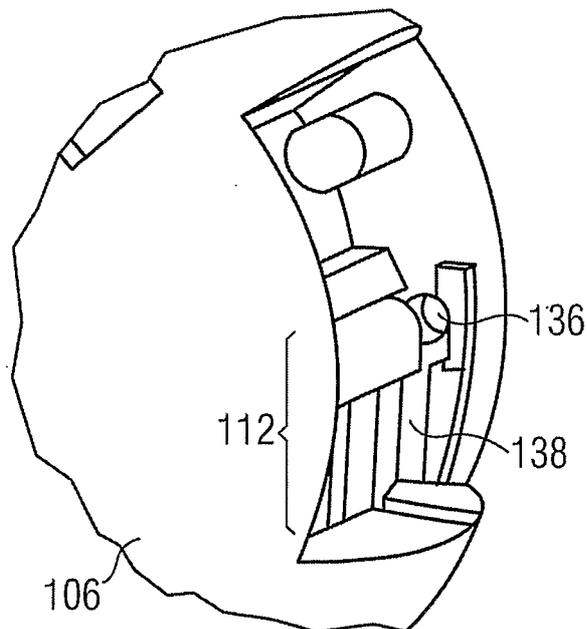

INTERNATIONAL SEARCH REPORT

International application No
PCT/SG 2008/000416

<p>A CLASSIFICATION OF SUBJECT MATTER IPC⁸: H04R 25/00 According to International Patent Classification (IPC) or to both national classification and IPC</p>														
<p>B FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols) IPC⁸: H04R 25/00</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPI, EPODOC</p>														
<p>C DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:10%;">Category*</th> <th style="width:70%;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="width:20%;">Relevant to claim No</th> </tr> </thead> <tbody> <tr> <td align="center">A</td> <td>WO 2007/045236 A 1 (Nielsen) 26 April 2007 (26.04.2007) <i>Abstract; Figs. 1-3, 6; claims 1-7</i></td> <td align="center">1</td> </tr> <tr> <td align="center">A</td> <td>WO 2007/001234 (Hesslein et al.) 4 January 2007 (04 01.2007) <i>Abstract; Fig. 1, claim 1</i></td> <td align="center">1</td> </tr> <tr> <td align="center">A</td> <td>US 5386476 A (Bisgaard and Hartmann) 31 January 1995 (31 01.1995) <i>Abstract; claim 1</i></td> <td align="center">1</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No	A	WO 2007/045236 A 1 (Nielsen) 26 April 2007 (26.04.2007) <i>Abstract; Figs. 1-3, 6; claims 1-7</i>	1	A	WO 2007/001234 (Hesslein et al.) 4 January 2007 (04 01.2007) <i>Abstract; Fig. 1, claim 1</i>	1	A	US 5386476 A (Bisgaard and Hartmann) 31 January 1995 (31 01.1995) <i>Abstract; claim 1</i>	1
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No												
A	WO 2007/045236 A 1 (Nielsen) 26 April 2007 (26.04.2007) <i>Abstract; Figs. 1-3, 6; claims 1-7</i>	1												
A	WO 2007/001234 (Hesslein et al.) 4 January 2007 (04 01.2007) <i>Abstract; Fig. 1, claim 1</i>	1												
A	US 5386476 A (Bisgaard and Hartmann) 31 January 1995 (31 01.1995) <i>Abstract; claim 1</i>	1												
<p>LJ Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex</p>														
<table style="width:100%;"> <tr> <td style="width:50%; vertical-align: top;"> <ul style="list-style-type: none"> ♦ Special categories of cited documents "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width:50%; vertical-align: top;"> <ul style="list-style-type: none"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			<ul style="list-style-type: none"> ♦ Special categories of cited documents "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed 	<ul style="list-style-type: none"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family 										
<ul style="list-style-type: none"> ♦ Special categories of cited documents "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed 	<ul style="list-style-type: none"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family 													
Date of the actual completion of the international search 16 March 2009 (16.03.2009)		Date of mailing of the international search report 21 April 2009 (21 .04.2009)												
Name and mailing address of the ISA/ AT Austrian Patent Office Dresdner Straße 87, A-1200 Vienna Facsimile No +43 / 1 / 534 24 / 535		Authorized officer GROSSING G. Telephone No +43 / 1 / 534 24 / 386												

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SG 2008/000416

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
wo A 2007045236		CN A 101310565	2008-11-19
		US A1 2008192970	2008-08-14
		CA A1 2624984	2007-04-26
		EP A1 1941783	2008-07-09
		AU A1 2005337529	2007-04-26
		WO A1 2007045236	2007-04-26
wo A 2007001234		EP A1 1897408	2008-03-12
		wo A1 2007001234	2007-01-04
US A 5386476		DE UI 9312849U	1993-11-11
		CH A5 688925	1998-05-29
		US A 5386476	1995-01-31
		DK Y6 9200109Y	1992-09-25