



EUROPEAN PATENT SPECIFICATION

Date of publication of patent specification :
19.11.92 Bulletin 92/47

Int. Cl.⁵ : **B41J 2/295, B41J 2/26**

Application number : **89400747.5**

Date of filing : **16.03.89**

Printing head of wire-dot impact printer.

Priority : **18.03.88 JP 63216/88**
15.07.88 JP 175068/88
11.11.88 JP 283898/88

Date of publication of application :
20.09.89 Bulletin 89/38

Publication of the grant of the patent :
19.11.92 Bulletin 92/47

Designated Contracting States :
DE ES FR GB IT

References cited :
EP-A- 0 117 547
PATENT ABSTRACTS OF JAPAN, vol. 8, no.
195 (M-323)[1632], 7th September 1984; JP-
A-59 83 674

References cited :
PATENT ABSTRACTS OF JAPAN, vol. 7, no. 59
(M-199)[1204], 11th March 1983; JP-A-57 203
566
PATENT ABSTRACTS OF JAPAN, vol. 8, no.
104 (M-296)[1541], 16th May 1984; JP-A-59 16
767

Proprietor : **FUJITSU LIMITED**
1015, Kamikodanaka Nakahara-ku
Kawasaki-shi Kanagawa 211 (JP)

Inventor : **Yano, Akio**
8-26-7-301, Kinuta
Setagaya-ku Tokyo 157 (JP)

Representative : **Joly, Jean-Jacques et al**
CABINET BEAU DE LOMENIE 55, rue
d'Amsterdam
F-75008 Paris (FR)

EP 0 333 595 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a wire-dot printer, and more particularly, to a printing head of such a printer including actuating devices for driving dot-impact wires or rods comprising, for example, electro-distortion devices.

2. Description of the Related Art

Recently, high-speed wire-dot printing heads have become widely used, and accordingly, to drive dot-impact wires or rods of such a high-speed printing head, an actuating means comprising electro or magnetic-distortion devices has been developed and used instead of the conventional electromagnet type driving elements.

For example, page 92 of "NIKKEI (Japan Economic) MECHANICAL" issued on March 12, 1984, suggests that a printing head including such electro-distortion devices is used. This electro-distortion element is formed by the following steps: preparing a plurality of green sheets made of piezo-electric ceramics, forming a metal paste film on one surface of each of the green sheets to form an inner electrode, and laminating and sintering the plurality of green sheets.

To provide a printing head using such an actuating device, a means for effectively enlarging the very small displacement of such an electro-distortion element is required. Such means are shown in JP-A-59 16767.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a wire-dot printer having a printing head including electro-distortion devices for driving dot-impact wires or rods, capable of effectively enlarging the very small displacements of such actuating devices so as to drive the dot-impact wires or rods.

According to the present invention, there is provided a printing head comprising: a frame; a plurality of impact printing wires constituting a wire-dot matrix; and a plurality of actuators for driving the impact printing wires, respectively; each of the actuators comprising: a movable member to which one of the impact printing wires is connected; an electro-distortion device; a first resilient member having one end connected via the electro-distortion device to the frame and the other end connected to the movable member; and a second resilient member arranged substantially parallel to the first resilient member and having one end connected to the frame and the other end con-

nected to said movable member; so that a displacement of the electro-distortion device is enlarged by the movable member and transmitted to the impact printing wire; characterized in that a third resilient member arranged substantially perpendicular to the first and second resilient members has one end connected to the frame and the other end connected to the movable member.

In another aspect of the present invention, there is provided a printing head comprising: a frame; a plurality of impact printing wires constituting a wire-dot matrix; and plurality of actuators for driving the impact printing wires, respectively; each of the actuators comprising: a movable member to which one of the impact printing wires is connected; and an electro-distortion device having one end connected to the frame and the other end connected to the movable member for driving the movable member in such a manner that a displacement of the electro-distortion device is enlarged by the movable member and transmitted to the impact printing wire; characterized in that the respective ends of the electro-distortion device are connected to each other by a pretensioned resilient member.

In still another aspect of the present invention, there is provided a printing head comprising: a frame; a plurality of impact printing wires constituting a wire-dot matrix; and a plurality of actuators for driving the impact printing wires, respectively; each of the actuators comprising: a movable member to which one of the impact printing wires is connected; an electro-distortion device; a first resilient member having one end connected via the electro-distortion device to the frame and the other end connected to the movable member; and a second resilient member arranged substantially parallel to the first resilient member and having one end connected to the frame and the other end connected to the movable member; so that a displacement of the electro-distortion device is enlarged by the movable member and transmitted to the impact printing wire; characterized in that a restricting member is provided between the electro-distortion device and the frame for restricting the displacement of the electro-distortion device in a direction substantially perpendicular to the first and second resilient members.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a partial perspective view of a printing head, particularly an actuator for driving dot-impact wires or rods of a printer;

Figure 2A is a front view of a first embodiment of an actuating means for driving a dot-impact wire or rod according to the present invention;

Figure 2B is a view taken along the line X-X in Fig. 2A;

Figure 3 shows an example of a prior art actuating means;

Figure 4 is a front view of a second embodiment of the actuating means for driving a dot-impact wire or rod according to the present invention; Figure 5 shows another example of a prior art actuating means;

Figure 6 is a front view of a third embodiment of the actuating means for driving a dot-impact wire or rod according to the present invention; and, Figure 7 shows still another example of a prior art actuating means.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Figs. 1, 2A and 2B, a printing head of a dot-impact printer according to the present invention is illustrated wherein the printing head 10 comprises a cylindrical housing 20 and a plurality of actuators 30 arranged radially in the cylindrical housing 20.

Each of the actuators 30 comprises an electro-distortion device 2, an impact printing wire 6, a frame 11, a movable member (or armature) 12, a first resilient member 13, a second resilient member 14, and a resilient connecting (or third resilient) member 15.

The frame 11 is substantially L-shaped, having a base 11a and a side wall 11b extending substantially perpendicular to the base 11a. The electro-distortion device 2, such as a piezo-electric device, has a base portion 2a mounted on the frame base 11a and, therefore, the top free end of the electro-distortion device 2 is displaced upward when an electric power is supplied to the electro-distortion device 2.

The impact printing wire 6 is fixed to an end of the movable member 12 at a position A thereof. A plurality of such printing wires 6 driven by the respective actuators 30 constitute a wire-dot matrix.

The first resilient member 13 is fixedly connected at the lower end thereof to the top end of the electro-distortion device 2 and extends upward in the same direction as the displacement of the electro-distortion device 2. The first resilient member 13 is also fixedly connected at the upper end thereof to the movable member 12 at a position B thereof.

The second resilient member 14 is arranged in parallel to the first resilient member 13 and fixedly connected at the lower end thereof to the side wall 11b of the frame 1 at a position E. The upper end of this second resilient member 14 is fixedly connected to the movable member 12 at a position C thereof.

A distance from the first position A to the second position B is much larger than a distance from the second position B to the third position C, so that a displacement of the electro-distortion device 2 can be enlarged by the movable member 12 and transmitted to the impact printing wire 6, as will be mentioned later.

According to this embodiment, a resilient con-

necting (or third resilient) member 15 made of, for example, a metal wire having a circular cross-section, extends substantially perpendicular to the first and second resilient members 13 and 14 which comprise metal strips arranged in parallel to each other. The connecting wire 15 has one end fixedly connected to the movable member 12 at a position D thereof and the other end fixedly connected to the side wall 11b of the frame 11 at a position F thereof, and passes through respective openings 16 of the resilient members 13 and 14, as shown in Fig. 2B. The position D is located nearer the frame base 11a with respect to a plane on which the positions B and C lie. Also, the position F is located opposite the position D with respect to the second resilient member 14.

The operations of the printing head of this embodiment according to the present invention will now be described. When printing, an electric power is supplied via a driving circuit (not shown) to the electro-distortion device 2 for a predetermined time. In this case, the upper portion of the electro-distortion device 2 is displaced upward and, therefore, the movable member 12 is turned in the counterclockwise direction in Fig. 2. Accordingly, the displacement of the electro-distortion device 2 is enlarged by the movable member 12 and transmitted to the impact printing wire 6 which moves upward, as shown by an arrow P, to conduct a dot-printing. After the printing operation is finished, the movable member 12 and the first and second resilient members 13 and 14 are returned to their original positions.

According to this embodiment, due to the existence of the resilient connecting member 15 passing through the first and second resilient members 13 and 14, the movements or deformations of these two resilient members 13 and 14 are restricted in such a manner that a "high dimensional deformation", as mentioned below, can be eliminated. Therefore, a stable and high-speed printing operation can be attained.

Figure 3 shows a printing head known in the prior art. In this prior art, when an electric power is supplied to the electro-distortion device 2, the upper portion of the electro-distortion device 2 is displaced upward, and thus the first resilient member 13 is subjected to a compression force. As a result, the first and second resilient members 13 and 14 deform leftward as shown at 13' and 14', and thus the movable member 12 is turned in the counterclockwise direction as shown by a dotted line in Fig. 3. Accordingly, the impact printing wire 6 moves upward, as shown by an arrow P, to conduct a dot-printing.

In the prior art as shown in Fig. 3, however, since there is no resilient connecting member 15 for restricting the movements of the first and second resilient members 13 and 14, these resilient members 13 and 14 deform in a "high dimensional deformation" as shown by the dotted lines 13' and 14' in Fig. 3, at the time of an impact operation by the impact printing wire

6, and this high dimensional deformation causes various problems; i.e., the printing operation is unstable and a high speed operation cannot be obtained.

Figure 4 illustrates a second embodiment of a printing head according to the present invention, and Fig. 5 illustrates a corresponding prior art. In Figs. 4 and 5, the printing head includes a plurality of actuators each comprising a movable member 31 (21) to which an impact printing wire 24 is connected. An electro-distortion device 23 has a lower end connected to the frame 25 via a connecting member 26 and an upper end connected to a movable member 31 (21) via a connecting member 27 for driving the movable member 31 (21) in such a manner that a displacement of the electro-distortion device 23 is enlarged by the movable member 31 (21) and transmitted to the impact printing wire 24.

In the prior art as shown in Fig. 5, since the electro-distortion device 23 has a relatively weak tension strength, the movable member 21 is pretensioned in such a manner that, when the electro-distortion device 23 is not energized, the movable member 21 resiliently deforms from a position (a) indicated by a dotted line to a position (b) indicated by a solid line. In other words, a stress corresponding to an initial strain δ_p is exerted on the elastic supporting portion 22, and thus the electro-distortion device 23 is subjected to a corresponding compression force to compensate the above-mentioned drawbacks of the electro-distortion device 23. When printing, an electric power is supplied to the electro-distortion device 23 for a predetermined time. In this case, the upper portion (the connecting member 27) of the electro-distortion device 23 is displaced upward, and thus the elastic supporting portion 22 is further resiliently deformed upward. Accordingly, the movable member 21 is deformed by δ to a position (c) indicated by a dotted line. This means that a rate of maximum enlargement is represented as ℓ_2/ℓ_1 . The point O_1 is the center of rotation of the movable member 21, and thus the movable member 21 is turned in the clockwise direction in Fig. 5 and the impact printing wire 24 moved upward to conduct a dot-printing. After the printing operation is finished, the movable member 21 returns to its original position (b).

As mentioned above, in the prior art as shown in Fig. 5, during a printing operation, the elastic supporting portion 22 is subjected to a stress corresponding to the whole strain ($\delta_r = \delta_p + \delta$) of the movable member 21, which makes it difficult to reduce the size of the elastic supporting portion 22.

According to the present invention, as shown in Fig. 4, the respective ends of the electro-distortion device 23, i.e., the lower and upper connecting members 26 and 27, are connected to each other by a pretensioned resilient member 33. The resilient member 33 can be made of an elastic wire provided at the respective ends thereof with lower and upper connecting

portions 34 and 35, which can be fixed to the connecting members 26 and 27 by, for example, not shown screws. A pair of such pretensioned resilient members 33 may be provided at both sides of the electro-distortion device 23.

Therefore, according to the present invention, a compression load is exerted on the electro-distortion device 23 due to the pretensioned resilient member 33, and thus, it is no longer necessary to exert an initial force on the elastic supporting portion 32. Therefore, it is possible to reduce the sizes of the various parts of the printing head, including the elastic supporting portion 32, and increase the inherent frequency of the movable member 31, and thus a high speed and highly reliable printing head can be obtained.

Figure 6 illustrates a third embodiment of a printing head according to the present invention, and Fig. 7 illustrates a corresponding prior art. The embodiment of Fig. 6 is similar to that shown in Fig. 2A and, therefore, a detailed explanation of the respective parts will be omitted, although the corresponding parts are indicated by the same reference numerals.

In the embodiment shown in Fig. 6, instead of the resilient connecting member 15 in Fig. 2A, a restricting member 18 is provided in such a manner that one end thereof is fixedly connected to the upper portion (connecting member) 27 of the electro-distortion device 2 and the other end is fixedly connected to the side wall 11b of the frame 11, for restricting the displacement of the electro-distortion device 2 in a direction as shown by an arrow H substantially perpendicular to the first and second resilient members 13 and 14. The restricting member 18 comprises, for example, a metal wire extending substantially perpendicular to the direction of displacement of the electro-distortion device 2.

According to this embodiment, a tension stress generated in the electro-distortion device 2 during a printing operation can be reduced, since the electro-distortion device 2 cannot move away from the side wall 11b of the frame 11, as shown by an arrow H.

In the prior art as shown in Fig. 7, since such a restricting member (18) is not provided, when electric power is supplied to the electro-distortion device 2, the upper portion 27 of the electro-distortion device 2 is displaced upward, and thus, due to the effects as a bimetal, the first and second resilient members 13 and 14 are deformed as shown by an arrow I shown by dotted lines. Therefore, the movable member 12 is turned in the counterclockwise direction to a position shown by a dotted line in Fig. 7. Due to such deformation I of the first and second resilient members 13 and 14, the lower portions of these members 13 and 14 are subjected to counteractions in a direction opposite to I, as shown by an arrow H. Therefore, a bending moment is exerted on the electro-distortion device 2 to deform it toward H, and such a bending moment has an affect on a high speed operation of

the electro-distortion device 2, and may damage the electro-distortion device 2. However, according to the embodiment shown in Fig. 6, tension stress would not be generated in the electro-distortion device 2 as mentioned above, and therefore, the electro-distortion device 2 is suitable for a high speed operation.

Claims

1. A printing head comprising: a frame; a plurality of impact printing wires constituting a wire-dot matrix; and a plurality of actuators for driving said impact printing wires, respectively; each of said actuators comprising:

a movable member to which one of said impact printing wires is connected; an electro-distortion device; a first resilient member having one end connected via said electro-distortion device to said frame and the other end connected to said movable member; a second resilient member arranged substantially parallel to said first resilient member and having one end connected to said frame and the other end connected to said movable member; so that a displacement of said electro-distortion device is enlarged by said movable member and transmitted to said impact printing wire;

and a third resilient member arranged substantially perpendicular to said first and second resilient members; characterized in that said third resilient member; has one end connected to said frame and the other end connected to said movable member.

2. A printing head as set forth in claim 1, wherein said impact printing wire is connected to said movable member at a first position (A) thereof; the other end of said first resilient member is connected to said movable member at a second position (B) thereof; the other end of said second resilient member is connected to said movable member at a third position (C) thereof; and said first position is opposite to said third position with respect to said second position, so that a displacement of said electro-distortion device is enlarged by said movable member and transmitted to said impact printing wire.

3. A printing head as set forth in claim 2, wherein a distance from said first position to said second position is larger than a distance from said second position to said third position.

4. A printing head as set forth in claim 1, wherein said frame is substantially L-shaped having a base and a side wall extending substantially perpendicular to said base, said electro-distortion

device is mounted on said base, and said one end of third resilient member is connected to said side wall.

5. A printing head as set forth in claim 4, wherein said other end of said third resilient member is connected to said movable member at a fourth position (D) thereof, said fourth position (D) being located toward said base of the frame with respect to a plane in which the second and third positions (B, C) lie.

6. A printing head as set forth in claim 1, wherein said third resilient member comprises a wire and said first and second resilient members comprise metal strips arranged in parallel to each other and substantially perpendicular to said third resilient member and having openings through which said third resilient member passes.

7. A printing head comprising: a frame; a plurality of impact printing wires constituting a wire-dot matrix; and a plurality of actuators for driving said impact printing wires, respectively; each of said actuators comprising:

a movable member to which one of said impact printing wires is connected;

an electro-distortion device having one end connected to said frame and the other end connected to said movable member for driving said movable member in such a manner that a displacement of said electro-distortion device is enlarged by said movable member and transmitted to said impact printing wire; characterized in that

said respective ends of the electro-distortion device are connected to each other by a resilient member, and said resilient member is pre-tensioned.

8. A printing head as set forth in claim 7, wherein a pair of said resilient members are provided at both sides of said electro-distortion device.

9. A printing head comprising: a frame; a plurality of impact printing wires constituting a wire-dot matrix; and a plurality of actuators for driving said impact printing wires, respectively; each of said actuators comprising:

a movable member to which one of said impact printing wires is connected; an electro-distortion device; a first resilient member having one end connected via said electro-distortion device to said frame and the other end connected to said movable member; and a second resilient member arranged substantially parallel to said first resilient member and having one end connected to said frame and the other end connected to said

movable member; so that a displacement of said electro-distortion device is enlarged by said movable member and transmitted to said impact printing wire; characterized in that

a restricting member is provided between said electro-distortion device and said frame for restricting the displacement of said electro-distortion device in a direction substantially perpendicular to said first and second resilient members.

10. A printing head as set forth in claim 9, wherein said impact printing wire is connected to said movable member at a first position (A) thereof; the other end of said first resilient member is connected to said movable member at a second position (B) thereof; the other end of said second resilient member is connected to said movable member at a third position (C) thereof; and said first position is opposite to said third position with respect to said second position, so that a displacement of said electro-distortion device is enlarged by said movable member and transmitted to said impact printing wire.

11. A printing head as set forth in claim 10, wherein a distance from said first position to said second position is larger than a distance from said second position to said third position.

12. A printing head as set forth in claim 9, wherein said frame is substantially L-shaped having a base and a side wall extending substantially perpendicular to said base, said electro-distortion device has one end connected to said base and the other end connected to said first resilient member, and said restricting member has one end connected to said side wall and the other end connected to said electro-distortion device in the vicinity of the other end thereof.

13. A printing head as set forth in claim 9, wherein said restricting member comprises a metal wire.

Patentansprüche

1. Ein Druckkopf mit: einem Rahmen; einer Vielzahl von Anschlagdrucknadeln, die eine Nadelpunktmatrix bilden; und einer Vielzahl von Betätigungsorganen zum Antreiben der entsprechenden genannten Anschlagdrucknadeln; wobei jedes der genannten Betätigungsorgane umfaßt:

ein bewegliches Glied, mit dem eine der genannten Anschlagdrucknadeln verbunden ist; eine Elektroverformungsvorrichtung; ein erstes elastisches Glied, das mit einem Ende über die genannte Elektroverformungsvorrichtung mit dem genannten Rahmen verbunden ist und mit

dem anderen Ende mit dem genannten beweglichen Glied verbunden ist; ein zweites elastisches Glied, das im wesentlichen parallel zu dem genannten ersten elastischen Glied angeordnet ist, und mit einem Ende mit dem genannten Rahmen verbunden ist und mit dem anderen Ende mit dem genannten beweglichen Glied verbunden ist; so daß eine Verschiebung der genannten Elektroverformungsvorrichtung durch das genannte bewegliche Glied vergrößert und zu der genannten Anschlagdrucknadel übertragen wird; und ein drittes elastisches Glied, das im wesentlichen senkrecht zu den genannten ersten und zweiten elastischen Gliedern angeordnet ist; dadurch gekennzeichnet, daß das genannte dritte elastische Glied mit einem Ende mit dem genannten Rahmen verbunden ist und mit dem anderen Ende mit dem genannten beweglichen Glied verbunden ist.

2. Ein Druckkopf nach Anspruch 1, bei dem die genannte Anschlagdrucknadel mit dem genannten beweglichen Glied an einer ersten Position (A) davon verbunden ist; das andere Ende des genannten ersten elastischen Gliedes mit dem genannten beweglichen Glied an einer zweiten Position (B) davon verbunden ist; das andere Ende des genannten zweiten elastischen Gliedes mit dem genannten beweglichen Glied an einer dritten Position (C) davon verbunden ist; und sich die genannte erste Position bezüglich der genannten zweiten Position gegenüber der genannten dritten Position befindet, so daß eine Verschiebung der genannten Elektroverformungsvorrichtung durch das genannte bewegliche Glied vergrößert und zu der genannten Anschlagdrucknadel übertragen wird.

3. Ein Druckkopf nach Anspruch 2, bei dem ein Abstand von der genannten ersten Position zu der genannten zweiten Position größer als ein Abstand von der genannten zweiten Position zu der genannten dritten Position ist.

4. Ein Druckkopf nach Anspruch 1, bei dem der genannte Rahmen im wesentlichen L-förmig, mit einem Sockel und einer Seitenwand, ist, die sich im wesentlichen senkrecht zu dem genannten Sockel erstreckt, die genannte Elektroverformungsvorrichtung auf dem genannten Sockel montiert ist und das genannte eine Ende des dritten elastischen Gliedes mit der genannten Seitenwand verbunden ist.

5. Ein Druckkopf nach Anspruch 4, bei dem das genannte andere Ende des genannten dritten elastischen Gliedes mit dem genannten beweglichen Glied an einer vierten Position (D) davon verbun-

den ist, welche vierte Position (D) bezüglich einer Ebene, in der sich die zweiten und dritten Positionen (B, C) befinden, zum genannten Sockel des Rahmens zu angeordnet ist.

6. Ein Druckkopf nach Anspruch 1, bei dem das genannte dritte elastische Glied einen Draht umfaßt und die genannten ersten und zweiten elastischen Glieder Metallstreifen umfassen, die parallel zueinander und im wesentlichen senkrecht zum genannten dritten elastischen Glied angeordnet sind und Öffnungen haben, durch die das genannte dritte elastische Glied verläuft.

7. Ein Druckkopf mit: einem Rahmen; einer Vielzahl von Anschlagdrucknadeln, die eine Nadelpunktmatrix bilden; und einer Vielzahl von Betätigungsorganen zum Antreiben der entsprechenden genannten Anschlagdrucknadeln; wobei jedes der genannten Betätigungsorgane umfaßt:

ein bewegliches Glied, mit dem eine der genannten Anschlagdrucknadeln verbunden ist;

eine Elektroverformungsvorrichtung, die mit einem Ende mit dem genannten Rahmen verbunden ist und mit dem anderen Ende mit dem genannten beweglichen Glied verbunden ist, zum Antreiben des genannten beweglichen Gliedes auf solch eine Weise, daß eine Verschiebung der genannten Elektroverformungsvorrichtung durch das genannte bewegliche Glied vergrößert und zur genannten Anschlagdrucknadel übertragen wird; dadurch gekennzeichnet, daß

die genannten entsprechenden Enden der Elektroverformungsvorrichtung durch ein elastisches Glied miteinander verbunden sind, und das genannte elastische Glied vorgespannt ist.

8. Ein Druckkopf nach Anspruch 7, bei dem ein Paar der genannten elastischen Glieder an beiden Seiten der genannten Elektroverformungsvorrichtung vorgesehen ist.

9. Ein Druckkopf mit: einem Rahmen; einer Vielzahl von Anschlagdrucknadeln, die eine Nadelpunktmatrix bilden; und einer Vielzahl von Betätigungsorganen zum Antreiben der entsprechenden genannten Anschlagdrucknadeln; wobei jedes der genannten Betätigungsorgane umfaßt:

ein bewegliches Glied, mit dem eine der genannten Anschlagdrucknadeln verbunden ist; eine Elektroverformungsvorrichtung; ein erstes elastisches Glied, das mit einem Ende über die genannte Elektroverformungsvorrichtung mit dem genannten Rahmen verbunden ist und mit dem anderen Ende mit dem genannten beweglichen Glied verbunden ist; und ein zweites elastisches Glied, das im wesentlichen parallel zu dem genannten ersten elastischen Glied angeordnet

ist und mit einem Ende mit dem genannten Rahmen verbunden ist und mit dem anderen Ende mit dem genannten beweglichen Glied verbunden ist; so daß eine Verschiebung der genannten Elektroverformungsvorrichtung durch das genannte bewegliche Glied vergrößert und zu der genannten Anschlagdrucknadel übertragen wird; dadurch gekennzeichnet, daß

ein Beschränkungsglied zwischen der genannten Elektroverformungsvorrichtung und dem genannten Rahmen vorgesehen ist, zum Beschränken der Verschiebung der genannten Elektroverformungsvorrichtung auf eine zu den genannten ersten und zweiten elastischen Gliedern im wesentlichen senkrechte Richtung.

10. Ein Druckkopf nach Anspruch 9, bei dem die genannte Anschlagdrucknadel mit dem genannten beweglichen Glied an einer ersten Position (A) davon verbunden ist; das andere Ende des genannten ersten elastischen Gliedes mit dem genannten beweglichen Glied an einer zweiten Position (B) davon verbunden ist; das andere Ende des genannten zweiten elastischen Gliedes mit dem genannten beweglichen Glied an einer dritten Position (C) davon verbunden ist; und sich die genannte erste Position bezüglich der genannten zweiten Position gegenüber der genannten dritten Position befindet, so daß eine Verschiebung der genannten Elektroverformungsvorrichtung durch das genannte bewegliche Glied vergrößert und zu der genannten Anschlagdrucknadel übertragen wird.

11. Ein Druckkopf nach Anspruch 10, bei dem ein Abstand von der genannten ersten Position zu der genannten zweiten Position größer als ein Abstand von der genannten zweiten Position zu der genannten dritten Position ist.

12. Ein Druckkopf nach Anspruch 9, bei dem der genannte Rahmen im wesentlichen L-förmig, mit einem Sockel und einer Seitenwand, ist, die sich im wesentlichen senkrecht zum genannten Sockel erstreckt, die genannte Elektroverformungsvorrichtung mit einem Ende mit dem genannten Sockel verbunden ist und mit dem anderen Ende mit dem genannten ersten elastischen Glied verbunden ist, und das genannte Beschränkungsglied mit einem Ende mit der genannten Seitenwand verbunden ist und mit dem anderen Ende mit der genannten Elektroverformungsvorrichtung in der Nähe des anderen Endes davon verbunden ist.

13. Ein Druckkopf nach Anspruch 9, bei dem das genannte Beschränkungsglied einen Metalldraht umfaßt.

Revendications

1. Tête d'impression comprenant : un bâti ; plusieurs aiguilles d'impression par percussion constituant une matrice d'aiguilles ; et plusieurs dispositifs d'actionnement servant à entraîner respectivement lesdites aiguilles d'impression par percussion ; chacun desdits dispositifs d'actionnement comprenant :

un élément mobile auquel est connectée une desdites aiguilles d'impression par percussion ; un dispositif à électrodéformation ; un premier élément élastique dont une première extrémité est reliée audit bâti via ledit dispositif à électrodéformation et dont l'autre extrémité est reliée audit élément mobile ; un deuxième élément élastique qui est disposé de manière sensiblement parallèle audit premier élément élastique et dont une première extrémité est reliée audit bâti et l'autre extrémité est reliée audit élément mobile ; si bien qu'un déplacement dudit dispositif à électrodéformation est amplifié par ledit élément mobile et est transmis à ladite aiguille d'impression par percussion ; et un troisième élément élastique disposé de manière sensiblement perpendiculaire auxdits premier et deuxième éléments élastiques ;

caractérisée en ce que ledit troisième moyen élastique est connecté par une première extrémité audit bâti et par son autre extrémité audit élément mobile.

2. Tête d'impression selon la revendication 1, où ladite aiguille d'impression par compression est reliée audit élément mobile en une première position (A) de celui-ci ; l'autre extrémité dudit premier élément élastique est reliée audit élément mobile en une deuxième position (B) de celui-ci ; l'autre extrémité dudit deuxième élément élastique est reliée audit élément mobile en une troisième position (C) de celui-ci ; et ladite première position est opposée à ladite troisième position par rapport à ladite deuxième position, de sorte qu'un déplacement dudit dispositif à électrodéformation est amplifié par ledit élément mobile et est transmis à ladite aiguille d'impression par percussion.

3. Tête d'impression selon la revendication 2, où la distance comprise entre ladite première position et ladite deuxième position est plus grande que la distance comprise entre ladite deuxième position et ladite troisième position.

4. Tête d'impression selon la revendication 1, où ledit bâti possède sensiblement la forme d'un L et comprend une base et une paroi latérale orientée de manière sensiblement perpendiculaire à ladite

base, ledit dispositif à électrodéformation est monté sur ladite base, et ladite première extrémité du troisième élément élastique est reliée à ladite paroi latérale.

5. Tête d'impression selon la revendication 4, où ladite autre extrémité dudit troisième élément élastique est reliée audit élément mobile en une quatrième position (D) de celui-ci, ladite quatrième position (D) étant placée en direction de ladite base du bâti par rapport au plan dans lequel se trouvent les deuxième et troisième positions (B, C).

6. Tête d'impression selon la revendication 1, où ledit troisième élément élastique comprend un fil et lesdits premier et deuxième éléments élastiques comprennent des bandes métalliques qui sont disposées parallèlement entre elles et de manière sensiblement perpendiculaire audit troisième élément élastique et comportent des ouvertures par lesquelles passe ledit troisième élément élastique.

7. Tête d'impression comprenant : un bâti ; plusieurs aiguilles d'impression par percussion constituant une matrice d'aiguilles ; plusieurs dispositifs d'actionnement servant à entraîner respectivement lesdites aiguilles d'impression par percussion ; chacun desdits dispositifs d'actionnement comprenant :

un élément mobile auquel est reliée une desdites aiguilles d'impression par percussion ;

un dispositif à électrodéformation dont une première extrémité est reliée audit bâti et l'autre extrémité est reliée audit élément mobile afin d'entraîner ledit élément mobile de manière qu'un déplacement dudit dispositif à électrodéformation soit amplifié par ledit élément mobile et transmis à ladite aiguille d'impression par percussion ;

caractérisée en ce que lesdites extrémités respectives du dispositif à électrodéformation sont reliées entre elles par un élément élastique, et en ce que ledit élément élastique est soumis à une précontrainte.

8. Tête d'impression selon la revendication 7, où une paire desdits éléments élastiques sont disposés des deux côtés dudit dispositif à électrodéformation.

9. Tête d'impression comprenant : un bâti ; plusieurs aiguilles d'impression par percussion constituant une matrice d'aiguilles ; et plusieurs dispositifs d'actionnement servant à entraîner respectivement lesdites aiguilles d'impression par percussion ; chacun desdits dispositifs d'actionnement comprenant :

un élément mobile auquel est reliée une desdites aiguilles d'impression par percussion ; un dispositif à électrodéformation ; un premier élément élastique dont une première extrémité est reliée audit bâti via ledit dispositif à électrodéformation et dont l'autre extrémité est reliée audit élément mobile ; et un deuxième élément élastique qui est disposé de manière sensiblement parallèle audit premier élément élastique et dont une première extrémité est reliée audit bâti et l'autre extrémité est reliée audit élément mobile ; si bien qu'un déplacement dudit dispositif à électrodéformation est amplifié par ledit élément mobile et est transmis à ladite aiguille d'impression par percussion ;

5

caractérisée en ce qu'un élément de limitation est placé entre ledit dispositif à électrodéformation et ledit bâti afin de limiter le déplacement dudit dispositif à électrodéformation dans une direction sensiblement perpendiculaire auxdits premier et deuxième éléments élastiques.

10

15

20

10. Tête d'impression selon la revendication 9, où ladite aiguille d'impression par percussion est reliée audit élément mobile en une première position (A) de celui-ci ; l'autre extrémité dudit premier élément élastique est reliée audit élément mobile en une deuxième position (B) de celui-ci ; l'autre extrémité dudit deuxième élément élastique est reliée audit élément mobile en une troisième position (C) de celui-ci ; et ladite première position est opposée à ladite troisième position par rapport à ladite deuxième position, si bien qu'un déplacement dudit dispositif à électrodéformation est amplifié par ledit élément mobile et est transmis à ladite aiguille d'impression par percussion.

25

30

35

11. Tête d'impression selon la revendication 10, où la distance comprise entre ladite première position et ladite deuxième position est plus grande que la distance comprise entre ladite deuxième position et ladite troisième position.

40

12. Tête d'impression selon la revendication 9, où ledit bâti possède sensiblement la forme d'un L et comprend une base et une paroi latérale orientée de manière sensiblement perpendiculaire à ladite base, ledit dispositif à électrodéformation est relié par une première extrémité à ladite base et par l'autre extrémité audit premier élément élastique, et ledit élément de limitation est relié par une première extrémité à ladite paroi latérale et est relié par son autre extrémité audit dispositif à électrodéformation au voisinage de l'autre extrémité de celui-ci.

45

50

55

dit élément de limitation est constitué par un fil métallique.

13. Tête d'impression selon la revendication 9, où le-

Fig. 1

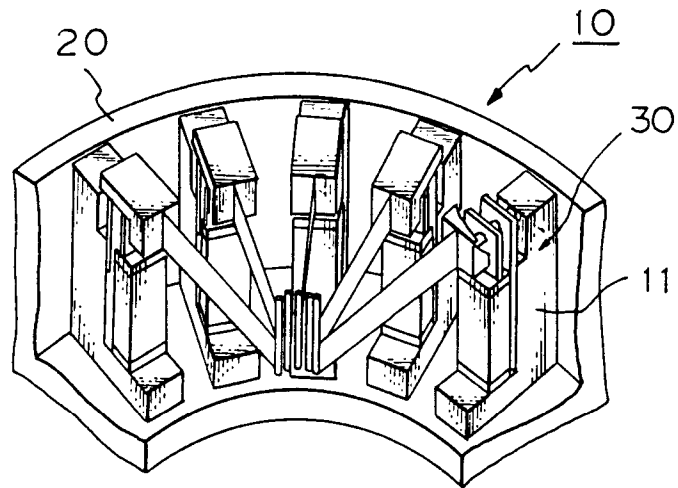


Fig. 2A

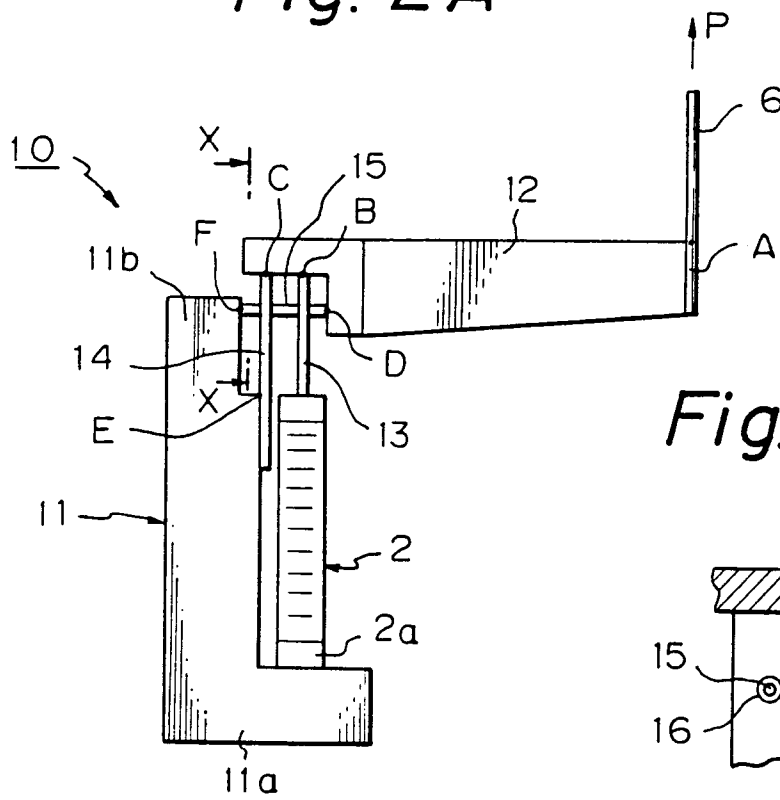


Fig. 2B




Fig. 3

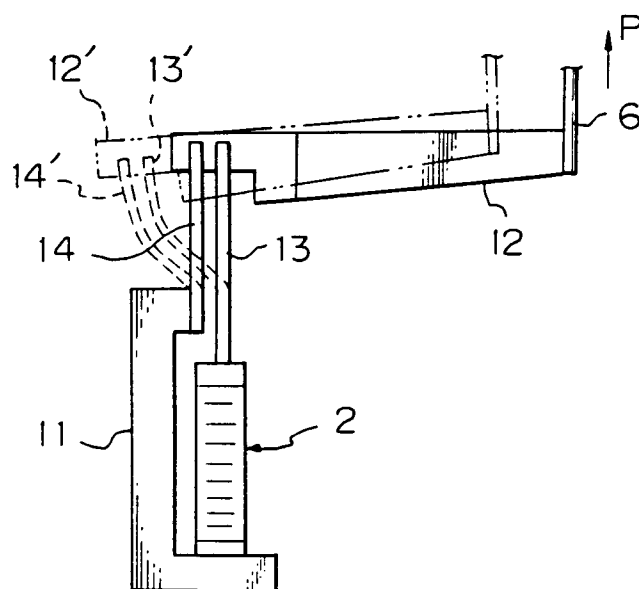


Fig. 4

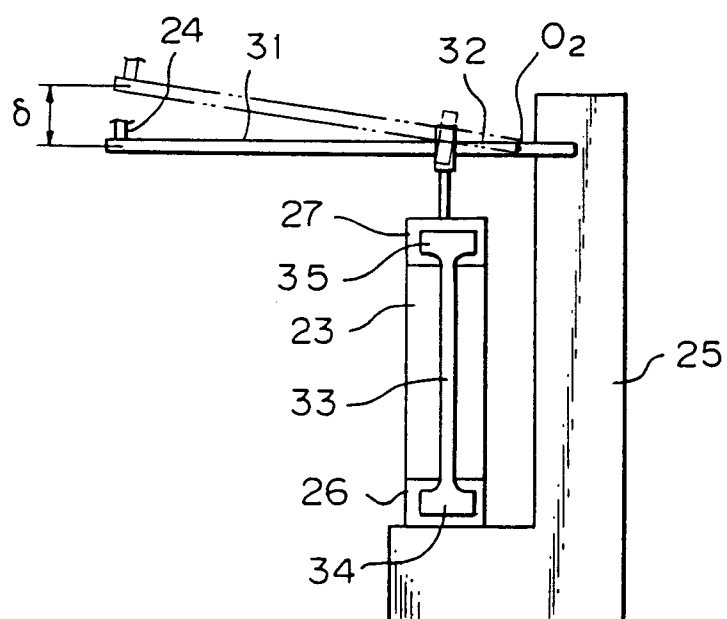


Fig. 5

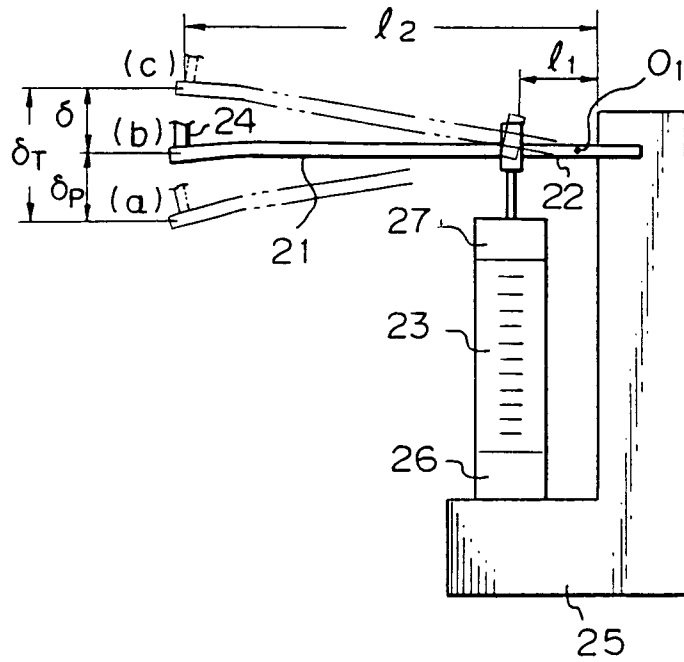


Fig. 6

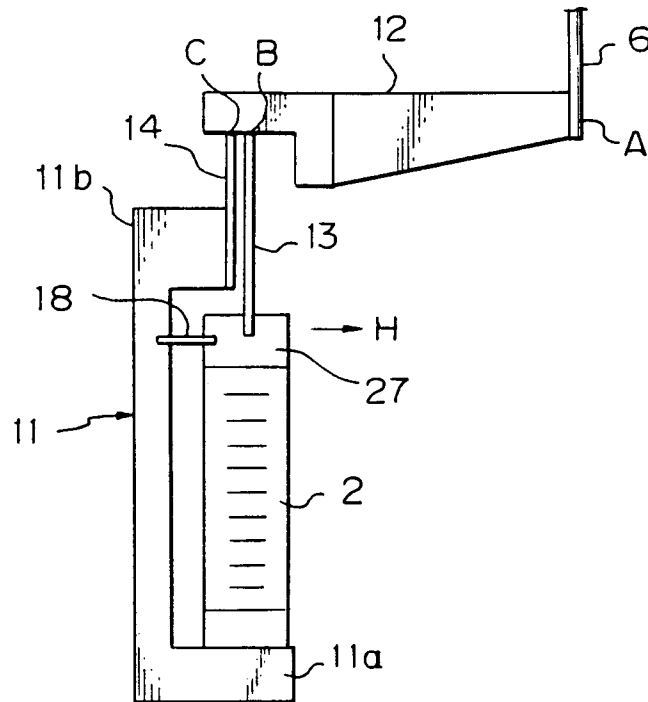


Fig. 7

