

[54] LOW FLUID FLUID MOTOR

[76] Inventor: **Leo L. Tompkins**, 127 Wacaster,
Jackson, Mich. 39209

[22] Filed: **May 24, 1972**

[21] Appl. No.: **256,561**

[52] U.S. Cl. **417/220**

[51] Int. Cl. **F04b 49/00, F01b 25/00**

[58] Field of Search 418/17; 412/26; 417/220,
417/216, 213

[56] **References Cited**

UNITED STATES PATENTS

993,653	5/1911	Coleman.....	418/17
2,487,321	11/1949	Ericson.....	418/17
2,502,546	4/1950	Adams.....	417/213
2,549,714	4/1951	Shannon.....	418/131
2,629,982	3/1953	Hecker.....	417/216
2,678,607	5/1954	Hufferd et al.....	417/220
3,560,118	2/1971	Palachik.....	418/26
3,644,063	2/1972	Ludwigsburg.....	418/213

Primary Examiner—William L. Freeh

Attorney, Agent, or Firm—Clarence A. O'Brien; Harvey B. Jacobson

[57] **ABSTRACT**

A sliding vane rotary fluid motor including a rotor cylinder shiftable laterally of the axis of rotation of the rotor between a first position generally concentric with the rotor axis and a second position eccentrically disposed relative to the rotor axis. Structure is provided for yieldingly biasing the cylinder toward its limit position concentric with the axis of rotation of the rotor and the cylinder defines a sliding partition within the housing of the motor with the partition closing one side of a fluid chamber within the motor housing. Rotor speed responsive fluid delivery structure is provided for ducting fluid under pressure from the intake of the motor into the chamber in response to a reduction in rotor speed to thereby overcome the biasing action acting upon the cylinder and shift the latter from its position concentric with the rotor axis toward its limit position of movement eccentrically disposed relative to the rotor axis.

7 Claims, 6 Drawing Figures

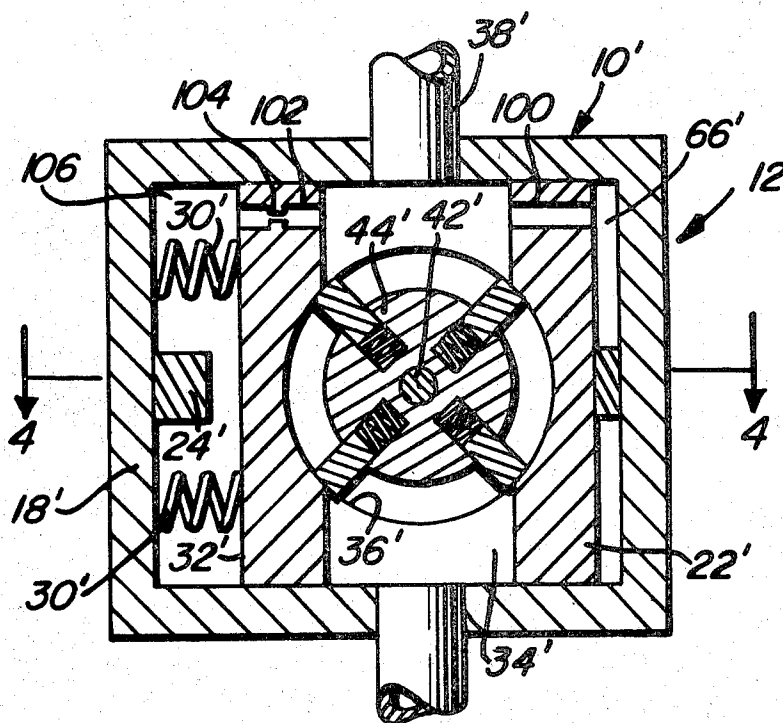


Fig. 1

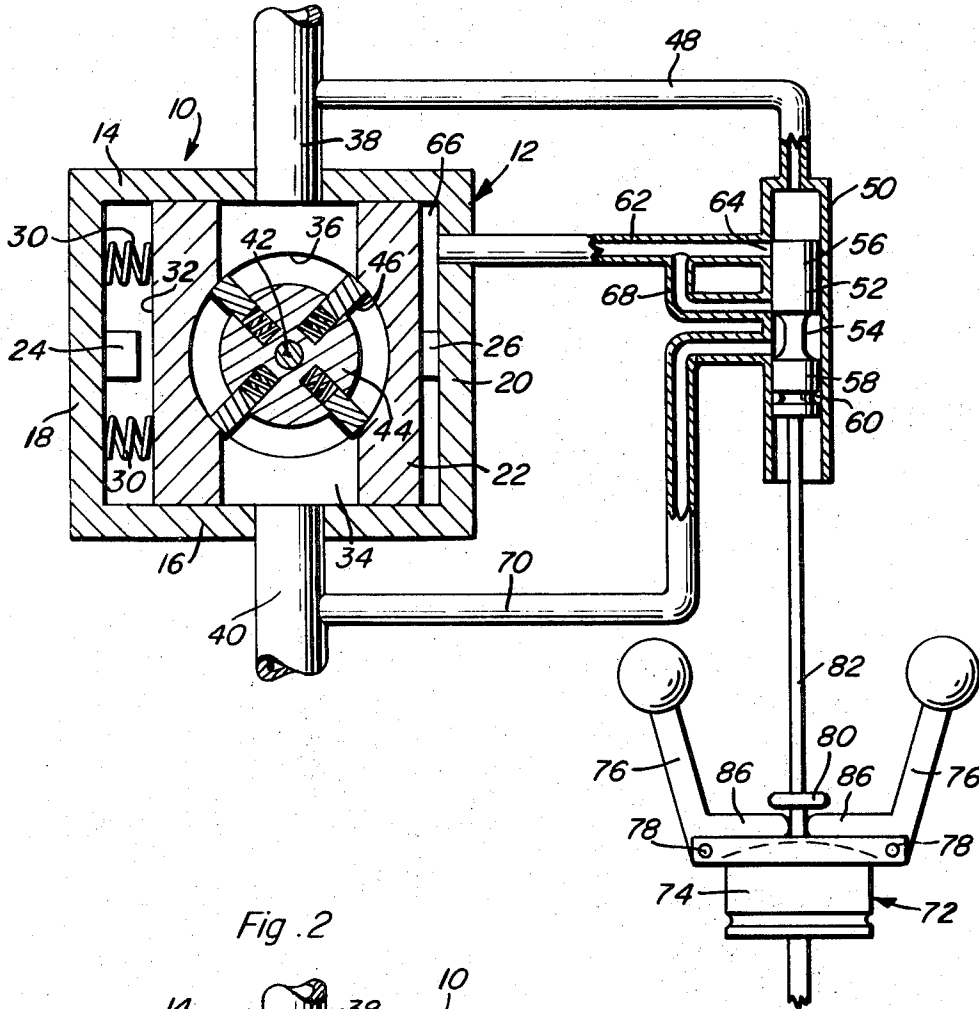


Fig. 2

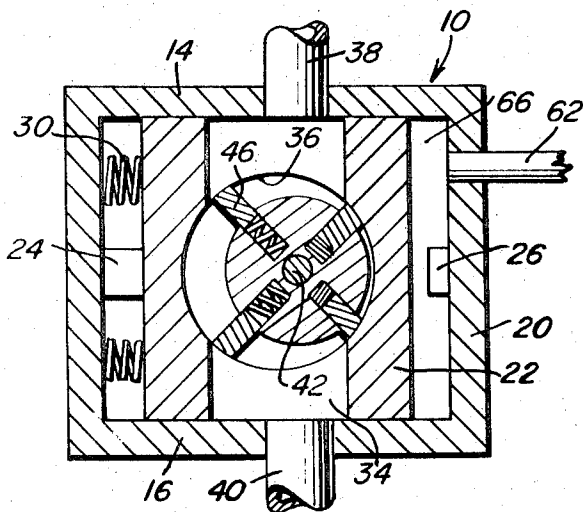


Fig. 3

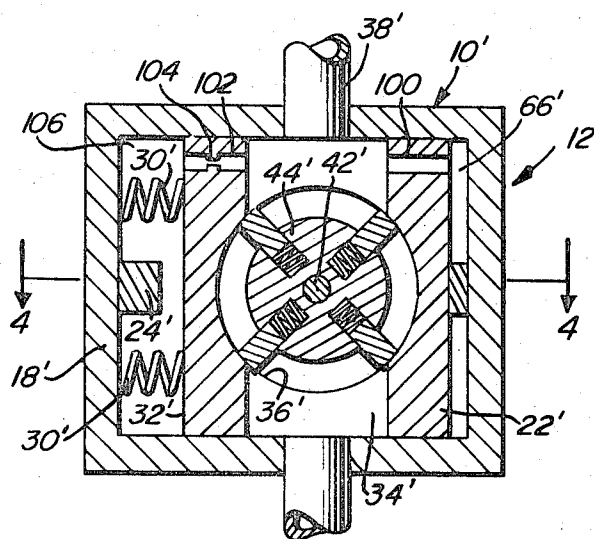


Fig. 4

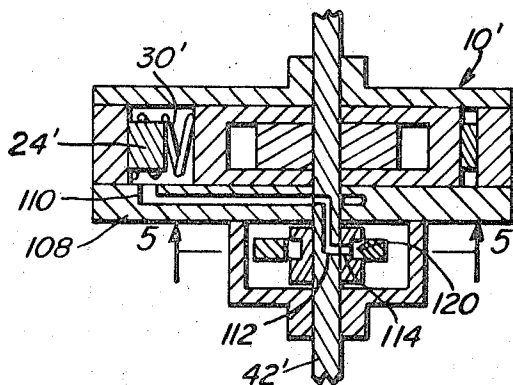


Fig. 5





Fig. 6



LOW FLUID MOTOR

The fluid motor of the instant invention has been specifically designed for gang use and operation from a single source of fluid under pressure and without individual throttling of fluid pressure to the motors, even when they are to operate at different speeds and under different load conditions. The fluid motor is provided with a control system which, after being premetered, will be operative to develop from a constant source of fluid pressure varying power output at reasonably constant motor speeds.

Of course, although the fluid motor has been specifically designed for gang use it may also be utilized singly whenever desired with the same efficiency it possesses when operating in conjunction with other fluid motors from a single source of fluid under pressure.

The main object of this invention is to provide a fluid motor which will be capable of developing variable power at substantially constant motor speeds from a predetermined source of fluid under pressure.

Another object of this invention is to provide a fluid motor which may be utilized in a gang motor installation wherein all of the motors are supplied fluid under pressure from a single source and the motors may be required to develop varying power output at different motor speeds.

A final object of this invention to be specifically enumerated herein is to provide a fluid motor which will conform to conventional forms of manufacture, be of simple construction and easy to operate so as to provide a device that will be economically feasible, long lasting and relatively trouble-free in operation.

These together with other objects and advantages which will become subsequently apparent reside in the details of construction and operation as more fully hereinafter described and claimed, reference being had to the accompanying drawings forming a part hereof, wherein likenumerals refer to like parts throughout, and in which:

FIG. 1 is a schematic longitudinal sectional view of a first form of fluid motor constructed in accordance with the present invention and with portions of the fluid control system thereof also illustrated in section;

FIG. 2 is a sectional view similar to FIG. 1 but with the cylinder of the fluid motor illustrated in an eccentric position relative to the rotor axis as opposed to the concentric position of the cylinder illustrated in FIG. 1;

FIG. 3 is a sectional view similar to FIG. 1 but of a modified form of fluid motor constructed in accordance with the present invention;

FIG. 4 is a sectional view taken substantially upon the plane indicated by the section line 4—4 of FIG. 3;

FIG. 5 is a sectional view taken substantially upon the plane indicated by the section line 5—5 of FIG. 4; and

FIG. 6 is a fragmentary sectional view taken substantially upon the plane indicated by the section line 6—6 of FIG. 5.

Referring now more specifically to the drawings, the numeral 10 generally designates the fluid motor of the instant invention. The motor 10 includes a housing referred to in general by the reference numeral 12 consisting of interconnected top and bottom walls 14 and 16 and opposite side walls 18 and 20. The opposite ends of the housing 12 are closed by means of end walls (not shown) secured thereover and a cylinder body 22

is disposed within the housing 12 and slidable therein toward and away from the side walls 18 and 20. The side walls 18 and 20 include abutment blocks 24 and 26 carried on their inner surfaces with which the opposite sides of the cylinder block 22 are engageable and a pair of compression springs 30 are disposed between the inner surface of the side wall 18 and the opposing side 32 of the cylinder block 22 yieldingly urging the cylinder block 22 toward the limit position thereof defined by the abutment block 26.

The cylinder block 22 includes a vertically extending slot 34 and a horizontal longitudinal center bore 36. A fluid pressure inlet pipe 38 opens into the upper end of the slot 34 through the top wall 14 and a fluid pressure outlet pipe 40 opens outwardly from the lower end of the slot 34 through the bottom wall 16. Of course, it is to be noted that the pipes 38 and 40 comprise portions of a closed hydraulic system wherein the pipe 38 extends from a fluid pressure source (not shown) and the pipe 40 extends to a reservoir or sump (not shown) for that fluid pressure source.

A rotor shaft 42 is journaled lengthwise through the housing 12 and carries a rotor body 44 thereon within the bore 36. The rotor body 44 includes circumferentially spaced spring-urged sliding radial vanes 46.

A fluid pressure bypass line 48 extends from the inlet pipe 38 to the inlet end of a valve cylinder 50 having a piston 52 reciprocal therein. The piston 52 includes a diametrically reduced center portion 54 intermediate two opposite end piston heads 56 and 58 and the head 58 is provided with a fluid sealing ring 60. A pressure conduit 62 has one end communicated with the interior of the end of the valve cylinder 50 into which the line 48 opens as at 64 and the other end of the pressure conduit 62 opens into the pressure chamber 66 disposed between the cylinder body 22 and the inner surface of the side wall 20 of the housing 12. Also, a return line 68 has one end communicated with the interior of the pressure conduit 62 intermediate its opposite ends and the other end communicated with the central portion of the valve cylinder 50. Finally, a bleed line 70 has one end communicated with the outlet pipe 40 and the other end communicated with the interior of the valve cylinder 50 below the line 68.

A governor assembly referred to in general by the reference numeral 72 is provided and includes a rotary head 74 driven by the rotor shaft 42 in any convenient manner (not shown) and the body 74 has a pair of centrifugal weight arms 76 pivotally supported therefrom as at 78 with end portions engageable with a diametrically enlarged head 80 of an operating rod 82 secured to the lower end of the piston 52.

In operation, and with the cylinder body 22 positioned as illustrated in FIG. 1 of the drawings and the piston 52 disposed in an upper position, the bore 36 is centrally disposed relative to the rotor shaft 42 and communication between the inlet pipe 38 and the pressure chamber 66 through the line 48, the valve cylinder 50 and the conduit 62 is terminated. Accordingly, fluid pressure acting upon the vanes 46 will act equally in opposite directions thereon resulting in the rotor shaft 42 remaining stationary. However, when fluid pressure in the line 48 increases sufficiently to urge the rod 82 downwardly to swing the weight arm 76 toward the positions thereof illustrated in FIG. 1, the inlet end of the conduit 62 is uncovered by the head 56 and fluid pressure is admitted into the pressure chamber 66 which

causes the cylinder body 22 to shift to the left as viewed in FIG. 1 of the drawings against the biasing action of the springs 30. This of course will result in the bore 36 being eccentrically positioned relative to the rotor shaft 42 in the manner illustrated in FIG. 2 of the drawings whereupon fluid pressure passing through the slot 34 will cause the rotor body 44 to rotate in a counter-clockwise direction as viewed in FIG. 2 of the drawings.

If there is any tendency for a rotor shaft 42 to overspeed, the proportional overspeed of the body 74 of the governor 72 will cause the weight arms 76 to swing outwardly upon the base ends 86 of the arms will push upwardly on the rod 82 so as to shift the piston 52 upwardly toward the position thereof illustrated in FIG. 1 of the drawings wherein the head 56 terminates communication between the line 48 and the conduit 62 thus preventing a further increase of pressure in the chamber 66. If the limit of increase of pressure in the chamber 66 is not sufficient to check the overspeed of the rotor body 44, the governor 72 will spin faster resulting in the rod 82 being pushed further upwardly so as to vent the excess pressure from the chamber 66 through the conduit 62 and the line 68 whereupon the load on the rotor shaft will decrease its speed of rotation and the weight arm 76 will bias the rod 82 upwardly with less force resulting in the pressure above the head 56 and the valve cylinder 50 being operable to urge the piston 52 downwardly to again communicate the conduit 62 with the line 48 so as to again increase the pressure within the chamber 66. Of course, if the load on the shaft 42 is increased the speed of rotation of the shaft 42 will be lowered and the pressure within the chamber 66 will be increased so as to further displace the cylinder block 22 toward the position thereof illustrated in FIG. 2 of the drawings wherein maximum torque for a given source of fluid under pressure is developed by the motor 10. On the other hand, if the load on the rotor shaft 42 is reduced, the resultant increase in speed of the rotor shaft 42 will result in the rod 82 and the piston 52 being urged upwardly to throttle the pressure supplied to the chamber 66 through the valve cylinder 50 and thus allow the biasing action of the springs 30 to shift the cylinder body 22 back toward the position thereof illustrated in FIG. 1 of the drawings until that position of eccentric displacement of the bore 36 relative to the rotor shaft 42 is reached wherein the torque developed by the motor 10 is substantially equivalent to the load on the rotor shaft 42.

With attention now invited more specifically to FIGS. 3 through 6 of the drawings, there may be seen a modified form of fluid motor referred to in general by the reference numeral 10' and including components thereof which are similar to some of the above-mentioned components of the fluid motor 10 and which are therefore designated by corresponding prime reference numerals.

The motor 10' includes a different fluid pressure control system than that which is provided with the motor 10 in that the cylinder body 22' is provided with a first bore 100 that communicates the upper end of the slot 34' with the chamber 66' interiorly of the housing 12'. In addition, the cylinder body 22' further includes a bore 102 having a restrictive zone 104 communicating the upper end of the slot 34' with the chamber 106 defined between the surface 32' and the inner surface of the side wall 18'. Still further, one end wall 108 of the

motor 10' includes a pressure relief passage 110 extending from the chamber 106 radially inwardly to the rotor shaft 42' and the latter includes a drilled passage 112 having a radially opening inlet end communicating with the passage 110 and a radially outwardly opening outlet end communicated with the inner end of a generally radial passage 114 formed in a governor body 116 mounted on the shaft 42'. The governor body 116 includes a radially shiftable weight 118 mounted thereon and the weight 118 is eccentrically weighted on the left side thereof illustrated in FIG. 5 of the drawings while the right side thereof includes a needle valve element 120 for closing the radial outermost end of the passage 114 in response to the governor weight 118 shifting to the left as viewed in FIG. 5 of the drawings.

In operation, when fluid pressure is supplied to the inlet pipe 38' the pressure of fluid within the chamber 66' increases and the cylinder body 22' is shifted to the left so as to eccentrically position the bore 36' relative to the rotor shaft 42'. This of course causes counter-clockwise rotation of the rotor body 44'. However, a certain portion of the fluid under pressure entering the housing 12' through the inlet pipe 38' passes through the bore 102 and the restrictive zone 104 thereof and into the chamber 106 to assist the compression springs 30' in overcoming the biasing action of the fluid pressure within the chamber 66'. However, until the desired operating speed of the rotor body 44' is reached, fluid pressure entering the chamber 106 is vented therefrom through the passages 110 and 112 and also the passage 114. When, however, the rotary speed of the shaft 42 reaches the desired limit, the governor weight 118 slides to the left as viewed in FIG. 5 of the drawings so as to seat the needle valve element 120 in the radial outermost end of the bore on passage 114 whereby the bleeding of fluid pressure from the chamber 106 is terminated. Thus, fluid pressure within the chamber 106 is increased and the cylinder body 22' is pushed back toward the position thereof illustrated in FIG. 3 of the drawings with the bore 36' eccentrically disposed relative to the shaft 42'. Of course, as soon as the shifting of the cylinder body 22' to the right as viewed in FIG. 3 as a result of an increase of pressure within the chamber 106 is sufficient to reduce the output torque of the motor 10' and thus the rotary speed of the shaft 42', the pressure within the passage 114 will be sufficient to cause the governor weight 118 to shift back toward the right as viewed in FIG. 5 of the drawings so as to uncover the outlet end of the passage 114 and thus relieve some of the pressure within the chamber 106 allowing the cylinder body 22' to again shift toward the left as viewed in FIG. 3 of the drawings until the eccentric positioning of the bore 36' relative to the shaft 42' is such that the torque output of the motor 10' is equal to the load on the shaft 42'.

Thus it may be seen that the motors 10 and 10' operate in substantially the same manner and are each capable of automatically controlling the power output thereof to maintain a substantially constant rotor speed from a given source of fluid under pressure even though the load on the output shafts thereof may vary.

The foregoing is considered as illustrative only of the principles of the invention. Further, since numerous modifications and changes will readily occur to those skilled in the art, it is not desired to limit the invention to the exact construction and operation shown and de-

scribed, and accordingly all suitable modifications and equivalents may be resorted to, falling within the scope of the invention.

What is claimed as new is as follows:

1. A fluid motor comprising a hollow housing, a sliding vane equipped rotor journaled in said housing, a cylinder disposed in said housing for limited shifting therein along a path extending generally diametrically of the cylinder, said rotor being disposed in said cylinder, fluid pressure inlet and outlet means opening into and out of said cylinder on opposite sides thereof, spring means yieldingly biasing said cylinder in one direction along said path, said cylinder and housing including means coacting to define expansion chamber means expandable and contractible in response to reciprocal movement of said cylinder along said path, fluid pressure supply means communicating said fluid pressure inlet with said expansion chamber means and including rotor speed controlled fluid pressure controlling means for controlling the fluid pressure in said expansion chamber means and operative to vary the fluid pressure in said expansion chamber means in response to variance in the speed of rotation of said rotor, said expansion chamber means including a pair of chambers on opposite sides of said cylinder spaced along said path communicated with said inlet means and operable, upon substantially equal fluid pressure being communicated therewith, to substantially equally urge said cylinder in opposite directions along said path, said fluid pressure controlling means including restricted communication between said inlet means and one of said chambers as well as rotor speed controlled variable fluid outlet means for said one chamber, said spring means being operable to yieldingly bias said cylinder toward said other chamber.

2. The combination of claim 1 wherein said variable outlet means includes valve means operative to open and close said variable fluid outlet means in response to increases and decreases, respectively, in the speed of rotation of said rotor.

3. In combination, a stator including a fluid inlet and a fluid outlet, a rotor, means supporting said rotor for rotation relative to the stator and for relative shifting between the rotor and stator transversely of the rotor axis between predetermined first and second minimum and maximum displacement positions, yieldable spring means biasing said stator and rotor toward the relative minimum displacement positions thereof, and pressure responsive shift means for shifting said stator and rotor toward the relative maximum displacement positions thereof as the pressure within said inlet increases, said pressure responsive shift means including first and second fluid pressure actuated force means operatively associated with said stator and rotor to bias them toward their first and second fluid pressure force means including means for receiving fluid under pressure at a first

restricted flow rate and a second higher flow rate, respectively, from said inlet, and fluid outlet means for said first force means as well as rotor speed responsive discharge valve means for said fluid outlet means operative to increasingly throttle the discharge of said fluid through said fluid outlet means in response to increasing rotor speed above a predetermined rotational speed thereof.

4. In combination, a stator including a fluid inlet and a fluid outlet, a rotor, means supporting said rotor for rotation relative to the stator and for relative shifting between the rotor and stator transversely of the rotor axis between predetermined first and second minimum and maximum displacement positions, yieldable spring means biasing said stator and rotor toward the relative minimum displacement positions thereof, and pressure responsive shift means for shifting said stator and rotor toward the relative maximum displacement positions thereof as the pressure within said inlet increases, said shift means including rotor speed actuated means for controllably venting fluid pressure from said inlet to allow said spring means to urge said stator and rotor toward their relative positions of minimum displacement from relative positions of greater displacement in response to increases of rotor speed above a predetermined rotational speed thereof.

5. In a hydraulic fluid motor having an inlet and an outlet and relatively positionable and movable components coacting to define a working chamber and in which the volume of fluid displaced for each output cycle is positive for predetermined relative positions of said components and which is varied in response to changes in relative position of said components; that improvement comprising means varying the relative position of the components for varying the volume of the positive displacement for each output cycle in response to load characteristics during operation of the motor, said means for varying the position of the components including means for spring biasing said relatively positionable components into a relative position to attain minimum volume displacement for each output cycle, and fluid pressure responsive means responsive to increase in supply pressure at the inlet to shift said components against said biasing means in a direction to increase volume displacement of the motor for each output cycle as the supply pressure increases.

6. The structure as defined in claim 5 together with governor means operatively associated with said fluid pressure responsive means to decrease the effect of an increase in the supply pressure at the inlet as the speed of the output cycle increases.

7. The structure as defined in claim 6 wherein said motor includes at least one rotary component and a rotary output driving said governor means.

* * * * *

UNITED STATES PATENT OFFICE
CERTIFICATE OF CORRECTION

Patent No. 3,813,189 Dated May 28, 1974

Inventor(s) Leo L. Tompkins

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Page 1, in the heading, delete "Michigan" in the address of the patentee Leo L. Tompkins, and substitute -- Mississippi --.

Signed and sealed this 1st day of October 1974.

(SEAL)
Attest:

McCOY M. GIBSON JR.
Attesting Officer

C. MARSHALL DANN
Commissioner of Patents