




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61B 5/00	A1	(11) International Publication Number: WO 98/42252 (43) International Publication Date: 1 October 1998 (01.10.98)
(21) International Application Number: PCT/US98/05100 (22) International Filing Date: 16 March 1998 (16.03.98) (30) Priority Data: 08/824,143 25 March 1997 (25.03.97) US (71) Applicant (for all designated States except US): CYGNUS, INC. [US/US]; 400 Penobscot Drive, Redwood City, CA 94063 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): KURNIK, Ronald, T. [US/US]; 961 Haddock Street, Foster City, CA 94404 (US). TAMADA, Janet [US/US]; 505 Cypress Point Drive #271, Mountain View, CA 94043 (US). TIERNEY, Michael, J. [US/US]; 368 North Sixth Street, San Jose, CA 95112 (US). (74) Agents: BOZICEVIC, Karl et al.; Bozicevic & Reed LLP, Suite 200, 285 Hamilton Avenue, Palo Alto, CA 94301 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: ELECTRODE WITH IMPROVED SIGNAL TO NOISE RATIO

(57) Abstract

An electrode assembly for sensing an electrochemical signal diffused from a source to a working electrode which is comprised of a plurality of substantially separated working electrode surfaces is disclosed. The electrode of the invention is comprised of (1) a working electrode made up of a plurality of working electrode surfaces or components, and (2) an electrically insulating gap defined by adjacent edges of (1) insulating the working electrode surfaces or components from each other. The working electrode components are configured to receive electrochemical signal from two or preferably three dimensions simultaneously. The working electrode components configured over the same surface as a single electrode provide (1) an improved signal to noise ratio as compared to a single electrode by reducing noise, and (2) provided an overall enhanced signal after sensing for a given period of time.

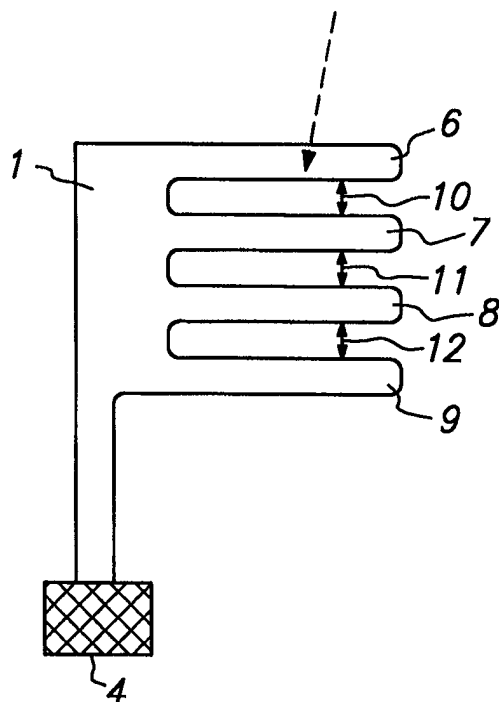

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ELECTRODE WITH IMPROVED SIGNAL TO NOISE RATIO

Field of the Invention

The invention relates generally to the field of electrodes for electrochemical
5 measurements, specifically electrodes used in the biomedical fields to measure
concentrations of biomedically significant compounds.

Background of the Invention

The amount of a chemical in a given volume of solution can be measured with an
electrode. An electrode is the component in an electrochemical cell in contact with the
10 electrolyte medium through which current can flow by electronic movement. Electrodes,
which are essential components of both galvanic (current producing) and electrolytic
(current using) cells, can be composed of a number of electrically conductive materials,
e.g., lead, zinc, aluminum, copper, iron, nickel, mercury, graphite, gold, or platinum.
Examples of electrodes are found in electric cells, where they are dipped in the electrolyte;
15 in medical devices, where the electrode is used to detect electrical impulses emitted by the
heart or the brain; and in semiconductor devices, where they perform one or more of the
functions of emitting, collecting, or controlling the movements of electrons and ions.

The electrolyte can be any substance that provides ionic conductivity, and through
which electrochemically active species can diffuse. Electrolytes can be solid, liquid, or
20 semisolid (e.g., in the form of a gel). Common electrolytes include sulfuric acid and
sodium chloride, which ionize in solution. Electrolytes used in the medical field must
have a pH that is sufficiently close to that of the tissue in contact with the electrode (e.g.,
skin) so as not to cause harm to the tissue over time.

Electrochemically active species that are present in the electrolyte can undergo
25 electrochemical reactions (oxidation or reduction) at the surface of the electrode. The rate
at which the electrochemical reactions take place is related to the reactivity of the species,
the electrode material, the electrical potential applied to the electrode, and the rate at
which the electrochemically active species is transported to the electrode surface.

In unstirred electrolytes, such as quiescent liquid solutions and gel electrolytes,
30 diffusion is the main process of transport of electrochemically active species to the
electrode surface. The exact nature of the diffusion process is determined by the geometry
of the electrode (e.g., planar disk, cylindrical, or spherical), and the geometry of the

electrolyte (e.g., semiinfinite large volume, thin disk of gel, etc.). For example, diffusion of electrochemically active species to a spherical electrode in a semiinfinite volume of electrolyte differs from diffusion of electrochemically active species to a planar disk electrode. At the center of the disk electrode the diffusion of the electroactive species
5 towards the electrode is in a substantially perpendicular direction, whereas at the edges of the disk electrode the diffusion comes from both perpendicular and radial directions. The combination of these two different diffusion patterns makes the total current collected at the disk electrode.

The present invention makes use of a unique geometry of the electrode surface such
10 that the diffusion of the electrochemically active species in the radial and axial direction gives a total signal higher than if there was only diffusion in the axial direction, thus allowing the use of a decreased surface area of the electrode surface, particularly for the case of an electrolyte of finite volume.

Summary of the Invention

15 An electrode assembly is disclosed that includes a multicomponent working electrode subassembly comprised of a plurality of substantially physically separated working electrode surfaces (e.g., a plurality of working electrode components). When surfaces of the working electrode subassembly are configured over an area that is equal to the area of a single piece working electrode, the multicomponent electrode will provide an improved
20 signal to noise ratio due to reduced noise, and will provide an enhanced signal when measuring signal from a finite amount of medium over a finite amount of time. A working electrode of the invention provides a substantially discontinuous surface area in contact with a medium through which a compound will diffuse in response to a current. Noise created by the electrode material is reduced by reducing the surface area per individual
25 working electrode surface, and the signal is enhanced by allowing diffusion to multiple working electrode surfaces via two and preferably three dimensions, e.g., (1) normal to the main surface plane, (2) normal to the length edge, and (3) normal to the width edge. By using a substantially discontinuous surface, a large number of edges are provided within the area being monitored. In the presence of edges, the flux for the species of
30 interest is significantly higher (at the edge, due to radial diffusion) thus giving a higher overall flux over the area of interest that is greater than that if there was only diffusion directly perpendicular to the main surface plane of the electrode of interest.

The invention features an electrode subassembly comprised of interconnected electrode surfaces that form a working electrode, with each of the electrode components being separated from the others by an electrically insulating gap.

An object of the invention is to provide a working electrode comprised of
5 substantially discontinuous working electrode surfaces or components and thereby obtain signal from three dimensions which provide an improved signal to noise ratio.

Another object is to provide a method for measuring an electrochemical signal by providing substantially discontinuous working electrode surfaces or components that detect the flux of the electrochemical signal in two or more preferably three directions relative to
10 the working electrode surface.

Another object of the invention is to provide an electrode subassembly composed of a working electrode comprised of substantially discontinuous working electrode surfaces for use with an electrode assembly to measure accurately, consistently, and quickly a diffused electrochemical signal, and achieve an accurate measurement of the electrochemical signal
15 within a matter of seconds to minutes.

Another object of the invention is to provide an electrode assembly with a bonding pad or a pad that contacts a pin connector that can be readily connected and disconnected from a power source and monitoring device, thus allowing for replacement of the electrode assembly, electrode subassembly, and/or an ionically conductive material (e.g., an
20 electrolytic gel) used with the electrode assembly.

An advantage of the working electrode is that it provides an improved signal to noise ratio by reducing noise and allowing a signal to be produced equivalent to a solid electrode but only using one half or less of the surface area of a solid electrode.

Another advantage of the invention is that the electrode can be used to measure very
25 low concentrations of an electrochemical signal in an electrolyte (i.e., an ionically conductive material). For example, the electrode can be used in conjunction with a hydrogel system for monitoring glucose levels in a subject (e.g., a human). An electroosmotic electrode (e.g., iontophoresis or reverse iontophoresis electrodes) can be used electrically to draw glucose into the hydrogel. Glucose oxidase (GOD) contained in
30 the hydrogel converts the glucose into gluconic acid and hydrogen peroxide. The electrode subassembly catalyzes the hydrogen peroxide into an electrical signal. This system allows for the continuous and accurate measurement of an inflow of a very small amount of

glucose in an electrolyte (e.g., glucose concentrations 10, 500, or 1,000 or more times less than the concentration of glucose in blood).

Another advantage is that the electrode assembly and electrode subassembly are easily and economically produced.

5 A feature of the electrode subassembly of the invention is that it is small and flat, having a total surface area in the range of about 0.1 cm^2 to 8.0 cm^2 . If desired, the electrode subassembly can also be quite thin, such that it has a thickness in the range of about $0.25 \text{ }\mu\text{m}$ to $250 \text{ }\mu\text{m}$.

10 These and other objects, advantages and features of the present invention will become apparent to those persons skilled in the art upon reading the details of the composition, components and size of the invention as set forth below, reference being made to the accompanying drawings forming a part hereof wherein like numbers refer to like components throughout.

Brief Description of the Drawings

15 Figure 1 is an overhead schematic view of a conventional electrode one dimensional working electrode.

Figure 2 is an overhead schematic view of a two dimensional working electrode.

Figure 3 is an overhead schematic view of a three dimensional working electrode.

20 Figure 4 is a schematic diagram of a device for measuring electrochemical signal which device uses the electrode subassembly and assembly of the invention.

Figure 5 is an overhead schematic view of one embodiment of an electrode assembly of the invention.

Figure 6 is a schematic diagram of the chemical reactions involved in converting glucose to an electrical signal.

25 Figure 7 is an overhead plan view of a simple "strip" embodiment of a working electrode of the invention.

Figure 8 is an overhead view of another simple embodiment of a "strip" configuration of a working electrode of the invention.

30 Figure 9 is yet another embodiment of a simple "strip" embodiment of a working electrode of the invention.

Figure 10 is an overhead view of a simple "checkerboard" embodiment of a working electrode of the invention.

Figure 11 is a graph comparing the embodiment of Figure 8 with a single planar continuous working electrode surface.

Figure 12 is a graph comparing flux for an embodiment as per Figure 10 with a single planar continuous working electrode surface.

5 Figure 13 is a graph comparing various dimensional changes in "strip" and "checkerboard" electrodes relative to a with a single planar continuous working electrode surface.

Description of the Preferred Embodiments

Before the electrode of the present invention is described and disclosed it is to be understood that this invention is not limited to the particular components or composition described as such may, of course, vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting since the scope of the present invention will be limited only by the appended claims.

15 It must be noted that as used in this specification and the appended claims, the singular forms "a," "an" and "the" include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to "a molecule" includes a plurality of molecules and different types of molecules.

Unless defined otherwise all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. Although any materials or methods similar or equivalent to those described herein can be used in the practice or testing of the present invention, the preferred methods and materials are now described. All publications mentioned herein are incorporated herein by reference for the purpose of describing and disclosing the particular information for which the publication was cited in connection with. Although cited publications may be published prior to the filing date such does not mean that such publications cannot be antedated by virtue of an earlier date of invention.

Definitions

30 The term "electrode subassembly" means a working electrode comprised of a plurality or group of substantially discontinuous working electrode surfaces (e.g., components), where the adjacent edges of the group of working electrode surfaces define an electrically insulating gap and wherein the group of working electrode surfaces allow

for multidimensional diffusion. The working electrode surfaces (e.g., components) can be configured in two or more strips to allow for two dimensional diffusion, or in two or more squares to allow for three dimensional diffusion.

5 The phrase "substantially discontinuous working electrode surfaces" or "substantially physically separated electrode surfaces" is meant to describe a working electrode that comprises a plurality of working electrode surfaces that are electrically connected, but otherwise substantially separated one from another (i.e., the adjacent edges of the working electrode surfaces of the working electrode are separated by an electrically insulating gap and the group of working electrode surfaces allow for multidimensional diffusion).

10 The term "electrode assembly" means an assembly comprised of 1) an electrode subassembly, 2) an electroosmotic electrode (e.g., iontophoresis electrode), and 3) reference and counter electrodes. The electrode assembly can additionally include a substrate (e.g., a ceramic or polymeric substrate) to which the electrode assembly and electroosmotic, reference, and counter electrodes are attached.

15 The term "working electrode" means one or more substantially discontinuous electrode surface(s) or components that are monitored to determine the amount of electrical signal generated at the combined surface which cover a defined area to be monitored. The amount of signal generated is correlated with the amount of a chemical compound present in an electrolyte which contains a compound which generates the electrical signal on
20 contact with a surface of working electrode. The working electrode comprises substantially discontinuous catalytic surfaces which allow for multidimensional diffusion of compound to the catalytic surfaces. The catalytic surfaces are comprised of a material selected from the group consisting of platinum, palladium, nickel, carbon, noble metals (e.g., gold), and oxides, dioxides and alloys thereof.

25 The term "electrically insulating gap" means the space defined by the adjacent edges of the outer perimeter of the area defined by the working electrode. The electrically insulating gap electrically isolates the individual surfaces or components from each other by virtue of the width of the gap itself, and/or by virtue of an electrically insulating material contained within the gap.

30 The term "catalytic surface" or "catalytic face" are used interchangeably herein to mean the surface of the working electrode components that: 1) is in contact with the surface of an electrolyte containing material through which the chemical signal flows from

a source of chemical signal; 2) is comprised of a catalytic material (e.g., platinum, palladium, or nickel and/or oxides, dioxides and alloys thereof); 3) catalyzes the conversion of the chemical signal into an electrical signal (i.e., an electrical current); and 4) defines the total working electrode surface area (all working electrode components) that, when composed of a catalytic material, is sufficient to drive the electrochemical reaction at a rate sufficient to generate a detectable, accurate electrical signal that is correlatable with the amount of chemical signal present in the electrolyte. Only that electrical signal generated at the catalytic surface of the working electrode is correlated with the amount of chemical signal present in the electrolyte.

The term "chemical signal," or "electrochemical signal," and the like are used interchangeably and mean the chemical compound that is ultimately converted to an electrical signal at the catalytic faces of the working electrode components. "Chemical signals" can be: 1) directly converted into an electrical current by chemical reaction at the catalytic faces of the electrode subassembly; or 2) indirectly converted into an electrical signal by the action of one or more catalysts. For example, the chemical signal glucose is indirectly converted into an electrical signal by reactions driven by two catalysts. A first catalyst glucose oxidase (GOD), which is present in the electrolyte containing material (e.g., a hydrogel patch), converts glucose into gluconic acid and hydrogen peroxide. Hydrogen peroxide is then converted to a measured electrical current upon electrochemical oxidation by platinum (the second catalyst) on the catalytic faces of all of the working electrode components making up the electrode subassembly. Preferably, the chemical signal is generated by catalytic action on a biomedically significant compound (e.g., glucose).

"Ionically conductive material" or "medium" means a material that provides ionic conductivity, and through which electrochemically active species can diffuse. The medium will allow diffusion in three dimensions, i.e., normal to a planar surface of a working electrode component, normal to a length edge of the working electrode component and normal to a width edge of a working electrode component. The ionically conductive material can be, for example, a solid, liquid, or semisolid (e.g., in the form of a gel) material that contains an electrolyte, which can be composed primarily of water and ions (e.g., sodium chloride), and generally comprises 50% or more water by weight. The material can be in the form of a gel, a sponge or pad (e.g., soaked with an electrolytic

solution), or any other material that can contain an electrolyte and allow passage of electrochemically active species, especially the chemical signal of interest, through it.

Electrode (General)

The invention must have some basic characteristics in order to be useful for its intended purpose, which is to detect a chemical signal in a manner such that the amount of signal detected can be related to the amount of signal in a given source, e.g., detect hydrogen peroxide generated by glucose oxidase (GOD) catalysis of glucose. The electrode assembly and medium must: (1) enable ions to flow in more than one dimension toward surfaces of the electrode subassembly; (2) be easy and inexpensive to manufacture; (3) have a size such that the surface area of one face of the electrode assembly is in the range of about 0.1 cm^2 to 8.0 cm^2 , and a thickness of less than 1 mm wherein all components of the electrode assembly are in substantially the same plane; and (4) include an electrode subassembly comprised of substantially discontinuous working electrode surfaces, e.g., separated working electrode components, which catalyze substantially all chemical signals which diffuse inward from the area surrounding the area defined by the electrode subassembly--all in a portable unit sufficiently small such that the unit can be worn as a watch is worn and weigh less than 0.25 kilograms.

As used herein, "surface area" means the geometric surface area (e.g., the geometric surface area of a circular electrode defined by the formula πr^2), without accounting for microscopic surface roughness that can contribute to the actual, three-dimensional surface area. The microscopic surface area is important in considering the actual, three-dimensional surface area available to, for example, drive the electrochemical conversion of the chemical signal to an electrical signal. The surface of an electrode subassembly is the sum of all of the surface areas of each component or surface of the working electrode but not including any space or gap that exists between the components or between solid areas of a substantially discontinuous single working electrode surface.

For reasons that may relate to factors such as the build up of undesired materials in the electrode assembly and/or electrode subassembly, the electrode assembly and/or electrode subassembly must be easily replaceable (e.g., by a user) in a convenient manner. In general, the electrode assembly and/or electrode subassembly is designed for use in continuous chemical signal sensing over a period ranging from about 1 day to 1 month, preferably about 1 week to 2 weeks, more preferably about 2 weeks to 4 weeks or more.

After such time, the electrode is preferably designed so that it is disposable (e.g., can be readily detached from the monitoring device and replaced with a new electrode subassembly and/or electrode assembly). Accordingly, the electrode assembly must have some structural integrity, and provide for the detection of the chemical signal of interest.

- 5 In that the electrode assembly and sensor housing containing the electrode assembly is preferably small (e.g., hand held, e.g., the size of a watch to be worn on the wrist of a patient and weighing about 0.25 kilograms or less). If desired, the electrode assembly and electrode subassembly can be particularly thin, e.g., in the range of 0.25 μm to 250 μm . In order to measure accurately the amount of a chemical signal (e.g., the amount of
- 10 hydrogen peroxide generated by GOD catalysis of glucose) and be sufficiently large to be manipulated, the electrode assembly cannot be too thin and cannot be too small.

The overall surface area of the complete electrode assembly (which includes the electrode subassembly) on a single surface should be in the range of about 0.25 cm^2 to about 8 cm^2 , preferably about 0.50 cm^2 to 2 cm^2 .

15 Basic Structure of the Electrode Subassembly

- Figures 1, 2, and 3 are overhead schematic views of exemplary embodiments of an electrode subassembly. The embodiments of Figures 1, 2 and 3 allow migration to electrode surface (2) from one, two and three dimensions respectively. Figures 2 and 3 show embodiments of the invention. The basic structural components of the electrode
- 20 subassembly are the working electrode comprised of substantially discontinuous working electrode surfaces as per Figures 2 and 3. These components can be configured in a variety of ways.

- Some of the basic configurations of the working electrode components are shown within Figures 1, 2, 3, 5, 7, 8, 9 and 10. Figure 1 shows a basic configuration wherein
- 25 the arrow leading towards the working electrode 1 is intended to represent electrochemical signal diffusing toward the surface of the working electrode 1 from a direction normal to the page on which the electrode 1 is drawn. Thus, electrochemical signal diffuses toward the surface of the working electrode 1 via a single dimension. These basic concepts are followed per the present invention. However, per the present invention, electrochemical
- 30 signal can diffuse to a surface or edge of the working electrode 1 via two different and preferably three different dimensions.

As shown in Figure 2 the working electrode 1 includes working electrode component strips 6, 7, 8 and 9, which are separated from each other by gaps 10, 11 and 12. In this "strip" configuration it is possible to detect electrochemical signal diffusing to the working electrode 1 via the path normal to the page as per Figure 1 and signal which diffuses in a direction substantially parallel to the page (from top to bottom) as shown by the arrows within the gaps 10, 11 and 12.

A more preferred embodiment of the invention is shown within Figure 3 wherein the electrochemical signal can diffuse toward the working electrode 1 via three different dimensions. More specifically, the working electrode 1 includes substantially separate discontinuous surface areas 13, 14, 15, 16, 17 and 18. These surface areas are separated from each other by gaps such as gaps 19 and 20. Thus, per this configuration electrochemical signal can diffuse to a surface of a working electrode component from a direction normal to the page as per Figure 1. Further, electrochemical signal can diffuse to a surface or edge of a working electrode component via a direction parallel to the page in the top/bottom direction as per the arrow in the gap 19 which is similar to that shown in Figure 2. Lastly, electrochemical signal can diffuse to a surface or edge of a working electrode from a direction parallel to a line drawn to the side edges of the page as per the arrow shown in the gap 20. Thus, electrochemical signal diffuses to the working electrode components 13-18 via three different dimensions: (1) normal to the planar surface; (2) normal to a length edge; and (3) normal to a width edge.

Electrodes which are used in order to sense electrochemical signals, and in particular biosensors are often compromised by the inherent background signal that is present when these sensors are used. This background signal or noise is generally due to oxidation of a metal electrode surface. Accordingly, the noise is proportional to the amount of electrode surface area. In order to reduce the noise it is possible to decrease the surface area of the electrode. However, by decreasing the surface area the signal is decreased thus the signal to noise ratio is not improved.

In each of Figures 1, 2, and 3 the working electrode has a surface area smaller than if this electrode were a continuous solid due to the presence of the gaps between the substantially discontinuous surface areas of the working electrode. Thus, the configuration in Figure 2 creates less noise than that of Figure 1, and the configuration in Figure 3 creates less noise than that of Figure 2. Even though the configurations of Figures 2 and 3

create less noise, they can actually generate an enhanced signal when the reading is taken over a defined (i.e., limited or finite) period of time as compared with the signal generated by the configuration of Figure 1. The enhanced signal is created by receiving electrochemical signal from two or three directions as opposed to substantially only one
5 direction as per the system of Figure 1.

Regardless of the configuration of the working electrode 1 it is constructed and operates in essentially the same manner. Thus, before describing the particular details of the operation of particular embodiments such as those shown in Figures 2 and 3, a general description of the working electrode is provided.

10 The basic "strip" configuration of working electrodes of the present invention are shown within Figures 7, 8 and 9. The configurations differ only in that the "gap" is different for each configuration. In Figure 7 each strip 6 and 7 has a width of 125 microns and the gap 10 has a width of 125 microns. In Figure 8 each strip 6 and 7 has a width of 125 microns and the gap 10 has a width of 250 microns. In Figure 9 each strip 6 and 7
15 has a width of 125 microns and the gap 10 has a width of 500 microns. Figure 11 compares the flux readings obtained for a configuration as per Figure 8 with a single piece planar working electrode. As is shown in Figure 11 the flux is substantially increased at or near the edges.

As described above with reference to Figures 7, 8 and 9 (and Figures 1, 2 and 3), the
20 electrode subassembly can also be configured in a variety of ways with respect to the configuration of the electrically insulating gap. The electrically insulating gap 3 can be an empty space between the working electrodes, the width of the gap serving electrically to isolate the two electrodes. Alternatively, the electrically insulating gap can contain an electrically insulating material of substantially the same thickness as the working
25 electrodes, and separating the working electrodes. The electrically insulating material can be configured as a single piece, or can be present as several smaller pieces of material positioned at various points along the working electrodes' adjacent edges. The electrically insulating material can contact substantially the entire perimeter of the adjacent electrodes' edges, or contact only portions of one or both of the working electrode edges.
30 Alternatively, the electrically insulating material can be an area of substrate between the two electrodes on which no electrically conductive material is coated (e.g., the ceramic

substrate onto which the electrode assembly is printed can serve as the electrically insulating material).

In a preferred embodiment, the working electrode surfaces and the electrically insulating gaps are provided in a "checkerboard" configuration. An electrode subassembly that has a checkerboard configuration is one in which working electrode surfaces are provided as a plurality of square-shaped regions, with the working electrode surfaces being isolated from each other by a plurality of rectangular (e.g., square) gaps. In a checkerboard configuration, the working electrode surfaces are configured in a repeating pattern. A schematic representation of an exemplary electrode subassembly having a checkerboard configuration is provided in Fig. 10, and a variety of methods can be used to produce such a subassembly. For example, the working electrode components can be provided as a plurality of strips that are configured parallel to each other. Working electrode surfaces then are configured as a plurality of square-shaped regions by depositing strips of electrically insulating material onto the strips of working electrodes, and at 90° angles relative to the strips of working electrodes. Those skilled in the art will recognize that, as is described above for the construction of an electrode subassembly in general, alternate methods can be used to produce an electrode subassembly having a checkerboard configuration. For example, several small pieces of electrically insulating material can be used to produce the checkerboard, or a single piece of electrically insulating material having square holes can be placed over a working electrode component(s). When present in a checkerboard configuration, the working electrode surfaces preferably each are configured as squares having a width of about 125 μm .

In general, the width of the electrically insulating gap (and/or the width and location of the electrically insulating material contained in the gap) will vary according to a variety of factors such as the thickness of a ionically conductive material (e.g., hydrogel patch) used with the electrode assembly, the diffusion characteristics of the chemical signal to be detected by the electrode subassembly for a given geometry, the size of the electrode subassembly, and the duration of the sensing period (i.e., monitoring period). For example, where the electrode assembly is used with an electrolytic hydrogel patch having a thickness in the range of about 10 μm to 1000 μm and the electrically insulating gap has a

width in the range of about 10 μm to 1,000 μm . In a preferred embodiment, the ionically conductive material is from about 5 mil to 30 mil thick and the gap is about 5 mil wide.

The Working Electrode

The working electrode includes catalytic material on its catalytic surface, preferably Pt, PtO and/or PtO₂. The catalytic surface of the working electrode is the face of the electrode in contact with the electrolyte (e.g., a hydrogel patch) and which is responsible for conversion of chemical signal to electrical signal, and thus the face which constitutes the minimal portion of the electrode that must be composed of the catalytic material. The catalytic material of the catalytic surface is the material that promotes conversion of the chemical signal into an electrical signal. Exemplary catalytic materials include carbon as well as platinum, palladium, gold, iridium, or other nobel metal. Where the chemical signal to be detected is hydrogen peroxide (e.g., generated by catalysis of glucose by GOD), the preferred catalytic materials on the catalytic surfaces of the working electrodes are platinum, palladium, iridium, or other nobel metal, more preferably platinum or oxides, dioxides or alloys thereof.

The working electrode can be porous or nonporous, preferably nonporous. The working electrode can be made of catalytic material (e.g., stamped from a thin sheet of platinum). Although the electrode can be constructed from a single piece of material the working electrode must provide multiple substantially discontinuous working electrode surfaces to allow for multidirectional flow to the edges of the working electrode. The working electrode can be plated (e.g., electrolytic or nonelectrolytic plating), coated, printed, photolithographic ally deposited, or otherwise affixed to a substrate using methods well known in the art for application of a thin metal layer on a surface. The substrate can be composed of any insulating material (e.g., a ceramic, plastic (e.g., polyethylene, polypropylene), or polymeric material) to which the electrode assembly can be affixed. Preferably the electrode subassembly, more preferably the complete electrode assembly, is affixed to a plastic or ceramic substrate.

Preferably, the electrode subassembly and electrode assembly are manufactured in a manner that is the most economical without compromising electrode performance (e.g., the ability of the electrodes to catalyze the chemical signal, and/or conduct an electrical current, or the ability to manipulate the electrodes by hand without breaking or otherwise compromising the operability of the electrodes).

The working electrode can have the catalytic material over all electrode surfaces. Alternatively, only the catalytic faces of the electrode subassembly have the catalytic material. Preferably, the catalytic material is platinum or a platinum-containing material which is present on at least the catalytic surface of the working electrode.

5 The electrode assembly and/or electrode subassembly can include additional materials that enhance the performance, handleability, and/or durability of the electrode assembly and/or electrode subassembly. For example, the working electrode can be coated with a material that serves to decrease the interference of other species in the electrolyte with the measurement of electric current at the working electrode, and/or decrease the rate of
10 oxidation of the catalytic material on the working electrodes' catalytic surfaces.

 The relative size (i.e., diameter, surface area, thickness, etc.) of the working electrode and its individual components can vary according to a variety of factors, including the dimensions of the surface through which the chemical signal is to be detected (e.g., the size of a hydrogel patch through which the chemical signal is drawn), or the size
15 constraints of a monitoring electrode assembly used in connection with the electrode subassembly. If desired, the working electrode including each of its components can be quite thin, with a thickness in the range of 0.25 μm to 250 μm .

 Regardless of the embodiment used, all of the electrode subassemblies of the invention include (i) a working electrode comprised of a plurality of substantially
20 discontinuous working electrode surfaces, allowing for measurement of multidirectional diffusion from a medium to the working electrode surfaces and (ii) an electrically insulating gap defined by the adjacent edges of the working electrode, which gap isolates the working electrode surfaces from each other. The relative proportions of each of the components (e.g., the width, surface areas, and geometries of the working electrode, and
25 the width of the insulating gap) is such that substantially all chemical signal diffusing toward an outer edge of area defined by a working electrode surface allows for measurement of chemical diffused from multiple directions relative to a working electrode surface.

 The electrode subassembly is normally used in an electrode assembly which includes
30 additional components such as: a) an electroosmotic electrode (e.g., an iontophoresis or reverse iontophoresis electrode); b) a counter electrode; and c) a reference electrode. The electroosmotic electrode can be used electrically to draw electrochemical compounds from

a source through material comprising water, enzyme and electrolyte, and to the area of the electrode subassembly. In general, practical and physical limitations of the system require that the electroosmotic electrode and the electrode subassembly be used alternately (i.e., current is present in the electroosmotic electrode or the electric current generated at the electrode subassembly is measured). Alternatively, diffusion of the chemical signal into the ionically conductive material can occur independent of the electroosmotic electrode (e.g., by passive diffusion).

The electrode assembly may comprise additional components. The electrode assembly may additionally comprise a chemical signal-impermeable mask which is positioned in the chemical signal transport path so as to inhibit substantially all chemical signal transport from the chemical signal source having an undesirable vector component relative to a plane of the mask and the catalytic faces of the working electrodes. Use of chemical signal-impermeable masks is not necessary to the operability of the invention and, in some cases, may not be desirable. Exemplary chemical signal-impermeable masks are disclosed within earlier filed application Serial No. 08/527,061, filed September 12, 1995, which application is incorporated herein by reference in its entirety and which application discloses inventions which were invented under an obligation to assign rights to the same entity as that to which the rights in the present invention were invented under an obligation to assign.

The electrode subassembly can be operated by connecting the electrodes such that the working electrode (including all of its components) are connected as two conventional working electrodes, along with appropriate counter and reference electrodes, to a standard potentiostat circuit(s). A potentiostat is an electrical circuit used in electrochemical measurements when a working electrode is biased at a potentials versus a reference electrode. For the purpose of the present invention, the electrical current measured at the working electrode of the electrode subassembly is the current that is correlated with an amount of chemical signal.

Figure 4 illustrates an example of an operating circuit using working electrode 1, reference electrode 21, and counter electrode 22 with a power source 23 and monitoring device 24. The power source 23 is used to provide voltage to the reference 21 and working 1 electrode to drive the conversion of chemical signal to electrical signal at the catalytic, multidimensional faces of the working 1 electrode. The power source 23 also

maintains a fixed potential at the working electrode 1 (where, for example, hydrogen peroxide is converted to molecular oxygen, hydrogen ions, and electrons), which is compared with the potential of the reference electrode 21 during monitoring. The operating circuit also maintains an electrical potential on the working electrode 1 for catalysis of chemical signal that diffuses toward the working electrode 1. The working electrode 1 is electrically connected to a counter electrode 22. The counter electrode 22 consumes electrons generated at the working electrode. The current generated at the working electrode 1 is measured at a position between the working 1 and counter 22 electrode.

Based on the description above and in the figures, it will be recognized that the electrode subassembly and electrode assembly of the invention can be configured in a variety of different forms, and from a variety of different materials. However, the electrodes will have certain defined mechanical, electrical, chemical and diffusion characteristics.

Mechanically the electrode assembly and electrode subassembly will have sufficient structural integrity such that it can be readily handled by human fingers without significant handling difficulties or significantly compromising the performance of the electrode. Further, where the electrode subassembly is used in conjunction with an ionically conductive material (e.g., a hydrogel patch), it may be desirable to remove the material from the electrode. Thus, it may be desirable to design the electrode assembly so that the patch can be removed from the electrode assembly and/or electrode subassembly without significantly degrading the surface of any of the electrodes, or adhering to any of the electrodes in a manner that makes it difficult to remove completely all patch material from the face of any of the electrodes. The electrode subassembly and/or electrode assembly can be provided as a unit separate from the any other component of a monitoring device (e.g., a glucose monitoring device). In such an embodiment a bonding pad or a pad that contacts a pin connector member 4 as per Figures 1,2 and 3 is used. The member 4 makes it possible readily to connect and disconnect the electrode assembly from the remainder of the device. Alternatively, the ionically conductive material and the electrode subassembly and/or electrode assembly can be provided as a single unit and the member 4 can be used electrically to connect the unit into the device and complete the device.

Preferably, the electrode assembly will optimally operate at a pH which is relatively close to that of the solid or electrolyte in which the electrode subassembly is in contact (e.g., human skin (about pH 7) or the hydrogel patch) and at least within a range of from about pH 4 to pH 9. In general, the working operates at a current level in the range of 0.1 nanoamp to 1 milliamp.

Utility

The present invention is useful in connection with the detection of biologically significant molecules such as glucose which are moved through human skin using a technique known as electroosmosis. The basic concept of moving a molecule such as a glucose through human skin is disclosed within U.S. Patent 5,362,307, issued November 8, 1994, and U.S. Patent 5,279,543, issued January 18, 1994, which patents are incorporated herein by reference for disclosing the basic concept of moving molecules such as glucose through human skin by means of electroosmosis. The concept of converting the very small amounts of molecules such as glucose which can be extracted through the skin in order to create a current by use of glucose oxidase is disclosed within earlier filed application Serial No. 08/265,048, filed June 24, 1994, and application Serial No. 08/373,931, filed January 10, 1995; and hydrogel patches suitable for use with the present invention are disclosed within earlier filed application Serial No. 08/501,664, filed July 12, 1995, each of which applications are incorporated herein by reference in their entirety and which applications disclose inventions which were invented under an obligation to assign rights to the same entity as that to which the rights in the present invention were invented under an obligation to assign.

The electrode subassembly of the invention can be used as part of an electrode assembly (e.g., with reference, counter, and electroosmotic electrodes) for measurement of a biomedically important compound (e.g., glucose). For example, as shown in Figure 5, the electrode subassembly comprised of a multicomponent working electrode 1 can be placed within a electroosmotic electrode 25, a reference electrode 21 and a counter electrode 22. The electroosmotic 25, reference 21 and counter 22 electrodes are connected by leads 26, 27 and 28, respectively, to a power source and monitoring device. A hydrogel patch, which is the electrochemical conducting medium, is placed in contact with the electrode assembly and the entire assembly placed onto an area of mammalian (e.g., human) skin. An electrical current is sent through the electroosmotic electrode, thereby

drawing molecules, including glucose, through the patient's skin and into the hydrogel patch.

GENERATING ELECTRICAL SIGNAL

Glucose oxidase (GOD), contained in the hydrogel patch, catalyzes the conversion of glucose into gluconic acid and hydrogen peroxide as described above and shown in Figure 6. The hydrogen peroxide is then catalyzed at the electrode subassembly to 2 electrons, molecular oxygen, and 2 hydrogen ions, and the electric current generated at the working electrode 1 measured relative to the reference electrode 21 as exemplified in Figure 4. The electrical current generated at the working electrode 1 is correlated to the amount of glucose in the hydrogel patch, and extrapolated to the concentration of glucose in the subject's bloodstream.

The composition, size and thickness of the electrode assembly can be varied and such variance can affect the time over which the electrode assembly can be used. For example, the hydrogel patches and the electrodes of the present invention used with the electrode assembly are generally designed so as to provide utility over a period of about 24 hours. After that time some deterioration in characteristics, sensitivity, and accuracy of the measurements from the electrode can be expected (e.g., due to accumulation of material on the face of the electrode subassembly), and the electrode subassembly and hydrogel patch should be replaced. The invention contemplates electrode assemblies which are used over a shorter period of time, e.g., 8 to 12 hours or a longer period of time, e.g., 1 to 30 days.

The substantially discontinuous working electrode surfaces of the invention can be used to obtain improved signal to noise ratio and enhanced signal over an finite time when measuring any chemical signal in an finite volume. More specifically, the working electrode of the invention can be used to carry out a method which comprises extracting any biomedically significant substance through the skin of a mammalian subject (e.g., a human patient) and reacting that substance with another substance or substances to form a product which is detectable electrochemically by the production of a signal, which signal is generated proportionally based on the amount of a biologically important or biomedically significant substance drawn into the patch. As indicated in the above-cited patents the ability to withdraw biochemically significant substances such as glucose through skin has been established (see U.S. Patent Nos. 5,362,307 and 5,279,543). However, the amount of compound withdrawn is often so small that it is not possible to make meaningful use of

such methodology in that the withdrawn material cannot be precisely measured and related to any standard. The present invention provides an electrode that is capable of detecting the electrochemical signal at very low levels in a manner that allows for direct, accurate correlation between the amount of signal generated and the amount of the molecule in the
5 human subject.

The invention is remarkable in that it allows for the noninvasive detection and quick, accurate measurement of amounts of a biomedically relevant compound, e.g., glucose, at levels that are 1, 2, or even 3 orders of magnitude less than the concentration of that compound in blood. For example, glucose might be present in blood in a concentration of
10 about 5 millimolar. However, the concentration of glucose in a hydrogel patch which is used to withdraw glucose through skin as described in the system above is on the order of 2 micromolar to 100 micromolar. Micromolar amounts are 3 orders of magnitude less than millimolar amounts. The ability accurately and quickly to detect glucose in such small concentrations is attained by constructing the electrode assembly and electrode
15 subassembly with the components described herein and the configurations described herein.

Because the amount of signal to be measured may be very small and further because it may be important to measure changes quickly in that signal over short periods of time the multicomponent, multisurface electrode configuration of the invention is valuable in
20 obtaining results. The electrodes of the invention can detect a smaller signal over a shorter period of time as compared to a continuous surface working electrode.

EXAMPLES

The following examples are put forth so as to provide those of ordinary skill in the art with a complete disclosure and description of how to use the electrode assemblies and
25 subassemblies of the present invention, and are not intended to limit the scope of what the inventors regard as their invention. Efforts have been made to ensure accuracy with respect to numbers used (e.g., amounts, particular components, etc.), but some deviations should be accounted for. Unless indicated otherwise, parts are parts by weight, surface area is geometric surface area, temperature is in degrees centigrade, and pressure is at or
30 near atmospheric pressure.

The data presented in these examples are computer-simulated (i.e., the data is generated from a computer model of the electrode assembly described herein). The computer model of the invention uses the following parameters:

- peroxide diffusivity: $1.2 \times 10^{-5} \text{ cm}^2/\text{sec}$;
- 5 glucose diffusivity: $1.3 \times 10^{-6} \text{ cm}^2/\text{sec}$;
- initial peroxide concentration = $100 \text{ nmol/ml} = 100 \text{ }\mu\text{M}$;
- thickness of stagnant layer on top of electrode (the gel layer) = 600 microns;
- electrode thickness = 125 micron width for the strip
- configuration as per Figure 7 and 125 micron squares for the checkerboard
- 10 configuration as per Figure 10;
- gap (insulator) = 125 microns, 250 microns and 500 microns for the strip
- configuration, as indicated in Figures 11, 12, and 13.

Example 1: Effect of Edges and Radial Diffusion on Peroxide Flux at an Electrode Surface

- Figure 11 provides a computer simulation of the effect of edges and radial diffusion on peroxide flux at an electrode surface. This simulation shows that the peroxide flux on a slotted discontinuous electrode is higher at all positions, and particularly so at and near the edges, as compared to the peroxide flux for a planar electrode.

Example 2: Peroxide Flux on a Checker Board Electrode

- Figure 12 provides a computer simulation of peroxide flux on a "checker board" electrode; radial and planar diffusion are compared with radial diffusion only. This simulation shows the peroxide flux on a checkerboard relative to the peroxide flux on a planar electrode (with 1D diffusion only). The curves are normalized for the same surface area of the electrode. Also shown is the ratio of the flux for checkerboard divided by the flux for the planar electrode. This ratio curve clearly shows that there is a significant advantage in using a discontinuous surface (such as a checkerboard) as compared to a planar electrode.

Example 3: Comparison of Checker Board, Slotted, and Solid Electrodes

- Figure 13 is a graph of a computer simulation of results comparing a normalized ratio of mesh to solid electrodes over time. This simulation shows the peroxide flux for slotted and square electrodes (E) with spacing (S) relative (normalized) to the peroxide flux for a 1D planar electrode. In all cases, the results are normalized so that the electrodes have the same surface area. The conclusion from this graph is that the checkerboard (square)

electrode is best, followed by the 125 micron/250 micron space slotted electrode, and so on for the remaining electrodes.

CLAIMS

We claim:

1. A method of measuring the amount of a chemical signal in a mammalian subject, the method comprising the steps of:

5 contacting the skin of the mammalian subject with a first surface of a medium through which a chemical signal can diffuse in response to a current;

 contacting an electrode assembly to a second surface of the medium, the assembly comprising a working electrode comprised of a plurality of substantially physically separated electrode surfaces and an electroosmotic electrode;

10 providing current to the electroosmotic electrode in an amount sufficient to create diffusion of a chemical signal across the mammalian subject's skin, through the medium and to the working electrode in a first dimension direction and a second dimension direction;

 providing a voltage to each of the working electrode surfaces of the working electrode
15 in an amount sufficient to drive electrochemical conversion of chemical signal at the working electrode surfaces;

 measuring the electrical current generated by the electrochemical conversion at the working electrode surfaces; and

 correlating the measured current to a concentration of chemical signal in the
20 mammalian subject.

2. The method of claim 1, wherein the electrode surfaces are configured as elongated rectangular strips parallel to each other and separated from each other by elongated rectangular gaps;

25 wherein diffusion of chemical signal further occurs in a third dimension direction substantially normal to the second dimension direction; and

 the medium is an ionically conductive hydrogel comprised of water, electrolyte, and glucose oxidase.

30 3. The method of claim 1, wherein the chemical signal is glucose and each electrode surface is comprised of a compound selected from the group consisting of platinum, platinum alloy, oxides and dioxides thereof;

wherein the electrode surfaces are separated by a gap having a width in a range of 5 μm to 1,000 μm and wherein an electrically insulating material is positioned in a gap separating the electrode surfaces; and

wherein the electrode assembly is characterized by a flat configuration and having a
5 thickness in a range of 0.25 μm to 250 μm and by a surface area in the range of 0.1 cm^2 to 8 cm^2 .

4. The method of claim 1, wherein the electrode assembly further comprises a counter electrode and a reference electrode and wherein the counter electrode and a
10 reference electrode are positioned in substantially the same plane as the working electrode, the counter electrode being electrically connected to the working electrode, and the reference electrode being positioned such that a substantially constant electrical potential is maintained on the reference electrode relative to the working electrode;

wherein the working electrode, counter electrode, reference electrode, and
15 electroosmotic electrode are concentrically aligned with each other and wherein the working electrode is operated at a current level in the range of 1 nanoamp to 1 milliamp; and

wherein the medium comprises a hydrogel patch, the patch having a surface in contact with a surface of the working electrode, the counter electrode, the reference
20 electrode, and the electroosmotic electrode.

5. A method of measuring the glucose level of a human patient, comprising the steps of:

contacting skin of a human patient with a first surface of a medium through which
25 glucose diffuses;

providing a working electrode in contact with a second surface of the medium wherein the working electrode is configured as a plurality of substantially physically separated working electrode planar surfaces; and

applying current to the working electrode in an amount sufficient to draw ions
30 through the skin of the patient along with glucose wherein the working electrodes are configured such that the glucose is drawn in a first direction normal to the planar surfaces and in a second direction substantially parallel to the planar surfaces.

6. The method of claim 5 wherein the working electrodes are configured such that the glucose is further drawn in a third direction substantially parallel to the planar surfaces and substantially perpendicular to the second direction;

5 wherein the medium is an ionically conductive hydrogel comprising water, electrolyte and glucose oxidase.

7. A glucose monitoring device, comprising:
a hydrogel comprised of water, electrolyte and glucose oxidase; and
a working electrode comprising a plurality of substantially physically separated
10 working electrode planar surfaces, wherein each working electrode surface comprises a catalytic surface and is separated from adjacent working electrode surfaces by a gap.

8. The device of claim 7, wherein the gap has a width in a range of about 50 μm to 1,000 μm and wherein an electrically insulating material is positioned in the gap, and
15 further wherein the working electrode is characterized by a flat configuration having a thickness in a range of about 0.25 μm to 250 μm and further characterized by a surface area in the range of about 0.1 cm^2 to about 8 cm^2 .

9. The device of claim 8, which further comprises a counter electrode and a
20 reference electrode, each being positioned in substantially the same plane as the working electrode, the counter electrode being electrically connected to the working electrode, and the reference electrode being positioned such that a substantially constant electrical potential is maintained on the reference electrode relative to the working electrode.

25 10. A method of measuring the amount of a chemical signal in a mammalian subject, the method comprising the steps of:

contacting a first surface of an ionically hydrogel comprising water, electrolyte and glucose oxidase with skin of the mammalian subject;

contacting an electrode assembly to a second surface of the hydrogel, the assembly
30 comprising an iontophoresis electrode, a working electrode comprised of a plurality of substantially physically separated electrode components, a counter electrode, and a reference electrode;

providing current to an iontophoresis electrode in an amount sufficient electrically to draw a chemical signal across the mammalian subject's skin, through the hydrogel and to the working electrode;

5 providing a voltage to each of the working electrode components of the working electrode in an amount sufficient to drive electrochemical conversion of chemical signal diffusing toward the working electrode;

measuring the electrical current generated by the electrochemical conversion at the working electrode; and

10 correlating the measured current to a concentration of chemical signal in the mammalian subject.

1/7

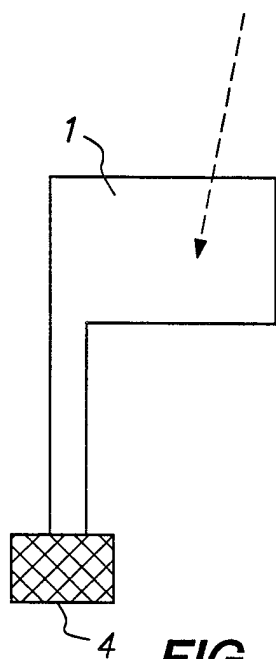


FIG. 1

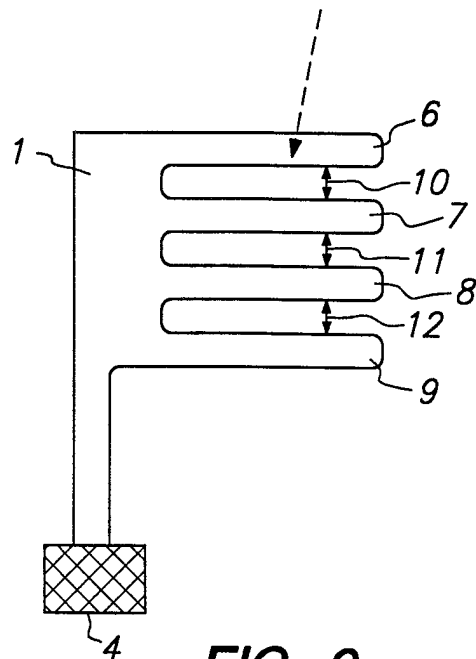


FIG. 2





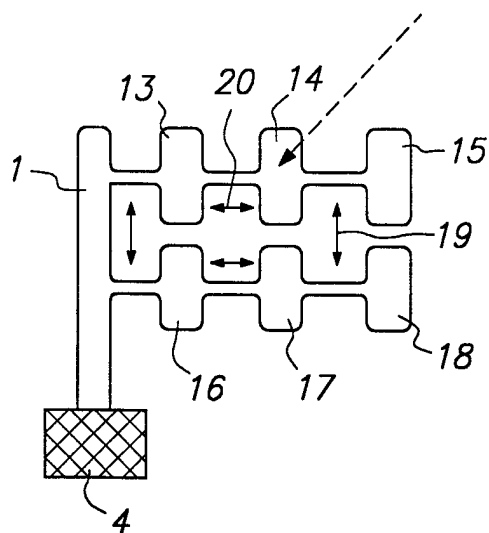





FIG. 3

2/7


**FIG. 4****FIG. 5**

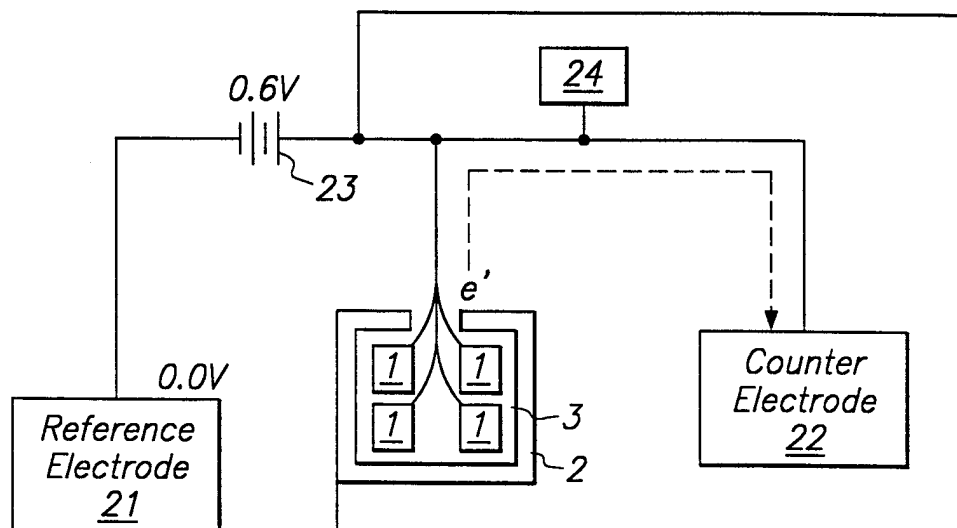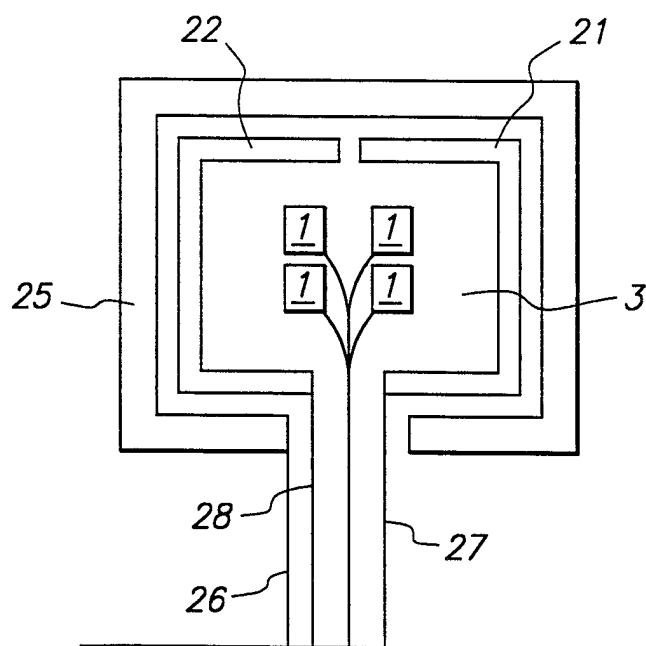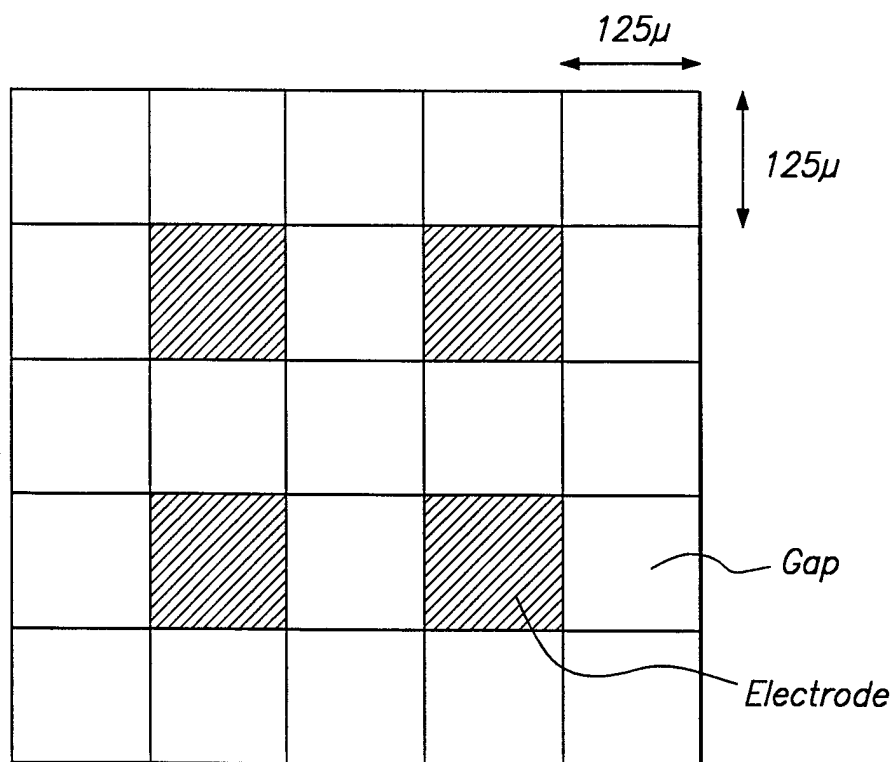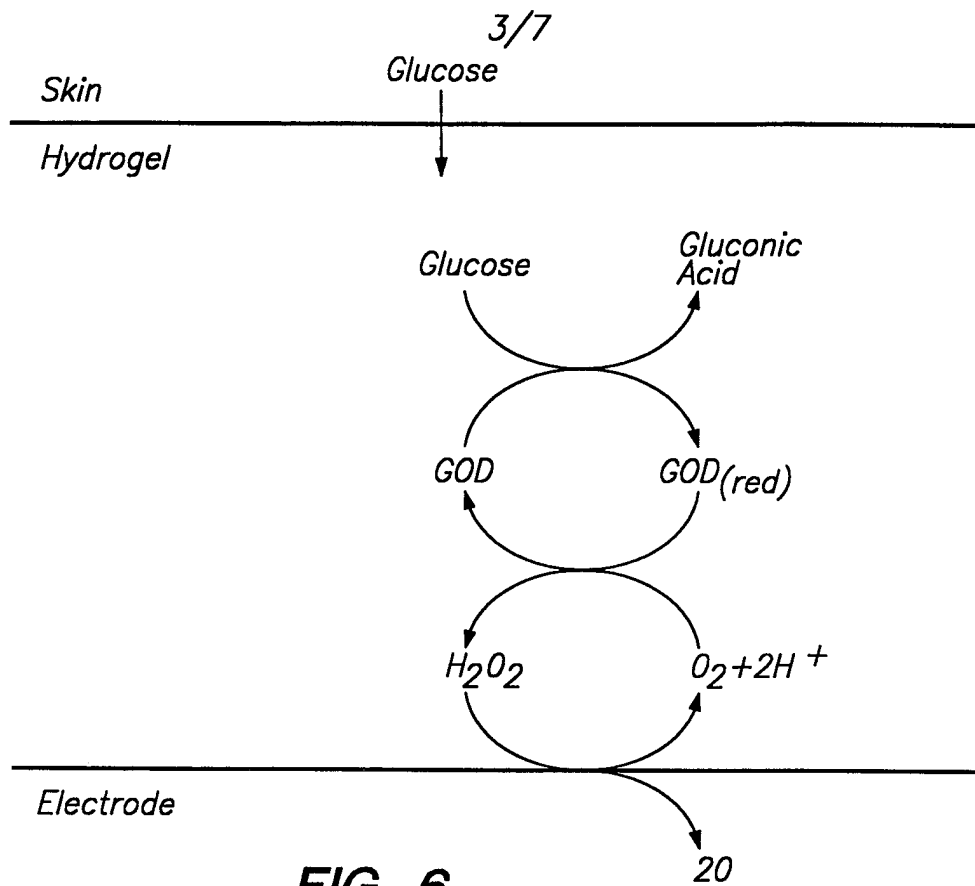

4/7

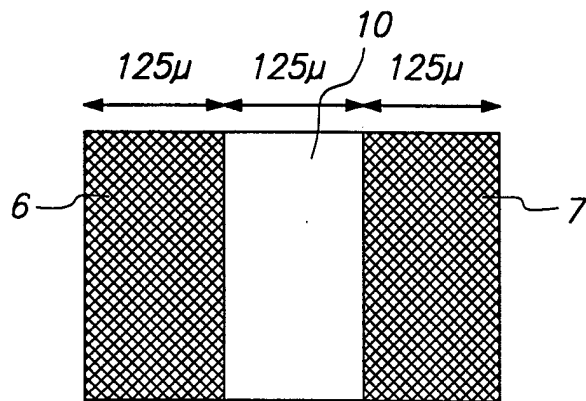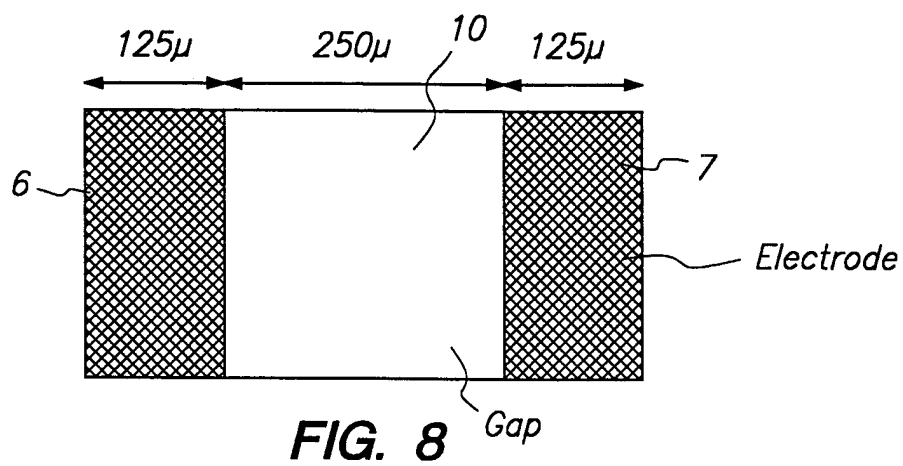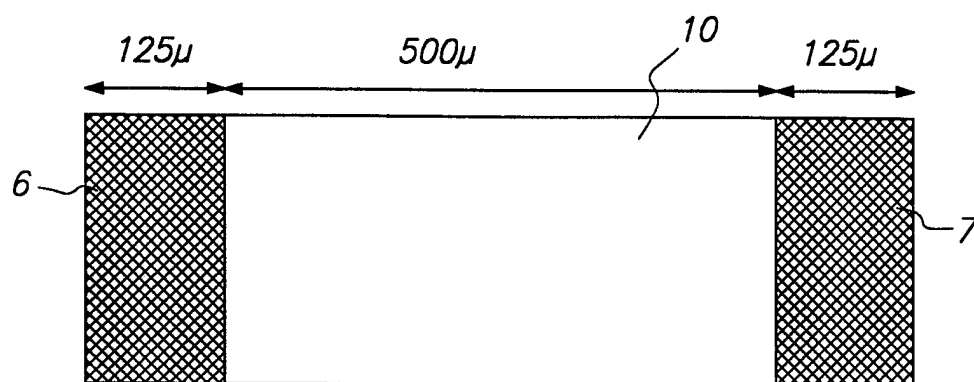**FIG. 7****FIG. 8****FIG. 9**

5/7

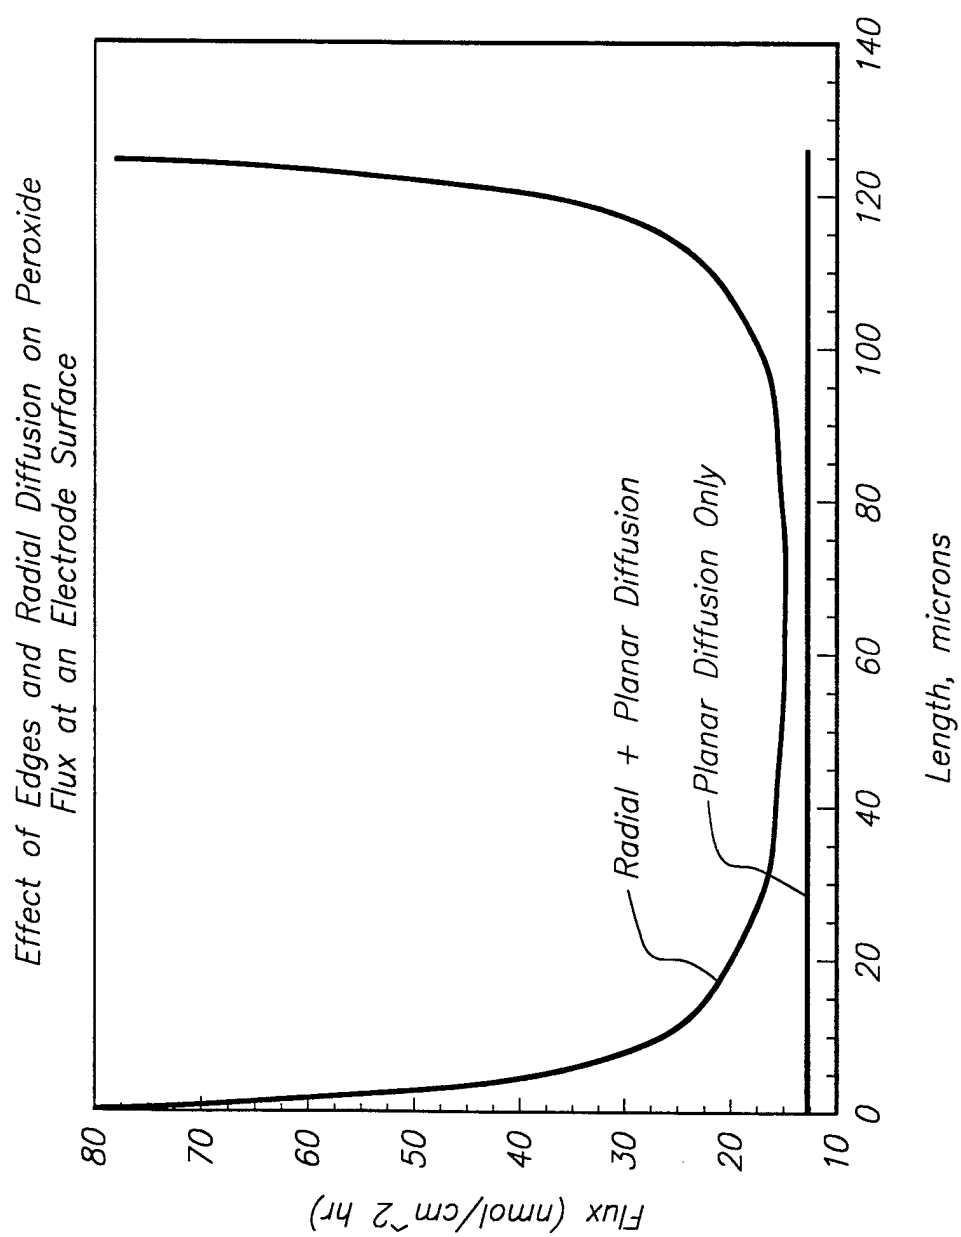**FIG. 11**

6/7

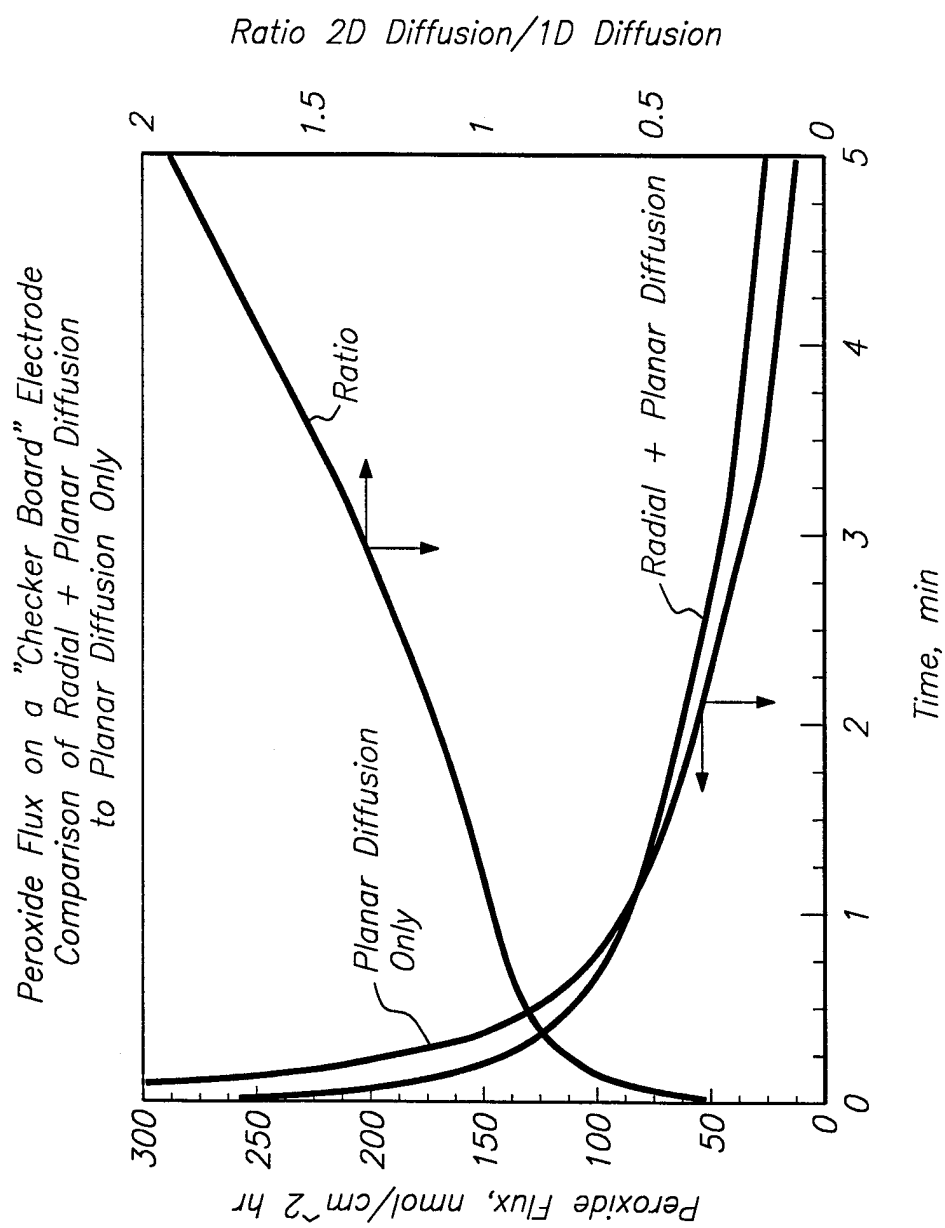


FIG. 12

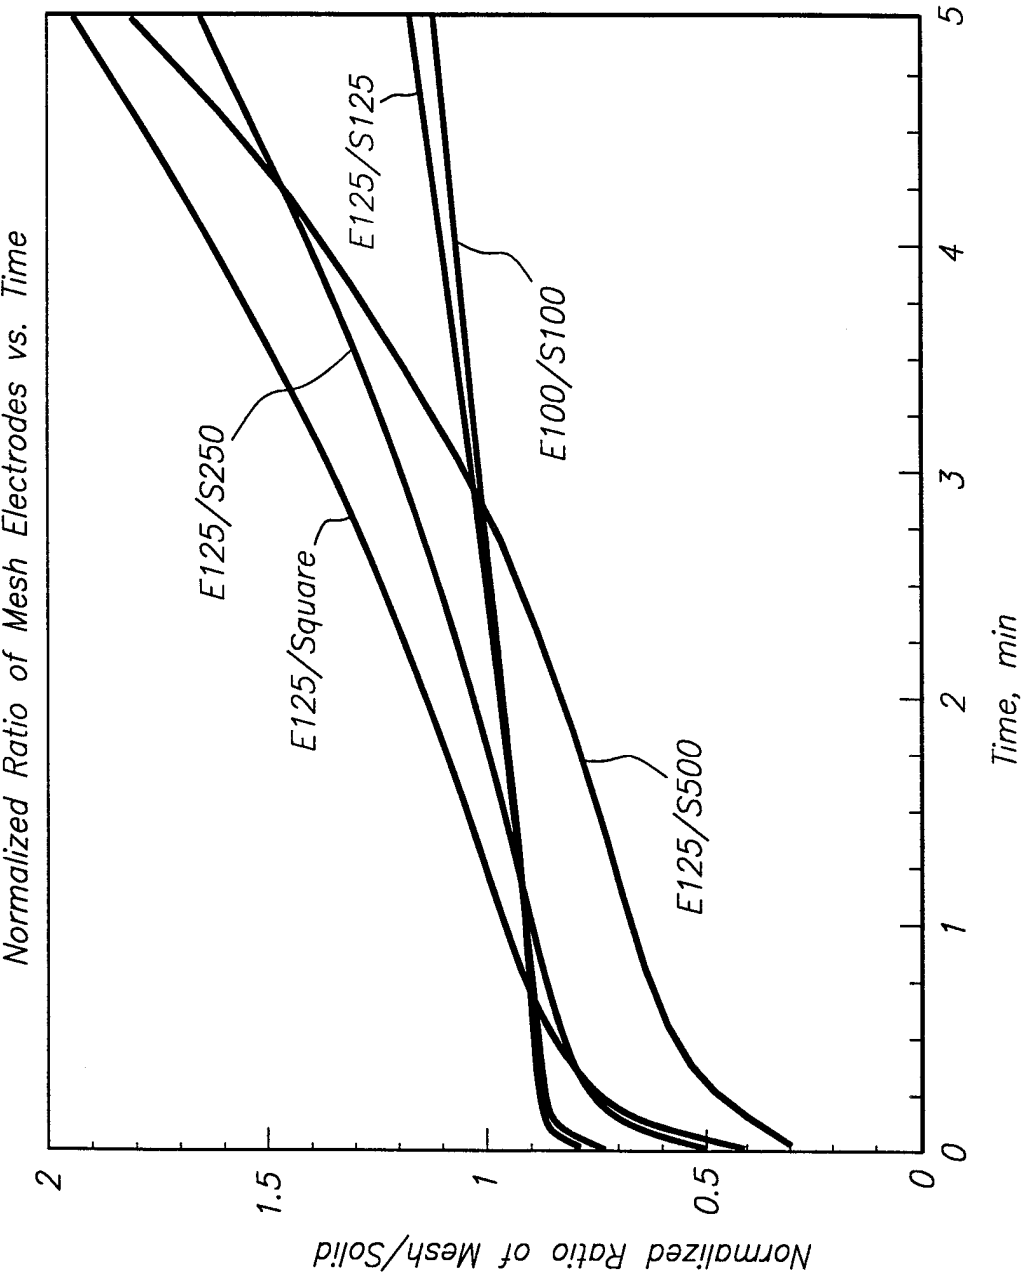


FIG. 13

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/05100

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61B5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61B A61N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 655 880 A (LIU CHUNG-CHIUN) 7 April 1987	1,5,7,10
A	see column 3, line 66 - column 15, line 2; tables 1-12	2-4,6,9
Y	EP 0 453 283 A (TEKNEKRON SENSOR DEV CORP) 23 October 1991 see column 2, line 18 - column 3, line 4 see column 4, line 27 - line 48; table 1	1,5,7,10
A	US 5 140 985 A (SCHROEDER JON M ET AL) 25 August 1992 see column 5, line 18 - line 59; table 3	1,5
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 May 1998

Date of mailing of the international search report

02/06/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Weihs, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/05100

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 96 00110 A (CYGNUS THERAPEUTIC SYSTEMS) 4 January 1996 cited in the application see page 18, line 3 - page 23, line 29; tables 1,34 -----</p>	1,5,10

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 98/05100

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4655880 A	07-04-1987	NONE	
EP 0453283 A	23-10-1991	US 5161532 A JP 4227235 A	10-11-1992 17-08-1992
US 5140985 A	25-08-1992	NONE	
WO 9600110 A	04-01-1996	AU 2944995 A CA 2193885 A EP 0766578 A	19-01-1996 04-01-1996 09-04-1997