

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/105198 A1

(51) International Patent Classification⁷: **H01L 21/00**,
21/30, 21/46, 23/02, G02B 26/00

(21) International Application Number: PCT/US03/18741

(22) International Filing Date: 11 June 2003 (11.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/167,361 11 June 2002 (11.06.2002) US

(71) Applicant (for all designated States except US): **REFLECTIVITY, INC.** [US/US]; 350 Potrero Avenue, Sunnyvale, CA 94085 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PATEL, Satyadev** [US/US]; Apt. 86, 5201 Laguna Oaks Drive, Elk Grove, CA 95758 (US). **HUIBERS, Andrew** [US/US]; 226 Edlee Avenue, Palo Alto, CA 94306 (US). **RICHARDS, Peter** [US/US]; 950 Roble Avenue, #5, Menlo Park, CA 94025 (US). **SHI, Hongqin** [US/US]; 7078 Coronado Drive, San Jose, CA 95129 (US). **CHIANG, Steve** [US/—]; 3F, N°. 16, Alley 652, Da You Road, 333 Taoyuan City, Taoyuan (TW). **DUBOC, Robert, Jr.** [US/US]; 300 Santa Rita Avenue, Menlo Park, CA 94025 (US). **GROBELNY, Thomas** [US/US]; 6102 130th Place SE, Snohomish, WA 98296 (US). **DEHLINGER, Dietrich** [US/US]; 8889

Caminito Plaza Centro, Apt. 7413, San Diego, CA 92122 (US). **SUN, Anthony** [—/US]; 2914 Creek Point Drive, San Jose, CA 95113 (US). **CHEN, Hung, Nan** [—/—]; 123-5 Ta Pei Road, Niaosung, Kaohsiung (TW).

(74) Agent: **MUIR, Gregory**; Reflectivity, Inc., 350 Potrero Avenue, Sunnyvale, CA 94085 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHODS FOR DEPOSITING, RELEASING AND PACKAGING MICRO-ELECTROMECHANICAL DEVICES ON WAFER SUBSTRATES

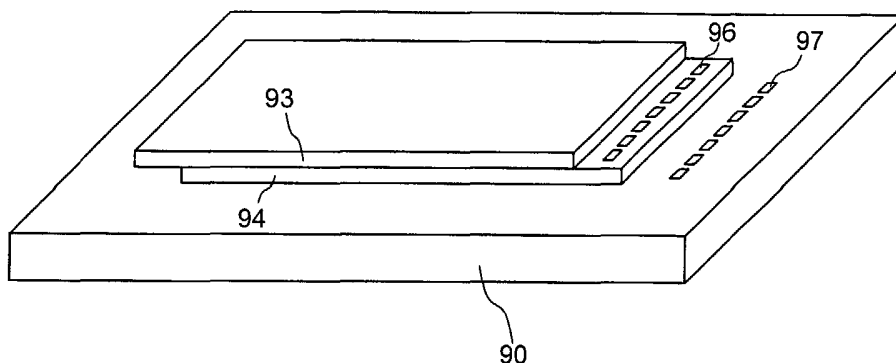

(57) Abstract: A projection system, a spatial light modulator, and a method for forming a MEMS device are disclosed. The spatial light modulator can have two substrates bonded together with one of the substrates comprising a micromirror array. The two substrates can be bonded at the wafer level after depositing a getter material and/or solid or liquid lubricant on one or both of the wafers. The wafers can be bonded together hermetically if desired, and the pressure between the two substrates can be below atmosphere.



WO 03/105198 A1

METHODS FOR DEPOSITING, RELEASING AND PACKAGING MICRO-ELECTROMECHANICAL DEVICES ON
WAFER SUBSTRATES

[0001] The present invention is in the field of MEMS, and in particular in the field of methods for making micro electromechanical devices on a wafer. The subject matter of the present invention is related to manufacturing of multiple MEMS devices on a wafer, releasing the MEMS structures by removing a sacrificial material, bonding the wafer to another wafer, singulating the wafer assembly, and packaging each wafer assembly portion with one or more MEMS devices thereon, *without damaging the MEMS microstructures thereon*. A wide variety of micro-electromechanical devices (MEMS) devices can be made in accordance with the embodiments herein, including accelerometers, DC relay and RF switches, optical cross connects and optical switches, microlenses, reflectors and beam splitters, filters, oscillators and antenna system components, variable capacitors and inductors, switched banks of filters, resonant comb-drives and resonant beams, and micromirror arrays for direct view and projection displays.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0002]** Figs. 1A to 1E are cross sectional views illustrating one method for forming micromirrors;
- [0003]** Fig. 2 is a top view of a micromirror showing line 1-1 for taking the cross section for Figs. 1A to 1E;
- [0004]** Figs. 3A to 3E are cross sectional views illustrating the same method as in Figs. 1A to 1E but taken along a different cross section;
- [0005]** Fig. 4 is a top view of a mirror showing line 3-3 for taking the cross section for Figs. 3A to 3E;
- [0006]** Fig. 5 is an isometric view of the assembly of two substrates, one with micromirrors, the other with circuitry and electrodes;
- [0007]** Fig. 6 is a cross sectional view of the assembled device in use;
- [0008]** Fig. 7 is a flow chart of one method of the invention;
- [0009]** Fig. 8 is a top view of a wafer substrate having multiple die areas;
- [0010]** Figs. 9A to 9G are step-by-step views of the assembly of the device;
- [0011]** Figs. 10A and 10B are top views of two wafers that will be joined together and then singulated;
- [0012]** Figs. 10C and 10D are views of light transmissive substrates (Fig. 10A) for bonding to a wafer (10D);
- [0013]** Fig. 11A is a cross sectional view taken along line 11-11 of Fig. 10 upon alignment of the two wafers of Figs. 10A and 10B, but prior to bonding, whereas Fig. 11B is the same cross sectional view after bonding of the two wafers, but prior to singulation;
- [0014]** Fig. 12 is an isometric view of a singulated wafer assembly die held on a package substrate; and
- [0015]** Fig. 13 is an illustration of a projection system having a micromirror device therein.

DETAILED DESCRIPTION

Mirror Fabrication:

[0016] Processes for microfabricating a MEMS device such as a movable micromirror and mirror array are disclosed in U.S. patents 5,835,256 and 6,046,840 both to Huibers, the subject matter of each being incorporated herein by reference. A similar process for forming MEMS movable elements (e.g. mirrors) on a wafer substrate (e.g.

a light transmissive substrate or a substrate comprising CMOS or other circuitry) is illustrated in Figs. 1 to 4. By "light transmissive", it is meant that the material will be transmissive to light at least in operation of the device (The material could temporarily have a light blocking layer on it to improve the ability to handle the substrate during manufacture, or a partial light blocking layer for decreasing light scatter during use. Regardless, a portion of the substrate, for visible light applications, is preferably transmissive to visible light during use so that light can pass into the device, be reflected by the mirrors, and pass back out of the device. Of course, not all embodiments will use a light transmissive substrate). By "wafer" it is meant any substrate on which multiple microstructures or microstructure arrays are to be formed and which allows for being divided into dies, each die having one or more microstructures thereon. Though not in every situation, often each die is one device or product to be packaged and sold separately. Forming multiple "products" or dies on a larger substrate or wafer allows for lower and faster manufacturing costs as compared to forming each die separately. Of course the wafers can be any size or shape, though it is preferred that the wafers be the conventional round or substantially round wafers (e.g. 4", 6" or 12" in diameter) so as to allow for manufacture in a standard foundry.

[0017] Figs. 1A to 1E show a manufacturing process for a micromechanical mirror structure. As can be seen in Fig. 1A, a substrate such as glass (e.g. 1737F), quartz, Pyrex™, sapphire, (or silicon alone or with circuitry thereon) etc. is provided. The cross section of Figs. 1A-E is taken along line 1-1 of Fig. 2. Because this cross section is taken along the hinge of the movable element, an optional block layer 12 can be provided to block light (incident through the light transmissive substrate during use) from reflecting off of the hinge and potentially causing diffraction and lowering the contrast ratio (if the substrate is transparent).

[0018] As can be seen in Fig. 1B, a sacrificial layer 14, such as amorphous silicon, is deposited. The thickness of the sacrificial layer can be wide ranging depending upon the movable element/mirror size and desired tilt angle, though a thickness of from 500 Å to 50,000 Å, preferably around 5000 Å is preferred. Alternatively the sacrificial layer could be a polymer or polyimide (or even polysilicon, silicon nitride, silicon dioxide, etc. depending upon the materials selected to be resistant to the etchant, and the etchant selected). A lithography step followed by a sacrificial layer etch forms holes 16a,b in the sacrificial silicon, which can be any suitable size, though preferably having a diameter of from .1 to 1.5 μm, more preferably around .7 +/- .25 μm. The etching is performed down to the glass/quartz substrate or down to the block layer if present. Preferably if the glass/quartz layer is etched, it is in an amount less than 2000 Å.

[0019] At this point, as can be seen in Fig. 1C, a first layer 18 is deposited by chemical vapor deposition. Preferably the material is silicon nitride or silicon oxide deposited by LPCVD or PECVD, however polysilicon, silicon carbide or an organic compound could be deposited at this point – or Al, CoSiNx, TiSiNx, TaSiNx and other ternary and higher compounds as set forth in US patent applications 09/910,537 filed July 20, 2001, and 60/300,533 filed June 22, 2001 both to Reid and incorporated herein by reference (of course the sacrificial layer and etchant should be adapted to the material used). The thickness of this first layer can vary depending upon the movable element size and desired amount of stiffness of the element, however in one embodiment the layer has a thickness of from 100 to 3200 Å, more preferably around 1100 Å. The first layer undergoes lithography and etching so as to form gaps between adjacent movable elements on the order of from .1 to 25 μm, preferably around 1 to 2 μm.

[0020] A second layer 20 (the "hinge" layer) is deposited as can be seen in Fig. 1D. By "hinge layer" it is meant the layer that defines that portion of the device that flexes to allow movement of the device. The hinge layer can be disposed only for defining the hinge, or for defining the hinge and other areas such as the mirror. In any case, the reinforcing material is removed prior to depositing the hinge material. The material for the second (hinge) layer can be the same (e.g. silicon nitride) as the first layer or different (silicon oxide, silicon carbide, polysilicon, or Al, CoSiN_x, TiSiN_x, TaSiN_x or other ternary and higher compounds) and can be deposited by chemical vapor deposition as for the first layer. The thickness of the second/hinge layer can be greater or less than the first, depending upon the stiffness of the movable element, the flexibility of the hinge desired, the material used, etc. In one embodiment the second layer has a thickness of from 50 Å to 2100 Å, and preferably around 500 Å. In another embodiment, the first layer is deposited by PECVD and the second layer by LPCVD.

[0021] As also seen in Fig. 1D, a reflective and conductive layer 22 is deposited. The reflective/conductive material can be gold, aluminum or other metal, or an alloy of more than one metal though it is preferably aluminum deposited by PVD. The thickness of the metal layer can be from 50 to 2000 Å, preferably around 500 Å. It is also possible to deposit separate reflective and conductive layers. An optional metal passivation layer (not shown) can be added, e.g. a 10 to 1100 Å silicon oxide layer deposited by PECVD. Then, photoresist patterning on the metal layer is followed by etching through the metal layer with a suitable metal etchant. In the case of an aluminum layer, a chlorine (or bromine) chemistry can be used (e.g. a plasma/RIE etch with Cl₂ and/or BCl₃ (or Cl₂, CCl₄, Br₂, CBr₄, etc.) with an optional preferably inert diluent such as Ar and/or He). Then, the sacrificial layer is removed in order to "release" the MEMS structures (Fig. 1E)

[0022] In the embodiment illustrated in Figs. 1A to 1E, both the first and second layers are deposited in the area defining the movable (mirror) element, whereas the second layer, in the absence of the first layer, is deposited in the area of the hinge. It is also possible to use more than two layers to produce a laminate movable element, which can be desirable particularly when the size of the movable element is increased such as for switching light beams in an optical switch. A plurality of layers could be provided in place of single layer 18 in Fig. 1C, and a plurality of layers could be provided in place of layer 20 and in place of layer 22. Or, layers 20 and 22 could be a single layer, e.g. a pure metal layer or a metal alloy layer or a layer that is a mixture of e.g. a dielectric or semiconductor and a metal. Some materials for such layer or layers that could comprise alloys of metals and dielectrics or compounds of metals and nitrogen, oxygen or carbon (particularly the transition metals) are disclosed in U.S. provisional patent application 60/228,007, the subject matter of which is incorporated herein by reference.

[0023] In one embodiment, the reinforcing layer is removed in the area of the hinge, followed by depositing the hinge layer and patterning both reinforcing and hinge layer together. This joint patterning of the reinforcing layer and hinge layer can be done with the same etchant (e.g. if the two layers are of the same material) or consecutively with different etchants. The reinforcing and hinge layers can be etched with a chlorine chemistry or a fluorine (or other halide) chemistry (e.g. a plasma/RIE etch with F₂, CF₄, CHF₃, C₃F₈, CH₂F₂, C₂F₆, SF₆, etc. or more likely combinations of the above or with additional gases, such as CF₄/H₂, SF₆/Cl₂, or gases using more than one etching species such as CF₂Cl₂, all possibly with one or more optional inert diluents). Of course, if different materials are used for the reinforcing layer and the hinge layer, then a different etchant can be employed for etching each layer.

Alternatively, the reflective layer can be deposited before the first (reinforcing) and/or second (hinge) layer. Whether deposited prior to the hinge material or prior to both the hinge material and the reinforcing material, it is preferable that the metal be patterned (e.g. removed in the hinge area) prior to depositing and patterning the hinge material.

[0024] Figures 3A to 3E illustrate the same process taken along a different cross section (cross section 3-3 in Fig. 4) and show the optional block layer 12 deposited on the light transmissive substrate 10, followed by the sacrificial layer 14, layers 18, 20 and the metal layer 22. The cross sections in Figs. 1A to 1E and 3A to 3E are taken along substantially square mirrors in Figs. 2 and 4 respectively. However, the mirrors need not be square but can have other shapes that may decrease diffraction and increase the contrast ratio. Such mirrors are disclosed in U.S. provisional patent application 60/229,246 to Ilkov et al., the subject matter of which is incorporated herein by reference. Also, the mirror hinges can be torsion hinges as illustrated in this provisional application.

[0025] It should also be noted that materials and method mentioned above are examples only, as many other method and materials could be used. For example, the Sandia SUMMIT process (using polysilicon for structural layers) or the Cronos MUMPS process (also polysilicon for structural layers) could be used in the present invention. Also, a MOSIS process (AMI ABN – 1.5 um CMOS process) could be adapted for the present invention, as could a MUSiC process (using polycrystalline SiC for the structural layers) as disclosed, for example, in Mehregany et al., Thin Solid Films, v. 355-356, pp. 518-524, 1999. Also, the sacrificial layer and etchant disclosed herein are exemplary only. For example, a silicon dioxide sacrificial layer could be used and removed with HF (or HF/HCl), or a silicon sacrificial could be removed with ClF₃ or BrF₃. Also a PSG sacrificial layer could be removed with buffered HF, or an organic sacrificial such as polyimide could be removed in a dry plasma oxygen release step. Of course the etchant and sacrificial material should be selected depending upon the structural material to be used. Also, though PVD and CVD are referred to above, other thin film deposition methods could be used for depositing the layers, including spin-on, sputtering, anodization, oxidation, electroplating and evaporation.

[0026] After forming the microstructures as in Figs. 1 to 4 on the first wafer, it is preferably to remove the sacrificial layer so as to release the microstructures (in this case micromirrors). This release can be performed at the die level, though it is preferred to perform the release at the wafer level. Figs. 1E and 3E show the microstructures in their released state. As can be seen in Fig. 1E, posts 2 hold the released microstructure on substrate 10.

[0027] Also, though the hinge of each mirror can be formed in the same plane as the mirror element (and/or formed as part of the same deposition step) as set forth above, they can also be formed separated from and parallel to the mirror element in a different plane and as part of a separate processing step. This superimposed type of hinge is disclosed in Figs. 11 and 12 of the previously-mentioned U.S. patent 6,046,840, and in more detail in U.S. patent application "A Deflectable Spatial Light Modulator Having Superimposed Hinge and Deflectable Element" to Huibers et al. filed August 3, 2000, the subject matter of which being incorporated herein. Whether formed with one sacrificial layer as in the Figures, or two (or more) sacrificial layers as for the superimposed hinge, such sacrificial layers are removed as will be discussed below, with a preferably isotropic etchant. This "release" of the mirrors can be performed immediately following the above described steps, or after shipment from the foundry at the place of assembly.

Backplane:

[0028] The second or "lower" substrate (the backplane) die contains a large array of electrodes on a top metal layer of the die. Each electrode electrostatically controls one pixel (one micromirror on the upper optically transmissive substrate) of the microdisplay. The voltage on each electrode on the surface of the backplane determines whether its corresponding microdisplay pixel is optically 'on' or 'off,' forming a visible image on the microdisplay. Details of the backplane and methods for producing a pulse-width-modulated grayscale or color image are disclosed in U.S. patent application 09/564,069 to Richards, the subject matter of which is incorporated herein by reference.

[0029] The display pixels themselves, in a preferred embodiment, are binary, always either fully 'on' or fully 'off,' and so the backplane design is purely digital. Though the micromirrors could be operated in analog mode, no analog capability is necessary. For ease of system design, the backplane's I/O and control logic preferably run at a voltage compatible with standard logic levels, e.g. 5V or 3.3V. To maximize the voltage available to drive the pixels, the backplane's array circuitry may run from a separate supply, preferably at a higher voltage.

[0030] One embodiment of the backplane can be fabricated in a foundry 5V logic process. The mirror electrodes can run at 0-5V or as high above 5V as reliability allows. The backplane could also be fabricated in a higher-voltage process such as a foundry Flash memory process using that process's high-voltage devices. The backplane could also be constructed in a high-voltage process with larger-geometry transistors capable of operating at 12V or more. A higher voltage backplane can produce an electrode voltage swing significantly higher than the 5-7V that the lower voltage backplane provides, and thus actuate the pixels more robustly.

[0031] In digital mode, it is possible to set each electrode to either state (on/off), and have that state persist until the state of the electrode is written again. A RAM-like structure, with one bit per pixel is one architecture that accomplishes this. One example is an SRAM-based pixel cell. Alternate well-known storage elements such as latches or DRAM (pass transistor plus capacitor) are also possible. If a dynamic storage element (e.g. a DRAM-like cell) is used, it is desirable that it be shielded from incident light that might otherwise cause leakage.

[0032] The perception of a grayscale or full-color image will be produced by modulating pixels rapidly on and off, for example according to the method in the above-mentioned U.S. patent application 09/564,069 to Richards. In order to support this, it is preferable that the backplane allows the array to be written in random-access fashion, though finer granularity than a row-at-a-time is generally not necessary.

[0033] It is desirable to minimize power consumption, primarily for thermal reasons. Decreasing electrical power dissipation will increase the optical/thermal power budget, allowing the microdisplay to tolerate the heat of more powerful lamps. Also, depending upon the way the microdisplay is assembled (wafer-to-wafer join + offset saw), it may be preferable for all I/O pads to be on one side of the die. To minimize the cost of the finished device it is desirable to minimize pin count. For example, multiplexing row address or other infrequently-used control signals onto the data bus can eliminate separate pins for these functions with a negligible throughput penalty (a few percent, e.g. one clock cycle for address information per row of data is acceptable). A data bus, a clock, and a small number of control signals (5 or less) are all that is necessary.

[0034] In use, the die can be illuminated with a 200W or more arc lamp. The thermal and photo-carrier effects of this may result in special layout efforts to make the metal layers as 'opaque' as possible over the active circuitry to reflect incident optical energy and minimize photocarrier and thermal effects. An on-chip PN diode could be included for measuring the temperature of the die.

[0035] In one embodiment the resolution is XGA, 1024x768 pixels, though other resolutions are possible. A pixel pitch of from 5 to 24 μm is preferred (e.g. 14 μm). The size of the electrode array itself is determined by the pixel pitch and resolution. A 14 μm XGA device's pixel array will therefore be 14.336x10.752mm.

Assembly:

[0036] After the upper and lower substrates (wafers) are finished being processed (e.g. circuitry/electrodes on lower wafer, micromirrors on upper wafer), the upper and lower wafers are joined together. This joining of the two substrates allows micromirrors on one substrate to be positioned proximate to electrodes on the other substrate. This arrangement is illustrated in Figs. 5 and 6, which figures will be described further below.

[0037] The method for the assembly of the wafers and separation of the wafer assembly into individual dies and is similar in some ways to the method for assembly of a liquid crystal device as disclosed in US patent 5,963,289 to Stefanov et al, "Asymmetrical Scribe and Separation Method of Manufacturing Liquid Crystal Devices on Silicon Wafers", which is hereby incorporated by reference. Many bonding methods are possible such as adhesive bonding (e.g. epoxy, silicone, low K material or other adhesive -- described further herein), anodic bonding, compression bonding (e.g. with gold or indium) metal eutectic bonding, solder bonding, fusion bonding, or other wafer bonding processes known in the art. Whether the upper and lower wafer are made of the same or different materials (silicon, glass, dielectric, multilayer wafer, etc.), they can first be inspected (step 30 in the flow chart of Fig. 7) for visual defects, scratches, particles, etc. After inspection, the wafers can be processed through industry standard cleaning processes (step 32). These include scrubbing, brushing or ultrasonic cleaning in a solvent, surfactant solution, and/or de-ionized (DI) water.

[0038] The mirrors are preferably released at this point (step 34). Releasing immediately prior to the application of epoxy or bonding is preferable (except for an optional stiction treatment between release and bonding). For silicon sacrificial layers, the release can be in an atmosphere of xenon difluoride and an optional diluent (e.g. nitrogen and/or helium). Of course, other etchants could be used, including interhalogens such as bromine trifluoride and bromine trichloride. The release is preferably a spontaneous chemical etch which does not require plasma or other external energy to etch the silicon sacrificial layer(s). After etching, the remainder of the device is treated for stiction (step 36) by applying an anti-stiction layer (e.g. a self assembled monolayer). The layer is preferably formed by placing the device in a liquid or gas silane, preferably a halosilane, and most preferably a chlorosilane. Of course, many different silanes are known in the art for their ability to provide anti-stiction for MEMS structures, including the various trichlorosilanes set forth in "Self Assembled Monolayers as Anti-Stiction Coatings for MEMS: Characteristics and Recent Developments", Maboudian et al., as well as other unfluorinated (or partially or fully fluorinated) alkyl trichlorosilanes, preferably those with a carbon chain of at least 10 carbons, and preferably partially or fully fluorinated. (Tridecafluoro-1,1,2,2-tetrahydro-octyl)trichlorosilane available from Gelest, Inc. is one example. Other

trichlorosilanes (preferably fluorinated) such as those with phenyl or other organic groups having a ring structure are also possible. Various vapor phase lubricants for use in the present invention are set forth in US patents 6,004,912, 6,251,842, and 5,822,170, each incorporated herein by reference.

[0039] In order to bond the two wafers together, spacers are mixed into sealant material (step 38). Spacers in the form of spheres or rods are typically dispensed and dispersed between the wafers to provide cell gap control and uniformity and space for mirror deflection. Spacers can be dispensed in the gasket area of the display and therefore mixed into the gasket seal material prior to seal dispensing. This is achieved through normal agitated mixing processes. The final target for the gap between the upper and lower wafers is preferably from 1 to 10 μm , though other gaps are possible depending upon the MEMS device being formed. This of course depends upon the type of MEMS structure being encapsulated and whether it was surface or bulk micromachined. The spheres or rods can be made of glass or plastic, preferably an elastically deforming material. Alternatively, spacer pillars can be fabricated on at least one of the substrates. In one embodiment, pillars/spacers are provided only at the side of the array. In another embodiment, pillars/spacers can be fabricated in the array itself. Other bonding agents with or without spacers could be used, including anodic bonding or metal compression bonding with a patterned eutectic or metal.

[0040] A gasket seal material can then be dispensed (step 40) on the bottom substrate in a desired pattern, usually in one of two industry standard methods including automated controlled liquid dispensing through a syringe and printing (screen, offset, or roller). When using a syringe, it is moved along X-Y coordinates relative to the parts. The syringe tip is constrained to be just above the part with the gasket material forced through the needle by positive pressure. Positive pressure is provided either by a mechanical plunger forced by a gear driven configuration and/or by an air piston and/or pressed through the use of an auger. This dispensing method provides the highest resolution and process control but provides less throughput.

[0041] Then, the two wafers are aligned (step 42) – preferably to within 1 micron. Alignment of the opposing electrodes or active viewing areas requires registration of substrate fiducials on opposite substrates. This task is usually accomplished with the aid of video cameras with lens magnification. The machines range in complexity from manual to fully automated with pattern recognition capability. Whatever the level of sophistication, they accomplish the following process: 1. Dispense a very small amount of a UV curable adhesive at locations near the perimeter and off of all functional devices in the array; 2. Align the fiducials of the opposing substrates within the equipment capability; and 3. Press substrates and UV tack for fixing the wafer to wafer alignment through the remaining bonding process (e.g., curing of the internal epoxy).

[0042] The final cell gap can be set by pressing (step 44) the previously tacked laminates in a UV or thermal press. In a UV press, a common procedure would have the substrates loaded into a press where at least one or both of the press platens are quartz, in order to allow UV radiation from a UV lamp to pass unabated to the gasket seal epoxy. Exposure time and flux rates are process parameters determined by the equipment and adhesive materials. Thermally cured epoxies require that the top and bottom platens of a thermal press be heated. The force that can be generated between the press platens is typically many pounds. With thermally cured epoxies, after the initial press the arrays are typically transferred to a stacked press fixture where they can continue to be pressed and post-cured for 4-8 hours.

[0043] Once the wafers have been bonded together to form a wafer assembly, the assembly can be separated into individual dies (step 46). Silicon substrate and glass scribes are placed on the respective substrates in an offset relationship at least along one direction. The units are then separated, resulting in each unit having a bond pad ledge on one side and a glass electrical contact ledge on an opposite side. The parts may be separated from the array by any of the following methods. The order in which the array (glass first) substrate is scribed is important when conventional solid state cameras are used for viewing and alignment in a scribe machine. This constraint exists unless special infrared viewing cameras are installed which make the silicon transparent and therefore permits viewing of front surface metal fiducials. The scribe tool is aligned with the scribe fiducials and processed. The resultant scribe lines in the glass are used as reference marks to align the silicon substrate scribe lanes. These scribe lanes may be coincident with the glass substrate scribes or uniformly offset. The parts are then separated from the array by venting the scribes on both substrates. Automatic breaking is done by commercially available guillotine or fulcrum breaking machines. The parts can also be separated by hand.

[0044] Separation may also be done by glass scribing and partial sawing of the silicon substrate. Sawing requires an additional step at gasket dispense. Sawing is done in the presence of a high-pressure jet of water. Moisture must not be allowed in the area of the fill port or damage of the MEMS structures could occur. Therefore, at gasket dispense, an additional gasket bead must be dispensed around the perimeter of the wafer. The end of each scribe/saw lane must be initially left open, to let air vent during the align and press processes. After the array has been pressed and the gasket material cured, the vents are then closed using either the gasket or end-seal material. The glass is then aligned and scribed as described above. Sawing of the wafer is done from the backside of the silicon where the saw streets are aligned relative to the glass scribe lanes described above. The wafer is then sawed to a depth of 50%-90% of its thickness. The parts are then separated as described above.

Alternatively, both the glass and silicon substrates may be partially sawed prior to part separation. With the same gasket seal configuration, vent and seal processes as described above, saw lanes are aligned to fiducials on the glass substrates. The glass is sawed to a depth between 50% and 95% of its thickness. The silicon substrate is sawed and the parts separated as described above.

[0045] For an illustrated example of the above, reference is made to Fig. 8 where 45 die areas have been formed on wafer 5. Each die area 3 (having a length A and a height B) comprises one or more (preferably released) microstructures. In the case of micromirror arrays for projection systems, each die preferably has at least 1000 movable mirrors, and more likely between 100,000 and 10 million mirrors (higher resolutions may have between 1 and 6 million movable elements). Of course, if the microstructure is a DC relay or RF MEMS switch (or even mirrors for an optical switch) there will likely be far fewer than millions of microstructures, more likely less than 100 or even less than 10 (or even a single structure). Of course if there are only a few microstructures in each die area, then the die areas themselves can be made smaller in most cases. Also, the die areas need not be rectangular, though this shape aids in epoxy deposition and singulation.

[0046] As can be seen in Fig. 9A, four die areas 3a to 3d are formed on wafer 5 (many more dies would be formed in most circumstances, though only four are shown for ease of illustration). Each die area 3a to 3d

comprises one or more microstructures which have already been released in a suitable etchant. As illustrated in Fig. 9B, epoxy can be applied in the form of beads 31a to 31d along each side of the die area, or as beads 32a to 32d at each corner of the die area. Or, epoxy ribbons 33a and 33b could be applied along two sides of each die, or a single ribbon 34 could be applied substantially surrounding an entire die. Of course many other configurations are possible, though it is desirable that the die not be fully surrounded with an epoxy gasket as this will prevent air or other gas from escaping when the two wafers are pressed together during a full or partial epoxy cure. And, of course, it is preferable, for higher manufacturing throughput, to use a common epoxy application method throughout the entire wafer (the different types of applications in Fig. 9B are for illustrations purposes only). Also, the areas in which epoxy is applied can first have a sacrificial material deposited in that area (preferably in an area larger than the bead or band of epoxy due to expansion of the epoxy under compression). The sacrificial material could also be applied to the entire wafer except in areas having microstructures thereon. Also, a conductive epoxy (or other adhesive) could be used in order to make electrical contact between the wafer having circuitry and electrodes and the wafer having MEMS thereon.

[0047] In Fig. 9C, the sealing wafer 25 and the lower substrate wafer 5 with microstructures (and optionally circuitry) are brought into contact with each other. The final gap between the two wafers can be any size that allows the two wafers to be held together and singulated uniformly. Because gasket beads will expand upon application of pressure (thus taking up valuable real estate on a wafer with densely positioned die areas), it is preferable that the gap size be larger than 1 μm , and preferably greater than 10 μm . The gap size can be regulated by providing microfabricated spacers or spacers mixed in with the epoxy (e.g. 25 μm spacers). However, spacers may not be necessary depending upon the type of microstructure and the amount of pressure applied.

[0048] Fig. 9D shows the first wafer 5 and sealing wafer 25 bonded together. Horizontal and vertical score or partial saw lines 21a and 21b are provided on both the sealing wafer 25 and the first (lower) wafer 5 (lines not shown on wafer 5). Preferably the score lines on the two wafers are offset slightly from each other at least in one of the (horizontal or vertical). This offset scoring or partial sawing allows for ledges on each die when the wafer is completely singulated into individual dies (see Fig. 9E). Electrical connections 4 on ledge 6 on die 3c allow for electrical testing of the die prior to removal of the sealing wafer portion. Should the die fail the electrical testing of the microstructures, the sealing wafer need not be removed and the entire die can be discarded.

[0049] Referring again to Fig. 5, a top perspective view of a portion of a bonded wafer assembly die 10 is illustrated. Of course, the mirror shapes illustrated in Figs. 1-5 are exemplary, as many other mirror structures are possible, such as set forth in US patent application 09/732,445 to Ilkov et al. filed December 7, 2000, incorporated herein by reference. For clarity, only four pixel cells 54, 54a, 54b and 54c in a two by two grid configuration are shown in FIG. 5. The pixel cells 54, 54a, 54b and 54c have a pixel pitch of, for example, 12 microns. "Pixel pitch" is defined as the distance between like portions of neighboring pixel cells.

[0050] Reflective deflectable elements (e.g., mirrors 48, 48a, 48b and 48c), each corresponding to a respective pixel cell 54, 54a, 54b and 54c, are attached to the lower surface 14 of the optically transmissive substrate 52 in an undeflected position. Thus, mirrors 48, 48a, 48b and 48c are visible through optically transmissive substrate 52 in

FIG. 5. For clarity, light blocking aperture layers 56 if present, between the mirrors 48, 48a, 48b or 48c and the optically transmissive substrate 52, are represented only by dashed lines so as to show underlying hinges 50, 50a, 50b and 50c. The distance separating neighboring mirrors may be, for example, 0.5 microns or less.

[0051] The optically transmissive substrate 52 is made of materials which can withstand subsequent processing temperatures. The optically transmissive substrate 52 may be, for example, a 4 inch quartz wafer 500 microns thick. Such quartz wafers are widely available from, for example, Hoya Corporation U.S.A at 960 Rincon Circle, San Jose, Calif. 95131. Or, the substrate can be glass such as Corning 1737 or Corning Eagle2000 or other suitable optically transmissive substrate. In a preferred embodiment, the substrate is transmissive to visible light, and can be display grade glass.

[0052] As can be seen in Fig. 6, the light transmissive substrate 52 is bonded to e.g. a MOS-type substrate 62 in spaced apart relation due to spacers 44. A plurality of electrodes 63 are disposed adjacent a plurality of micromirrors 64 (mirrors simplified and only 9 illustrated for convenience) for electrostatically deflecting the micromirrors. An incoming light beam 65a will be reflected by a non-deflected mirror at the same angle as it is incident, but will be deflected "vertically" as outgoing light beam 65b when the mirror is deflected. An array of thousands or millions of mirrors selectively moving and deflecting light "vertically" toward projection optics, along with a color sequencer (wheel or prism) that directs sequential beams of different colors onto the mirrors, results in a color image projected on a target (e.g. for projection television, boardroom projectors, etc.). A simplified schematic of one type of projection system is illustrated in Fig. 13, where a light source 1, e.g. an arc lamp having a reflector 2, directs light through a color sequencer (e.g. color wheel 3 that rotates around axis of rotation 7 via motor 4), after which the light enters light pipe 5 and optics 6 so as to be incident on a micromirror array 8 and is reflected off of the micromirrors of the array and projected via projection optics 9 to a target.

[0053] The method for forming micromirrors as set forth above is but one example of many methods for forming many different MEMS devices (whether with or without an electrical component), in accordance with the present invention. Though the electrical component of the final MEMS device is formed on a separate wafer than the micromirrors in the above example, it is also possible to form the circuitry and micromechanical structures monolithically on the same substrate. The method for forming the MEMS structures could be similar to that described in Figs. 1-4 if the microstructures are micromirrors (with the difference being that the mirrors are formed on the substrate after forming circuitry and electrodes). Or, other methods for forming circuitry and micromirrors monolithically on the same substrate as known in the art could be used.

[0054] Figs. 10A and 10B show two wafers that will be joined together and then singulated. Fig. 10A is a top view of a light transmissive cover wafer (having a mask area, getter area, lubricant area and compression metal bonding area) whereas Fig. 10B is an illustration of such a monolithically formed mirror array (e.g. for a spatial light modulator) on a bottom semiconductor wafer (along with a metal area for compression bonding). Referring first to Fig. 10B, a plurality of mirror arrays 71a to 71e are formed on a "bottom" wafer 70 (e.g. a silicon wafer). After the mirrors are released, a metal for compression bonding is applied (areas 73a to 73e) around each mirror array. Of

course more arrays could be formed on the wafer (as shown in Fig. 8). On a "top" wafer 80 (e.g. glass or quartz – preferably display grade glass) are formed masks 81a-e which will block visible light around a perimeter area of each die from reaching the mirror arrays after the two wafers are bonded and singulated. Also illustrated in Fig. 10A are areas of lubricant 83a-e, areas of getter material 85a-e, and areas of metal for compression bonding 87a-e. If the wafer of Fig. 10B has been treated with a self assembled monolayer or other lubricant, then the addition of a lubricant on the wafer of Fig. 10A may be omitted if desired (although multiple applications of lubricants can be provided). The lubricant applied to the wafer as a gasket, band or drop on the wafer, can be any suitable lubricant, such as the various liquid or solid organic (or hybrid organic-inorganic materials) set forth in US patents 5,694,740 5,512,374, 6,024,801, and 5,939,785, each of these being incorporated herein by reference. In one embodiment, a trichlorosilane SAM is applied to the entire wafer or large portions of the wafer at least covering the micromechanical elements, and a silicone is applied to the lubricant areas 83a-e. The metal for compression bonding could be any suitable metal for this purpose such as gold or indium. (Alternatively, if an adhesive is used, the adhesive could be any suitable adhesive, such as an epoxy or silicone adhesive, and preferably an adhesive with low outgassing). Of course any combination of these elements could be present (or none at all if the bonding method is other than an adhesive bonding method). Preferably one or more of the mask, lubricant, getter and bonding material are present on the "top" wafer 80 prior to bonding. Also, the lubricant, getter and bonding material could be applied to only the top or bottom wafer or both wafers. In an alternate embodiment, it may be desirable to apply the lubricant and getter to the bottom wafer around the circuitry and electrodes, with bonding material on both wafers. Of course, depending upon the MEMS application, the mask (or the lubricant or getter) may be omitted (e.g. for non-display applications). Also, the bands of lubricant, getter and bonding material need not fully encircle the "die area" on the wafer, but could be applied in strips of dots as illustrated in Fig. 9B. If the bonding material does not fully encircle the MEMS die area, then, prior to singulation, it is preferred that the bonding material "gap" be filled so as to protect the MEMS devices during singulation (from particulate and/or liquid damage depending upon the singulation method).

[0055] It is also possible to bond multiple substrates (smaller than a single wafer) to another wafer. In the embodiment illustrated in Figs. 10C and 10D, substrates 101a-d are substrates transmissive to visible light and have thereon masks 81a-d as well as areas of lubricant 83a-d, areas of getter material 85a-d, and areas of bonding material 87a-d (e.g. gold or indium for metal compression bonding). The mask areas are preferably "picture frame" shaped rectangular areas that block the transmission of visible light. This arrangement is desirable for selectively blocking light incident on micromirror arrays formed on the wafer. After bonding the multiple substrates with mask areas to the wafer, the wafer is singulated into wafer assembly portions, followed by packaging such as in Fig. 12.

[0056] The MEMS wafers could be made of any suitable material, depending upon the final application for the devices, including silicon, glass, quartz, alumina, GaAs, etc. Silicon wafers can typically be processed to include circuitry. For an optical MEMS application (e.g. micromirrors for optical switching or for displays), the "top" wafer of Fig. 10A is preferably transparent, as mentioned above. The mask illustrated in Fig. 10A, can be an absorptive or reflective mask, such as one made from TiN, AlN, or other oxide or nitride compound, or polymers or other suitable

materials having sufficient light blocking capabilities. This "top" wafer could also incorporate other optical elements, such as lenses, UV or other types of filters or antireflection and/or antiscratch coatings.

[0057] Then, the two wafers are aligned, bonded, cured (e.g. with UV light or heat depending upon the type of adhesive used) and singulated as set forth above. Fig. 11A is a cross section taken along line 11-11 in Fig. 10A (after alignment with bottom wafer 70 in Fig. 10B), whereas Fig. 10B is the same cross section after bonding (but before singulation). Fig. 12 is an illustration of a packaged wafer assembly portion after singulation of the bonded wafers. As can be seen in Fig. 12, a lower substrate 94 is bonded to the upper substrate 93, with the lower substrate held on a lower packaging substrate 90. Metal areas 96 on lower wafer portion 94 will be electrically connected to metal areas 97 on the package substrate 90. As can be seen in this figure, unlike other MEMS packaging configurations, there is no need to further encapsulate or package the wafer assembly die formed of substrates 93 and 94, as the MEMS elements are already protected within the wafer assembly. As such, the die comprised of two bonded die substrates (light transmissive and semiconductor, for example, with MEMS elements on the light transmissive substrate) seal (preferably hermetically) the MEMS elements from ambient. A micromirror array comprises of micromirrors held on a first substrate (preferably glass or display quality glass) which substrate is bonded to a semiconductor substrate (preferably silicon) which in turn is bonded to a lower package substrate that does not fully encapsulate the bonded die substrates (because the light transmissive and semiconductor substrates already encapsulate the MEMS elements) is a less expensive alternative to standard packaging of micromirror arrays for projection displays. Also, such a packaging arrangement allows for providing anti-stiction treatment, getters etc. at the wafer level further decreasing costs of packaging the device. Alternatively, it is possible to fully encapsulate the two bonded die substrates within a fully surrounding package (having an optically transmissive window for light to enter and exit the package). Such a fully surrounding package could be a hermetic package with, for example, a pressure less than ambient pressure. The pressure between the bonded die substrates hermetically sealed together can be less than 1 atm, preferably less than 0.25 atm, and more preferably less than Torr. If very low pressures are desired, then pressures between the substrates of less than 10 Torr, less than 1 Torr or even as low as 100 mTorr can be used. Getters, lubricants, etc. could be disposed within this surrounding package rather than within the bonded substrates.

[0058] Preferably, the light transmissive substrate bonded to the semiconductor substrate (or other substrate having circuitry and electrodes thereon) hermetically seals the MEMS elements from the surrounding environment, and preferably at a pressure lower than the surrounding environment. In order to achieve the lower pressure, the two substrates (dies or wafers) are bonded together at subatmospheric pressure and hermetically sealed (followed by wafer singulation if performed at the wafer level). Or, the two substrates could be bonded at ambient pressure, though not hermetically, followed by a second seal at a lower pressure that hermetically seals off the interior of the bonded substrates from the surrounding environment. In one example of such a method, the two substrates are first bonded with an adhesive (e.g. epoxy or silicone) followed by soldering (this can be application of a solder or solder reflow) or other hermetic seal (e.g. glass frit seal) if the adhesive is insufficiently hermetic. It is also possible to perform both seals at subatmospheric pressure, or perform such a double seal at ambient pressure if it is not desired

to have a lower pressure within the area between the two substrates. In addition, it may be desirable, whether at lower pressure or not, to seal the two substrates with a gas other than air, such as an inert gas or gases (nitrogen, helium, etc.), or moisture can be added if an anti-stiction agent would better perform if some moisture is present in the package. This packaging can also be desirable for a monolithic MEMS device where both the circuitry and MEMS elements are on the same substrate, as well as where the MEMS elements are formed on a substrate different from the circuitry.

[0059] If an anti-stiction agent is deposited on the MEMS elements after release, but before bonding the substrates together, it may be desirable to protect the areas that will be required for bonding (e.g. if an adhesive is used – protecting those areas where the adhesive will be applied), followed by application of the anti-stiction agent, in turn followed by removing the protecting agent or film, followed in turn by application of the bonding agent. Such a film could be applied in strips or rings that correspond to the location of the later applied bonding agent, and could be a photoresist or an inorganic thin film applied by CVD or sputtering. In the alternative, the MEMS elements could be released, followed by application of an anti-stiction agent. Then, the applied anti-stiction agent (e.g. a self assembled monolayer formed from chlorosilane or alkoxy silane precursors) is removed in the areas where the bonding agent will be applied (in any pattern – though preferably circumferentially around the micromirror array if the MEMS elements are micromirrors in an array). Removal can be accomplished by laser ablation (preferably focusing laser above the substrate), particle beam, application of a stripping chemical (e.g. acetone) or even mechanical removal (scoring with a hard or soft object or with a polishing wheel).

[0060] There are many alternatives to the method of the present invention. In order to bond the two wafers, epoxy can be applied to the one or both of the upper and lower wafers. In a preferred embodiment, epoxy is applied to both the circumference of the wafer and completely or substantially surrounding each die/array on the wafer. Spacers can be mixed in the epoxy so as to cause a predetermined amount of separation between the wafers after bonding. Such spacers hold together the upper and lower wafers in spaced-apart relation to each other. The spacers act to hold the upper and lower wafers together and at the same time create a space in which the movable mirror elements can move. Alternatively, the spacer layer could comprise walls or protrusions that are micro-fabricated. Or, one or more wafers could be bonded between the upper and lower wafers and have portions removed (e.g. by etching) in areas corresponding to each mirror array (thereby providing space for deflection of the movable elements in the array). The portions removed in such intermediate wafers could be removed prior to alignment and bonding between the upper and lower wafers, or, the wafer(s) could be etched once bonded to either the upper or lower wafer. If the spacers are micro-fabricated spacers, they can be formed on the lower wafer, followed by the dispensing of an epoxy, polymer, or other adhesive (e.g. a multi-part epoxy, or a heat or UV-cured adhesive) adjacent to the micro-fabricated spacers. The adhesive and spacers need not be co-located, but could be deposited in different areas on the lower substrate wafer. Alternative to glue, a compression bond material could be used that would allow for adhesion of the upper and lower wafers. Spacers micro-fabricated on the lower wafer (or the upper wafer) and could be made of polyimide, SU-8 photo-resist.

[0061] Instead of microfabrication, the spacers could be balls or rods of a predetermined size that are within the adhesive when the adhesive is placed on the lower wafer. Spacers provided within the adhesive can be made of glass or plastic, or even metal so long as the spacers do not interfere with the electrostatic actuation of the movable element in the upper wafer. Regardless of the type of spacer and method for making and adhering the spacers to the wafers, the spacers are preferably from 1 to 250 microns, the size in large part depending upon the size of the movable mirror elements and the desired angle of deflection. Whether the mirror arrays are for a projection display device or for optical switching, the spacer size in the direction orthogonal to the plane of the upper and lower wafers is more preferably from 1 to 100 microns, with some applications benefiting from a size in the range of from 1 to 20 microns, or even less than 10 microns.

[0062] Regardless of whether the microstructures and circuitry are formed on the same wafer or on different wafers, when the microstructures are released by removal of the sacrificial layer, a sticking force reducing agent can be applied to the microstructures (micromirrors, microrelays, etc) on the wafer to reduce adhesion forces upon contact of the microstructures with another layer or structure on the same or opposing substrate. Though such adhesion reducing agents are known, in the present invention the agent is preferably applied to the wafer before wafer bonding (or after wafer bonding but before singulation), rather than to the singulated die or package for the die. Various adhesion reducing agents, including various trichlorosilanes, and other silanes and siloxanes as known in the art for reducing stiction for micro electromechanical devices, as mentioned elsewhere herein.

[0063] Also, a getter or molecular scavenger can be applied to the wafer prior to wafer bonding as mentioned above. The getter can be a moisture, hydrogen, particle or other getter. The getter(s) is applied to the wafer around the released MEMS structures (or around, along or adjacent an array of such structures, e.g. in the case of a micromirror array), of course preferably not being in contact with the released structures. If a moisture getter is used, a metal oxide or zeolite can be the material utilized for absorbing and binding water (e.g. StayDry SD800, StayDry SD1000, StayDry HiCap2000 – each from Cookson Electronics). Or, a combination getter could be used, such as a moisture and particle getter (StayDry GA2000-2) or a hydrogen and moisture getter (StayDry H2-3000). The getter can be applied to either wafer, and if adhesive bonding is the bonding method, the getter can be applied adjacent the epoxy beads or strips, preferably between the epoxy and the microstructures, and can be applied before or after application of the adhesive (preferably before any adhesive is applied to the wafer(s)). In one embodiment, a getter (or getters if more than one type of getter is used) are provided in a trench or other cavity formed in either (or both) substrates. For example, a trench extending along one or more sides of a micromirror array (or around the entire periphery of the array) could be formed prior to depositing the sacrificial layer and thin films (or at the end before or after release of the micromirrors). Such a trench (or cavity) could be formed in a silicon substrate (e.g. with circuitry and electrodes thereon if formed as the dual substrate approach set forth above, or circuitry, electrodes and micromirrors thereon if formed monolithically). Or such a trench or cavity for the getter(s) could be formed in the glass substrate. It is also possible to form a trench or cavity in both substrates with the same or different getters deposited therein.

[0064] As can be seen from the above, the method of the present invention comprises making a MEMS device, e.g. a spatial light modulator, by providing a first wafer, providing a second wafer, forming circuitry and a plurality of

electrodes on the first wafer, forming a plurality of deflectable elements on either the first or second wafer, aligning the first and second wafers, bonding the first and second wafers together to form a wafer assembly, separating the wafer assembly into individual dies, and packaging the individual dies. Each die can comprise an array of deflectable reflective elements. The reflective elements correspond to pixels in a direct-view or projection display. The number of reflective elements in each die is from 6,000 to about 6 million or more, depending upon the resolution of the display.

[0065] In the method of the invention, the first wafer is preferably glass, borosilicate, tempered glass, quartz or sapphire, or can be a light transmissive wafer of another material. The second wafer can be a dielectric or semiconductor wafer, e.g. GaAs or silicon. As noted above, the first and second wafers are bonded together with an adhesive (though metal or anodic bonding are also possible, depending upon the MEMS structure and the type of micromachining).

[0066] The releasing can be performed by providing any suitable etchant, including an etchant selected from an interhalogen, a noble gas fluoride, a vapor phase acid, or a gas solvent. And, the releasing is preferably followed by a stiction treatment (e.g. a silane, such as a chlorosilane). Also, a getter can be applied to the wafer before or after the adhesion reducing agent is applied, and before or after an adhesive is applied (if an adhesive bonding method is chosen). Preferably the time from releasing to bonding is less than 12 hours, and preferably less than 6 hours.

[0067] The invention need not be limited to a direct-view or projection display. The invention is applicable to many different types of MEMS devices, including pressure and acceleration sensors, MEMS switches or other MEMS devices formed and released on a wafer. The invention also need not be limited to forming the releasable MEMS elements on one wafer and circuitry on another wafer. If both MEMS and circuitry are formed monolithically on the same wafer, a second wafer (glass, silicon or other material) can be attached at the wafer level following release of the MEMS devices but prior to dividing the wafers into individual dies. This can be particularly useful if the MEMS devices are micromirrors, due to the fragility of such elements.

[0068] Though the invention is directed to any MEMS device, specific mirrors and methods for projection displays or optical switching could be used with the present invention, such as those mirrors and methods set forth in US patent 5,835,256 to Huibers issued Nov. 10, 1998; US patent 6,046,840 to Huibers issued April 4, 2000; US patent applications 09/767,632 to True et al. filed January 22, 2001; 09/564,069 to Richards filed May 3, 2000; 09/617,149 to Huibers et al. filed July 17, 2000; 09/631,536 to Huibers et al. filed August 3, 2000; 09/626,780 to Huibers filed July 27, 2000; 60/293,092 to Patel et al. filed May 22, 2001; 09/637,479 to Huibers et al. filed August 11, 2000; and 60/231,041 to Huibers filed September 8, 2000. If the MEMS device is a mirror, the particular mirror shapes disclosed in US patent application 09/732,445 to Ilkov et al. filed December 7, 2000 could be used. Also, the MEMS device need not be a micromirror, but could instead be any MEMS device, including those disclosed in the above applications and in application 60/240,552 to Huibers filed December 13, 2000. In addition, the sacrificial materials, and methods for removing them, could be those disclosed in US patent application 60/298,529 to Reid et al. filed June 15, 2001. Lastly, assembly and packaging of the MEMS device could be such as disclosed in US patent application 60/276,222 filed March 15, 2001. Each of these patents and applications is incorporated herein by reference.

[0069] The invention has been described in terms of specific embodiments. Nevertheless, persons familiar with the field will appreciate that many variations exist in light of the embodiments described herein.

CLAIMS

We claim:

1. A method for making a spatial light modulator, comprising:
 - forming a plurality of deflectable reflective elements on a first or second substrate;
 - bonding the first and second substrates together to form a substrate assembly;
 - bonding the substrate assembly onto a package substrate that does not fully encapsulate the substrate assembly to form an exposed and packaged substrate assembly; and
 - wire bonding the substrate assembly to the package substrate.
2. The method of claim 1, further comprising disposing the exposed and packaged substrate assembly into a projection system.
3. The method of claim 2, wherein the reflective elements correspond to pixels in a direct-view or projection display.
4. The method of claim 3, wherein the number of reflective elements in each die is from 150,000 to about 6 million.
5. The method of claim 1, wherein the first substrate is an optically transmissive substrate or a substrate having one or more layers that when removed result in an optically transmissive substrate.
6. The method of claim 5, wherein the first substrate is glass, borosilicate, tempered glass, quartz or sapphire.
7. The method of claim 1, wherein the second substrate is a dielectric or semiconductor substrate.
8. The method of claim 7, wherein the second substrate comprises GaAs or silicon.
9. The method of claim 1, wherein the first and second substrates are bonded together with an adhesive.
10. The method of claim 9, wherein the adhesive is an epoxy.
11. The method of claim 10, wherein the epoxy comprises balls or rods of predetermined diameter.
12. The method of claim 1, wherein the substrate assembly is separated into individual dies by scribing and breaking.
13. The method of claim 1, wherein the substrate assembly is tested for abnormalities prior to separation into the individual dies.
14. The method of claim 1, further comprising providing a spacing substrate between the first and second substrates.
15. The method of claim 1, further comprising providing microfabricated spacers on one or both of the first and second substrates prior to bonding.
16. The method of claim 9, wherein the adhesive is dispensed by automated controlled liquid dispensing through a syringe.
17. The method of claim 9, wherein the adhesive is dispensed by screen, offset or roller printing.
18. The method of claim 16, wherein the syringe is moved along X-Y coordinates for dispensing.
19. The method of claim 1, wherein the aligning comprises registration of substrate fiducials on opposite substrates.

20. The method of claim 19, wherein the registration is accomplished with a video camera having lens magnification.
21. The method of claim 7, wherein the second substrate is a glass or quartz substrate.
22. The method of claim 1, wherein the bonding of the substrates comprises the dispensing of a UV or thermal cure epoxy.
23. The method of claim 22, wherein the bonding further comprises application of a force of 10 kg force or more.
24. The method of claim 1, wherein the aligning comprises aligning each deflectable element on the first substrate with at least one electrode on the second substrate.
25. The method of claim 1, wherein the separation of the substrate assembly comprises forming scribes on the first and second substrates.
26. The method of claim 25, wherein the scribes are placed in an offset relationship to each other in at least one direction.
27. The method of claim 25, wherein the separation further comprises breaking the substrate assembly along the scribe lines with a guillotine or fulcrum breaking machine.
28. The method of claim 1, wherein the separation of the substrate assembly comprises sawing partially through each substrate followed by breaking along the sawed lines.
29. The method of claim 1, wherein the sawing is done in the presence of a high-pressure jet of water.
30. The method of claim 1, wherein the bonding comprises applying a sealant near the perimeter of each array on the substrate.
31. The method of claim 30, further comprising applying a sealant around the perimeter of at least one of the substrates.
32. The method of claim 1, wherein the bonding comprises applying an adhesive and spacers, the spacers having a size of from 1 to 100 microns.
33. The method of claim 32, wherein the spacers have a size of from 1 to 20 microns.
34. The method of claim 1, wherein the plurality of deflectable elements are reflective mirror elements and are formed on the second substrate which is a light transmissive substrate, at least with any surface coating removed therefrom.
35. The method of claim 15, wherein the microfabricated spacers comprise an organic material.
36. The method of claim 32, wherein the spacers are glass or plastic spacers.
37. The method of claim 1, wherein the forming of the deflectable element comprises surface or bulk micromachining.
38. The method of claim 1, wherein the plurality of deflectable elements are formed on the first substrate.
39. The method of claim 38, wherein the circuitry and plurality of electrodes are formed prior to forming the plurality of deflectable elements, wherein the plurality of deflectable elements are formed above the plurality of electrodes on the first substrate.
40. The method of claim 39, wherein a plurality of light blocking masks are formed on the second substrate.

41. The method of claim 40, wherein when the substrate assembly is singulated into substrate assembly dies, a light blocking mask is disposed on a second substrate portion within each substrate assembly die.
42. The method of claim 1, wherein the plurality of deflectable elements are formed on the second substrate.
43. The method of claim 42, wherein when the first and second substrates are aligned and bonded together, the deflectable elements on the second substrate are each disposed proximate to a corresponding electrode on the first substrate.
44. The method of claim 1, further comprising packaging the substrate assembly dies.
45. The method of claim 1, wherein the deflectable elements are micromirrors having jagged or zig-zag edges.
46. The method of claim 1, further comprising applying a stiction reducing agent to one or both substrates before or after bonding the two substrates together, but before singulating the substrate assembly into dies.
47. The method of claim 1, further comprising applying a getter to one or both substrates before bonding the two substrates together into a substrate assembly.
48. The method of claim 47, wherein the getter is a molecular, hydrogen and/or particle getter.
49. The method of claim 47, wherein the getter is a particulate and moisture getter.
50. The method of claim 47, wherein the getter is capable of absorbing moisture.
51. The method of claim 46, wherein the stiction reducing agent is a silane applied to the deflectable elements.
52. The method of claim 46, wherein the stiction reducing agent is a chlorosilane.
53. The method of claim 1, further comprising aligning the substrates prior to bonding and singulating the bonded substrates into multiple bonded substrate die portions.
54. The method of claim 53, wherein the aligning of the substrates has an accuracy of 1 micron or less.
55. The method of claim 2, wherein the projection system comprises a light source, a color sequencer and projection optics.
56. A method for forming a micromirror array, comprising:
 - providing a first substrate;
 - providing a second substrate;
 - forming a plurality of micromirror elements on the first or second substrate;
 - bonding the first and second substrates together at subatmospheric pressure to form a substrate assembly; and
 - singulating the substrate assembly into individual dies, each die comprised of bonded first and second substrate portions with micromirror elements therebetween in a subatmospheric environment.
57. The method of claim 56, wherein the micromirror elements are formed by depositing structural films on a sacrificial layer and releasing to remove the sacrificial layer, where the releasing comprises providing an etchant selected from an interhalogen, a noble gas fluoride, a vapor phase acid, or a gas solvent.
58. The method of claim 57, wherein the releasing is followed by a stiction treatment.
59. The method of claim 58, wherein the stiction treatment comprises treatment with a silane.
60. The method of claim 58, wherein the stiction treatment is followed by said bonding.
61. The method of claim 60, wherein the time from releasing to bonding is less than 6 hours.

62. The method of claim 56, wherein the first substrate is an optically transmissive substrate or a substrate having one or more layers that when removed result in an optically transmissive substrate.
63. The method of claim 62, wherein the first substrate is a glass, borosilicate, tempered glass, quartz or sapphire wafer.
64. The method of claim 56, wherein the second substrate is a dielectric or semiconductor wafer.
65. The method of claim 64, wherein the second substrate comprises GaAs or silicon.
66. The method of claim 65, wherein the first and second substrates are bonded together with an adhesive.
67. The method of claim 66, wherein the adhesive is an epoxy.
68. The method of claim 67, wherein the epoxy comprises balls or rods of predetermined diameter.
69. The method of claim 66, wherein the substrate assembly is separated into individual dies by scribing and breaking.
70. The method of claim 56, wherein the substrate assembly is tested for abnormalities prior to separation into the individual dies.
71. The method of claim 56, further comprising providing a spacing substrate between the first and second substrates.
72. The method of claim 56, further comprising providing microfabricated spacers on one or both of the first and second substrates prior to bonding.
73. The method of claim 66, wherein the adhesive is dispensed by automated controlled liquid dispensing through a syringe.
74. The method of claim 66, wherein the adhesive is dispensed by screen, offset or roller printing.
75. The method of claim 73, wherein the syringe is moved along X-Y coordinates for dispensing.
76. The method of claim 56, wherein the aligning comprises registration of substrate fiducials on opposite substrates.
77. The method of claim 76, wherein the registration is accomplished with a video camera having lens magnification.
78. The method of claim 64, wherein the first and second substrates are substantially circular in shape with a diameter of from 4 to 12 inches.
79. The method of claim 67, wherein the bonding of the substrates comprises the dispensing of a UV or thermal cure epoxy.
80. The method of claim 79, wherein the bonding further comprises application of a force of 10 kg force or more.
81. The method of claim 56, wherein the aligning comprises aligning each deflectable element on the first substrate with at least one electrode on the second substrate.
82. The method of claim 56, wherein the separation of the substrate assembly comprises forming scribes on the first and second substrates.
83. The method of claim 25, wherein the scribes are placed in an offset relationship to each other in at least one direction.

84. The method of claim 25, wherein the separation further comprises breaking the substrate assembly along the scribe lines with a guillotine or fulcrum breaking machine.
85. The method of claim 56, wherein the separation of the substrate assembly comprises sawing partially through each substrate followed by breaking along the sawed lines.
86. The method of claim 56, wherein the sawing is done in the presence of a high-pressure jet of water.
87. The method of claim 56, wherein the bonding comprises applying a sealant near the perimeter of each array on the substrate.
88. The method of claim 87, further comprising applying a sealant around the perimeter of at least one of the substrates.
89. The method of claim 56, wherein the bonding comprises applying an adhesive and spacers, the spacers having a size of from 1 to 100 microns.
90. The method of claim 89, wherein the spacers have a size of from 1 to 20 microns.
91. The method of claim 90, wherein the plurality of deflectable elements are reflective mirror elements and are formed on the second substrate which is a light transmissive substrate, at least with any surface coating removed therefrom.
92. The method of claim 89, wherein the microfabricated spacers comprise an organic material.
93. The method of claim 89, wherein the spacers are glass or plastic spacers.
94. The method of claim 56, wherein the micromirrors are provided in an array of from 100,000 to 10,000,000 micromirrors within the array.
95. The method of claim 56, further comprising bonding and wire bonding the substrate assembly to a package substrate that does not fully encapsulate the substrate assembly.
96. The method of claim 95, wherein the package substrate that does not fully encapsulate the substrate assembly is fixed within a projection system..
97. The method of claim 56, further comprising applying a stiction reducing agent to one or both substrates before or after bonding the two substrates together, but before singulating the substrate assembly into dies.
98. The method of claim 56, further comprising applying a getter to one or both substrates before bonding the two substrates together into a substrate assembly.
99. The method of claim 96, wherein the projection system comprises a light source, color sequencer and projection optics.
100. The method of claim 99, wherein the light source is an arc lamp.
101. The method of claim 100, wherein the color sequencer is a color wheel.
102. The method of claim 97, wherein the stiction reducing agent is a silane applied to the deflectable elements.
103. The method of claim 97, wherein the stiction reducing agent is a chlorosilane.
104. The method of claim 96, wherein a plurality of light blocking masks are formed on the second substrate.
105. The method of claim 104, wherein when the substrate assembly is singulated into substrate assembly dies, a light blocking mask is disposed on a second substrate portion within each substrate assembly die.
106. A method for making a micromirror array, comprising:

providing a first wafer;
providing a second wafer;
forming circuitry and a plurality of electrodes on the first
wafer to form a circuitry and electrode array;
forming a plurality of deflectable micromirror elements on either the
first or second wafer to form a micromirror array;
before or after forming the plurality of deflectable micromirror elements and circuitry and electrode
array, forming a trench or cavity proximate to the micromirror array and/or circuitry and electrode
array;
depositing a stiction reducing agent and/or a getter into the trench or cavity;
aligning the first and second wafers;
bonding the first and second wafers together to form a wafer
assembly; and
separating the wafer assembly into individual wafer assembly dies.

107. The method of claim 106, wherein a stiction reducing agent is deposited into a trench or cavity of one wafer and a getter is deposited into a trench or cavity of the other wafer.
108. The method of claim 107, wherein the stiction reducing agent is applied in liquid or solid form into the trench or cavity.
109. The method of claim 106, wherein a getter is deposited into the trench or cavity of one or both wafers before bonding the two wafers together.
110. The method of claim 109, wherein the getter is a molecular, hydrogen and/or particle getter.
111. The method of claim 110, wherein the getter is a particulate and moisture getter.
112. The method of claim 110, wherein the getter is capable of absorbing moisture.
113. The method of claim 107, wherein the stiction reducing agent comprises carbon and fluorine.
114. The method of claim 106, wherein a getter is deposited into the trench or cavity and a stiction reducing agent is applied in vapor phase to cover the micromirror array.
115. The method of claim 114, wherein vapor phase stiction reducing agent is a fluorinated silane.
116. The method of claim 115, wherein the fluorinated silane has an alkyl chain of at least 8 carbons.
117. The method of claim 106, wherein the first and second wafers are bonded at subatmospheric pressure.
118. The method of claim 117, wherein the individual wafer assembly.
119. The method of claim 106, wherein one of the wafers is a glass or quartz wafer having one or more rectangular masks thereon.
120. The method of claim 119, wherein one of the wafers comprises an array of micromirrors and the other of the wafers is transmissive to visible light.
121. The method of claim 120, wherein the wafer transmissive to visible light comprises one or more visible light blocking areas.
122. The method of claim 121, wherein the visible light blocking areas are substantially rectangular.

123. The method of claim 106, wherein when the wafer assembly is singulated into wafer assembly dies, a light blocking mask is disposed on a second wafer portion within each wafer assembly die.
124. A method for making a MEMS device, comprising:
- forming a plurality of MEMS elements on a first wafer;
 - providing a second wafer;
 - hermetically bonding and sealing the first and second wafers together as a substrate assembly;
 - and
 - singulating the hermetic substrate assembly into multiple hermetically sealed substrate assembly dies, each comprising a MEMS element.
125. The method of claim 124, wherein the MEMS elements are micromirrors.
126. The method of claim 125, wherein each substrate assembly die comprises an array of micromirrors.
127. The method of claim 126, wherein the first wafer is a glass or quartz wafer.
128. The method of claim 124, wherein circuitry and a plurality of electrodes are formed on the second wafer prior to bonding.
129. The method of claim 128, wherein the second substrate is a silicon substrate.
130. The method of claim 124, further comprising
- bonding a substrate assembly die onto a third substrate that does not fully encapsulate the substrate assembly to form an exposed and packaged substrate assembly.
131. The method of claim 130, further comprising wire bonding the substrate assembly die to the third substrate.
132. The method of claim 130, further comprising connecting the packaged substrate assembly die into a projection system.
133. The method of claim 124, wherein the hermetically bonding and sealing is performed at a pressure lower than atmospheric pressure.
134. The method of claim 124, wherein the bonding of the first wafer to the second wafer is by adhesive bonding, anodic bonding, eutectic bonding, glass frit bonding and/or solder bonding.
135. The method of claim 134, wherein at least two types of bonding are used to hermetically bond and seal the first and second wafers together.
136. The method of claim 124, wherein a trench is formed in the first or second wafer proximate to the MEMS elements formed or to be formed.
137. The method of claim 133, wherein the hermetically sealed substrate assembly dies comprise micromirror elements in a surrounding gas less than atmospheric pressure.
138. The method of claim 124, wherein the hermetic bonding and sealing is performed in an atmosphere different than air.
139. The method of claim 138, wherein the hermetic bonding and sealing is performed in an atmosphere that comprises an inert gas.
140. The method of claim 139, wherein the inert gas comprises nitrogen, argon or helium.

141. The method of claim 124, further comprising providing an anti-stiction material in vapor phase to the MEMS elements prior to hermetically bonding and sealing the wafers together.
142. The method of claim 124, wherein the anti-stiction material is formed from a silane precursor.
143. A spatial light modulator, comprising:
a first substrate comprising an array of micromirrors;
a second substrate comprising circuitry and electrodes for electrostatically actuating the micromirrors;
wherein the first and second substrates are bonded together hermetically as a substrate assembly so that the micromirrors are hermetically sealed from surrounding air.
144. The spatial light modulator of claim 143, wherein a gas different from air is within the hermetic environment between the first and second substrates.
145. The spatial light modulator of claim 144, further comprising a package substrate that does not fully encapsulate the substrate assembly to form an exposed and packaged substrate assembly.
146. The spatial light modulator of claim 145, further comprising wire bonds electrically connecting the substrate assembly to the package substrate.
147. The spatial light modulator of claim 145, wherein the package substrate is a substantially planar substrate.
148. A projection system comprising: a light source, a color sequencer, the spatial light modulator of claim 143, and projection optics.
149. A spatial light modulator, comprising:
a first substrate comprising an array of micromirrors;
a second substrate comprising circuitry and electrodes for electrostatically actuating the micromirrors;
wherein the first and second substrates are bonded together with an adhesive as a substrate assembly.
150. The spatial light modulator of claim 149, wherein the first and second substrates are hermetically bonded together and a gas different from air is within the hermetic environment between the first and second substrates.
151. The spatial light modulator of claim 150, further comprising a package substrate that does not fully encapsulate the substrate assembly to form an exposed and packaged substrate assembly.
152. The spatial light modulator of claim 151, further comprising wire bonds electrically connecting the substrate assembly to the package substrate.
153. The spatial light modulator of claim 152, wherein the package substrate is a substantially planar substrate.
154. The spatial light modulator of claim 149, wherein the adhesive is an organic adhesive.
155. The spatial light modulator of claim 149, wherein the adhesive is an epoxy.
156. The spatial light modulator of claim 149, wherein the gap between the first and second substrates is 100 microns or less.
157. The spatial light modulator of claim 156, wherein the gap between the first and second substrates is 10 microns or less.

158. A projection system comprising: a light source, a color sequencer, the spatial light modulator of claim 149, and projection optics.
159. A spatial light modulator, comprising:
- a first substrate comprising an array of micromirrors;
 - a second substrate comprising circuitry and electrodes for electrostatically actuating the micromirrors;
- wherein the first and second substrates are bonded together as a substrate assembly that has the micromirrors therebetween and a gas therebetween at a pressure less than 1 atmosphere.
160. The spatial light modulator of claim 159, wherein a gas different from air is within the hermetic environment between the first and second substrates.
161. The spatial light modulator of claim 159, further comprising a package substrate that does not fully encapsulate the substrate assembly to form an exposed and packaged substrate assembly.
162. The spatial light modulator of claim 161, further comprising wire bonds electrically connecting the substrate assembly to the package substrate.
163. The spatial light modulator of claim 162, wherein the package substrate is a substantially planar substrate.
164. The spatial light modulator of claim 159, wherein the pressure between the first and second substrates in the substrate assembly is less than 0.25 atm.
165. The spatial light modulator of claim 160, wherein the pressure between the first and second substrates in the substrate assembly is less than 50 Torr.
166. The spatial light modulator of claim 161, wherein the pressure between the first and second substrates in the substrate assembly is less than 10 Torr.
167. The spatial light modulator of claim 162, wherein the pressure between the first and second substrates in the substrate assembly is less than 1 Torr.
168. The spatial light modulator of claim 163, wherein the pressure between the first and second substrates in the substrate assembly is less than 100 mTorr.
169. The spatial light modulator of claim 159, wherein the gap between the first and second substrates is less than 100 microns.
170. The spatial light modulator of claim 169, wherein the gap between the first and second substrates is less than 10 microns.
171. A projection system comprising: a light source, a color sequencer, the spatial light modulator of claim 159, and projection optics.
172. A spatial light modulator, comprising:
- a first substrate comprising an array of micromirrors;
 - a second substrate comprising circuitry and electrodes for electrostatically actuating the micromirrors;

wherein the first and second substrates are bonded together as a substrate assembly that has the micromirrors therebetween and a solid or liquid lubricant and/or getter disposed between the first and second substrates proximate to the micromirrors.

173. The spatial light modulator of claim 172 herein a gas different from air is within the hermetic environment between the first and second substrates.

174. The spatial light modulator of claim 172 further comprising a package substrate that does not fully encapsulate the substrate assembly to form an exposed and packaged substrate assembly.

175. The spatial light modulator of claim 174, further comprising wire bonds electrically connecting the substrate assembly to the package substrate.

176. The spatial light modulator of claim 175, wherein the package substrate is a substantially planar substrate.

177. The spatial light modulator of claim 172, wherein the pressure between the first and second substrates in the substrate assembly is less than 1 atm.

178. The spatial light modulator of claim 177, wherein the pressure between the first and second substrates in the substrate assembly is less than 50 Torr.

179. The spatial light modulator of claim 178, wherein the pressure between the first and second substrates in the substrate assembly is less than 10 Torr.

180. The spatial light modulator of claim 179, wherein the pressure between the first and second substrates in the substrate assembly is less than 1 Torr.

181. The spatial light modulator of claim 180, wherein the pressure between the first and second substrates in the substrate assembly is less than 100 mTorr.

182. The spatial light modulator of claim 172, wherein the gap between the first and second substrates is less than 100 microns.

183. The spatial light modulator of claim 182, wherein the gap between the first and second substrates is less than 10 microns.

184. A projection system comprising: a light source, a color sequencer, the spatial light modulator of claim 172, and projection optics.

185. A spatial light modulator, comprising:

a first semiconductor substrate comprising an array of micromirrors and circuitry and electrodes for electrostatically actuating the micromirrors;





a second substrate that is light transmissive;

the first and second substrates being bonded together.

186. The spatial light modulator of claim 185 herein a gas different from air is within the hermetic environment between the first and second substrates.

187. The spatial light modulator of claim 185 further comprising a package substrate that does not fully encapsulate the substrate assembly to form an exposed and packaged substrate assembly.

188. The spatial light modulator of claim 187, further comprising wire bonds electrically connecting the substrate assembly to the package substrate.
189. The spatial light modulator of claim 188, wherein the package substrate is a substantially planar substrate.
190. The spatial light modulator of claim 185, wherein the pressure between the first and second substrates in the substrate assembly is less than 1 atm.
191. The spatial light modulator of claim 190, wherein the pressure between the first and second substrates in the substrate assembly is less than 50 Torr.
192. The spatial light modulator of claim 191, wherein the pressure between the first and second substrates in the substrate assembly is less than 10 Torr.
193. The spatial light modulator of claim 192, wherein the pressure between the first and second substrates in the substrate assembly is less than 1 Torr.
194. The spatial light modulator of claim 193, wherein the pressure between the first and second substrates in the substrate assembly is less than 100 mTorr.
195. The spatial light modulator of claim 185, wherein the gap between the first and second substrates is less than 100 microns.
196. The spatial light modulator of claim 195, wherein the gap between the first and second substrates is less than 10 microns.
197. A projection system comprising: a light source, a color sequencer, the spatial light modulator of claim 185, and projection optics.
198. A method for making a spatial light modulator, comprising:
forming circuitry, electrodes and micromirrors on a semiconductor substrate;
bonding a light transmissive substrate to the semiconductor substrate to form a substrate assembly;
bonding the substrate assembly onto a package substrate that does not fully encapsulate the substrate assembly to form an exposed and packaged substrate assembly;
wire bonding the substrate assembly to the package substrate; and
disposing the exposed and packaged substrate assembly into a projection system.
199. A method for making a plurality of spatial light modulators, comprising:
forming circuitry, electrodes and micromirrors on a semiconductor substrate;
bonding a light transmissive substrate to the semiconductor substrate to form a substrate assembly;
singulating the substrate assembly into individual substrate assembly portions each comprising a spatial light modulator; and
packaging the individual substrate assembly portions.

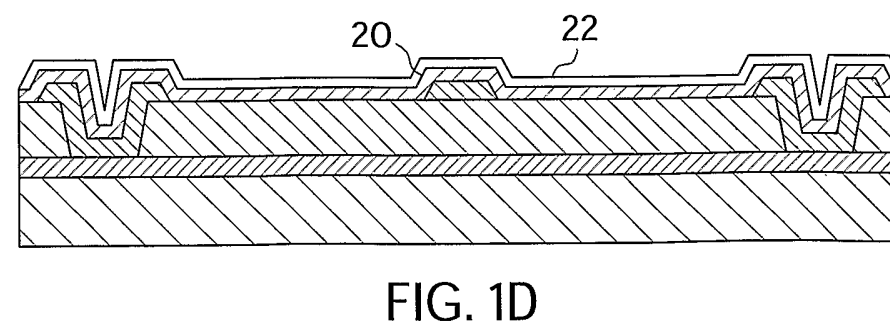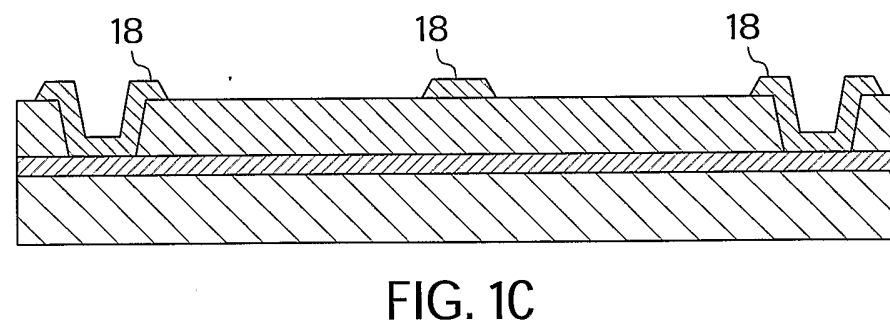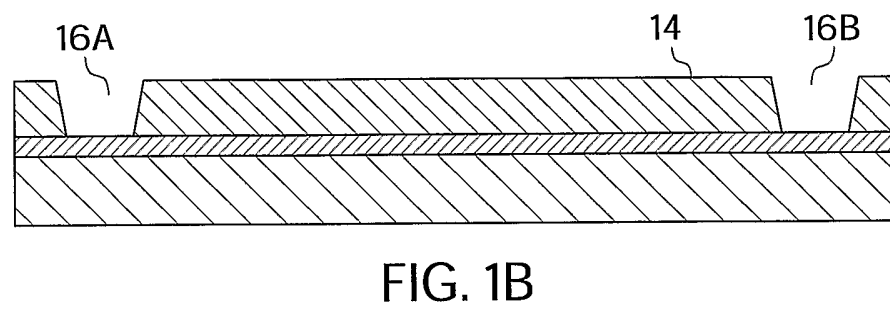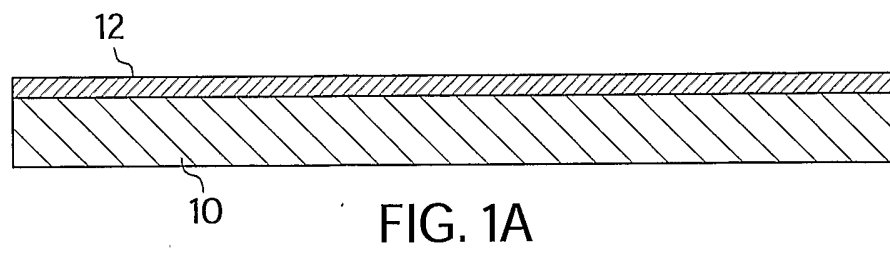

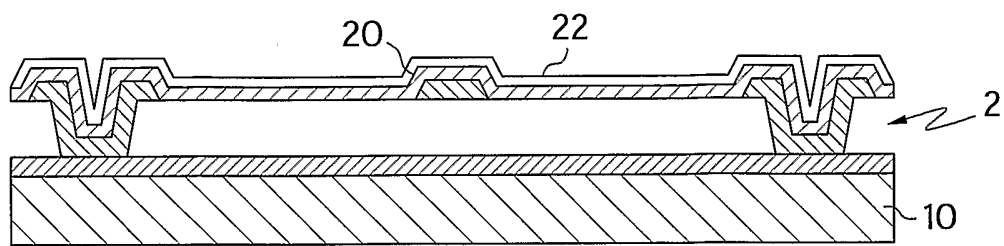


FIG. 1E

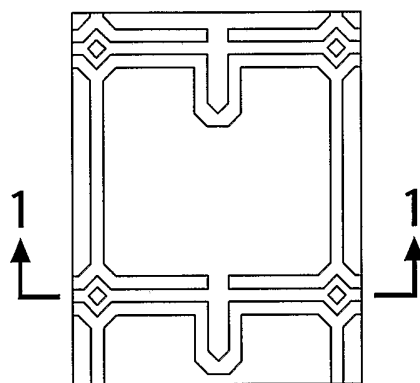


FIG. 2

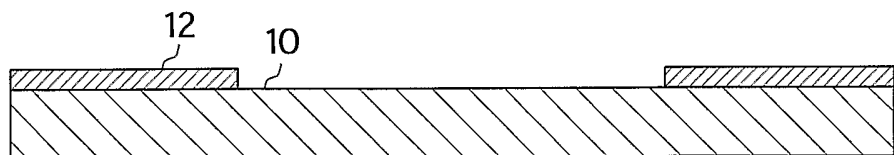


FIG. 3A

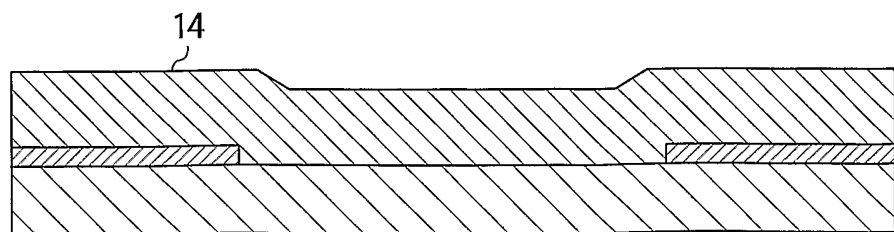


FIG. 3B

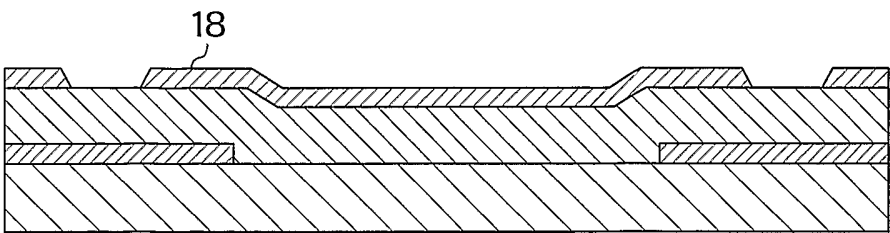


FIG. 3C

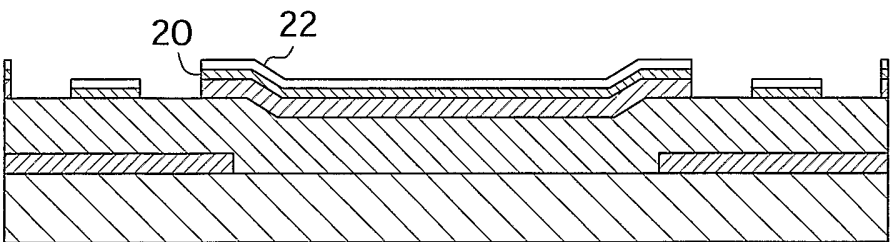


FIG. 3D

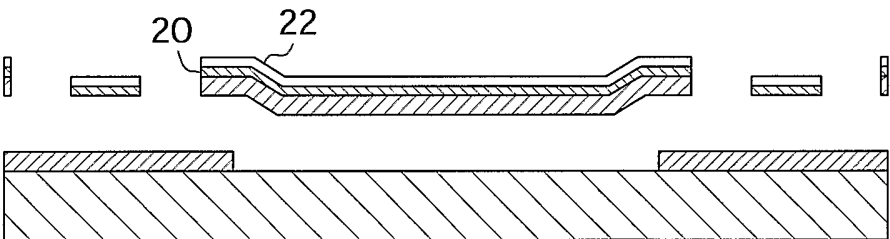


FIG. 3E

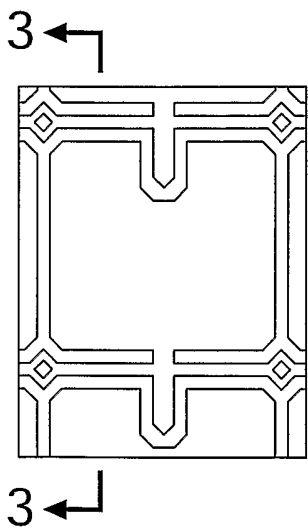


FIG. 4

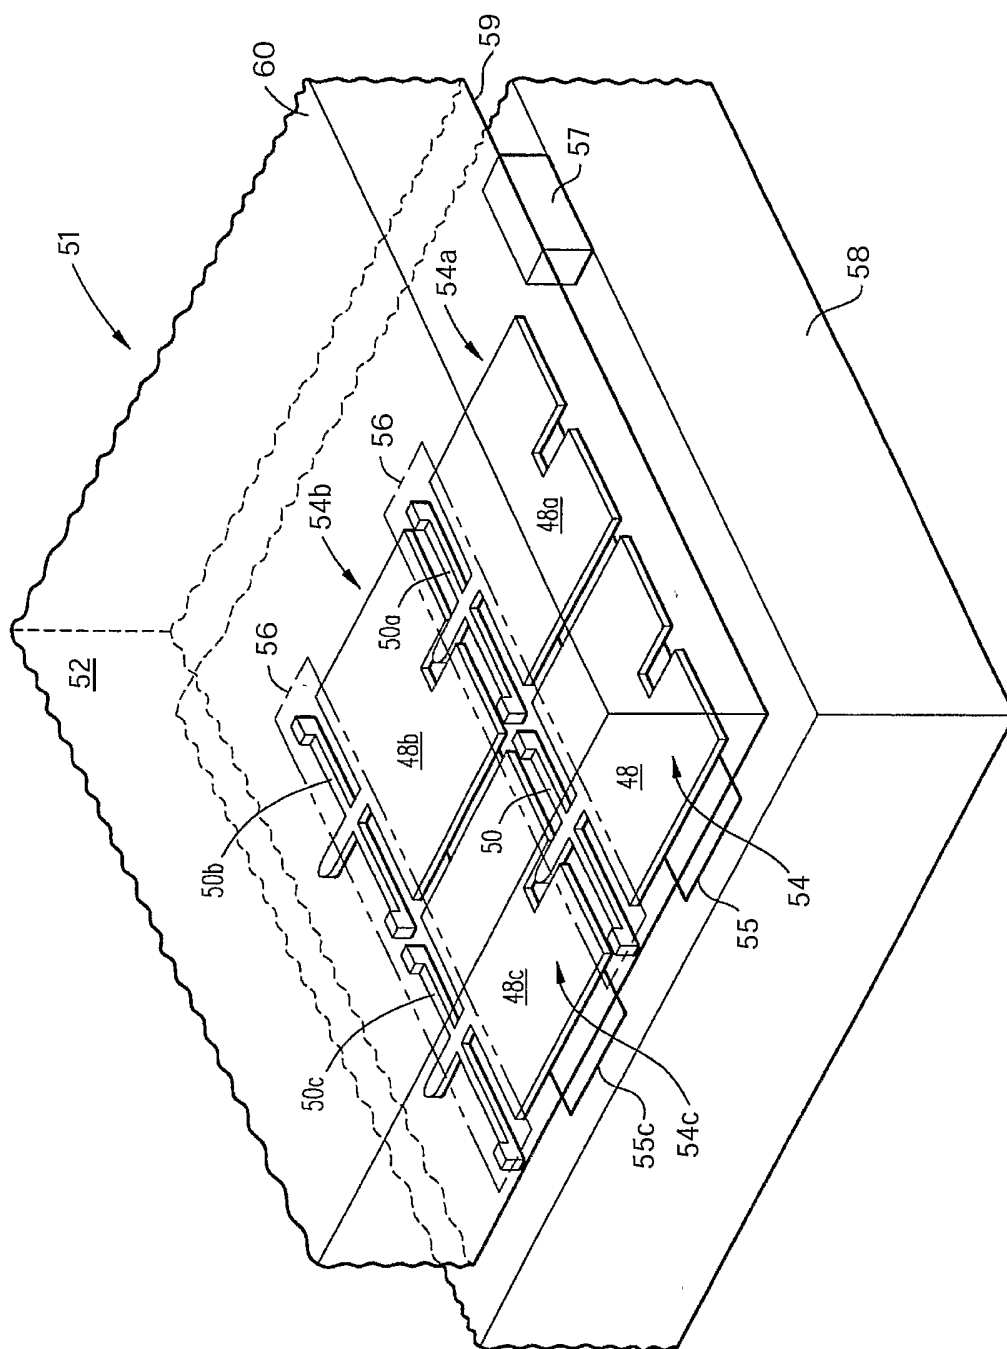


FIG. 5

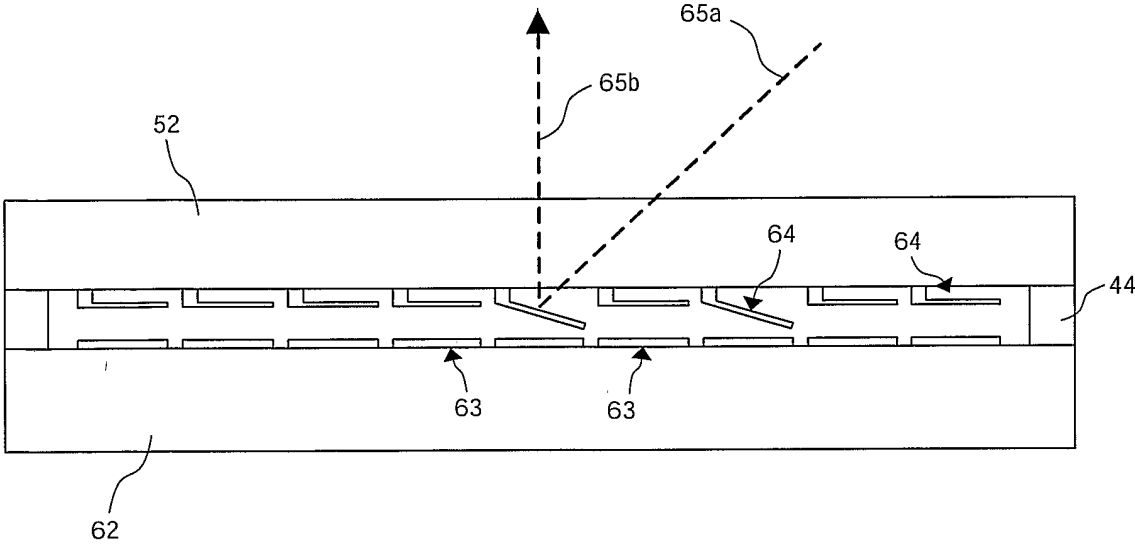
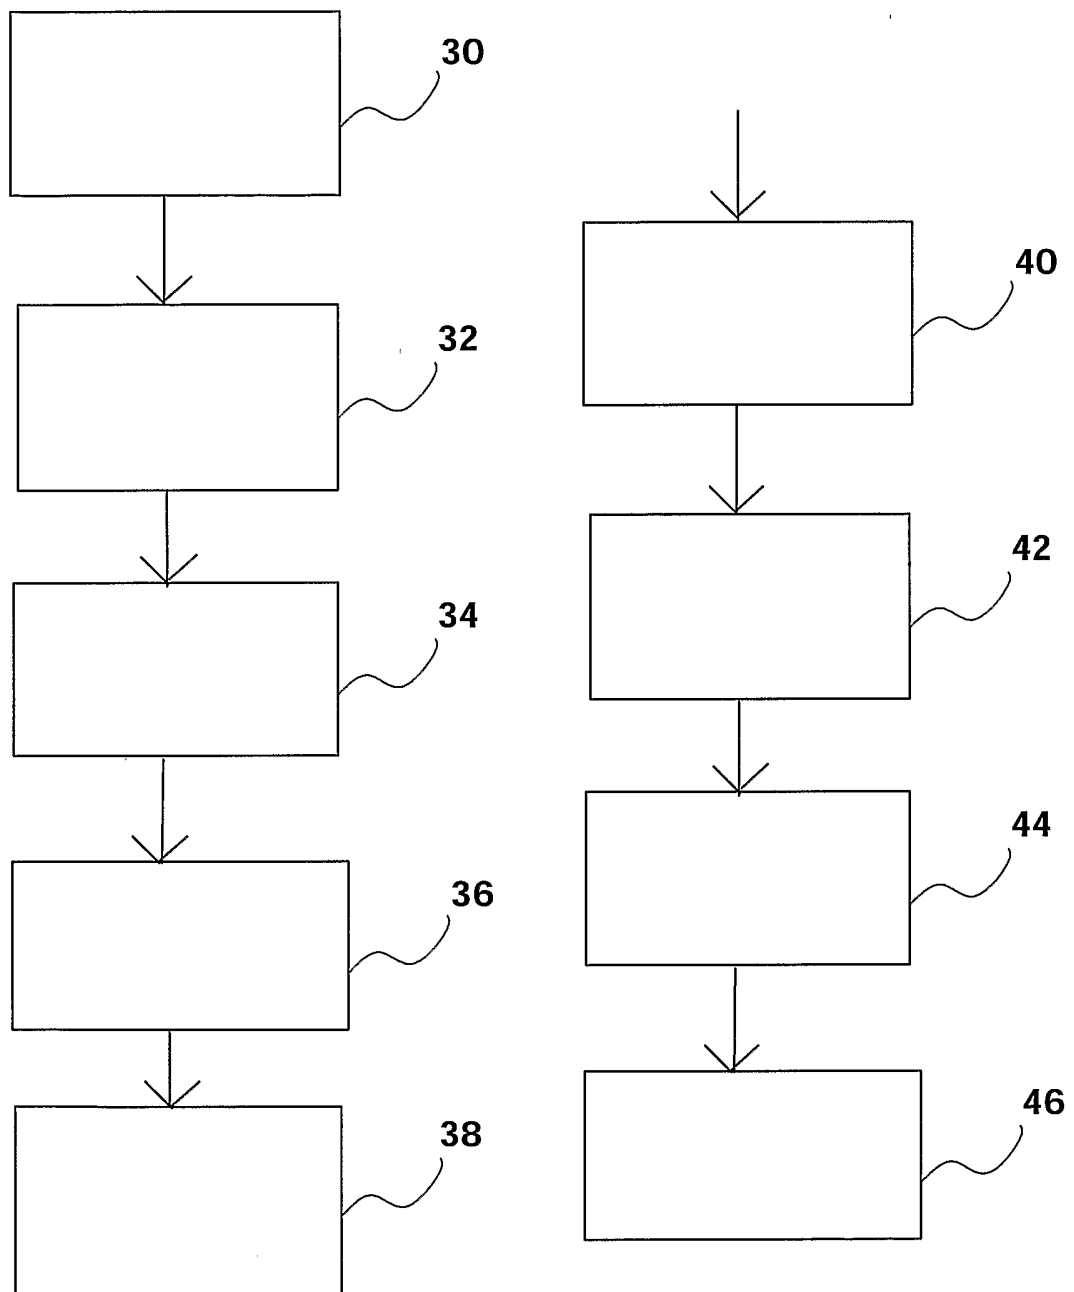


FIG. 6

6 / 14

**FIG. 7**

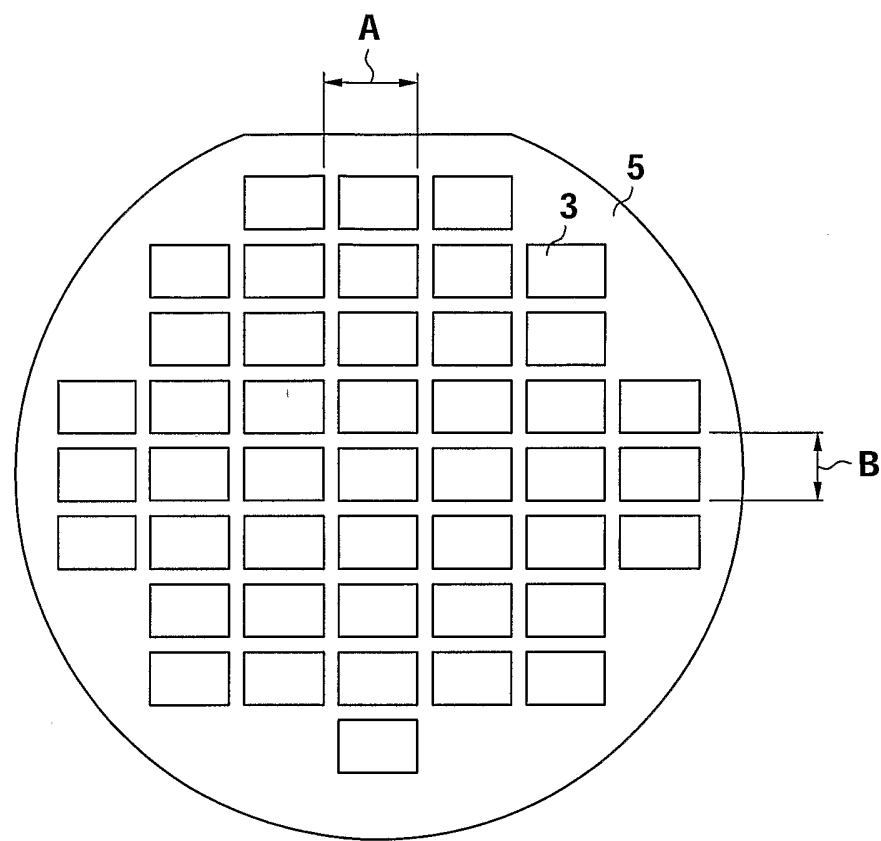


FIG. 8

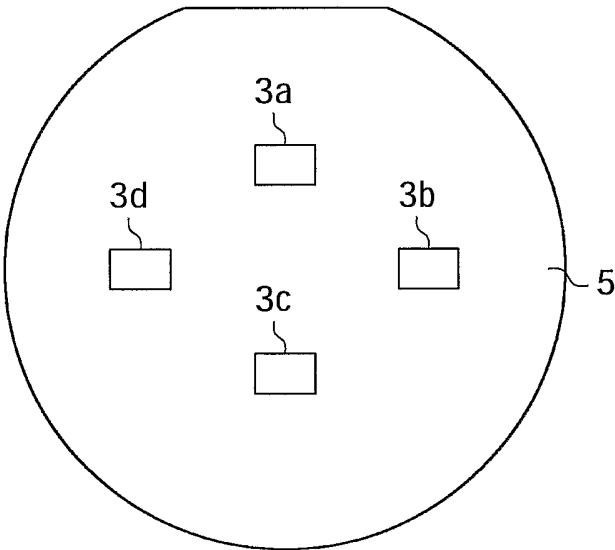


FIG. 9A

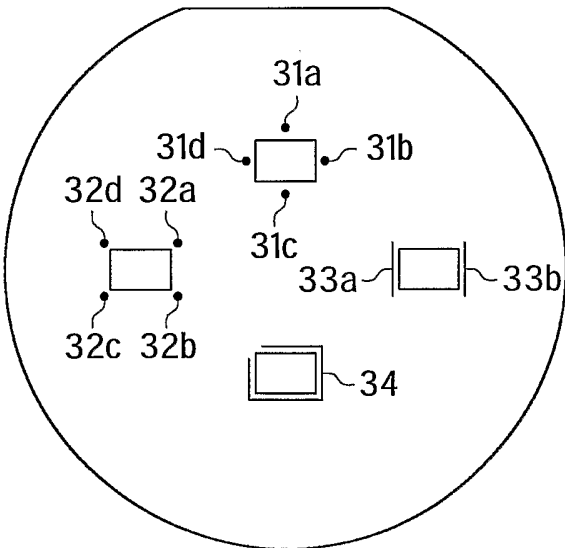


FIG. 9B

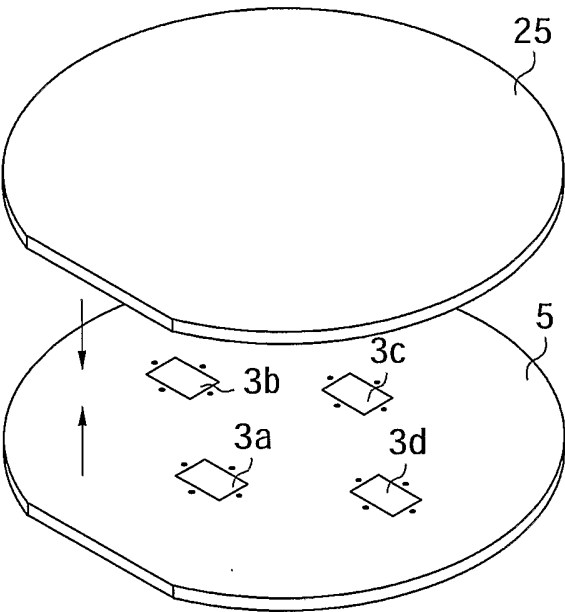


FIG. 9C

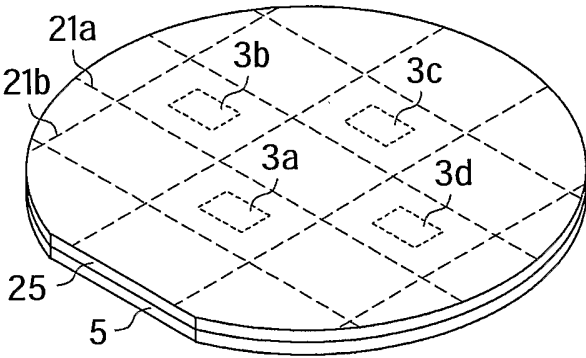


FIG. 9D

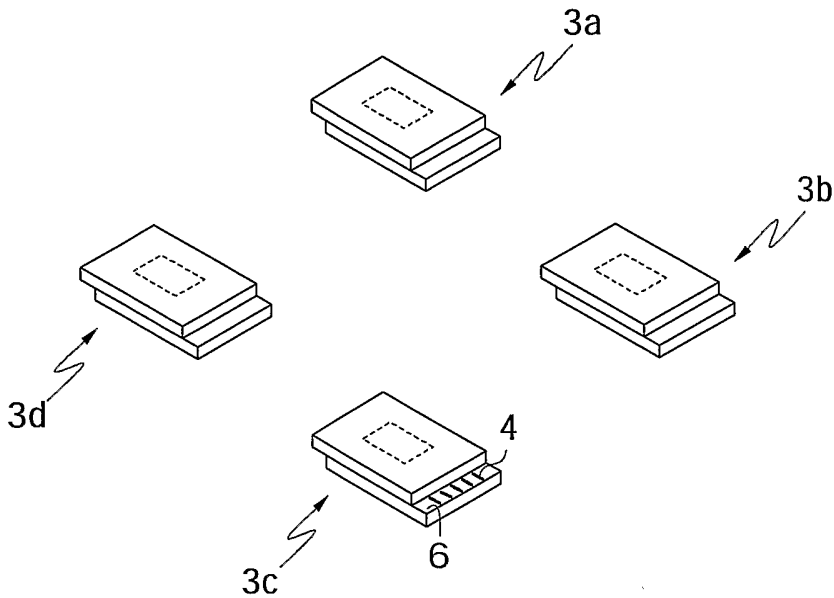


FIG. 9E

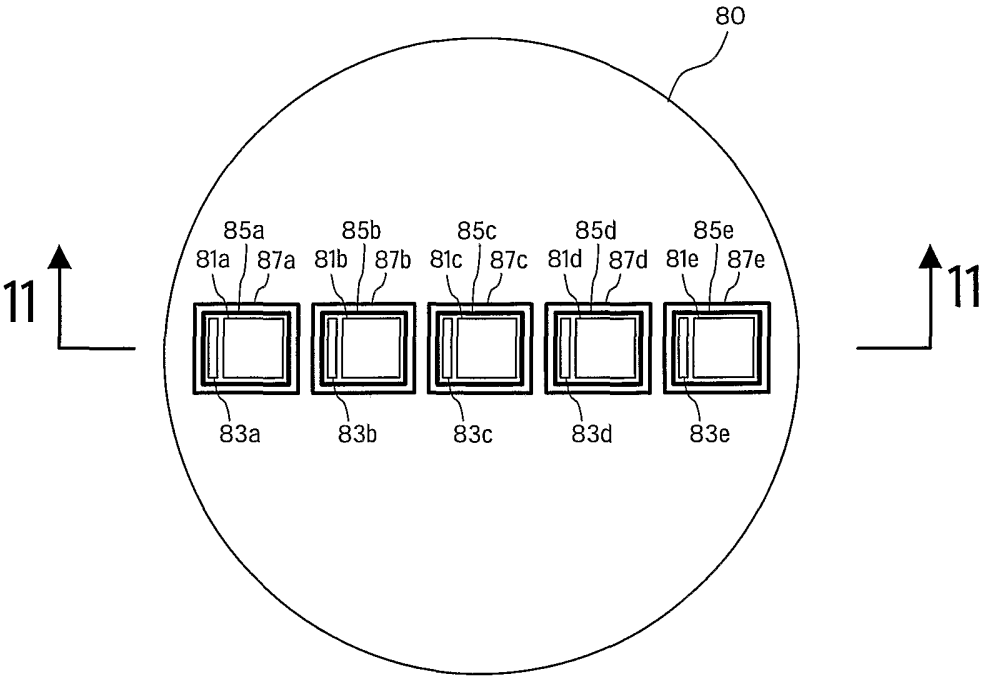


FIG. 10A

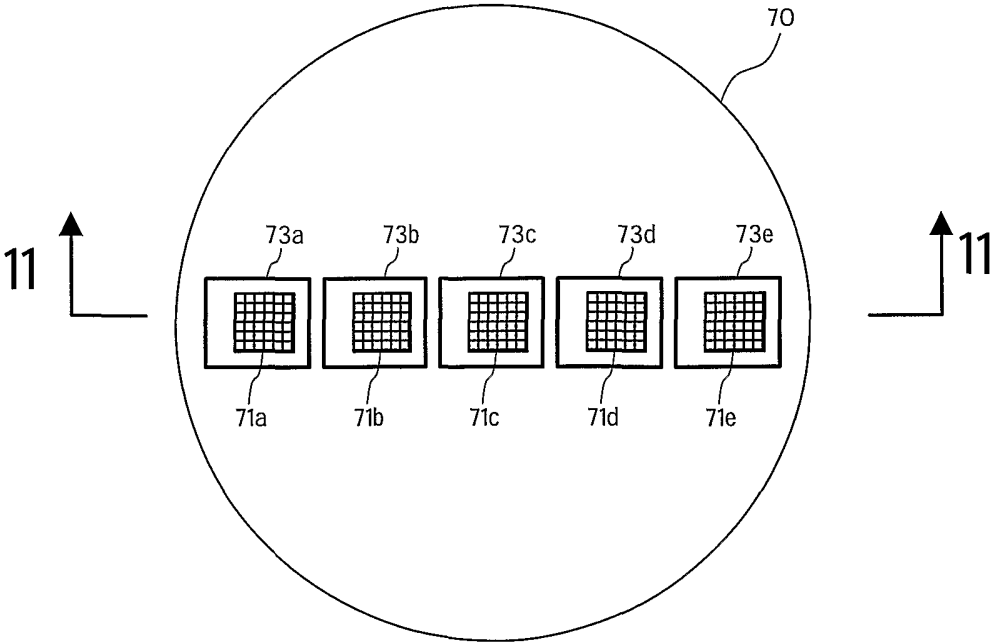


FIG. 10B

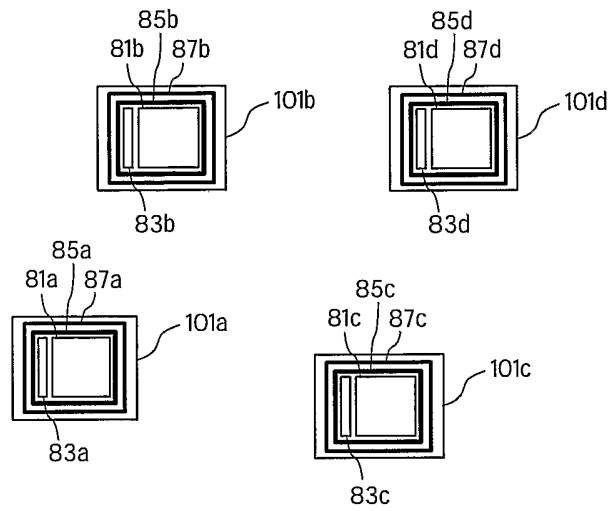


FIG. 10C

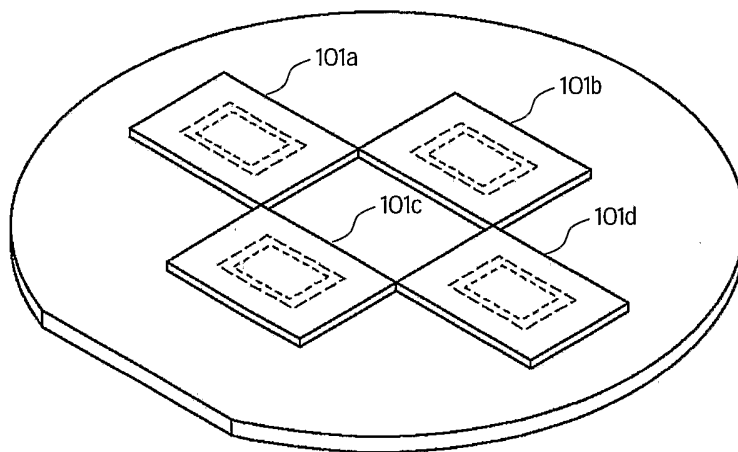


FIG. 10D

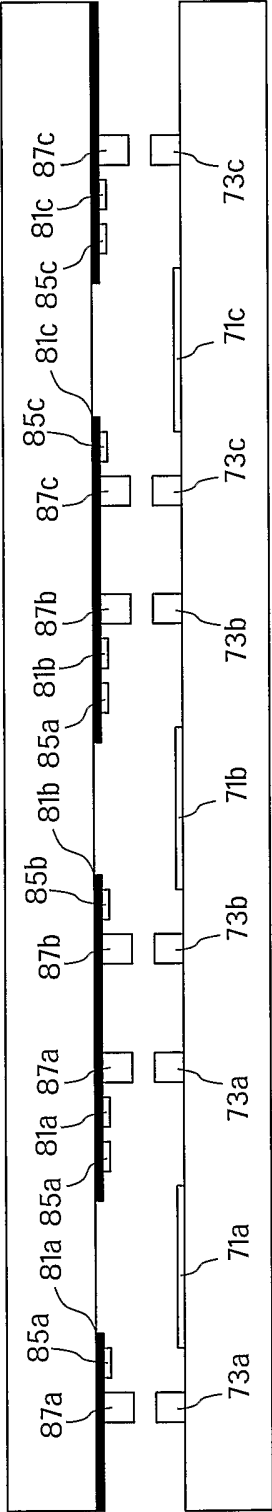


FIG. 11A

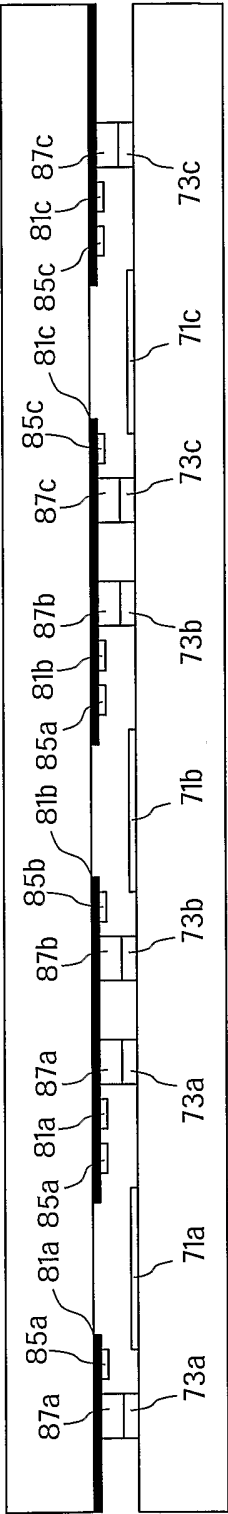


FIG. 11B

14 / 14

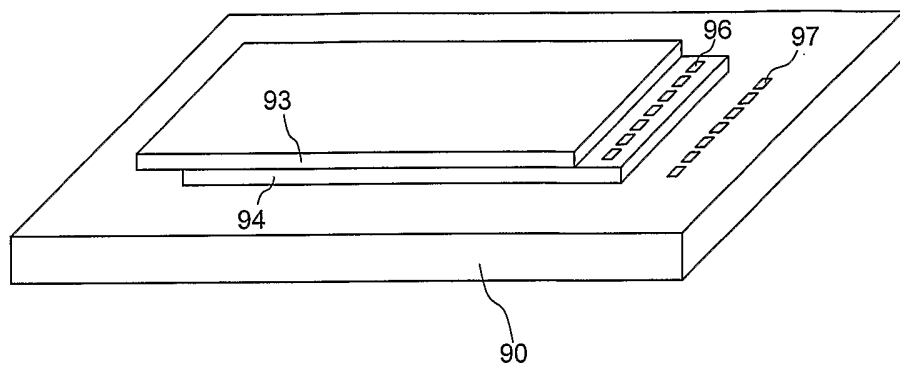


FIG. 12

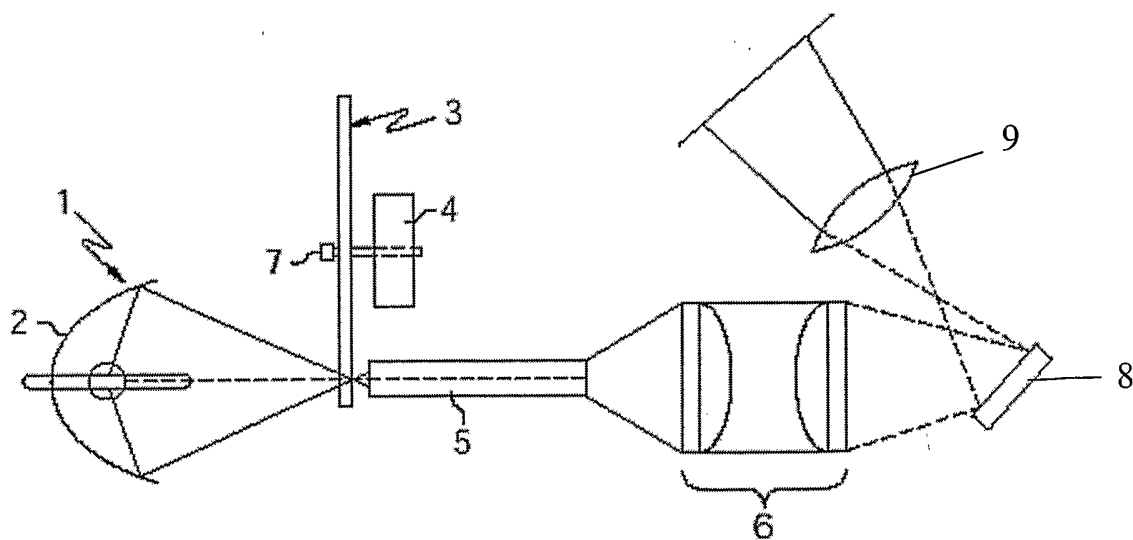


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/18741

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H01L 21/00, 21/30, 21/46, 23/02; G02B 26/00
US CL : 438/ 53, 456, 458; 359/290; 257/678

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
U.S. : 438/ 52, 53, 456, 458; 359/290, 291, 292; 257/678, 682

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2002/0117728 A1 (Brosnihhan et al.) 29 August 2002 (29.08.2002), Fig. 2a-2j, column 2, paragraph 25 - paragraph 35.	1-55, 106-148, 185-199 ----- 56-105, 149-184
Y, P	US 6,541,832 B2 (Coyle) 01 April 2003 (01.04.2003), Fig. 2.	1-199
X, E	US 2003/0161027 A1 (Kurosawa et al.) 28 August 2003 (28.08.2003), Fig. 9A-9D, paragraphs 97-119.	124-158, 185-199
X --- Y	US 6,459,523 B2 (Ueda) 01 October 2002 (01.10.2002), Fig. 11(a)-12(l), col. 9, line 50 - col. col. 11, line 60.	1-55, 106-158, 185-199 ----- 56-105, 159-184
A, P	US 2003/0047533 A1 (Reid et al.) 13 March 2003 (13.03.2003).	1-199
Y	US 2001/0048064 A1 (Kitani) 06 December 2001 (06.12.2001), Fig. 1, paragraphs 45-52.	1-199
Y	US 2001/0040675 A1 (True et al.) 15 November 2001 (15.11.2001), Fig. 8A-8B, claims 1-69.	1-199



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

11 September 2003 (11.09.2003)

Date of mailing of the international search report

06 NOV 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

John Niebling
Telephone No. 703-308-1782

INTERNATIONAL SEARCH REPORT

PCT/US03/18741

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2002/0063322 A1 (Robbins et al.) 30 May 2002 (30.05.2002), abstract.	56-105, 159-184
Y, P	US 2002/0180016 A1 (Shrauger) 05 December 2002 (05.12.2002), paragraph 36.	172-184.