



(86) Date de dépôt PCT/PCT Filing Date: 2004/10/29
(87) Date publication PCT/PCT Publication Date: 2005/05/12
(45) Date de délivrance/Issue Date: 2010/08/17
(85) Entrée phase nationale/National Entry: 2006/04/26
(86) N° demande PCT/PCT Application No.: US 2004/037987
(87) N° publication PCT/PCT Publication No.: 2005/043068
(30) Priorités/Priorities: 2003/10/31 (US60/516,443);
2004/10/26 (US10/973,679)


(51) Cl.Int./Int.Cl. *F41A 19/44* (2006.01)

(72) Inventeur/Inventor:
KEENEY, MICHAEL D., US

(73) Propriétaire/Owner:
RA BRANDS, L.L.C., US

(74) Agent: SIM & MCBURNEY

(54) Titre : INTERFACE DE GACHETTE/CHIEN A ROULEAU DESTINEE A DES ARMES A FEU
(54) Title: ROLLER SEAR/HAMMER INTERFACE FOR FIREARMS

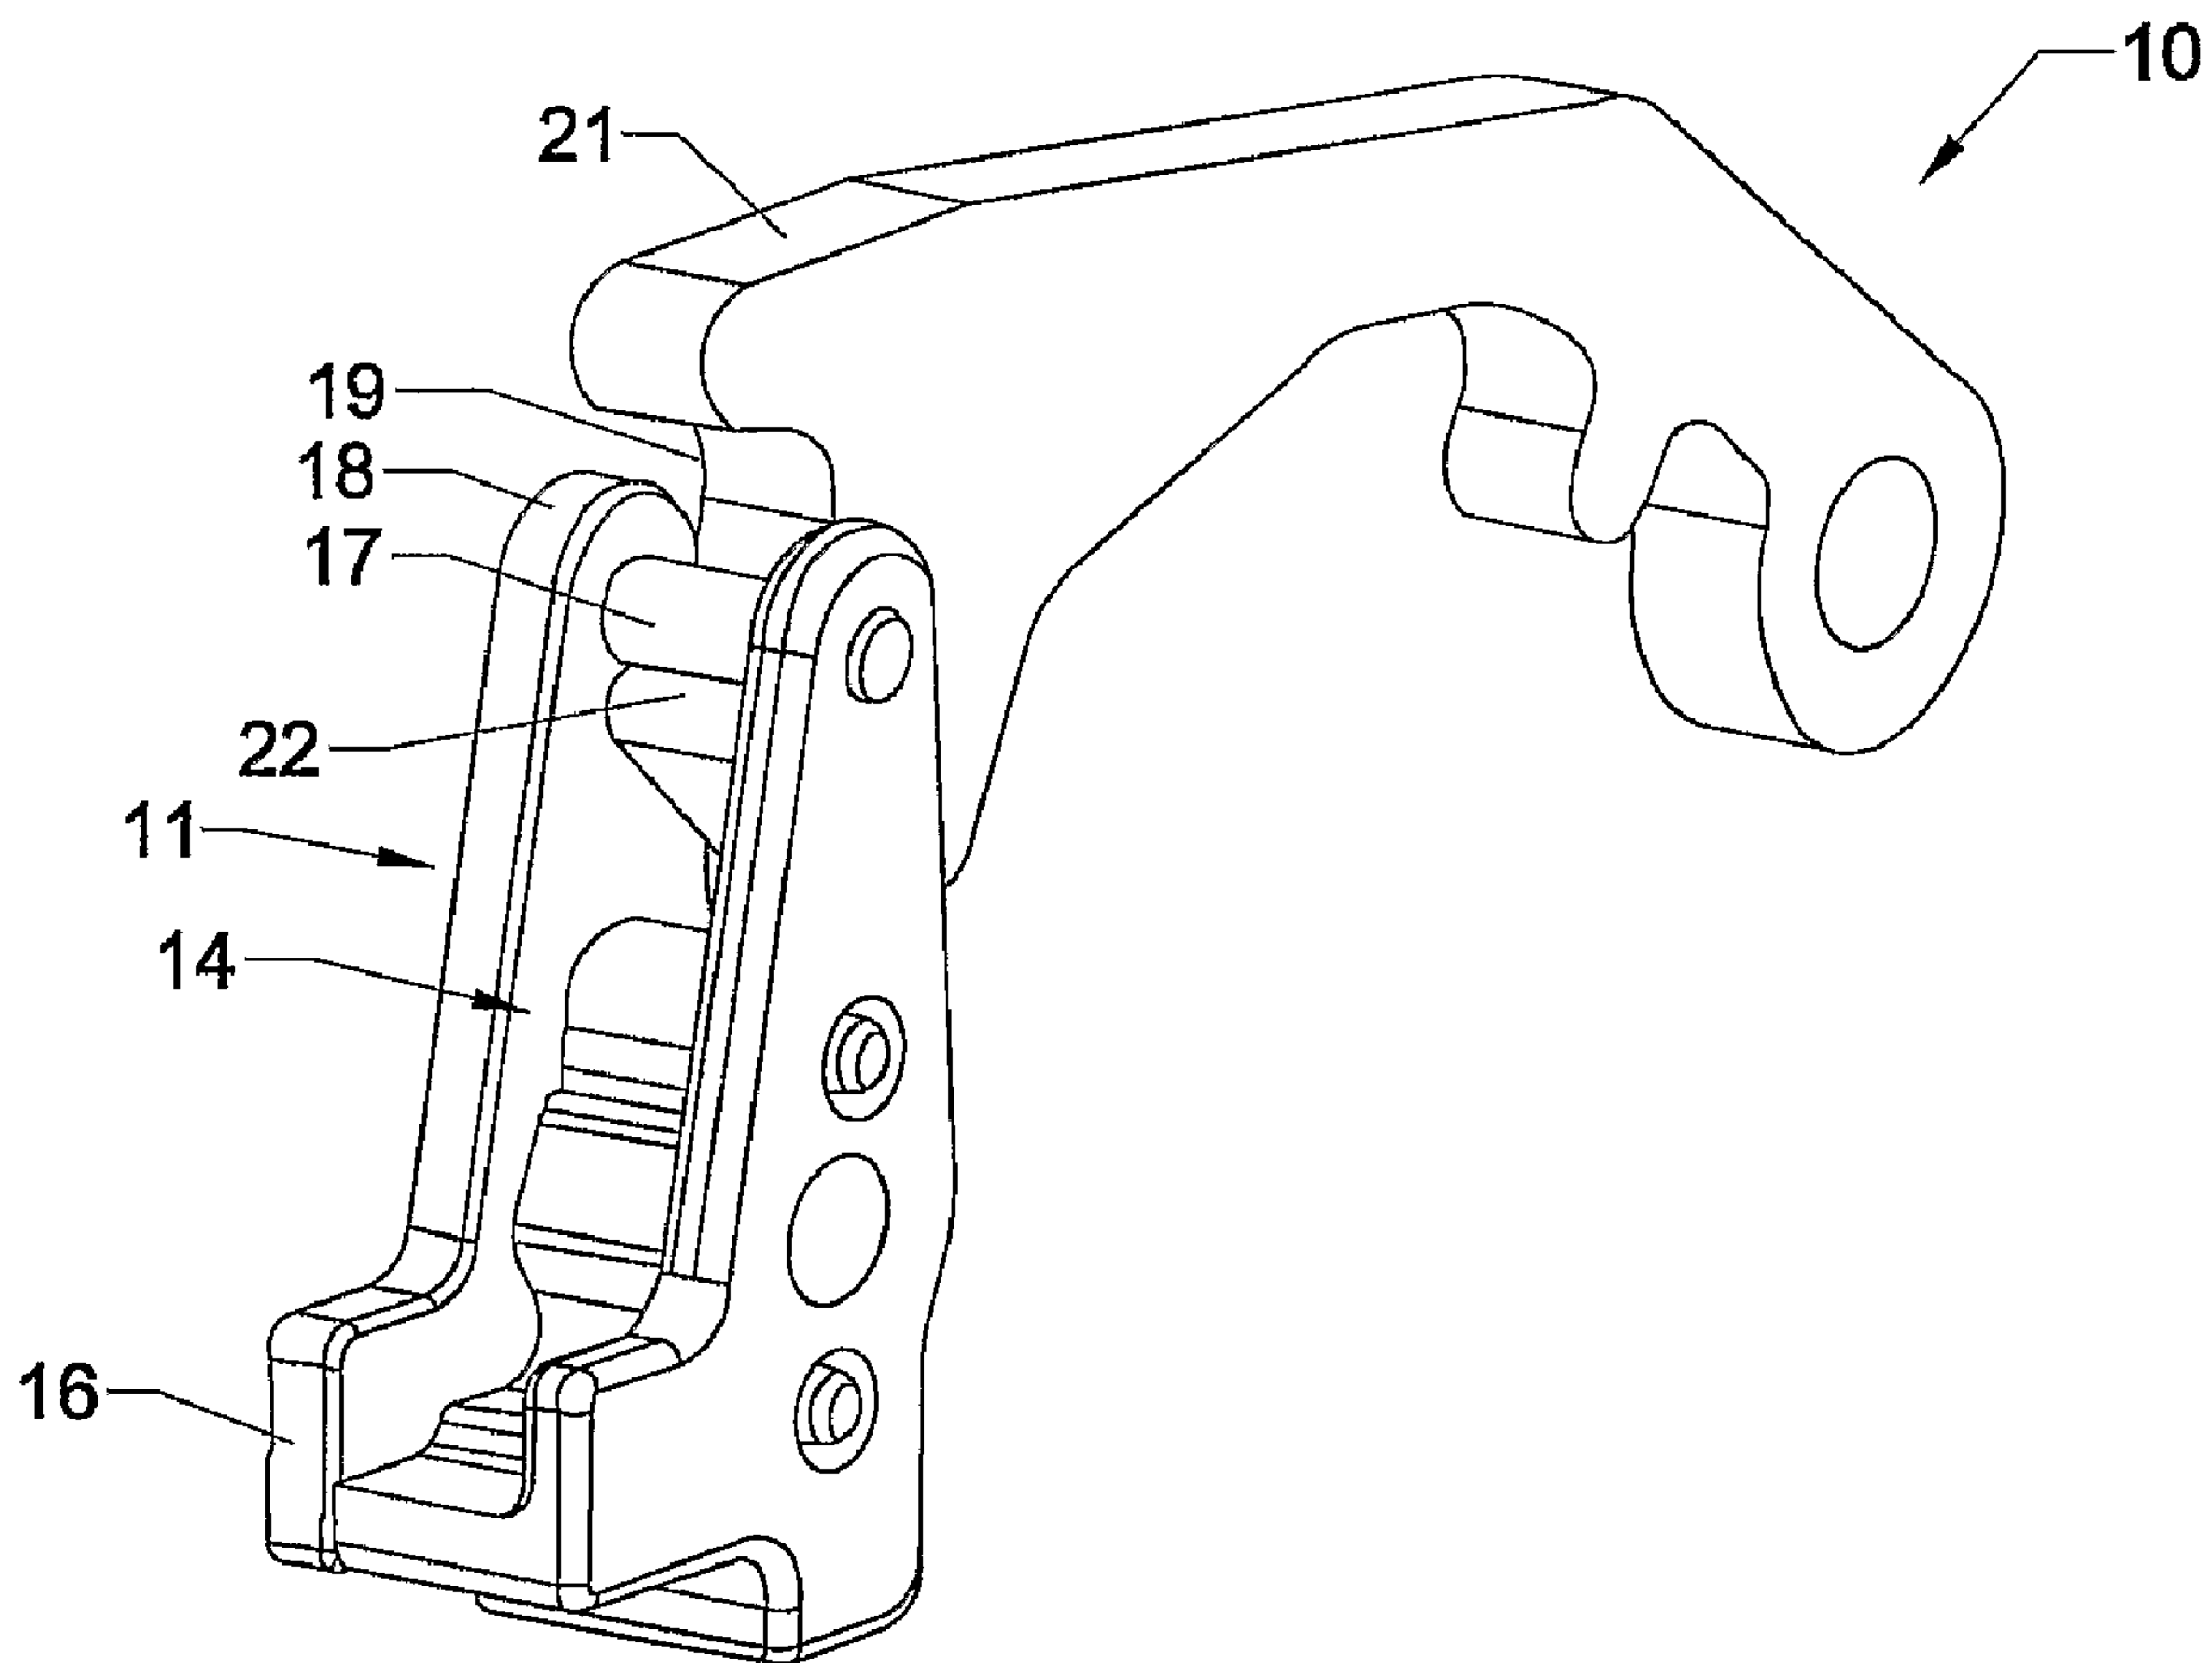

(57) Abrégé/Abstract:

A roller sear/hammer interface for a firearm. The sear (11) has a roller (17) rotatably mounted between two side plates (16) forming a portion of the sear body (14). As the trigger (13) is moved, a linkage (12) connecting the trigger (13) and sear (11) causes the

(57) **Abrégé(suite)/Abstract(continued):**

sear (11) to pivot rearward such that the roller (17) engages a notched surface (22) formed in the hammer (21). This rolling action releases the hammer (21) to strike a firing pin (24) to fire a round of ammunition. When the trigger (13) is released, the sear roller (17) rolls downward into an engaged and locked position within the notch (22) formed in the hammer (21).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/043068 A1

(51) International Patent Classification⁷: **F41A 19/44**

(21) International Application Number:
PCT/US2004/037987

(22) International Filing Date: 29 October 2004 (29.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/516,443 31 October 2003 (31.10.2003) US
10/973,679 26 October 2004 (26.10.2004) US

(71) Applicant (for all designated States except US): **RA BRANDS, L.L.C.** [US/US]; 870 Remington Drive, Madison, NC 27025-0700 (US).

(72) Inventor: **KEENEY, Michael, D.**; 6371 Salt River Road, Rineyville, KY 40162 (US).

(74) Agents: **TIMAR, John, J.** et al.; Womble Carlyle Sandridge & Rice, PLLC, P.O. Box 7037, Atlanta, GA 30357-0037 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

[Continued on next page]

(54) Title: ROLLER SEAR/HAMMER INTERFACE FOR FIREARMS

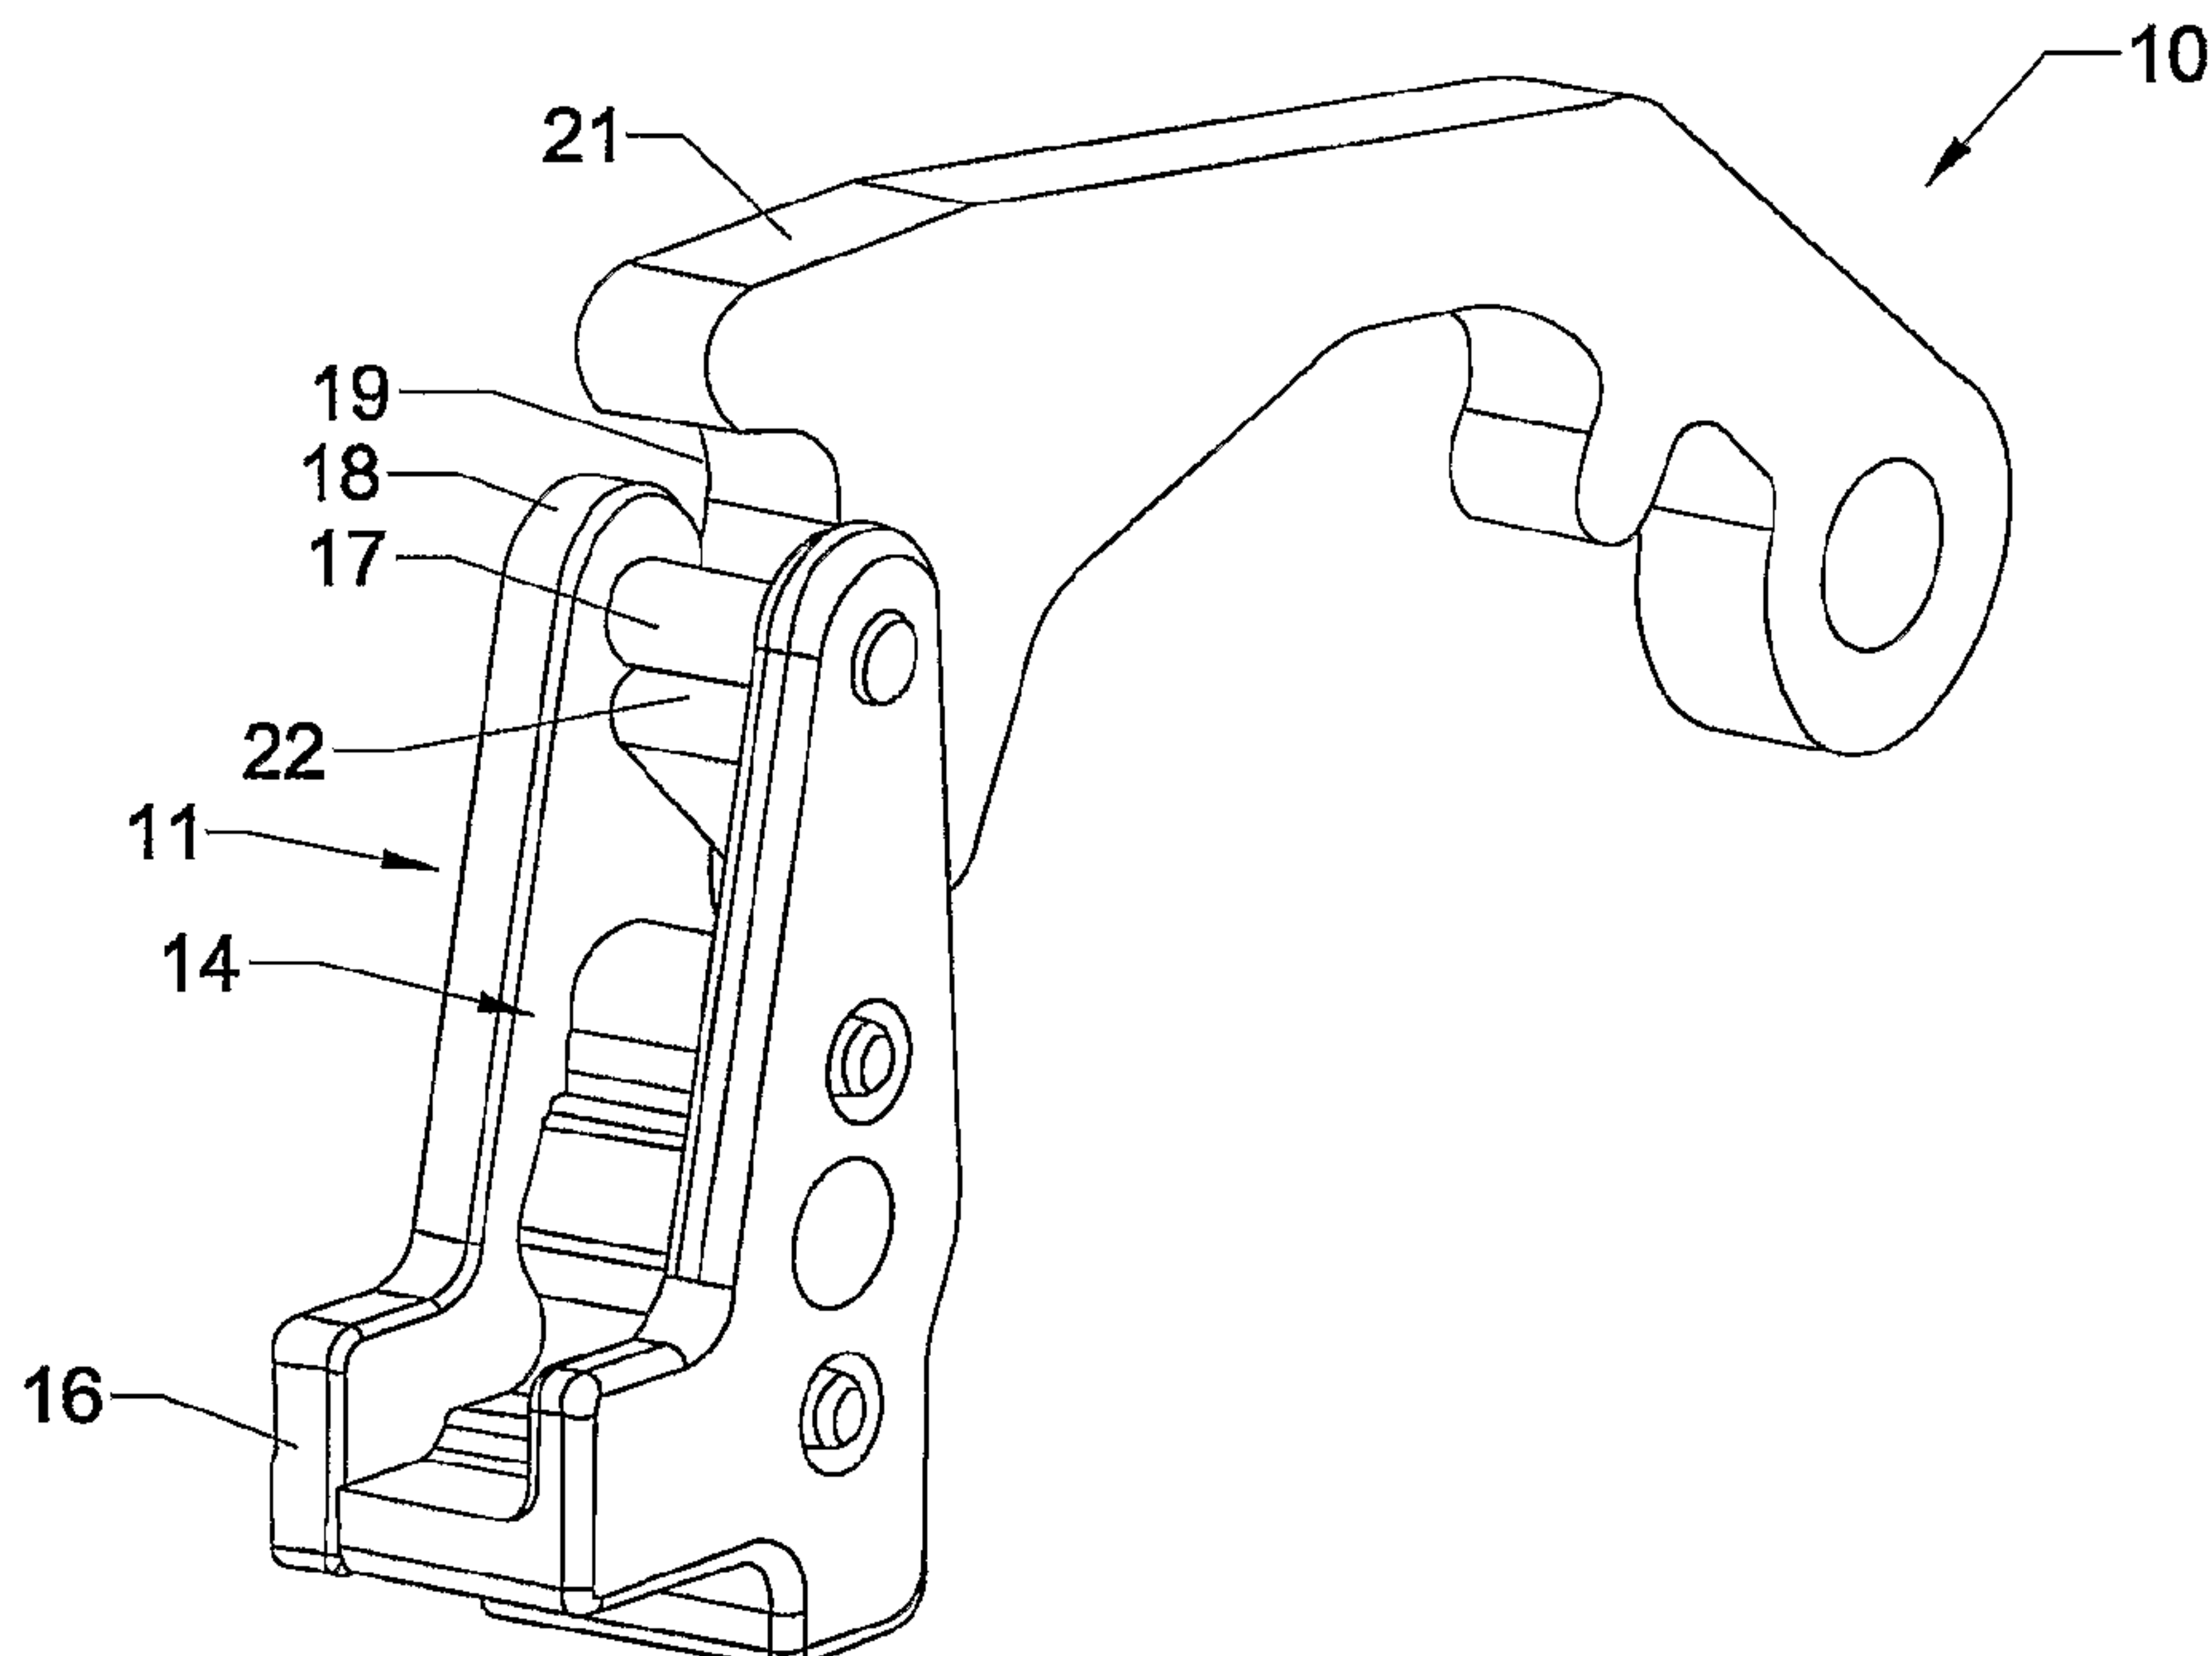

(57) Abstract: A roller sear/hammer interface for a firearm. The sear (11) has a roller (17) rotatably mounted between two side plates (16) forming a portion of the sear body (14). As the trigger (13) is moved, a linkage (12) connecting the trigger (13) and sear (11) causes the sear (11) to pivot rearward such that the roller (17) engages a notched surface (22) formed in the hammer (21). This rolling action releases the hammer (21) to strike a firing pin (24) to fire a round of ammunition. When the trigger (13) is released, the sear roller (17) rolls downward into an engaged and locked position within the notch (22) formed in the hammer (21).

WO 2005/043068 A1

WO 2005/043068 A1



— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.


Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

ROLLER SEAR/HAMMER INTERFACE FOR FIREARMS

Field of the Invention

[0002] The present invention generally relates to hammer driven firearm trigger assemblies, and in particular to a hammer/sear interface for hammer driven firearm trigger assemblies.

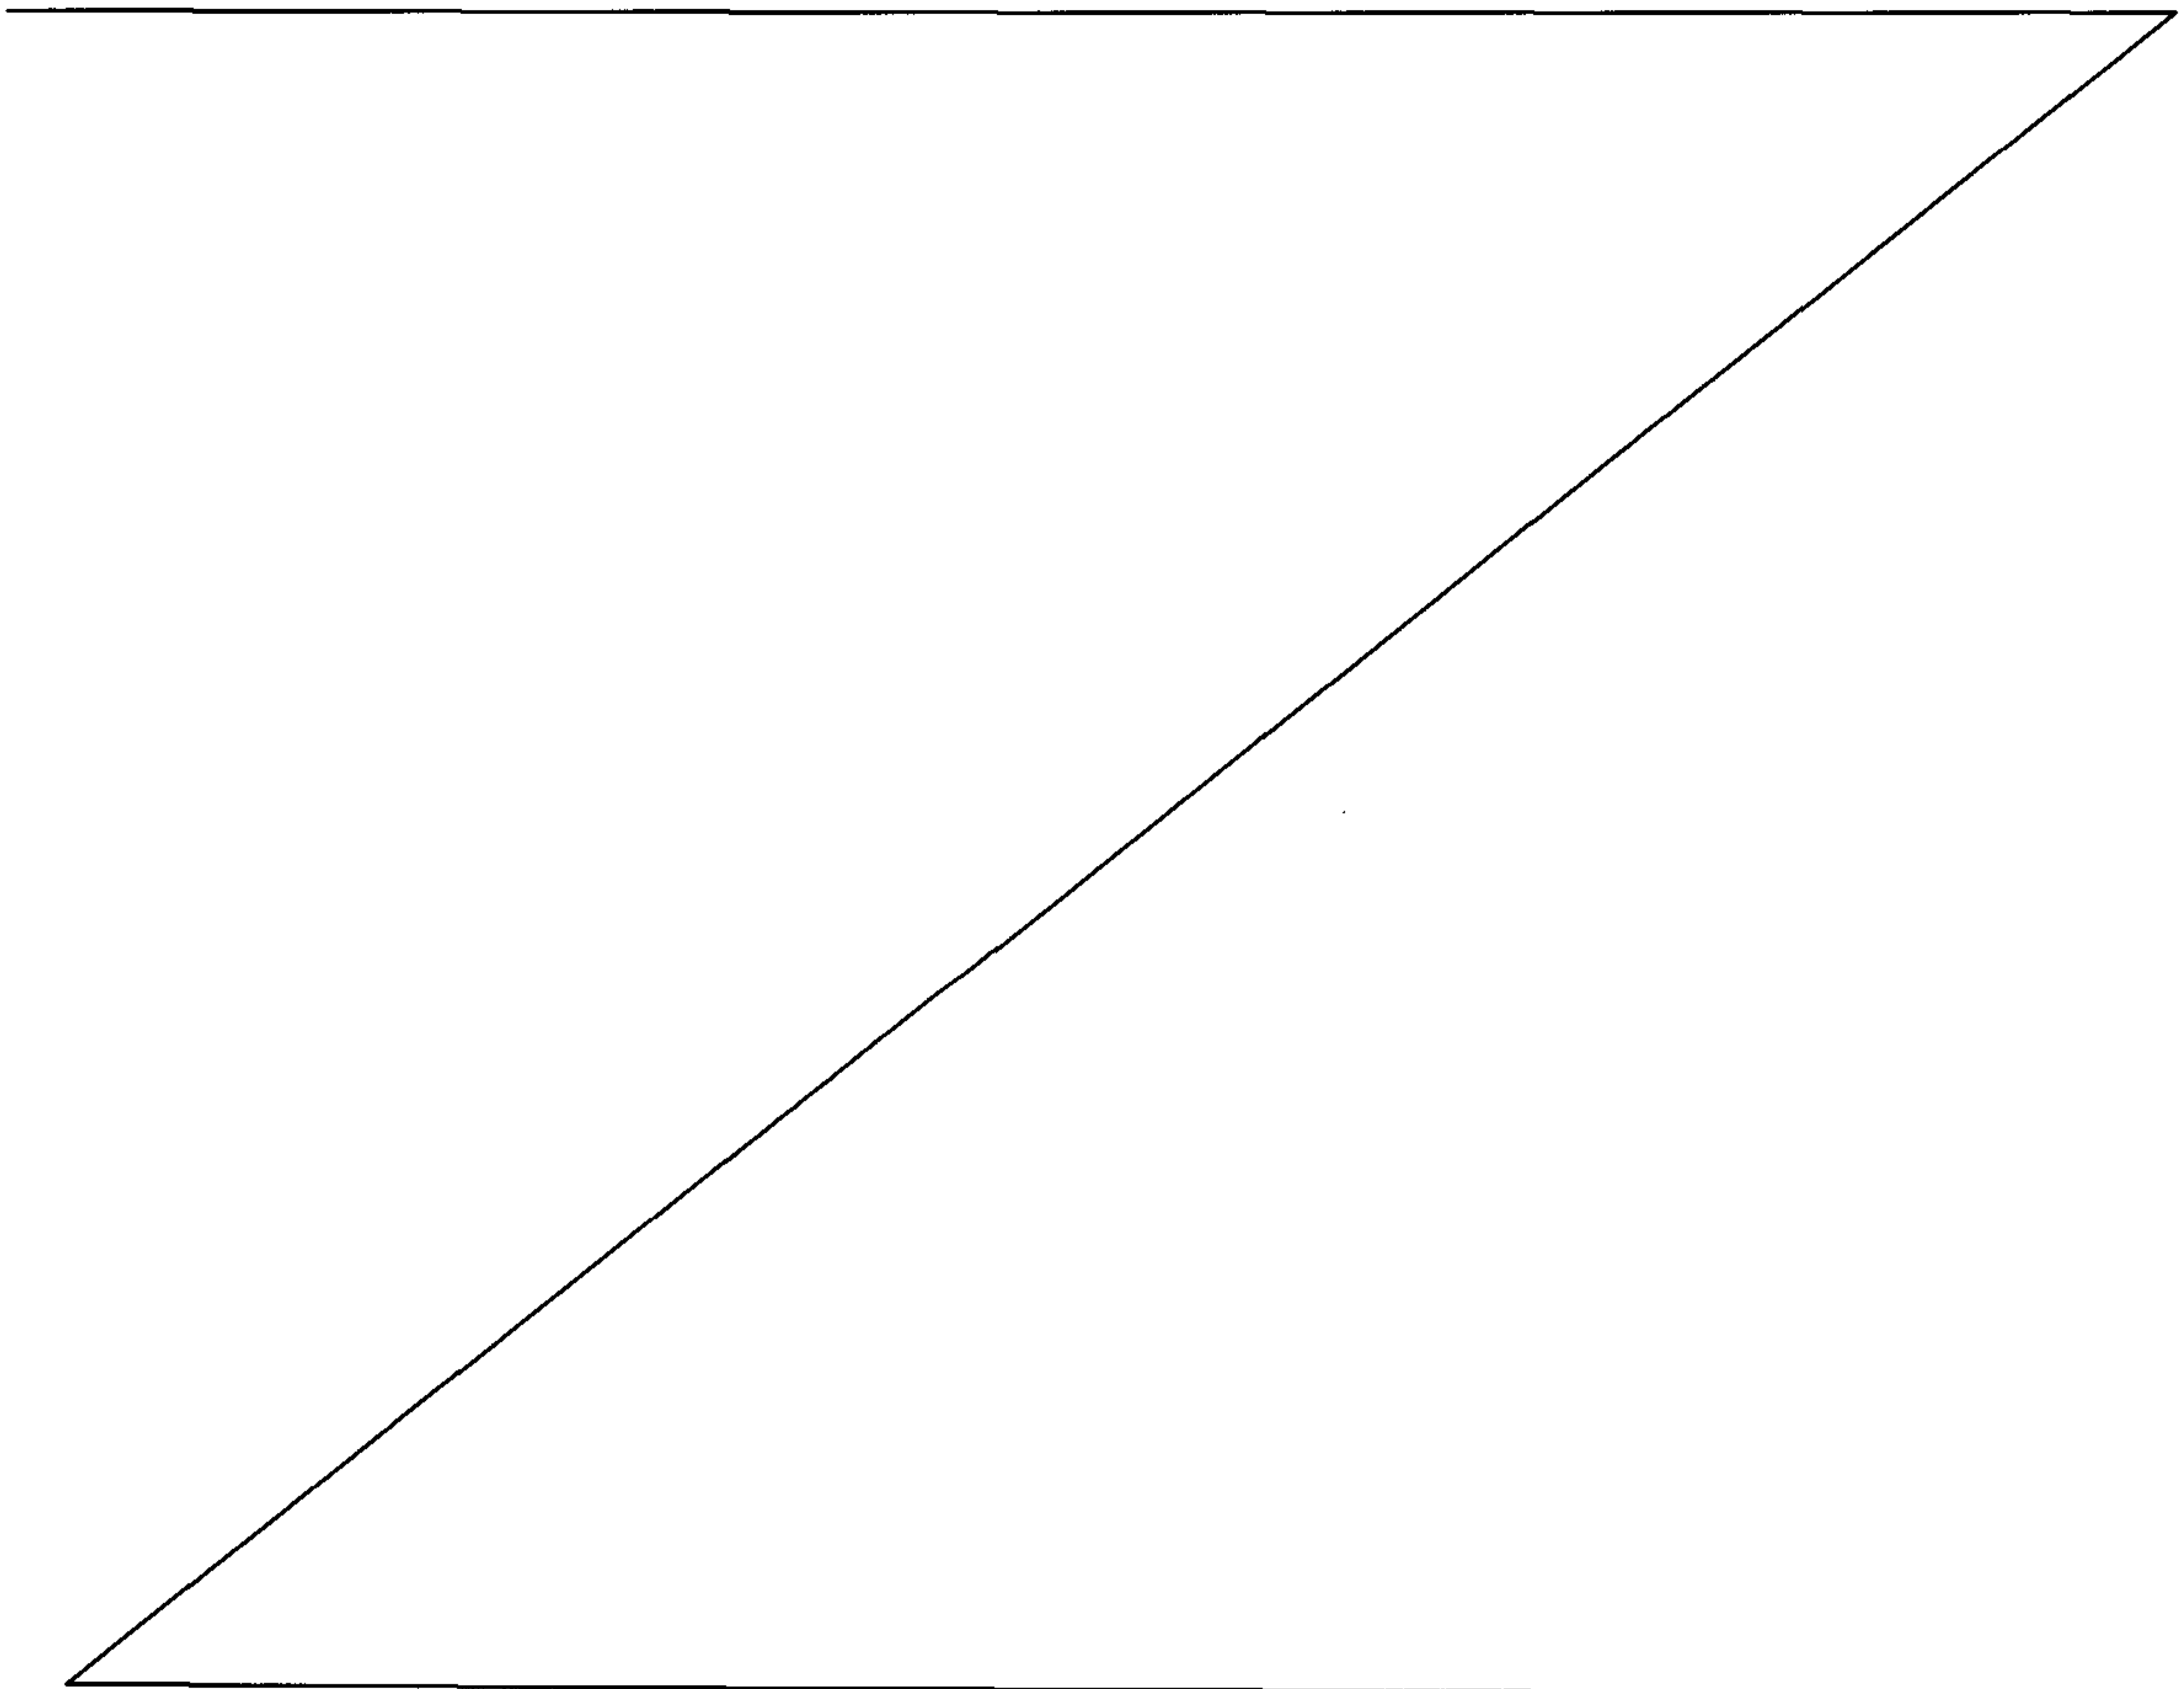

Background of the Invention

[0003] In hammer driven firearm trigger assemblies or fire control systems, such as for handguns, shotguns and various other types of long guns including lever action and semiautomatic rifles, the hammer of the firearm generally is held in a cocked position by a mechanical interface with a sear. The sear is connected either directly or through mechanical linkages to the trigger of the firearm. When the trigger is squeezed or moved rearward to fire a round of ammunition, the sear generally is moved out of locking engagement with the hammer so as to release the hammer. The hammer then is pivoted into contact with a firing pin of the firearm by a hammer spring. The engagement of the firing pin by the hammer causes the firing pin to strike a round of ammunition in the chamber of the firearm to initiate the firing of a round of ammunition.

[0004] Fig. 1 generally illustrates a conventional hammer sear interface in which the sear 2 includes a notched, hooked portion 6 that engages a corresponding notch or hook 8 formed in the rear hammer 4. Due to the sliding nature of this mechanical interface, the sear 2 and hammer 4 generally must be precisely machined so as to provide and ensure smooth and even surfaces on both the hammer and sear, so as to provide a smooth and crisp trigger feel during shooting to avoid catching or hesitation during firing, which can lead to misfires and affect the aim of the shooter. In addition, it is also important for hammer/sear interfaces that upon a partial trigger pull, i.e., where the sear 2 is partially rotated but does not release the hammer 4, the two components must be returned to full engagement upon release of the trigger to prevent inadvertent discharge of the firearm. The criticality of the components returning to full engagement upon release of the trigger

thus further requires that the geometry and surface finishes of the hammer 4 and sear 2 be carefully and precisely machined and finished, such that the hammer and sear will regain full engagement in such a situation in which the trigger is released after a partial trigger pull without firing. Such precise and careful machining of these components, however, generally is more expensive and requires significant quality control and review to ensure that such parts are precisely machined to within specific, narrow ranges of tolerances necessary to provide a smooth interface and function.

[0005] Accordingly, it can be seen that a need exists for a new hammer/sear interface for hammer driven firearm trigger assemblies that addresses the foregoing and other related and unrelated problems in the art.

Summary of the Invention

[0006] The present invention is directed to a roller sear/hammer interface for a firearm. In an exemplary embodiment, the sear has a roller rotatably mounted between two side plates forming a portion of the sear body. As the trigger is moved, a linkage connecting the trigger and sear causes the sear to pivot rearward such that the roller rolls along a notched surface formed in the hammer. This rolling action releases the hammer to strike a firing pin to fire a round of ammunition. Following the firing of the round of ammunition, the hammer is returned to the fully cocked position, after which the sear roller rolls downward into an engaged and locked position within the notch formed in the hammer.

[0007] In one aspect of the invention, a sear mechanism is provided for use in a hammer-driven firearm trigger assembly. The sear mechanism includes a body portion including a pair of opposed side plates; and a roller mounted between the side plates at an upper end

of the side plates. The surface of the roller rolls along a notched surface formed in the hammer when a trigger is moved to release the hammer and strike the firing pin. The surface of the roller rolls along the notched surface in the opposite direction when the trigger is released.

[0008] In another aspect of the invention, a sear-hammer interface is provided for a firearm trigger assembly. The sear-hammer interface includes a hammer having a roller receiving notch formed along a rear surface; and a sear connected to the trigger assembly so as to pivot rearward in response to movement of a trigger. The sear has a roller mounted between a pair of opposed side plates. The roller rolls along an engaging surface of the notch formed in the hammer when the trigger is moved to release the hammer.

In accordance with an aspect of the present invention, there is provided a firearm, comprising:

a trigger;

a firing pin adapted to engage and fire a round of ammunition;

a sear connected to the trigger by a linkage so as to pivot rearward in response to movement of the trigger and having a roller rotatably mounted thereto; and

a hammer having a roller receiving notch formed along a rear side thereof; and

wherein the roller of the sear rolls along an engaging surface of the notch formed in the hammer when the trigger is moved to release the hammer to strike the firing pin to fire the round of ammunition.

In accordance with another aspect of the present invention, there is provided a sear mechanism for use in a hammer-driven firearm trigger assembly, comprising:

a body portion including a pair of opposed side plates;

a roller mounted between the side plates at an upper end of the side plates, wherein a surface of the roller rolls along a notched surface formed in the hammer when a trigger is moved to release the hammer and rolls along the notched surface in the opposite direction when the trigger is released.

In accordance with another aspect of the present invention, there is provided a sear-hammer interface for a firearm trigger assembly comprising:

a hammer having a roller receiving notch formed along a rear surface;

and

a sear connected to the trigger assembly so as to pivot rearward in response to movement of a trigger, the sear having a roller mounted between a pair of opposed side plates; and wherein the roller rolls along an engaging surface of the notch formed in the hammer when the trigger is moved to release the hammer.

Brief Description of the Drawings

[0009] The invention is better understood by reading the following detailed description of the invention in conjunction with the accompanying drawings.

[0010] Fig. 1 is a side elevation view of a conventional hammer/sear interface.

[0011] Fig. 2 is a perspective illustration of the roller sear/hammer interface of the present invention.

[0012] Fig. 3 is a side elevation view of the roller sear/hammer interface of the present invention with portions broken away for clarity.

[0013] Fig. 4 is a schematic illustration of a hammer driven fire control or trigger assembly utilizing the roller sear/hammer interface of the present invention.

[0014] Fig. 5 is a side elevation view illustrating an example of the fire control trigger assembly utilizing the roller sear/hammer interface of the present invention mounted in a firearm.

Description of the Invention

[0015] The following description of the invention is provided as an enabling teaching of the invention in its best, currently known embodiment. Those skilled in the relevant art will recognize that many changes can be made to the embodiments described, while still obtaining the beneficial results of the present invention. It will also be apparent that some of the desired benefits of the present invention can be obtained by selecting some of the features of the present invention without utilizing other features. Accordingly, those who work in the art will recognize that many modifications and adaptations to the present invention are possible and may even be desirable in certain circumstances and are a part of the present invention. Thus, the following description is provided as illustrative of the principles of the present invention and not in limitation thereof, since the scope of the present invention is defined by the claims.

[0016] The present invention generally is directed to an improved hammer/sear interface 10 (Figs. 2 and 3) for hammer driven trigger assemblies or fire control systems T (Figs. 4 and 5) of firearms F (Fig. 5) such as various types of long guns, including shotguns and rifles, handguns, and other types of firearms utilizing hammer driven trigger assemblies or fire control systems for firing rounds of ammunition therefrom. The present invention is further directed to providing a smoother and crisper trigger feel during operation of the

hammer driven trigger assembly without requiring extensive surface finishing and precision milling or forming operations of the sear and hammer and the interface therebetween as is typically required with conventional hammer/sear interfaces for conventional hammer driven firearm trigger assemblies or fire control systems.

[0017] As generally illustrated in Figs. 2 – 5, the improved hammer/sear interface 10 of the present invention generally includes a sear 11 connected via a mechanical linkage 12 (Figs. 4 and 5) to a trigger 13 of a firearm trigger assembly or fire control. As shown in Fig. 2, the roller sear 11 of the present invention generally includes a body portion 14, having a pair of opposed side plates 16, each typically formed from a metal such as steel or other durable, high strength materials and attached together via fasteners such as rivets, bolts or other similar fastening mechanisms. Alternatively, the body 14 can be stamped, milled, metal injection molded, or otherwise formed as a single, unitary piece or component. A roller or linear bearing 17 is rotatably mounted between the side plates at the upper ends 18 thereof so as to rotate upon movement of the sear 11 in response to movement of the trigger 13 of the firearm as indicated in Figs. 4 and 5. As further shown in Figs. 2 and 3, the roller or linear bearing 17 engages and rests in a notch 19 formed in a rear portion of a hammer 21 so as to engage and lock the hammer 21 in a cocked or ready position.

[0018] As indicated in Figs. 4 and 5, as the trigger 13 is moved or pulled rearward, it will cause the linkage 12 between the trigger and the sear 11 to be moved forwardly, in turn causing the sear 11 of the present invention to be pivoted rearwardly. As the sear pivots rearward, the roller or linear bearing 17 will roll along the angled rearward surface 22 of

the notch 19 formed in the hammer 21 so as to release the hammer from engagement by the sear. As the hammer is released, it will be urged forwardly by a hammer spring (not shown) and will strike the rearward end 23 of the firing pin 24 of the firearm, causing the firing pin to be moved forwardly and strike the primer of a round of ammunition (not shown) loaded within the chamber of the firearm to fire the round. Thereafter, as the hammer is moved back to its cocked, ready to fire position, upon release of the trigger, the roller 17 of the sear 11 again will be engaged by and roll downwardly into a fully engaged and locked position within the notch 19 of the hammer 21.

[0019] Accordingly, the roller sear/hammer interface of the present invention enables/allows greater tolerances in the machining of the hammer and sear, and the surface finishes thereof, than generally are required to form conventional sear and hammer components for a hammer driven trigger assembly or fire control system for firearms. The roller action of the present invention further generally will ensure a smooth rolling engagement as opposed to the frictional sliding engagement of conventional hammer/sear interfaces. Further, if the sear is subjected to a partial trigger pull and release, the roller design of the present invention also generally will regain its engaged and locked position with the hammer with less hesitancy, due to the reduced frictional aspects of the roller sear/hammer interface of the present invention.

[0020] It will be further understood by those skilled in the art that while the foregoing has been disclosed above with respect to preferred embodiments or features, various additions, changes, and modifications can be made to the foregoing invention without departing from the spirit and scope of thereof.

What is Claimed is:

1. A firearm, comprising:
 - a trigger;
 - a firing pin adapted to engage and fire a round of ammunition;
 - a sear connected to the trigger by a linkage so as to pivot rearward in response to movement of the trigger and having a roller rotatably mounted thereto; and
 - a hammer having a roller receiving notch formed along a rear side thereof; andwherein the roller of the sear rolls along an engaging surface of the notch formed in the hammer when the trigger is moved to release the hammer to strike the firing pin to fire the round of ammunition.
2. The firearm of claim 1 wherein the sear further comprises a pair of opposed side plates, the roller mounted between the side plates at an upper end.
3. The firearm of claim 1 wherein the engaging surface of the notch is angled rearward.
4. The firearm of claim 1 wherein the roller rolls downward into a fully engaged and locked position within the notch of the hammer when the trigger is released.
5. The firearm of claim 1 wherein the roller rolls downward along the notch of the hammer to return into an engaged and locked position when the trigger is partially pulled and released before the sear releases the hammer.

6. A sear mechanism for use in a hammer-driven firearm trigger assembly, comprising:
 - a body portion including a pair of opposed side plates;
 - a roller mounted between the side plates at an upper end of the side plates, wherein a surface of the roller rolls along a notched surface formed in the hammer when a trigger is moved to release the hammer and rolls along the notched surface in the opposite direction when the trigger is released.
7. The sear mechanism of claim 6 wherein the sear mechanism is connected to the trigger by a mechanical linkage that causes the sear mechanism to pivot rearward when the trigger is moved to release the hammer.
8. The sear mechanism of claim 6 wherein the roller rolls downward along the notch of the hammer to return into an engaged and locked position when the trigger is partially pulled and released.
9. The sear mechanism of claim 6 wherein the opposed side plates are connected by fasteners.
10. The sear mechanism of claim 6 wherein the opposed side plates are formed from a high strength material.
11. The sear mechanism of claim 6 wherein the body portion can be formed by any one of a stamping, a milling or an injection molding process.

12. A sear-hammer interface for a firearm trigger assembly comprising:
 - a hammer having a roller receiving notch formed along a rear surface; and
 - a sear connected to the trigger assembly so as to pivot rearward in response to movement of a trigger, the sear having a roller mounted between a pair of opposed side plates; and wherein the roller rolls along an engaging surface of the notch formed in the hammer when the trigger is moved to release the hammer.
13. The sear-hammer interface of claim 12 wherein the roller is mounted between the side plates at an upper end of each plate.
14. The sear-hammer interface of claim 12 wherein the engaging surface of the notch is angular.
15. The sear-hammer interface of claim 12 wherein the roller rolls downward into an engaged and locked position within the notch of the hammer when the trigger is released.
16. The sear-hammer interface of claim 12 wherein the roller rolls downward along the notch of the hammer to return to an engaged and locked position when the trigger is partially pulled and released before the sear releases the hammer.

17. The sear-hammer interface of claim 12 wherein the trigger assembly comprises the trigger and a mechanical linkage that couples the sear to the trigger.
18. The sear-hammer interface of claim 12 wherein the mechanical linkage causes the sear to pivot rearward with the roller engaging the notch to release the hammer when the trigger is moved.

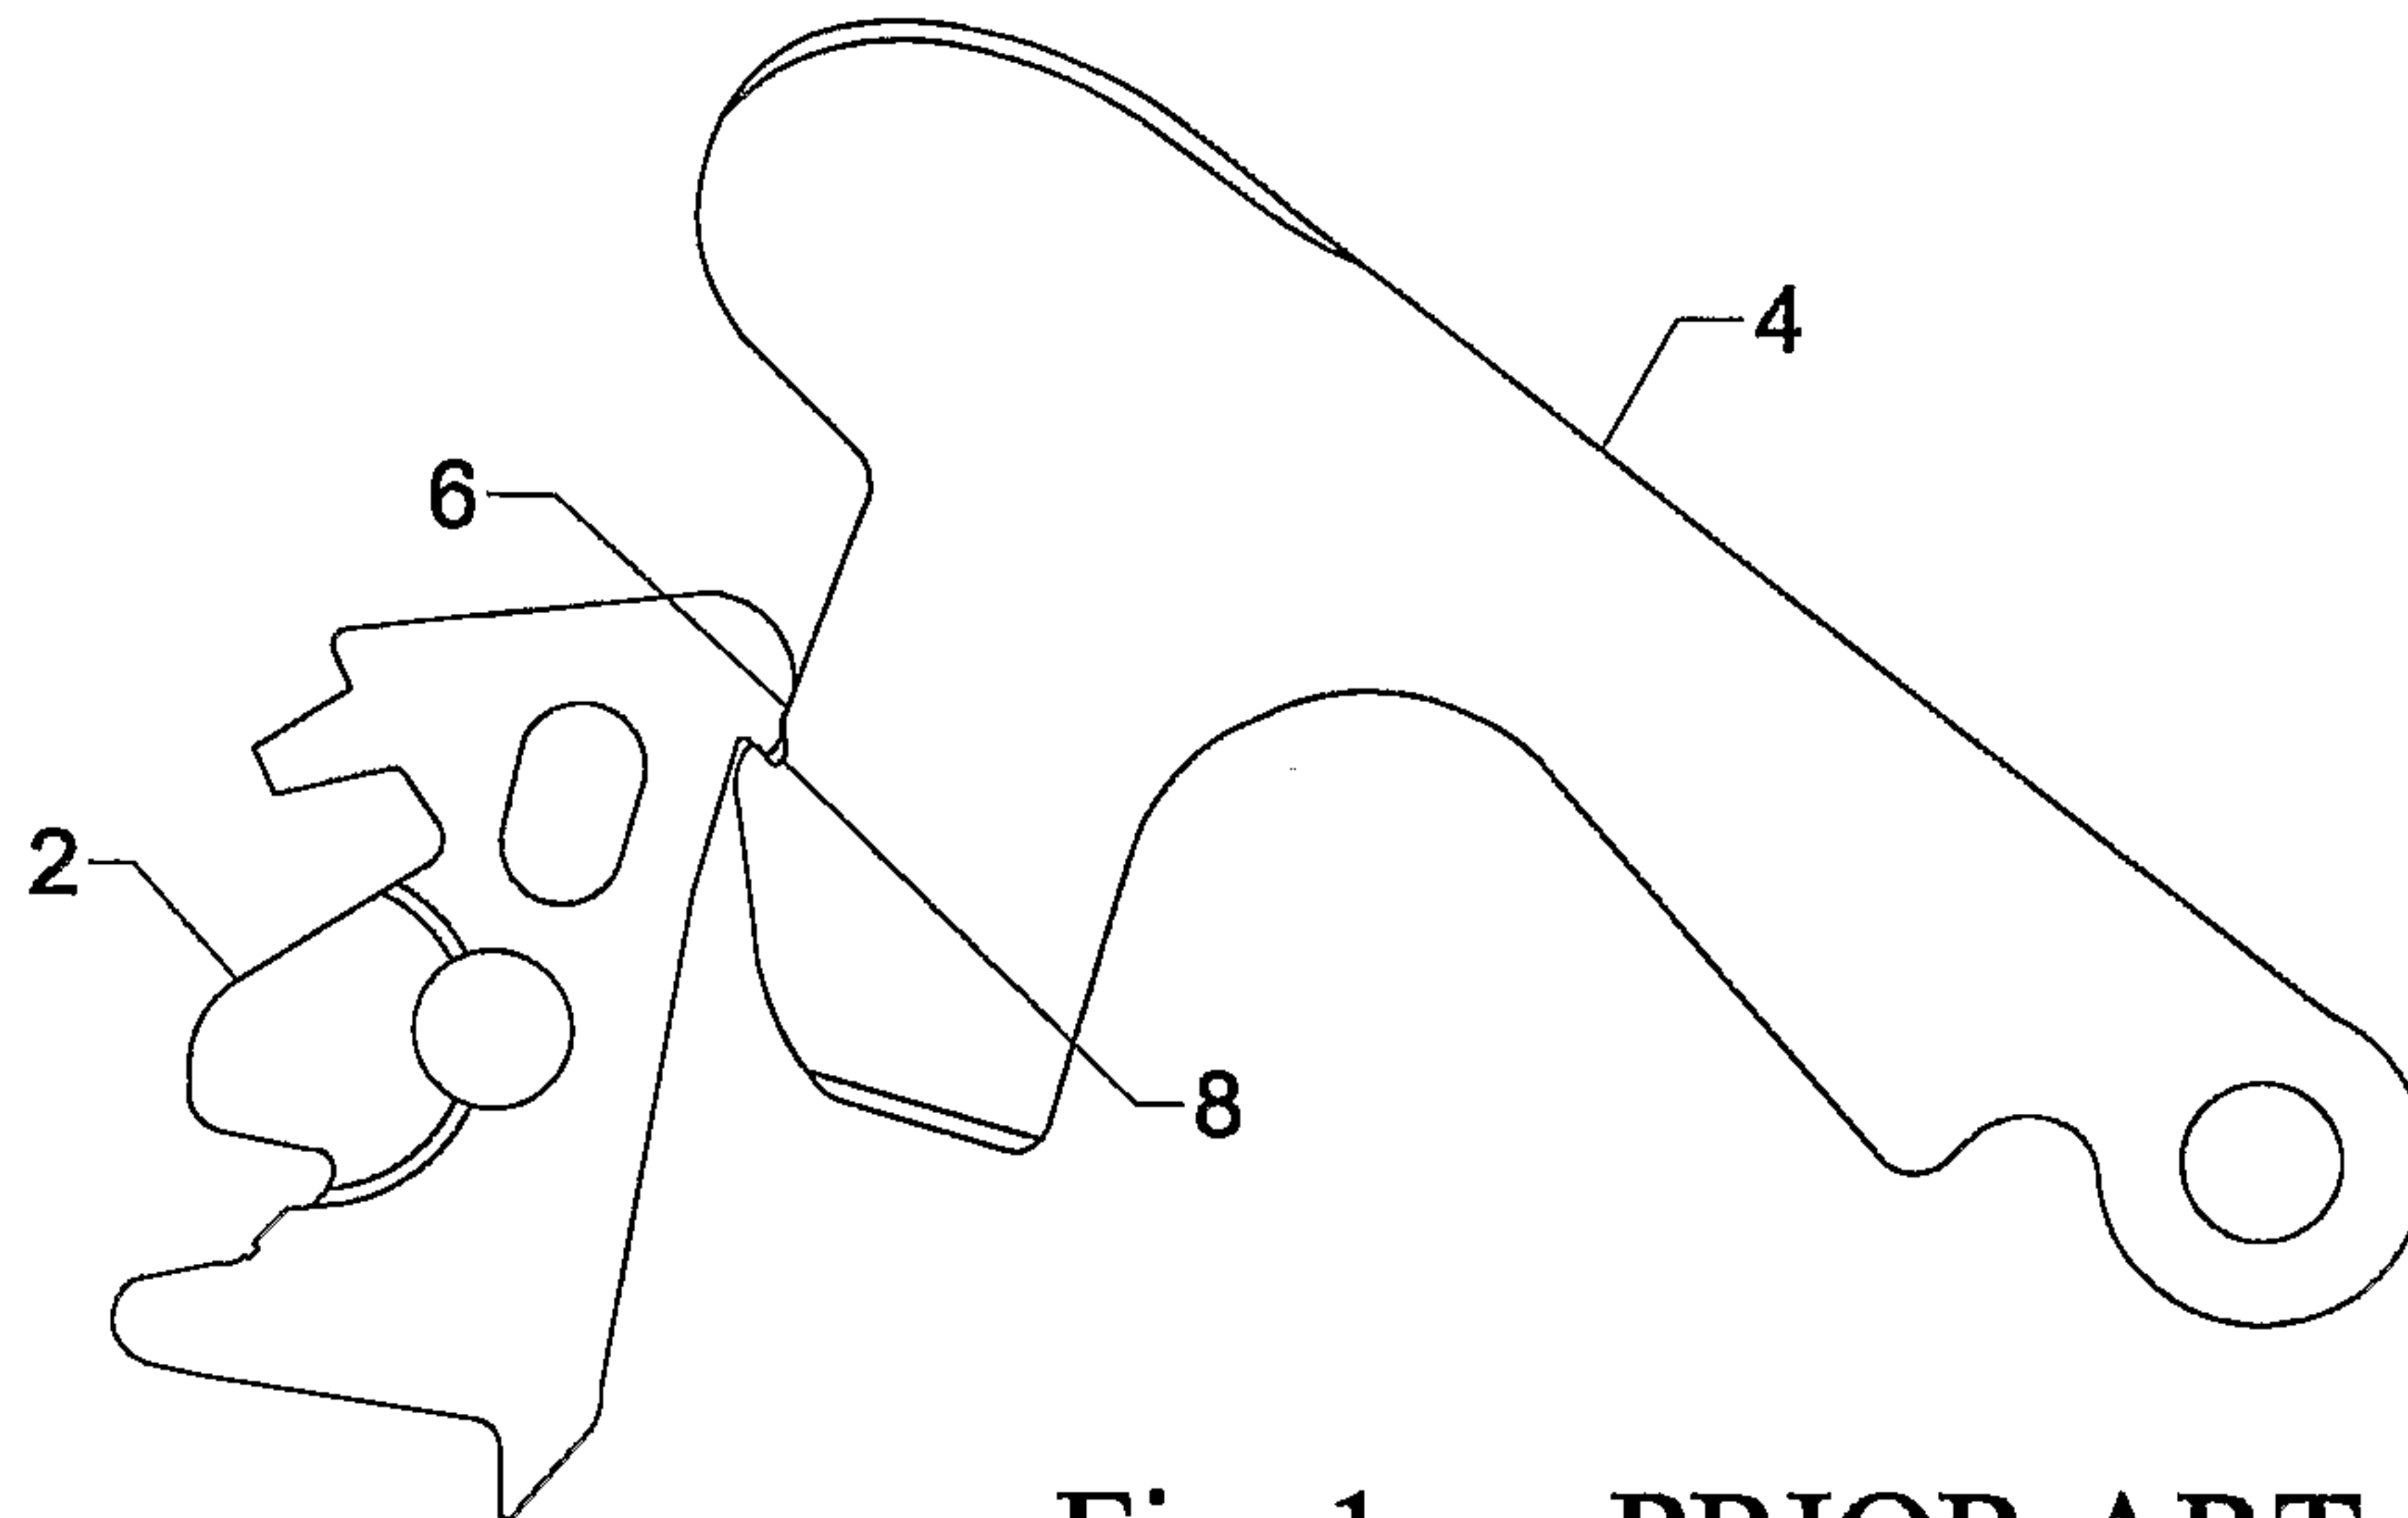


Fig. 1 PRIOR ART

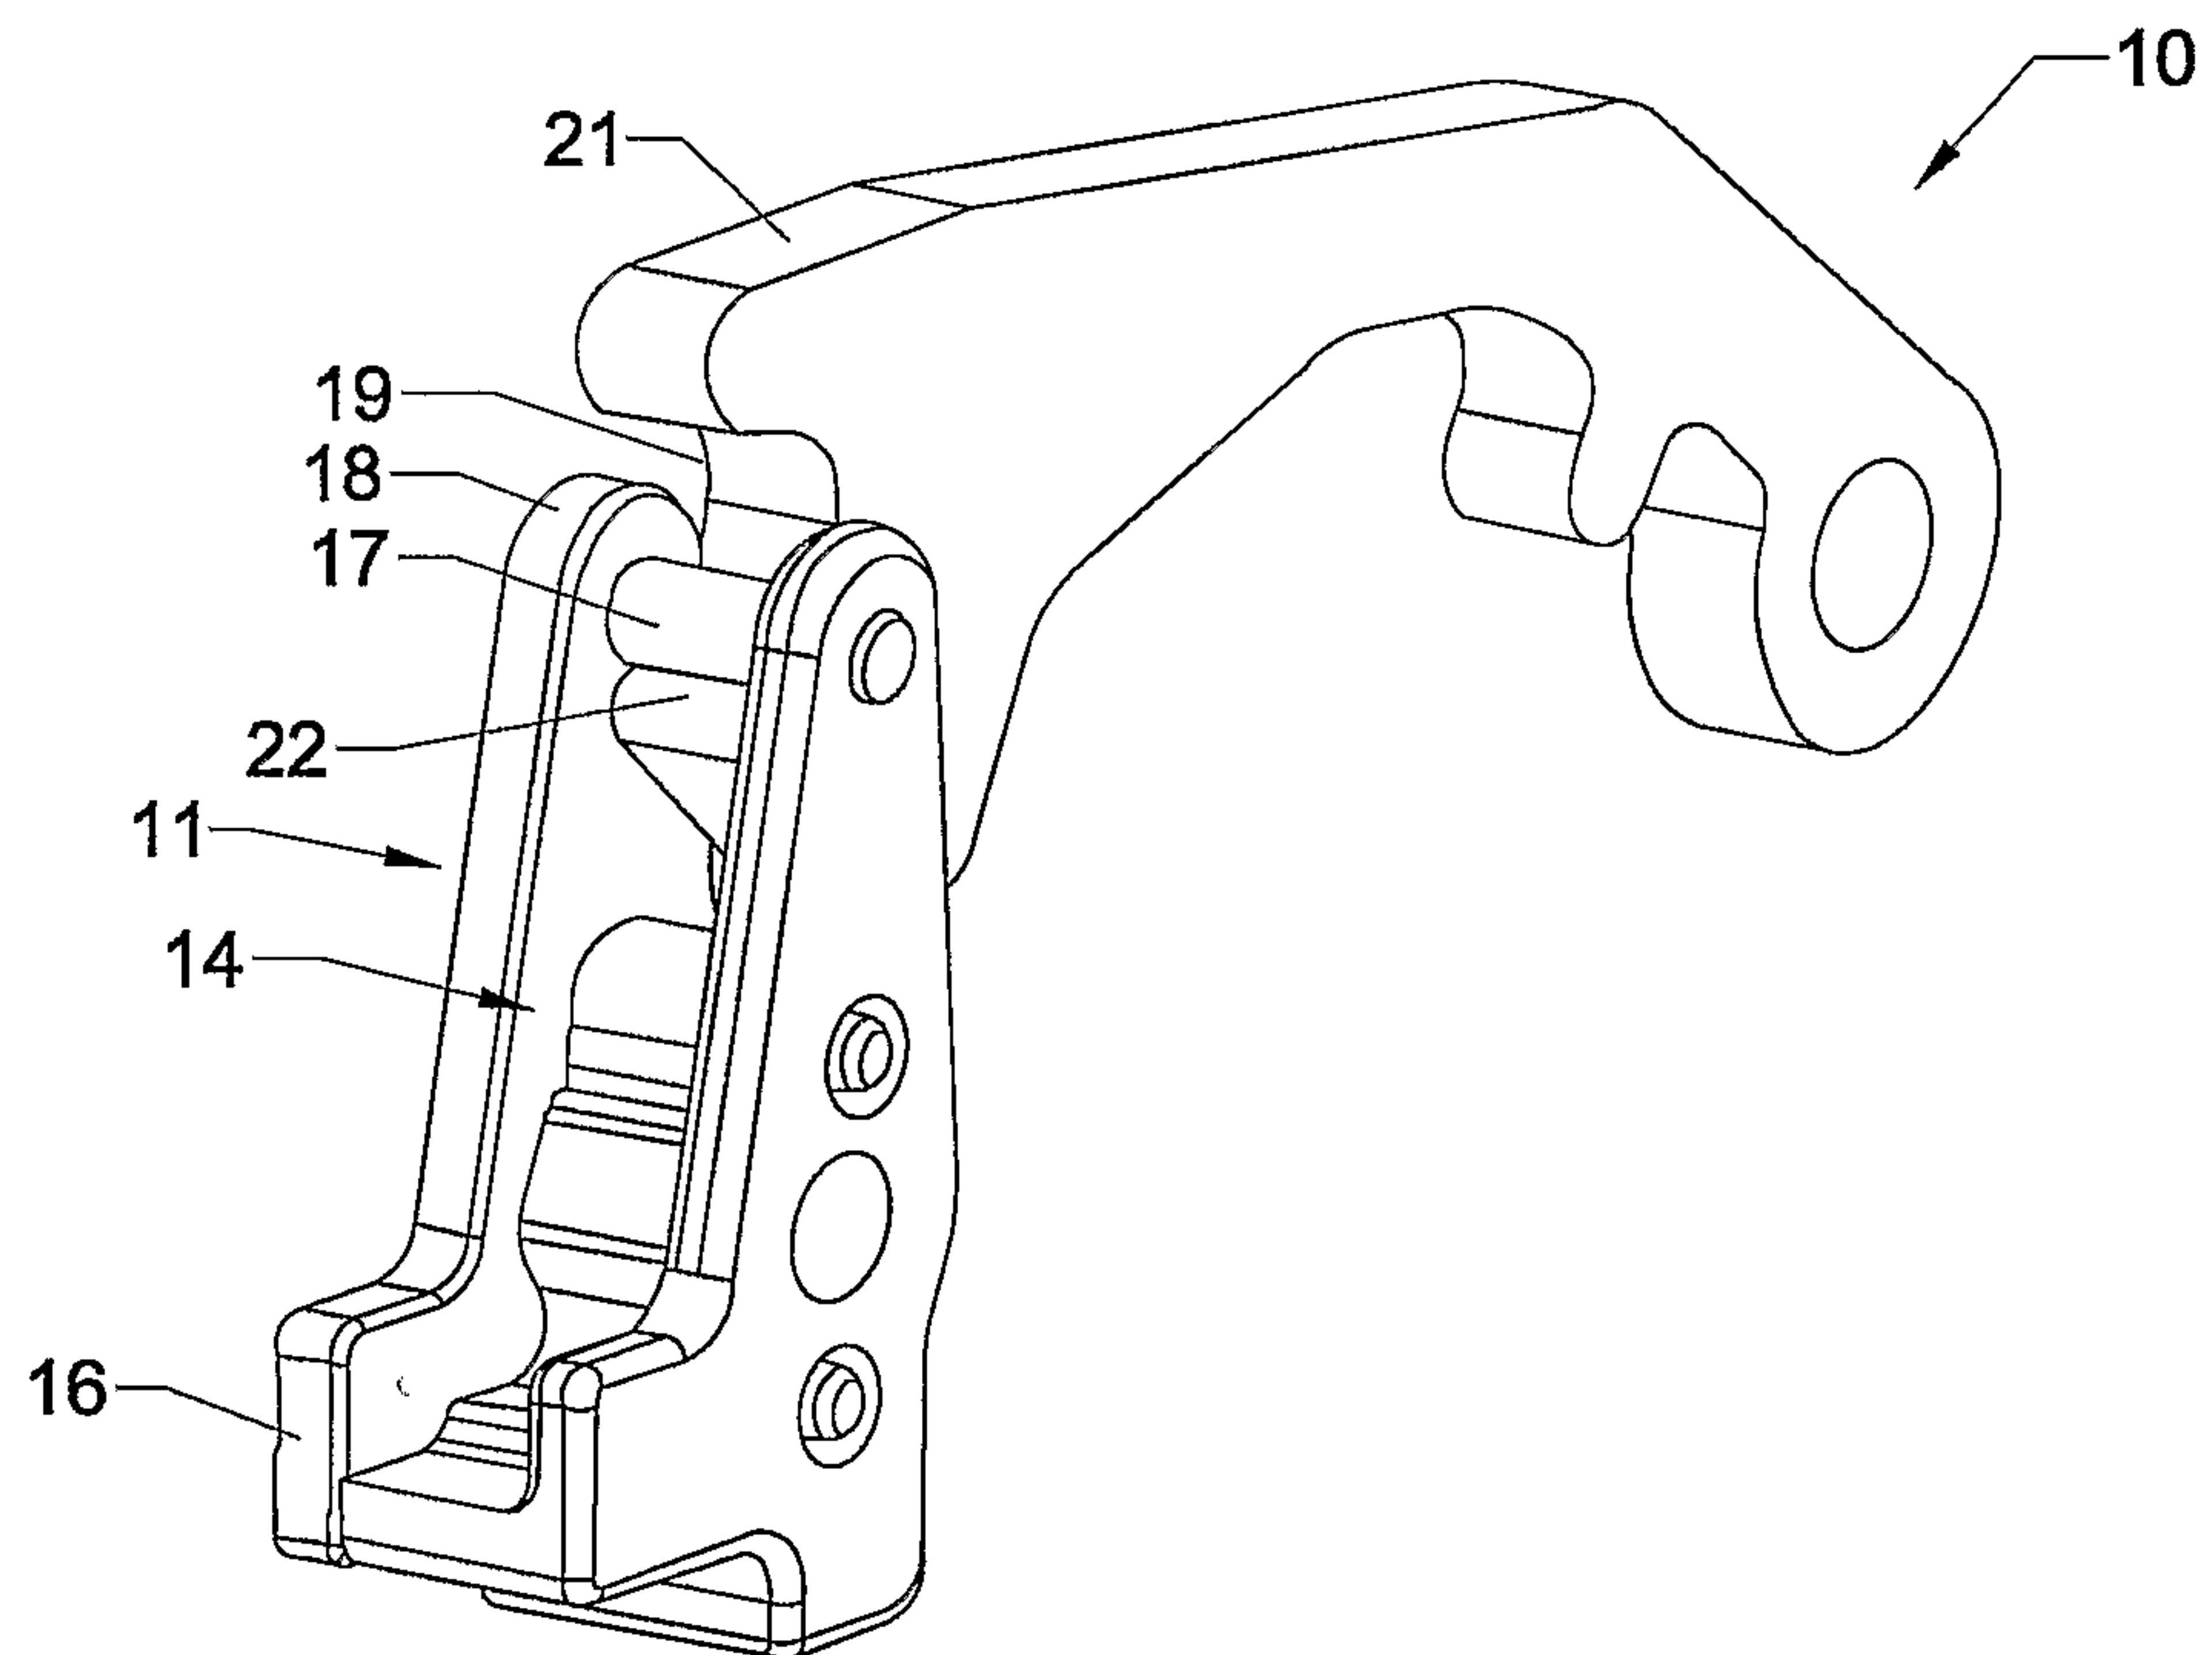


Fig. 2

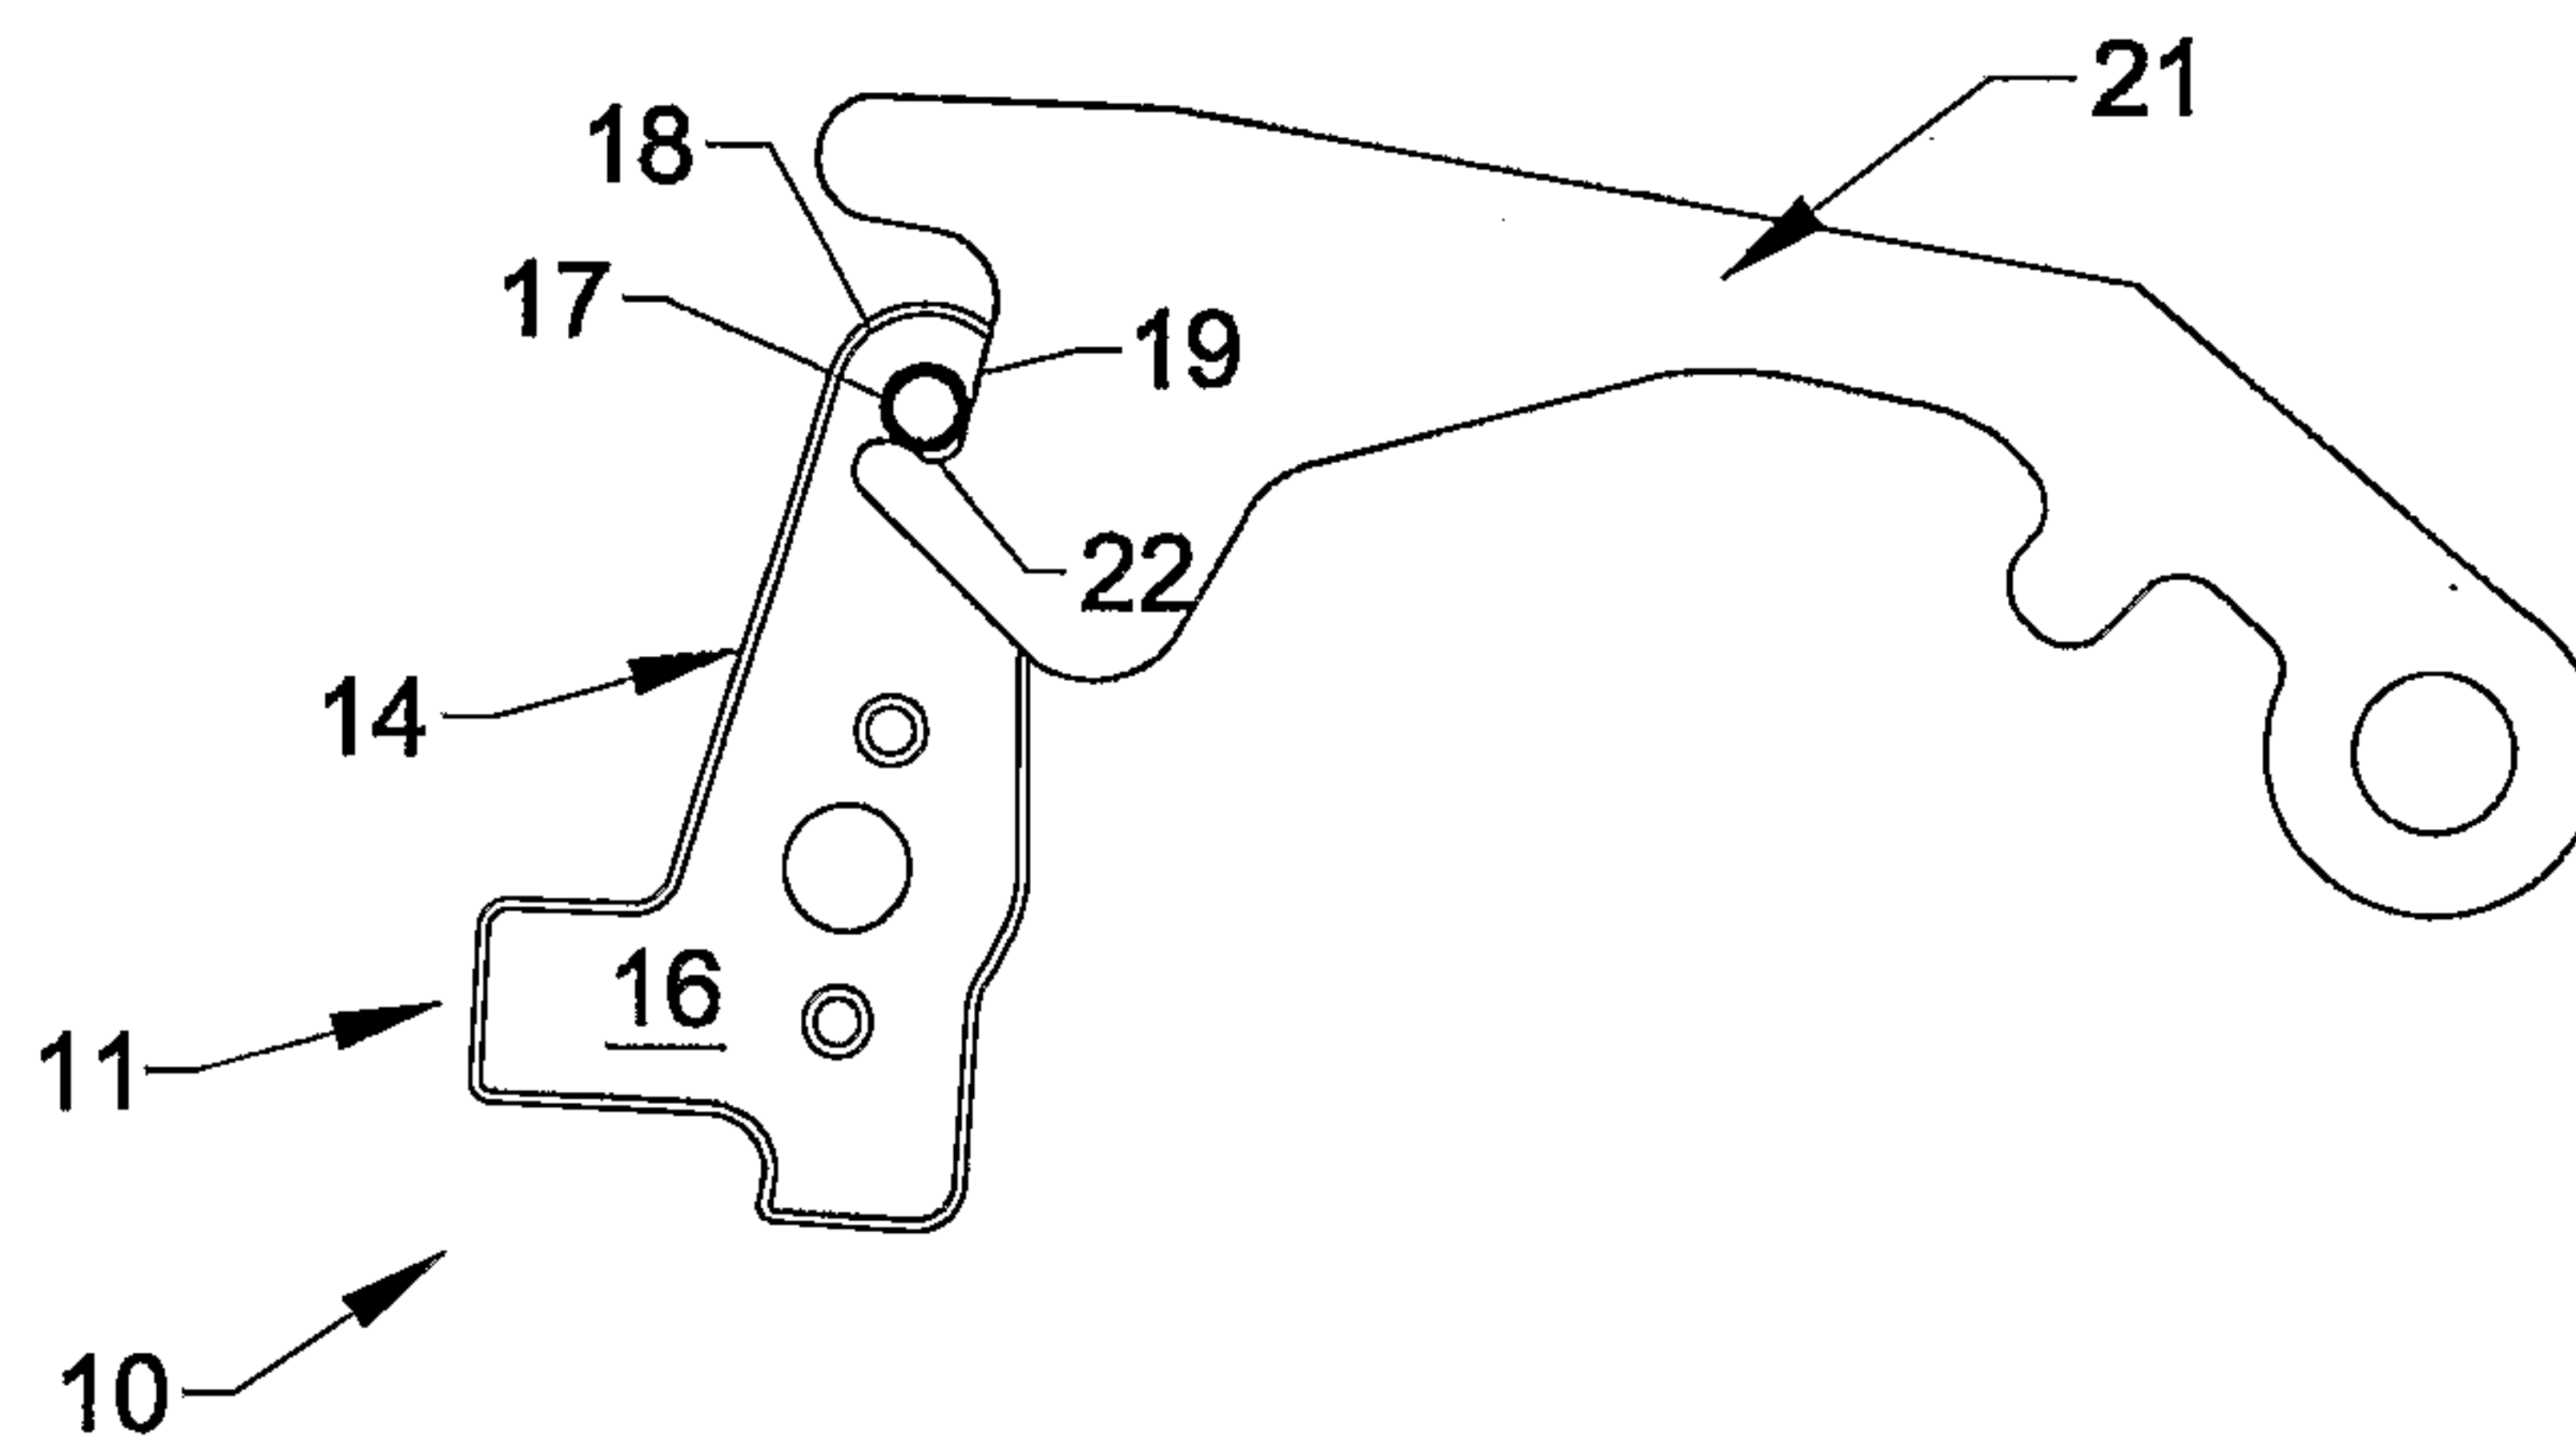


Fig. 3

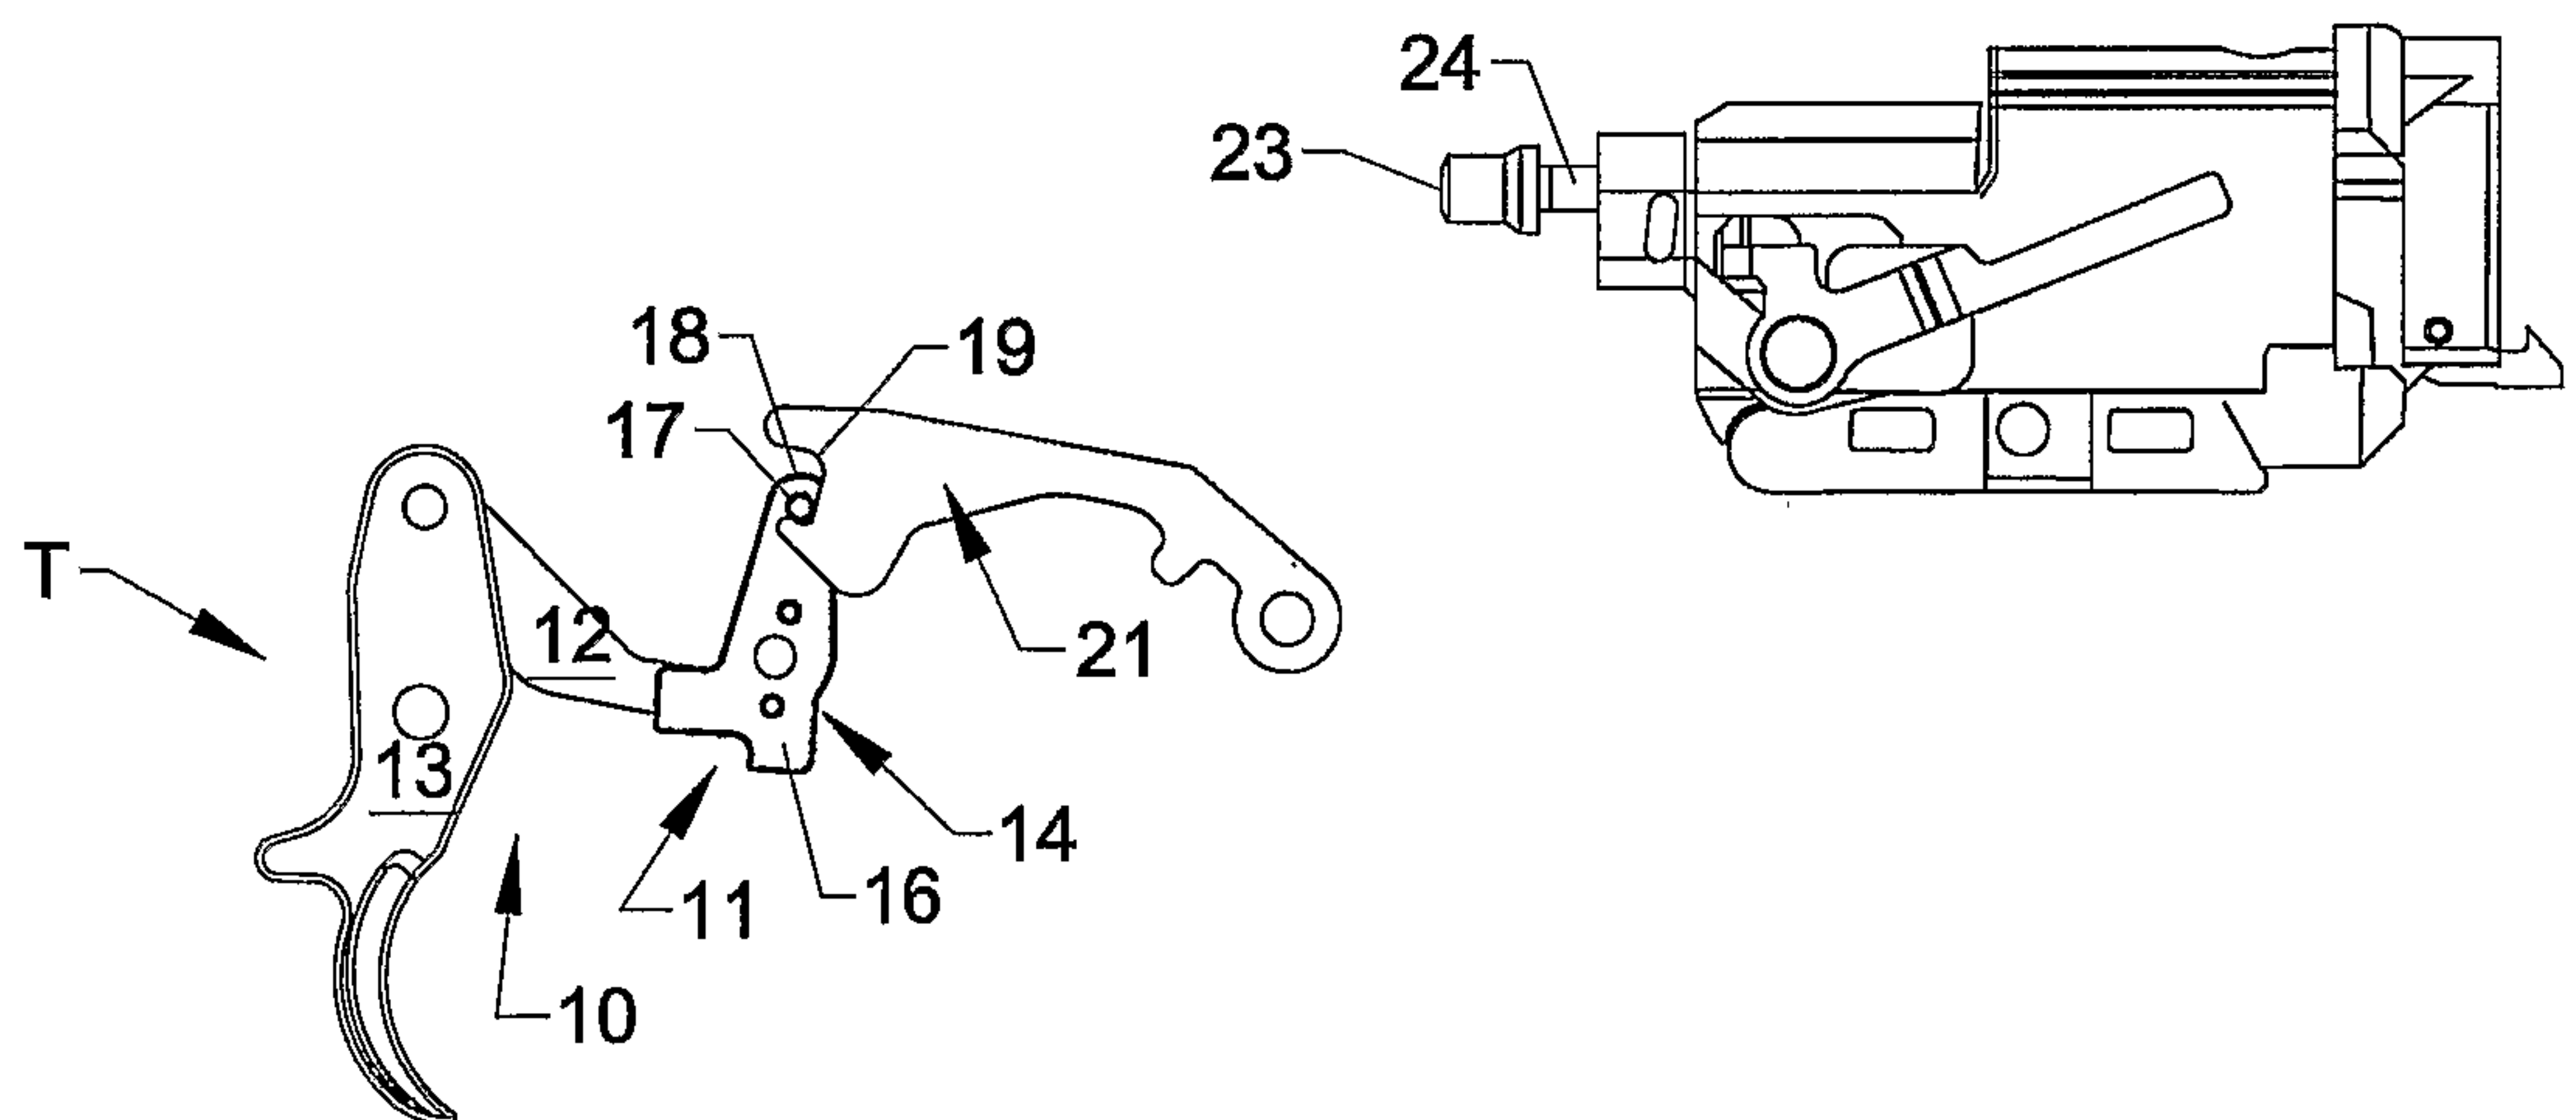


Fig. 4

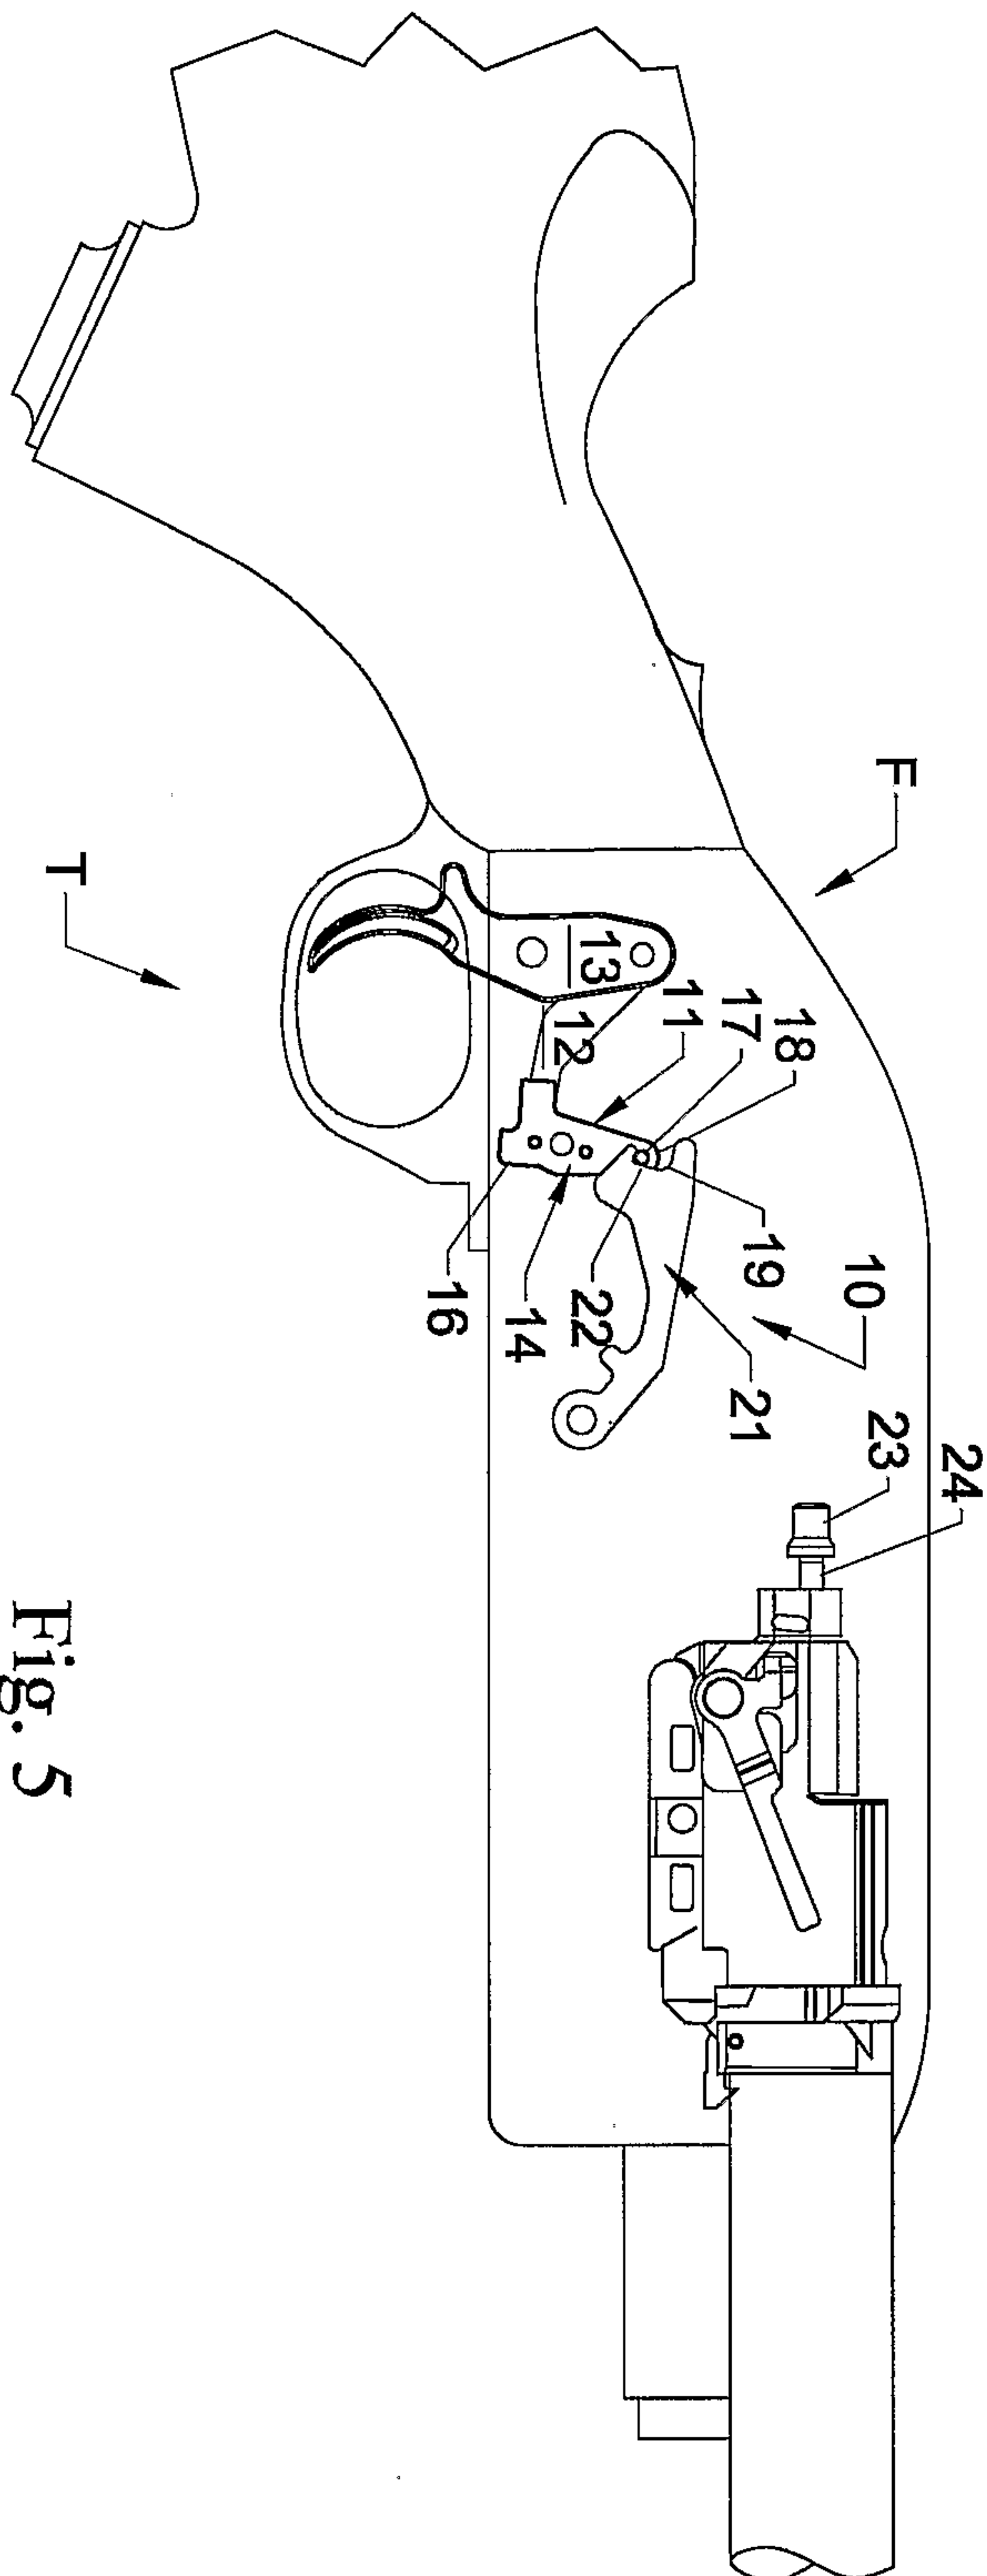


Fig. 5

