




(86) Date de dépôt PCT/PCT Filing Date: 2001/03/15
(87) Date publication PCT/PCT Publication Date: 2001/09/20
(85) Entrée phase nationale/National Entry: 2001/08/13
(86) N° demande PCT/PCT Application No.: US 01/08592
(87) N° publication PCT/PCT Publication No.: WO 01/69981
(30) Priorités/Priorities: 2000/03/16 (60/190,122) US;
2000/08/28 (09/649,153) US

(51) Cl.Int.⁷/Int.Cl.⁷ H05B 33/14
(71) Demandeur/Applicant:
PLANAR SYSTEMS, INC., US
(72) Inventeurs/Inventors:
BOWEN, MICHAEL S., US;
SUN, SEY-SHING, US
(74) Agent: OYEN WIGGS GREEN & MUTALA

(54) Titre : DISPOSITIF ELECTROLUMINESCENT A COUCHE MINCE
(54) Title: THIN-FILM ELECTROLUMINESCENT DEVICE

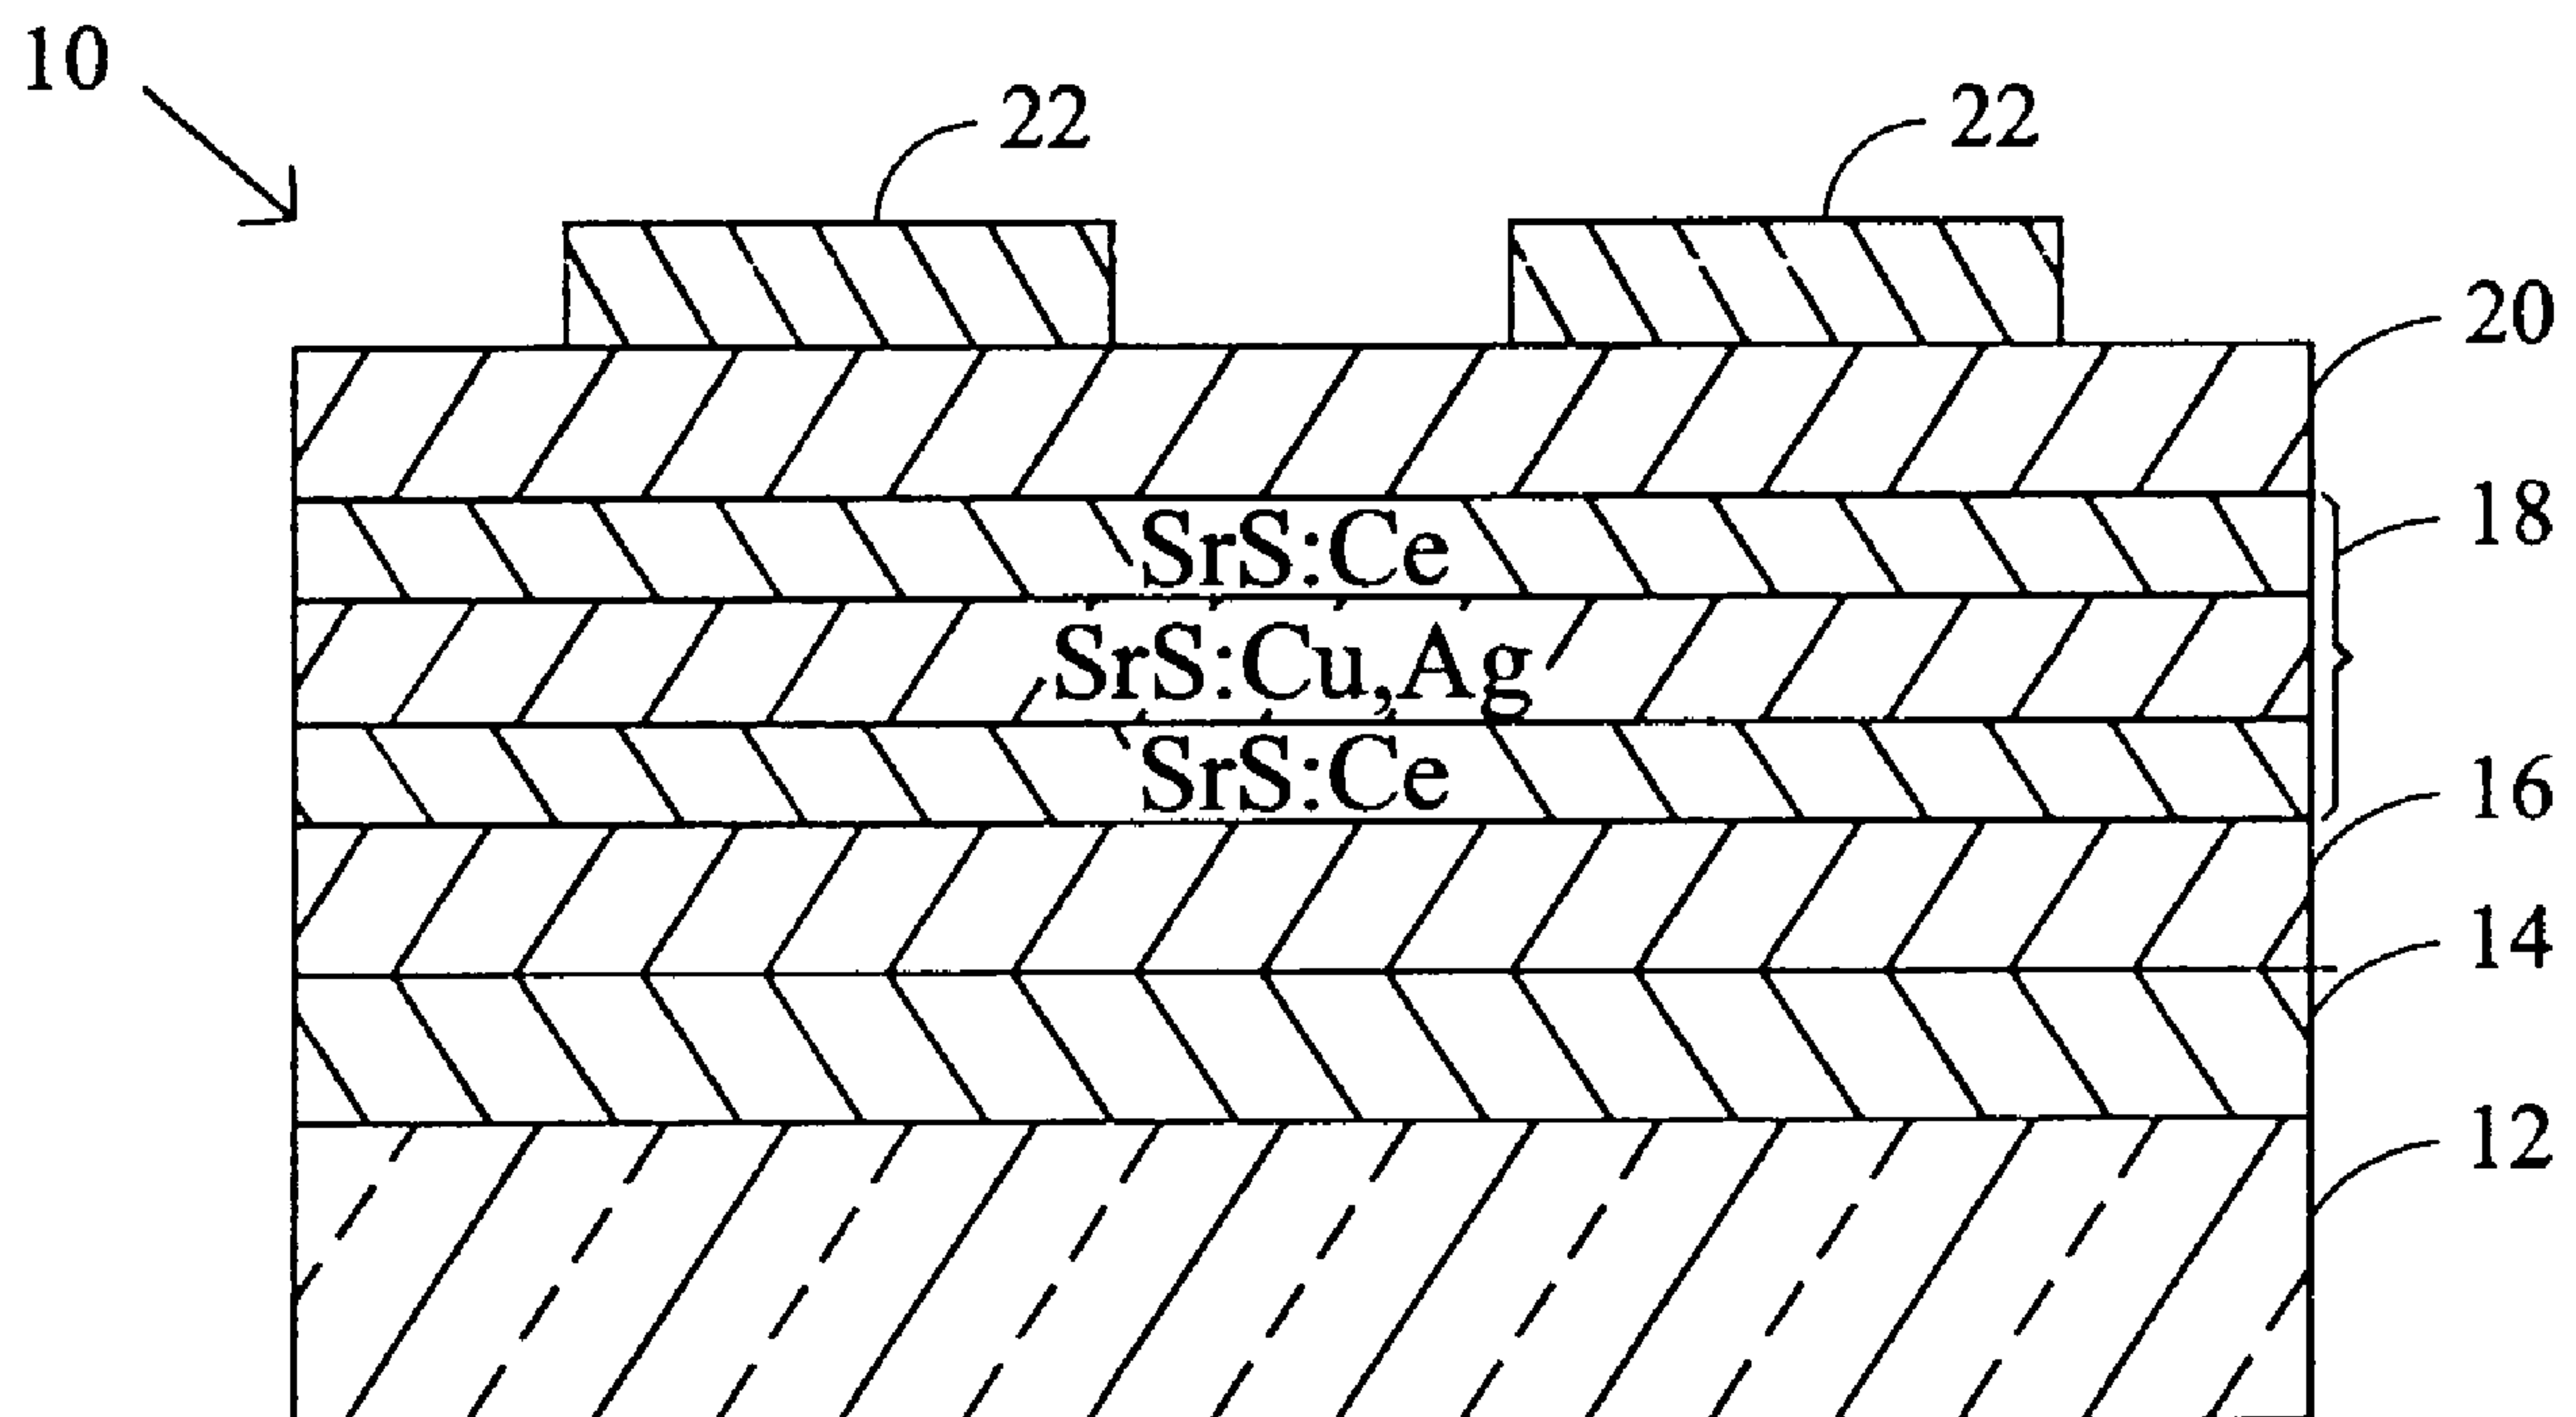

(57) Abrégé/Abstract:

Light emitting phosphor materials include a stack (18) having a first layer of strontium sulfide doped with copper and possibly silver, and a second layer of strontium sulfide doped with cerium.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/69981 A1

(51) International Patent Classification⁷: **H05B 33/14**

(21) International Application Number: PCT/US01/08592

(22) International Filing Date: 15 March 2001 (15.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/190,122 16 March 2000 (16.03.2000) US
09/649,153 28 August 2000 (28.08.2000) US

(71) Applicant (*for all designated States except US*): **PLANAR SYSTEMS, INC.** [US/US]; 1400 Northwest Compton Drive, Beaverton, OR 97006 (US).

(72) Inventors; and
(75) Inventors/Applicants (*for US only*): **SUN, Sey-Shing** [—/US]; 15375 S.W. Nightingale Court, Beaverton, OR 97007 (US). **JONES, Tom** [US/US]; 441 Leonardville Road, Middletown, NJ 07718 (US).

(74) Agent: **RUSSELL, Kevin, L.**; Chernoff, Vilhauer, McClung & Stenzel, Suite 1600, 601 SW Second Avenue, Portland, OR 97204 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DE (utility model), DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIGHT EMITTING PHOSPHOR MATERIALS

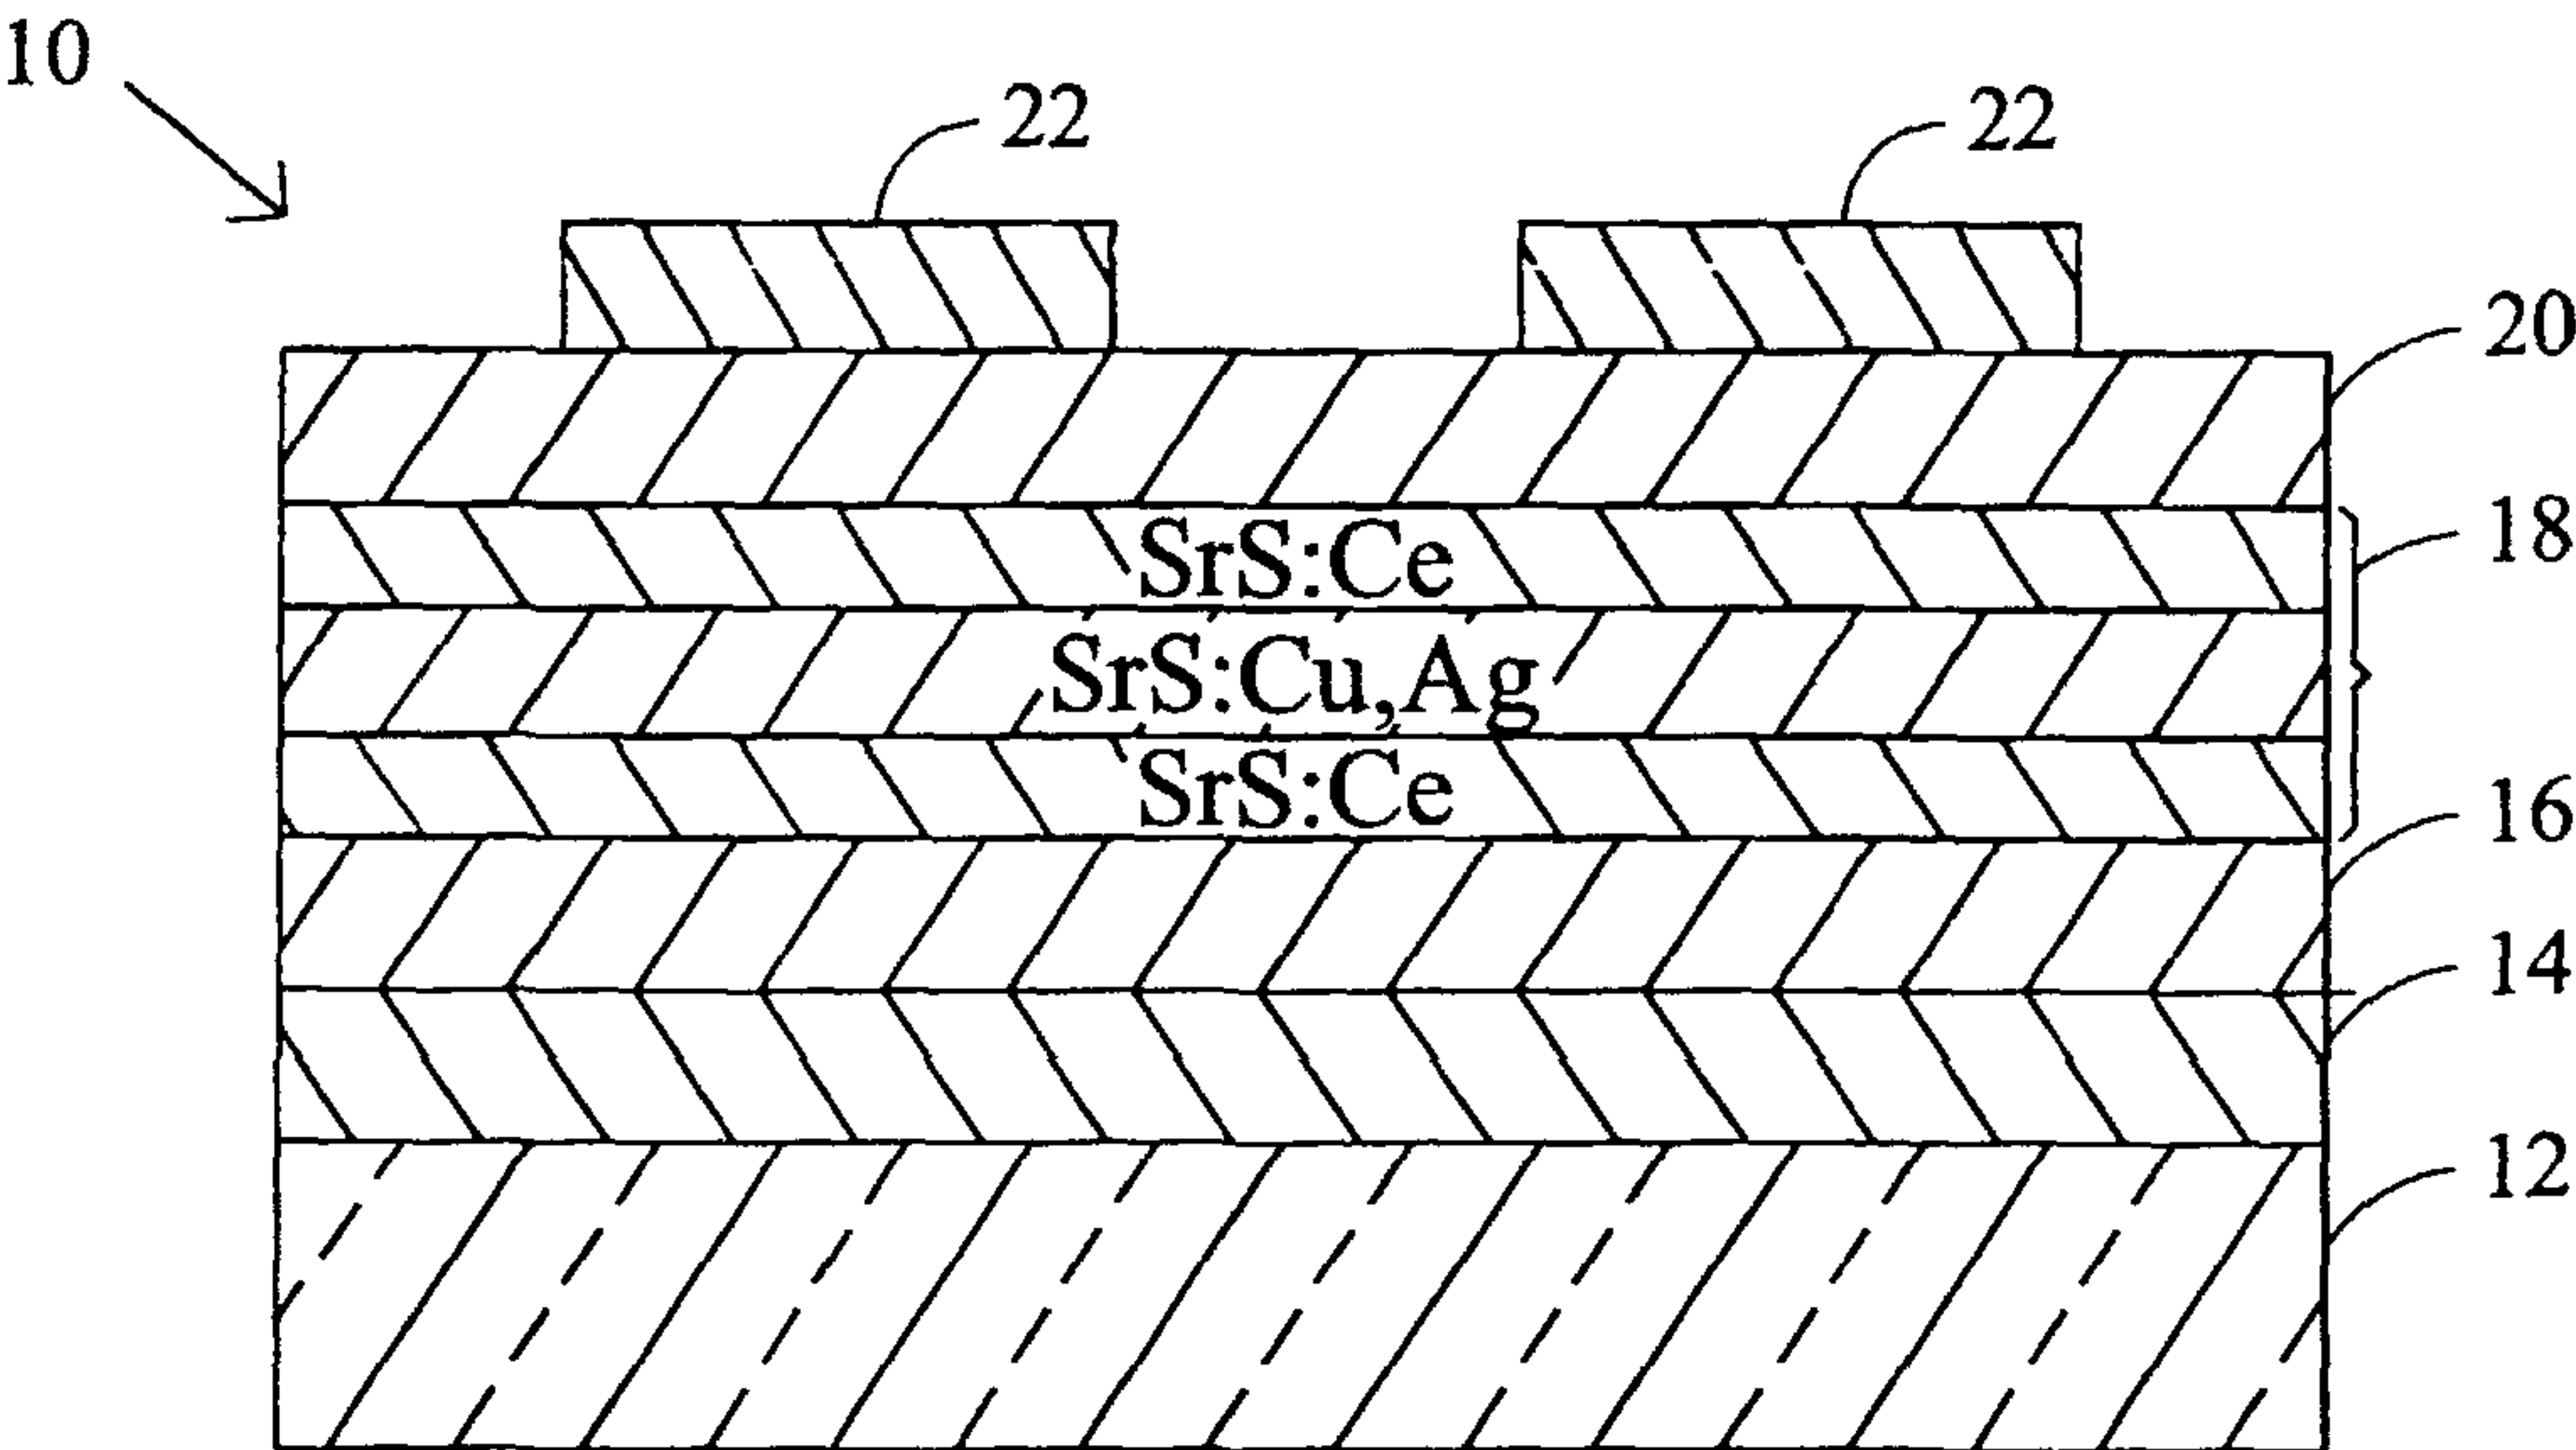

(57) Abstract: Light emitting phosphor materials include a stack (18) having a first layer of strontium sulfide doped with copper and possibly silver, and a second layer of strontium sulfide doped with cerium.

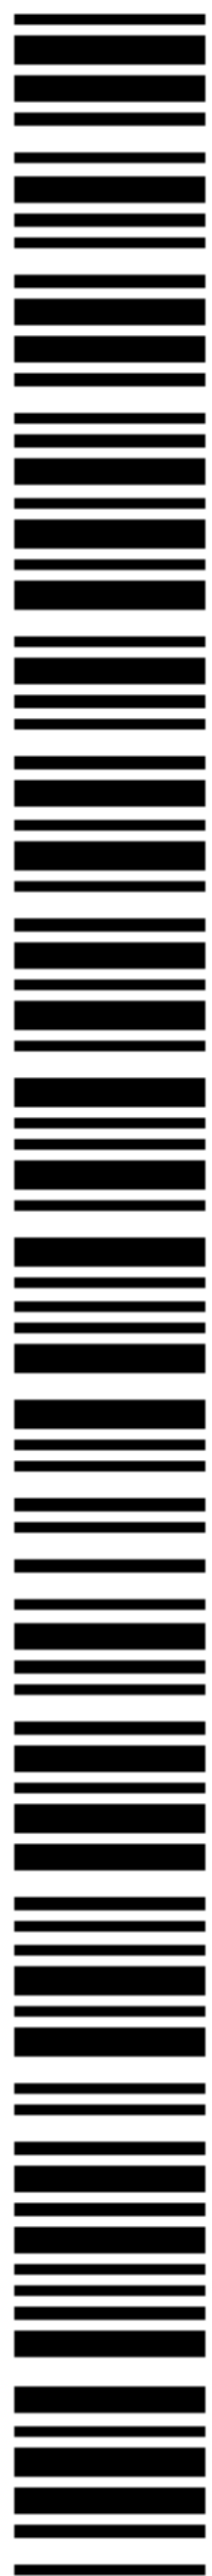

WO 01/69981 A1

LIGHT EMITTING PHOSPHOR MATERIAL

The following application relates to a thin film electroluminescent device.

5

BACKGROUND OF THE INVENTION

~~Thin films of rare earth doped alkaline earth~~ sulfides such as cerium doped strontium sulfide have been extensively investigated for applications in full color alternating current thin film electroluminescent (ACTFEL) display devices. Such a device is shown in Barrow et al., U.S. Patent No. 4,751,427, incorporated by reference herein. The emission spectrum of SrS:Ce is very broad covering both blue and green portions of the visible spectrum, i.e., 440 to 660 nm with a peak at around 500 nm. A full color ACTFEL display device can be obtained by adding a red emitting phosphor, for example CaS:Eu or one that has a red component in its emission spectrum. With such a combination of films, one can build a white light emitting phosphor stack. White phosphor structures can then be laminated with primary color filters to build a color display which is very cost effective in terms of production.

With white light emitting phosphor stacks, however, the blue portion of the emission spectrum can be rather weak, particularly strontium sulfide phosphor doped with cerium which in the past has been the most promising of the blue emitting phosphors. Only about 10% of the original luminance can be obtained after filtering if a nearly blue color is to be achieved. For blue coloration in the CIE range of $x=0.10$, $y=0.13$ the transmission ratio is further reduced to only about 4%. Therefore, to produce a color display with acceptable luminance, it is necessary to use a lighter blue color filter but this in turn leads to a compromised blue chromaticity. Any display fabricated with such a poor blue chromaticity has a limited color gamut and is unable

to produce the range of colors available with CRT or LCD technology.

Therefore, in order to achieve a high performance color ACTFEL display, the blue emission efficiency of the EL phosphor thin film must be greatly improved. In U.S. Patent No. 4,725,344, Yocom, et al., a method is disclosed for forming alkaline earth sulfide luminescent films by chemical reaction between alkaline earth metal halide and hydrogen sulfide on heated substrates. Yocom, et al. does show a strontium sulfide thin film phosphor which has a more bluish color (CIE $x=0.17$, $y=0.25$) than an unfiltered SrS:Ce device. However, the luminance performance of the Yocom et al. device is not high enough for practical application. Experimentation has also been reported regarding SrS:Cu devices which are prepared by sputtering, for example in Ohnishi et al., proceedings of the SID 31/1, 31 (1992). The Ohnishi et al. device, however, is even dimmer than the Yocom et al. device (and no color data is available).

Lehmann, in a paper titled "Alkaline Earth Sulfide Phosphorous Activated by Copper, Sulfur, and Gold," reported that strontium sulfides doped with monovalent ions with D^{10} configuration, e.g., $Cu^{+}Ag^{+}$ plus, emit green and blue light, respectively, when excited by an electron bombardment. Lehmann was attempting to develop a powder EL phosphor material suitable for cathode ray tube devices and thus are considered unsuitable for alternating current (AC) and thin film electroluminescent devices.

The first blue emitting SrS:Cu electroluminescent device suitable for alternating current, thin-film electroluminescent devices was reported by Kane et al., in a paper entitled "New Electroluminescent Phosphorous Based on Strontium Sulfide." However, the device performance was very poor, e.g., less than 1.0 CD/m^2 at 60 Hertz.

Sun et al., in a paper entitled "A Bright And Efficient New Blue TFEL Phosphor," Proceedings of 17th IDRC, Toronto, Canada, p.201 (1997), disclosed a new phosphor, namely, SrS:Cu^+ , with a luminous performance
5 that was increased over the prior known blue phosphorous in a range of 30. After further development, Sun, in a paper entitled "Blue Emitting SrS:Cu TFEL Phosphor Development", Conference record of the 1998 International Display Research Conference, Asia Display, 1998, Seoul,
10 Korea CD-ROM (1998), disclosed an improved blue emitting phosphor material of SrS:Cu,Ag having twice the luminance efficiency of SrS:Ce due to the enhanced blue emission at wavelengths below 460nm.

Troppenz, et al., in a paper entitled
15 "Electroluminescence of SrS:Cu and SrS:Cu,Ag at High Ambient Temperatures" shows that SrS:Cu and SrS:Cu,Ag have severe thermal quenching properties. Thermal quenching refers to a reduction in luminance and a concomitant reduction in transferred charge, when an alternating
20 current thin-film electroluminescent device is operated at an elevated temperature. Typically, thermal quenching refers to a reduction in the luminescence of a phosphor when it is operated at an elevated temperature. Normally, thermal quenching is considered within the
25 context of a configuration coordinate diagram and is attributed to a decreasing radiative recombination efficiency of the phosphor as the photon density increases with increasing temperature. Thus, traditional thermal quenching is due exclusively to an optical effect
30 associated with the temperature dependence of the radiative recombination efficiency.

In contrast, electroluminescence thermal quenching may be employed to denote a reduction in luminescence that is in excess of normal thermal
35 quenching and is associated with a concomitant reduction in transferred charge. Thus, electroluminescent thermal quenching arises from a thermally-activated electrical

effect in addition to the optical effect associated with normal thermal quenching.

Referring to FIG. 1, the luminance of a SrS:Cu device is shown at 25°C and at 50°C. It may be observed
5 that the increase in temperature resulted in nearly at 57% luminance loss at the increased temperature. A similar decrease in luminance likewise occurs with SrS:Cu,Ag phosphor materials. This level of thermal quenching for SrS:Cu and SrS:Cu,Ag is simply too high for
10 a dependable display device.

The foregoing and other objectives, features, and advantages of the invention will be more readily understood upon consideration of the following detailed description of the invention, taken in conjunction with
15 the accompanying drawings.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

FIG. 1 is a graph of the effects of temperature on luminance-voltage characteristics of a SrS:Cu
20 electroluminescent device.

FIG. 2 is a partial side cutaway view of an ACTFEL device.

FIG. 2A is a partial side cutaway view of an alternative embodiment of an ACTFEL device.

25 FIG. 3 shows the effect of Ce codoping on the luminance thermal stability of SrS:Cu,Ag devices. FIG. 2 is a partial side cutaway view of an ACTFEL device.

30 FIG. 4 is a partial side cutaway view of an ACTFEL device.

FIG. 4A is a partial side cutaway view of an alternative embodiment of an ACTFEL device.

35 FIG. 5 shows the effect of thin SrS:Ce layers and their location on the luminance thermal stability of SrS:Cu,Ag devices.

FIG. 6 shows the effect of thin SrS:Ce layers on the luminance performance of SrS:Cu,Ag devices at 25°C.

FIG. 7 shows the spectral radiance intensity versus wavelength of SrS:Cu,Ag and SrS:Ce/SrS:Cu,Ag/SrS:Ce.

FIG. 8 shows the transferred charge (Q) versus applied voltage (V) of SrS:Ce at 20°C and 80°C.

10 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

An alternating current thin-film electroluminescent device 10 as shown in FIG. 2 includes a glass substrate 12 onto which is deposited a layer of indium tin oxide 14. Next an insulator layer 16 comprising an aluminum/titanium oxide is deposited. A phosphor layer 18 comprises a thin film of SrS:Cu,Ag or SrS:Cu. Any other suitable phosphor(s) may likewise be used. The phosphor layer 18 is sandwiched by a second insulator 20 preferably made of barium tantalate (BTO). Aluminum electrodes 22 are placed atop the BTO layer 20. The first insulator layer 16 is preferably approximately 260 nanometers thick and is deposited by atomic layer epitaxy (ALE). The electroluminescent phosphor layer 18 is typically 600 nanometers to 2 micrometers thick and it is deposited by sputtering from an SrS target prepared with the following doping concentration: copper, 0.05 to 5 mol%; and silver 0.05 to 5 mol%. To make a full color panel, a second phosphor layer such as ZnS:Mn or other red emitting phosphor (not shown in FIG. 2) may be deposited on the layer 18. During deposition, the substrate temperature is held to between 75°C and 500°C. The phosphor films are then annealed at 550°C to 850°C in nitrogen. This is followed by the deposition of the second insulator layer 20 which is 300 nanometers of BTO. The top aluminum electrodes 22 complete the device fabrication. Red, blue, and green filters may be interposed between the bottom electrode layer 14 and the

viewer (not shown) to provide a filtered full-color TFEL display.

FIG. 2A shows an "inverted" structure electroluminescent device 40 that is similar to FIG. 2. The device 40 is constructed with a substrate 44 that preferably has a black coating 46 on the lower side if the substrate 44 is transparent. On the substrate 44 are deposited rear electrodes 48. Between the rear electrodes 48 and the rear dielectric layer 50 is a thin film absorption layer 42. The absorption layer is either constructed of multiple graded thin film layers or is a continuous graded thin film layer made by any appropriate method. An electroluminescent layer 52 which may be a laminated structure including at least one layer having the formula $M^{II}S:Cu,Ag$ or $M^{II}S:Cu$ is sandwiched between a rear dielectric layer 50 and a front dielectric layer 54. It is to be understood that any suitable phosphor(s) may be used. In an alternative embodiment, either dielectric layer 50 or 54 could be removed. A transparent electrode layer 56 is formed on the front dielectric layer 54 and is enclosed by a transparent substrate 58 which includes color filter elements 60, 62 and 64 filtering red, blue and green light, respectively.

After extensive investigation, it appears that electroluminescent thermal quenching in $SrS:Cu$ and $SrS:Cu,Ag$ in alternating current thin film electroluminescent devices (ACTFEL) is caused by two independent mechanisms. The mechanisms include (1) a reduction of radiative efficiency and (2) a deterioration of the charge transport properties at elevated temperature. The photoluminescent studies of Troppnez et al., previously discussed, show that the loss in radiative efficiency (first mechanism) is less than 20% between 25° and 80°C. This loss is explained by the increased thermally stimulated non-radiative transition process in $SrS:Cu$ and $SrS:Cu,Ag$ at elevated temperatures. Since thin film materials of $SrS:Cu$ and $SrS:Cu,Ag$ both

show the same quenching trend, thermal quenching is considered to be an intrinsic material property for this phosphor system.

The deterioration of the charge transport properties (second mechanism) in SrS:Cu with increasing temperature is unusual among ACTFEL devices. Baukol et al., in a paper entitled "Electroluminescent Thermal Quenching in SrS:Cu Thin Films", found the transferred charge threshold increased with temperature in the same fashion as the luminance threshold shift shown in FIG. 1, resulting in a lower transferred charge at fixed voltage at high temperature. Baukol et al. suggested that the degradation is caused by the annihilation of the space charge formed by holes trapped at Cu⁺ ions. Vlasenko, et al. in a paper entitled "Temperature Behavior of Characteristics of SrS:Cu(AG) TFEL Devices within Temperature Range From 20 to 50 C", speculated that this degradation was caused by the energy level of the charge trapping states at the phosphor/insulator interface being too shallow so that the trapped charges are thermalized when the temperature is raised.

The present inventor came to the realization that significant space charge exists in SrS:Ce phosphor materials and that the transport property changes little with temperature. With this realization, the present inventor attempted codoping SrS:Cu,Ag with Ce to enhance the charge transport property of the resulting the phosphor material. As shown in FIG. 3, the threshold voltage shift (25 volt shift to 16 volt shift) and luminance degradation (4.7 fL to 1.9 fL) between 25°C and 50°C in SrS:Cu,Ag devices was minimized by Ce codoping. However, to the present inventor's surprise the luminance of the SrS:Cu,Ag phosphor based device was drastically reduced by Ce codoping even at room temperature (9.2 fL to 6.6 fL). As a result, the luminance loss due to Ce codoping exceeded any potential gain in temperature

stability and resulted in almost no luminance improvement at 50°C.

After further consideration the present inventor came to the realization that in contrast to attempting to modify the bulk characteristics of the SrS:Cu,Ag material, a potentially improved technique involves modifying the interface characteristics of the phosphor material. The present inventor again selected SrS:Ce as the phosphor material and added a layer of SrS:Ce phosphor material to one or both of the interfaces between SrS:Cu,Ag and the insulators as shown in FIGS. 4 and 4A. To the present inventors utter astonishment the additional layer of SrS:Ce drastically reduced the threshold voltage shift and the luminance degradation caused by elevated temperatures. Previously, it was not known that SrS:Ce would, at least partially, overcome the energy level of the charge trapping states at the phosphor/insulator interface being too shallow. Preferably, SrS:Ce has a doping concentration between 0.02 and 0.5 mol %.

As shown in FIG. 5, the addition of a thin layer of SrS:Ce to either the upper or lower SrS:Cu,Ag insulator interface drastically reduces the threshold voltage shift and luminance degradation caused by the rising temperature. A more improved effect is achieved when SrS:Ce thin layers are added to both the upper and lower interfaces resulting in the threshold shift being reduced to around 4 volts and luminance deterioration was minimized to less than 26%. The thickness of each of the SrS:Ce layers is preferably between 50 and 400 nm.

It is also noted that the selection of SrS:Ce in combination with SrS:Cu or SrS:Cu,Ag would not be a normal stack configuration of phosphor materials for a full color display because SrS:Cu, SrS:Cu,Ag, and SrS:Ce are all used as the "blue" phosphor and there is no motivation to include multiple different "blue" phosphors in an electroluminescent stack.

Referring to FIG. 6, during further measurements the present inventor was further surprised to observe that the thin layers of SrS:Ce not only improved thermal stability, but also improved the
5 luminance performance by almost 100%. After further consideration, the present inventor speculates that the luminance performance improvement is a result of two effects brought by the addition of SrS:Ce thin layers. The first effect is an increased charge injection, Q_{40} , as
10 shown in FIG. 5. The luminance of an electroluminescent device is proportional to the number of the charge transferred between the interfaces. Hence, higher transferred charge, i.e., Q_{40} led to increased electroluminescence. The second effect is a red shift
15 of the emission peak from 440 nm to 480 nm as shown in FIG. 7. Human eyes are more sensitive to a greenish color and hence the increase in luminance. The exact cause for the peak shift is not clear but it is possible that Ce emission at 480 nm is enhanced by absorption of
20 440 nm emission. This is plausible since SrS:Ce phosphor strongly absorbs photons with peak energy at 440 nm.

Thermally stable electroluminescent phosphors typically only loose no more than 10% of their luminance when raised from 25°C to 50°C. Marginally thermally
25 stable electroluminescent phosphors are those that loose in excess of 20% of their luminance when raised from 25°C to 50°C. Electroluminescent phosphors with poor thermal stability loose in excess of 30% of their luminance when raised from 25°C to 50°C. It is speculated by the present
30 inventor that the resulting decrease in thermal quenching, in a general case applicable to a broad range of electroluminescent phosphor materials, is the result of adding a thin-film of electroluminescent phosphor material to one or both sides of the primary phosphor
35 layer. The reduction in the effects of thermal quenching by 1/3 is considered a significant improvement. In addition, depending on the phosphors selected the effects

of thermal quenching may be reduced below the 30% and 20% benchmarks. The primary phosphor layer, for example, may have a thickness in the range of 600 to 2000 nanometers while the thin film may have a thickness in the range of 50 nanometers to 400 nanometers, and more preferably 200-300 nanometers. It would be noted that phosphors with a thickness of 50 to 400 nanometers are generally inefficient and unsuitable as a primary phosphor material. It may be observed that the range of the thickness of the thin film is generally less than that typically used for the primary light emitting electroluminescent phosphor material. In addition, it is further speculated by the present inventor that using the same host (e.g., SrS) for both the primary electroluminescent phosphor material and the thin film of additional electroluminescent phosphor material significantly improves the thermal quenching. The present inventor further speculates that the use of a phosphor material with bulk thermal stability of less than 10% change in the Q-V characteristics between 20°C and 80°C at 1 Khz likewise provides the necessary charge injection to the primary light emitting phosphor, as shown in FIG. 8.

It is also understood that a broadband (white) emitting EL phosphor can be achieved by laminating SrS:Cu,Ag/SrS:Ce or SrS:Cu/SrS:Ce layer with a ZnS:Mn or other yellow or red/green emitting phosphor layer to produce white monochrome or color EL displays.

It will also be understood that although the preferred embodiment has been described primarily in terms of a conventional ACTFEL device which will be viewed with the glass substrate forming the face of a TFEL panel, the phosphor of the preferred embodiment may also be used in an inverted structure and viewed from film side of the structure. In the latter case the first deposited electrode will be a refractive metal such as molybdenum. In addition, the phosphor materials may

likewise be used with active matrix thin film electroluminescent devices.

It will also be understood that SrS:Ag,Cu and SrS:Cu together with thermal quenching are also a likely
5 phosphor candidate for other display technologies, e.g., FED or backlight for LCD.

The terms and expressions which have been employed in the foregoing specification are used therein as terms of description and not of limitation, and there
10 is no intention, in the use of such terms and expressions, of excluding equivalents of the features shown and described or portions thereof, it being recognized that the scope of the invention is defined and limited only by the claims which follow.

CLAIMS:

1. A light emitting phosphor material for an alternating current thin-film electroluminescent device
5 that includes said phosphor material sandwiched between a pair of dielectric layers, where said phosphor material comprises:

- 10 (a) a first phosphor layer having a thickness greater than 600 nanometers wherein said first phosphor material has a luminance output at 25°C and a decreased luminance output at 50°C greater than 20% of said luminance output at 25°C;
- 15 (b) a second phosphor layer overlaying said first phosphor layer having a thickness less than 400 nanometers wherein said decreased luminance output at 50°C is less than 20% with said second phosphor layer.

20 2. The phosphor material of claim 1 wherein said decreased luminance output at 50°C with said second phosphor layer is greater than 1/3.

25 3. The phosphor material of claim 1 wherein said second phosphor layer has a thickness of less than 200 nanometers.

4. The phosphor material of claim 1 wherein said first phosphor comprises at least one of
30 (a) $M^{II}S:D,H$ wherein M^{II} is strontium, S is sulphur, D is copper, and H is silver; and
(b) $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, and D is copper.

35 5. The phosphor material of claim 4 wherein said second phosphor comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Cerium.

6. The phosphor material of claim 1 wherein said first phosphor and said second phosphor have the same host.

5 7. The phosphor material of claim 6 wherein said host is SrS.

8. The phosphor material of claim 1, further comprising a third phosphor layer overlaying said first
10 phosphor layer having a thickness less than 400 nanometers wherein said decreased luminance output at 50°C with said third phosphor material is less than said decreased luminance output without said third phosphor material.

15

9. The phosphor material of claim 8 wherein said first phosphor comprises at least one of

- (a) $M^{II}S:D,H$ wherein M^{II} is strontium, S is sulphur, D is copper, and H is silver; and
20 (b) $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, and D is copper.

10. The phosphor material of claim 9 wherein said second phosphor material comprises $M^{II}S:D$ wherein M^{II}
25 is strontium, S is sulphur, D is Cerium.

11. The phosphor material of claim 10 wherein said third phosphor material comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Ce.

30

12. A light emitting phosphor material for an alternating current thin-film electroluminescent device that includes said phosphor material sandwiched between a pair of dielectric layers, where said phosphor material
35 comprises:

- (a) a first phosphor layer having a thickness greater than 600 nanometers wherein said

14

first phosphor material has a luminance output at 25°C and a decreased luminance output at 50°C greater than 30% of said luminance output at 25°C;

- 5 (b) a second phosphor layer overlaying said first phosphor layer having a thickness less than 400 nanometers wherein said decreased luminance output at 50°C is less than 30% with said second phosphor layer.

10

13. The phosphor material of claim 12 wherein said decreased luminance output at 50°C with said second phosphor layer is greater than 1/3.

15

14. The phosphor material of claim 12 wherein said second phosphor layer has a thickness of less than 200 nanometers.

15. The phosphor material of claim 12 wherein
20 said first phosphor comprises at least one of

- (a) $M^{II}S:D,H$ wherein M^{II} is strontium, S is sulphur, D is copper, and H is silver; and
(b) $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, and D is copper.

25

16. The phosphor material of claim 15 wherein said second phosphor comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Cerium.

30

17. The phosphor material of claim 12 wherein said first phosphor and said second phosphor have the same host.

18. The phosphor material of claim 17 wherein
35 said host is SrS.

19. The phosphor material of claim 12, further comprising a third phosphor layer overlaying said first phosphor layer having a thickness less than 400 nanometers wherein said decreased luminance output at
5 50°C with said third phosphor material is less than said decreased luminance output without said third phosphor material.

20. The phosphor material of claim 19 wherein
10 said first phosphor comprises at least one of
(a) $M^{II}S:D,H$ wherein M^{II} is strontium, S is sulphur, D is copper, and H is silver; and
(b) $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, and D is copper.

15

21. The phosphor material of claim 20 wherein said second phosphor material comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Cerium.

22. The phosphor material of claim 21 wherein
20 said third phosphor material comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Ce.

23. A light emitting phosphor material for an
25 alternating current thin-film electroluminescent device that includes said phosphor material sandwiched between a pair of dielectric layers, where said phosphor material comprises:

- (a) a first phosphor layer having a luminance
30 output at 25°C and a decreased luminance output at 50°C greater than 20% of said luminance output at 25°C, the difference between said luminance at 25°C and 50°C being a luminance reduction;
- (b) a second phosphor layer overlaying said
35 first phosphor layer wherein said luminance reduction is reduced by at least

16

1/3 with the addition of said second phosphor layer.

(c) said first phosphor layer and said second phosphor layer having the same host lattice.

24. The phosphor material of claim 23 wherein said first phosphor layer has a thickness greater than 600 nanometers and said second phosphor layer has a thickness less than 400 nanometers .

25. The phosphor material of claim 24 wherein said second phosphor layer has a thickness of less than 200 nanometers.

26. The phosphor material of claim 23 wherein said first phosphor comprises at least one of

- (a) $M^{II}S:D,H$ wherein M^{II} is strontium, S is sulphur, D is copper, and H is silver; and
- (b) $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, and D is copper.

27. The phosphor material of claim 26 wherein said second phosphor comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Cerium.

28. The phosphor material of claim 23 wherein said host is SrS.

29. The phosphor material of claim 23, further comprising a third phosphor layer overlaying said first phosphor layer wherein said decreased luminance output at 50°C with said third phosphor material is less than said decreased luminance output without said third phosphor material.

30. The phosphor material of claim 29 wherein said first phosphor comprises at least one of

- (a) $M^{II}S:D,H$ wherein M^{II} is strontium, S is sulphur, D is copper, and H is silver; and
- 5 (b) $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, and D is copper.

31. The phosphor material of claim 30 wherein said second phosphor material comprises $M^{II}S:D$ wherein M^{II}
10 is strontium, S is sulphur, D is Cerium.

32. The phosphor material of claim 31 wherein said third phosphor material comprises $M^{II}S:D$ wherein M^{II}
15 is strontium, S is sulphur, D is Cerium.

33. The phosphor material of claim 23 wherein said first phosphor material and said second phosphor material have a peak light emission in the same general region of the visible spectrum.

20

34. The phosphor material of claim 29 wherein said first phosphor material and said second phosphor material have a peak light emission in the same general region of the visible spectrum.

25

35. A light emitting phosphor material for an alternating current thin-film electroluminescent device that includes said phosphor material sandwiched between a pair of dielectric layers, where said phosphor material
30 comprises:

- (a) a first phosphor layer having a thickness greater than 600 nanometers wherein said first phosphor material has a luminance output at 25°C and a decreased luminance output at 50°C greater than 10% of said
35 luminance output at 25°C;

(b) a second phosphor layer overlaying said first phosphor layer having a thickness less than 400 nanometers wherein said second phosphor layer is characterized by less than 10% change in its Q-V characteristics between 20°C and 80°C at 1 KHz.

36. The phosphor material of claim 35 wherein said decreased luminance output at 50°C with said second phosphor layer is greater than 1/3.

37. The phosphor material of claim 35 wherein said second phosphor layer has a thickness of less than 200 nanometers.

38. The phosphor material of claim 35 wherein said first phosphor comprises at least one of

(a) $M^{II}S:D,H$ wherein M^{II} is strontium, S is sulphur, D is copper, and H is silver; and

(b) $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, and D is copper.

39. The phosphor material of claim 38 wherein said second phosphor comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Cerium.

40. The phosphor material of claim 35 wherein said first phosphor and said second phosphor have the same host.

41. The phosphor material of claim 40 wherein said host is SrS.

42. The phosphor material of claim 35, further comprising a third phosphor layer overlaying said first phosphor layer having a thickness less than 400

nanometers wherein said decreased luminance output at 50°C with said third phosphor material is less than said decreased luminance output without said third phosphor material.

5

43. The phosphor material of claim 42 wherein said first phosphor comprises at least one of

- (a) $M^{II}S:D,H$ wherein M^{II} is strontium, S is sulphur, D is copper, and H is silver; and
- 10 (b) $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, and D is copper.

44. The phosphor material of claim 43 wherein said second phosphor material comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Cerium.

15

45. The phosphor material of claim 44 wherein said third phosphor material comprises $M^{II}S:D$ wherein M^{II} is strontium, S is sulphur, D is Ce.

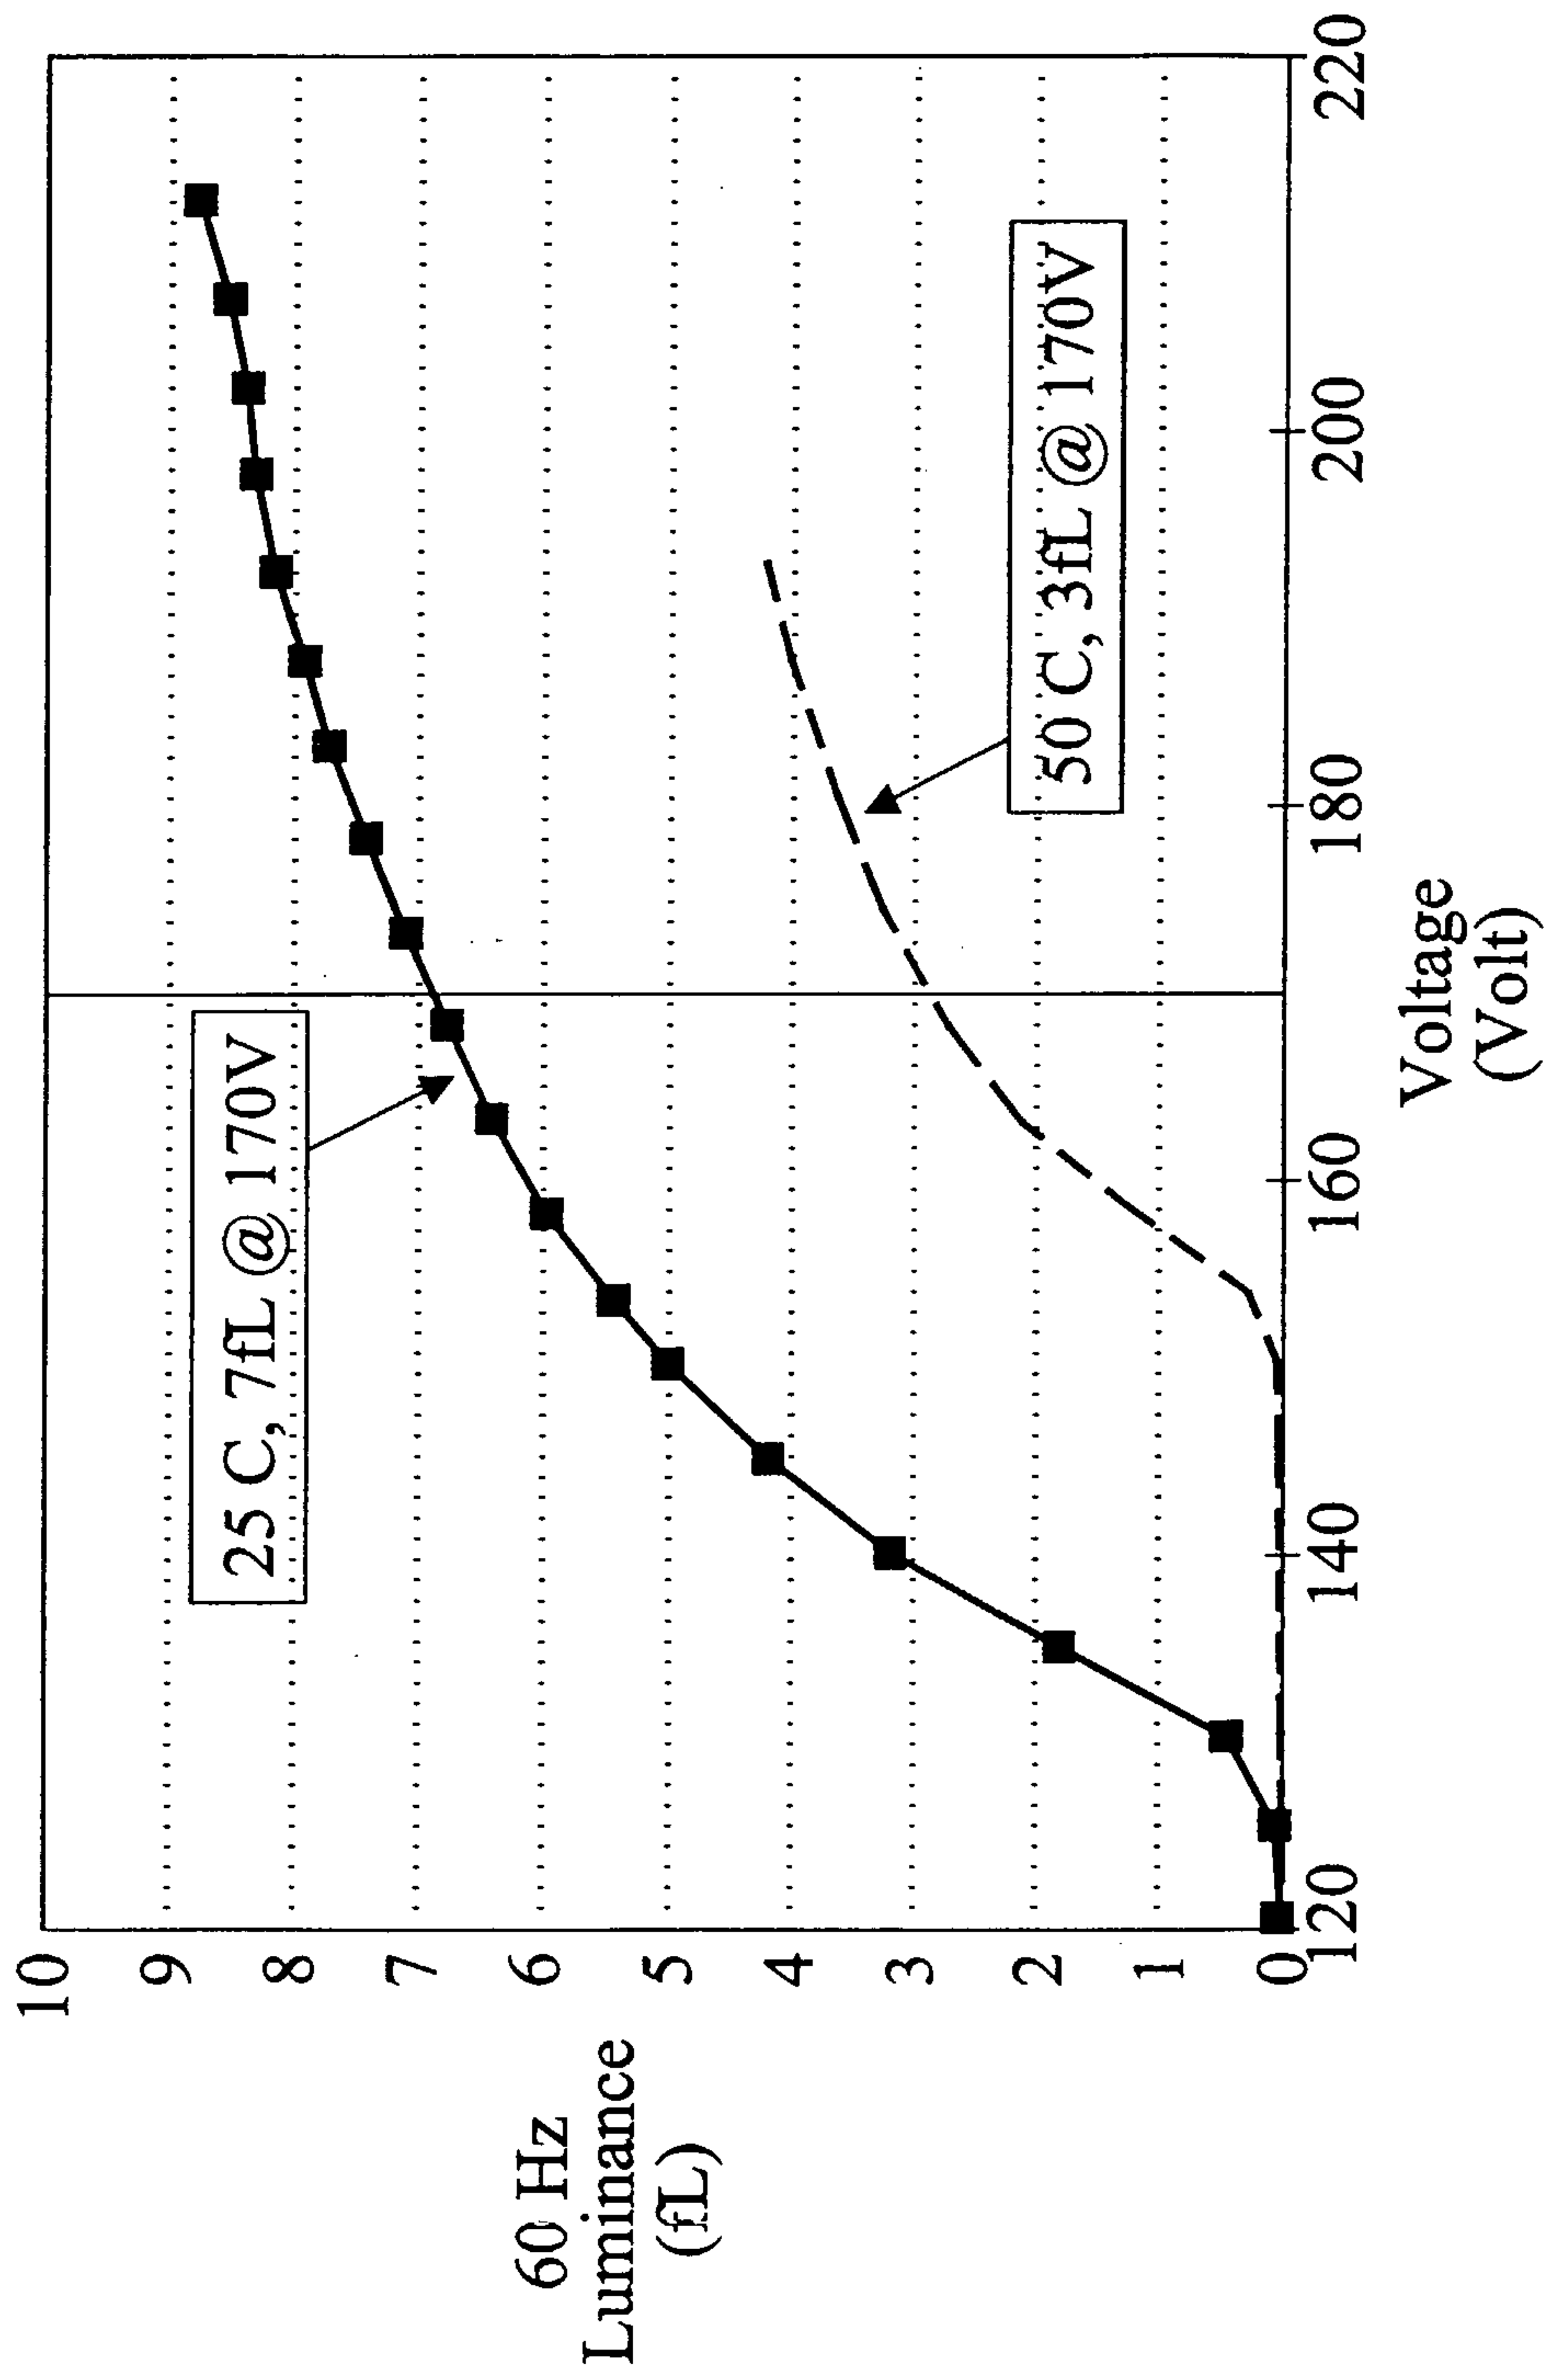


FIG. 1

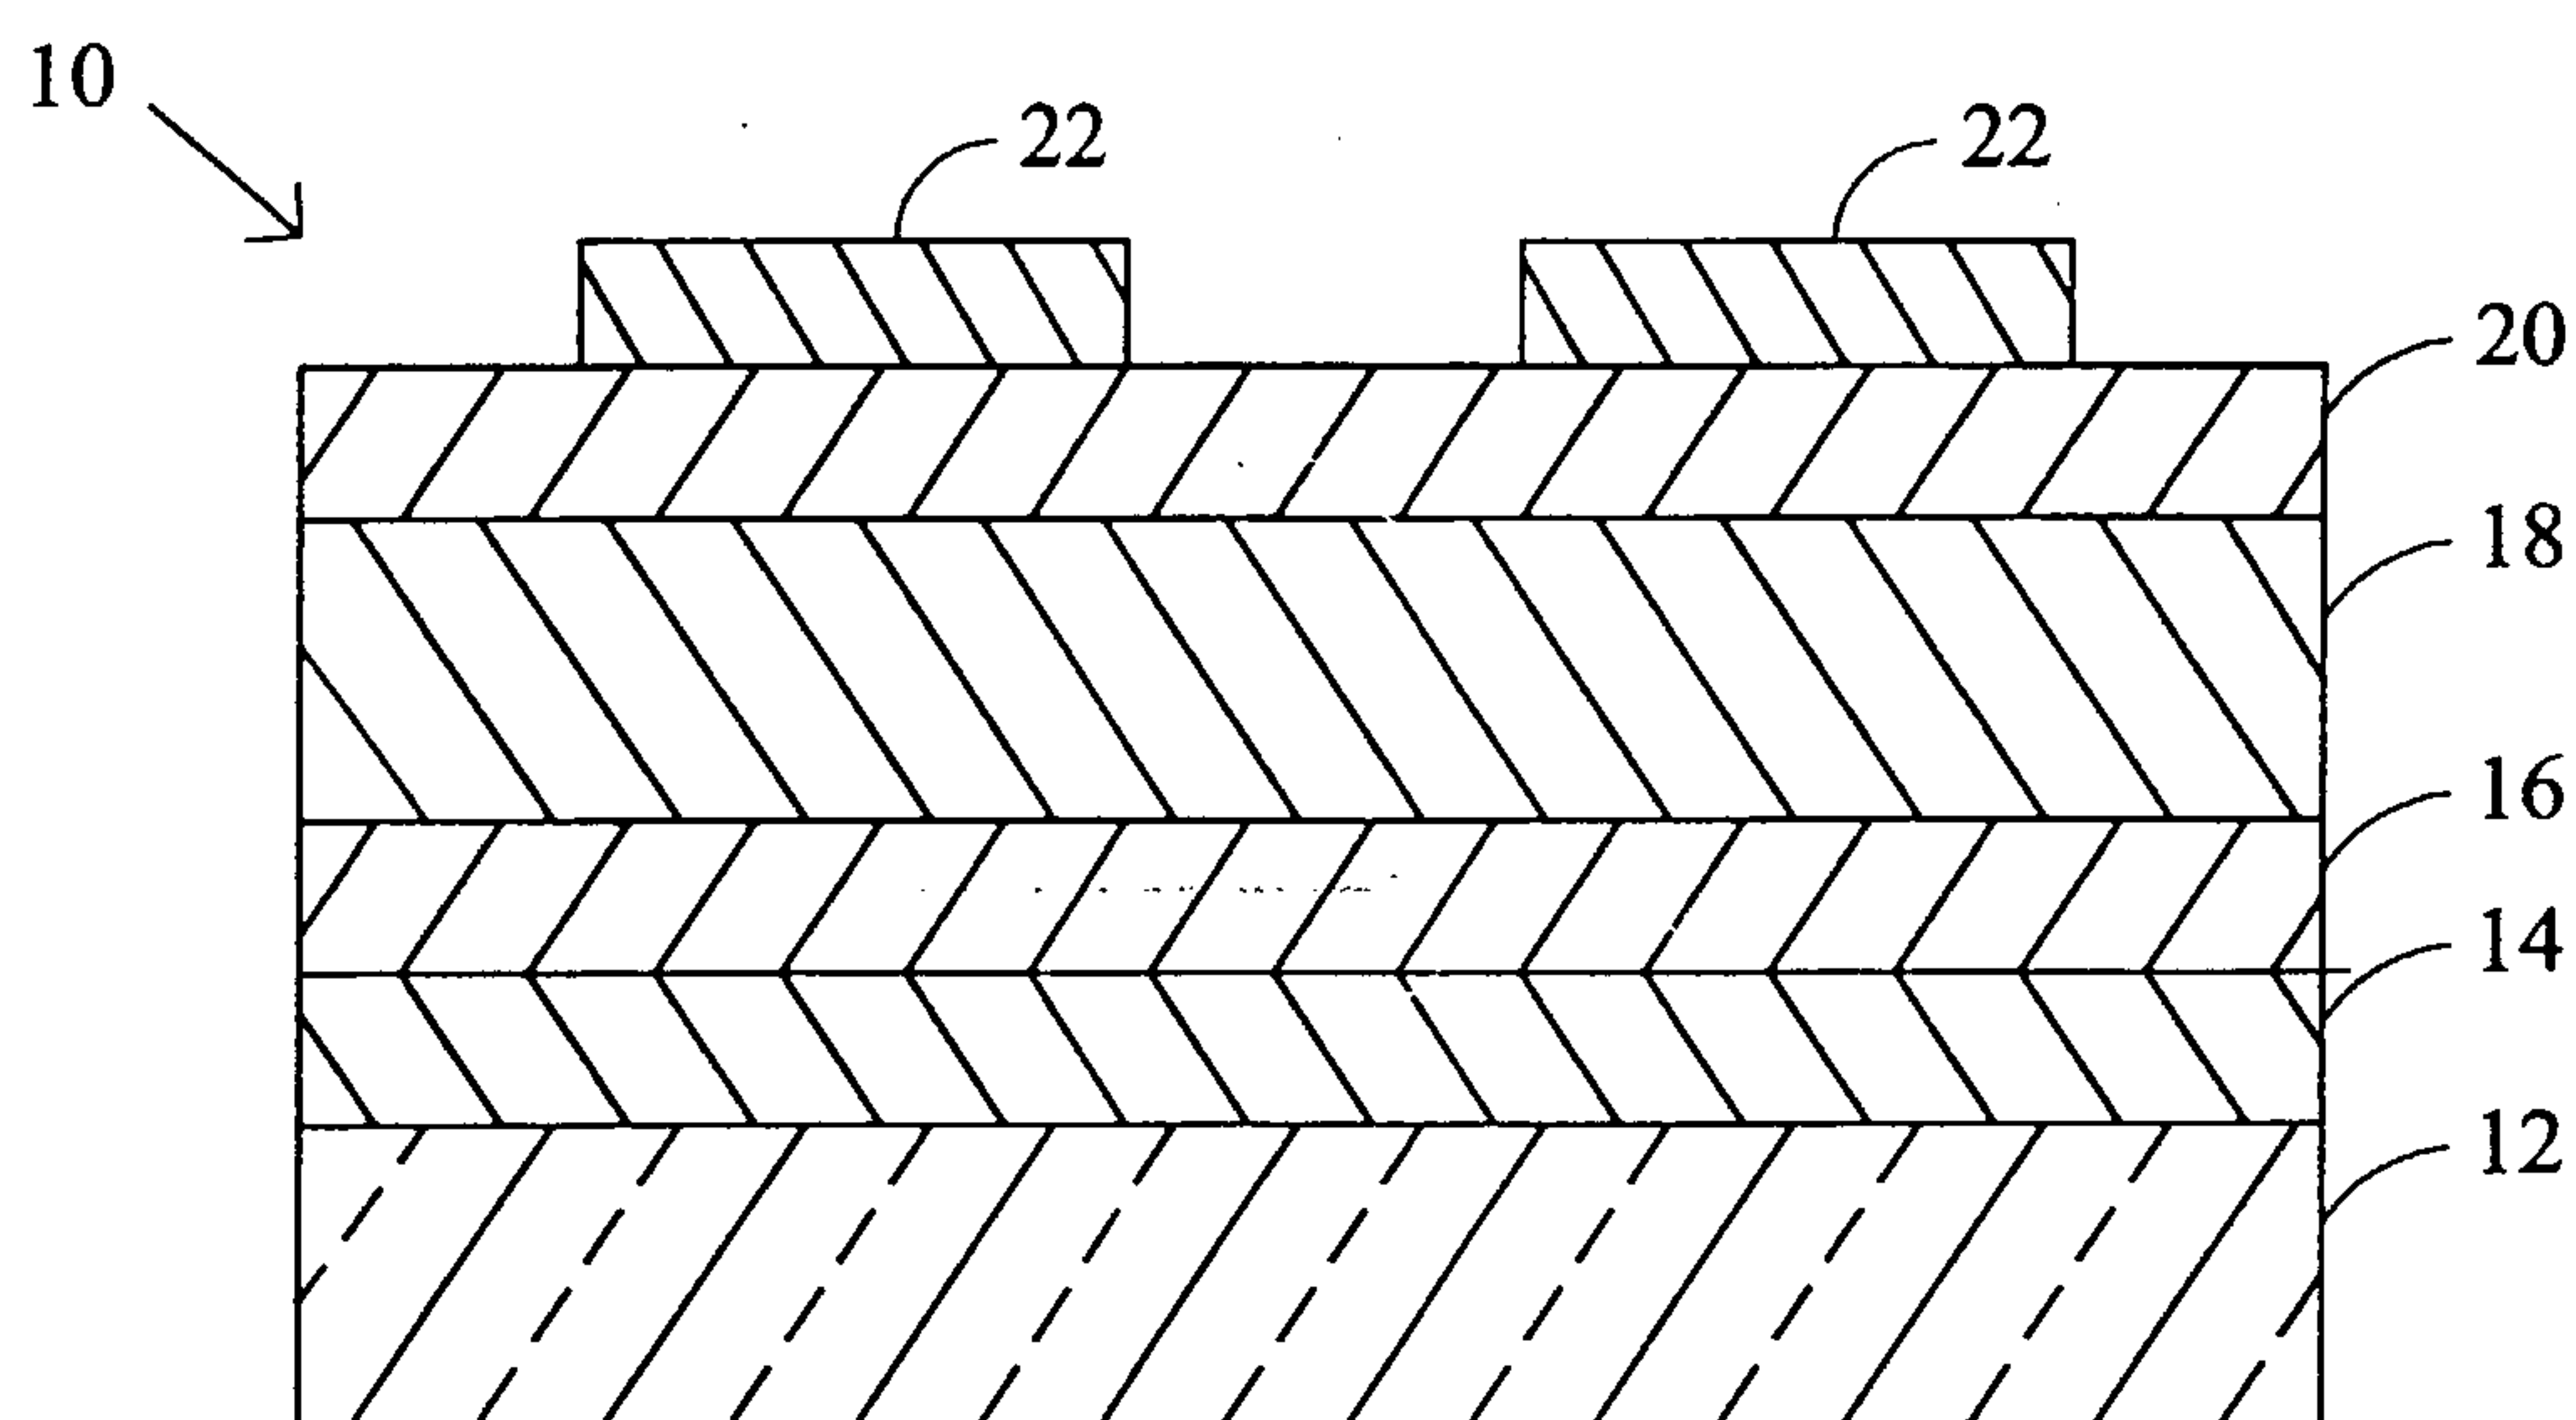


FIG. 2

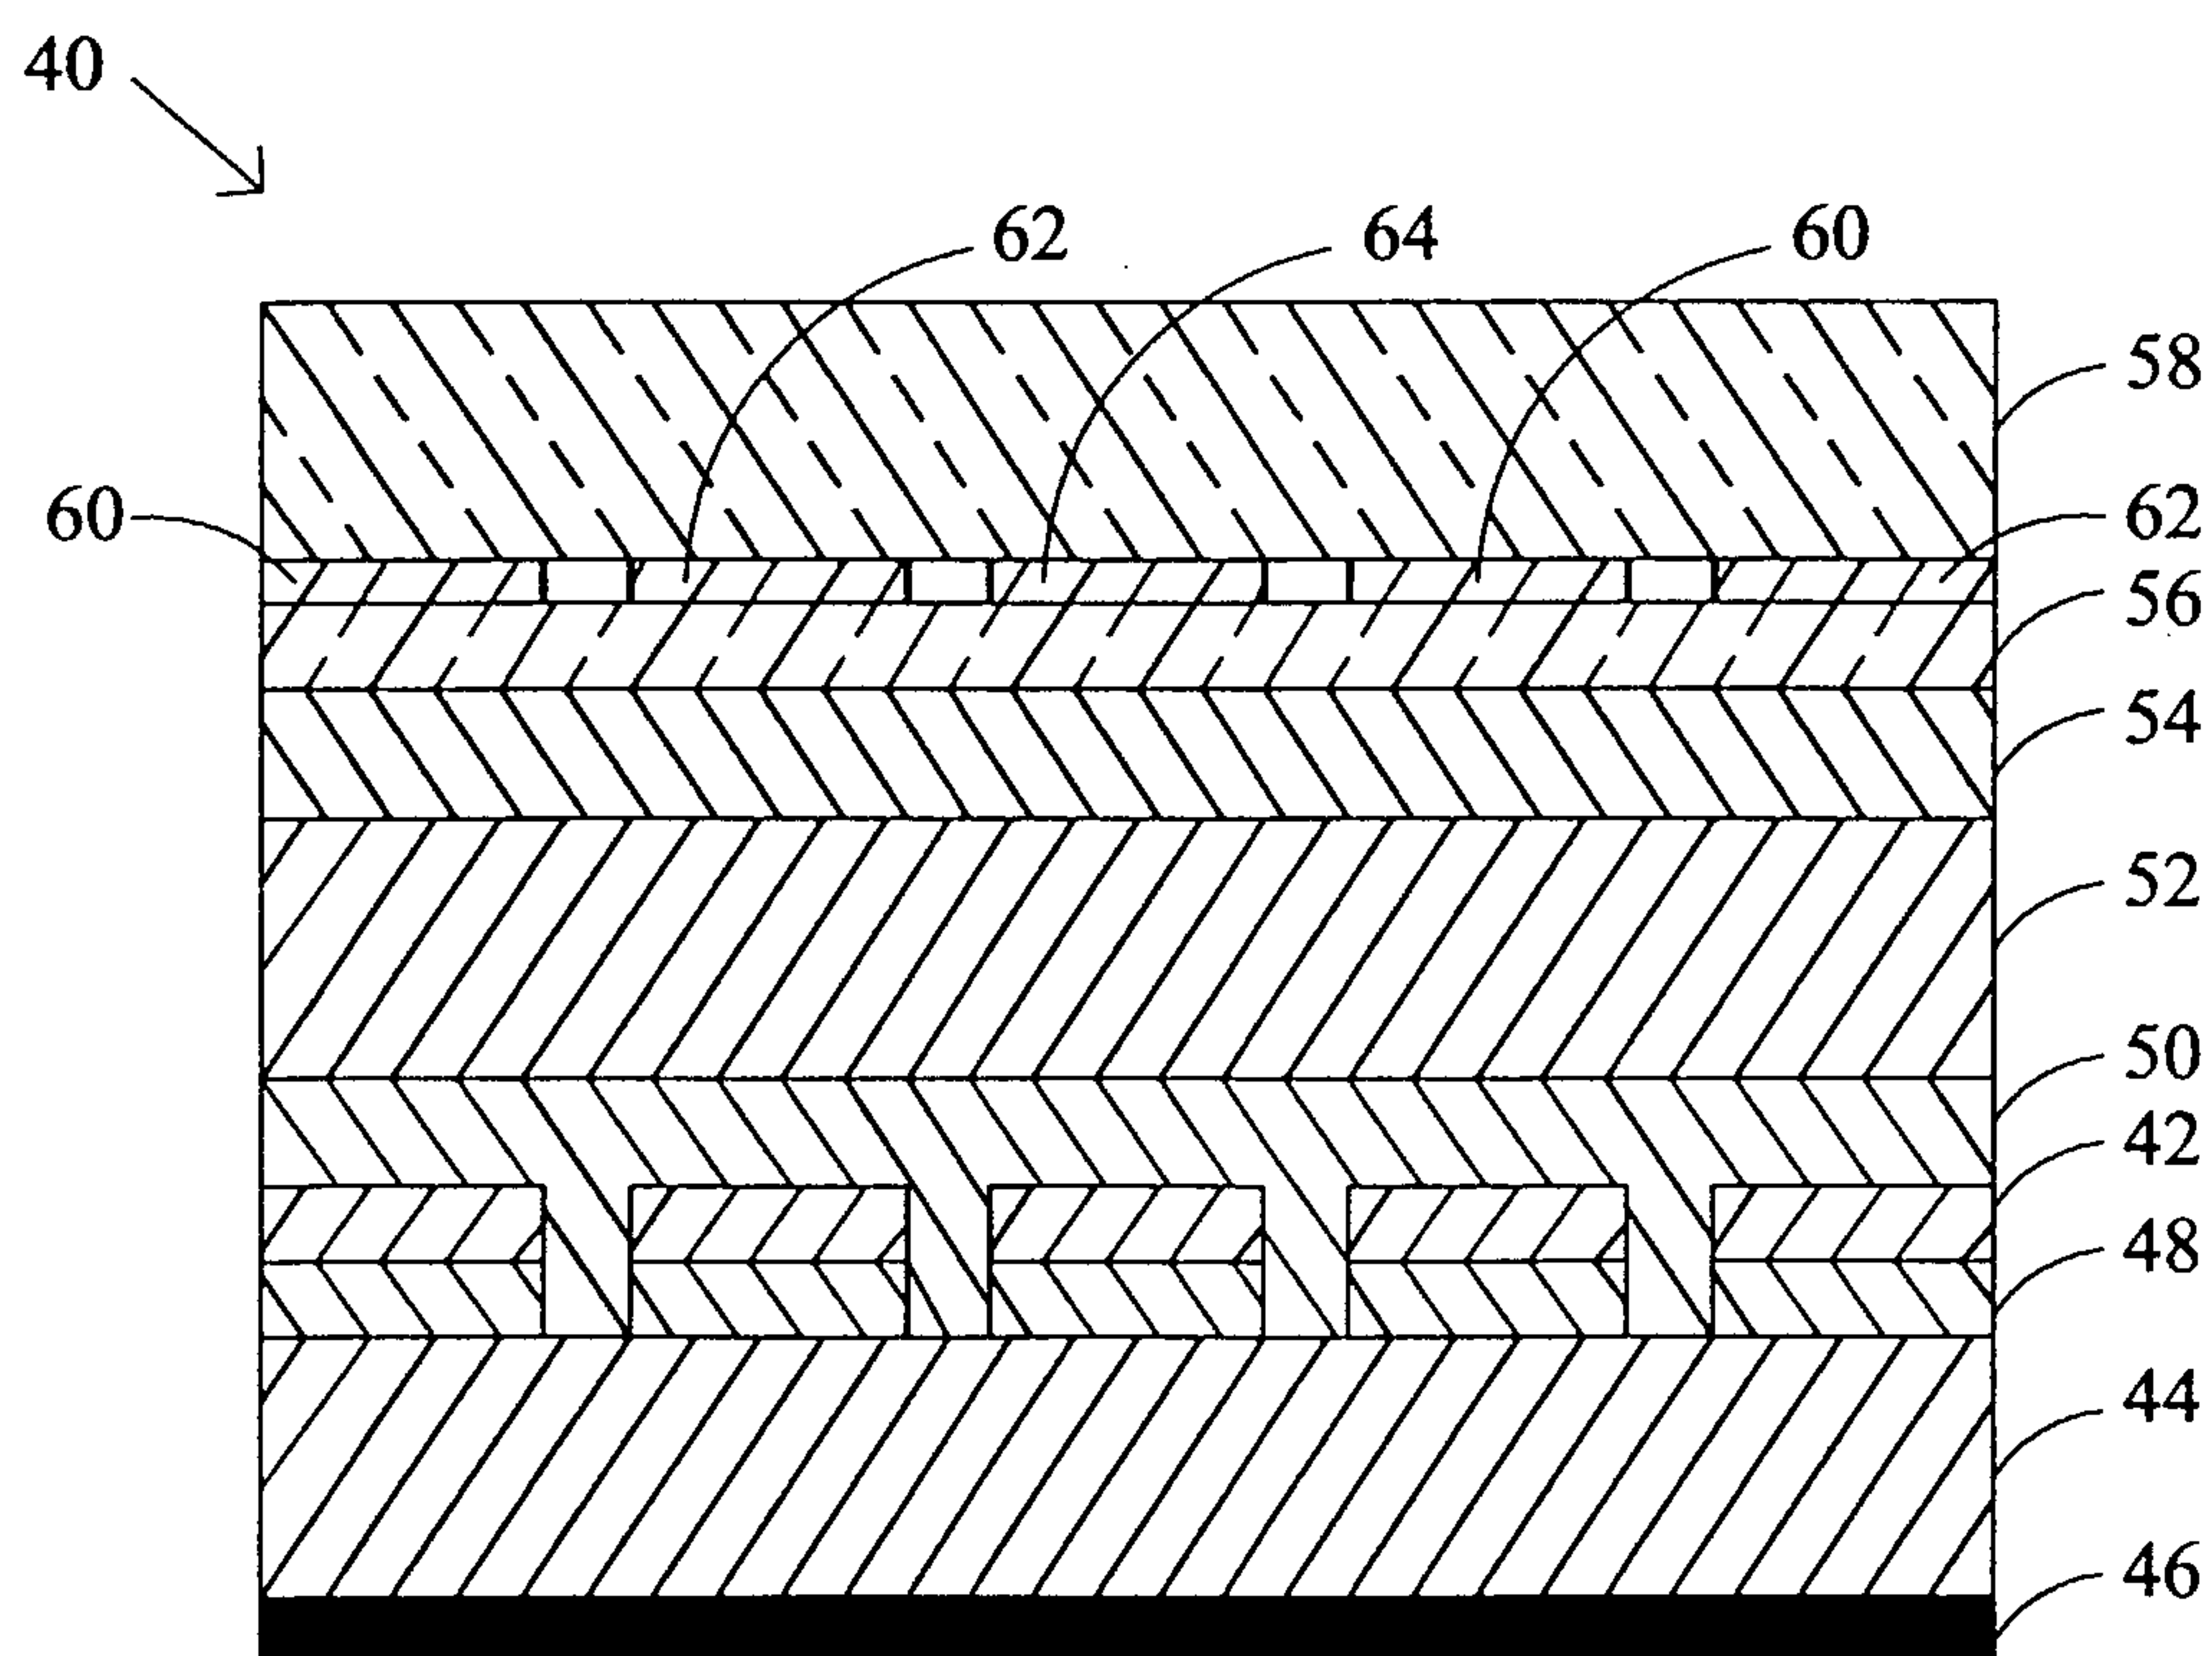


FIG. 2A

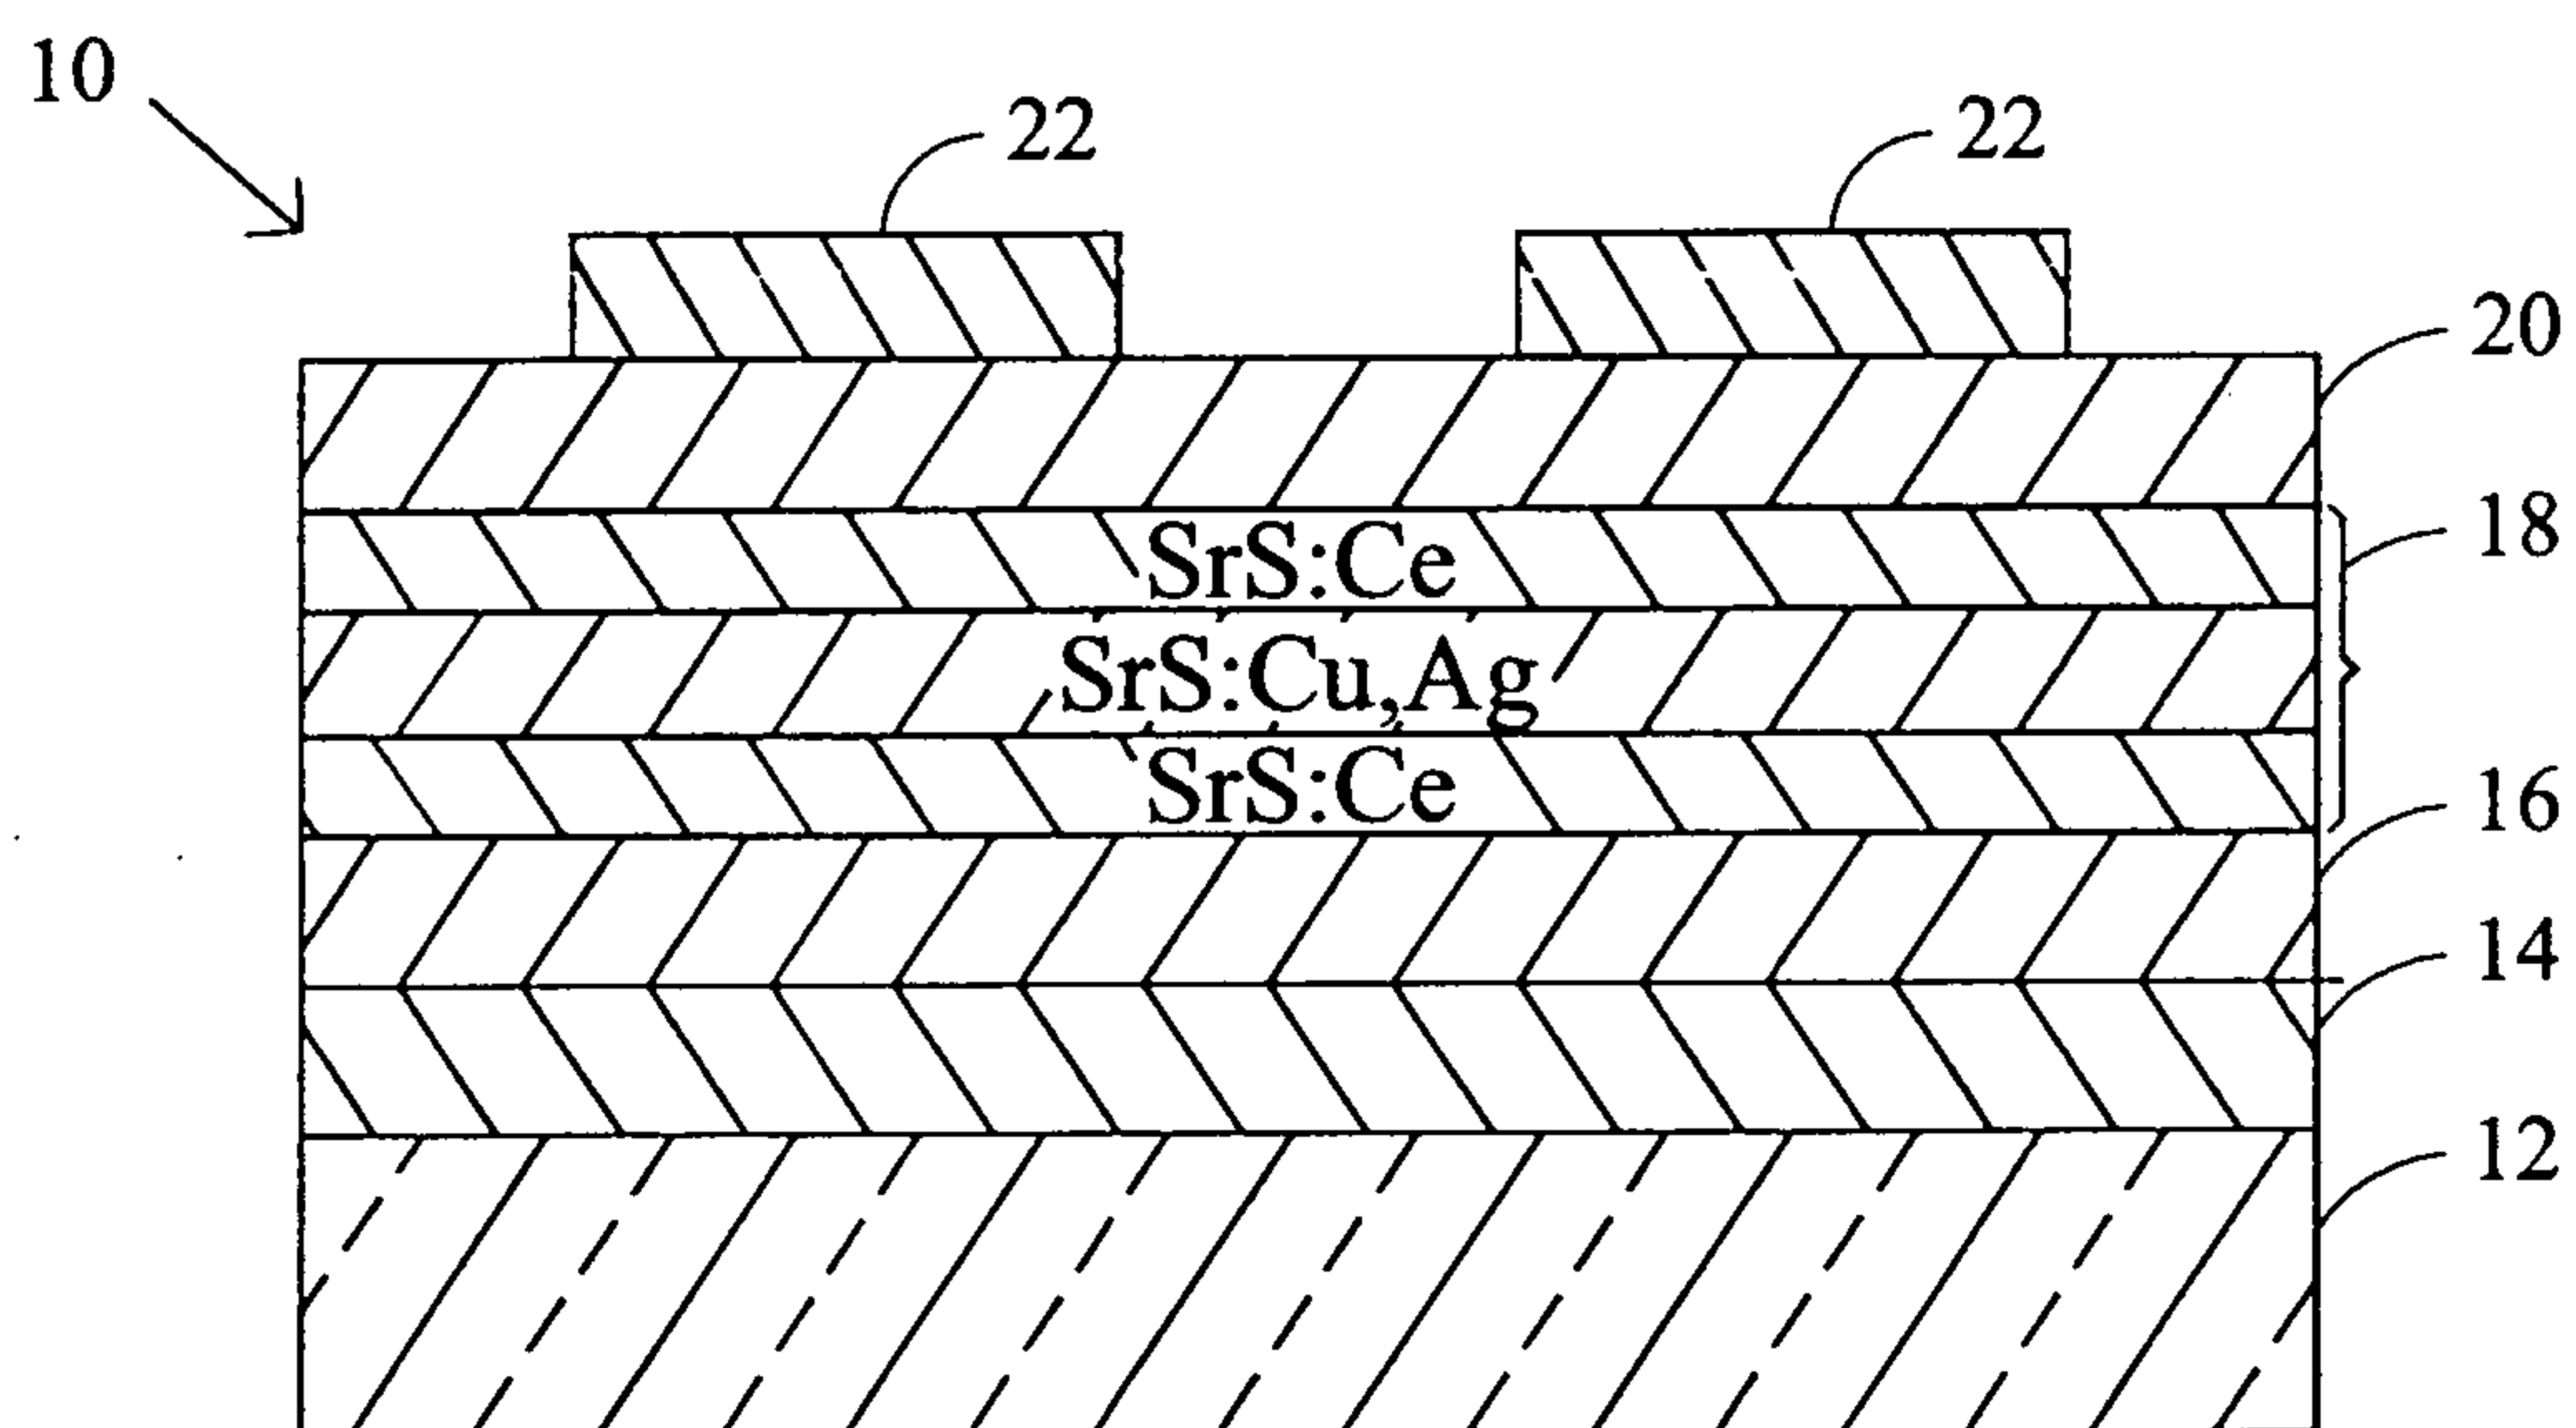


FIG. 4

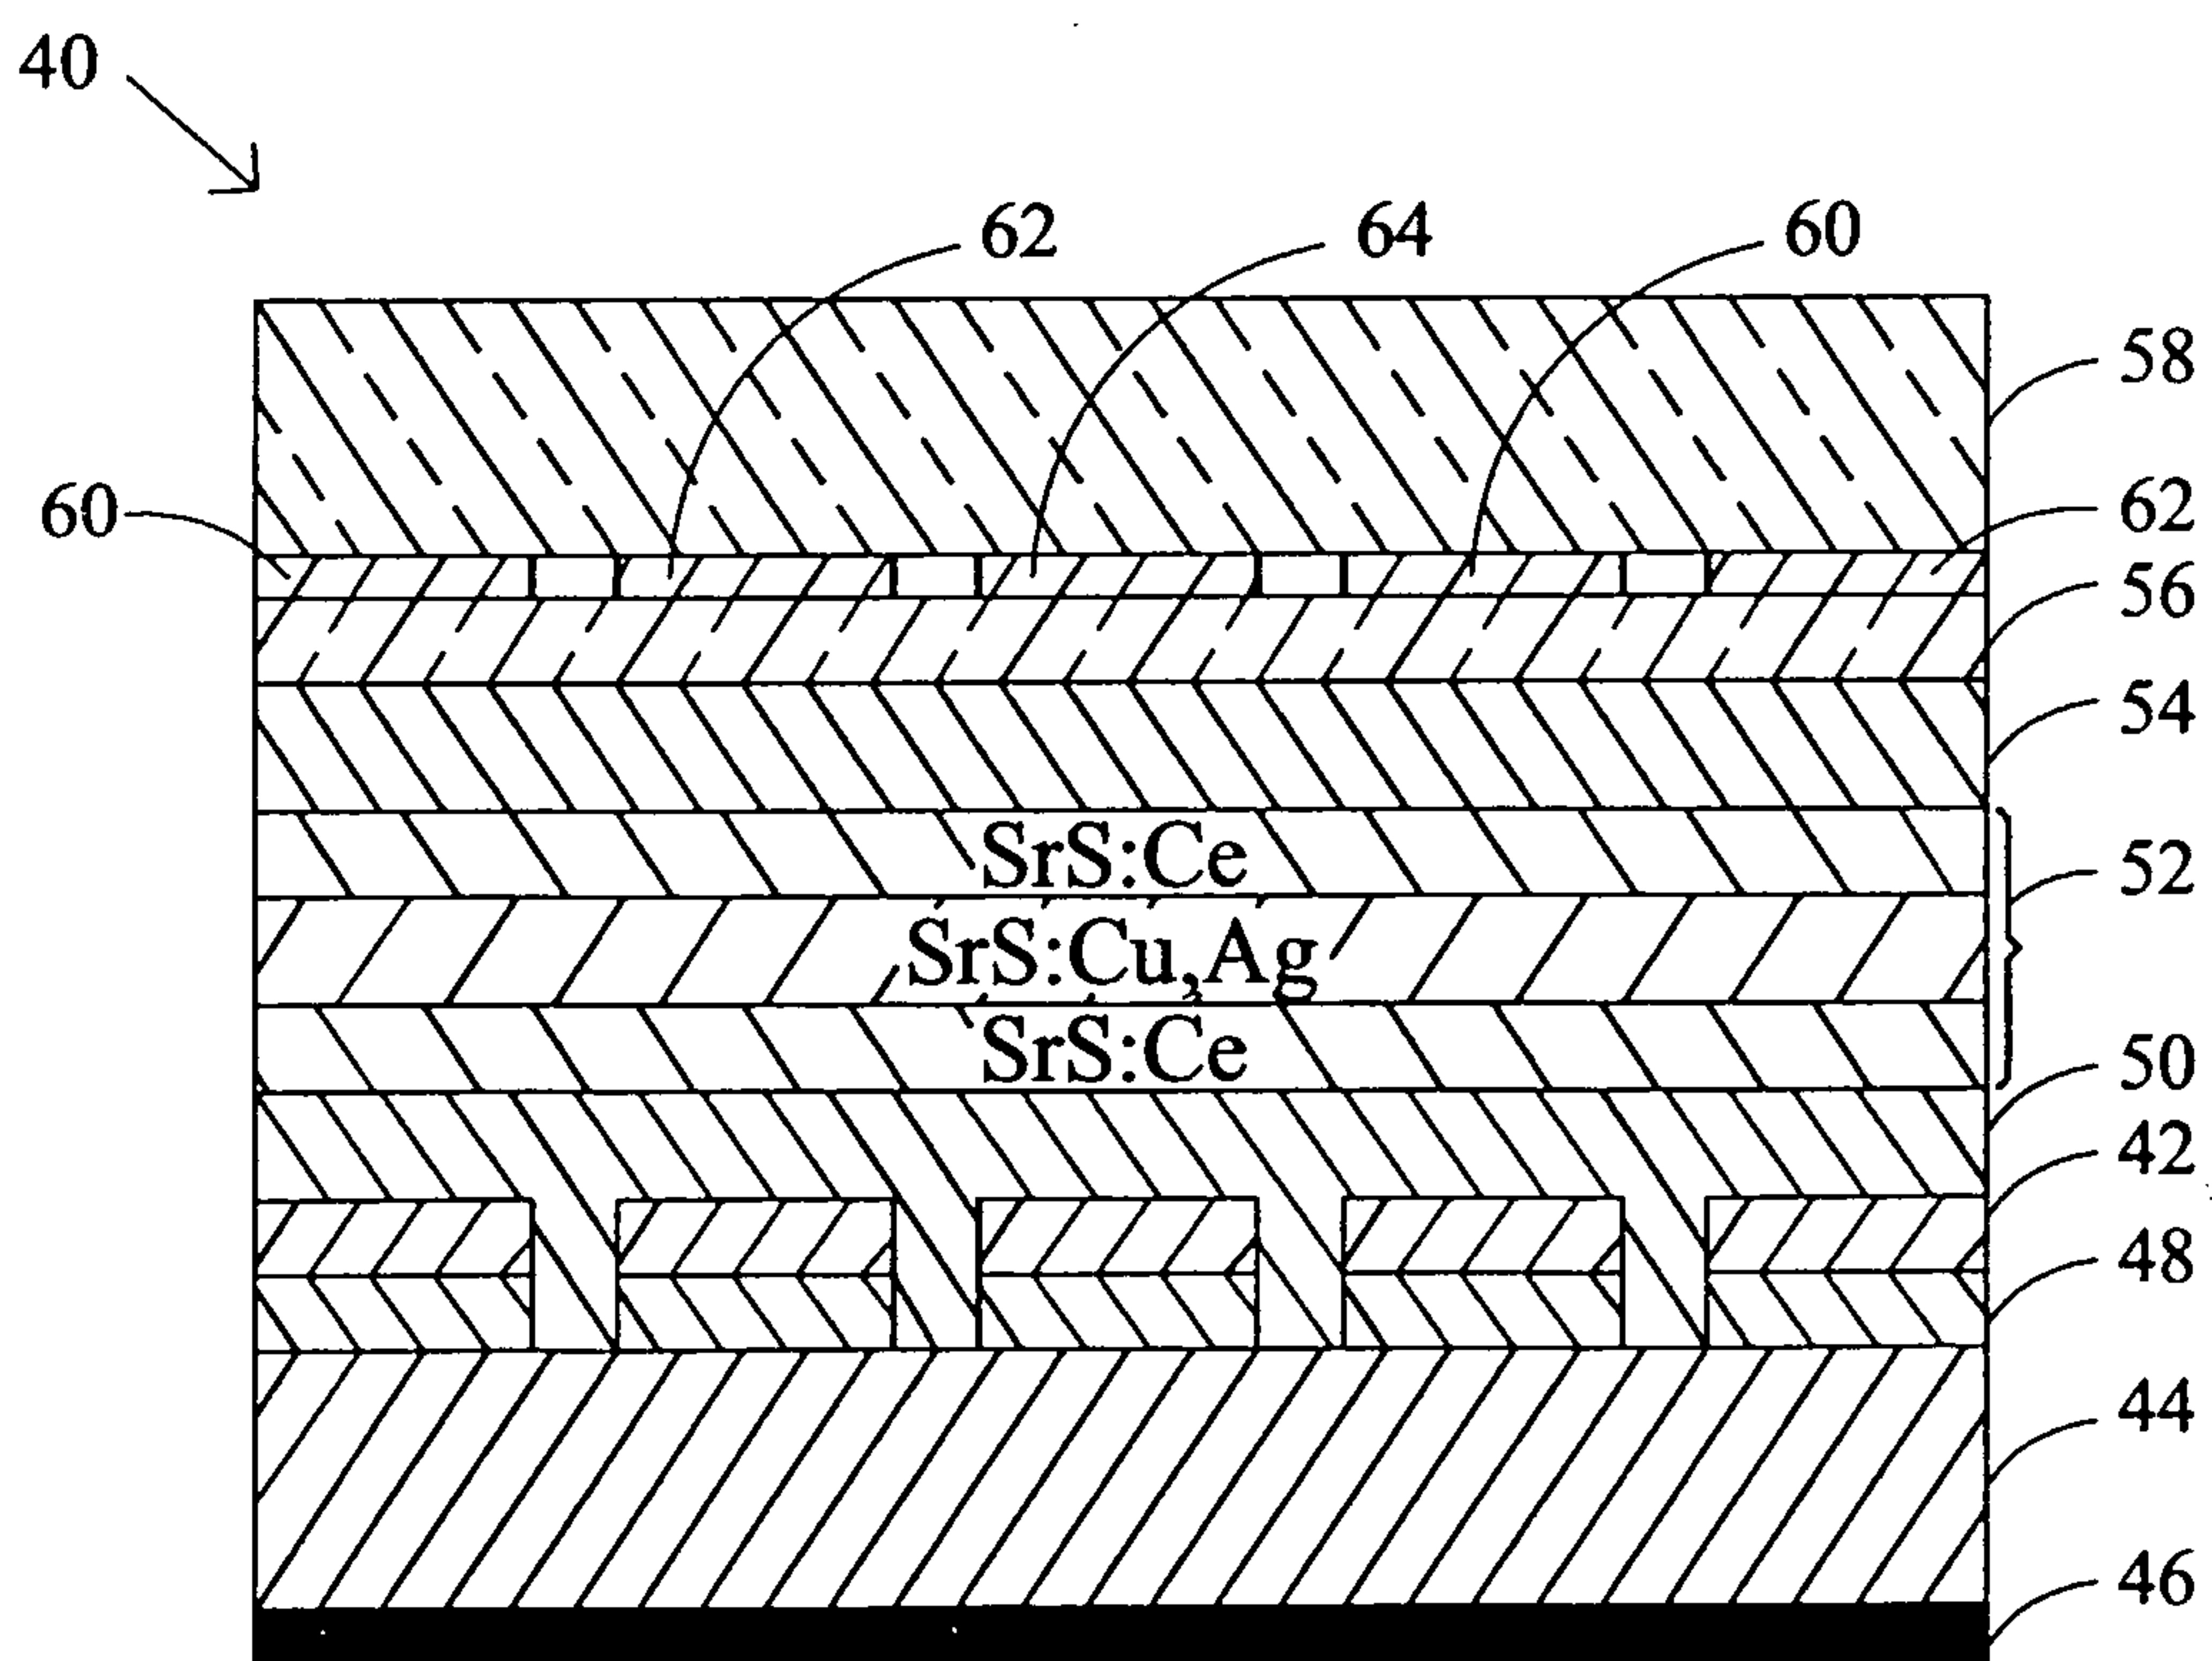


FIG. 4A

Srs:Ce layer	25 °C		50 °C			
	Vth (Volt)	60 Hz L ₄₀ (fL)	Vth (Volt)	Voltage shift	60 Hz L ₄₀ (fL)	% Luminance reduction
None (Control)	142	9.2	167	+25	4.5	-51%
Under	149	12.8	163	+14	9.4	-27%
Over	152	14.9	166	+14	10.6	-27%
Under and Over	159	17.4	163	+4	12.8	-26%

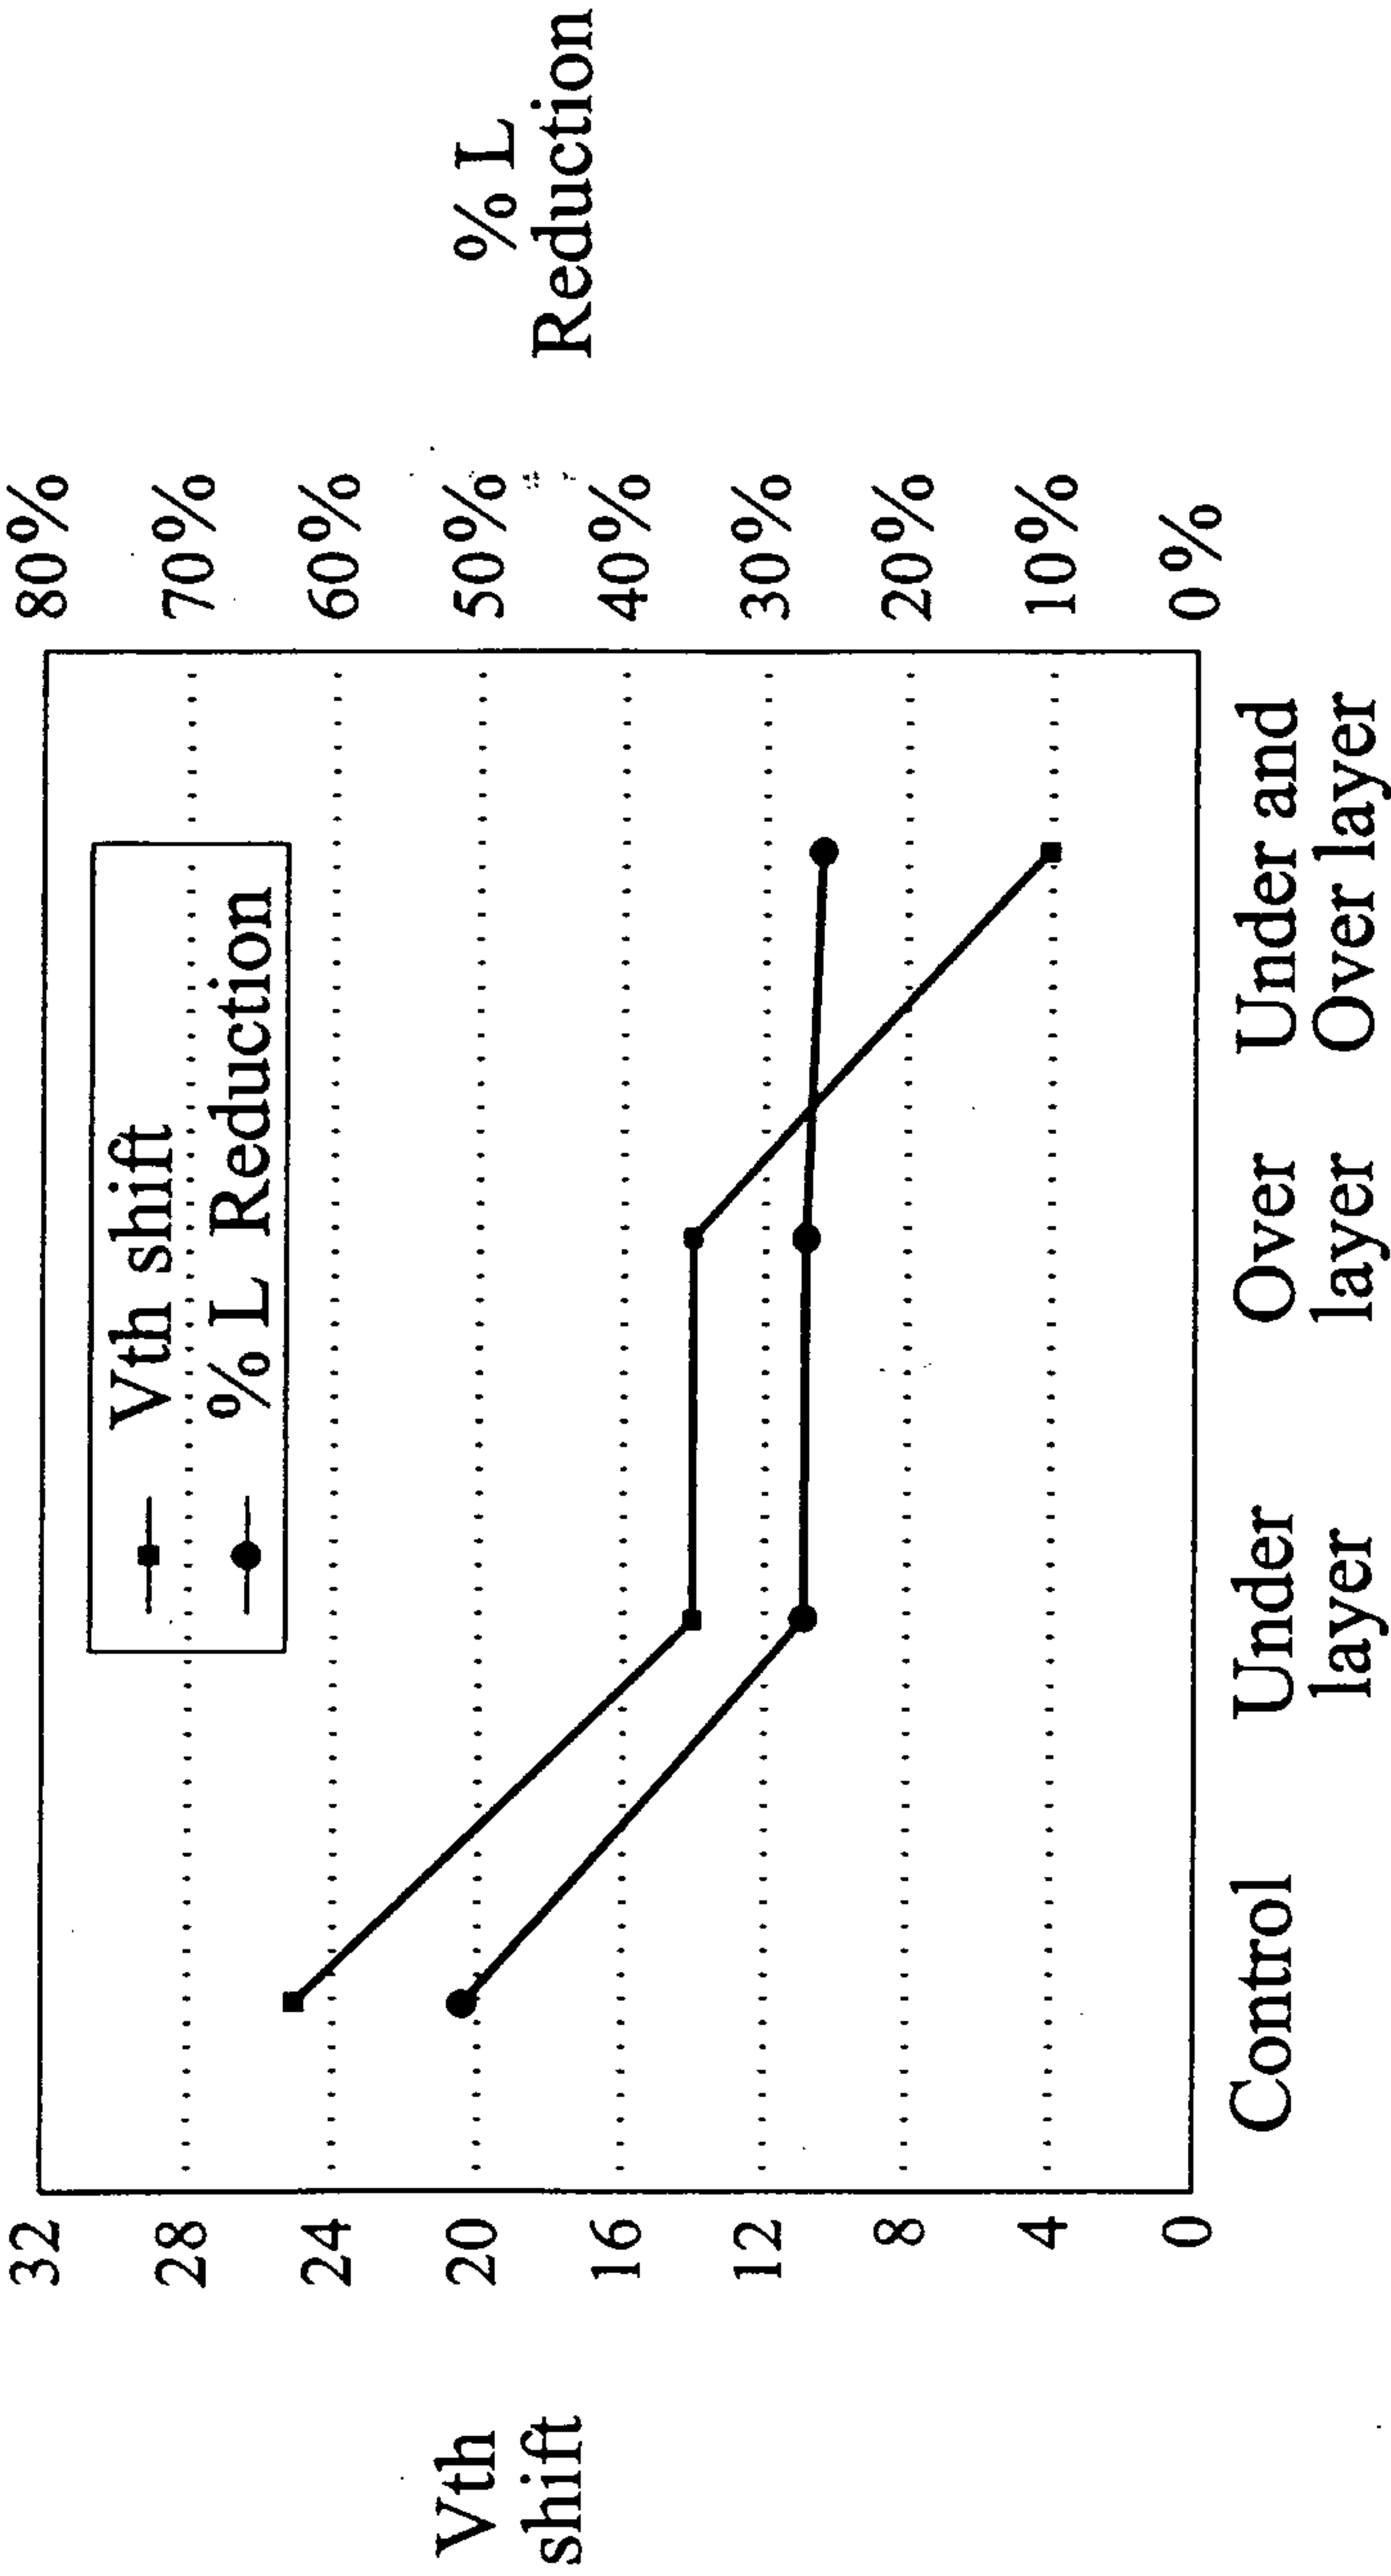


FIG. 5

% of Ce	25 °C		50 °C			
	Vth (Volt)	60 Hz L ₄₀ (fL)	Vth (Volt)	Voltage shift	60 Hz L ₄₀ (fL)	% Luminance reduction
None (Control)	142	9.2	167	+25	4.5	-51%
0.010%	144	6.6	160	+16	4.7	-29%

FIG. 3

Srs:Ce layer	Vth (Volt)	60 Hz L ₄₀ (fL)	E ₄₀ (lm/W)	Q ₄₀ (uQ/cm ²)	CIE x	CIE y
None	142	9.2	0.25	1.90	0.176	0.166
Underlayer only	149	12.8	0.25	2.73	0.184	0.253
Overlay only	152	14.6	0.23	2.73	0.184	0.244
Under and Overlay	159	17.4	0.33	2.79	0.190	0.266

FIG. 6

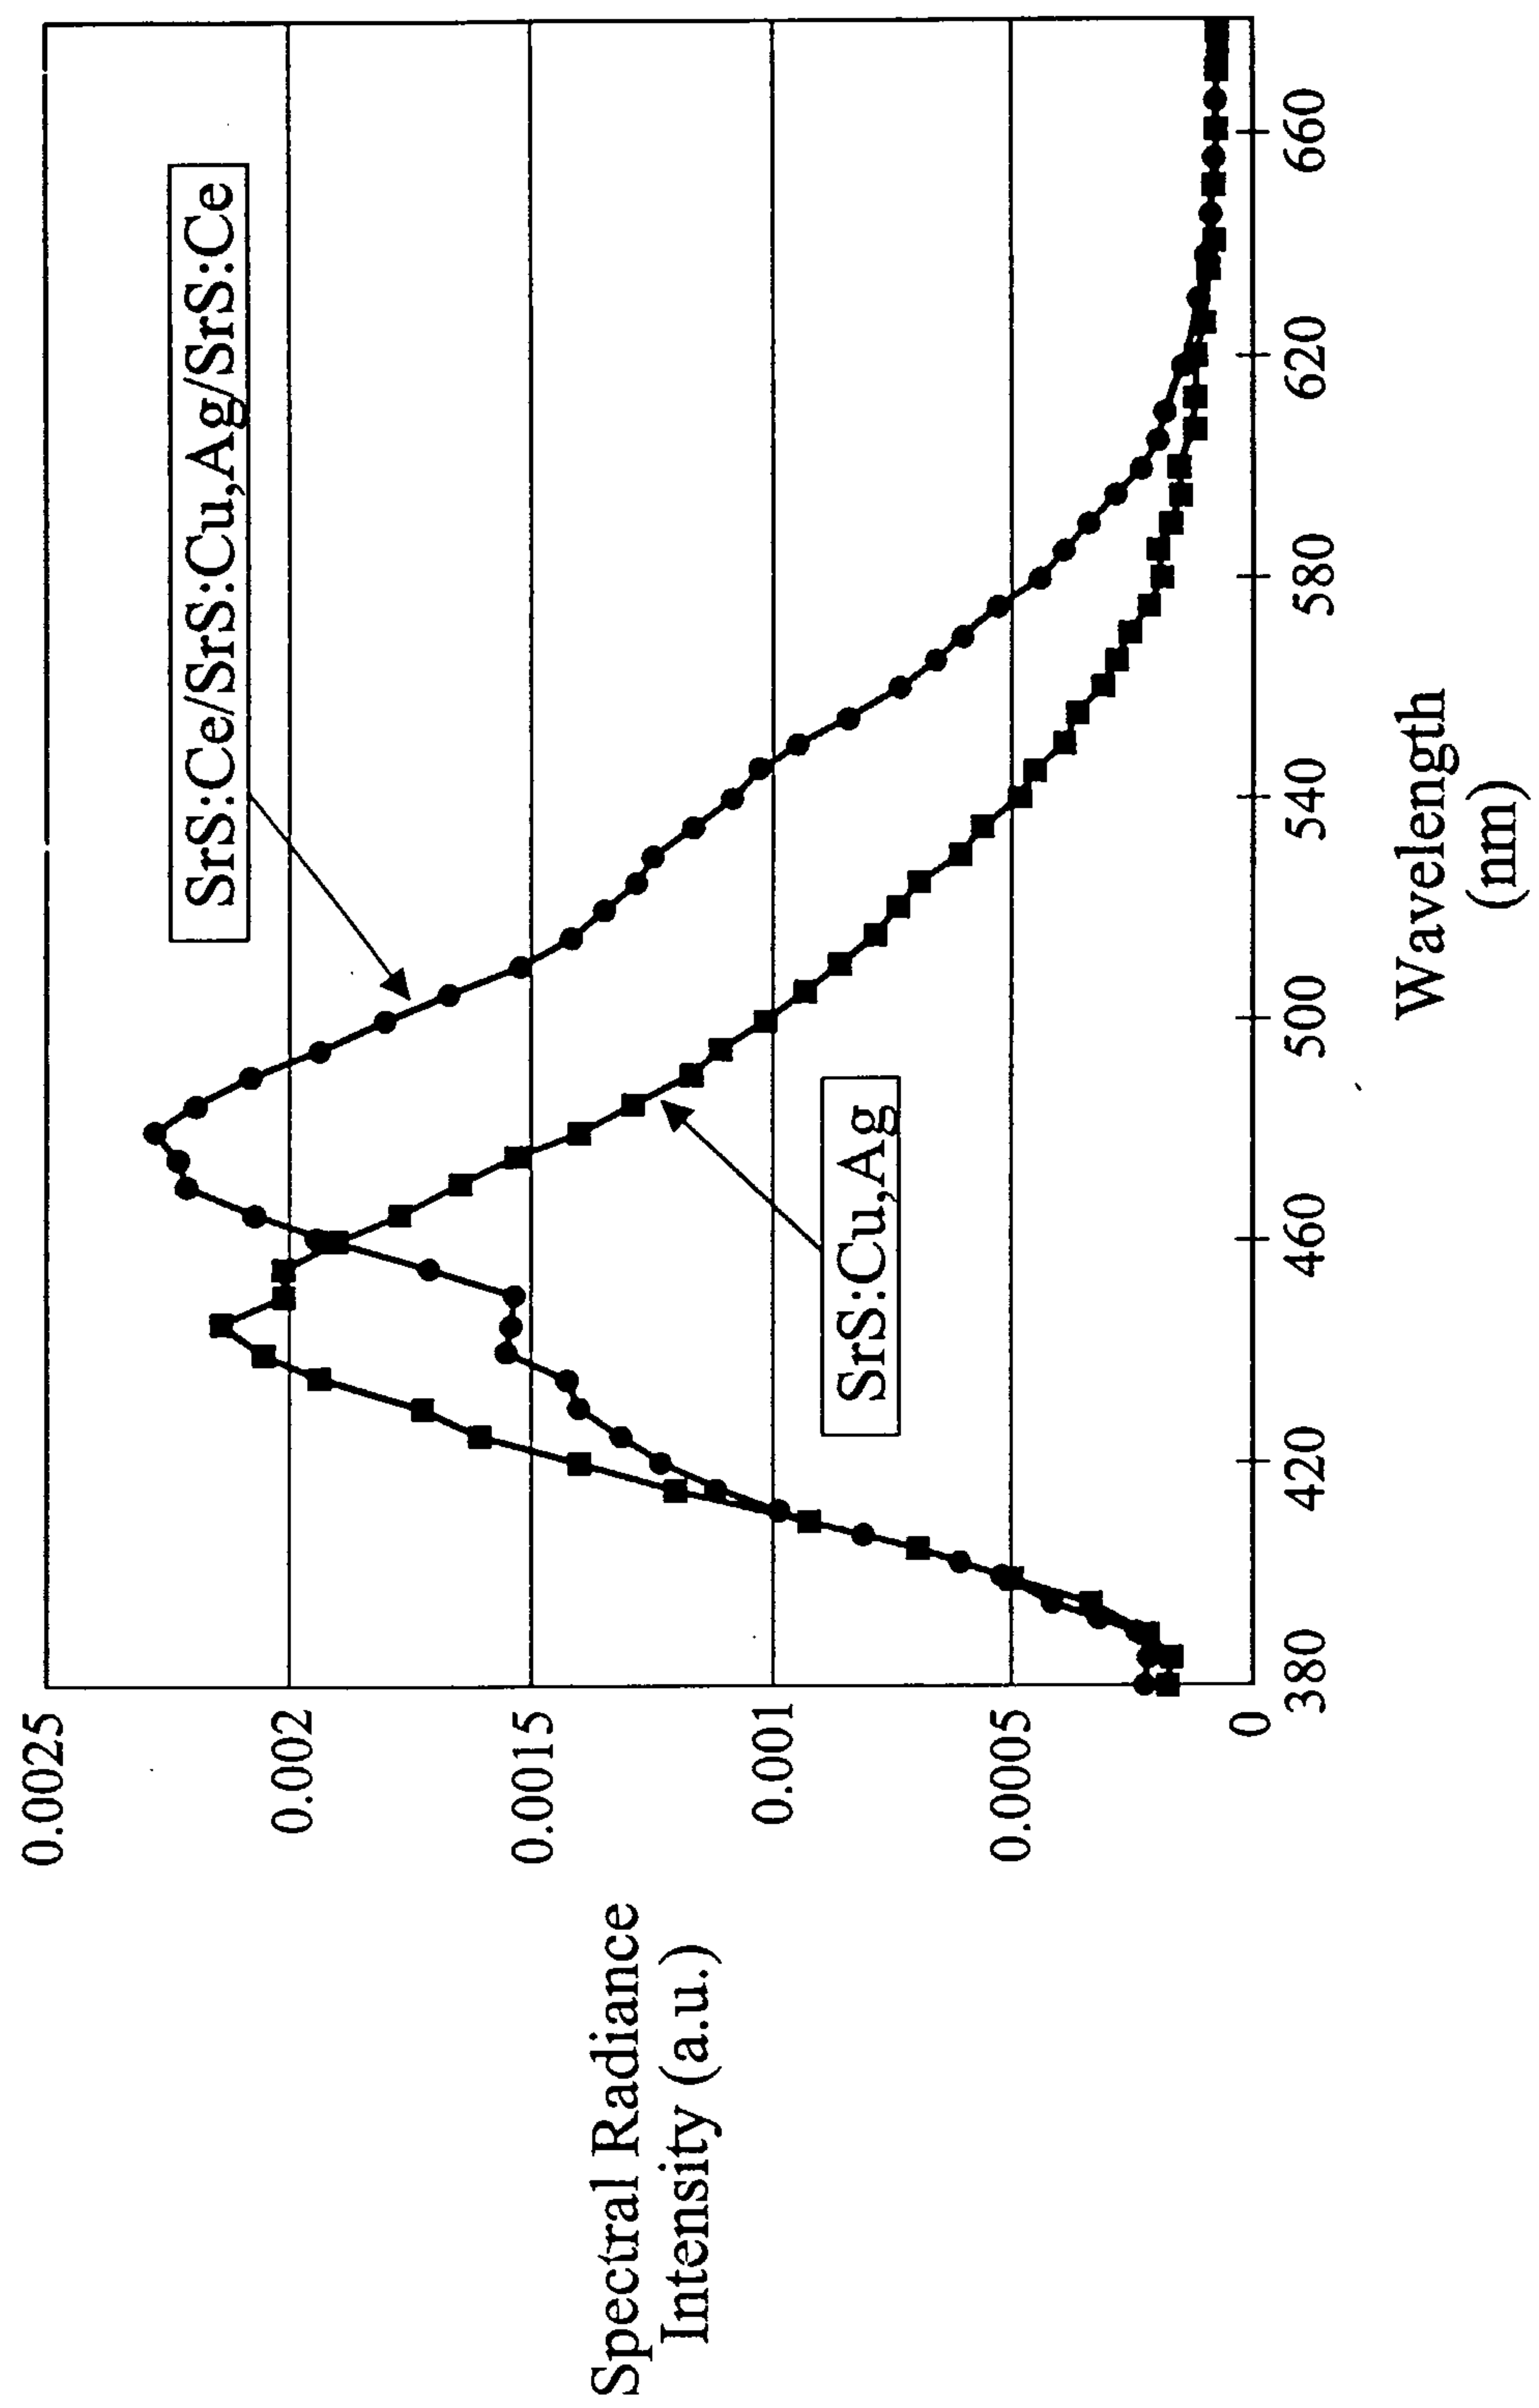


FIG. 7

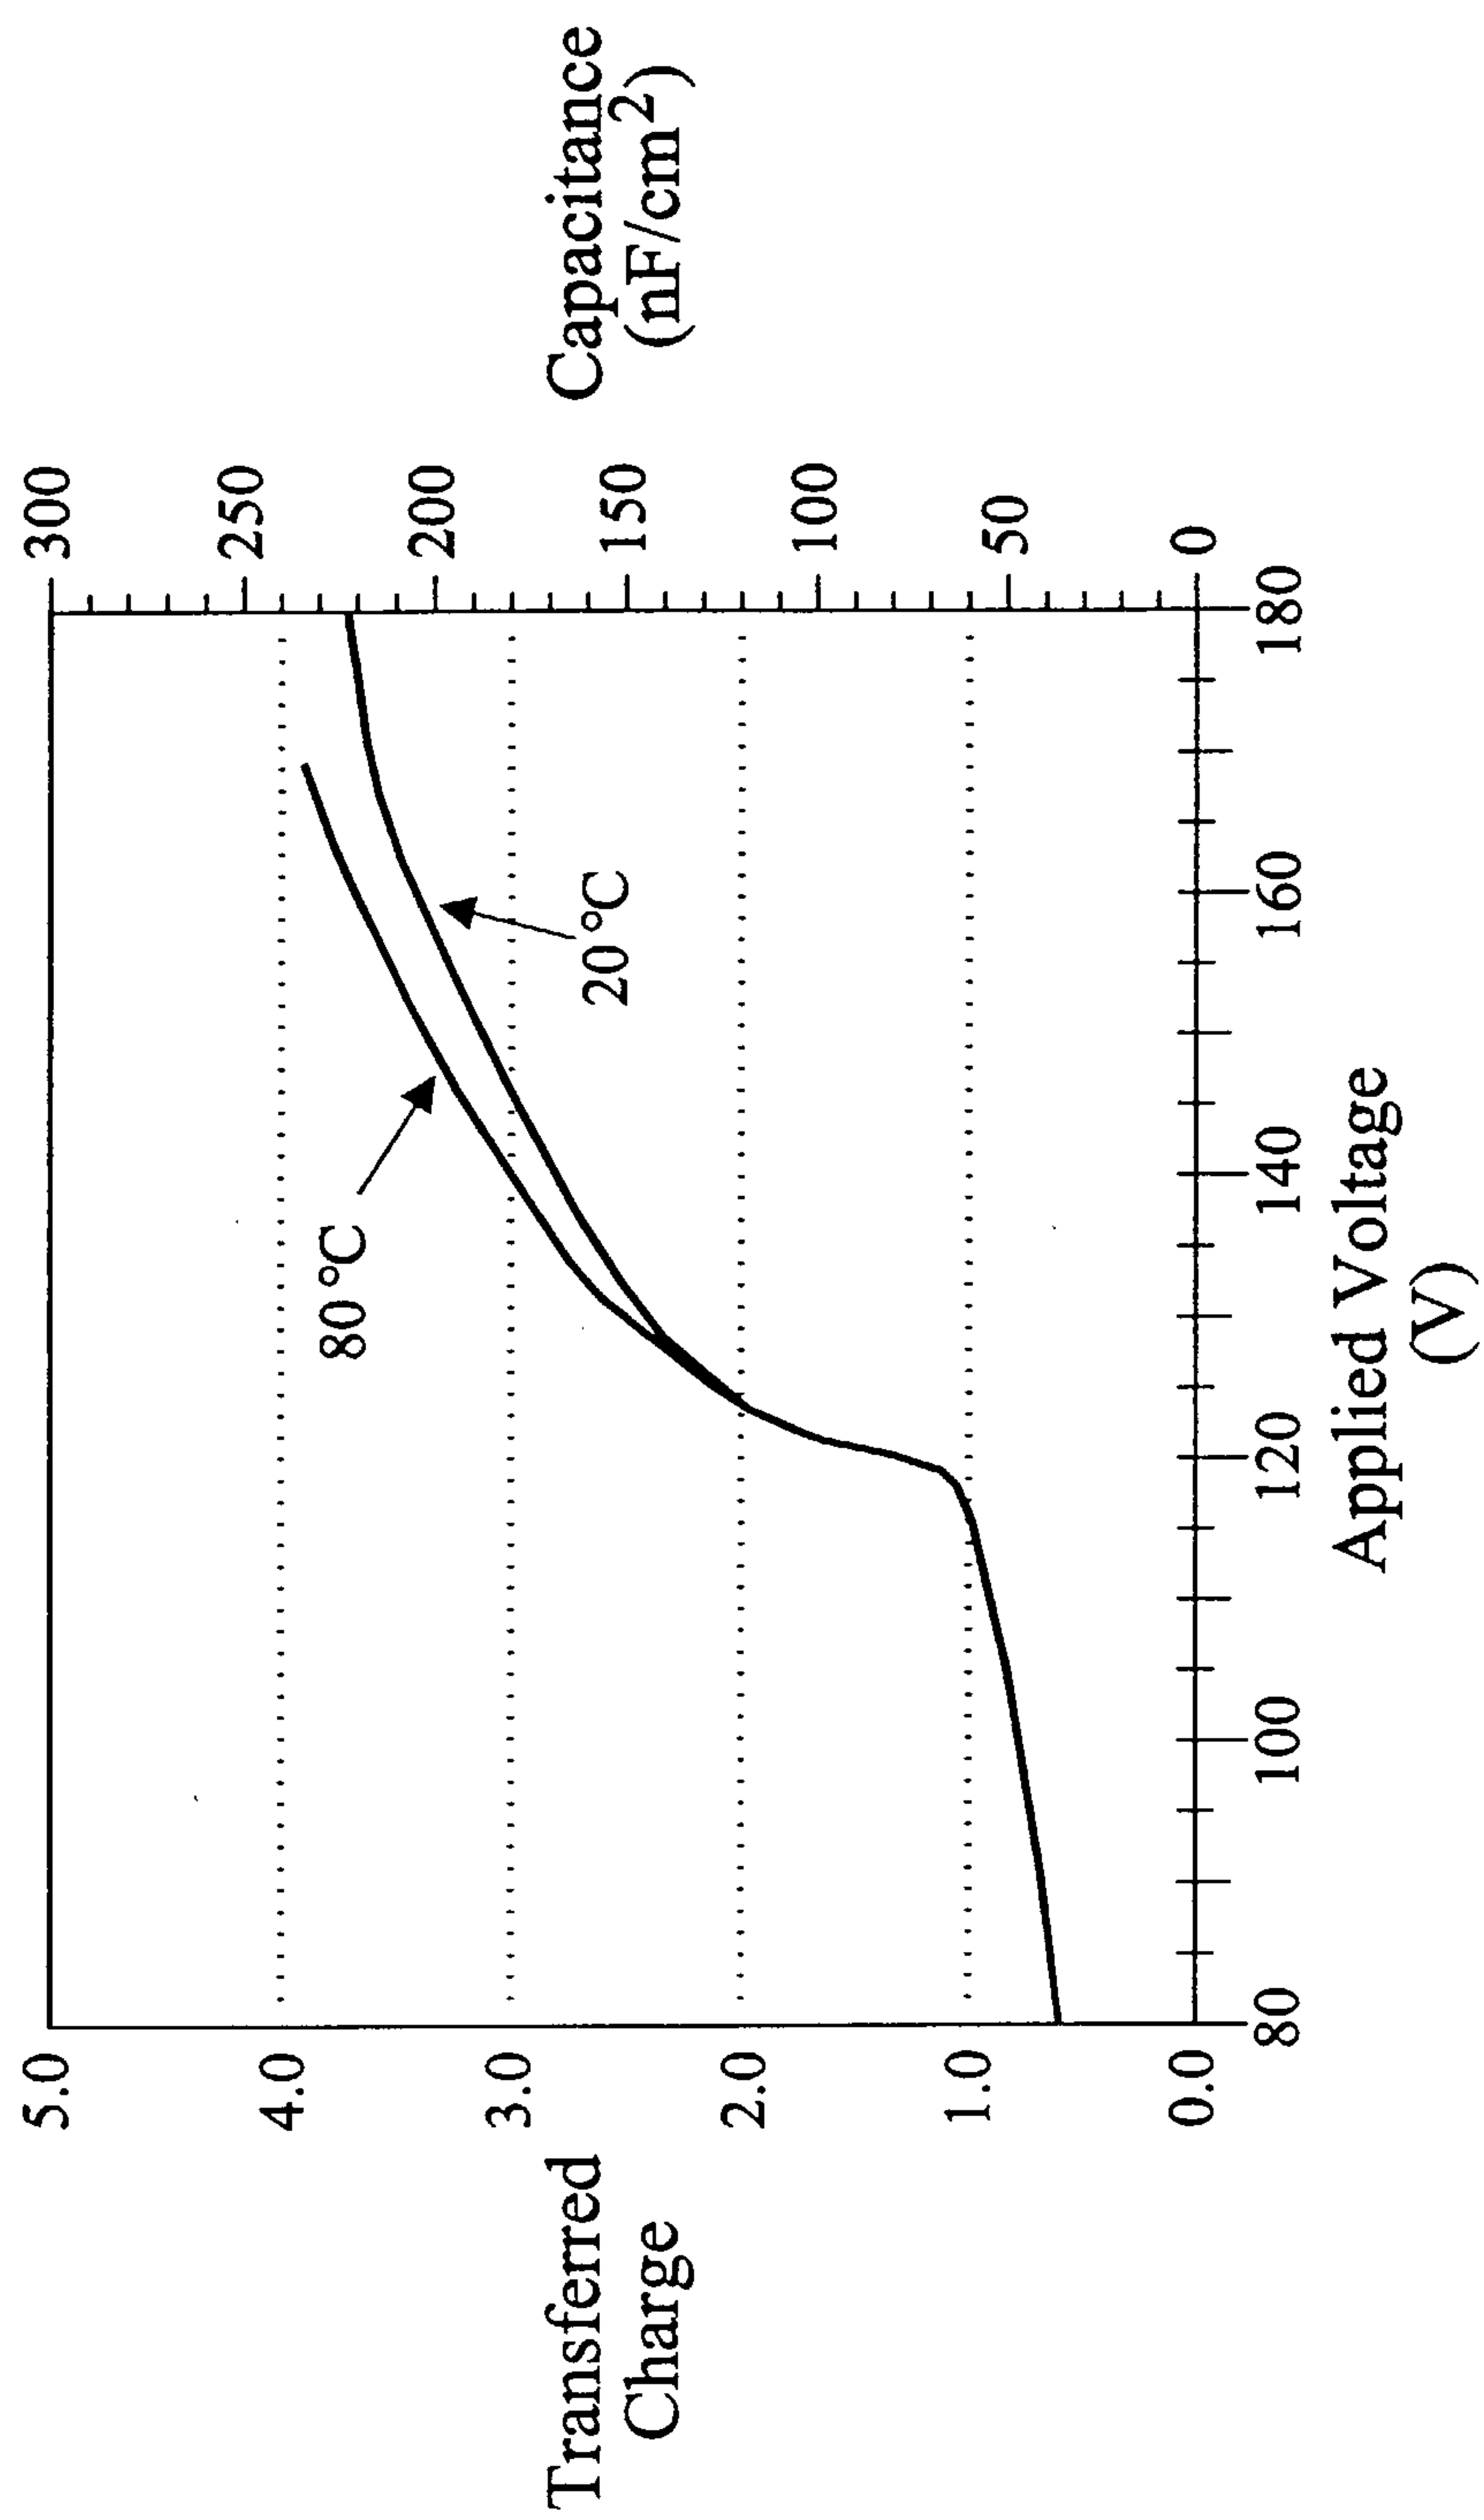


FIG. 8

