

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 October 2000 (05.10.2000)

PCT

(10) International Publication Number
WO 00/58099 A1

(51) International Patent Classification⁷: B41J 2/155, 2/515 (72) Inventors; and
 (75) Inventors/Applicants (for US only): BELIVEAU, Paul [US/US]; Box 176, RR2, Walpole, NH 03608 (US). HOISINGTON, Paul [US/US]; 179 Beaver Meadow Road, Norwich, VT 05055 (US). HINE, Nathan [US/US]; 169 Alger Brook Road, S. Strafford, VT 05 (US). GROSE, David [US/US]; 160 Lyme Road, Hanover, NH 03755 (US). LAASPERE, Jaan [US/US]; 95 Upper Pasture, Norwich, VT 05055 (US).

(21) International Application Number: PCT/US00/07901 (74) Agent: FEIGENBAUM, David, L.; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).

(22) International Filing Date: 23 March 2000 (23.03.2000) (81) Designated States (national): CA, JP, US.

(25) Filing Language: English (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(26) Publication Language: English

(30) Priority Data: 09/277,443 26 March 1999 (26.03.1999) US


(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
 US 09/277,443 (CON)
 Filed on 26 March 1999 (26.03.1999)

(71) Applicant (for all designated States except US): SPEC-TRA, INC. [US/US]; 88 Etna Road, Hanover, NH 03755 (US).

Published:
 — with international search report

[Continued on next page]

(54) Title: SINGLE-PASS INKJET PRINTING

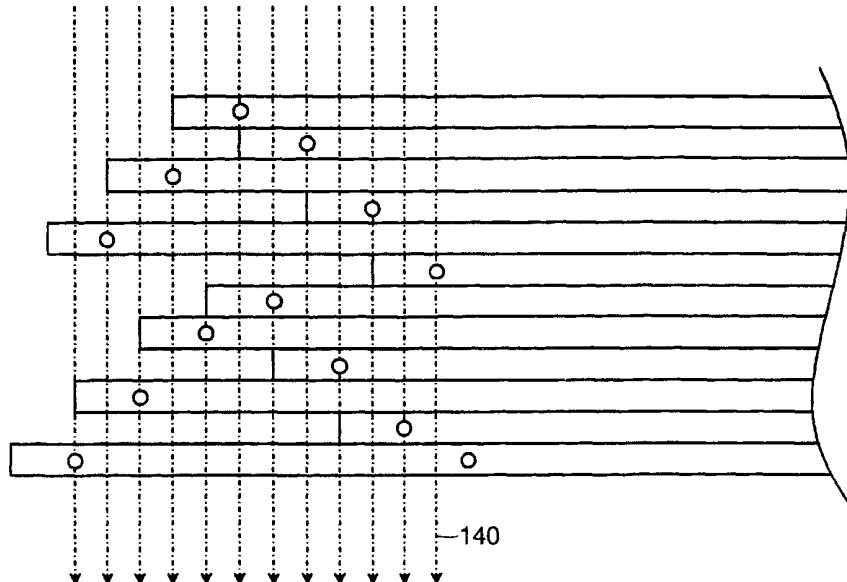

WO 00/58099 A1

(57) Abstract: A print head has an array of ink orifices arranged to selectively deposit drops of ink along parallel print lines on the medium while the medium and the print head undergo relative motion in a printing direction parallel to the print lines, the printing being completed in a single pass of the print head relative the medium. The orifices in the array are arranged in a pattern such that adjacent parallel print lines on the medium are served by orifices that have different positions in the array along the direction of the print lines. The different positions of the orifices that serve any pair of adjacent parallel lines are separated by no less than a first predetermined distance along the direction of the print lines.



(48) Date of publication of this corrected version:

8 November 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

see PCT Gazette No. 45/2001 of 8 November 2001, Section II

SINGLE-PASS INKJET PRINTING

Background

5 This invention relates to single-pass inkjet printing.

In typical inkjet printing, a print head delivers ink in drops from orifices to pixel positions in a grid of rows and columns of closely spaced pixel positions.

Often the orifices are arranged in rows and columns. Because the rows and columns in the head do not typically span the full number of rows or the full number 10 of columns in the pixel position grid, the head must be scanned across the substrate (e.g., paper) on which the image is to be printed.

To print a full page, the print head is scanned across the paper in a head scanning direction, the paper is moved lengthwise to reposition it, and the head is scanned again at a new position. The line of pixel positions along which an orifice 15 prints during a scan is called a print line.

In a simple scheme suitable for low resolution printing, during a single scan of the print head adjacent orifices of the head print along a stripe of print lines that represent adjacent rows of the pixel grid. After the stripe of lines is printed, the paper is advanced beyond the stripe and the next stripe of lines is printed in the next 20 scan.

High-resolution printing provides hundreds of rows and columns per inch in the pixel grid. Print heads typically cannot be fabricated with a single line of orifices spaced tightly enough to match the needed printing resolution.

To achieve high resolution scanned printing, orifices in different rows of 25 the print head can be offset or inclined, print head scans can be overlapped, and orifices can be selectively activated during successive print head scans.

In the systems described so far, the head moves relative to the paper in two dimensions (scanning motion along the width of the paper and paper motion along its length between scans).

Inkjet heads can be made as wide as an area to be printed to allow so-called single-pass scanning. In single-pass scanning, the head is held in a fixed position while the paper is moved along its length in an intended printing direction. All print lines along the length of the paper can be printed in one pass.

Single-pass heads may be assembled from linear arrays of orifices. Each of the linear arrays is shorter than the full width of the area to be printed and the arrays are offset to span the full printing width. When the orifice density in each array is smaller than the needed print resolution, successive arrays may be staggered by small amounts in the direction of their lengths to increase the effective orifice density along the width of the paper. By making the print head wide enough to span the entire breadth of the substrate, the need for multiple back and forth passes can be eliminated. The substrate may simply be moved along its length past the print head in a single pass. Single-pass printing is faster and mechanically simpler than multiple-pass printing.

Theoretically, a single integral print head could have a single row of orifices as long as the substrate is wide. Practically, however, that is not possible for at least two reasons.

One reason is that for higher resolution printing (e.g., 600 dpi), the spacing of the orifices would be so small as to be mechanically unfeasible to fabricate in a single row, at least with current technology. The second reason is that the manufacturing yield of orifice plates goes down rapidly with increases in the number of orifices in the plate. This occurs because there is a not insignificant chance that any given orifice will be defective in manufacture or will become defective in use. For a print head that must span a substrate width of, say, 10 inches, at a resolution of 600 dots per inch, the yield would be intolerably low if all of the orifices had to be in a single orifice plate.

Summary

Paper that is moved along its length during printing has a tendency (called web weave) to move back and forth in a direction perpendicular to the intended printing direction, which can degrade the quality of printing. In addition, when a 5 broad area that includes several adjacent lines is to be printed, variations in the lateral spread rates of the edges of the lines and groups of already merged lines that will form the area may yield unintentionally non-printed areas.

The invention provides effective tradeoffs between a pattern for staggering 10 parallel print arrays in a swath module of the print head that provides optimal latitude relative to web weave; and one that provides optimal line spreading behavior.

In general, in one aspect of the invention, a print head has an array of ink 15 orifices arranged to selectively deposit drops of ink along parallel print lines on the medium while the medium and the print head undergo relative motion in a printing direction parallel to the print lines, the printing being completed in a single pass of the print head relative the medium. The orifices in the array are arranged in a pattern 20 such that adjacent parallel print lines on the medium are served by orifices that have different positions in the array along the direction of the print lines. The different positions of the orifices that serve any pair of adjacent parallel lines are separated by no less than a first predetermined distance along the direction of the print lines.

25 Implementations of the invention may include one or more of the following features. The different positions may also be separated by no more than a second predetermined distance along the direction of the print lines. The ratio of the largest distance to the smallest distance separating any pair of adjacent orifices may be in the range 1:1 to 2:1, e.g., 1.4:1. The first and second predetermined distances may be chosen to yield a maximum overlap of adjacent line printing. The print head may include swath modules each of which includes array modules that are staggered to achieve the pattern. The staggering of orifices may be in a saw-tooth pattern. The pattern of staggering of one of the swath modules may be congruent to the pattern of staggering of another of the swath modules. The medium may be non-absorbent.

In general, in another aspect, the invention features a method of printing on a medium in which pairs of print locations that are on adjacent print lines and that are on an imaginary line normal to the print direction are caused to be printed at times that are separated by a delay period of at least a predetermined duration. In 5 implementations of the invention, the delay period is also at most of a second predetermined duration.

In general, in another aspect, the orifices in the array are arranged in a pattern in which each of the orifices is either upstream or downstream of both of the neighboring orifices along the printing direction.

10 In general, in another aspect, the invention features a swath module for use with other modules in a single-pass print head.

Among the advantages of the invention are one or more of the following.

15 The effects of web weave and line spreading are traded off in a useful way while reducing the cost of orifice plate manufacture. The invention is especially applicable to printing on a nonabsorbent medium and to printing that involves merging of print lines while the ink remains liquid.

Other advantages and features will become apparent from the following description and from the claims.

Description

20 Figures 1, 2, and 3 illustrate web weave.

Figures 4 and 5 illustrate line merging.

Figure 6 illustrates the interplay of web weave and line merging.

Figure 7 is a graph of line spread as a function of distance.

Figure 8 is a diagram of a page moving under a single-pass print head.

25 Figure 9 is a schematic diagram of a swath module.

Figure 10 is a schematic diagram of orifice staggering.

Figure 11 is a graphical diagram of orifice staggering.

Figure 12 is a table of orifice locations.

Figure 13 is a graphical diagram of orifice staggering.

Figure 14 is an exploded perspective assembly drawing of a swath module.

The quality of printing generated by a single-pass inkjet print head can be
5 improved by the choice of pattern of orifices that are used to print adjacent print lines.
An appropriate choice of pattern provides a good tradeoff between the effect of web
weave and the possibility of print gaps caused by poor line merging.

As seen in figures 1 and 2, paper 10 that is moved along its length during
printing is subject to so-called web weave, which is the tendency of the web (e.g.,
10 paper) not to track perfectly along the intended direction 12, but instead to move back
and forth in a direction 14 perpendicular to the intended printing direction. Web
weave can degrade the quality of inkjet printing.

Web weave can be measured in mils per inch. A weave of 0.2 mils per
inch means that for each inch of web travel in the intended direction, the web may
15 travel as much as 0.2 mils to one side or the other. As seen in figures 2 and 3, when
the inkjet orifices are not arranged in a single straight line along the paper width, but
instead are spaced apart along the intended direction of web motion, the web weave
produces an adjacency error 17 in drop placement compared with an intended
adjacency distance 15. For example, with a web weave of 0.2 mils per inch and a
20 spacing between neighboring orifices of 1.5 inches in the web motion direction, an
adjacency error of 0.3 mils in the direction perpendicular to the main direction of
motion may be introduced in the distance between resulting adjacent print lines.

If avoiding the effects of web weave were the only concern, a good pattern
would minimize the spacing along the print line direction between orifices addressing
25 adjacent print lines. In such an arrangement, the adjacent lines would be printed at
nearly the same times and web weave would have almost no effect. Yet, for a head
with twelve modules spaced along the print line direction (see figure 10), it would not
be good to have a repeated pattern in which the orifices that print adjacent print lines
are only one module apart (e.g., in modules 1, 2, ..., 11, 12, 1, 2, ...). In that case, the

final orifice in the pattern would be in the twelfth module, eleven modules away from the first orifice in the second repetition of the pattern, which would be in the first module again.

As seen in figure 2, for purposes of avoiding the effects of web weave, a 5 pattern with a maximum spacing of two modules would work well. The modules printing successive pixels in the direction perpendicular to the intended motion of the web could be modules 1, 3, 5, 7, 9, 11, 12, 10, 8, 6, 4, 2 and then back to 1. However, as explained below, when the effects of poor line merging are also considered, this 10 pattern is not ideal. On the other hand, as seen in figure 3, if adjacent lines are printed by modules separated by, say, five modules along the intended direction of web motion, the effects of web weave are more significant.

As seen in figure 4, another cause of poor inkjet printing quality may occur when all pixels in a given area 16 are to be filled by printing several continuous, adjacent lines 18. In printing each of the continuous lines, a series of drops 20 rapidly 15 merge to form a line 22 which spreads 24, 26 laterally (in the two opposite directions perpendicular to the print line direction) across the paper surface. Ideally, adjacent lines that are spreading eventually reach each other and merge 28 to fill a two-dimensional region (stripe) that extends both along and perpendicularly to the line direction.

For non-absorbent web materials, the spreading of a line edge is said to be 20 contact angle limited. (The contact angle is the angle between the web surface and the ink surface at the edge where the ink meets the web surface, viewed in cross-section.) As the line spreads, the contact angle gets smaller. When the contact angle reaches a lower limit (e.g., 10 degrees) line spreading stops.

As adjacent lines merge, the contact angle of the line edges declines. The 25 rate of lateral spread of the merged stripe declines because the reduced contact angle produces higher viscous retarding forces and lower surface tension driving forces. The reduction in lateral spreading can produce white gaps 30 between adjacent lines that have respectively merged with their neighbors on the other side from the gap.

The lateral spread rate of the edges of one or more merged print lines varies inversely with the third power of the number of lines merged. By this rule, when two lines (or stripes) merge into a single stripe, the rate at which the edges of the merged stripe spread laterally is eight times slower than the rate at which the 5 constituent lines or stripes were spreading. However, when the spreading is contact angle limited, the effect of merging can be to stop the spreading. Consequently, as printing progresses various pairs of adjacent lines and/or stripes merge or fail to merge depending on the distances between their neighboring edges and the rates of spreading implied by the numbers of their constituent original lines. For some pairs 10 of adjacent lines and/or stripes, the rate of spreading stops or becomes so small as to preclude the gap ever being filled. The result is a permanent undesired un-printed gap 30 that remains unfilled even after the ink solidifies.

The orifice printing pattern that may best reduce the effects of poor line merging tends to increase the negative effects of web weave.

15 As seen in figure 5, ideally, to reduce the effects of poor line merging, every other line 40, 42, 44, 46 would be printed at the same time and be allowed to spread without merging, leaving a series of parallel gaps 41, 43, 45 to be filled. After allowing as much time as possible to pass, so that the remaining gaps become as narrow as possible, the remaining lines would be filled in by bridging the gaps using 20 the intervening drop streams, as shown, taking account of the splat diameter that is achieved as a result of the splat of a drop as it hits the paper, so that no additional spread is required to achieve a solid printed region without gaps. By splat diameter, we mean the diameter of the ink spot that is generated in the fraction of a second after a jetted ink drop hits the substrate and until the inertia associated with the jetting of 25 the drop has dissipated. During that period, the spreading of the drop is governed by the relative influences of inertia (which tends to spread the drop) and viscosity (which tends to work against spreading.) Allowing as much time as possible to pass before laying down the intervening drop streams would mean an orifice printing pattern in which adjacent lines are laid down by orifices that are spaced apart as far as possible

along the print line direction, exactly the opposite of what would be best to reduce the effect of web weave.

A useful distance along the print line direction between orifices that print adjacent lines would trade off the web weave and line spreading factors in an effective way. As seen in figure 6, assume for the moment (we will relax this requirement later) that the orifices are arranged in two lines 50, 52 that contain adjacent orifices. We would like to find a good distance 54 between the lines. Assume also that web weave causes the web to move to the left at a constant rate (at least for the short distance under consideration) of W mils per inch of web motion in the line printing direction. Assume also that the line edge 60 spreads away from a center of a printed line at a rate that is expressed by a declining function $S(d)$ mils per inch where d is the distance from the point where the drops are ejected onto the paper. Figure 7 shows three similar curves 81, 82, 83 of calculated spread rate versus distance along the web since ejection for three different splat diameters.

In the example, the important consideration arises with respect to the printing of drop 62 (figure 6), which is effectively moving to the right in the figure (because of web weave) and the motion of the edge of line 60 to the right. At first, as the line is formed from the series of ejected drops, the line edge is moving more rapidly to the right than would be the position of drop 62 with distance along the web. Thus, the overlap of the splat and the spreading line increases. However, the rate of line spreading decreases while the rate of web weave, in a short distance, does not, so the amount of overlap reaches a peak and begins to decline. We seek a position for drop 62 that maximizes the overlap. The maximum overlap occurs when the rate of spreading equals the rate of web weave.

In figure 7 horizontal lines can be drawn to represent web weave rates. For web weave rates between 0.1 and 0.2 mils per inch, represented by lines 68, 69, the intersections with curves 81, 82, 83 occur in the range of 0.8 to 2.2 inches separation.

As seen in figure 8, a print head that can be operated using an orifice printing pattern that falls within the range shown in figure 7, includes three swath

modules 0, 1, and 2, shown schematically. The three swath modules respectively print three adjacent swaths 108, 110, 112 along the length of the paper as the paper is moved in the direction indicated by the arrow.

As seen in figure 9, each swath module 130 has twelve linear array 5 modules arranged in parallel. Each array module has a row of 128 orifices 134 that have a spacing interval of 12/600 inches for printing at a resolution of 600 pixels per inch across the width of the paper. (The number of orifices and their shapes are indicated only schematically in the figure.)

As seen in figure 10, to assure that every pixel position across the width of 10 the paper is covered by an orifice that prints one of the needed print lines 140 along the length of the paper, the twelve identical array modules are staggered (the staggering is not seen in figure 9) in the direction of the lengths of the arrays. As seen, the first orifice (marked by a large black dot) in each of the modules thus uniquely occupies a position along the width of the paper that corresponds to one of 15 the needed print lines.

In the bottom array module shown in the figure, the position of the second orifice is shown by a dot, but the subsequent orifice locations in that array and in the other arrays are not shown. Also, although figure 10 shows the pattern of staggering for one of the three swath modules, the other two swath modules have another, 20 different pattern of staggering, described below.

In figure 11, the patterns of staggering for all three swath modules are shown graphically. The patterns have a sawtooth profile. Each orifice is either upstream or downstream along the printing direction of both of the neighboring orifices with only one exception, at the transition between swath module 0 and swath 25 module 1. The graph for each swath module contains dots to show which of the first twelve pixels that are covered by that swath module is served by the first orifice of each of the array modules. The graph for each swath module only shows the pattern of staggering but does not show all of the orifices of the module. The pattern repeats 127 times to the right of the pattern shown for each swath module. For that purpose 30 the twelfth pixel in each series is considered the zeroth pixel in the next series.

Similarly, the module array numbered 12 in swath module 1 effectively occupies the 0 position along the Y axis in the swath modules 0 and 2 (although the figure, for clarity, does not show it that way).

Figure 12 is a table that gives X and Y locations in inches of the first orifice of each of the array modules that make up swath module 0, relative to the position of pixel 1. Figure 12 demonstrates the staggering pattern of array modules. For swath module 0, the pixel positions of the first orifices are listed in the column labeled "pixel". The module number of the array module to which the first orifice that prints that pixel belongs is shown in the column labeled "module number". The X location of the pixel in inches is shown in the column labeled "X location". The Y location of the pixel is shown in the column marked "Y location." The swath 2 module is arranged identically to the swath 0 module and the swath 1 module is arranged identically to (is congruent to) the other two modules (with a 180 degrees rotation).

The gap in the Y direction between the final orifice (numbered 1536) of the swath 0 module and the first orifice (numbered 1537) of the swath 1 module, 0.989 inches, violates the rule that each orifice is either upstream or downstream along the printing direction of both of the neighboring orifices. On the other hand, the gap in the Y direction between the final orifice (numbered 3072) of the swath 1 module and first orifice (numbered 3073) of the swath 2 module is 4.19 inches, which is good for line merge but not good for web weave.

Thus, in the example of figures 10 through 12, the distance along the web direction that corresponds to the X-axis of figure 7 is between 1.2 and 2.0 inches for every adjacent pair of printing line orifices (which is more than an order of magnitude and almost two orders of magnitude larger than the orifice spacing--1/50 inch--in a given array module) except for the pairs that span the transitions between swath modules. Although there is some difference in the web direction distances for different pairs of orifices, it is desirable to keep the ratio of the smallest distance to the largest distance close to one, to derive the greatest benefit from the principles

described above. In the case of figures 11 and 12, the ratio is 1.67 (excluding the two transitional pairs).

The range of distances along the web direction discussed above implies a range of delay times between when an ink drop hits the substrate and when the next 5 adjacent ink drops hit the substrate, depending on the speed of web motion along the printing direction. For a web speed of 20 inches per second, the range of distances of 1.2 to 2.0 inches translate to a range of durations of 0.06 to 0.1 seconds.

Each swath module includes an orifice plate adjacent to the orifice faces of the array modules. The orifice plate has a staggered pattern of holes that conform to 10 the pattern described above. One benefit of the patterns of the table of figure 7 is that the orifice plate of swath modules 0, 1, and 2 are identical except that the orifice plate for swath module 1 is rotated 180 degrees compared to the other two. Because only one kind of orifice plate needs to be designed and fabricated, production costs are reduced.

15 In figure 13, the swath 1 and 2 modules have been shifted to the left by two pixel positions relative to its position in figure 11. The twelfth pixel in module 0 (1536) and the first pixel in module 1 (1537) are disabled. The result is that the distance along the printing direction is increased to 4.589 inches, a distance that is worse with respect to web weave but better with respect to line merging.

20 Figure 14 shows the construction of each of the swath modules 130. The swath module has a manifold/orifice plate assembly 200 and a sub-frame 202 which together provide a housing for a series of twelve linear array module assemblies 204. Each module assembly includes a piezoelectric body assembly 206, a rock trap 207, a conductive lead assembly 208, a clamp bar 210, and mounting washers 213 and 214 25 and screws 215. The module assemblies are mounted in groups of three. The groups are separated by stiffeners 220 that are mounted using screws 222. Two electric heaters 230 and 232 are mounted in sub-frame 202. An ink inlet fitting 240 carries ink from an external reservoir, not shown, through the sub-frame 202 into channels in the manifold assembly 200. From there the ink is distributed through the twelve linear array module assemblies 204, back into the manifold 200, and out through the sub- 30

frame 202 and exit fitting 242, returning eventually to the reservoir. Screws 244 are used to assemble the manifold to the sub-frame 200. Set screws 246 are used to hold the heaters 232. O-rings 250 provide seals to prevent ink leakage.

5 The number of swath arrays and the number of orifices in each swath array are selected to provide a good tradeoff between the scrap costs associated with discarding unusable orifice plates (which are more prevalent when fewer plates each having more orifices are used) and the costs of assembling and aligning multiple swath arrays in a head (which increase with the number of plates). The ideal tradeoff may change with the maturity of the manufacturing process.

10 The number of orifices in the orifice plate that serves the swath is preferably in the range of 250 to 4000, more preferably in the range of 1000-2000, and most preferably about 1500. In one example the head has three swath arrays each having twelve staggered linear arrays of orifices to provide 600 lines per inch across a 7.5 inch print area. The plate that serves each swath array then has 1536 orifices.

15 Other embodiments are within the scope of the following claims.

For example, the print head could be a single two-dimensional array of orifices or any combination of array modules or swath arrays with any number of orifices. The number of swath arrays could be one, two, three, or five, for example. Good separations along the print line direction between orifices that print adjacent 20 print lines will depend on the number and spacing of the orifices, the sizes of the array modules, the relative importance of web weave, line merging, and cost of manufacture in a given application, and other factors.

25 The amount of web weave that can be tolerated is higher for lower resolution printing. Different inks could be used although ink viscosity and surface tension will affect the degree of line merging.

Other patterns of orifices could be used when the main concern is web weave or when the main concern is line merging.

What is claimed is:

Claims

1. Apparatus for printing on a medium comprising
a print head having an array of orifices arranged to deposit drops of ink
along parallel print lines on the medium while the medium and the print head undergo
5 relative motion in a printing direction parallel to the print lines, the printing being
completed in a single pass of the print head relative the medium,
the orifices in the array being arranged in a pattern such that adjacent
parallel print lines on the medium are served by orifices that have different positions
in the array along the direction of the print lines,
- 10 different positions of the orifices that serve pairs of adjacent parallel lines
being separated by no less than a first predetermined distance along the direction of
the print lines.
2. The apparatus of claim 1 in which the different positions are separated
by no more than a second predetermined distance along the direction of the print
15 lines.
3. The apparatus of claim 1 in which the ratio of the largest distance to the
smallest distance separating any pair of adjacent orifices is in the range 1:1 to 2:1.
4. The apparatus of claim 2 in which the first and second predetermined
distances yield a maximum overlap of adjacent line printing.
- 20 5. The apparatus of claim 1 in which the print head comprises swath
modules each of which includes array modules that are staggered to achieve the
pattern.
6. The apparatus of claim 5 in which the array modules have orifices that
are staggered in a saw-tooth pattern.
- 25 7. The apparatus of claim 5 in which the pattern of staggering of one of
the swath modules is congruent to the pattern of staggering of another of the swath
modules.

8. The apparatus of claim 1 in which the medium comprises a non-absorbent medium.

9. A method of printing on a medium comprising
causing relative motion of the medium and a print head in a printing
5 direction,

depositing drops of ink along print lines parallel to the printing direction,
the printing being completed in a single pass of the print head relative to the medium,

causing pairs of print locations that are on adjacent print lines on the
medium and that are on an imaginary line normal to the print direction to be printed at
10 times that are separated by a delay period of at least a predetermined duration.

10. The method of claim 9 in which the delay period is also at most a
second predetermined duration.

11. Apparatus for printing on a medium comprising
a print head having an array of orifices arranged to deposit drops of ink
15 along parallel print lines on the medium while the medium and the print head undergo
relative motion in a printing direction parallel to the print lines, the printing being
completed in a single pass of the print head relative the medium,

the orifices in the array being arranged in a pattern in which each of the
orifices is either upstream or downstream of both of the neighboring orifices along the
20 printing direction.

12. The apparatus of claim 11 in which the print head comprises swath
modules each of which includes array modules that are staggered to achieve the
pattern.

13. The apparatus of claim 12 in which the array modules have orifices
25 that are staggered in a saw-tooth pattern.

14. The apparatus of claim 12 in which the pattern of staggering of one of
the swath modules is congruent to the pattern of staggering of another of the swath
modules.

15. The apparatus of claim 12 in which the medium comprises a non-absorbent medium.

16. A swath module for use with other modules in a print head for printing on a medium comprising

5 an array of orifices arranged to deposit drops of ink along parallel print lines on the medium while the medium and the print head undergo relative motion in a printing direction parallel to the print lines, the printing being completed in a single pass of the print head relative the medium,

10 the orifices in the array being arranged in a pattern such that adjacent parallel print lines on the medium are served by orifices that have different positions in the array along the direction of the print lines,

different positions of the orifices that serve pairs of adjacent parallel lines being separated by no less than a first predetermined distance along the direction of the print lines.

15 17. The apparatus of claim 16 in which the different positions are separated by no more than a second predetermined distance along the direction of the print lines.

18. The apparatus of claim 16 in which the ratio of the largest distance to the smallest distance separating any pair of adjacent orifices is in the range 1:1 to 2:1.

20 19. The apparatus of claim 17 in which the first and second predetermined distances yield a maximum overlap of adjacent line printing.

20. The apparatus of claim 17 in which the orifices are staggered in a saw-tooth pattern.

1/12

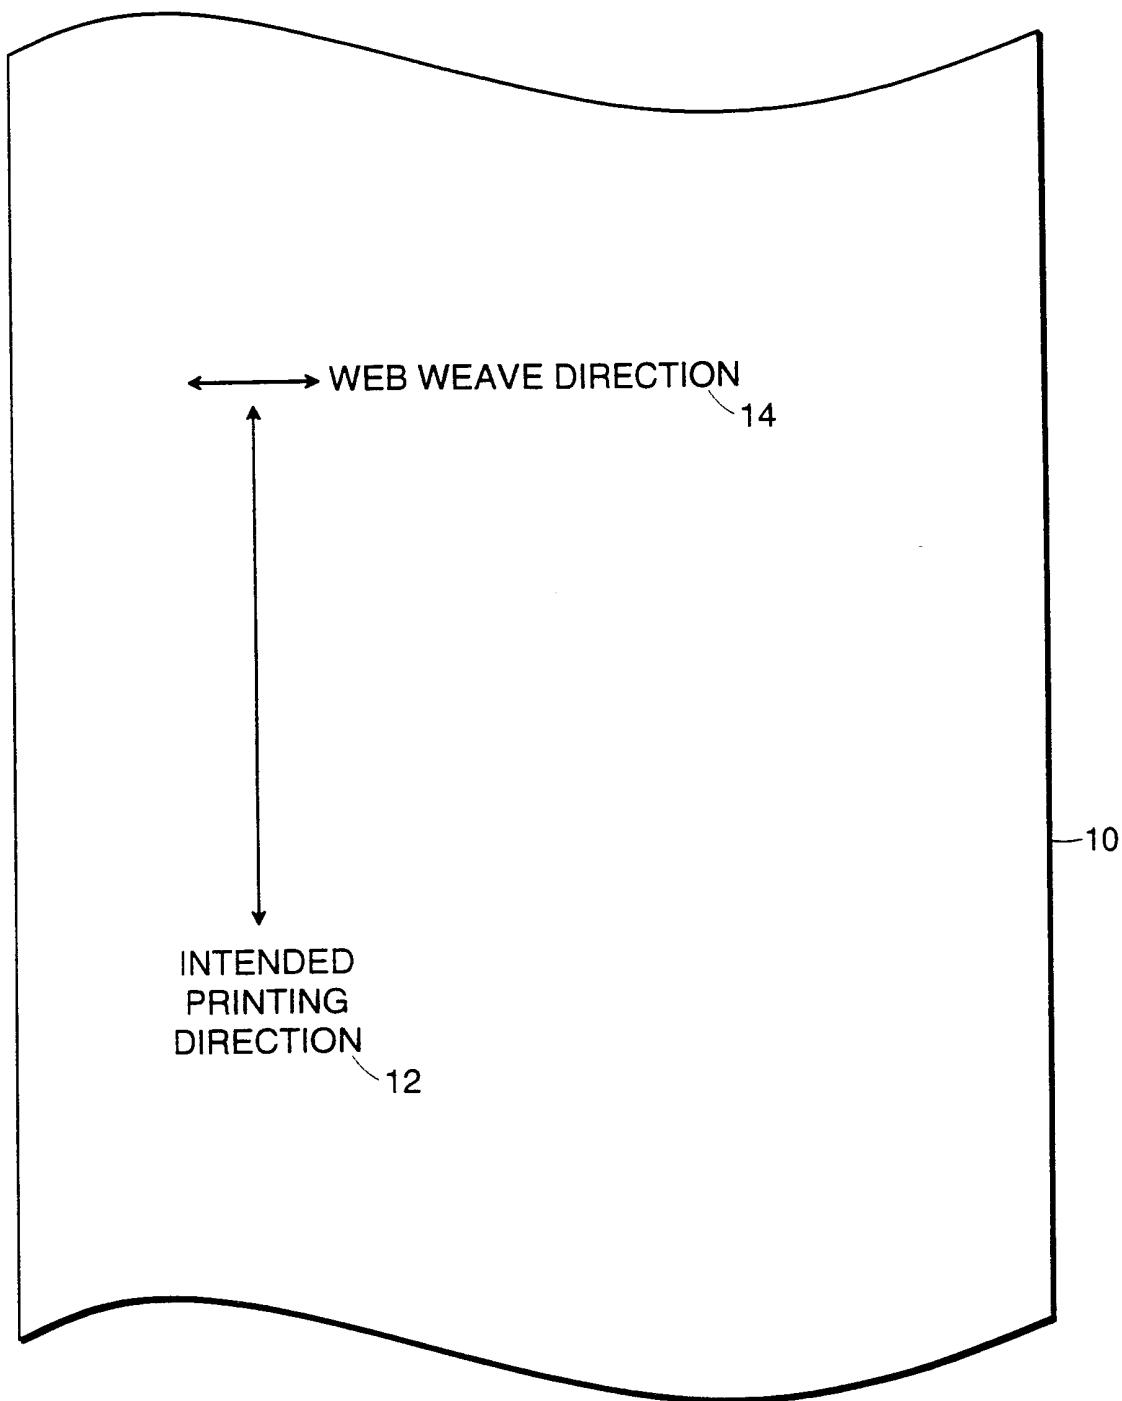


FIG. 1

2/12

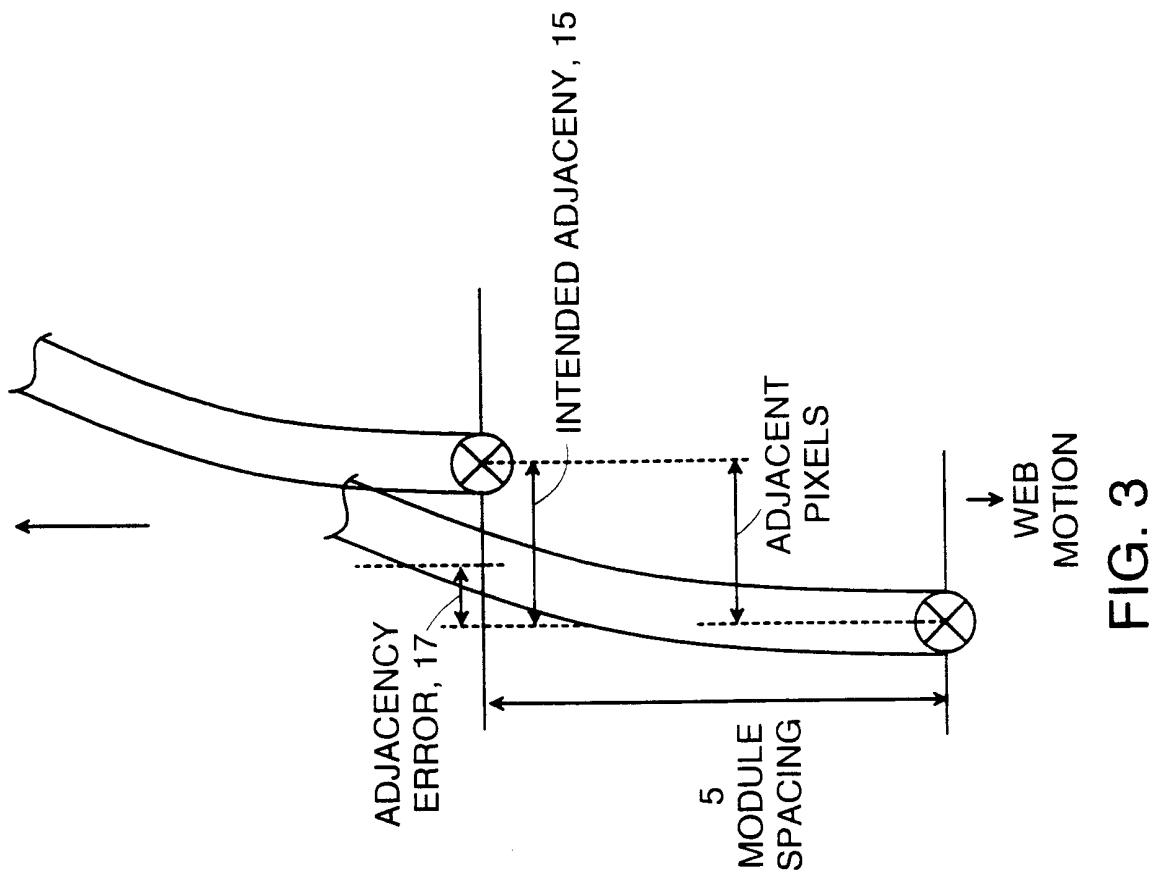


FIG. 3

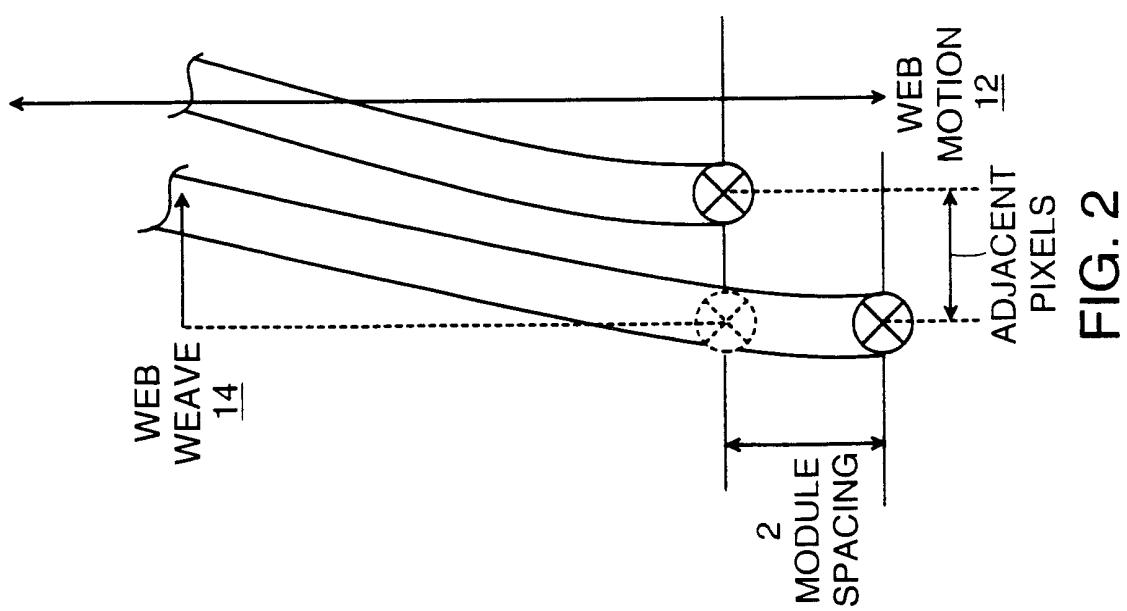


FIG. 2

3/12

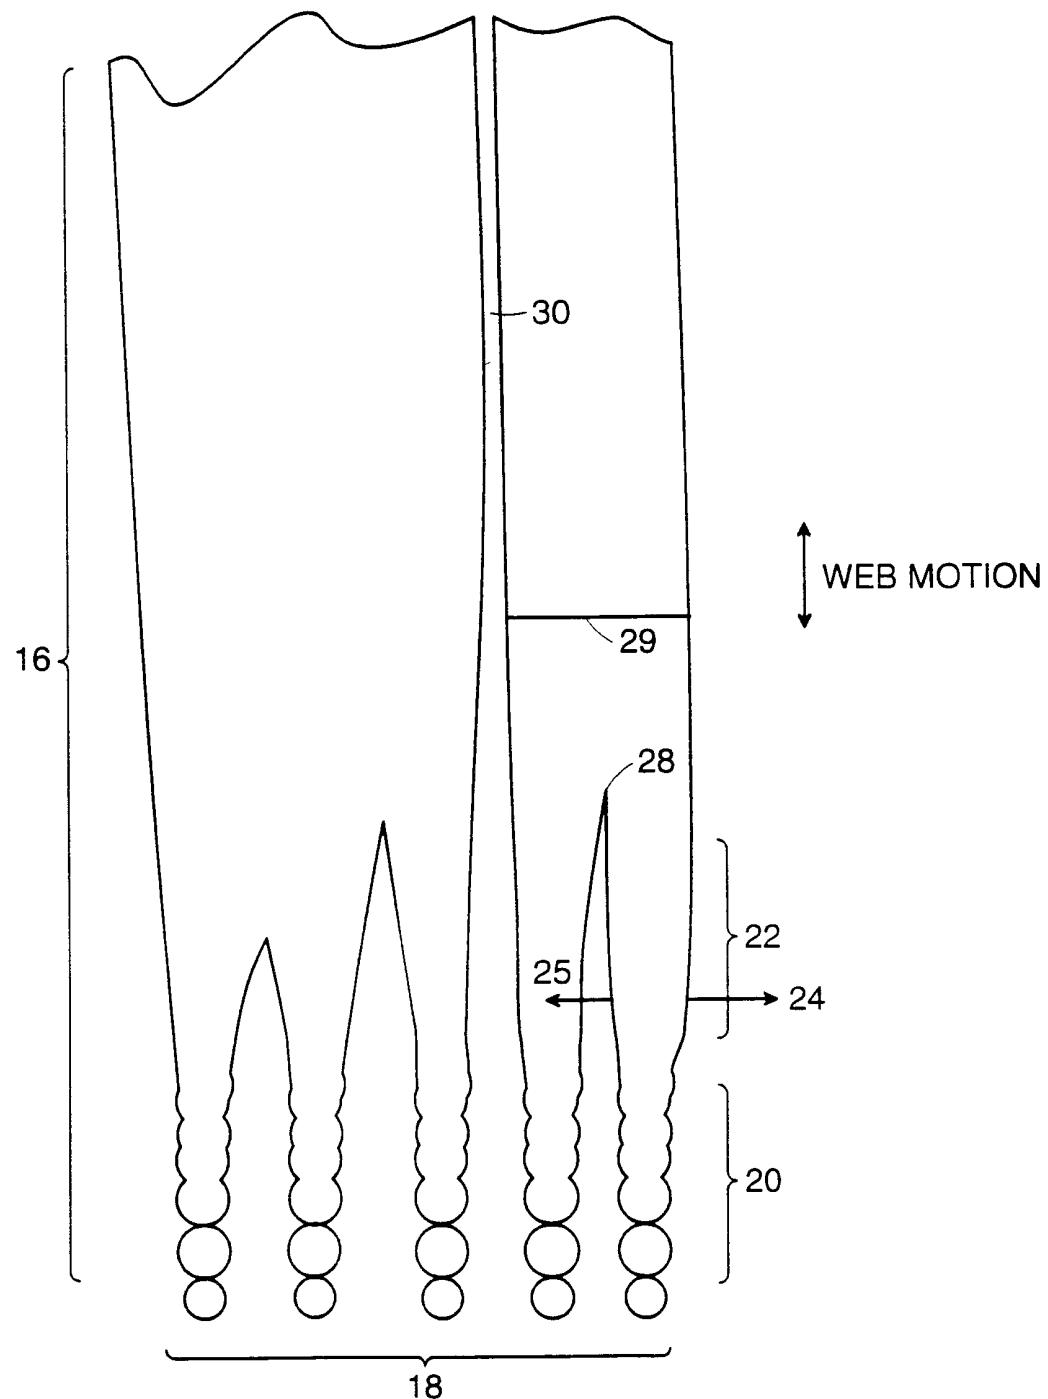


FIG. 4

4/12

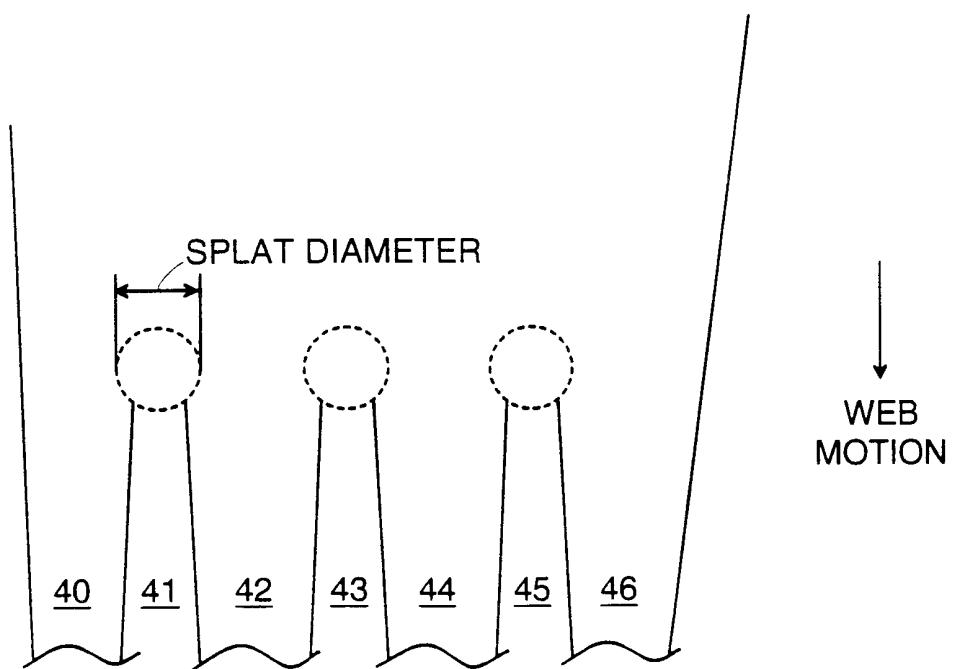


FIG. 5

5/12


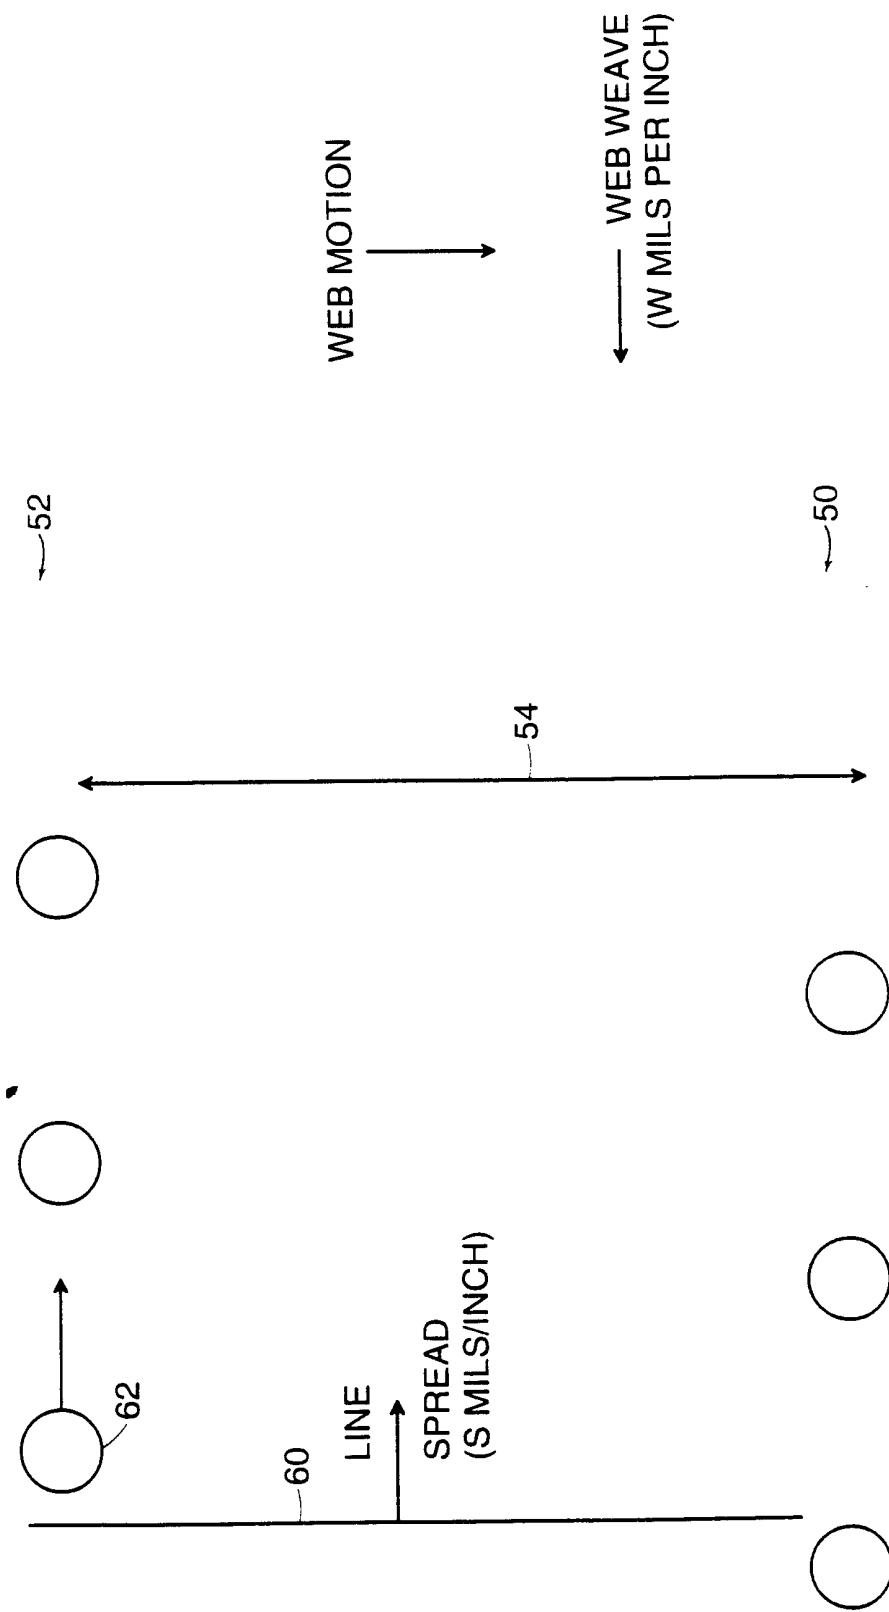


FIG. 6

6/12

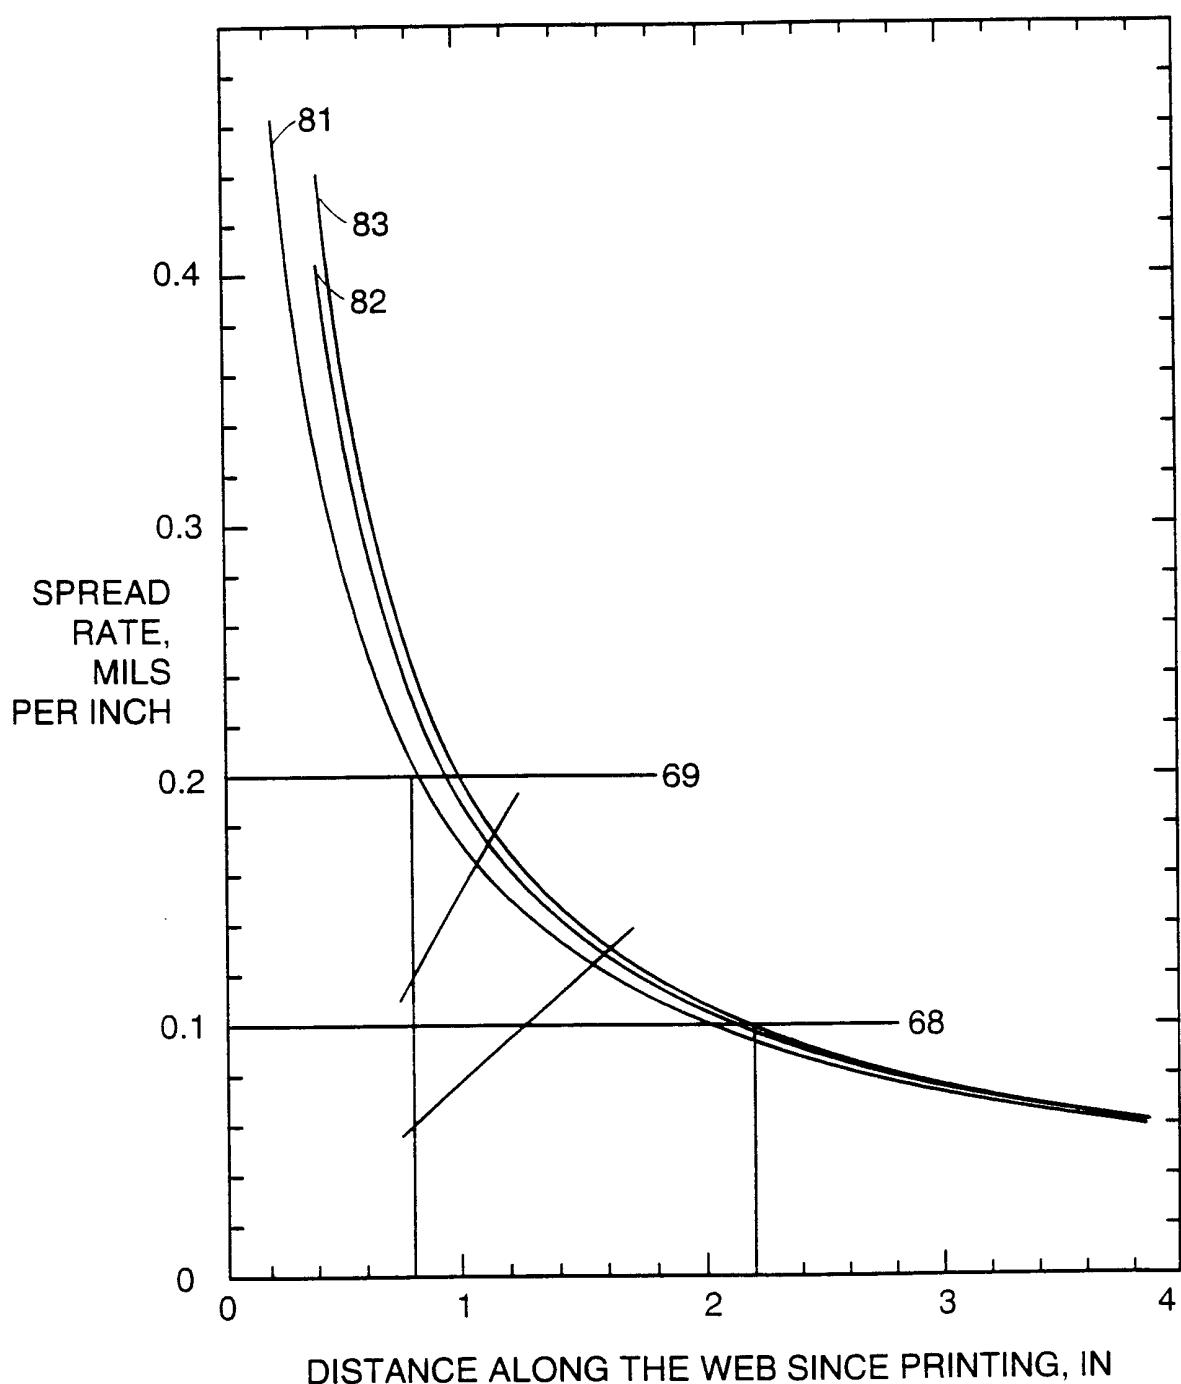

SPREAD RATE OF ONE SIDE OF A LINE FOR DIFFERENT SPLAT SIZES
FREQUENCY = 12.0 kHz VISCOSITY = 15.0 cp
SURFACE TENSION = 29.0 dynes/cm. DROP VOLUME = 15.0 pl

FIG. 7

7/12

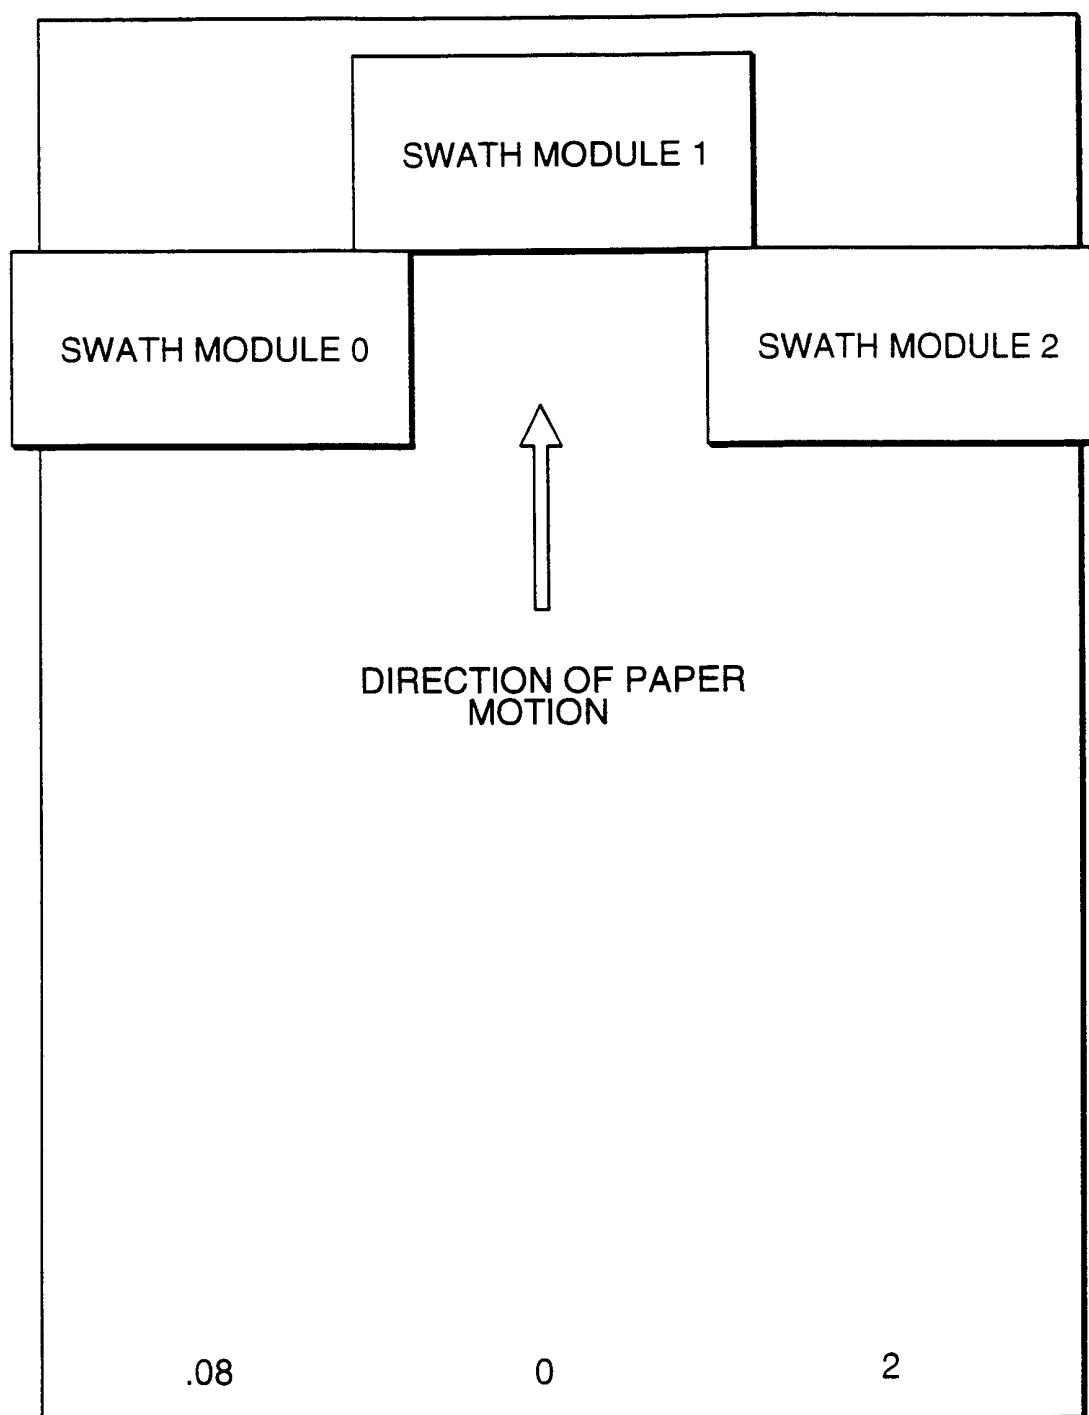


FIG. 8

8/12

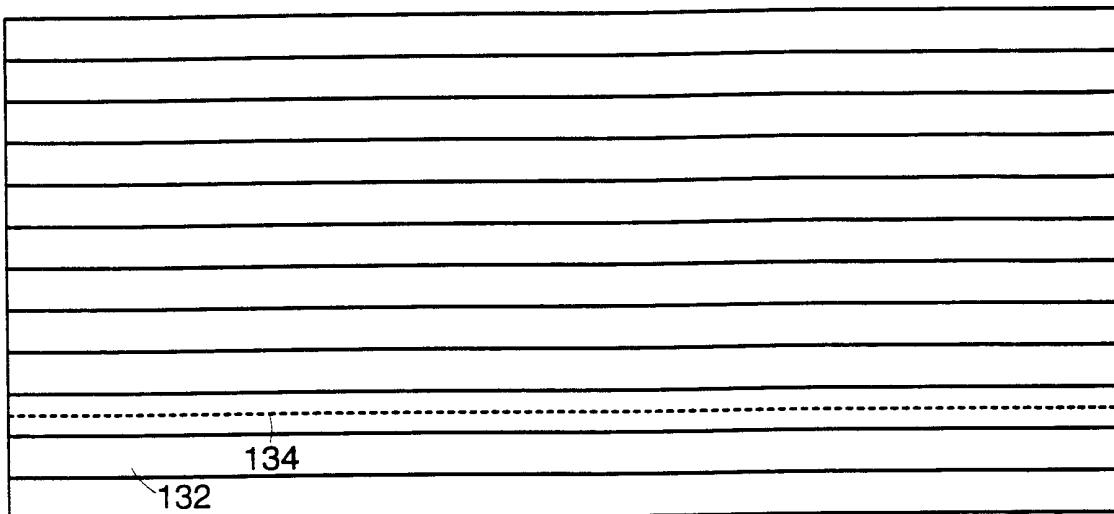


FIG. 9

130

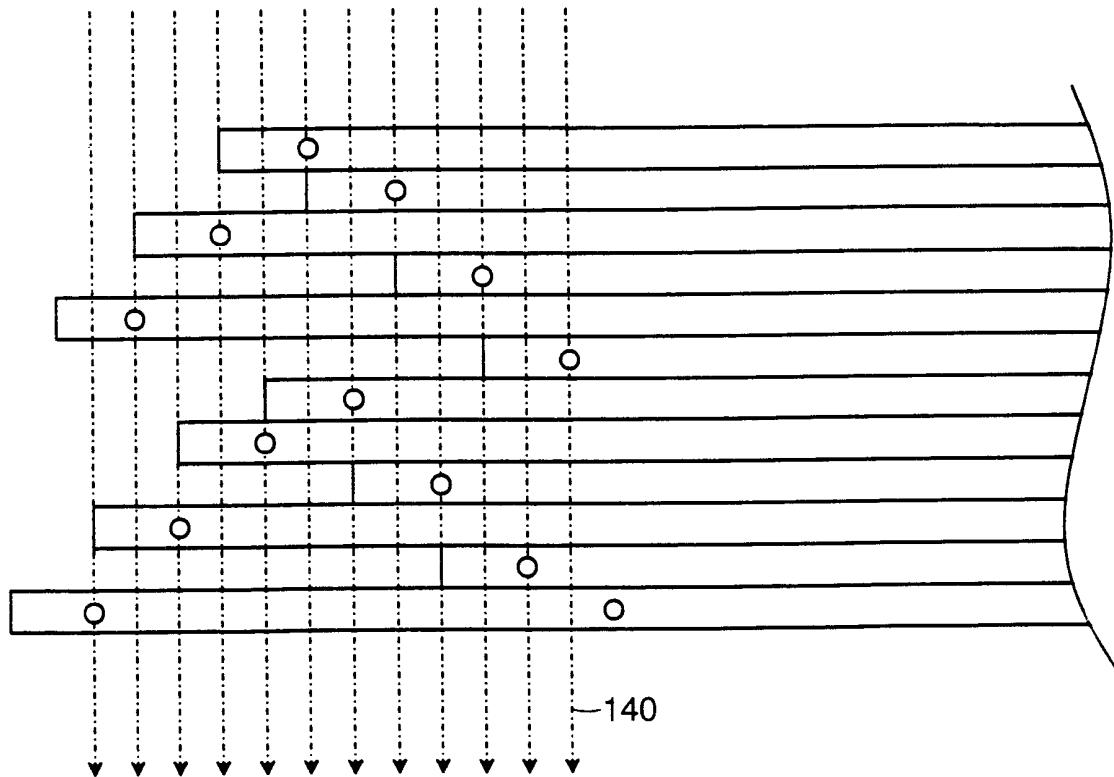


FIG. 10

9/12

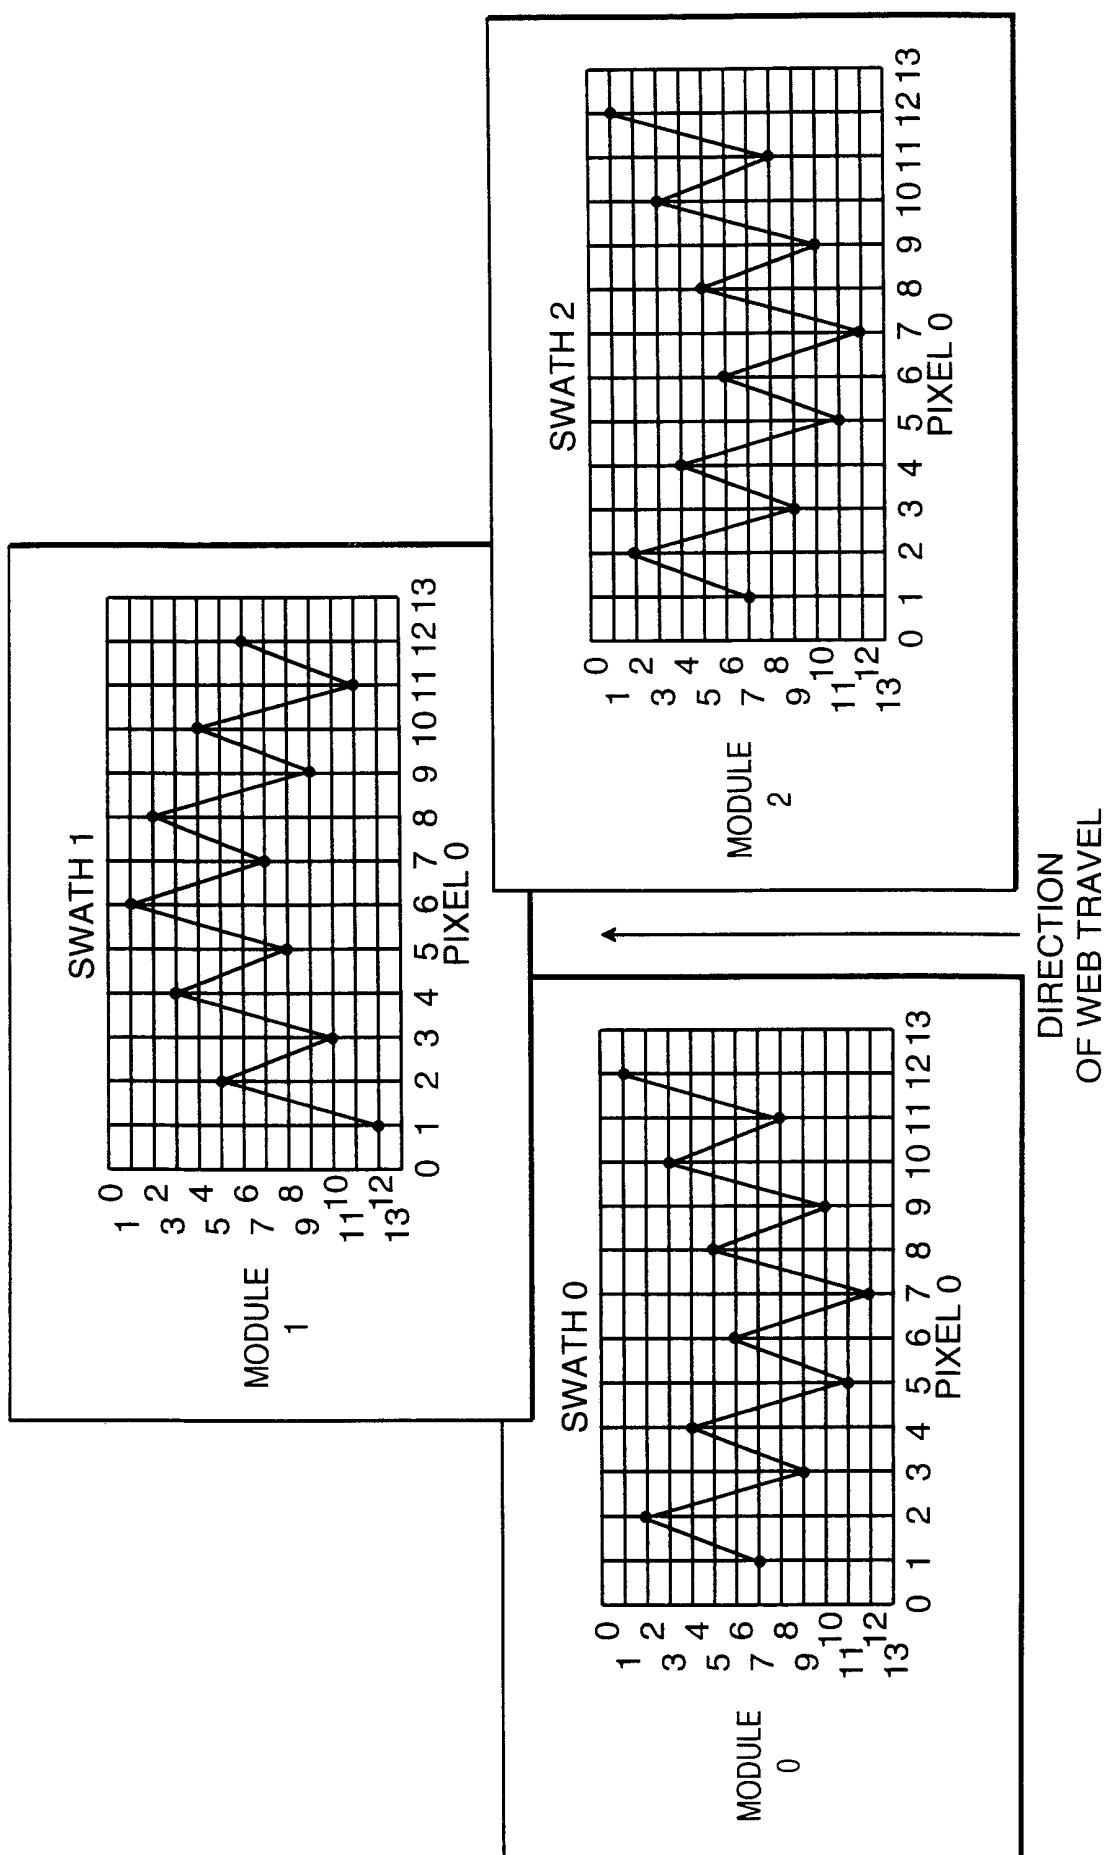


FIG. 11


10/12

SWATH 0 (A-SWATH)

PIXEL	MODULE #	X LOCATION	Y LOCATION	
1	7	0.0000	0.0000	
2	2	0.0017	1.4000	
3	9	0.0033	-0.4000	
4	4	0.0050	0.8000	
5	11	0.0067	-1.0000	
6	6	0.0083	0.4000	
7	12	0.0100	-1.2000	
8	5	0.0117	0.6000	
9	10	0.0133	-0.8000	
10	3	0.0150	1.2000	
11	8	0.0167	-0.2000	
12	2	0.0183	1.6000	
13	7	0.0200	0.0000	REPEAT OF PATTERN
14	2	0.0217	1.4000	REPEAT OF PATTERN
•	•	•	•	•
•	•	•	•	•
1535	8	2.5567	-0.2000	END OF SWATH 0
1536	1	2.5583	1.8000	END OF SWATH 0
1537	12	2.5600	2.5890	BEGINNING OF SWATH 1
1538	5	2.5617	4.3890	BEGINNING OF SWATH 1
•	•	•	•	•
•	•	•	•	•
3071	11	5.1167	2.7890	END OF SWATH 1
3072	6	5.1183	4.1890	END OF SWATH 1
3073	7	5.1200	0.0000	BEGINNING OF SWATH 2
3074	2	5.1217	1.4000	BEGINNING OF SWATH 2
•	•	•	•	•
•	•	•	•	•
4607	8	7.6767	-0.2000	END OF SWATH 2
4608	1	7.6783	1.6000	END OF SWATH 2

FIG. 12

11/12

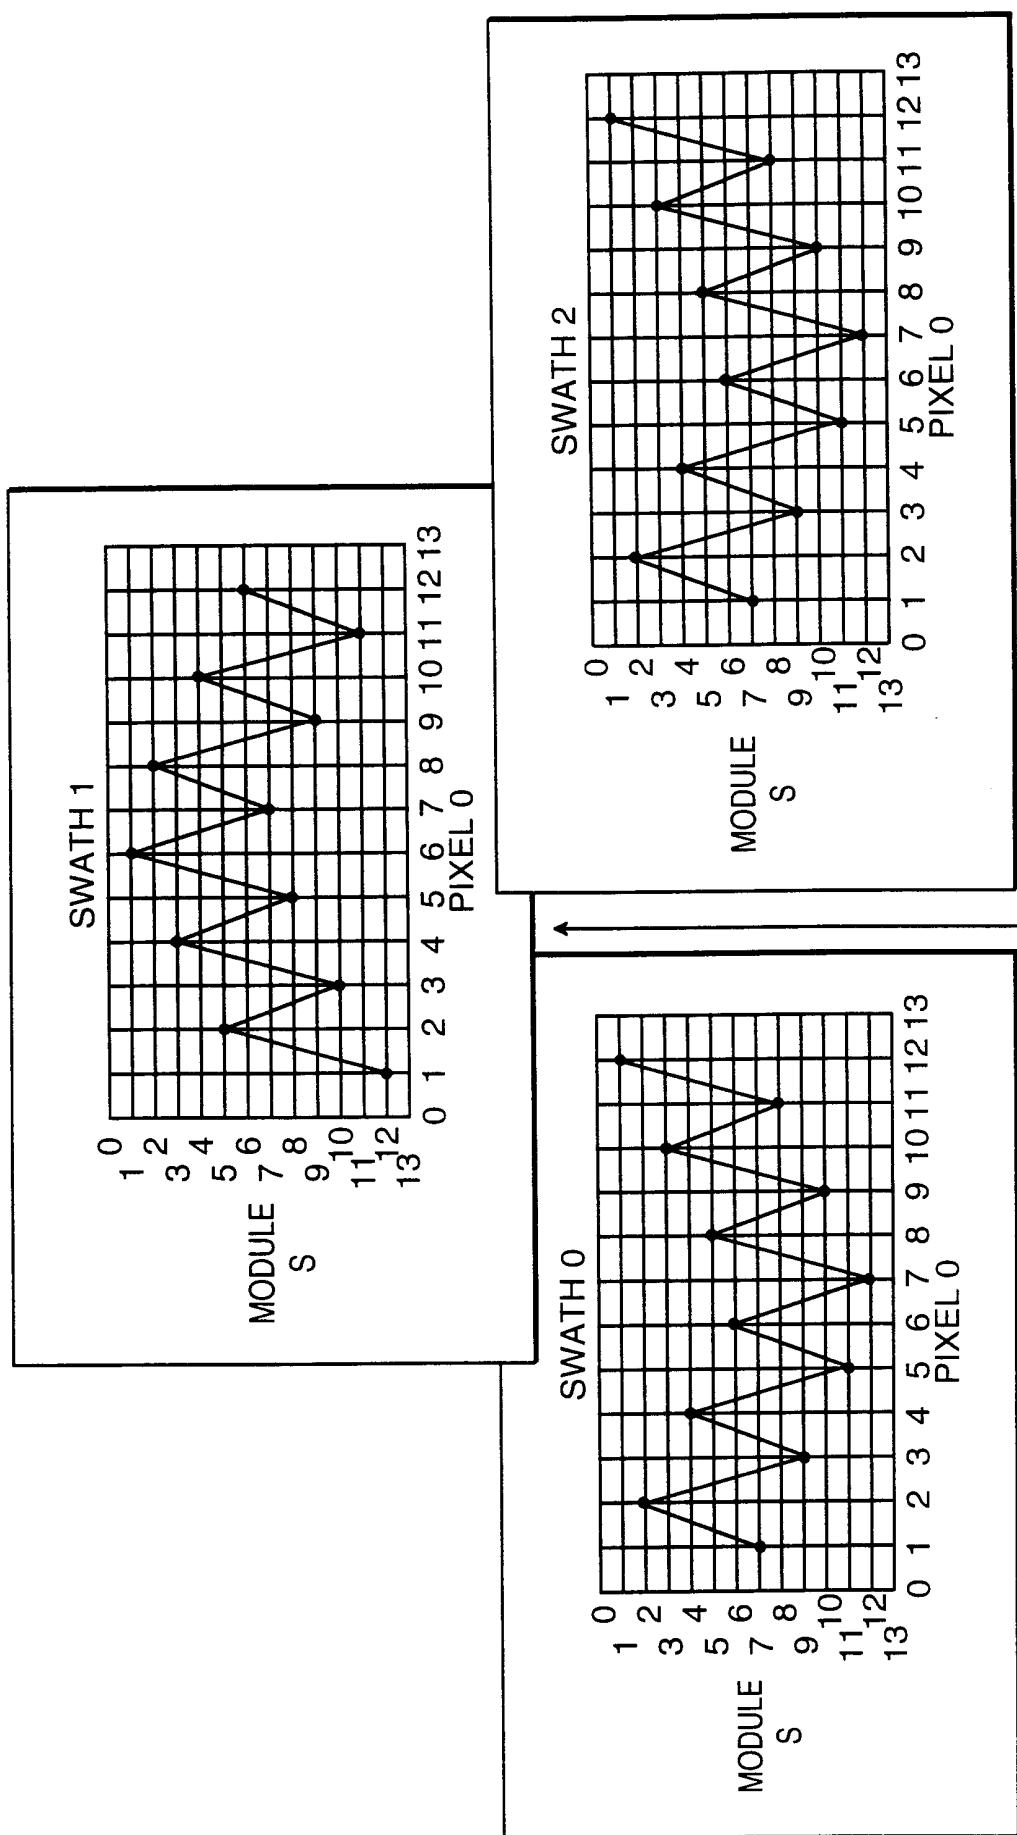

DIRECTION
OF WEB TRAVEL
FIG. 13

12/12

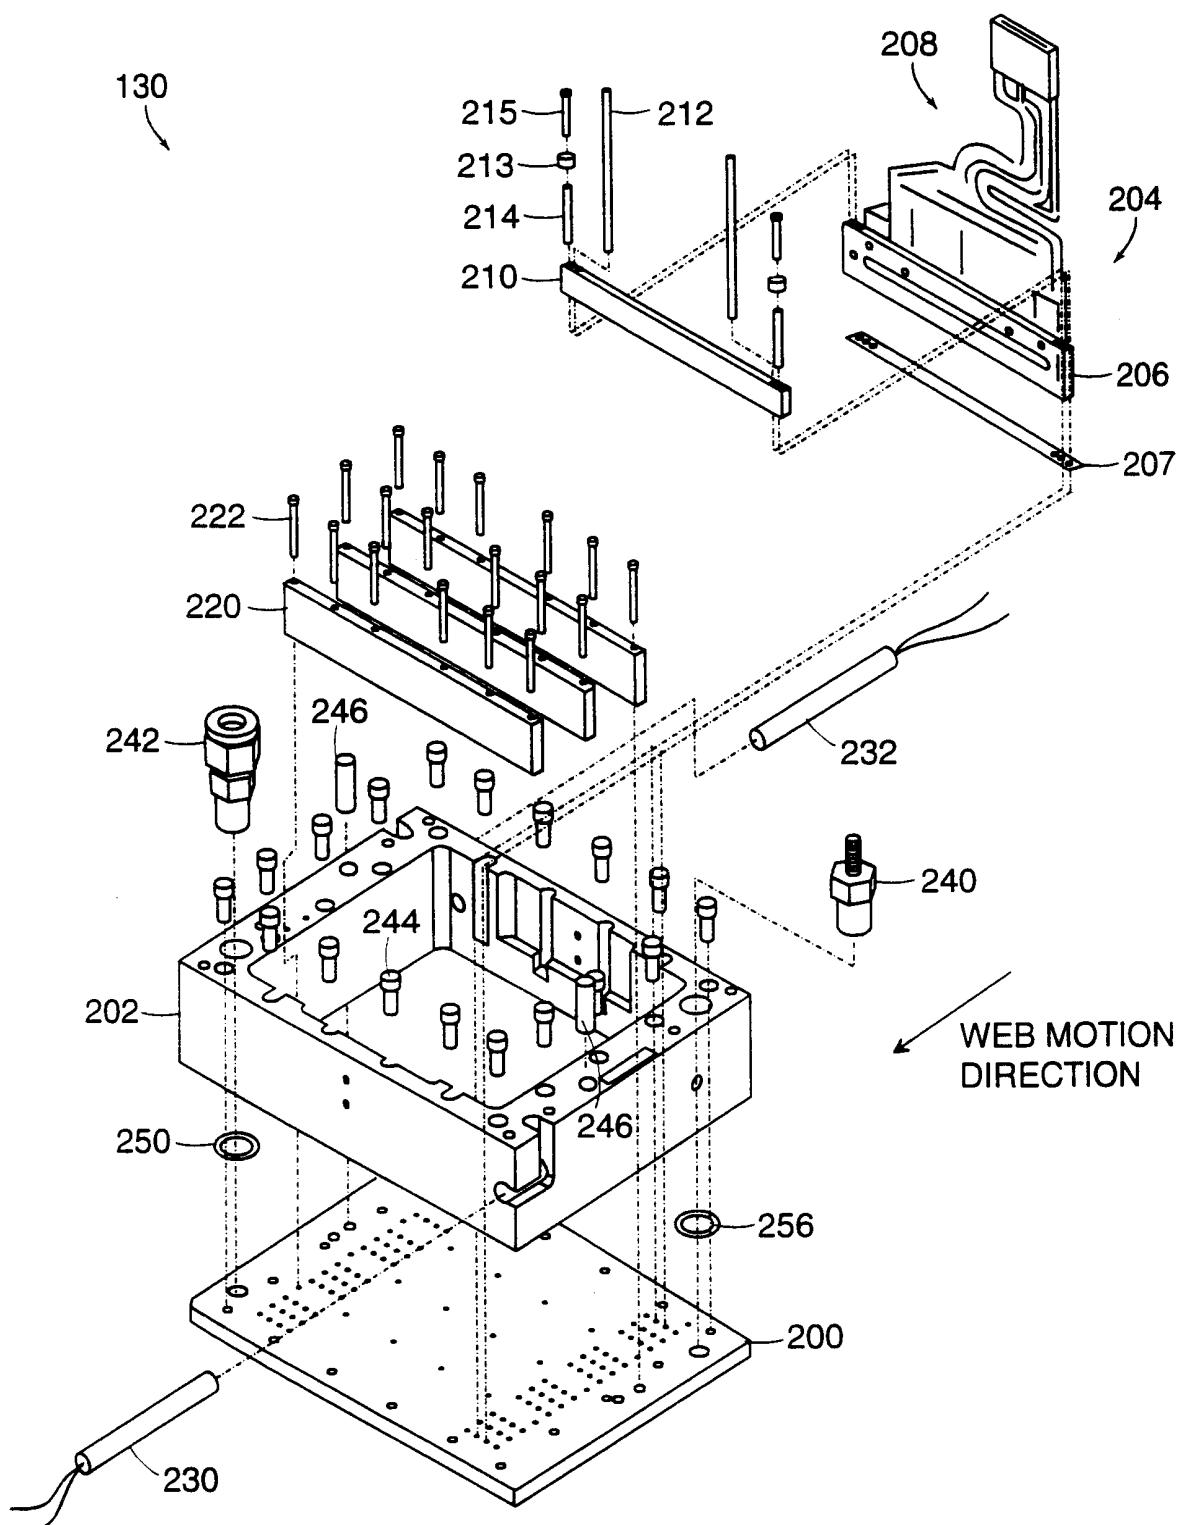


FIG. 14

INTERNATIONAL SEARCH REPORT

II. national Application No

PCT/US 00/07901

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B41J2/155 B41J2/515

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B41J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 10 315453 A (TEC CORP) 2 December 1998 (1998-12-02)	1,2, 9-11,16, 17
A	figure 7 ---	4,19
X	JP 03 121853 A (YOSHIZAWA KOGYO KK) 23 May 1991 (1991-05-23)	1,2,5-7, 9-14,16, 17,20
	figure 2 ---	
X	US 5 793 392 A (TSCHIDA MARK J) 11 August 1998 (1998-08-11)	1,2, 9-11,16, 17
	abstract; figures 4A,4B ---	
		-/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

15 June 2000

26/06/2000

Name and mailing address of the ISA

European Patent Office, P. B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Bardet, M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/07901

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 339 926 A (AM INT) 2 November 1989 (1989-11-02) abstract; figures 1-3 page 3, line 15 - line 51 page 4, line 28 - line 32 ----	1,2,5, 9-12,16, 17
X	WO 96 32281 A (SILVERBROOK KIA ;EASTMAN KODAK CO (US)) 17 October 1996 (1996-10-17) figures 11,12 page 56, line 7 -page 58, line 23 ----	1,2, 9-11,16, 17
A	EP 0 571 804 A (EASTMAN KODAK CO) 1 December 1993 (1993-12-01) abstract; figures 1,6 column 1, line 49 - line 51 column 2, line 26 - line 37 column 4, line 37 - line 48 ----	1,2,4, 9-11,16, 17,19
A	WO 98 19864 A (SPECTRA INC) 14 May 1998 (1998-05-14) figures 3,6 -----	1,9,11, 16

INTERNATIONAL SEARCH REPORT

Information on patent family members

I. national Application No

PCT/US 00/07901

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
JP 10315453 A	02-12-1998	NONE		
JP 03121853 A	23-05-1991	NONE		
US 5793392 A	11-08-1998	EP 0837776 A	29-04-1998	
		WO 9700174 A	03-01-1997	
EP 0339926 A	02-11-1989	AT 90619 T	15-07-1993	
		AT 90620 T	15-07-1993	
		CA 1320385 A	20-07-1993	
		CA 1320386 A	20-07-1993	
		DE 68907118 D	22-07-1993	
		DE 68907118 T	09-12-1993	
		DE 68907122 D	22-07-1993	
		DE 68907122 T	09-12-1993	
		EP 0340960 A	08-11-1989	
		JP 2011330 A	16-01-1990	
		JP 2011333 A	16-01-1990	
		JP 2850133 B	27-01-1999	
		US 4940996 A	10-07-1990	
		US 4942409 A	17-07-1990	
WO 9632281 A	17-10-1996	EP 0772526 A	14-05-1997	
		JP 10501767 T	17-02-1998	
		US 5796416 A	18-08-1998	
EP 0571804 A	01-12-1993	US 5428375 A	27-06-1995	
		DE 69301763 D	18-04-1996	
		DE 69301763 T	08-08-1996	
		JP 6219009 A	09-08-1994	
WO 9819864 A	14-05-1998	US 5771052 A	23-06-1998	
		EP 0891257 A	20-01-1999	