

(51) International Patent Classification:
C09J 7/02 (2006.01)(21) International Application Number:
PCT/US2017/015638(22) International Filing Date:
30 January 2017 (30.01.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/289,458 1 February 2016 (01.02.2016) US
62/439,563 28 December 2016 (28.12.2016) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors: COWMAN-EGGERT, Christina D.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). LIPSCOMB, Corinne E.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). FORNEY, Bradley S.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). LEHMANN, Megan P.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). FUSSY, Michael E.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: WEBER, Kevin W. et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: CONFORMABLE, PEELABLE ADHESIVE ARTICLES

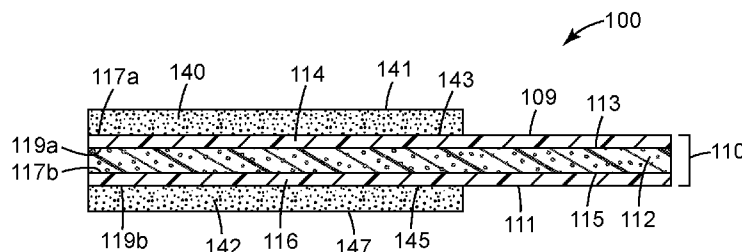


Fig. 1

(57) Abstract: The present disclosure generally relates to adhesive articles including a multilayer carrier between two peelable adhesive layers. The multilayer carrier provides enhanced conformability to the adhesive article, which under certain circumstances can increase or enhance the product performance on surfaces (e.g., rough or textured surfaces such as, for example, wallpaper, drywall, cinderblock, etc.).

CONFORMABLE, PEELABLE ADHESIVE ARTICLES

Technical Field

[0001] The present disclosure generally relates to conformable peelable adhesive articles that are capable of attaching or adhering to a substrate and that can be removed from the substrate without causing damage to the substrate. The present disclosure also generally relates to methods of making and using such adhesive articles.

Background

[0002] The revolutionary Command® Adhesive Strip products are a line of stretch removable adhesive strips that holds strongly on a variety of surfaces (including paint, wood, and tile) and that remove cleanly - no holes, marks, or sticky residue. Command® Clear Hook and Strip products are clear versions of the Command® Adhesive Strip products.

[0003] In general, these products include a stretch release adhesive composition disposed on tape or other backings. These products generally have utility in bonding to various surfaces or substrates for numerous applications. Stretch releasable adhesive products are designed to firmly adhere an article, such as a hook (to hold a picture or an article of clothing) or other decorative or utilitarian element, to a surface (an adherend), yet remove cleanly when pulled away from the architectural surface at a low angle. The clean removal aspect is so that a tacky and/or unsightly residue is not left behind on the surface after removal of the stretch release adhesive. During the process of stretch release removal, the adhesive layer typically remains adhered to the tape backing as the backing is stretched, but releases from the surface (adherend).

[0004] Peelable adhesive articles were described in, for example, PCT Patent Publication No. 2015/034104, the entire disclosure of which is incorporated herein.

Summary

[0005] The inventors of the present disclosure recognized that the existing peelable adhesive products could be improved or enhanced by improving conformability to the substrate or surface to which they are applied, attached, and/or mounted. In some instances, the enhanced conformability permits the adhesive articles to hold more weight. In some embodiments, the enhanced conformability permits the adhesive articles to be used on new surfaces (*e.g.*, cinderblock). In some embodiments, the enhanced conformability increases or enhances the product performance on certain surfaces (*e.g.*, rough or textured surfaces such as, for example, wallpaper, drywall, etc.).

[0006] The inventors of the present disclosure recognized that increasing the conformability of the adhesive article would provide increased or enhanced performance. The inventors of the present disclosure recognized that providing a conformable backing was a novel and effective method to increase

conformability of the adhesive article. To that end, the inventors of the present disclosure invented a multilayer backing for use in adhesive mounting articles.

[0007] Some embodiments relate to an adhesive article comprising a multilayer backing including a first major surface and a second major surface; the multilayer backing including a core layer and a polymeric film layer and the polymeric film layer having a stress relaxation between 5% and 100% after 10 seconds as measured by texture analysis; and a peelable adhesive directly adjacent to at least a portion of the first major surface of the multilayer backing, the peelable adhesive having a thickness of between about 0.4 mils and 60 mils.

[0008] In some embodiments, the multilayer carrier includes at least two layers. In some embodiments, the multilayer carrier includes at least three layers. In some embodiments, the multilayer carrier includes a core layer and one or more polymeric film layers adjacent to the core layer. In some embodiments, the multilayer backing includes at least two polymeric film layers that are adjacent to the core layer. In some embodiments, the multilayer carrier includes two or more core layers. In some embodiments, the multilayer carrier further includes two or more polymeric film layers adjacent to the core layer. In some embodiments, the multilayer carrier includes a core layer, and the core layer is a pressure sensitive adhesive.

[0009] In some embodiments, the multilayer carrier includes a core layer, and the core layer includes at least one of polymers of one or more monomers containing one or more (meth)acryloyl groups; vinylaromatic or olefinic block copolymers; vinylaromatic or olefinic block copolymers; silicone elastomers; monomers containing one or more (meth)acryloyl groups and vinylaromatic or olefinic block copolymers; gradient or random vinylaromatic or olefinic copolymers; vinylaromatic or olefinic or (meth)acrylic polymers or copolymers with branched, graft, or comb architectures; copolymers with branched, graft, or comb architectures containing two or more of vinylaromatic or olefinic or acrylic monomers; monomers containing one or more (meth)acryloyl groups and vinylaromatic and olefinic block copolymers; (meth)acrylic block copolymers; or any combinations thereof.

[0010] In some embodiments, the core layer further includes tackifiers, plasticizers, crosslinker, or rheology modifiers.

[0011] In some embodiments, the crosslinker is at least one of acrylic monomers containing two or more (meth)acryloyl groups; (meth)acrylic monomers containing one or more aliphatically unsaturated groups; (meth)acrylic monomers containing one or more functional groups crosslinkable through post-polymerization modification; or combinations thereof.

[0012] In some embodiments, the core layer is radiation or thermally crosslinked.

[0013] In some embodiments, the adhesive article has a polymeric film including at least one of a vinylaromatic copolymer, a linear low density polyethylene, a low density polyethylene, a high density polyethylene, a copolymer of ethylene and (meth)acrylate monomers, a copolymer of ethylene and (meth)acrylate monomers containing acid modifications, a copolymer of ethylene and vinyl acetate, a copolymer of ethylene and vinyl acetate containing acrylate, polymers from olefin monomers with

between 2 and 16 carbons, a copolymer of two or more olefin monomers, polymers from olefin monomers with atactic, syndiotactic, or isotactic stereochemistry, a copolymer of one or more olefin monomers polymerized using a metallocene catalyst, vinyl copolymers such as poly(vinyl chloride) or poly(vinyl acetate), and combinations thereof.

[0014] In some embodiments, the multilayer carrier has a thickness of at least about 0.4 mils. In some embodiments, the multilayer carrier has a thickness of between about 0.4 mils and about 60 mils.

[0015] In some embodiments, the peelable adhesive directly adjacent to at least a portion of the first major surface of the multilayer carrier is a first peelable adhesive, and further comprising: a second peelable adhesive directly adjacent to at least a portion of the second major surface of the multilayer carrier. In some embodiments, the second peelable sensitive adhesive is the same as the first peelable adhesive. In some embodiments, the second peelable adhesive is different than the first peelable adhesive.

[0016] In some embodiments, the peelable adhesive article further includes a liner disposed on at least a portion of the first or second peelable adhesive.

[0017] In some embodiments, the peelable adhesive articles further include a tab

[0018] In some embodiments, the peelable adhesive article has an area of adhesive contact with the substrate of between about 10% and about 100%. In some embodiments, the adhesive article has an area of adhesive contact with the substrate of between about 20% and about 90%. In yet other embodiments, the adhesive article has an area of adhesive contact with the substrate of between about 30% and about 80%.

[0019] In some embodiments, the adhesive article exhibits a shear strength of greater than 1800 minutes as measured according to ASTM D3654-82. In some embodiments, the adhesive article exhibits a shear strength of greater than 10,000 minutes as measured according to ASTM D3654-82. In some other, potentially advantageous embodiments, the adhesive article exhibits a shear strength of greater than 100,000 minutes as measured according to ASTM D3654-82.

[0020] In some embodiments, the adhesive article and/or the multilayer carrier has an elongation at break of about 50% to 1200% in at least one direction.

[0021] In some embodiments, the adhesive article and/or the multilayer carrier has a tensile strength at break sufficiently high so that the multilayer carrier will not rupture prior to being removed from an adherend.

[0022] In some embodiments, the peelable adhesive has a glass transition temperature of about -125° C to 15° C, as determined by dynamic mechanical analysis of the tan δ peak value.

[0023] In some embodiments, the peelable adhesive has a storage modulus of about 400,000 Pa or less at 25°C, as determined by dynamic mechanical analysis.

[0024] In some embodiments, the peelable adhesive has a storage modulus of about 300,000 Pa or less at 25°C, as determined by dynamic mechanical analysis.

[0025] In some embodiments, the thickness of the peelable adhesive on at least one of the first or second major surfaces of the multilayer carrier is about 1 μ m to about 1 mm.

[0026] In some embodiments, the adhesive releases cleanly from the surface of an adherend when the adhesive article is removed from a surface of the adherend.

[0027] In some embodiments, wherein after release of the adhesive article from an adherend, at least one of the adhesive article and/or the multilayer carrier has an elastic recovery of about 0% to 80%.

[0028] In some embodiments, at least one of the adhesive article or the multilayer carrier has a light transmission of at least about 50%.

[0029] In some embodiments, at least one of the adhesive article or the multilayer carrier has a light transmission of at least about 75%.

[0030] In some embodiments, at least one of the adhesive article or the multilayer carrier has a haze of no greater than 40%.

[0031] In some embodiments, at least one of the adhesive article or the multilayer carrier has a haze of no greater than 20%.

[0032] In some embodiments, the adhesive article has a shear strength of greater than 100,000 minutes.

[0033] In some embodiments, a method of using an adhesive article comprises: contacting the adhesive article with an adherend surface.

[0034] In some embodiments, the method further comprises peeling the adhesive article from the adherend surface to remove at least a portion of the adhesive article from the adherend surface.

[0035] In some embodiments, the adhesive article is peeled at an angle of 35° or greater. In some embodiments, the adhesive article is peeled at an angle of about 90° or greater.

[0036] In some embodiments, the method of making an adhesive article comprises disposing a peelable adhesive directly adjacent to at least a portion of a first side of a multilayer carrier.

[0037] In some embodiments, the method of making an adhesive article comprises disposing a second peelable adhesive on at least a portion of a first side of a multilayer carrier wherein the peelable adhesive directly adjacent to the first side of the multilayer carrier is a first peelable adhesive.

[0038] In some embodiments, the method of making an adhesive article comprises disposing a peelable adhesive directly adjacent to at least a portion of a first side of a multilayer carrier.

[0039] In some embodiments, the method of making an adhesive article comprises disposing a second peelable adhesive on at least a portion of a first side of a multilayer carrier, wherein the peelable adhesive directly adjacent to the first side of the multilayer carrier is a first peelable adhesive.

Brief Description of Drawings

[0040] Fig. 1 is a cross-sectional side view of an exemplary embodiment of an adhesive article as generally described herein.

[0041] Fig. 2 is a cross-sectional side view of an exemplary embodiment of an adhesive article as generally described herein.

[0042] In the following detailed description, reference may be made to the above-described set of drawings in which are shown by way of illustration several exemplary embodiments. It is to be understood that other embodiments are contemplated and may be made without departing from the scope or spirit of the present disclosure.

Detailed Description

[0043] Various embodiments and implementations will be described in detail. These embodiments should not be construed as limiting the scope of the present application in any manner, and changes and modifications may be made without departing from the spirit and scope of the inventions. Further, only some end uses have been discussed herein, but end uses not specifically described herein are included within the scope of the present application. As such, the scope of the present application should be determined by the claims.

[0044] The present disclosure generally relates to adhesive articles that can be removed from a substrate without damage. The adhesive articles include a multilayer carrier between two peelable adhesive layers. The multilayer carrier provides enhanced conformability to the adhesive article. In some instances, this enhanced conformability permits the peelable adhesive products to hold more weight. In some embodiments, this enhanced conformability permits the peelable adhesive products to be used on new surfaces (*e.g.*, cinderblock). In some embodiments, the enhanced conformability increases or enhances the product performance on certain surfaces (*e.g.*, rough or textured surfaces such as, for example, wallpaper, drywall, etc.).

[0045] Fig. 1 is a cross-sectional side view of an exemplary embodiment of an adhesive article 100 as generally described herein. Adhesive article 100 includes a multilayer carrier 110 having first and second opposed major surfaces 109 and 111. In the specific embodiment of Fig. 1, multilayer carrier 110 includes a core layer 112 between two polymeric films 114 and 116. Core layer includes first and second opposed major surfaces 113 and 115. Polymeric films 114 and 116 can be the same as one another or different from one another. Polymeric films 114 and 116 can be a single layer or can be multilayer. The specific polymeric films 114 and 116 in Fig. 1 are single layers. Each of polymeric films 114 and 116 are adjacent to peelable adhesive layers 140 and 142. Each of polymeric films 114 and 116 include first and second opposed major surfaces 117a, 119a and 117b, 119b, respectively. Peelable adhesive layers 140 and 142 can be the same as one another or different from one another. Adhesive layers 140 and 142 can be a single layer or can be multilayer. Each of adhesive layers 140 and 142 include first and second opposed major surfaces 141, 143, 145, and 147, respectively.

[0046] Fig. 2 is a cross-sectional side view of another exemplary embodiment of an adhesive article 200 as generally described herein. Adhesive article 200 is similar to adhesive article 100 shown in Fig. 1 except that the polymeric films are multilayer instead of a single layer. More specifically, adhesive article 200 includes a multilayer carrier 210. In the specific embodiment of Fig. 2, multilayer carrier 210

includes a core layer 212 between two multilayer polymeric films 214 and 216. Multilayer polymeric films 214 and 216 can be any desired multilayer polymeric film. The specific polymeric films 214 and 216 shown in Fig. 2 each include a pressure sensitive and/or peelable adhesive layer 220 between two polymeric film layers 222 and 224. Polymeric films 214 and 216 can be the same as one another or different from one another. Each of the layers within polymeric films 214 and 216 can be a single layer or can be multilayer. Peelable and/or pressure sensitive adhesive layers 240 and 242 can be the same as one another or different from one another. Peelable and/or pressure sensitive adhesive layers 240 and 242 can be a single layer or can be multilayer. Those of skill in the art will appreciate that each of the layers described above includes first and second opposed major surfaces even though these are not specifically identified with reference numerals.

[0047] Additional information about the various layers of the adhesive articles described herein is as follows.

[0048] Carrier

[0049] The carrier of the present disclosure is a multilayer construction. In other words, the carrier has two or more layers. In some embodiments, the carrier has three layers; in some embodiments, the carrier has four layers; in some embodiments, the carrier has five layers; and in some embodiments the carrier has more than five layers.

[0050] The carrier includes a core layer and at least one polymeric film layer. In some embodiments, the carrier includes two polymeric layers on either side of the core layer. Some embodiments include more than one core layer. Some embodiments include more than two polymeric film layers.

[0051] In some embodiments, the multilayer carrier has a thickness of at least about 0.4 mils; at least 1 mil; at least 2 mils; at least 3 mils; at least 4 mils; at least 5 mils; at least 6 mils; at least 7 mils; at least 8 mils; at least 9 mils; at least 10 mils; at least 12 mils; or at least 15 mils. In some embodiments, the multilayer carrier has a thickness of less than 60 mils; of less than 59 mils; of less than 58 mils; of less than 57 mils; of less than 56 mils; of less than 55 mils; of less than 54 mils; of less than 53 mils; of less than 52 mils; of less than 51 mils; of less than 50 mils; of less than 48 mils; of less than 46 mils; of less than 44 mils; of less than 42 mils; or of less than 40 mils. In some embodiments, the multilayer carrier has a thickness of between about 0.4 mils and about 60 mils. In some embodiments, the multilayer carrier has a thickness of between about 10 mils and about 30 mils.

[0052] In some embodiments, the multilayer carrier has an elastic recovery of about 0% to 80% after release of the adhesive article from an adherend. In other embodiments, the multilayer carrier has an elastic recovery of about 0% to 50% after release of the adhesive article from an adherend.

[0053] In some embodiments, the carrier and/or at least some of the layers of the carrier are substantially optically clear. As used herein, the term “optically clear” means having a visible light transmission of at least about 50% and/or a transmission haze of no greater than 40%. Some embodiments have a visible light transmission of at least about 75%. Some embodiments, have a haze of no greater than 20%. Both

the light transmission and the haze of the carrier (or at least some of the layers thereof) can be determined using, for example, ASTM D1003-95.

[0054] Core Layer(s)

[0055] The core layer is part of the carrier multilayer construction. The core layer can be a single layer or a multilayer construction. More than one core layer can be present in the carrier. Multiple core layers can be separated by layers of film, which may further contain one or more layers.

[0056] In some embodiments, the core layer assists the peelable adhesive article in conforming to the surface of the adherend. In some embodiments, the core layer and/or adhesive article has a stress relaxation between 5% and 100% after 10 seconds as measured by texture analysis. In some embodiments, the stress relaxation of the core layer and/or adhesive article permits more force to be applied through the peel release adhesive tape when a user is applying the tape to the surface of an adherend.

[0057] The core layer(s) can include any components that permit it to have the desired properties. Some exemplary desired properties include viscoelasticity, storage modulus, loss modulus, and glass transition temperature. In some embodiments, the core has a storage modulus of between about 15×10^3 Pa and about 2.5×10^6 Pa at 25 degrees Celsius. In some embodiments, the core has a $\tan \delta$ (where $\tan \delta$ is the loss modulus divided by the storage modulus) of between about 0.4 and about 1.2 at 25 degrees Celsius. In some embodiments, the core has a glass transition temperature of between about -125 and about 40 degrees Celsius. In some embodiments, the core has a stress relaxation between 5% and 100% after 10 s.

[0058] In some embodiments, the core is an adhesive. In some embodiments, the core is a pressure sensitive adhesive. In some embodiments, the viscoelastic core fulfills the Dahlquist criterion for pressure-sensitive tack. The Dahlquist criterion for pressure-sensitive tack is defined as an adhesive formulation that possesses a modulus of not more than 3×10^5 Pa at 25 °C at 1 Hz (A.V. Pocius in “Adhesives and Adhesion Technology, 3rd Ed.” 2012, Hanser Publications, Cincinnati, OH; also referenced in US 2011/0179549, US 7,605,212, and US 5,719,247). The Dahlquist criterion for pressure sensitive tack is also described as 1 sec compliance of a typical pressure-sensitive adhesive to be 10^{-6} cm²/dyne (D.A. Satas (ed.) in “Handbook of Pressure-Sensitive Adhesive Technology” 1982, Van Nostrand Reinhold Company Inc. New York, New York.)

[0059] In some embodiments, the core layer includes a (meth)acrylic polymer. The (meth)acrylic polymer comprises one or more (meth)acrylic ester monomers derived from a (*e.g.*, non-tertiary) alcohol containing from 1 to 18 carbon atoms and preferably from 4 to 12 carbon atoms. In some embodiments, the (meth)acrylic polymer is a homopolymer. In some embodiments, the (meth)acrylic polymer is a copolymer of two or more monomers. In some embodiments, the (meth)acrylic polymer is a copolymerization of a polar (meth)acrylic monomer and an alkyl (meth)acrylic monomer. In some embodiments, the alkyl (meth)acrylic monomer has between 5 and 18 carbon atoms. The alkyl group on the (meth)acrylic monomer can be linear or branched. The glass transition of a polymer of the alkyl

(meth)acrylic monomer can be between about -80 degrees Celsius and about 50 degrees Celsius. The polar (meth)acrylic monomer can be a (meth)acrylic monomer containing an acid group such as those derived from ethylenically unsaturated carboxylic acids or salts thereof and mixtures thereof. In some embodiments, the polar (meth)acrylic monomer can comprise a non-acid polar functionalized monomer including but not limited to the following: 2-hydroxyethyl (meth)acrylate; N-vinylpyrrolidone; N-vinylcaprolactam; acrylamide; mono- or di-N-alkyl substituted acrylamide; t-butyl acrylamide; dimethylaminoethyl acrylamide; N-octyl acrylamide; poly(alkoxyalkyl) (meth)acrylates including 2-(2-ethoxyethoxy)ethyl (meth)acrylate, 2-ethoxyethyl (meth)acrylate, 2-methoxyethoxyethyl (meth)acrylate, 2-methoxyethyl methacrylate, polyethylene glycol mono(meth)acrylates; alkyl vinyl ethers, including vinyl methyl ether; and mixtures thereof. In some embodiments, the polar monomers may comprise a mixture of acid functional and non-acid functional polar (meth)acrylate monomers. In some embodiments, the core can optionally comprise (meth)acrylic monomers copolymerized with vinyl monomers including vinyl esters (*e.g.*, vinyl acetate and vinyl propionate), styrene, substituted styrene (*e.g.*, α -methyl styrene), vinyl halide, and mixtures thereof. It is to be understood that in any case that the term acrylic polymer or (meth)acrylic polymer can refer to either an acrylic polymer or a methacrylic polymer.

[0060] In some embodiments, the core layer includes an acrylic that has been or can be crosslinked. The core may be crosslinked through the addition of crosslinkable monomers. The core may comprise a single crosslinking monomer, or a combination of two or more crosslinking monomers. Further, the crosslinking monomer may comprise two or more isomers of the same general structure. In some embodiments, the crosslinkable monomer may be a multifunctional (meth)acrylic monomer including but not limited to: di(meth)acrylates, tri(meth)acrylates, and tetra(meth)acrylates, such as 1,6-hexanediol di(meth)acrylate, poly(ethylene glycol) di(meth)acrylates, polybutadiene di(meth)acrylate, polyurethane di(meth)acrylates, propoxylated glycerin tri(meth)acrylate, and mixtures thereof. In other embodiments, the crosslinking monomer comprises at least two terminal groups selected from allyl, methallyl, or combinations thereof. In one embodiment, the crosslinking monomer comprises two (meth)allyl groups and a (meth)acrylate group. In some embodiments, the crosslinkable monomer is dihydrocyclopentadienyl acrylate. In some embodiments, core layers may be crosslinked by one or more of the same or different crosslinkable groups. In some embodiments, the core may be crosslinked using radiation or thermally-induced crosslinking techniques known in the art.

[0061] In some embodiments, the core layer is comprised of (meth)acrylic copolymers made by various polymerization techniques including but not limited to solvent polymerization, dispersion polymerization, solventless bulk polymerization, and radiation polymerization, including processes using ultraviolet light, electron beam, and gamma radiation. The monomer mixture may comprise a polymerization initiator, for example a thermal initiator or a photoinitiator of a type and in an amount effective to polymerize the comonomers.

[0062] Interfaces in the carrier may be subjected to a priming treatment prior to being positioned adjacent to one or more of: a core layer, a polymeric film layer, or a pressure-sensitive adhesive layer. The priming treatment serves to increase adhesion between two layers within the adhesive tape construction. Any suitable priming treatment known in the art can be used. The priming treatment can include, for example, a chemical adhesion promoter.

[0063] In some embodiments, the core layer contains inorganic particles. The particles may be added to the monomer mixture or added to the core layer following partial polymerization. The inorganic particles can be distributed in one or more core layers. Different inorganic particles can be distributed in different core layers. One core layer can also contain multiple compositions, types, or sizes of inorganic particles. The inorganic particles in one core layer may be of the same or different composition and surface treatment. The inorganic particles can be distributed evenly in any of the core layers or can be distributed unevenly. The surface of the inorganic particles may be treated or functionalized to be hydrophobic or to be hydrophilic. The inorganic particles may be less than 20 microns in size. In many embodiments, the inorganic particles are fumed silica particles, examples may include AEROSIL(R) fumed silica R972. The inorganic particles can be well dispersed in the core layers or the inorganic particles can be agglomerated or non-agglomerated and aggregated or non-aggregated. The inorganic particles can be porous or non-porous. The inorganic particles can be comprised of metals, metal oxides, ceramics, and the like. Inorganic particles can be selected from but are not limited to silica, alumina, titania, zirconia, and the like.

[0064] In some embodiments, the core includes copolymers containing vinylaromatic monomers. Notable embodiments include copolymers of vinylaromatic monomers, and 1,3 dienes. The resulting copolymers can be random copolymers, gradient copolymers, block copolymers, or any combinations or blends thereof. The block copolymers from the copolymerization of vinylaromatic monomers and 1,3 dienes can contain two or more blocks, an exemplary example includes Kraton™ rubbers. The block copolymers can be symmetric (*e.g.*, A-B-A architecture) or asymmetric (*e.g.*, A-B-C architecture). In certain embodiments, the vinylaromatic monomers include styrene. In certain embodiments, the 1,3 dienes include isoprene or butadiene. The block copolymers can be partially or fully hydrogenated. The block copolymers can be linear or have branched architectures. The gradient copolymers can be linear or have branched architectures. Materials from the copolymerization of vinylaromatic monomers and 1,3 dienes can contain tackifying resins, plasticizers, or other rheology modifiers. The vinylaromatic copolymers can be covalently crosslinked. The vinylaromatic copolymers can be branched, graft, or comb architectures containing or not containing polymer blocks. The vinylaromatic copolymers can also include the copolymerization of other monomers containing vinyl groups such as (meth)acrylate monomers containing 4 to 18 carbons, (meth)acrylic acid, and the like copolymerized into blocks, random copolymers, or gradient copolymers into linear, branched, graft, or comb architectures.

[0065] In some embodiments, the core layer can further includes plasticizers, crosslinker, pigments, fragrances, rheology modifiers, or other additives. The tackifying resin or rheology modifier could be any known tackifying resin or rheology modifier known in the art.

[0066] Some exemplary commercially available materials that could form the core include, for example, 3M™ Pressure Sensitive Acrylic Plus™ Tape PT1100, and/or 3M™ VHB™ Tape 4905 pressure sensitive adhesives.

[0067] The core(s) described herein can be produced using any method known in the art.

[0068] Polymeric Film Layer(s)

[0069] The polymeric film layer is part of the carrier multilayer construction. The polymeric film layer can be a single layer or a multilayer construction. More than one polymeric film layer can be present in the carrier. The polymeric film layers can be comprised of any film-forming polymers.

[0070] The polymeric film layer(s) can include any components that permit it/them to have the desired properties. Some exemplary desired properties include promoting adhesion of the core layer(s) to the pressure sensitive adhesive layer(s). Other exemplary desired properties include elongation at break of greater than 50%.

[0071] In some embodiments, the polymeric film layer(s) includes at least one of a vinylaromatic copolymer, a linear low density polyethylene, a low density polyethylene, a high density polyethylene, a copolymer of ethylene and (meth)acrylate monomers, a copolymer of ethylene and (meth)acrylate monomers containing acid modifications, a copolymer of ethylene and vinyl acetate, a copolymer of ethylene and vinyl acetate containing acrylate, and/or acid modifications. In some embodiments, the film contains polymers from olefin monomers with between 2 and 16 carbons. In some embodiments, the film is a copolymer of two or more olefin monomers. In some embodiments, the film contains polymers from olefin monomers with atactic, syndiotactic, or isotactic stereochemistry. In some embodiments, the film is a copolymer of one or more olefin monomers polymerized using a metallocene catalyst. In some embodiments, the film is comprised of vinyl copolymers such as poly(vinyl chloride), poly(vinyl acetate), and the like. In some embodiments, the film is a blend comprised of any of the polymers listed above.

[0072] The polymer films described herein can be produced using any method known in the art.

[0073] Peelable Adhesive Layer(s)

[0074] The adhesives used in the adhesive articles described herein can include any adhesive having the desired properties. In some embodiments, the adhesive is peelable. In some embodiments, the adhesive releases cleanly from the surface of an adherend when the adhesive article is peeled at an angle of about 35° or less from a surface of the adherend. In some embodiments, the peelable adhesive releases from a surface of an adherend when the multilayer carrier is peeled at an angle of about 35° or greater from the adherend surface such that there are substantially no traces of the adhesive left behind on the surface of the adherend.

[0075] The adhesive can be, for example, any of the adhesives described in any of the following patent applications, all of which are incorporated by reference herein: PCT Patent Publication Nos. 2015/035556, 2015/035960, U.S. Patent Application No. 2015/034104, or pending patent application matter numbers (assigned to the present assignee): 62/439576, 62/289660, or 62/289673, all of which are incorporated herein in their entirety.

[0076] In some embodiments, the peelable adhesive is a pressure sensitive adhesive. A general description of useful pressure sensitive adhesives may be found in the Encyclopedia of Polymer Science and Engineering, Vol. 13, Wiley-Interscience Publishers (New York, 1988). Additional description of useful pressure-sensitive adhesives may be found in the Encyclopedia of Polymer Science and Technology, Vol. 1, Interscience Publishers (New York, 1964). Any suitable composition, material or ingredient can be used in the pressure sensitive adhesive. Exemplary pressure sensitive adhesives utilize one or more thermoplastic elastomers, *e.g.*, in combination with one or more tackifying resins.

[0077] Some peelable adhesives that can be used in the adhesive articles of the present disclosure have a glass transition temperature of about -125° C to 15° C, as determined by dynamic mechanical analysis of the $\tan \delta$ peak value. Some peelable adhesives that can be used in the adhesive articles of the present disclosure have a storage modulus of about 500,000 Pa or less, 400,000 Pa or less, 300,000 Pa or less, or 250,000 Pa or less at 25°C, as determined by dynamic mechanical analysis.

[0078] In some embodiments, the thickness of the peelable adhesive on at least one of the first or second major surfaces of the multilayer carrier is about 1 μm to about 1 mm.

[0079] In some embodiments, the peelable adhesives are tailored to achieve peel with no or minimal damage. Exemplary methods and articles for doing so are described in, for example, U.S. Patent No. 6,835,452 and provisional patent applications filed by the present assignee under the following application numbers: 62/289585, 62/289660, and 62/379812 and incorporated herein in their entirety.

[0080] Adhesive Article(s)

[0081] In some embodiments, the adhesive article further includes a tab. The tab is an area that can be easily accessed by the user to assist in or begin to release the adhesive article from the adherend. The removal tab can be tacky from the outermost adhesive layer or non-tacky by being covered by layers of stretch film, non-stretch film, release liner, or from detackified adhesive.

[0082] In some embodiments, the adhesive article further includes one or more release liners. The release liner can be, for example, on either or both of the major surfaces of the adhesive layers. The release liner protects the adhesive during manufacturing, transit, and before use. When the user desires to use the adhesive article, the user can peel or remove the release liner to expose the adhesive. Examples of suitable liners include paper, *e.g.*, kraft paper, or polymeric films, *e.g.*, polyethylene, polypropylene or polyester. At least one surface of the liner can be treated with a release agent such as silicone, a fluorochemical, or other low surface energy based release material to provide a release liner. Suitable release liners and methods for treating liners are described in, *e.g.*, U.S. Pat. Nos. 4,472,480, 4,980,443

and 4,736,048, and incorporated herein. Preferred release liners are fluoroalkyl silicone polycoated paper. The release liners can be printed with lines, brand indicia, or other information.

[0083] In some embodiments, the adhesive articles of the present disclosure can be removed from a substrate or surface without causing damage. As used herein, the term “without causing damage” or “damage-free” or the like means the adhesive article can be separated from the substrate without causing visible damage to paints, coatings, resins, coverings, or the underlying substrate and/or leaving behind residue. Visible damage to the substrates can be in the form of, for example, scratching, tearing, delaminating, breaking, crumbling, straining, and the like to any layers of the substrate. Visible damage can also be discoloration, weakening, changes in gloss, changes in haze, or other changes in appearance of the substrate.

[0084] In some embodiments, the adhesive articles of the present disclosure have increased conformability. Increased conformability can be shown, for example, by comparing the area of adhesive contact between the adhesive article and the substrate or surface to which the adhesive article is adhered. In some embodiments, the adhesive articles of the present disclosure have an area of adhesive contact with the substrate of at least about 10%; at least about 15%; at least about 20%; at least about 25%; at least about 30%; at least about 35%; at least about 40%; at least about 45%; at least about 50%; at least about 55%; at least about 60%; at least about 65%; at least about 70%; at least about 75%; or at least about 80%. In some embodiments, the adhesive articles of the present disclosure have an area of adhesive contact with the substrate of between about 15% and about 100%. In some embodiments, the adhesive articles of the present disclosure have an area of adhesive contact with the substrate of between about 20% and about 90%. In some embodiments, the adhesive articles of the present disclosure have an area of adhesive contact with the substrate of between about 30% and about 80%.

[0085] Some adhesive articles of the present disclosure have excellent shear strength. Some embodiments of the present disclosure have a shear strength of greater than 1600 minutes as measured according to ASTM D3654-82. Some embodiments of the present disclosure have shear strength of greater than 10,000 minutes as measured according to ASTM D3654-82. Some other embodiments of the present disclosure have shear strength of greater than 100,000 minutes as measured according to ASTM D3654-82.

[0086] Some adhesive articles of the present disclosure have a lower peel force to make the adhesive article easier to remove (*e.g.*, a force between about 25 oz/in to about 50 oz/in). Some adhesive articles of the present disclosure can have a higher peel force as to permit handling of the adhesive article by the user without accidental separation (*e.g.*, a force between about 50 oz/in to 100 oz/in). Some embodiments of the present disclosure have a peel force between about 20 oz/in to 90 oz/in. Some embodiments of the present disclosure have a peel force between about 30 oz/in to 70 oz/in. Some adhesive articles of the present disclosure have an elongation at break of greater than 50% in at least one direction. Some adhesive articles of the present disclosure have an elongation at break of between about 50% and about 1200% in at least one direction.

[0087] Some adhesive articles of the present disclosure have a tensile strength at break sufficiently high so that the adhesive article will not rupture prior to being removed from an adherend at an angle of 35° or greater.

[0088] In some embodiments, the adhesive articles of the present disclosure exhibit enhanced conformability to a substrate or surface than prior art adhesive mounting articles. In some embodiments, the adhesive articles of the present disclosure hold more weight when adhered or attached to a substrate or surface than prior art adhesive mounting articles. In some embodiments, the adhesive articles of the present disclosure hold more weight for a longer period of time when adhered or attached to a substrate or surface than prior art adhesive mounting articles. In some embodiments, the adhesive articles of the present disclosure remain adhered to a textured, rough, or irregular surface for a longer period of time than prior art adhesive mounting articles. In some embodiments, the adhesive articles of the present disclosure hold a higher amount of weight when adhered to a textured, rough, or irregular surface than prior art adhesive mounting articles.

[0089] In some embodiments, the adhesive article is substantially optically clear. Some embodiments have a light transmission of at least about 50%. Some embodiments have a light transmission of at least about 75%. Some embodiments have a haze of no greater than 40%. Some embodiments, have a haze of no greater than 20%. Both the light transmission and the haze of the adhesive article can be determined using, for example, ASTM D1003-95.

[0090] Mounting Device

[0091] Some embodiments further include a mounting device. Exemplary mounting devices include, for example, hooks, clips, and loops. Any of the following mounting devices can be used with the adhesive article of the present disclosure: Application Matter No. 77486US002 (assigned to the present assignee), U.S. Pat. No. 5,409,189 (Luhmann), U.S. Pat. No. 5,989,708 (Kreckel), 8,708,305 (McGreevy), U.S. Pat. No. 5,507,464 (Hamerski et al.), U.S. Pat. No. 5,967,474 (doCanto et al.), U.S. Pat. No. 6,082,686 (Schumann), U.S. Pat. No. 6,131,864 (Schumann), U.S. Pat. No. 6,811,126 (Johansson, et al.), U.S. Pat. No. D665653, and U.S. Pat. No. 7,028,958 (Pitzen, et al.), all of which are incorporated by reference in their entirety herein.

[0092] In some embodiments, the adhesive article can further include a separable connector. Some exemplary separable connectors are described in, for example, U.S. Patent Nos. 6,572,945; 7,781,056; 6,403,206; and 6,972,141, all of which are incorporated by reference in their entirety herein.

[0093] Method of Making the Adhesive Articles Described Herein

[0094] The adhesive articles described herein can be made in various ways. One embodiment involves disposing an adhesive onto or adjacent to a major surface of a multilayer carrier. In some embodiments, a second adhesive is disposed onto the other major surface of the multilayer carrier.

[0095] The adhesive can be disposed on the multilayer carrier in any known way, including, for example, the pressure sensitive adhesive composition can be coated onto a release liner, coated directly onto a carrier, or formed as a separate layer (*e.g.*, coated onto a release liner) and then laminated to a carrier.

[0096] To improve adhesion of the pressure sensitive adhesive composition to the carrier, the carrier can be pretreated prior to applying, *e.g.*, coating or laminating, the adhesive composition on the carrier. Examples of suitable treatments include corona discharge, plasma discharge, flame treatment, electron beam irradiation, ultraviolet (UV) radiation, acid etching, chemical priming and combinations thereof. The treatment can optionally be performed with a reactive chemical adhesion promoter including, *e.g.*, hydroxyethylacrylate, or hydroxyethyl methacrylate, or another reactive species of low molecular weight.

[0097] Methods of Using the Adhesive Articles Described Herein

[0098] The peelable articles of the present disclosure can be used in various ways. In some embodiments, the adhesive article is applied, attached to, or pressed into an adherend. In this way, the adhesive article contacts the adherend. Where a release liner is present, the release liner is removed before the adhesive article is applied, attached to, or pressed into an adherend. In some embodiments, at least a portion of the adherend is wiped with alcohol before the adhesive article is applied, attached to, or pressed into an adherend.

[0099] To remove the adhesive article from the adherend, at least a portion of the adhesive article is peeled or stretched away from the adherend. In some embodiments, the angle of stretch is 35° or greater, typically about 90° or greater. In embodiments where a tab is present, the user can grip the tab and use it to release or remove the adhesive article from the adherend.

Embodiments

A. An adhesive article, comprising:

a multilayer backing including a first major surface and a second major surface; the multilayer backing including a core layer and a polymeric film layer and the polymeric film layer having a stress relaxation between 5% and 100% after 10 seconds as measured by texture analysis; and a peelable adhesive directly adjacent to at least a portion of the first major surface of the multilayer backing, the peelable adhesive having a thickness of between about 0.4 mils and 60 mils.

B. The adhesive article of embodiment A, wherein the multilayer carrier includes at least two layers.

C. The adhesive article of any of the preceding embodiments, wherein the multilayer carrier includes at least three layers.

D. The adhesive article of any of the preceding embodiments, wherein the multilayer carrier includes a core layer and one or more polymeric film layers adjacent to the core layer.

E. The adhesive article of any of the preceding embodiments, wherein the multilayer backing includes at least two polymeric film layers that are adjacent to the core layer.

F. The adhesive article of any of the preceding embodiments, wherein the multilayer carrier includes two or more core layers.

G. The adhesive article of embodiment F, wherein the multilayer carrier further includes two or more polymeric film layers adjacent to the core layer.

H. The adhesive article of any of the preceding embodiments, wherein the multilayer carrier includes a core layer, and the core layer is a pressure sensitive adhesive.

I. The adhesive article of any of the preceding embodiments, wherein the multilayer carrier includes a core layer, and the core layer includes at least one of polymers of one or more monomers containing one or more (meth)acryloyl groups; vinylaromatic or olefinic block copolymers; vinylaromatic or olefinic block copolymers; silicone elastomers; monomers containing one or more (meth)acryloyl groups and vinylaromatic or olefinic block copolymers; gradient or random vinylaromatic or olefinic copolymers; vinylaromatic or olefinic or (meth)acrylic polymers or copolymers with branched, graft, or comb architectures; copolymers with branched, graft, or comb architectures containing two or more of vinylaromatic or olefinic or acrylic monomers; monomers containing one or more (meth)acryloyl groups and vinylaromatic and olefinic block copolymers; (meth)acrylic block copolymers; or any combinations thereof.

J. The adhesive article of any of embodiments D-I, wherein the core layer further includes tackifiers, plasticizers, crosslinker, or rheology modifiers.

K. The adhesive article of embodiment J, wherein the crosslinker is at least one of acrylic monomers containing two or more (meth)acryloyl groups; (meth)acrylic monomers containing one or more aliphatically unsaturated groups; (meth)acrylic monomers containing one or more functional groups crosslinkable through post-polymerization modification; or combinations thereof.

L. The adhesive article of any of embodiments D-K, wherein the core layer is radiation or thermally crosslinked.

M. The adhesive article of any of embodiments D-L, wherein the polymeric film includes at least one of a vinylaromatic copolymer, a linear low density polyethylene, a low density polyethylene, a high density polyethylene, a copolymer of ethylene and (meth)acrylate monomers, a copolymer of ethylene and (meth)acrylate monomers containing acid modifications, a copolymer of ethylene and vinyl acetate, a copolymer of ethylene and vinyl acetate containing acrylate, polymers from olefin monomers with between 2 and 16 carbons, a copolymer of two or more olefin monomers, polymers from olefin monomers with atactic, syndiotactic, or isotactic stereochemistry, a copolymer of one or more olefin monomers polymerized using a metallocene catalyst, vinyl copolymers such as poly(vinyl chloride) or poly(vinyl acetate), and combinations thereof.

N. The adhesive article of any of the preceding embodiments, wherein the multilayer carrier has a thickness of at least about 0.4 mils.

O. The adhesive article of any of the preceding embodiments, wherein the multilayer carrier has a thickness of between about 0.4 mils and about 60 mils.

P. The adhesive article of any of the preceding embodiments, wherein the peelable adhesive directly adjacent to at least a portion of the first major surface of the multilayer carrier is a first peelable adhesive, and further comprising:

a second peelable adhesive directly adjacent to at least a portion of the second major surface of the multilayer carrier.

Q. The adhesive article of embodiment P, wherein the second peelable sensitive adhesive is the same as the first peelable adhesive.

R. The adhesive article of embodiment P, wherein the second peelable adhesive is different than the first peelable adhesive.

S. The peelable adhesive article of any of embodiments P-R, further comprising a liner disposed on at least a portion of the first or second peelable adhesive.

T. The peelable adhesive article of any of the preceding embodiments, further comprising a tab.

U. The peelable adhesive article of any of the preceding embodiments, wherein the peelable adhesive article has an area of adhesive contact with the substrate of between about 10% and about 90%.

V. The adhesive article of any of the preceding embodiments, wherein the adhesive article has an area of adhesive contact with the substrate of between about 10% and about 80%.

W. The adhesive article of any of the preceding embodiments, wherein the adhesive article has an area of adhesive contact with the substrate of between about 20% and about 70%.

X. The adhesive article of any of the preceding embodiments, wherein the adhesive article exhibits a shear strength of greater than 1600 minutes as measured according to ASTM D3654-82.

Y. The adhesive article of any of the preceding embodiments, wherein the adhesive article exhibits a shear strength of greater than 10,000 minutes as measured according to ASTM D3654-82.

Z. The adhesive article of any of the preceding embodiments, wherein the adhesive article exhibits a shear strength of greater than 100,000 minutes as measured according to ASTM D3654-82.

AA. The adhesive article of any of the preceding embodiments, wherein at least one of the adhesive article and/or the multilayer carrier has an elongation at break of about 50% to 1200% in at least one direction.

BB. The adhesive article of any of the preceding embodiments, wherein at least one of the adhesive article and/or the multilayer carrier has a tensile strength at break sufficiently high so that the multilayer carrier will not rupture prior to being removed from an adherend.

CC. The adhesive article of any of the preceding embodiments, wherein the peelable adhesive has a glass transition temperature of about -125° C to 15° C, as determined by dynamic mechanical analysis of the $\tan \delta$ peak value.

DD. The adhesive article of any of the preceding embodiments, wherein the peelable adhesive has a storage modulus of about 400,000 Pa or less at 25°C, as determined by dynamic mechanical analysis.

EE. The adhesive article of any of the preceding embodiments, wherein the peelable adhesive has a storage modulus of about 300,000 Pa or less at 25°C, as determined by dynamic mechanical analysis.

FF. The adhesive article of any of the preceding embodiments, wherein the thickness of the peelable adhesive on at least one of the first or second major surfaces of the multilayer carrier is about 1 μm to about 1 mm.

GG. The adhesive article of any of the preceding embodiments, wherein the adhesive releases cleanly from the surface of an adherend when the adhesive article is removed from a surface of the adherend.

HH. The adhesive article of any of the preceding embodiments, wherein after release of the adhesive article from an adherend, wherein at least one of the adhesive article and/or the multilayer carrier has an elastic recovery of about 0% to 80%.

II. The adhesive article of any of the preceding embodiments, wherein at least one of the adhesive article or the multilayer carrier has a light transmission of at least about 50%.

JJ. The adhesive article of any of the preceding embodiments, wherein at least one of the adhesive article or the multilayer carrier has a light transmission of at least about 75%.

KK. The adhesive article of any of the preceding embodiments, wherein at least one of the adhesive article or the multilayer carrier has a haze of no greater than 40%.

LL. The adhesive article of any of the preceding embodiments, wherein at least one of the adhesive article or the multilayer carrier has a haze of no greater than 20%.

MM. The adhesive article of any of the preceding embodiments, having a shear strength of greater than 100,000 minutes on at least one of drywall and glass.

NN. A method of using an adhesive article, comprising: contacting the adhesive article of any of embodiments A-MM with an adherend surface.

OO. The method of embodiment NN, further comprising:
peeling the adhesive article from the adherend surface to remove at least a portion of the adhesive article from the adherend surface.

PP. The method of embodiment OO, where the adhesive article is peeled at an angle of 35° or less.

QQ. A method of making an adhesive article comprising: disposing a peelable adhesive directly adjacent to at least a portion of a first side of a multilayer carrier.

[00100] The following examples describe some exemplary constructions of various embodiments of the adhesive articles and methods of making the articles described in the present application. The following examples describe some exemplary constructions and methods of constructing various embodiments within the scope of the present application. The following examples are intended to be illustrative, but are not intended to limit the scope of the present application.

Examples

[00101] Materials used in the various Examples below are shown in Table 1. Other test materials and general procedures are listed below.

Table 1. Material and Supplier Information

Material	Supplier
C12 Acrylate Monomer	Prepared as described in Example 9 of US 9,102,774.
2-Ethyl hexyl acrylate (EHA)	BASF Corporation, Florham Park, NJ
Acrylic acid (AA)	BASF Corporation, Florham Park, NJ
IRGACURE 651, a photoinitiator	BASF Corporation, Florham Park, NJ
Dihydrocyclopentadienyl acrylate, a crosslinker (DCPA)	BASF Corporation, Florham Park, NJ
3M Acrylic Plus Tape PT1100, Black, 1.14 mm	3M Company, St. Paul, MN
3M VHB™ Tape 4905	3M Company, St. Paul, MN
3M VHB™ Tape 4910	3M Company, St. Paul, MN
EXACT 8201, an ethylene octene plastomer	ExxonMobil Corporation, Houston, TX
OPTEMA TC 120, an ethylene methyl acrylate (EMA) copolymer	ExxonMobil Corporation, Houston, TX
3M Adhesion Promoter 4298UV, primer	3M Company, St. Paul, MN
AEROSIL R972 fumed silica	Evonik Industries, Hanau-Wolfgang, Germany
HDK H15 fumed silica	Wacker Chemical Corporation Adrian, MI

[00102] Painted Drywall Panel Preparation

[00103] Drywall panels (obtained from Materials Company, Metzger Building, St. Paul, MN) were painted with Sherwin Williams DURATION Home Interior paint in Ben Bone color (obtained from the Sherwin-Williams Company of Cleveland, OH) or BEHR PREMIUM PLUS ULTRA Primer and Paint 2 in 1 Flat Egyptian Nile (obtained from Behr Process Corporation of Santa Ana, CA).

[00104] Procedure for painting drywall with paints: a first coat of paint was applied to a drywall panel by paint roller, followed by air drying for 24 hours at ambient conditions. A second coat of paint was applied dried at ambient conditions for 24 hours. The panel was placed in a DESPATCH V-31 Std forced air oven (Despatch Industries, Minneapolis, MN, USA) set to 50°C for 7 days. The panel was then stored at ambient conditions until use.

[00105] Test Methods**[00106] Static Shear Test Method**

[00107] Static shear was determined according to the method of ASTM D3654-82 entitled, "Holding Power of Pressure-Sensitive Tapes," with the following modifications. The release liner(s), where present, was removed from the test sample. Test samples having the dimensions 0.5 in x 0.5 in (1.27 cm x 1.27 cm) were adhered to the test substrate through the adhesive composition at 72°F (22°C) and 5% relative humidity by passing a 15 lb (6.8 kg) hand held roller over the length of the sample two times at a rate of 12 in/min (30.48 cm/min). A metal vapor coated polyester film having the dimensions 0.75 in x 4 in (1.91 cm x 10.16 cm) was bonded to one side of the adhesive test sample for the purpose of attaching the load.

[00108] The test sample was allowed to dwell on the test substrate for 1 hour at 22°C and 50 % relative humidity; thereafter a 1 kg weight was applied to the metal vapor coated polyester film. The time to failure was recorded in minutes and the average value, calculated pursuant to procedures A and C of section 10.1 of the standard, for all of the test samples was reported. Three samples were tested and the average time to failure of the three samples and the failure mode each sample was recorded. A value was reported with a greater than symbol (*i.e.*, >) when at least one of the three samples had not failed at the time the test was terminated.

[00109] % Adhesive Surface Contact Test Method

[00110] The first release liner from the peel release adhesive tape test strip was removed and was applied to a rigid stainless steel backing using finger pressure. The second release liner was then removed. A thin layer of STAZON Multi-Surface Ink in Jet Black (Tsukineko Co., Japan), was applied evenly to the peel release adhesive strip using a hard rubber brayer. Before the ink dried, the inked surface of the peel release adhesive tape was rolled onto the smooth side of a Cracked Ice White Acrylic Lighting Panel

(Plaskolite Inc., Columbus, OH) with a single pass using a 5 lb roller. The inked peel release adhesive strip was held on the surface using finger pressure for three seconds. The inked adhesive strip was then gently peeled from the surface. The transferred ink was allowed to dry for one hour. Areas darkened due to ink transfer were considered areas with adhesive contact to the surface. A digital camera was used to take photographs of the inked test surface. Imaging software was used to determine the percent area with adhesive contact.

[00111] Compression Stress Relaxation (CSR) Test Method

[00112] Compression stress relaxation (CSR) was measured using a Model TA.XTplus texture analyzer with a TA-8 ¼" ball probe (Stable Micro Systems, Ltd., Godalming, U.K.). One release liner was removed from the test sample and the adhesive strip was placed adhesive side down onto a glass microscope slide and the sample was rolled down with a 150 gram roller using two passes. The glass microscope slide was clamped into the sample fixture and the sample height was calibrated for each sample prior to taking the stress relaxation measurements. The second release liner was removed from each test sample prior to taking the stress relaxation measurements. The CSR for each sample was measured with the texture analyzer in compression mode with a pre-test speed of 10 mm/second and a test speed of 0.05 mm/second. The sample was compressed with the probe until a target force of 50 grams was achieved. The probe was held in position for a duration of 10.1 seconds and the force on the probe was measured with time. The CSR was calculated after 10 seconds of hold time. The CSR for each samples was expressed as the % of stress relaxed after the 10 second holding duration.

[00113] 90 Degree Peel Test Method

[00114] Samples of at least 3 inches in length were prepared for testing peel force at 90 degrees. One release liner was removed from the test sample, and the adhesive strips were rolled onto a glass panel using two passes with a 15 lb roller. The samples were allowed to dwell for one hour in ambient conditions prior to testing. One end of the test sample was clamped into a load cell of an INSTRON tensile tester (Model 5944, Instron-Illinois Tool Works, Inc., Norwood, MA) outfitted with a constant 90 degree angle peel fixture. Each sample was peeled at a rate of 12 in/min from the glass surface. Maximum peel force and average peel force were reported for each sample, with average peel force calculated using the integration method between 1.5 inches and 3 inches in crosshead movement distance. All peel force values were normalized for sample width and are reported in oz/in.

[00115] Examples 1-6

[00116] Acrylic Core Formulations

[00117] The acrylic core material of Example 1 was made by charging a quart jar (about 500 mL) with 82 parts C12 Acrylate Monomer, 18 parts AA, 4 phr of DCPA crosslinker, and 0.2 phr of IRGACURE 651. As used herein, the abbreviation "phr" refers to parts per 100 parts resin. The monomer mixture was

purged with nitrogen for 5 minutes and then exposed to low intensity ultraviolet radiation until a coatable prepolymer syrup was obtained. Subsequently, an additional 0.75 phr of IRGACURE 651 was added and the formulation was mixed thoroughly by rolling over night. The formulation was then coated between release liners and cured by 1500 mJ/cm² of UVA light for 2.5 minutes. The wet coating thickness was 30 mils.

[00118] The acrylic core materials of Examples 2-6 were prepared as described for Example 1 using the materials and amounts, and having the core thicknesses shown in Table 2. Examples 3-6 also included fumed silica mixed with the syrup before coating having the amounts shown in Table 2.

[00119] Preparation of Peel Release Adhesive Tapes

[00120] A three layer multilayer film was prepared having 0.5 mil thick outer skin layers of OPTEMA TC 120 and a 0.8 mil thick core layer of EXACT 8201. The multilayer film was prepared using a blown film extrusion process as is known in the art. Both sides of the multilayer film were treated with 4298UV primer. The films were allowed to dry at ambient temperature for 5 minutes to allow for the removal of any solvent.

[00121] For each of the Examples 1-6, the release liner was removed from the acrylic core material, and with the multilayer film stretched taut, of the acrylic core material was laminated to one side of the film. The acrylic core was applied to the multilayer film so that the final adhesive test strips were cut in the cross-direction of the multilayer film relative to the direction of film extrusion. The multilayer film lamination process was repeated for the other side of the core acrylic core material.

[00122] An adhesive coated liner was then laminated to both sides of the multilayer film/acrylic core construction using two passes through a laboratory laminator operating at 12 inches per minute and 20 psi nip pressure. The adhesive coating thickness was 16.5 grains/24in² (2.75 mil). A section on the outside was left adhesive-free to function as a pull tab. The adhesive used for Examples 1-3,5,7,9,12,15, and 18 (Peelable Adhesive 1) was similar to the adhesive composition E27 described in PCT Publication No. WO2015/195602, except the adhesive contained. 65 phr Finaprene 411 SBS resin and 35 phr SOLPRENE® resin. The adhesive used for Examples 4, 6, 8, 10, 13, 16, and 19 (Peelable Adhesive 2) was a silicone polyurea block copolymer based pressure-sensitive adhesive like that of Example 28 in US Patent No. 6,569,521. The adhesive used for Examples 11, 14, and 17 (Peelable Adhesive 3) was a polydisiloxane polyoxamide block copolymer based adhesive. The polydisiloxane polyoxamide elastomer used was like that of Example 12 of US Patent No. 8,765,881. For the adhesive, MQ resin SR545 (GE Silicones, Waterford, NY) was added at 100 parts based on the polydisiloxane polyoxamide elastomer. Strips for testing were die cut from the laminated construction.

Table 2. Acrylic core formulations for Examples 1-6

Example	Core Material	DCPA (phr)	Fumed Silica (phr)	Core Thickness (mil)	Peelable Adhesive
1	C12/AA (82:18)	4	0	30	1
2	2EHA/AA (88:12)	3	0	8	1
3	2EHA:AA (90:10)	3	10	25	1
4	2EHA:AA (90:10)	3	10	25	2
5	2EHA:AA (85:15)	3	6	25	1
6	2EHA:AA (85:15)	3	6	25	2

[00123] Examples 7-8

[00124] The adhesive tape strip of Examples 7-8 was the same construction as that described for Examples 1-6 except instead of an acrylic core, the core material was a silicone polyurea block copolymer based pressure-sensitive adhesive like that of Example 28 in US Patent No. 6,569,521. The core thickness was 8 mils. Example 7 had Peelable Adhesive 1 as the Peelable adhesive, and Example 8 had Peelable Adhesive 2 as the outer adhesive.

[00125] Examples 9-11

[00126] The adhesive tape strip of Examples 9-11 was the same construction as that described for Examples 1-6 except instead of an acrylic core, the core material was similar to the adhesive composition E27 described in PCT Publication No. WO2015/195602 except the adhesive contained 65 phr Finaprene 411 SBS resin and 35 phr SOLPRENE® resin. The core thickness was 8 mils. Example 9 had Peelable Adhesive 1 as the outer adhesive, Example 10 had Peelable Adhesive 2 as the outer adhesive, and Example 11 had Peelable Adhesive 3 as the outer adhesive.

[00127] Examples 12-14

[00128] The adhesive tape strip of Examples 12-14 was the same construction as that described for Examples 1-6 except that the core material was 3M VHB™ Tape 4905. The core thickness was 20 mils. Example 12 had Peelable Adhesive 1 as the outer adhesive, Example 13 had Peelable Adhesive 2 as the outer adhesive, and Example 14 had Peelable Adhesive 3 as the outer adhesive.

[00129] Examples 15-17

[00130] The adhesive tape strip of Examples 15-17 was the same construction as that described for Examples 1-6 except that the core material was 3M VHB™ Tape 4910. The core thickness was 40 mil.

Example 15 had Peelable Adhesive 1 as the outer adhesive, Example 16 had Peelable Adhesive 2 as the outer adhesive, and Example 17 had Peelable Adhesive 3 as the outer adhesive.

[00131] Examples 18-19

[00132] The adhesive tape strip of Examples 18-19 was the same construction as that described for Examples 1-6 except that the core material was 3M Acrylic Plus Tape PT1100. The core thickness was 43 mil. Example 18 had Peelable Adhesive 1 as the outer adhesive, and Example 19 had Peelable Adhesive 2 as the outer adhesive.

[00133] Comparative Example C1

[00134] Comparative Example C1 was a commercially available product, TESA POWERBOND double-sided mounting tape, Product No. 55791-00003, Tesa SE, Hamburg, Germany.

[00135] Comparative Example C2

[00136] Comparative Example C2 was a commercially available product, GORILLA double-sided mounting tape, Product No. 1025, The Gorilla Glue Company, Cincinnati, Ohio, USA.

[00137] Comparative Example C3

[00138] Comparative Example C3 was an adhesive strip provided with a commercially available product, PERMA Clear Removable Hooks, Product No. 826, Perma Products, Brookvale, NSW, Australia.

[00139] The Static Shear and %Adhesive Surface Contact properties of the adhesive tape constructions of Examples 1-19 and Comparative Examples C1-C3 are shown in Table 3.

Table 3 Static Shear and %Adhesive Surface Contact Properties

Example	Shear – Glass (min) ^a	Shear – Glass St. Dev. (min)	Shear – Drywall (min) ^b	Shear – Drywall St. Dev. (min)	%Adhesive Surface Contact	%Adhesive Surface Contact St. Dev
1	33491	7309	53751	27451	12.2	3.8
2	>100000	1	>70825	27338	21.0	2.8
3	>100000	1	>100000	1	51.5	2.6
4	172	37	3111	227	44.3	2.8
5	24433	11665	>100000	1	49.0	7.2
6	209	69	1669	675	42.1	6.2
7	1709	1123	2925	170	27.8	15.3
8	615	238	2274	2495	23.8	3.0
9	>100000	1	>100000	1	15.2	2.1
10	732	520	19019	20501	21.9	2.2
11	>100000	1	>100000	1	22.4	3.0
12	36151	23957	>99700	1201	50.6	4.4
13	570	269	3276	1005	63.1	2.2
14	>55556	53604	13704	4956	48.9	2.4

Example	Shear – Glass (min) ^a	Shear – Glass St. Dev. (min)	Shear – Drywall (min) ^b	Shear – Drywall St. Dev. (min)	%Adhesive Surface Contact	%Adhesive Surface Contact St. Dev
15	9921	10997	>35380	56632	61.6	12.0
16	121	19	843	567	68.1	1.8
17	11590	19816	3644	1702	68.4	4.5
18	842	9	1126	200	59.4	13.3
19	601	258	705	167	62.0	10.6
C1	>100000	1	>86752	34703	86.2	0.9
C2	1701	477	348	61	42.9	8.5
C3	10502	2552	7373	1965	15.5	3.8

*Shear tests were performed on glass substrate.

**Shear tests were performed on painted drywall with BEHR PREMIUM PLUS ULTRA® Primer and Paint 2 in 1 Flat Egyptian Nile.

[00140] The Compression Stress Relaxation properties of the adhesive tape constructions of Examples 1-19 and Comparative Examples C1-C3 are shown in Table 4.

Table 4 Compression Stress Relaxation Properties

Example	%Compression Stress Relaxation	%Compression Stress Relaxation St. Dev.
1	81.4	0.8
2	50.4	0.7
3	46.5	0.3
4	46.6	0.3
5	56.4	1.1
6	57.1	0.4
7	34.6	1.0
8	35.0	0.5
9	31.5	0.6
10	31.4	0.2
11	31.1	0.7
12	32.0	0.4
13	31.4	0.1
14	33.6	0.1
15	31.5	0.2
16	30.8	0.6
17	31.6	0.2
18	32.7	0.4
19	32.1	0.5
C1	15.2	0.3
C2	51.6	0.3
C3	18.9	0.4

[00141] The 90 Degree Peel properties of the adhesive tape constructions of Examples 1-19 and Comparative Examples C1-C3 are shown in Table 5.

Table 5 90 Degree Peel Properties

Example	Max Peel Force (oz/in)	Max Peel Force St. Dev (oz/in)	Average Peel Force (oz/in)	Average Peel Force St. Dev (oz/in)
1	117.6	7.2	95.6	6.4
2	66.1	7.4	52.1	3.5
3	93.4	6.2	80.9	1.8
4	36.4	3.3	31.7	2.7
5	118.2	8.4	88.3	1.1
6	49.3	2.1	42.9	2.5
7	73.6	8.2	58.5	2.5
8	29.5	1.1	25.0	0.8
9	68.0	7.5	59.0	5.1
10	39.5	3.6	32.7	1.0
11	50.1	2.9	41.7	2.1
12	129.6	88.4	58.4	2.7
13	33.9	1.8	29.7	0.1
14	47.7	3.2	39.3	0.2
15	91.3	7.8	77.2	4.9
16	40.2	5.6	33.2	2.1
17	59.1	3.4	43.9	1.2
18	111.7	5.8	84.6	2.2
19	40.6	2.4	33.2	1.6
C1*	94.6	1.6	66.3	35.4
C2	85.2	33.4	55.9	1.0
C3	83.2	9.9	67.9	16.4

* One replicate was not removed due to sample tearing. All replicates showed sample tearing or internal failure of the foam core.

[00142] Reference throughout this specification to "one embodiment," "some embodiments," "one or more embodiments" or "an embodiment," whether or not including the term "exemplary" preceding the term "embodiment," means that a particular feature, structure, material, or characteristic described in connection with the embodiment is included in at least one embodiment of the certain exemplary embodiments of the present disclosure. Thus, the appearances of the phrases such as "in one or more embodiments," "in certain embodiments," "in one embodiment" or "in an embodiment" in various places throughout this specification are not necessarily referring to the same embodiment of the certain exemplary embodiments of the present disclosure. Furthermore, the particular features, structures, materials, or characteristics may be combined in any suitable manner in one or more embodiments.

[00143] The recitation of all numerical ranges by endpoint is meant to include all numbers subsumed within the range (*i.e.*, the range 1 to 10 includes, for example, 1, 1.5, 3.33, and 10).

[00144] The terms first, second, third and the like in the description and in the claims, are used for distinguishing between similar elements and not necessarily for describing a sequential or chronological order. It is to be understood that the terms so used are interchangeable under appropriate circumstances

and that the embodiments of the invention described herein are capable of operation in other sequences than described or illustrated herein.

[00145] Moreover, the terms top, bottom, over, under and the like in the description and the claims are used for descriptive purposes and not necessarily for describing relative positions. It is to be understood that the terms so used are interchangeable under appropriate circumstances and that the embodiments of the invention described herein are capable of operation in other orientations than described or illustrated herein.

[00146] All references mentioned herein are hereby incorporated by reference in their entirety.

[00147] With reference to the Figures, like numerals are used to designate like components throughout the set of Figures.

[00148] Those having skill in the art will appreciate that many changes may be made to the details of the above-described embodiments and implementations without departing from the underlying principles thereof. Further, various modifications and alterations of the present invention will become apparent to those skilled in the art without departing from the spirit and scope of the invention. The scope of the present application should, therefore, be determined only by the following claims and equivalents thereof.

What is claimed is:

1. An adhesive article, comprising:
a multilayer backing including a first major surface and a second major surface; the multilayer backing including a core layer and a polymeric film layer and the polymeric film layer having a stress relaxation between 5% and 100% after 10 seconds as measured by texture analysis; and
a peelable adhesive directly adjacent to at least a portion of the first major surface of the multilayer backing, the peelable adhesive having a thickness of between about 0.4 mils and 60 mils.
2. The adhesive article of claim 1, wherein the multilayer carrier includes at least two layers.
3. The adhesive article of any of the preceding claims, wherein the multilayer carrier includes at least three layers.
4. The adhesive article of any of the preceding claims, wherein the multilayer carrier includes a core layer and one or more polymeric film layers adjacent to the core layer.
5. The adhesive article of any of the preceding claims, wherein the multilayer carrier includes a core layer, and the core layer is a pressure sensitive adhesive.
6. The adhesive article of any of the preceding claims, wherein the multilayer carrier includes a core layer, and the core layer includes at least one of polymers of one or more monomers containing one or more (meth)acryloyl groups; vinylaromatic or olefinic block copolymers; vinylaromatic or olefinic block copolymers; silicone elastomers; monomers containing one or more (meth)acryloyl groups and vinylaromatic or olefinic block copolymers; gradient or random vinylaromatic or olefinic copolymers; vinylaromatic or olefinic or (meth)acrylic polymers or copolymers with branched, graft, or comb architectures; copolymers with branched, graft, or comb architectures containing two or more of vinylaromatic or olefinic or acrylic monomers; monomers containing one or more (meth)acryloyl groups and vinylaromatic and olefinic block copolymers; (meth)acrylic block copolymers; or any combinations thereof.
7. The adhesive article of any of claims 4-6, wherein the core layer further includes tackifiers, plasticizers, crosslinker, or rheology modifiers.

8. The adhesive article of any of claims 4-7, wherein the polymeric film includes at least one of a vinylaromatic copolymer, a linear low density polyethylene, a low density polyethylene, a high density polyethylene, a copolymer of ethylene and (meth)acrylate monomers, a copolymer of ethylene and (meth)acrylate monomers containing acid modifications, a copolymer of ethylene and vinyl acetate, a copolymer of ethylene and vinyl acetate containing acrylate, polymers from olefin monomers with between 2 and 16 carbons, a copolymer of two or more olefin monomers, polymers from olefin monomers with atactic, syndiotactic, or isotactic stereochemistry, a copolymer of one or more olefin monomers polymerized using a metallocene catalyst, vinyl copolymers such as poly(vinyl chloride) or poly(vinyl acetate), and combinations thereof.

9. The adhesive article of any of the preceding claims, wherein the multilayer carrier has a thickness of between about 0.4 mils and about 60 mils.

10. The adhesive article of any of the preceding claims, wherein the peelable adhesive directly adjacent to at least a portion of the first major surface of the multilayer carrier is a first peelable adhesive, and further comprising:

a second peelable adhesive directly adjacent to at least a portion of the second major surface of the multilayer carrier.

11. The adhesive article of any of the preceding claims, wherein the adhesive article has an area of adhesive contact with the substrate of between about 20% and about 70%.

12. The adhesive article of any of the preceding claims, wherein the peelable adhesive has a glass transition temperature of about -125° C to 15° C, as determined by dynamic mechanical analysis of the tan δ peak value.

13. The adhesive article of any of the preceding claims, wherein the adhesive article exhibits a shear strength of greater than 1600 minutes as measured according to ASTM D3654-82.

14. The adhesive article of any of the preceding claims, wherein the adhesive article exhibits a shear strength of greater than 10,000 minutes as measured according to ASTM D3654-82.

15. The adhesive article of any of the preceding claims, wherein at least one of the adhesive article and/or the multilayer carrier has a tensile strength at break sufficiently high so that the multilayer carrier will not rupture prior to being removed from an adherend.

16. The adhesive article of any of the preceding claims, wherein the thickness of the peelable adhesive on at least one of the first or second major surfaces of the multilayer carrier is about 1 μm to about 1 mm.

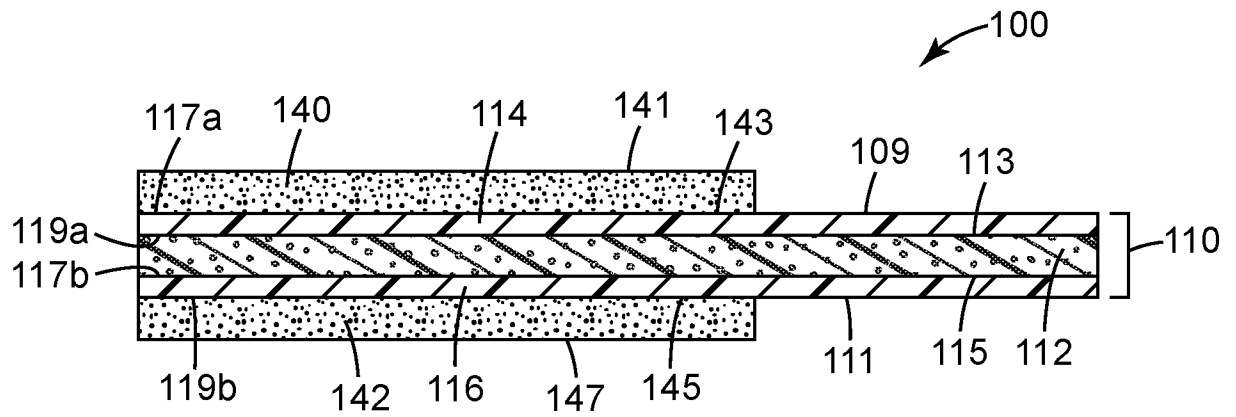
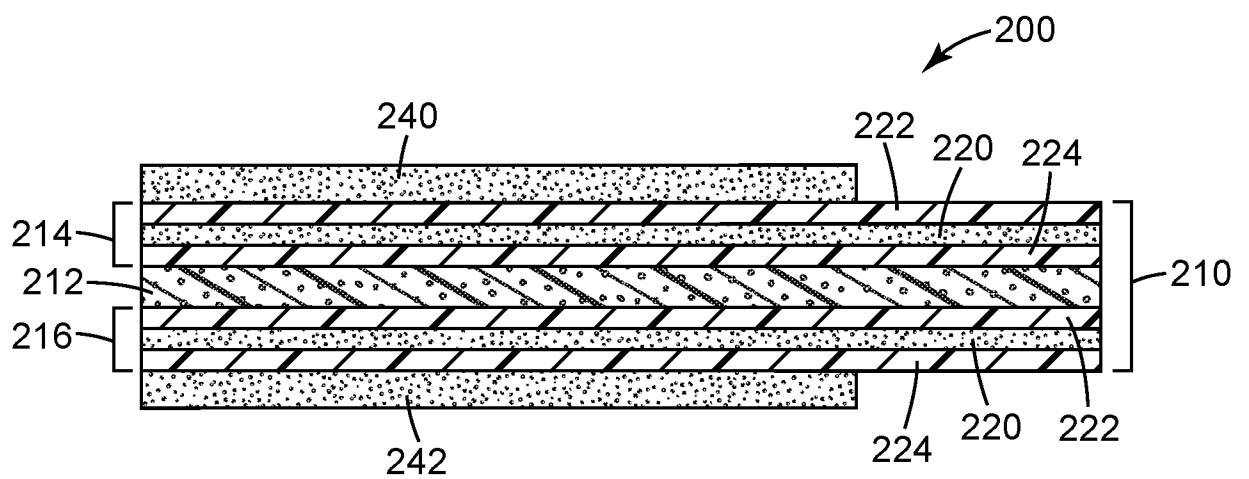
17. The adhesive article of any of the preceding claims, having a shear strength of greater than 100,000 minutes on at least one of drywall and glass.

18. A method of using an adhesive article, comprising:
contacting the adhesive article of any of claims 1-17 with an adherend surface.

19. The method of claim 18, further comprising:
peeling the adhesive article from the adherend surface to remove at least a portion of the adhesive article from the adherend surface.

20. The method of claim 19, where the adhesive article is peeled at an angle of 35° or greater.

1/1

*Fig. 1**Fig. 2*

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2017/015638

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C09J7/02
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 C09J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/195344 A1 (3M INNOVATIVE PROPERTIES CO [US]) 23 December 2015 (2015-12-23) page 6, line 24 - line 30 page 7, line 4 - line 22 page 8, line 23 - line 27 -----	1-20
X	WO 2006/044369 A1 (3M INNOVATIVE PROPERTIES CO [US]; PAIVA ADRIANA [US]) 27 April 2006 (2006-04-27) page 7, paragraph 1 page 11, paragraph 1 - paragraph 2 claim 26 -----	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 March 2017

Date of mailing of the international search report

10/04/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Andriollo, Giovanni

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/015638

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015195344	A1	23-12-2015	
		AU 2015277624 A1	02-06-2016
		CA 2930808 A1	23-12-2015
		CN 105722437 A	29-06-2016
		EP 3054816 A1	17-08-2016
		KR 20170018298 A	17-02-2017
		SG 11201603854W A	27-01-2017
		TW 201621179 A	16-06-2016
		WO 2015195344 A1	23-12-2015

WO 2006044369	A1	27-04-2006	
		AT 415460 T	15-12-2008
		BR PI0516045 A	19-08-2008
		CA 2580688 A1	27-04-2006
		CN 101040024 A	19-09-2007
		EP 1809717 A1	25-07-2007
		JP 4764882 B2	07-09-2011
		JP 2008516054 A	15-05-2008
		KR 20070084125 A	24-08-2007
		US 2008095965 A1	24-04-2008
		WO 2006044369 A1	27-04-2006
