


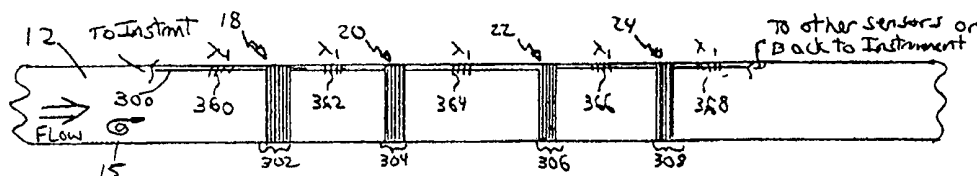

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b>  <b>G01L 11/02, 1/24</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/00799</b>  <b>(43) International Publication Date:</b> 6 January 2000 (06.01.00)
<b>(21) International Application Number:</b> PCT/US99/14588  <b>(22) International Filing Date:</b> 28 June 1999 (28.06.99)  <b>(30) Priority Data:</b> 09/105,525                      26 June 1998 (26.06.98)                      US Not furnished                      25 June 1999 (25.06.99)                      US  <b>(71) Applicant:</b> CIDRA CORPORATION [US/US]; 50 Barnes Park North, Wallingford, CT 06492 (US).  <b>(72) Inventors:</b> McGUINN, Rebecca, S.; 14-20 Forest Glenn Circle, Middletown, CT 06457 (US). GYSLING, Daniel, L.; 763 Chestnut Hill Road, Glastonbury, CT 06033 (US). WINSTON, Charles, R.; 109 Cambridge Drive, Glastonbury, CT 06033 (US). DAVIS, Allen, R.; 254 Old Stage Road, Glastonbury, CT 06033 (US). FAUSTINO, John, M.; 42 Brookhaven Road, Hamden, CT 06517 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title:** NON-INTRUSIVE FIBER OPTIC PRESSURE SENSOR FOR MEASURING UNSTEADY PRESSURES WITHIN A PIPE

**(57) Abstract**

Non-intrusive pressure sensors (14-18) for measuring unsteady pressures within a pipe (12) include an optical fiber (10) wrapped in coils (20-24) around the circumference of the pipe (12). The length or change in the length of the coils (20-24) is indicative of the unsteady pressure in the pipe. Bragg gratings (310-324) impressed in the fiber (10) may be used having reflection wavelength  $\lambda$  that relate to the unsteady pressure in the pipe. One or more of sensors (14-18) may be axially distributed along the fiber (10) using wavelength division multiplexing and/or time division multiplexing.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Non-Intrusive Fiber Optic Pressure Sensor  
for Measuring Unsteady Pressures within a Pipe**

**5    Cross References to Related Applications**

        This application is a continuation-in-part of commonly owned co-pending US Patent Application, Serial No., 09/105,525, entitled "Non-Intrusive Fiber Optic Pressure Sensor for Measuring Pressure Inside, Outside and Across Pipes", filed June 26, 1998.

10

**Technical Field**

        This invention relates to sensing pressure around pipes and more particularly to a non-intrusive fiber pressure sensor for measuring unsteady pressures within a pipe.

15

**Background Art**

        It is known in the oil and gas industry that the measurement of fluid pressure in a down-hole pipe is useful to exploration and production of oil and gas. However, typical pressure sensors require that a hole be drilled in the pipe to port the pressure to the sensor, or that the sensor or portion thereof be deployed in the pipe. Drilling holes in the pipes can be costly and add failure modes to the system. Accordingly, it would be desirable to measure pressure in a pipe in a non-invasive manner.

20

**Summary of the Invention**

25         Objects of the present invention include provision of a non-intrusive pressure sensor for measuring unsteady pressure within pipes.

        According to the present invention, a pressure sensor for measuring unsteady (ac, dynamic or time varying) pressure at at least one axial location along a pipe, comprises an optical fiber wrapped around the circumference of the pipe.

30

        According still further to the present invention, a length of said optical fiber changes when the pressure to be measured changes. According still further to the

present invention, a reflective element is disposed within said fiber having a reflection wavelength related the pressure.

The present invention provides a significant improvement over the prior art by providing a non-intrusive pressure sensor for the measurement of unsteady pressure in a pipe using fiber optic sensing. Also, the present invention eliminates the need for any electronic components down-hole, thereby improving reliability of the measurement. Still further, the present invention is inherently safe and explosion proof as compared to electrical systems. The present invention may also provide circumferentially averaged pressure and/or axially averaged unsteady pressure over a predetermined axial length of the pipe. Circumferential averaging naturally filters out pressure disturbances such as those associated with transverse pipe vibrations, flow noise, and higher dimensional acoustic oscillations. This attribute is useful for measuring propagating one-dimensional acoustic waves. Thus, the present invention enables real time unsteady pressure measurement for oil and gas exploration and production or for other applications where a fluid (liquid or gas) is flowing in a pipe or conduit.

The foregoing and other objects, features and advantages of the present invention will become more apparent in light of the following detailed description of exemplary embodiments thereof.

#### **Brief Description of the Drawings**

Fig. 1 is a side view of a pipe having optical fiber wrapped around the pipe at each unsteady pressure measurement location and a pair of Bragg gratings around each optical wrap, in accordance with the present invention.

Fig. 2 is a cross-sectional end view a pipe showing inside pressure  $P_{in}$  and outside pressures  $P_{out}$ , in accordance with the present invention.

Fig. 3 is a side view of a pipe having optical fiber wrapped around the pipe at each unsteady pressure measurement location with a single Bragg grating between each pair of optical wraps, in accordance with the present invention.

Fig. 4 is a side view of a pipe having optical fiber wrapped around the pipe at each unsteady pressure measurement location without Bragg gratings around each of the wraps, in accordance with the present invention.

Fig. 5 is an alternative geometry of an optical wrap of Figs. 1,3 of a radiator  
5 tube geometry, in accordance with the present invention.

Fig. 6 is an alternative geometry of an optical wrap of Figs. 1,3 of a race track geometry, in accordance with the present invention.

Fig. 7 is a cross-sectional end view a pipe wrapped with an optical fiber of Figs. 5,6, in accordance with the present invention.

10 Fig. 8 is a side view of a pipe having a pair of gratings at each axial sensing location, in accordance with the present invention.

Fig. 9 is a side view of a pipe having a single grating at each axial sensing location, in accordance with the present invention.

## 15 **Best Mode for Carrying Out the Invention**

Referring to Fig. 1, a pipe (or conduit) 12 is provided with a plurality of non-intrusive distributed fiber grating based pressure sensors 18-24 located along the pipe 12. Each of the pressure sensors 18-24 comprises corresponding coils 302-308 having a predetermined length wrapped around the pipe 12. Each of the sensors 14-18  
20 comprises one or more Bragg gratings 310-324 having predetermined reflection wavelengths  $\lambda_1, \lambda_2, \lambda_3, \lambda_4$  associated therewith.

The gratings 310-324 are similar to that described in US Patent No. 4,725,110, entitled "Method for Impressing Gratings Within Fiber Optics", to Glenn et al; however, any wavelength tunable grating or reflective element embedded in the fiber  
25 10 may be used if desired. A Bragg grating, as is known, reflects a predetermined wavelength band of light having a central peak reflection wavelength  $\lambda_b$ , and passes the remaining wavelengths of the incident light (within a predetermined wavelength range). Accordingly, input light 40 propagates along the fiber 10 to the sensors 14-18 and the gratings 310-324 reflect light 42 back along the fiber 10.

30 Still referring to Fig. 1, optical pressure sensors 18-24 may be Bragg grating based pressure sensors, such as that described in copending US Patent Application,

Serial No. 08/925,598, entitled "High Sensitivity Fiber Optic Pressure Sensor For Use In Harsh Environments", filed Sept. 8, 1997. Alternatively, the sensors 18-24 may be optical strain gages attached to or embedded in the outer or inner wall of the pipe which measure pipe wall strain. In an embodiment of the present invention, the  
5 fiber optic pressure sensors 18-24, may be connected individually or may be multiplexed along one or more optical fibers using wavelength division multiplexing (WDM), time division multiplexing (TDM), or any other optical multiplexing techniques (discussed more hereinafter).

Referring to Fig. 2, fiber optic pressure sensors 18-24 (Figs. 1,3,4,7,8,9), it  
10 may measure the unsteady (or dynamic or ac) pressure variations  $P_{in}$  inside the pipe 12 by measuring the elastic expansion and contraction, as represented by arrows 350, of the diameter (and thus the circumference as represented by arrows 351) of the pipe 12. In general, the strain gages would measure the pipe wall deflection in any direction in response to unsteady pressure inside the pipe 12. The elastic expansion  
15 and contraction of pipe 12 is measured at the location of the strain gage as the internal pressure  $P_{in}$  changes, and thus measures the local strain (axial strain, hoop strain or off axis strain), caused by deflections in the directions indicated by arrows 351, on the pipe 12. The amount of change in the circumference is variously determined by the hoop strength of the pipe 12, the internal pressure  $P_{in}$ , the external pressure  $P_{out}$   
20 outside the pipe 12, the thickness  $T_w$  of the pipe wall 352, and the rigidity or modulus of the pipe material. Thus, the thickness of the pipe wall 352 and the pipe material in the sensor sections 14,16 (Fig. 1) may be set based on the desired sensitivity of the sensors and other factors and may be different from the wall thickness or material of the pipe 12 outside the sensing regions 14,16.

Referring to Figs. 1,3,4, alternative arrangements of optical strain gage  
25 pressure sensors are shown. The fiber optic pressure sensors 18-24 may be configured using an optical fiber 300 that is coiled or wrapped around and attached to the pipe 12 at each of the pressure sensor locations as indicated by the coils or wraps 302-308 for the pressures  $P_1, P_2, P_3, P_4$ , respectively. The fiber wraps 302-308 are  
30 wrapped around the pipe 12 such that the length of each of the fiber wraps 302-308 changes with changes in the pipe hoop strain in response to unsteady pressure

variations within the pipe 12 and thus internal pipe pressure is measured at the respective axial location. Such fiber length changes are measured using known optical measurement techniques as discussed hereinafter. Each of the wraps measure substantially the circumferentially averaged pressure within the pipe 12 at a corresponding axial location on the pipe 12. Also, the wraps provide axially averaged pressure over the axial length of a given wrap. While the structure of the pipe 12 provides some spatial filtering of short wavelength disturbances, we have found that the basic principle of operation of the invention remains substantially the same as that for the point sensors described hereinbefore.

Referring to Fig. 1, for embodiments of the present invention where the wraps 302-308 are connected in series, pairs of Bragg gratings (310,312),(314,316), (318,320), (322,324) may be located along the fiber 300 at opposite ends of each of the wraps 302,304,306,308, respectively. The grating pairs are used to multiplex the pressure signals  $P_1, P_2, P_3, P_4$  to identify the individual wraps from optical return signals. The first pair of gratings 310,312 around the wrap 302 may have a common reflection wavelength  $\lambda_1$ , and the second pair of gratings 314,316 around the wrap 304 may have a common reflection wavelength  $\lambda_2$ , but different from that of the first pair of gratings 310,312. Similarly, the third pair of gratings 318,320 around the wrap 306 have a common reflection wavelength  $\lambda_3$ , which is different from  $\lambda_1, \lambda_2$ , and the fourth pair of gratings 322,324 around the wrap 308 have a common reflection wavelength  $\lambda_4$ , which is different from  $\lambda_1, \lambda_2, \lambda_3$ .

Referring to Fig. 2, instead of having a different pair of reflection wavelengths associated with each wrap, a series of Bragg gratings 360-368 with only one grating between each of the wraps 302-308 may be used each having a common reflection wavelength  $\lambda_1$ .

Referring to Figs. 1 and 3 the wraps 302-308 with the gratings 310-324 (Fig.1) or with the gratings 360-368 (Fig. 3) may be configured in numerous known ways to precisely measure the fiber length or change in fiber length, such as an interferometric, Fabry Perot, time-of-flight, or other known arrangements. An example of a Fabry Perot technique is described in US Patent. No. 4,950,883 "Fiber

Optic Sensor Arrangement Having Reflective Gratings Responsive to Particular Wavelengths”, to Glenn. One example of time-of-flight (or Time-Division-Multiplexing; TDM) would be where an optical pulse having a wavelength is launched down the fiber 300 and a series of optical pulses are reflected back along the fiber 300. The length of each wrap can then be determined by the time delay between each return pulse.

Alternatively, a portion or all of the fiber between the gratings (or including the gratings, or the entire fiber, if desired) may be doped with a rare earth dopant (such as erbium) to create a tunable fiber laser, such as is described in US Patent No. 5,317,576, “Continuously Tunable Single Mode Rare-Earth Doped Laser Arrangement”, to Ball et al or US Patent No. 5,513,913, “Active Multipoint Fiber Laser Sensor”, to Ball et al, or US Patent No. 5,564,832, “Birefringent Active Fiber Laser Sensor”, to Ball et al, which are incorporated herein by reference.

While the gratings 310-324 are shown oriented axially with respect to pipe 12, in Figs. 1,3, they may be oriented along the pipe 12 axially, circumferentially, or in any other orientations. Depending on the orientation, the grating may measure deformations in the pipe wall 352 with varying levels of sensitivity. If the grating reflection wavelength varies with internal pressure changes, such variation may be desired for certain configurations (e.g., fiber lasers) or may be compensated for in the optical instrumentation for other configurations, e.g., by allowing for a predetermined range in reflection wavelength shift for each pair of gratings. Alternatively, instead of each of the wraps being connected in series, they may be connected in parallel, e.g., by using optical couplers (not shown) prior to each of the wraps, each coupled to the common fiber 300.

Referring to Fig. 4, alternatively, the sensors 18-24 may also be formed as a purely interferometric sensor by wrapping the pipe 12 with the wraps 302-308 without using Bragg gratings where separate fibers 330,332,334,336 may be fed to the separate wraps 302,304,306,308, respectively. In this particular embodiment, known interferometric techniques may be used to determine the length or change in length of the fiber 10 around the pipe 12 due to pressure changes, such as Mach Zehnder or Michaelson Interferometric techniques, such as that described in US Patent 5,218,197,



entitled "Method and Apparatus for the Non-invasive Measurement of Pressure Inside Pipes Using a Fiber Optic Interferometer Sensor" to Carroll. The interferometric wraps may be multiplexed such as is described in Dandridge, et al, "Fiber Optic Sensors for Navy Applications", IEEE, Feb. 1991, or Dandridge, et al, "Multiplexed  
5 Interferometric Fiber Sensor Arrays", SPIE, Vol. 1586, 1991, pp176-183. Other techniques to determine the change in fiber length may be used. Also, reference optical coils (not shown) may be used for certain interferometric approaches and may also be located on or around the pipe 12 but may be designed to be insensitive to pressure variations.

10 Referring to Figs. 5 and 6, instead of the wraps 302-308 being optical fiber coils wrapped completely around the pipe 12, the wraps 302-308 may have alternative geometries, such as a "radiator coil" geometry (Fig. 5) or a "race-track" geometry (Fig. 6), which are shown in a side view as if the pipe 12 is cut axially and laid flat. In this particular embodiment, the fiber optic pressure sensor 302 may not necessarily be  
15 wrapped 360 degrees around the pipe as best shown with reference to Fig. 7, but may be disposed over a predetermined portion of the circumference of the pipe 12 represented by arrow 50. The fiber optic pressure sensor 302 will have a length long enough to optically detect the changes to the pipe circumference. Other geometries for the wraps and fiber optic sensor configurations may be used if desired. Also, for  
20 any geometry of the wraps described herein, more than one layer of fiber may be used depending on the overall fiber length desired. The desired axial length of any particular wrap is set depending on the characteristics of the ac pressure desired to be measured, for example the axial or coherence length of a pressure disturbance caused by a vortex to be measured.

25 Referring to Figs. 8 and 9, embodiments of the present invention include configurations wherein instead of using the wraps 302-308, the fiber 300 may have shorter sections that are disposed around at least a portion of the circumference of the pipe 12 that can optically detect changes to the pipe circumference. It is further within the scope of the present invention that sensors may comprise an optical fiber  
30 300 disposed in a helical pattern (not shown) about pipe 12. As discussed herein

above, the orientation of the strain sensing element will vary the sensitivity to deflections in pipe wall 352 caused by unsteady pressure transients in the pipe 12.

Referring to Fig. 8, in particular, the pairs of Bragg gratings (310,312), (314,316), (318,320), (322,324) are located along the fiber 300 with sections 380-386 of the fiber 300 between each of the grating pairs, respectively. In that case, known Fabry Perot, interferometric, time-of-flight or fiber laser sensing techniques may be used to measure the strain in the pipe, in a manner similar to that described in the aforementioned references.

Referring to Fig. 9, alternatively, individual gratings 370-376 may be disposed on the pipe and used to sense the unsteady variations in strain in the pipe 12 (and thus the unsteady pressure within the pipe) at the sensing locations. When a single grating is used per sensor, the grating reflection wavelength shift will be indicative of changes in pipe diameter and thus pressure.

Any other techniques or configurations for an optical strain gage may be used. The type of optical strain gage technique and optical signal analysis approach is not critical to the present invention, and the scope of the invention is not intended to be limited to any particular technique or approach.

For any of the embodiments described herein, the pressure sensors may be attached to the pipe by adhesive, glue, epoxy, tape or other suitable attachment means to ensure suitable contact between the sensor and the pipe 12. The sensors may alternatively be removable or permanently attached via known mechanical techniques such as mechanical fastener, spring loaded, clamped, clam shell arrangement, strapping or other equivalents. Alternatively, the optical fibers and/or gratings, may be embedded in a composite pipe. If desired, for certain applications, the gratings may be detached from (or strain or acoustically isolated from) the pipe 12 if desired.

The present invention may be used to measure any parameter (or characteristic) of the contents of the pipe which is related to unsteady (ac, dynamic or time varying) pressure. For example, the present invention may be used to measure when a slug of liquid or solid passes through the pipe by the sensor due to the dynamic pressure wave which is created.

Also, instead of a pipe, any conduit for carrying a fluid (where a fluid is defined as a liquid or a gas) may be used if desired. Further, it should be understood that the present invention may be used in optical reflection and/or transmission. Also, even though the invention has been illustrated using four pressure sensors, it should  
5 be understood that more or less sensors may be used, depending on the application.

It should be understood that any of the features, characteristics, alternatives or modifications described regarding a particular embodiment herein may also be applied, used, or incorporated with any other embodiment described herein.

Although the invention has been described and illustrated with respect to  
10 exemplary embodiments thereof, the foregoing and various other additions and omissions may be made therein and thereto without departing from the spirit and scope of the present invention.

15

### Claims

**What is claimed is:**

1. An apparatus for measuring an unsteady pressure within a pipe, the apparatus  
5 comprising:  
an optical fiber wrapped around a circumference of the pipe and providing a  
signal indicative of said unsteady pressure.
2. The apparatus of claim 1, wherein a length of said optical fiber changes in  
10 response to said unsteady pressures within said pipe.
3. The apparatus of claim 1, further comprising a reflective element disposed within  
said fiber having a reflective wavelength related to said unsteady pressure.
- 15 4. The apparatus of claim 1, further comprising a reflective element disposed within  
said fiber having a reflective wavelength that changes in response to said unsteady  
pressure.
5. The apparatus of claim 1, wherein said optical fiber measures a circumferential-  
20 average unsteady pressure at an axial position along said pipe.
6. The apparatus of claim 1, wherein said optical fiber measures an axial average  
unsteady pressure along a predetermined axial length of said pipe.
- 25 7. An apparatus for non-intrusively measuring unsteady pressure at least one axial  
location along a pipe, said apparatus comprising:  
an optical fiber having at least a portion of said fiber disposed around at least a  
portion of a circumference of the pipe; and  
a reflective element disposed within said fiber having a reflection wavelength  
30 related to said unsteady pressure in the pipe.

8. The apparatus of claim 7 wherein said reflection wavelength changes in response to said unsteady pressure.
9. The apparatus of claim 7 wherein said reflective element comprises a fiber Bragg grating.
10. An apparatus for measuring an unsteady pressure within a pipe, the apparatus comprising:  
a plurality of fiber optic sensors wrapped around a circumference of said pipe,  
each said sensor providing a signal indicative of said unsteady pressure.
11. The apparatus of claim 10, wherein said sensors are each disposed at a different axial position along said pipe and measure said unsteady pressure at each said axial position.
12. A method for measuring unsteady pressure within a pipe, the method comprising:  
wrapping a predetermined length of an optical fiber around the pipe;  
measuring a change in said length of said optical fiber due to the pressure; and  
determining said unsteady pressure from said length of said optical fiber.
13. The method of claim 12 wherein said fiber has a reflective element embedded therein.
14. The method of claim 12 wherein said reflective element comprises a fiber Bragg grating.
15. The method of claim 12 wherein said method further comprising measuring a circumferential-average pressure at a given axial location along the pipe.

16. The method of claim 12 wherein said method further comprising measuring an axial average pressure along a given axial length of the pipe.

Fig. 1

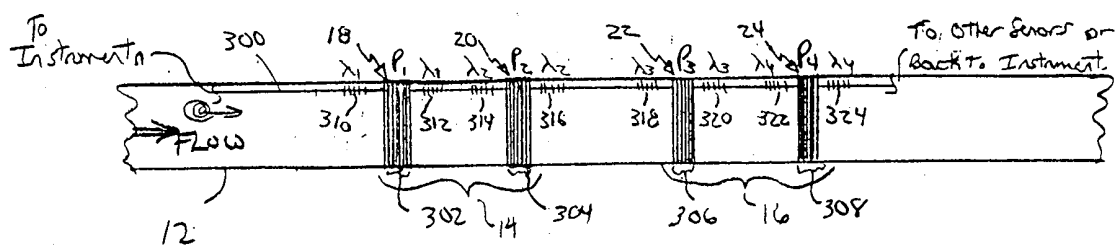
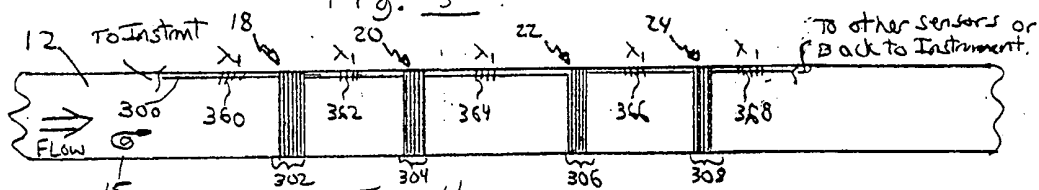
F. g. 3

Fig. 4

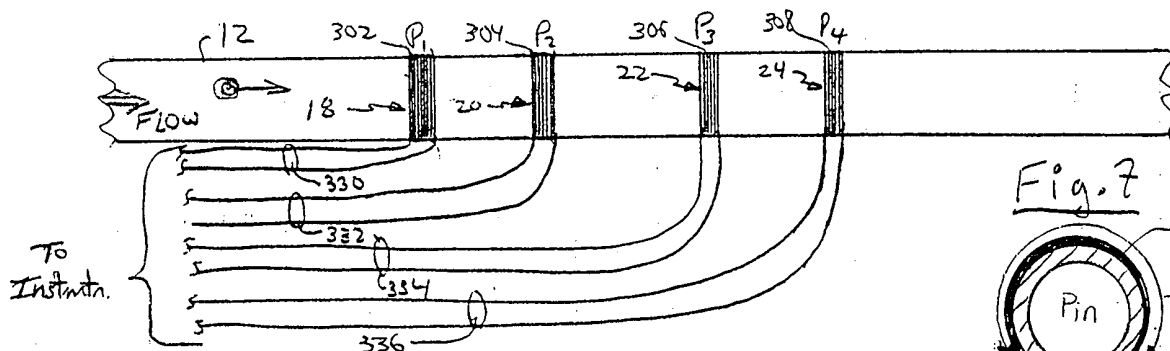


Fig. 7




Fig. 8

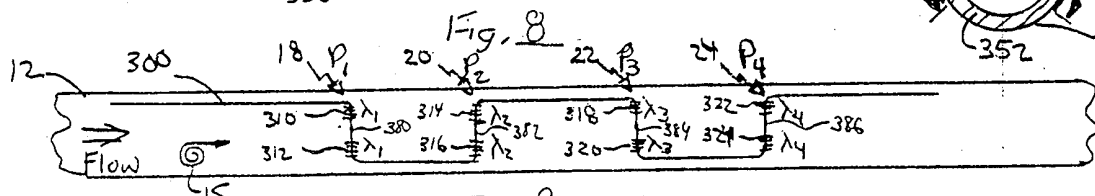


Fig. 2

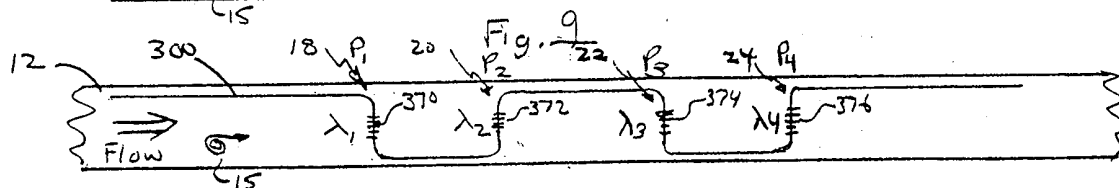


Fig. 5




Fig. 6





Fig. 2

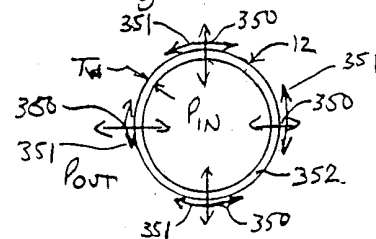

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/US 99/14588

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 G01L11/02 G01L1/24

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 218 197 A (CARROLL) 8 June 1993 (1993-06-08)	1,2,12
Y	column 3, line 10 - line 26; claim 1; figure 1 ---	10,11, 15,16
Y	US 5 317 544 A (MAAS ET AL.) 31 May 1994 (1994-05-31) claims 1-4; figure 3 ---	10,11, 15,16
A	US 4 360 272 A (SCHMADEL ET AL.) 23 November 1982 (1982-11-23) column 9, line 65 -column 5, line 65; claims 9,13 -----	1-9

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

29 November 1999

Date of mailing of the international search report

06/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Mucs, A



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/14588

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5218197 A	08-06-1993	NONE	
US 5317544 A	31-05-1994	AU 670429 B AU 3703493 A CA 2097048 A FR 2697964 A GB 2272345 A, B	18-07-1996 19-05-1994 10-05-1994 13-05-1994 11-05-1994
US 4360272 A	23-11-1982	US 4468091 A US 4568408 A	28-08-1984 04-02-1986