

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 June 2008 (19.06.2008)

PCT

(10) International Publication Number
WO 2008/071427 A1

(51) International Patent Classification:
A47L 9/04 (2006.01)

(21) International Application Number:
PCT/EP2007/010949

(22) International Filing Date:
13 December 2007 (13.12.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/869,797 13 December 2006 (13.12.2006) US

(71) Applicant (for all designated States except US): **AKTIEBOLAGET ELECTROLUX** [SE/SE]; S:T Göransgatan 143, S-105 45 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BESKOW, Jonas** [SE/SE]; Linnégatan 17A, S-114 47 Stockholm (SE).
HAEGERMARCK, Anders [SE/SE]; Edbovägen 12, S-142 63 Trångsund (SE).


(74) Agent: **LAURIN, Magnus**; Aktiebolaget Electrolux, Group Intellectual Property, S-105 45 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A VACUUM CLEANER NOZZLE, A ROLLER AS WELL AS A VACUUM CLEANER

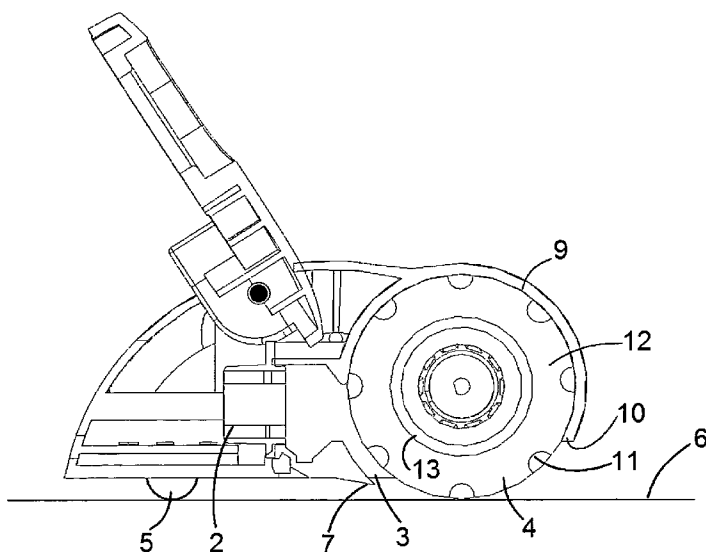

(57) Abstract: The invention relates to a vacuum cleaner nozzle of the kind being adapted to be moved over a floor (6) or other surface to be cleaned, comprising an outlet opening (2), which is adapted to be connected to a vacuum source, a suction opening (3) in a side of the vacuum cleaner nozzle facing the surface to be cleaned which is in fluid communication with the outlet opening to allow withdrawal of debris and dust from the surface through the suction opening, and at least one rotatable roller (4), which is adapted to at least partly support the vacuum cleaner nozzle against the surface and is formed of an essentially air tight material. The at least one rotatable roller (4) is either an idle roller, which is rolling along as the nozzle is moved over the surface, or is driven in a direction of rotation such that a portion of its envelope surface, which is facing the surface to be cleaned, is moved towards

the suction opening (3) to accomplish sweeping of debris and dust towards the suction opening. The rotatable roller is partly surrounded by a sealing member (9) close to the envelope surface of the roller, along a portion of its circumference which is located essentially opposite the surface to be cleaned such that air flow around the portion of the envelope surface located opposite the surface to be cleaned is restricted and such that the roller functions as a rotatable air barrier.



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

A VACUUM CLEANER NOZZLE, A ROLLER AS WELL AS A VACUUM
CLEANER

The invention relates to a vacuum cleaner nozzle of the kind being adapted to be moved over a floor or other surface to be cleaned, comprising an outlet opening, which is adapted to be connected to a vacuum source, a suction opening in a side of the vacuum cleaner nozzle facing the surface to be cleaned which is in fluid communication with the outlet opening to allow withdrawal of debris and dust from the surface through the suction opening, and at least one rotatable roller, which is adapted to at least partly support the vacuum cleaner nozzle against the surface and is formed of an essentially air tight material.

10 The invention also relates to a roller for such a vacuum cleaner nozzle and a vacuum cleaner comprising such a vacuum cleaner nozzle.

Background of the invention

In prior art is known many different types of vacuum cleaner nozzles for floor cleaning. One object with a vacuum cleaner nozzle is to pick up as much as possible of different kinds of debris and dust from all different kinds of surfaces, such as hard floors or carpets, with as little effort as possible.

A common feature for all kinds of vacuum cleaner nozzles, is that some kind of means has to be provided in order to achieve an optimal combination of vacuum and airflow with high speed around the particles to allow withdrawal by the airflow into the suction opening. This is normally achieved by arranging a bottom plate of the nozzle close to a surface to be cleaned, often also in combination with surrounding the bottom plate area with a low edge, often provided with bristles, which restricts the air flow to the suction opening and forces the air flow as close to the floor as possible. The edge of bristles is normally retracted when cleaning carpets such that the bottom plate is sliding directly onto the carpet in order to draw the air flow between the carpet fibres. However, a vacuum cleaner nozzle arranged in this way in-

volves some disadvantages. For example, a low front edge, such as an edge of bristles results in that larger particles often are pushed in front of the nozzle when moving it over a surface to be cleaned. A low bottom plate distance to the floor increases pick-up from depth, crevices, in between tiles, etc, but also
5 increases the risk for scratching the floor. A strong vacuum underneath the nozzle increases air speed but also the resistance when moving the nozzle. High air speed results in good debris pick-up but also creates more noise.

Many vacuum cleaner nozzles comprises a setting mechanism for setting between the different modes when vacuum cleaning of carpets and hard
10 floors, such that when vacuum cleaning of carpets, the bottom plate is closer to and often slides on the carpet surface in order to draw the air flow between the carpet fibres, whereas when vacuum cleaning of hard floors, the bottom plate is elevated on a distance from the floor surface and the vacuum cleaner nozzle is moved over the surface by sliding on felt or bristle members or roll-
15 ing on wheels. Such a setting mechanism will of course increase the costs for the vacuum cleaner nozzle and it involves an additional inconvenience for the user to perform the setting.

Some vacuum cleaner nozzles are of an active kind having a rotary driven brush in contact with the surface to be cleaned, in order to achieve a
20 higher degree of pick-up of debris and dust, especially on carpets. However, also when using a rotatable brush, the nozzle has to be provided with a low edge, e.g. of bristles or hard plastics, in order to restrict the air flow towards the suction opening, since a rotatable brush is highly air permeable. This has to effect that also here the pick up of larger items is prevented unless the
25 nozzle is lifted from the surface. Also, when using a rotatable brush on hard floors, it is a risk that the brush will damage the floor during long time use, since bristles in rotatable brushes often are made of a comparatively hard material in order to achieve a sufficient stiffness. Moreover, dust and long flexible items, such as threads and hair, tend to adhere easily to brushes and
30 be difficult to remove. Normally, an actively rotary driven brush is driven at about 3000 rpm (revolutions per minute), which will lead to a tendency for particles to be swept aside instead of being picked up by the nozzle.

In EP 313403 and 338780 is disclosed vacuum cleaner nozzles having a rotatable shaft provided with flexible blades arranged helically around the circumference of the shaft. The rotatable shaft is positioned at the bottom side of the nozzle in front of an air intake opening and an object is to provide an
5 agitator roller, which do not present the usual problem, associated with rotatable brushes, that elongated items, such as threads and hair, tend to get entangled with the bristles of the brush. In all other respects the agitator rollers disclosed in these documents present the same disadvantages associated with rotatable brushes. For example, an agitator roller formed in this way
10 is highly air permeable, such that the nozzle has to be provided with a low front edge, in order to restrict the air flow towards the suction opening, wherein the low front edge will prevent pick up of large items.

Also in WO 9943250 is disclosed a vacuum cleaner nozzle having a rotatable shaft provided with elongated, flexible blades or strip-shaped elements, such as brush strips or blades of rubber or plastics, around the pe-
15 riphery of the shaft. The nozzle is arranged such that, when cleaning hard floors, the outer edges of the blades will not be in contact with the floor but will rotate on a distance above the floor. This is a disadvantage since thereby is not achieved any polishing effect of the floor surface, which would be the case if the blades were in contact with the floor. Moreover, a roller of this kind
20 being provided with flexible blades, is not adapted to wholly or partially support the nozzle against the floor. Instead, the nozzle has to be provided with separate wheels, sliding surfaces or the like. This has to effect that the roller can not follow any irregularities in the floor so well, such that if the floor has
25 any cavities or the like, the roller might pass on a rather large distance from the bottom of the cavity. This will result in a lowered air velocity and deteriorated ability to pick up debris. Also the ability for the nozzle to climb up on edges, such as carpet edges, will be poor if the roller can not support the nozzle. A rotating roller having blades, wings or fins will also generate quite a
30 lot of noise, which is a great disadvantage when vacuum cleaning at the same time as other activities is going on in the same or adjoining rooms.

In US 2005/0071948 is disclosed an attachment for a vacuum cleaner nozzle. The attachment is provided with two rollers and is adapted to be com-

bined with nozzles having a rotatable driven brush. More precisely, a nozzle is to be positioned on top of the attachment, such that the driven brush is in contact with the rollers and the rotary motion of the brush will be transferred to the rollers. The purpose is that the nozzle alone should be used on carpets, since the rotatable driven brush is well suited to pick up debris and dust from between the carpet fibres, whereas the nozzle together with the attachment should be used on hard floors. Besides that the combination of the nozzle and the attachment will be very cumbersome to use, since it will have a considerable height which will make it impossible to vacuum clean under furniture and the like, the rollers will be driven in the same direction, having to effect that one of the rollers will sweep the debris and dust towards the suction opening, whereas the other roller will sweep the debris and dust away from the suction opening. Also, the rollers are mounted in the attachment with rather large gaps between the portions of the rollers which are facing outwards and the attachment, such that an essential part of the air flow will go this way. Accordingly, the cleaning effect will be poor.

In the Japanese published patent application 2007-105244 is disclosed a cleaning roller consisting of an inner core on the outer periphery of which is provided a foamed body. The foamed body is preferably of polyurethane foam and has a thickness of at least 5 mm. The outer periphery of the foamed body is cylindrical with a circular cross section and the surface is provided with 10 to 40 open pores per 25 mm. The object of the cleaning roller is that debris and dust shall adhere to the open pores of the roller surface when moving the roller over the surface to be cleaned. The cleaning roller is illustrated as being mounted onto a handheld cleaning tool, such that the roller can be moved over the surface to be cleaned by hand. However, it is mentioned in the specification that the cleaning roller also could be arranged at a dust suction opening of a vacuum cleaner.

30 Summary of the invention

It is an object of the present invention to provide a vacuum cleaner nozzle, which presents improved suction characteristics and which is more

capable of picking up also rather large items. At least this object is achieved by a vacuum cleaner nozzle according to claim 1.

The invention also relates to a roller and a vacuum cleaner having essentially the same object as above. This object is achieved by a roller according to claim 19 and a vacuum cleaner according to claim 28.

Accordingly, the basis of the invention is the understanding that the above object may be achieved by providing the vacuum cleaner nozzle with a roller, which is adapted to at least partly support the vacuum cleaner nozzle against the surface to be cleaned and is formed of an essentially air tight material. The roller is either an idle roller, which is rolling along as the nozzle is moved over the surface, or is driven in a direction of rotation such that a portion of its envelope surface, which is facing the surface to be cleaned, is moved towards the suction opening to accomplish sweeping of debris and dust towards the suction opening. The rotatable roller is partly surrounded by a sealing member close to the envelope surface of the roller, along a portion of its circumference which is located essentially opposite the surface to be cleaned such that air flow around the portion of the envelope surface located opposite the surface to be cleaned is restricted and such that the roller functions as a rotatable air barrier, which restricts and controls the air flow to the suction opening and forces the main part of the air flow to pass close to the surface to be cleaned.

By means of a vacuum cleaner nozzle arranged according to the invention, since the roller at least partly supports the nozzle, the advantage is achieved that the roller accomplishes a polishing effect of the surface to be cleaned. Also, the roller will follow any irregularities in the surface, such that the roller will maintain contact with the surface even over cavities, which will create a sufficient air velocity to withdraw debris and dust, and the nozzle will more easily climb up on edges, such as carpet edges and the like. The feature that the roller at least partly supports the nozzle does not preclude that the nozzle also comprises wheels or sliding surfaces. However, it involves that at least some pressure is applied on the roller against the surface and it involves that the roller has to be of a kind that can bear the pressure. This excludes brush rollers and rollers having thin blades, wings, fins or the like,

since such elements will be deformed, at least during long time use. In some appliances the roller can be strictly cylindrical. However, it is preferred that the envelope surface of the roller is formed with a suitably structure, such that a sufficient air flow can be achieved between the roller and the surface during use. Accordingly, the total contact surface of the roller towards the surface is at least 30%, preferably at least 40% and most preferred at least 50% of the total envelope surface of the roller. Moreover, if the roller is actively rotationally driven, the rotational direction will accomplish sweeping of debris and dust towards the suction opening. Since the roller is partly surrounded by a sealing member close to the envelope surface of the roller, along a portion of its circumference which is located essentially opposite the surface to be cleaned, the air flow around that portion of the envelope surface will be restricted. Accordingly, the roller can be used as a rotatable air barrier, such that a low edge outside the roller can be dispensed with, which has to effect that also rather large debris items can be withdrawn by the nozzle without having to lift the nozzle from the surface.

Within the general idea, the invention may be varied in many different ways. In a hereinafter described and illustrated embodiment, the vacuum cleaner nozzle is provided with one single, actively rotationally driven roller at a forward edge. The roller is moreover formed with a structured envelope surface, such that air passages will be formed between the roller and the surface to be cleaned. More precisely, the structure on the envelope surface is formed by several grooves, which extend helically over the envelope surface. As the roller rotates, the air passages between the roller and the surface will accordingly move successively along the length of the roller. In this way the air flow is concentrated, in a favourable way, to confined spots or passages, such that either the total air flow quantity can be decreased to save energy, or by maintaining the total air flow quantity the suction and cleaning effect can be increased.

However, a vacuum cleaner nozzle according to the invention can be provided with more than one roller. For example one rotationally driven roller at the forward edge and an idle roller or a likewise rotationally driven roller in the area behind the suction opening in order to control the air flow from be-

hind. Also, the nozzle can be provided with rollers, idle or driven, at each side in order to control the air flow from those directions and to facilitate moving the nozzle sideways if desired. In fact all the rollers can be rotationally driven, according to the invention in a direction such that a portion of their envelope surfaces, which are facing the surface to be cleaned, is moved towards the suction opening. Opposite rollers will accordingly have opposite directions of rotation. However, this is not a disadvantage when moving the nozzle over the surface, since as each roller is rotated, the contact friction between each roller and the surface will be lowered which will make it easy to move the nozzle in all directions. The invention is not restricted to four rotationally driven rollers in a square form. It would also be possible to arrange several short rollers in e.g. a hexagon or octagonal form. It is preferred that at least some of the rollers have structured envelope surfaces, in order to form air passages between the roller and the surface to be cleaned, while the other rollers can have smooth cylindrical envelope surfaces. One advantage with a vacuum cleaner nozzle according to the invention, formed in one of the above described or any other way, is that a low air flow restricting edge in the area of each roller can be dispensed with, which will facilitate pick up of particularly large debris items.

The sealing member close to the envelope surface of the roller, along a portion of its circumference which is located essentially opposite the surface to be cleaned, can be formed in different ways. In the described and illustrated embodiment, the sealing member is a roller housing, having an inner surface located close to the envelope surface of the roller. However, it could also be e.g. a flexible or hinged member which abuts and slides against the envelope surface as the roller rotates. It is to be understood that the term "essentially opposite" in this context, does not necessarily mean strictly diametrically opposite. Instead it should be interpreted as being on the side or the roller facing away from the surface to be cleaned.

The roller can be manufactured of many different materials. Normally it is preferred to use a resilient, easily deformable material, such as a foam material, in at least an outer layer of the roller. It is also preferred that at least an outer layer or the roller is unitary made in one piece of a resilient material.

The foam material, which can be of e.g. polyurethane or polyester, can be manufactured to a low cost and is easy to form with the desired structure.

However, also other materials could be conceivable, such as a fibrous material. Due to the resilient layer on the roller, it is also easier to pick up larger

5 items in that the resilient layer will be deformed over the item such that it can pass beneath the roller. Thanks to the resilient layer it is also easier to clean uneven surfaces since the layer will conform to the surface. Preferably, the envelope surface of the roller is sealed, such that it do not contain any open pores in which debris and dust can get stuck and such that it is air tight for
10 increased suction effect through the air passages between the roller and the surface. The thickness of the resilient layer is between 5-25 mm, preferably 10-20 mm and most preferred about 10 mm. However, it is also possible to form the roller of a material that is not so easy to deform, such as rubber or plastics.

15 The structure forming the air passages can have many different shapes, such as helically formed grooves or projections distributed over the envelope surface. One advantage with a structure in form of helical grooves, which can be continuous over the whole or only a part of the roller length, is that during vacuum cleaning the air passages will move continuously over a
20 part of or the entire length of the roller as it is rotated, such that the air flow will strike sequentially over the surface to be cleaned, which will drive the debris and dust in a favourable way towards the inlet slot. If the pitch of each helical groove is not too steep, the sealing member at a portion of the envelope surface which is located essentially opposite the surface to be cleaned,
25 can be made to cover at least one whole groove which will reduce air leakage between the sealing member and the roller. However, the structure of the envelope surface can be made in many other shapes, such as confined projections from or recesses in the envelope surface.

Normally, it is preferred that an actively driven roller is driven by means
30 of an electric motor or a turbine. However, it is also possible to drive the roller by means of wheels, which are in contact with the surface to be cleaned and rotates as the nozzle is moved over the surface. An electric motor can either be positioned inside the roller or outside the roller by driving via a belt or the

like. One advantage by having an actively driven roller is that it will have a brushing effect on the surface to be cleaned. Another is that the nozzle will be self propelled in for example the forward direction, which will facilitate the cleaning work. The roller is preferably driven at 400 to 600 rpm (revolutions
5 per minute) or at about 500 rpm. This is a rather low rotary speed in comparison to prior art vacuum cleaner nozzles, and reduces the risk that debris and dust will be thrown aside by the rotating roller. However, it is also conceivable to let the roller be an idler roller, which is not driven but merely rotates along when the vacuum cleaner nozzle is moved over the surface. In such a case
10 the roller functions as an air barrier, which restricts and controls the air flow to the suction opening and, when having a structured envelope surface, for forming of air passages between the envelope surface and the surface to be cleaned.

Preferably, each roller is easily replaceable by another roller, e.g. when
15 the used one is worn out or when it is desirable to use a roller having another structure pattern on the envelope surface. In an alternative embodiment of a roller, the structure pattern on the roller envelope surface could be combined with bristles, e.g. bristles arranged in grooves around the surface.

It is to be understood that a vacuum cleaner nozzle according to the
20 invention, can be applied in all kinds of vacuum cleaners, such as stick-type, canister-type and central vacuum cleaners. Due to the increased performance of the vacuum cleaner nozzle according to the invention, it is especially well suited for battery powered vacuum cleaners, but can of course be used also in vacuum cleaners connected to mains supply. Normally, vacuum cleaners
25 are utilized to vacuum clean horizontal surfaces, such as floors. However, the invention is applicable also in vacuum cleaner nozzles for other purposes. For example vacuum cleaner nozzles adapted for vacuum cleaning of stairs and furniture with a suction opening is located in a vertical side of the nozzle.

30

Brief description of the drawings

Hereinafter an exemplary embodiment of the invention will be described by reference to the drawings, in which:

- Fig 1 is a perspective view from above of a vacuum cleaner nozzle according to the invention;
- Fig 2 is a side view of the nozzle in fig 1;
- Fig 3 is a cross section through the nozzle in figs 1-2;
- 5 Fig 4 is a bottom view of the vacuum cleaner nozzle but with the roller removed; and
- Fig 5 is a perspective view of the roller.

Detailed description of an embodiment of the invention

10 Reference is first made to the perspective view in fig 1, illustrating an embodiment of a vacuum cleaner nozzle according to the invention, which is adapted to be connected to a so called stick-type of vacuum cleaner. For this reason the nozzle comprises a pivotal mounting bracket 1 for connecting to one end of the stick of the vacuum cleaner. The nozzle comprises an outlet

15 opening 2, as is best seen in fig 3, the end of which is located within an outer casing of the nozzle and to which a flexible vacuum tubing is to be connected. Through the flexible tubing an air flow is drawn by means of a vacuum source in form of a motor and fan unit in the vacuum cleaner, as is common knowledge in the art.

20 Reference is then made to figs 2-4 for a more detailed description of the nozzle structure. The vacuum cleaner nozzle comprises a suction opening 3, which in this embodiment is formed as an elongated slot, a rotatable roller 4, which is positioned along a forward edge of the nozzle in front of and in parallel to the suction opening 3, and two wheels 5. The suction opening 3 is

25 in fluid communication with the outlet opening 2, such that when the outlet opening 2 is connected to a vacuum source, debris and dust beneath the nozzle can be drawn in through the suction opening by means of the air flow generated by the vacuum source, while moving the nozzle over a surface 6 to be cleaned, e.g. a floor. The roller 4 is rotatably driven by means of an electrical motor, as will be described more in detail further on, such that the roller

30 rotates clockwise as seen in fig 2 and 3, i.e. the lower envelope surface of the roller, which is facing the surface 6, is moved inwards towards the suction opening 3. In this way the roller will sweep any debris and dust on the floor 6

towards the suction opening 3 at the same time as the roller will drive the nozzle forward, i.e. in the direction to the right in figs 2 and 3.

As can be seen from the cross section in fig 3, the suction opening 3 is defined between a rear edge 7, which is positioned with a small distance to the surface 6, and the roller 4. Accordingly, the roller 4 will function as a rotary air barrier, which will restrict the air flow to the suction opening 3. The casing is moreover formed with side wall portions 8 arranged at each end of the suction opening 3 and the roller 4, as seen in fig 2, which will restrict the air flow from each side to the suction opening.

At the side of the roller 4 which is located essentially opposite the floor 6, the roller is partly surrounded by a sealing member in form of a roller housing 9 having a sub-cylindrical inner surface positioned close to the envelope surface of the roller. In this way air flow above the roller will be restricted. The roller housing 9 terminates at a forward edge 10.

However, to achieve a good cleaning effect it is not sufficient to create a strong vacuum. It is also necessary to let in an appropriate amount of air such that an air flow is generated, preferably as close to the floor as possible, which has a sufficient velocity to withdraw the debris and dust into the suction opening. In the embodiment shown, the air flow into the suction opening 3 is partly taken in below the rear edge 7 and beneath the side wall portions 8. However, the main part of the air flow is taken in beneath the roller. This is accomplished in that the roller 4 is provided with grooves 11, which are helically extended over the outer surface of the roller, as is best seen in the perspective view of the roller in fig 5. Thanks to the helically extension of the grooves 11, these will form air passages between the roller and the floor 6 and, during rotation of the roller, the air passages will successively travel along the length of the roller. Accordingly, the roller 4 will function as a rotary air barrier, which restricts and controls the air flow to the suction opening 3. Due to this it is possible to position the forward edge 10 on a rather large distance from the floor 6, which will facilitate passage of large debris items to the suction opening 3. Also, due to the rotary action of the roller, debris and dust will be swept by the roller towards the suction opening 3.

12

The roller, in this embodiment, comprises preferably a layer 12 of a resilient material, such as a foam material having a sealed outer surface, which is supported by an inner tube 13. The resilient layer will be deformed when encounter large debris items, which will further facilitate passing of the debris to the suction opening and subsequent withdrawal by the air flow.

5

The roller 4 is electrically driven by means of an electrical motor 14 and a gear wheel 15, as is seen in the view of the bottom side in fig 4, in which the roller is removed.

CLAIMS

1. A vacuum cleaner nozzle of the kind being adapted to be moved over a floor (6) or other surface to be cleaned, comprising an outlet opening (2), which is adapted to be connected to a vacuum source, a suction opening (3) in a side of the vacuum cleaner nozzle facing the surface to be cleaned which is in fluid communication with the outlet opening to allow withdrawal of debris and dust from the surface through the suction opening, and at least one rotatable roller (4), which is adapted to at least partly support the vacuum cleaner nozzle against the surface and is formed of an essentially air tight material, c h a r a c t e r i z e d in that the at least one rotatable roller (4) is either an idle roller, which is rolling along as the nozzle is moved over the surface, or is driven in a direction of rotation such that a portion of its envelope surface, which is facing the surface to be cleaned, is moved towards the suction opening (3) to accomplish sweeping of debris and dust towards the suction opening, wherein the rotatable roller is partly surrounded by a sealing member (9) close to the envelope surface of the roller, along a portion of its circumference which is located essentially opposite the surface to be cleaned such that air flow around the portion of the envelope surface located opposite the surface to be cleaned is restricted and such that the roller functions as a rotatable air barrier.

2. A vacuum cleaner nozzle according to claim 1, c h a r a c t e r i z e d in that the roller (4) is positioned at a boundary edge of the vacuum cleaner nozzle.

3. A vacuum cleaner nozzle according to claim 1 or 2, c h a r a c t e r i z e d in that the sealing member is in form of a roller housing (9), which partly surrounds the roller (4) and which has an inner sub-cylindrical surface located close to the envelope surface of the roller.

4. A vacuum cleaner nozzle according to any of the preceding claims, characterized in that the suction opening (3) is at least partly defined by at least one rotatable roller (4).

5 5. A vacuum cleaner nozzle according to any of the preceding claims, characterized in that the roller (4) is formed with an envelope surface having a structure (11) forming air passages between the roller and the surface (6).

10 6. A vacuum cleaner nozzle according to claim 5, characterized in that the total outer contact surface of the roller (4) towards the surface to be cleaned, is at least 30%, preferably at least 40% and most preferred at least 50% of the total envelope surface.

15 7. A vacuum cleaner nozzle according to claim 5 or 6, characterized in that the roller (4) has an envelope surface, which is formed such that the air passages between the roller and the surface will travel along at least a part of the length of the roller during rotation of the roller.

20 8. A vacuum cleaner nozzle according to any of the claims 5 to 7, characterized in that the roller (4) is formed with grooves (11), which are helically extended along at least a part of the envelope surface of the roller.

25 9. A vacuum cleaner nozzle according to any of the preceding claims, characterized in that the roller (4) comprises an outer layer (12) of a resilient material.

30 10. A vacuum cleaner nozzle according to any of the preceding claims, characterized in that the roller (4) has at least an outer layer (12) being unitary made in one piece of a resilient material.

11. A vacuum cleaner nozzle according to claim 9 or 10, c h a r a c t e -
r i z e d in that the resilient material layer (12) of the roller (4) comprises a
foamed material.

5 12. A vacuum cleaner nozzle according to claim 11, c h a r a c t e r i -
z e d in that the foamed material comprises polyurethane foam.

13. A vacuum cleaner nozzle according to claim 11 or 12, c h a r a -
c t e r i z e d in that the resilient material is formed with a sealed outer sur-
10 face layer.

14. A vacuum cleaner nozzle according to any of the claims 11 to 13,
c h a r a c t e r i z e d in that the layer (12) of resilient material is between 5
and 25 mm, preferably between 10 and 20 mm thick.

15

15. A vacuum cleaner nozzle according to any of the preceding claims,
c h a r a c t e r i z e d in that the length of the suction opening (3) and the
roller (4) are essentially equal.

20

16. A vacuum cleaner nozzle according to any of the preceding claims,
c h a r a c t e r i z e d in that the roller (4) is actively driven.

17. A vacuum cleaner nozzle according to claim 16, c h a r a c t e r i -
z e d in that the roller (4) is actively driven at 400 to 600 rpm.

25

18. A vacuum cleaner nozzle according to claim 16 or 17, c h a r a -
c t e r i z e d in that the roller (4) is driven by means of an electrical motor
(14) disposed inside the roller.

30

19. A roller adapted to be arranged in a vacuum cleaner nozzle, ac-
cording to any of the claims 1 to 18, and being in contact with a surface to be
cleaned, c h a r a c t e r i z e d in that it is formed with an envelope surface

having a structure (11) forming air passages between the roller (4) and the surface (6).

20. A roller according to claim 19, c h a r a c t e r i z e d in that the total outer contact surface of the roller (4) towards the surface (6) to be
5 cleaned, is at least 30%, preferably at least 40 % and most preferred at least 50% of the total envelope surface.

21. A roller according to claim 19 or 20, c h a r a c t e r i z e d in that it
10 has an envelope surface, which is formed such that the air passages between the roller (4) and the surface (6) will travel along at least a part of the length of the roller during rotation of the roller.

22. A roller according to any of the claims 19 to 21, c h a r a c t e r i -
15 z e d in that it is formed with grooves (11), which are helically extended around the envelope surface of the roller (4).

23. A roller according to any of the claims 19 to 22, c h a r a c t e r i -
z e d in that it comprises an outer layer (12) of a resilient material.

20

24. A roller according to claim 23, c h a r a c t e r i z e d in that the resilient material layer (12) of the roller (4) comprises a foamed material.

25. A roller according to claim 24, c h a r a c t e r i z e d in that the
25 foamed material comprises polyurethane foam.


26. A roller according to claim 24 or 25, c h a r a c t e r i z e d in that the resilient material is formed with a sealed outer surface layer.


27. A roller according to any of the claims 23 to 26, c h a r a c t e r i -
30 z e d in that the layer (12) of resilient material is between 5 and 25 mm, preferably between 10 and 20 mm thick.

17

28. A vacuum cleaner comprising a vacuum cleaner nozzle according to any of the claims 1 to 18 and/or a roller according to any of the claims 19 to 27.

5

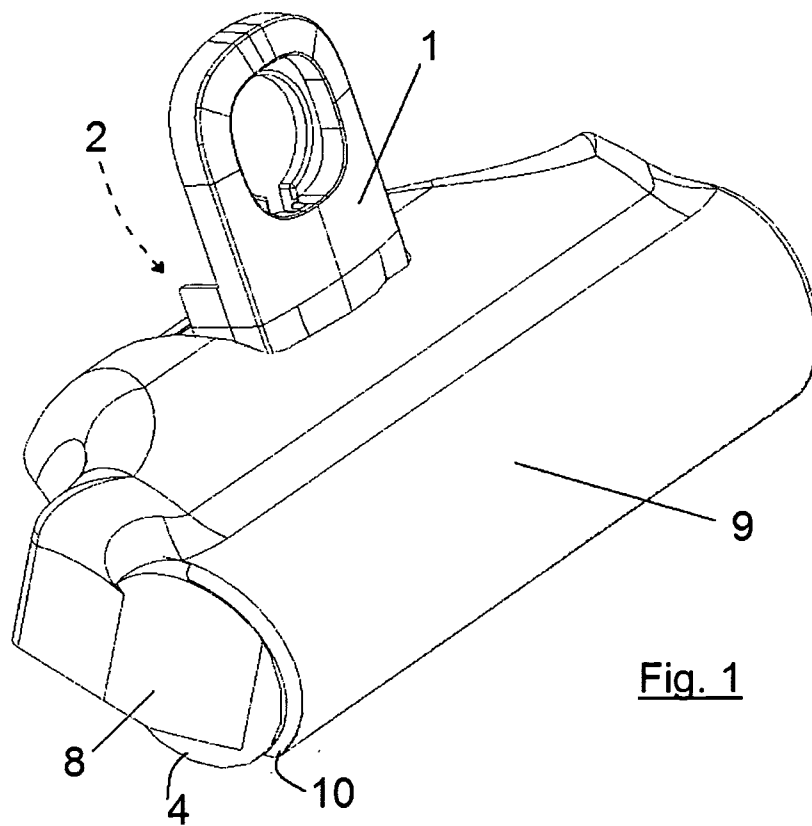

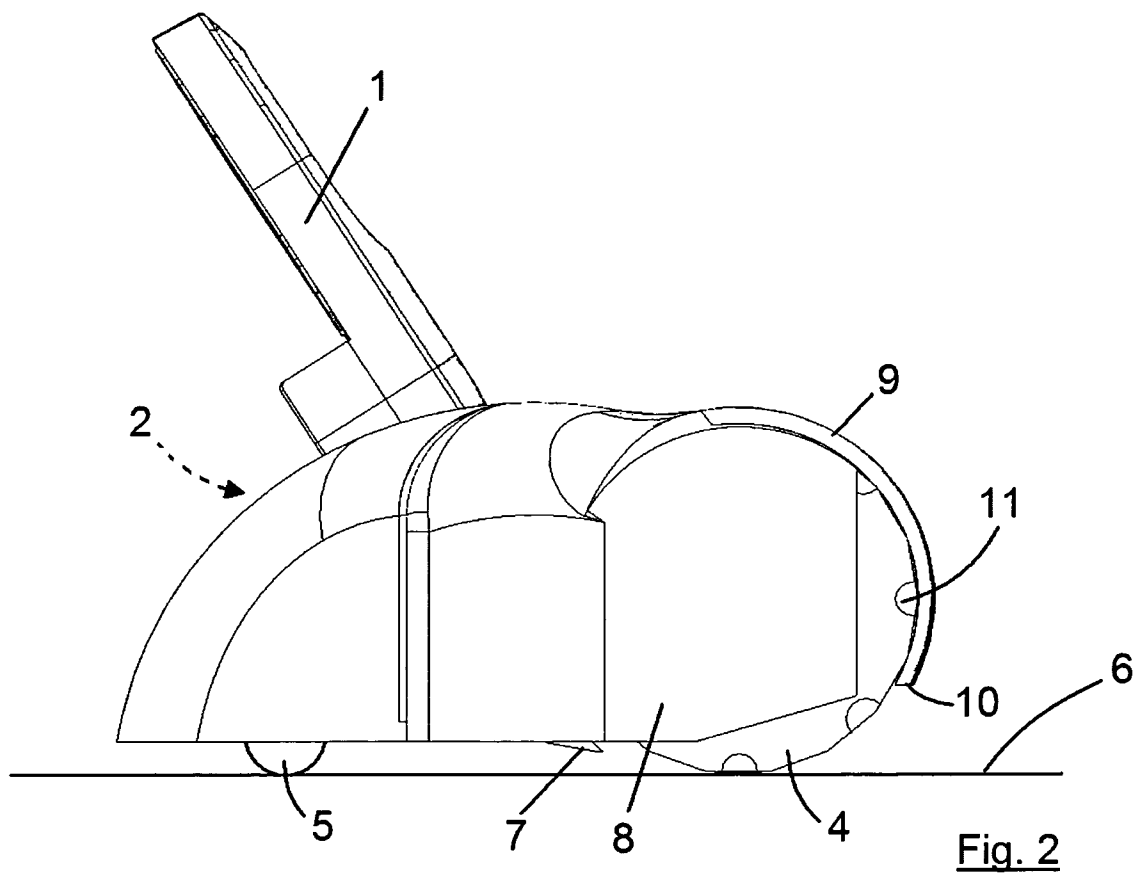

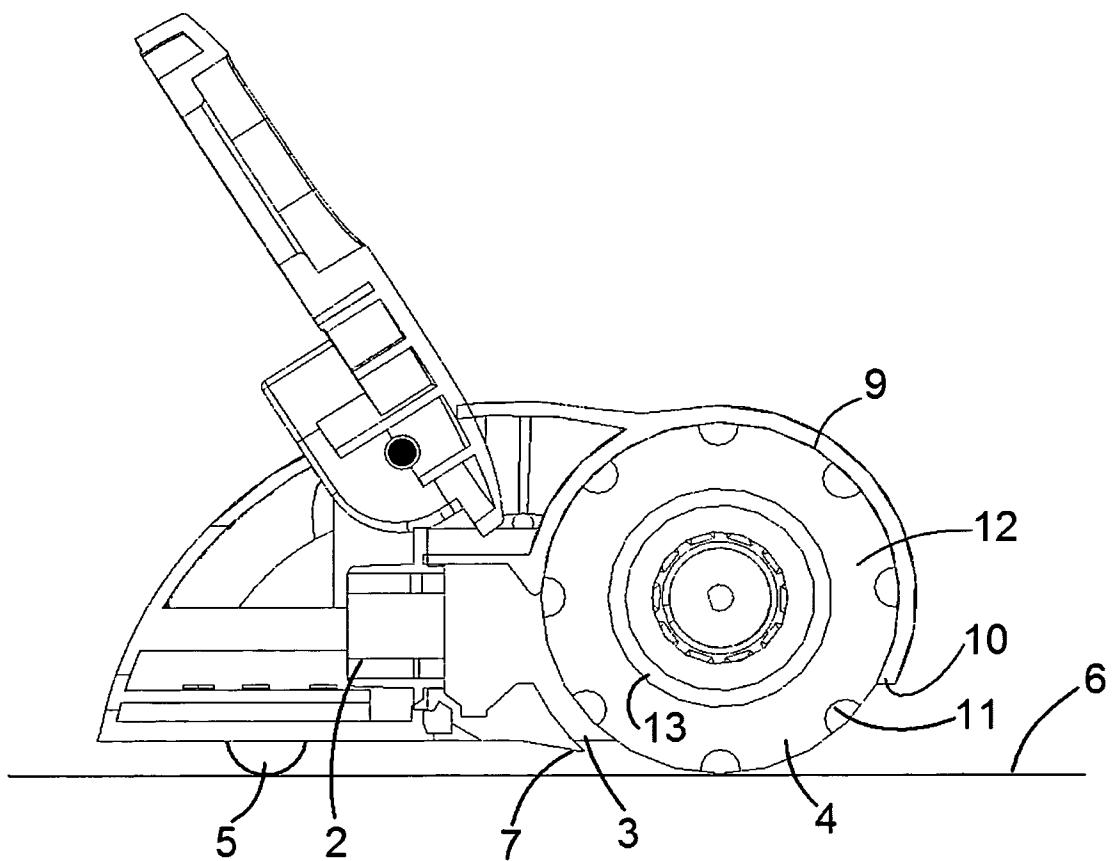


Fig. 3


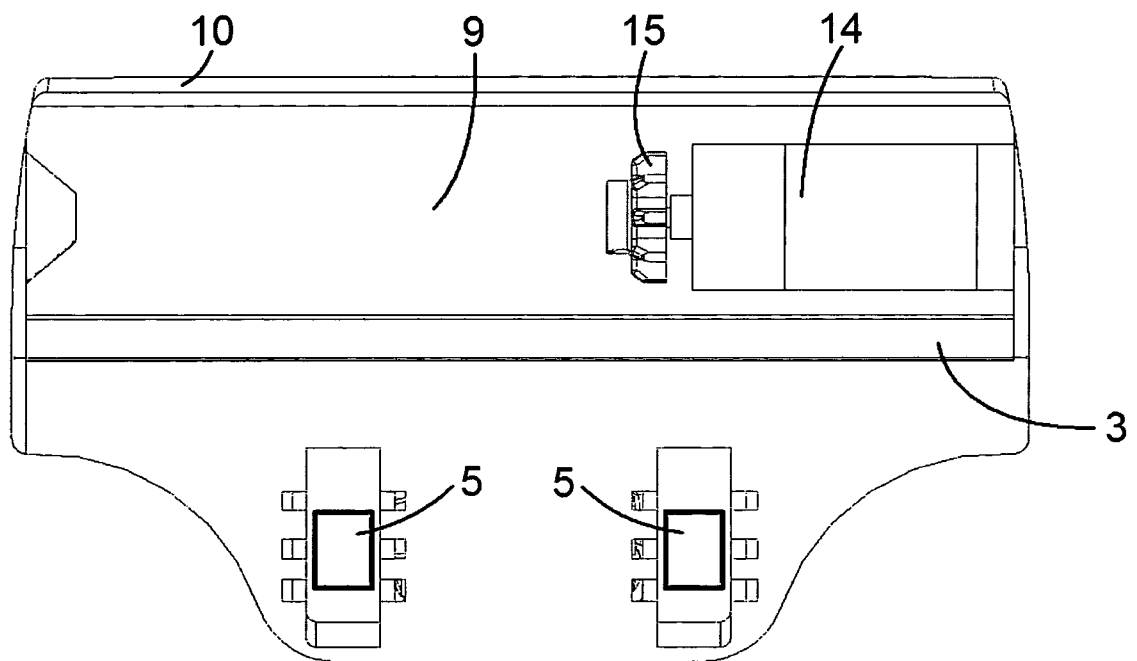


Fig. 4

Fig. 5

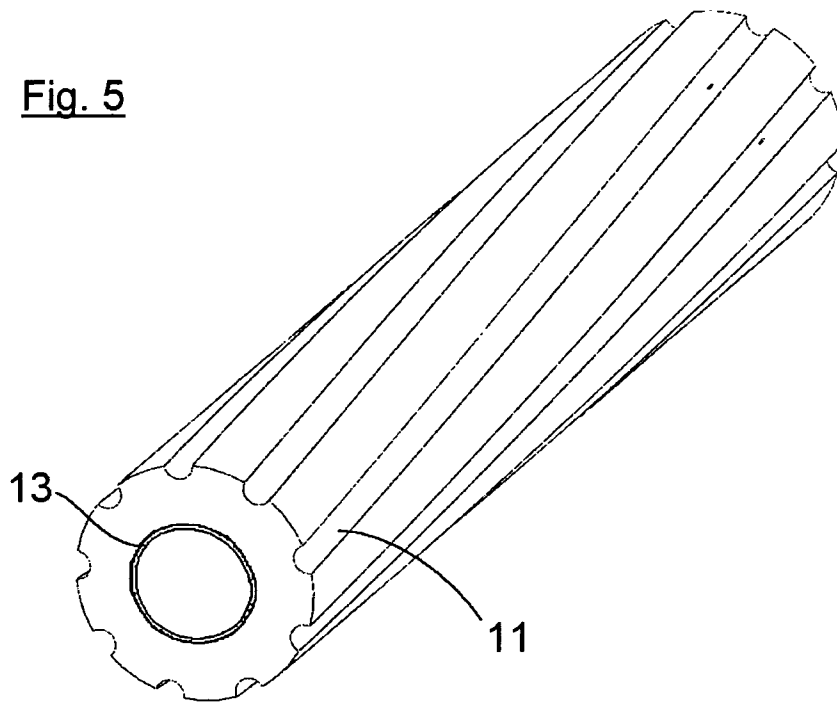

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2007/010949

A. CLASSIFICATION OF SUBJECT MATTER

INV. A47L9/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A47L A46B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 241 430 A (OSPREY LIMITED [GB]) 4 September 1991 (1991-09-04) page 1, paragraphs 1,4,5 page 2, paragraphs 2,4 page 3, lines 16-22 claims 4,10 figures 3,5	19, 21-24, 26,28
A	WO 99/43250 A (ELECTROLUX AB [SE]; HAEGERMARCK ANDERS [SE]) 2 September 1999 (1999-09-02) cited in the application page 1, lines 1-10 page 2, line 28 - page 3, line 15 figure 1 ----- -/--	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

18 April 2008

Date of mailing of the international search report

02/05/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer:

Cescutti, Gabriel

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2007/010949

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 013 212 A (GIUGGIOLI FABIO [IT]; PARMESANI MANUELA [IT]; REPOSSI FABIO [IT]) 28 June 2000 (2000-06-28), paragraphs [0001], [0006], [0008], [0013], [0018], [0019], [0031] figures 2-5 -----	1-4, 15, 16
A	EP 1 228 734 A (BERTOLA PIERANGELO [IT]) 7 August 2002 (2002-08-07) figures 17, 27 figures 1, 7 -----	9-12
A	DE 199 45 281 A1 (DUEPRO AG ROMANSHORN [CH]) 12 April 2001 (2001-04-12) page 1, paragraphs 4, 5 claims 4, 10 figures 1, 5 -----	19, 21, 22
A, P	JP 2006 346293 A (KAO CORP) 28 December 2006 (2006-12-28) abstract figures 1, 10 -----	1, 19, 28
A	BE 905 711 A1 (KEYSER JEAN MARIE DE) 2 March 1987 (1987-03-02) page 2, paragraph 5 - page 4, paragraph 1 figure 1 -----	1, 19, 28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2007/010949

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2241430	A	04-09-1991	NONE	
WO 9943250	A	02-09-1999	AU 3281499 A	15-09-1999
EP 1013212	A	28-06-2000	IT MI982672 A1	14-06-2000
			JP 2000197595 A	18-07-2000
EP 1228734	A	07-08-2002	IT MI20010193 A1	01-08-2002
DE 19945281	A1	12-04-2001	NONE	
JP 2006346293	A	28-12-2006	NONE	
BE 905711	A1	02-03-1987	NONE	