

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 October 2007 (04.10.2007)

PCT

(10) International Publication Number
WO 2007/110613 A1

- (51) International Patent Classification:
GOIN 29/28 (2006.01)
- (21) International Application Number:
PCT/GB2007/001070
- (22) International Filing Date: 22 March 2007 (22.03.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0605974.5 24 March 2006 (24.03.2006) GB
- (71) Applicant (for all designated States except US): **SPERRY RAIL (INTERNATIONAL) LIMITED** [GB/GB]; Trent House, RTC Business Park, London Road, Derby, Derbyshire DE24 8UP (GB).

- (74) Agents: **HASLAM, Simon, David** et al.; Abel & Inray, 20 Red Lion Street, London WC1R 4PQ (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW


- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **CROCKER, Robert, Lye** [GB/GB]; Trent House, RTC Business Park, London Road, Derby, Derbyshire DE24 8UP (GB). **STROUD, Justin, James, Robert** [GB/GB]; Trent House, RTC Business Park, London Road, Derby, Derbyshire DE24 8UP (GB).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHOD FOR THE DETECTION OF FAULTS IN RAILS

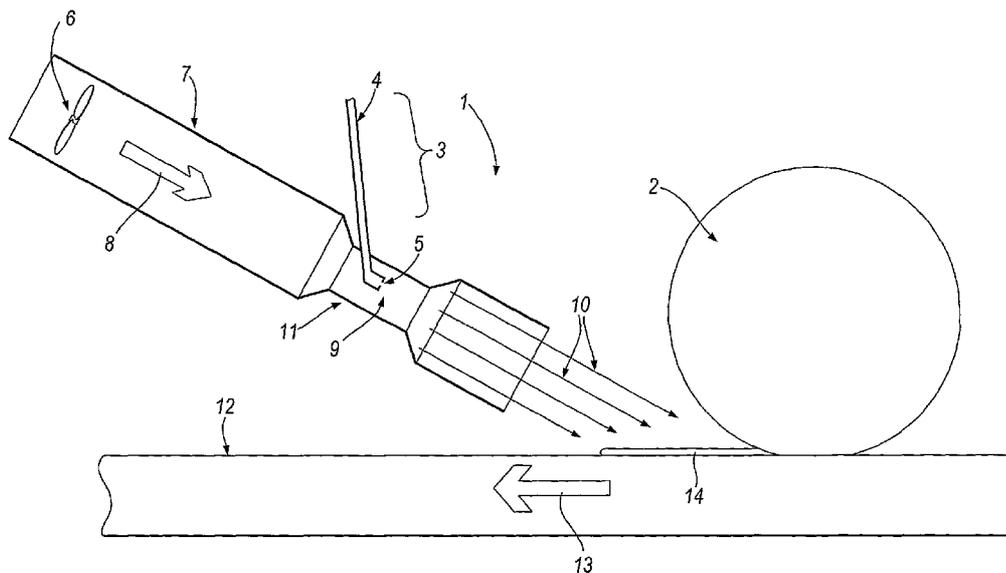

(57) Abstract: A system (1) for the detection of defects in rails (12), the system comprising a source of ultrasonic waves for emitting ultrasonic waves onto a rail, a detector for detecting ultrasonic waves reflected or otherwise scattered by the rail or defects therein and a mist generator (3) arranged, in use, to expose one or both of the rail and source of ultrasonic waves to a mist of liquid, thus enabling the formation of an ultrasound-transmissive interface between the rail and the source of ultrasonic waves.

WO 2007/110613 A1

System and method for the detection of faults in rails

This invention relates to the detection of rail defects, in particular defects in railway rails.

5

It is known to use ultrasound emitted and received by an ultrasonic transducer to inspect rails for defects. This technique relies on the transmission of ultrasound to and from the rail being inspected. A critical part of the path from the ultrasonic transducer is the interface between the transducer and the rail because the transmission of ultrasound is almost entirely blocked if an air layer is present between the rail and the transducer, even if that layer is microscopically thin. Consequently it is necessary to provide a means of excluding air from this interface region.

Air is usually excluded by putting water onto the rail, the water forming an ultrasound-transmissive layer between the rail and the transducer. Water is typically directed onto the rail either from the open end of a pipe or through a nozzle, the water being supplied to the rail by the action of gravity or by a pump. The process is often extremely inefficient in that far more water is dropped on the rail than is actually needed, most of the water spilling around and down the sides of the rail. This presents problems if the volume of water available is small. Furthermore, too much water around the sides of the transducer, (as opposed to between the transducer and rail) produces spurious ultrasonic signals that degrade the quality of testing. Problems of non-delivery of water to the desired place are also encountered when the relative velocity of the

transducer and rail is high or when there is a high velocity cross-wind in the region of the transducer and rail.

Undesired air pockets may form in regions of rail devoid of water.

5

The present invention mitigates against one or more of these problems .

In accordance with a first aspect of the present invention,
10 there is provided a system for the detection of defects in rails, the system comprising a source of ultrasonic waves for emitting ultrasonic waves onto a rail, a detector for detecting ultrasonic waves reflected or otherwise scattered by the rail or defects therein and a mist generator
15 arranged, in use, to expose one or both of the rail and source of ultrasonic waves to a mist of liquid, thus enabling the formation of an ultrasound-transmissive interface between the rail and the source of ultrasonic waves .

20

The mist generator may also be arranged, in use, to expose one or both of the rail and the detector of ultrasonic waves to a mist of liquid, thus enabling the formation of an ultrasound-transmissive interface between the rail and the
25 detector of ultrasonic waves.

It has been found that exposure of a rail and/or the source of ultrasonic waves to a mist provides sufficient water to the rail to facilitate good transmission of ultrasound from
30 the source to the rail and from the rail to the detector (if any such ultrasound is reflected or otherwise scattered by the rail) . This provides a system that uses relatively

little water which is important if the volume of water available is small or if testing is to be of lengthy duration.

5 The source of ultrasound waves and the detector of ultrasound waves are often provided in one component, such as an ultrasound transducer. The source and detector may, of course, be separate components. Such sources and detectors of ultrasonic waves are conventional to those skilled in the
10 art.

A "mist of liquid" refers to a multiplicity of droplets of liquid, preferably in a carrier gas, such as air. The droplets of liquid are preferably small. The droplets may
15 have a mean diameter of 4mm or less. It is preferred that the droplets of liquid may have a mean diameter of 2mm or less, more preferably 1mm or less, further more preferably 500 microns or less, even further more preferably 200 microns or less. Advantageously the droplets may have a mean
20 diameter of 150 microns or less, and more advantageously may have a mean diameter of 100 microns or less. The droplets forming the mist may have the size properties associated with the droplets of a mist generated by a perfume atomizer.

25 The detection of reflected (or otherwise scattered) ultrasonic waves may be indicative of defects in the rail under test. The detection of such reflected or scattered ultrasonic waves in the monitoring of rails is well known to the person skilled in the art.

30 The mist generator may typically comprise a conduit through which, in use, liquid is urged under pressure to an outlet,

such as a small aperture. A mist is emitted from the outlet in use.

The liquid is typically water because it is cheap, forms a
5 suitable ultrasound-transmissive film and is environmentally safe.

The system may typically be attached to, or form part of, a track defect detection vehicle.

10

The system is preferably capable of producing a spray or mist of liquid wherein the droplets therein have a high mean velocity relative to the source and detector of ultrasonic waves .

15

If the velocity of the droplets is too low, then the liquid may fail to form a suitable interface between the rail and the source of ultrasonic waves. This may occur, for example, if the system is mounted to a rail defect detecting vehicle
20 traveling at high speed.

25

The velocity of the droplets may be sufficiently high so that a suitable interface is formed when the vehicle carrying the system is traveling at up to 30 m/s. The
25 velocity of the droplets may be sufficiently high so that a suitable film is formed on the rail in high cross-winds, such as cross-winds of up to 30 m/s. The velocity of the droplets relative to the mist generator or optionally the source of ultrasonic waves may advantageously be greater
30 than the velocity of the vehicle carrying the system or the velocity of any cross-wind.

The high mean droplet velocity may be generated by the mist generator providing droplets traveling at sufficiently high speeds .

5 Alternatively or additionally, the system may comprise a mist accelerator (distinct from the mist generator) , arranged to accelerate the droplets forming the mist towards the rail subsequent to generation of the mist. The mist accelerator may be a means for generating air flow. The air
10 flow may be used to carry the mist.

The mist accelerator may comprise a pump or fan, preferably upstream of the mist generator. A pump and fan are convenient means of generating airflow (and hence
15 accelerating droplets carried by that airflow) . The system may also comprise a baffle for directing air from the means for generating air flow to the mist generator. The baffle may be provided by a second conduit; the means for generating air flow may be disposed in the second conduit.

20 The mist generator may be arranged, in use, to generate the mist in the second conduit. The second conduit may be provided with a constricted section. Such a constricted section is intended to produce a venturi effect i.e. the smaller cross-sectional area of the second conduit produces
25 an increase in velocity of the air (and hence the velocity of the droplets carried in the air flow) . It is preferred that the mist generator is arranged, in use, to generate the mist in the constricted section of the second conduit.

30 The system may be arranged so that the droplets of the mist are deposited onto the rail forward of the source of ultrasonic waves. This is a convenient geometry for a

vehicle traveling forward. The droplets of the mist may be emitted rearwardly of the mist generator.-

In use, the means for generating air flow may draw in air at
5 a temperature greater than ambient temperature. If the system is provided on, or is part of, a vehicle having an exhaust that, in use, emits air or other exhaust gas at a temperature higher than ambient temperature, the means for generating air flow may draw in said air or other exhaust
10 gas.

Alternatively or additionally, the system may further comprise a heater arranged so that the means for generating air flow draws air into thermal contact with the heater.

15 The first conduit (or part thereof) may, in use, be in thermal contact with said air or exhaust gas at elevated temperature. This arrangement allows the liquid to be heated using warm air or exhaust gas used to propel the
20 subsequently-produced mist.

The first conduit (or part thereof) may be located inside the second conduit. This enables the liquid to be heated by any warm air or exhaust gas in the second conduit and
25 provides physical protection to the first conduit.

The liquid may be heated prior to formation of the mist. This may be achieved by providing a heater to heat the liquid.

30 In accordance with a second aspect of the present invention, there is provided a kit for assisting in detecting defects

in rails, the kit comprising a means for generating a mist of liquid and one or both of (i) a bracket for mounting a mist generator on a track defect detection vehicle so that the mist generator is in spaced relation to a source of
5 ultrasonic waves and (ii) a source of ultrasonic waves.

The kit may also comprise a detector for detecting ultrasonic waves.

10 The kit may also comprise a mist accelerator, such as that described above in relation to the system of the first aspect of the present invention.

The kit may also comprise those features described above in
15 relation to the system of the first aspect of the present invention, such as the second conduit.

In accordance with a third aspect of the present invention, there is provided a method of detecting defects in rails,
20 the method comprising:

(i) exposing one or both of a rail and a source of ultrasonic waves to a mist of liquid, thus enabling the formation of an ultrasound-transmissive interface between the rail and the source of ultrasonic waves

25 (ii) passing ultrasonic waves through said interface onto said rail and

(iii) sensing for ultrasonic waves reflected or otherwise scattered from said rail or defects therein.

30 The reflected or otherwise scattered ultrasonic waves sensed may be indicative of the absence or presence of one or more defects in the rail.

The droplets forming the mist may be accelerated towards the rail subsequent to generation of the mist. The velocity of the droplets may be sufficiently high so that a suitable
5 film is formed on the rail when the vehicle carrying the system is traveling at up to 30 m/s. The velocity of the droplets may be sufficiently high so that a suitable film is formed on the rail in high cross-winds, such as cross-winds of up to 30m/s.

10

The droplets may be carried towards the rail by a stream of air or other carrier gas, the stream of air or other carrier gas being directed towards the rail. Such a stream of air or other carrier gas may be generated by a fan or pump.

15

One or both of the air or other carrier gas and the liquid may be at greater than ambient temperature. The liquid may be heated prior to the generation of a mist.

20

The properties of the droplets used in the method of the third aspect of the present invention may be the same as those described above with respect to the system of the first aspect of the present invention. For example, the droplets may advantageously have a mean diameter of 150
25 microns or less, and more advantageously may have a mean diameter of 100 microns or less.

30

The method of the third aspect of the present invention may be performed using the system or kit of the first and second aspects of the present invention, respectively.

The present invention is now described by way of example only with reference to Figure 1 which is a schematic representation of the system of the present invention.

5 Figure 1 shows a system for the detection of defects in rails in accordance with the present invention. The system is denoted generally by reference numeral 1 and comprises a source of ultrasonic waves for emitting ultrasonic waves onto a rail 12, a detector for detecting ultrasonic waves
10 reflected or otherwise scattered by the rail (or defects therein) and a mist generator 3 arranged, in use, to expose the rail and an ultrasonic transducer 2 to a mist of liquid, thus enabling the formation of an ultrasound transmissive interface between the rail 12 and the ultrasonic transducer
15 2, thus enabling the transmission of ultrasonic waves to and from the rail 12. The transducer 2 acts as a source and the detector of ultrasonic waves.

The system is attached to a wheeled railway vehicle that is
20 traveling on the rails in the direction of arrow 13. The ultrasound transducer is substantially in contact with the rail, but, in the absence of water being sprayed onto the rail, air gaps may exist between the rail 12 and the transducer 2. Water is supplied between the rail 12 and the
25 transducer 2 to provide an ultrasound-transmissive interface between the transducer and the rail 12.

The operation of the system is now discussed. Air is drawn into a second conduit 7 by a fan 6 (in this case, a
30 centrifugal fan blower), the air being urged at speed along the conduit 7 as indicated by the arrow labeled 8. A first conduit 4 extends inside the second conduit downstream of

the fan. Liquid (in this case, water) is carried from a reservoir (not shown) under the influence of a water pump (not shown) to a nozzle 5 located at the end of the first conduit 4. The pressure in the first conduit is about 3 to 4
5 bar; this pressure causes liquid to be urged out of the first conduit 4 as a mist into the region labeled 9. The nozzle 5 is a commercially-available mist-generating nozzle as used to form mists of water for watering plants (Gardena micro-mist nozzle, part no. 1371-20, available from Two
10 Wests & Elliott Ltd, Chesterfield, UK, S41 9RH). The first conduit 4 comprises commercially-available tubing having an internal diameter of about 4mm and an external diameter of about 6mm. Once in this region 9, the droplets that form the mist are carried by air in a general direction shown by
15 arrows 10 to form a film 14 of water on the surface of rail 12. Some water may also be deposited onto the surface of the transducer 2. The droplets are estimated to have a mean diameter of about 50 microns.

20 The second conduit 7 is provided with a constricted region 11 into which the mist is released. The constricted region 11 leads to the formation of a Venturi effect; the reduction in cross-sectional area of the second conduit 7 at the constriction causes the velocity of gas to increase. The
25 nozzle 5 of the mist generator 3 is located in the constricted region 11 so that the droplets forming the mist are subjected to a high velocity carrier air stream. The second conduit 7 downstream of the constricted region 11 has the same internal diameter as the second conduit 7 upstream
30 of the constricted region 11.

The water deposited on the rail 12 and possibly the transducer 2 forms an interface between the transducer 2 and rail 12 that is transmissive to ultrasonic waves. The ultrasonic waves pass from the transducer 2 through the water interface and into the rail 12. The ultrasonic waves generally pass uninterrupted through the rail 12 unless they are incident on some form of defect, such as a crack. Defects cause the ultrasonic waves to be reflected or otherwise scattered, the characteristics of the reflected or scattered ultrasonic waves being indicative of certain characteristics of the defect. For example, the time of receipt of a reflected signal may be indicative of the depth of the defect. The reflected or otherwise scattered waves are transmitted back through the rail 12, through the interface between the rail 12 and transducer 2, and into the transducer 2 where the reflected wave is detected.

The internal diameter of the second conduit 7 upstream and downstream of the constricted region 11 is about 50mm.

The system of the present invention may be readily adapted for use in low temperature environments. For example, air may be passed over heating elements prior to being drawn into the second conduit 7. Alternatively or additionally, warm exhaust air may be taken from cooling units and the like and drawn into the second conduit 7 by the fan 6. The liquid in the first conduit 4 may also be heated. This may be achieved by locating the first conduit 4 inside the second conduit 7, if warm air is provided to the second conduit 7. Alternatively or additionally, a heater may be provided for heating the liquid prior to formation of the mist.

The present invention can deliver sufficient water to the rail to provide a suitable ultrasound-transmissive interface between the rail 12 and the transducer 2. Furthermore, the amount of water used is very low, thus reducing wastage and permitting smaller reservoirs to be used or permitting usage of longer duration. Furthermore, spurious ultrasonic signals are reduced because water does not, in normal use, usually collect in the area between the sides of the transducer and the rail where it is normally held by surface tension. The high velocity air continuously blows water away from this region thus precluding the creation of the spurious signals.

The high velocity of the air (and consequently the high velocity of the droplets in the mist) enables water to be delivered to the rail 12 even when the defect detecting vehicle is traveling at speeds of about 30 m/s. Furthermore, the high velocity of the droplets means that they are less susceptible from being blown-off course by cross-winds. The high velocity air can also form an effective shield around the water droplets so that when the droplets emerge from the conduit 7 they are relatively unaffected by external air movements either from the forward motion of the train or cross winds. The high velocity air also shapes the mist of droplets to avoid it becoming dispersed. This ensures that the droplets are effectively directed, with very little overspill down the sides of the transducer or rail.

Furthermore, it has been found that the high velocity water droplets wet the surface of the rail 12 very well. It is believed that the high velocity of the droplets causes the

surface tension of the droplets to be broken when the droplets hit the rail.

The present invention is preferably used to detect defects
5 in railway rails, but may be used to detect defects in other
rails, such as tram rails.

Claims

1. A system for the detection of defects in rails, the system comprising a source of ultrasonic waves for emitting
5 ultrasonic waves onto a rail, a detector for detecting ultrasonic waves reflected or otherwise scattered by the rail or defects therein and a mist generator arranged, in use, to expose one or both of the rail and source of ultrasonic waves to a mist of liquid, thus enabling the
10 formation of an ultrasound-transmissive interface between the rail and the source of ultrasonic waves.

2. A system according to claim 1 wherein the source of ultrasound waves and the detector of ultrasound waves are
15 provided by an ultrasound transducer.

3. A system according to claim 1 or 2 wherein the mist generator comprises a first conduit through which, in use, liquid is urged under pressure to an outlet from which, in
20 use, a mist is emitted.

4. A system according to any preceding claim comprising a mist accelerator for accelerating the droplets forming the mist towards the rail subsequent to generation of the mist.
25

5. A system according to claim 4 wherein the mist accelerator comprises a means for generating air flow.

6. A system according to claim 5 comprising a baffle for
30 directing air from the means for generating air flow to the mist generator.

7. A system according to claim 6 wherein the baffle is provided by a second conduit.

8. A system according to claim 7 wherein the means for generating air flow is disposed in the second conduit.

9. A system according to claim 7 or 8 wherein the mist generator is arranged, in use, to generate the mist in the second conduit.

10

10. A system according to any one of claims 7 to 9 wherein the second conduit is provided with a constricted section.

11. A system according to claim 10 when dependent on claim 9 wherein the mist generator is arranged, in use, to generate the mist in the constricted section of the second conduit.

12. A system according to any one of claims 5 to 11 wherein, in use, the means for generating air flow draws in air at a temperature greater than ambient temperature.

13. A system according to claim 12 wherein the system is part of, or provided on, a vehicle having an exhaust that, in use, emits air or other exhaust gas at temperature higher than ambient temperature, and wherein the means for generating air flow draws in said air or other exhaust gas.

14. A system according to claim 12 further comprising a heater arranged so that the means for generating air flow draws air into thermal contact with the heater.

15. A system according to any one of claims 12 to 14 wherein, in use, the first conduit (or part thereof) is in thermal contact with said air at an elevated temperature.

5 16. A system according to any preceding claim further comprising a heater for heating the liquid.

17. A system according to any one of claims 8 to 16 when dependent on claim 7 wherein the first conduit (or part thereof) is located inside the second conduit.

10

18. A kit for assisting in detecting defects in rails, the kit comprising a means for generating a mist of liquid and one or both of (i) a bracket for mounting a mist generator on a track defect detection vehicle so that the mist generator is in spaced relation to a source of ultrasonic waves and (ii) a source of ultrasonic waves.

15

19. A kit according to claim 18 comprising a detector for detecting ultrasonic waves.

20

20. A kit according to claim 18 or claim 19 comprising a mist accelerator.

25 21. A method of detecting defects in rails, the method comprising :

(i) exposing one or both of a rail and a source of ultrasonic waves to a mist of liquid, thus enabling the formation of an ultrasound-transmissive interface between the rail and the source of ultrasonic waves

30

(ii) passing ultrasonic waves through said interface onto said rail and

(iii) sensing for ultrasonic waves reflected or otherwise scattered from said rail or defects therein, the reflected or otherwise scattered ultrasonic waves sensed being indicative of the absence or presence of one or more defects
5 in the rail.

22. A method according to claim 21 wherein the droplets forming the mist are accelerated towards the rail subsequent to generation of the mist.
10

23. A method according to claim 21 or 22 wherein the droplets are carried towards the rail by a stream of air or other carrier gas, the stream of air or other carrier gas being directed towards the rail.
15

24. A method according to claim 23 wherein one or both of the air or other carrier gas and the liquid is at a temperature greater than ambient temperature.

1/1

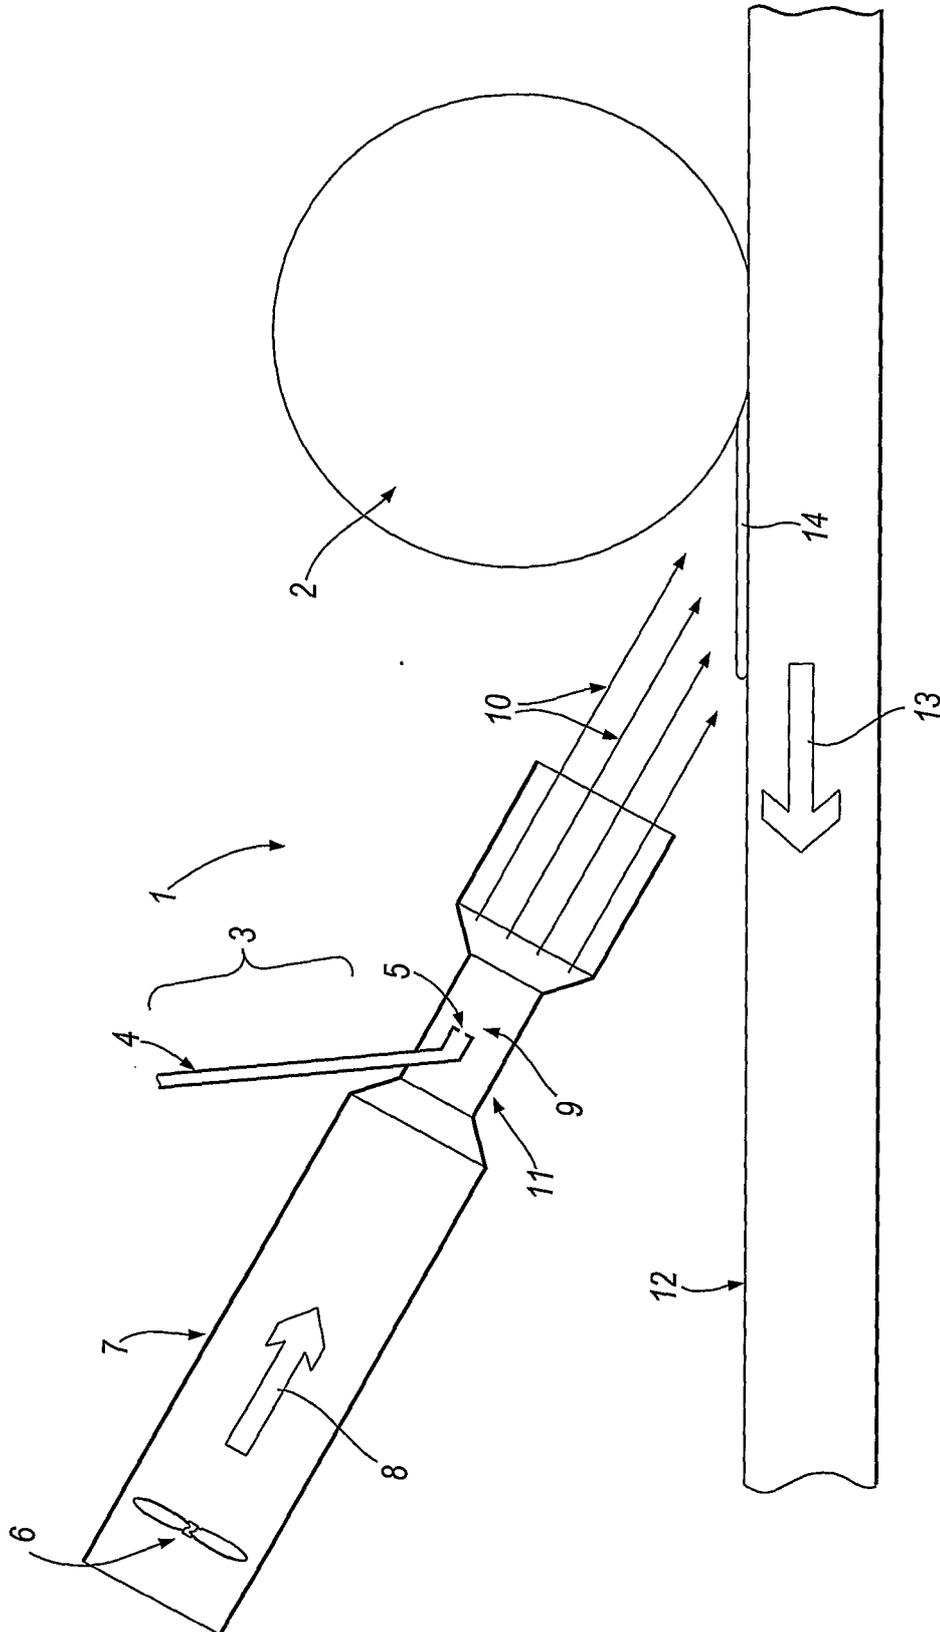


Fig.1

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2007/001070

A. CLASSIFICATION OF SUBJECT MATTER
INV. G01N29/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
B61K GOIN

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal , WPI Data, INSPEC, COMPENDEX, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Dilation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 522 265 A (JAEGGI J P [CH]) 4 June 1996 (1996-06-04) column 1, lines 40-50	1, 3, 18, 19, 21
A	column 3, lines 29-40	2, 4-17, 20, 22-24
X	US 5 419 195 A (QUINN JAMES R [US]) 30 May 1995 (1995-05-30) abstract	1, 18, 19
X	GB 1 322 380 A (SUMITOMO METAL IND) 4 July 1973 (1973-07-04) page 1, lines 37-44	1, 18, 19
A	US 4 593 569 A (JOY IVAN L [US]) 10 June 1986 (1986-06-10) abstract column 1, lines 53-57	1, 18, 21
	-/-	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A1" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O1" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search
20 June 2007

Date of mailing of the international search report
03/07/2007

Name and mailing address of the ISA/
European Patent Office, PB. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer
Filipas, Alin

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2007/001070

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 028 753 A (OOY IVAN L) 10 April 1962 (1962-04-10) column 1, Lines 12-31 column 2, lines 61-66 -----	1,18,21
A	JP 05 142215 A (KANTO SPECIAL STEEL WORKS LTD; KAWASAKI STEEL CO) 8 June 1993 (1993-06-08) abstract; figure 4 -----	4-11,20, 22,23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2007/001070

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5522265	A	04-06-1996	AT 166035 T 15-05-1998
			AU 687161 B2 19-02-1998
			AU 1625295 A 19-10-1995
			CA 2146306 A1 07-10-1995
			DE 69502435 D1 18-06-1998
			DE 69502435 T2 03-12-1998
			EP 0676322 A1 11-10-1995
			HK 1009644 A1 04-06-1999
			JP 3357217 B2 16-12-2002
			JP 7286994 A 31-10-1995
US 5419195	A	30-05-1995	EP 0622629 A1 02-11-1994
			JP 7049335 A 21-02-1995
GB 1322380	A	04-07-1973	DE 2039389 A1 25-02-1971
			US 3662590 A 16-05-1972
US 4593569	A	10-06-1986	NONE
US 3028753	A	10-04-1962	NONE
OP 5142215	A	08-06-1993	NONE