(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
23 December 2009 (23.12.2009)

PCT

(10) International Publication Number
WO 2009/155243 A2

(51) International Patent Classification:
E21B 43/119 (2006.01) *E21B 23/00* (2006.01)

(21) International Application Number:
PCT/US2009/047375

(22) International Filing Date:
15 June 2009 (15.06.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/141,398 18 June 2008 (18.06.2008) US

(71) Applicant *(for all designated States except US)*: **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **BUSSEAR, Terry, R.** [US/US]; 17302 Loring Lane, Spring, TX 77388 (US). **HUBER, Kirk, J.** [US/US]; 6202 Mahogany Way, Magnolia, TX 77354 (US).

(74) Agent: **DUPHORNE, Darin, H.**; Division Intellectual Property Counsel, Baker Oil Tools Division-Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) **Title**: DOWNHOLE SHUT OFF ASSEMBLY FOR ARTIFICIALLY LIFTED WELLS

(57) **Abstract**: A multi-string well has an electric submersible pump (ESP) that can be removed without killing the well. A slotted liner is sealingly secured externally to casing and internally to a guide string that remains in the wellbore when the ESP is removed. A ported sub is part of the guide string and a concentric screen that can have instruments that moves relatively to the guide string can selectively allow flow in an annulus between them and to the ported sub or that annulus between the guide and concentric strings can be blocked off by manipulation of the concentric string to close the ported sub. With the lower portion of the well now blocked off, the wellhead can be removed so that the ESP can come out with the production string. The device has particular application to steam assisted gravity drainage (SAGD) systems as well as other downhole applications.

WO 2009/155243 A2

APPLICATION FOR PATENT

Title: Downhole Shut Off Assembly for Artificially Lifted Wells

Inventors: Terry R. Bussear and Kirk J. Huber

FIELD OF THE INVENTION

[0001] The field of the invention is multi-string wells that require removal of a string without killing the well.

BACKGROUND OF THE INVENTION

[0002] For a variety of reasons wells can have multiple strings. One more recent example involves steam assisted gravity drainage (SAGD) installations used to recover tar sands from shallow formations. These installations use wells in combination. An injection well extends horizontally through a formation and is used to deliver steam into the formation to get the tar sands into a flowing condition as the heat added reduces viscosity. The production well is also run horizontally in the same formation and is generally below the injection well. The heated tar sands, from the steam from the injection well, flow into the production well for removal to the surface and further processing.

[0003] FIG. 5 is the current way production wells are configured in SAGD service and illustrate the problem addressed by the present invention. FIG 5 shows a producer well W having a top casing **10** that is sealed with cement **12** and an intermediate casing **14** sealed with cement **16**. The intermediate casing **14** terminates at **18** and beyond that is open hole **20**. A production string **22** has an electric submersible pump (ESP) **24** at its lower end. A slotted liner **26** extends into open hole **20** and is hung at hanger **28**. There is a closed end **30** on the slotted liner **26**. A guide string **32** extends from the surface **34** and within the slotted liner **26** and well into the open hole **20**. An instrument string **36** runs beyond end **38** of the guide string **32**. Instrument string **36** is sealed at the lower end **40** and inside of it are instruments and sensors **42** that can detect temperature, pressure or other well conditions. These sensors are protected in the instrument string **36**

from the harsh conditions in the open hole portion **20**. It is preferred to put the ESP **24** within the intermediate casing **32** rather than in the open hole portion **20** in the event the ESP **24** needs to be removed for any reason.

[0004] Those skilled in the art will appreciate that normally without steam injection, there is no flow in the producer well **W**. In order to make the tar sands flowable the producer well needs to be heated from the injector well and from steam delivered to the producer well. This is a very slow process that can take months. Once the producer well is at temperature it is full with steam and condensate. If the ESP **24** develops a problem and needs to be removed the well **W** first had to be killed with water added from the surface **34** before a wellhead (not shown) could be removed so that the ESP **24** could come out. If the wellhead were simply removed and the well **W** were still live, the condensate in the open hole **20** would experience a pressure reduction and flash to steam and come out at the surface **34** since the wellhead was no longer in position. This would create a very dangerous condition at the surface. The alternative no available is killing the well with fluid before taking off the wellhead so that the flashing of condensate doesn't occur at the surface and possibly injure personnel. The problem with killing the well is that it takes so long to reheat it after it cools and it potentially does not produce as well even after it is put back in service after a months long warm up.

[0005] The present invention seeks to provide a way to remove the ESP **24** without having to kill the well **W**. The downhole equipment is reconfigured to provide a seal between the casing and the slotted liner and another seal between the guide string and the inside of the slotted liner. The guide string features internal seal bores and a ported sub or a sleeve type valve that allows flow to the ESP for production but cuts off flow to the ESP when the concentric string which could hold instruments is moved with respect to its surrounding guide string. With the well isolated below the ESP the production string with the ESP at its lower end can be pulled without killing the well as will be explained in detail below.

[0006] USP 6,328,111 is relevant to inserting an ESP into a live well that has a single string.

SUMMARY OF THE INVENTION

[0007] A multi-string well has an electric submersible pump (ESP) that can be removed without killing the well. A slotted liner is sealingly secured externally to casing and internally to a guide string that remains in the wellbore when the ESP is removed. A ported sub is part of the guide string and a concentric string which could hold instruments string that moves relatively to the guide string can selectively allow flow in an annulus between them and to the ported sub or that annulus between the guide and concentric string which could hold instruments can be blocked off by manipulation of the concentric string to close the ported sub. With the lower portion of the well now blocked off, the wellhead can be removed so that the ESP can come out with the production string. The device has particular application to steam assisted gravity drainage (SAGD) systems as well as other downhole applications.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 shows the production mode where flow can reach the ESP from further downhole;

[0009] FIG. 2 is the view of FIG. 1 after the concentric string is shifted up to isolate the ESP from the hole below it;

[0010] FIG. 3 is a view of a lift cylinder corresponding to the production position of FIG. 1;

[0011] FIG. 4 is the view of the lift cylinder corresponding to the shut off position in FIG. 2;

[0012] FIG. 5 is a prior art view of an SAGD producer well where killing the well was required to remove the ESP.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] FIG. 1 shows a reconfigured well **W'** at its lower end. ESP **100** has inlets **102** leading to the production string **104** that runs to the surface (not shown). The upper portions of well **W'** in FIG 1 are the same as well **W'** except in ways to be described

below. Slotted liner **106** is anchored at **108** and sealed at **110** to casing **112** thus closing off annulus **114**. Guide string **116** has a sealed skirt **118** secured to it. Seal **120** seals the outside of the skirt **118** to the inside of the slotted liner **106**. Guide string **116** ends at lower end **121** and concentric string which could hold instruments **122** continues to extend further into slotted liner **106** in the same manner as described for FIG. 5. In this manner seals **110** and **120** constitute an isolation device between the production string **104** and the slotted liner **106** that is in an open hole communicating to the surrounding formation.

[0014] Starting at the uphole end, the guide string **116** features internal seal bores **124** and **126** followed by a landing shoulder **128**. Below that is a sliding sleeve ported sub **130** shown in the open position in FIG. 1. Further downhole on the guide string **116** is a perforated sub or screen **132** and then another seal bore **134**.

[0015] On the concentric string **122** there is a no go **136** shown resting on shoulder **128** in FIG. 1. Further down is a seal section **138** that is shown in the seal bore **134** in FIG. 1. Below seal section **138** is a shifting tool **140** and a lower no go **142**.

[0016] Arrows **144** indicate how flow that got through the slotted liner **106** progresses through the perforated sub or screen **132** as indicated by arrow **146**, Once inside the perforated sub **132** flow is free to pass through the open ports **148** as indicated by arrows **150** and then into the ESP **100** as indicated by arrows **152**. In the FIG. 1 position the presence of seal section **138** in seal bore **134** closes off the lower end **121** of guide string **116**. This redirects flow into the perforated sub **132** and then through open ports **148** to reach the ESP **100**.

[0017] As stated before, the concentric string **122** is shiftable at the surface using hydraulic cylinders **154** that are connected to pistons **156** which are in turn connected to yoke **158** that supports the concentric string **122**. Concentric string **122** is sealed at **160** in wellhead **162**. Locally available hydraulic pressure can be applied and removed to attain the positions of FIGS. 3 and 4. The FIG. 3 position of the pistons **156** corresponds to the FIG. 1 position of the components further downhole. Similarly, the FIG. 4 position of the pistons **156** corresponds to the FIG. 2 position that will be described below. Again

surface equipment can actuate the pistons **156** between the down position of FIG. 3 and the up position of FIG. 4 in a known manner.

[0018] FIG. 2 is the isolation or shut off position that allows removal of the ESP **100** without killing the well. Moving up the concentric string **122** from the surface as described above raises the seal section **138** from seal bore **134** to seal bore **124**. No go **142** clears shoulder **128** and stops at seal bore **126** to position the seal section **138** properly in seal bore **124**. The upward passage of shifting tool **140** through sliding sleeve ported sub **130** shifts its internal sleeve **164** now visible in closed ports **148**. Accordingly, with seal section **138** in seal bore **124** the guide string **116** is blocked. With seals **120** and **110** being where they are there is no access from within the slotted liner **106** to the ESP **100**. The wellhead **162** can be removed after water or another fluid is added to the annulus **166** without killing the well that is now isolated as described above. Arrows **168** and dashed line **170** show that the ESP **100** is now safe to remove while the well **W'** is maintained warm by injection of steam from a nearby injector well. After the ESP **100** is repaired or replaced and lowered back into position and the wellhead **162** is replaced, the cylinders **154** can be activated to retract the pistons **156** to allow the components to reverse their movement to resume the FIG. 1 position for continued production without a warm up delay or with a far shorter delay than warming up a totally cold well.

[0019] Those skilled in the art will appreciate that the preferred embodiment of the present invention uses the strings normally in a producer well in a SAGD system and allows ESP removal without killing the well. More broadly the present invention is an isolation system in multi-string wells to allow a string and associated equipment to be removed without killing the well. While SAGD is an illustrated application other downhole multi-string well configurations can have the benefit of the present invention. While a sliding sleeve valve is illustrated and operated with a shifting tool other valve types are contemplated for example flappers and 90 degree ball valves to mention a few.

[0020] In SAGD service, the system keeps the basic components of a production string with an ESP at its lower end and a guide string for the concentric string. At the same time with some reconfiguration of the guide and the instrument strings the open

hole portion of the producer well can be selectively isolated to allow removal of the wellhead and the production string with the ESP without having to kill the well. This allows the producer well to be kept warm while the ESP is replaced and minimizes subsequent performance degradation in putting a killed well back on line. The warm up that would otherwise take months is also dramatically shortened saving the operator workover costs and allowing production to resume that much sooner. The illustrated assembly can also be used in an injection well with the flows reversed in direction and the ESP replaced with another downhole tool.

[0021] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

We claim:

1. A completion assembly for a wellbore, comprising

a first string extending at least part way into a wellbore;

at least one additional string extending further into the wellbore and supporting an isolation device that divides the wellbore into an upper zone where said first string is disposed without contact of said isolation device and a lower zone exposed to a formation, said additional string selectively allowing flow through said isolation device.

2. The assembly of claim 1, wherein:

said additional string extends through said isolation device and selectively allows flow through itself to bypass said isolation device and reach said first string.

3. The assembly of claim 2, wherein:

said additional string comprises at least one port on each of opposed sides of said isolation device and a closure for at least one port on one of said sides.

4. The assembly of claim 3, wherein:

said additional string comprises a nested inner and outer strings and said at least one port on opposed sides of said isolation device comprises spaced ported subs communicating to an annular space between said inner and outer strings.

5. The assembly of claim 4, wherein:

the port on at least one of said ported subs is selectively closed by relative movement between said inner and outer strings.

6. The assembly of claim 5, wherein:

said relative movement is longitudinal movement of said inner string.

7. The assembly of claim 6, wherein:

at least one of said ported subs comprises a sliding sleeve operated by a shifting tool on said inner string.

8. The assembly of claim 6, wherein:

said outer string comprises a lower seal bore below said ported sub in said lower zone and an upper seal bore above said ported sub in said upper zone;

said inner string comprises a seal assembly for selective positioning in said seal bores.

9. The assembly of claim 8, wherein:

said ports in said ported subs are open when said seal assembly is in said lower seal bore such that a flow path through said annular space extends through said isolation device to reach said first string.

10. The assembly of claim 9, wherein:

said outer string comprises a first landing shoulder for a first no go on said inner string to land on to position said seal assembly in said lower seal bore.

11. The assembly of claim 10, wherein:

at least one of said ported subs has its ports closed as said seal assembly is shifted from said lower to said upper seal bore.

12. The assembly of claim 11, wherein:

said outer string comprises a second landing shoulder for a second no go on said inner string to contact to position said seal assembly in said upper seal bore.

13. The assembly of claim 12, wherein:

at least one of said ported subs comprises a sliding sleeve operated by a shifting tool on said inner string.

14. The assembly of claim 13, wherein:

said first string comprises a production string with an electric submersible pump;

said inner string comprises a concentric string that can have instruments string extending through a guide string;

said isolation device comprises a skirt supporting a liner with openings wherein said liner is sealed to said skirt on one side and to a surrounding casing on an opposite side.

15. The assembly of claim 14, wherein:

longitudinal movement of said concentric string with respect to said guide string selectively isolates said upper and lower zones to allow pulling the electric submersible pump without killing the well in said lower zone.

16. The assembly of claim 1, wherein:

said first string comprises a production string with an electric submersible pump;

said additional string comprises a concentric string that can have instruments string extending through a guide string;

said isolation device comprises a skirt supporting a liner with openings wherein said liner is sealed to said skirt on one side and to a surrounding casing on an opposite side.

17. The assembly of claim 16, wherein:

longitudinal movement of said concentric string with respect to said guide string selectively isolates said upper and lower zones to allow pulling the electric submersible pump without killing the well in said lower zone.

18. The assembly of claim 17, wherein:

said guide string comprises at least one port on each of opposed sides of said isolation device and a closure for at least one port on one of said sides, said at least one port on opposed sides of said isolation device comprises spaced ported subs communicating to an annular space between said guide and said concentric strings.

19. The assembly of claim 18, wherein:

said guide string comprises a lower seal bore below said ported sub in said lower zone and an upper seal bore above said ported sub in said upper zone;

said concentric string comprises a seal assembly for selective positioning in said seal bores;

said ports in said ported subs are open when said seal assembly is in said lower seal bore such that a flow path through said annular space extends through said isolation device to reach said first string;

at least one of said ported subs has its ports closed as said seal assembly is shifted from said lower to said upper seal bore.

20. The assembly of claim 19, wherein:

said guide string comprises a first landing shoulder for a first no go on said concentric string to land on to position said seal assembly in said lower seal bore;

said guide string comprises a second landing shoulder for a second no go on said instrument string to contact to position said seal assembly in said upper seal bore.

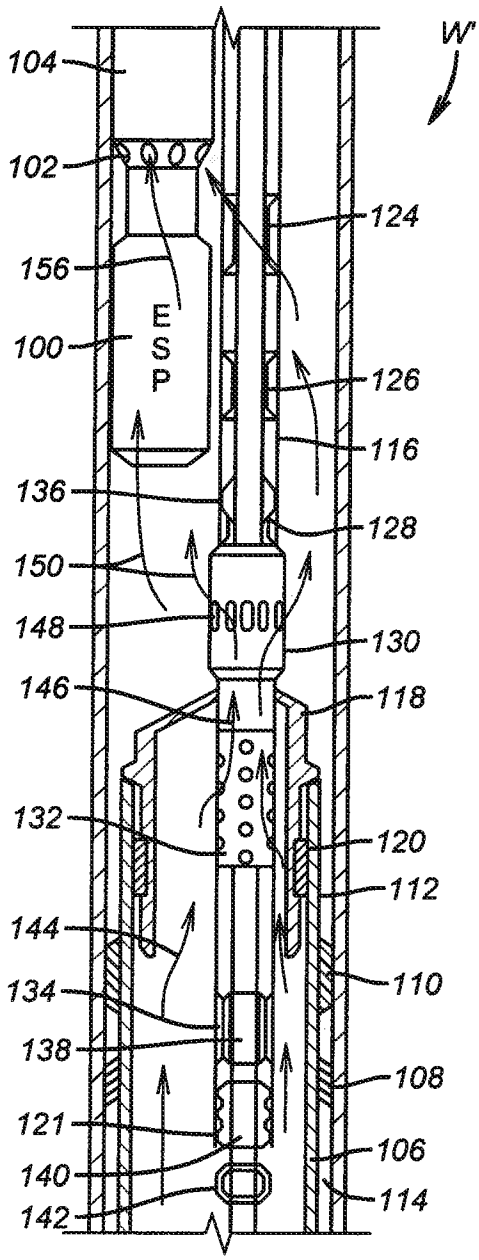

W'
104
102
156
100
E
S
P
124
126
116
136
128
150
148
130
146
118
132
120
112
144
110
134
138
108
121
106
140
114
142

FIG. 1

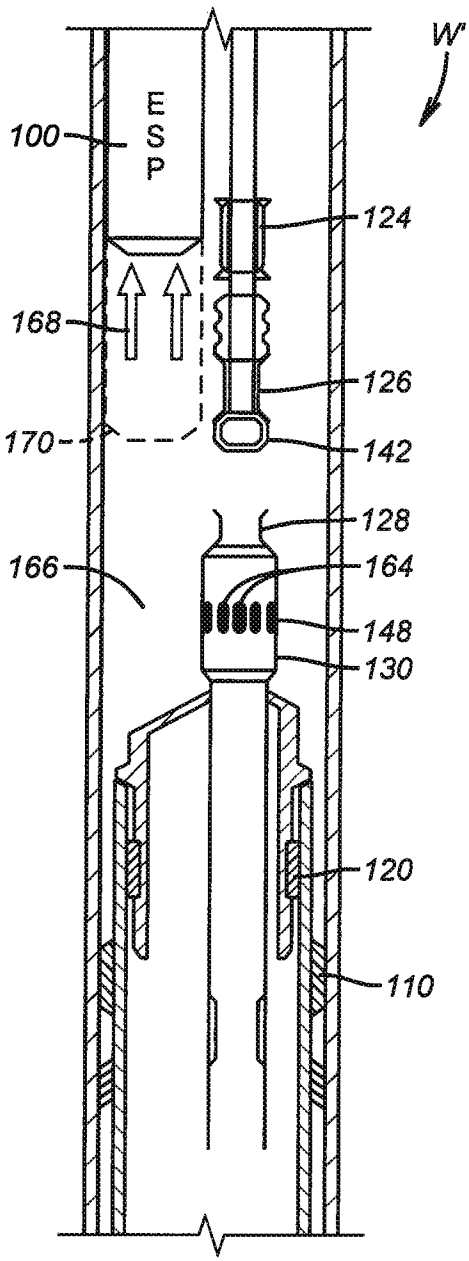

W'
100
E
S
P
124
168
126
170
142
128
166
164
148
130
120
110

FIG. 2

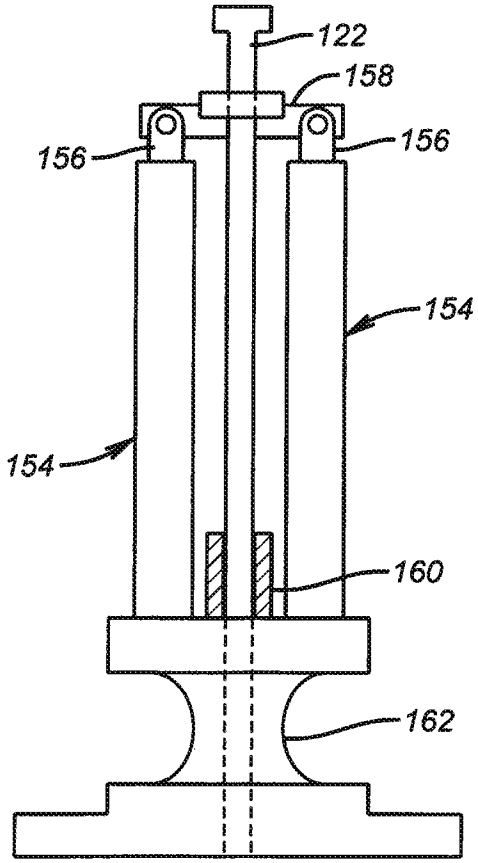


FIG. 3

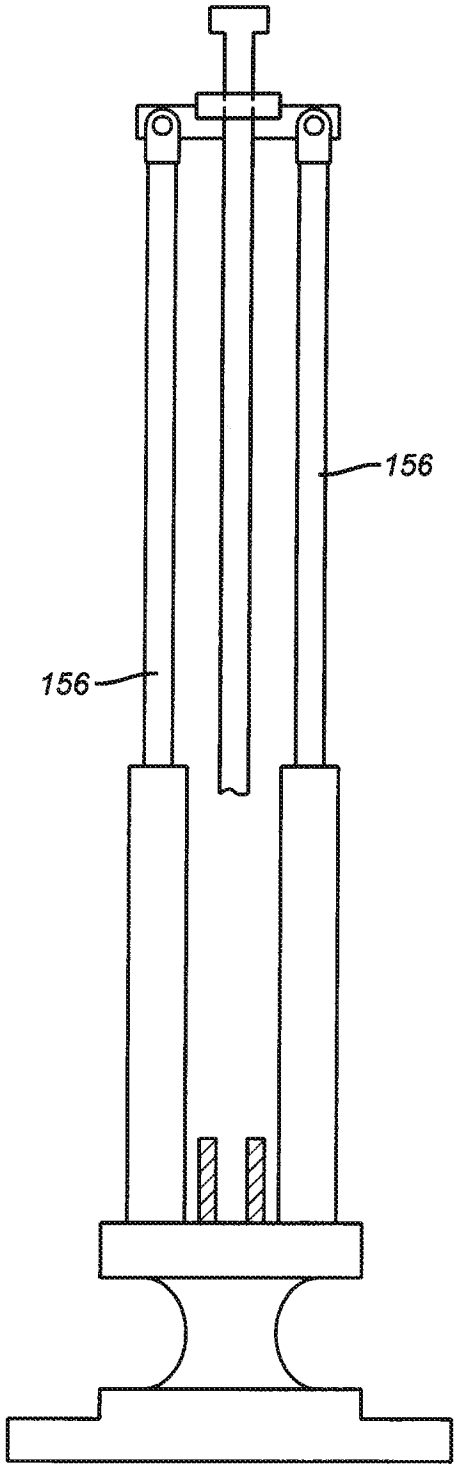
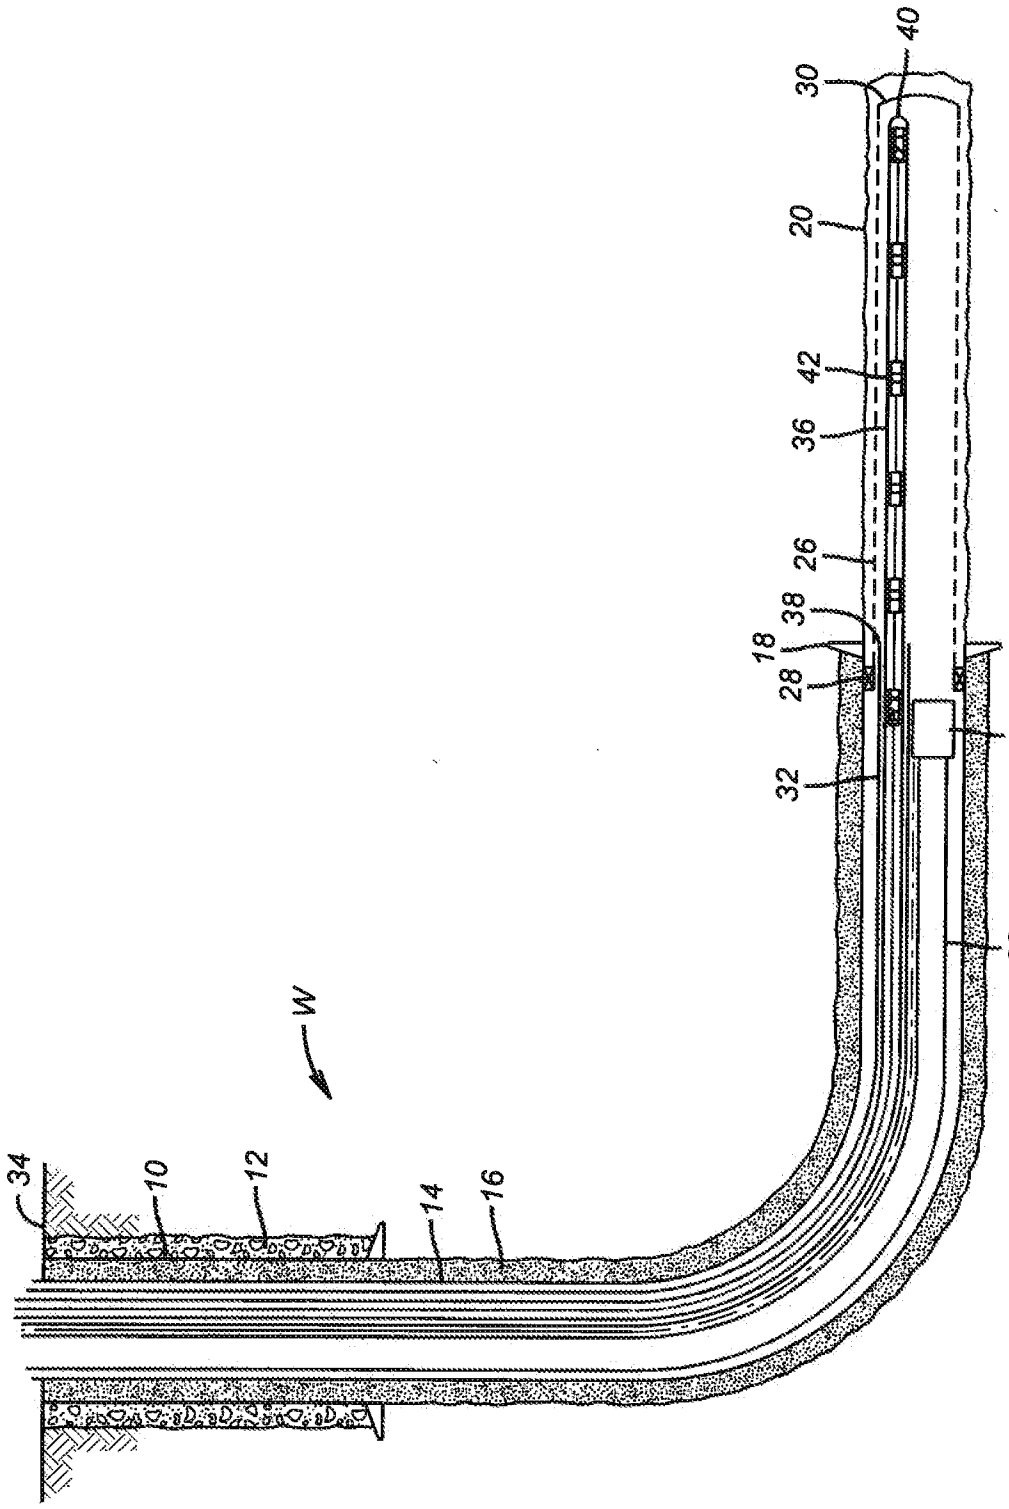


FIG. 4



(PRIOR ART)

FIG. 5