



EUROPEAN PATENT SPECIFICATION

Date of publication of patent specification :
21.06.95 Bulletin 95/25

Int. Cl.⁶ : **H01F 1/053, H01F 41/02**

Application number : **91311867.5**

Date of filing : **20.12.91**

Process for modifying magnetic materials and magnetic materials therefrom.

Priority : **21.12.90 IE 4644/90**
28.02.91 IE 671/91
18.09.91 IE 3281/91

Date of publication of application :
01.07.92 Bulletin 92/27

Publication of the grant of the patent :
21.06.95 Bulletin 95/25

Designated Contracting States :
AT BE CH DE DK ES FR GB GR IT LI LU MC NL
SE

References cited :
EP-A- 0 190 461
EP-A- 0 344 018
EP-A- 0 356 279
EP-A- 0 397 264
US-A- 4 753 675
PATENT ABSTRACTS OF JAPAN vol. 4, no.
109 (E-20)(591) 6 August 1980
IEEE Transactions on Magnetism 23(1987)Sep-
tember, No511, New York, pages 3098-3100

Proprietor : **THE PROVOST, FELLOWS AND**
SCHOLARS OF THE COLLEGE OF THE HOLY
AND UNDIVIDED TRINITY OF QUEEN
ELIZABETH NEAR DUBLIN
Dublin 2 (IE)

Inventor : **Coey, John Michael David**
Hillbrook House
Castleknock, County Dublin (IE)
Inventor : **Sun, Hong**
46, Whitworth Road
Dublin 9 (IE)
Inventor : **Hurley, David Patrick**
67, Kew Park
Lucan, County Dublin (IE)

Representative : **Baverstock, Michael George**
Douglas et al
BOULT, WADE & TENNANT
27 Fumival Street
London, EC4A 1PQ (GB)

EP 0 493 019 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The invention relates to a process for producing magnetic materials, to new and improved materials produced thereby and to the use of these materials to make permanent magnets.

Magnets have many applications in engineering and science as components of apparatus such as electric motors, electric generators, focussing elements, lifting mechanisms, locks, levitation devices, anti-friction mounts and so on. In order for a magnetic material to be useful for making a permanent magnet three intrinsic properties are of critical importance. These are the Curie temperature (T_c) i.e. the temperature at which a permanent magnet loses its magnetism, the spontaneous magnetic moment per unit volume (M_s) and the easy uniaxial anisotropy conventionally represented by an anisotropy field B_a . The Curie temperature is of particular significance because it dictates the temperature below which apparatus containing the magnet must be operated.

During this century much research has been directed to developing magnetic materials which combine high Curie temperatures and improved magnetic moments with strong uniaxial anisotropy. For many years magnetic materials of the AlNiCo type were used in permanent magnets for practical applications. In the late 1960's it was discovered that alloys of the rare earth elements, particularly samarium when alloyed with cobalt, had magnetic properties which made them superior as permanent magnets to the AlNiCo type. Compounds of samarium and cobalt provided magnets which were particularly successful in many demanding practical applications requiring a magnet with a high energy product. However the high cost of cobalt as a raw material led investigators in the early 1980's to consider the possibility of combining the cheaper and more abundant iron with the magnetically superior rare earth elements to produce permanent magnets with improved magnetic properties. A major breakthrough came in 1983 when the Sumitomo Special Metals Company and General Motors of America independently developed a magnetic material which combined a rare earth element and iron and incorporated a third element, boron, into the crystal lattice to give an intermetallic compound, $Nd_2Fe_{14}B$ which can be used to produce magnets with an excellent energy product, but a lower Curie temperature than the Sm-Co materials. These Nd-Fe-B magnetic materials can have a Curie temperature of up to 320°C and are particularly described in three European applications, EP-A-0101552, EP-A-0106948 and EP-A-0108474. Derivatives of these boride materials represent the state of the art to date in magnet technology. However they are somewhat unstable in air and change chemically, gradually losing their magnetic properties so that despite Curie temperatures in excess of 300°C in practice they are not suitable for operating at temperatures greater than 150°C.

The fact that the incorporation of boron into the crystal lattice of intermetallic materials containing a rare earth element and iron serves to improve magnetic properties has encouraged investigators to search for new compounds of elements other than boron in combination with rare earth elements and iron.

In EP-A-344081 permanent magnet materials are described including a rare earth element and iron in which an additive of Si, Ti, Mo, B, W, V, Cr, Mn, Al, Nb, Ni, Sn, Ta, Zr and/or Hf is substituted in a melting and casting process which produces materials having two finely segregated phases. The materials are said to exhibit improved magnetic properties.

In EP-A-0320064 hard magnetic materials are described containing neodymium and iron but having carbon incorporated to give compounds of the formula $Nd_2Fe_{14}C$ having a similar crystal structure to the known boride materials. In EP-A-0334445 variations of the above type of material having carbon incorporated are described in which neodymium is replaced with praseodymium, cerium or lanthanum and the iron is partly substituted with manganese. Finally EP-A-0397264 describes compounds of the formula $RE_2Fe_{17}C$ where RE is a combination of rare earth elements of which at least 70% must be samarium. The preferred compound described in the last of the above three patent applications, which has carbon interstitially incorporated into a Sm_2Fe_{17} crystal lattice, demonstrates improved Curie temperatures and uniaxial magnetic anisotropy. However it is produced by melting of the constituent elements to obtain a casting which is then subjected to an annealing treatment at very high temperatures (900-1100°C) in an inert gas. Using such a process puts a limitation on the amount of additional elements which can be interstitially incorporated and the Curie temperatures which can be obtained.

A process for bringing about interstitial incorporation of an element of group VA of the Periodic Table into intermetallic compounds containing one or more rare earth elements and iron has already been developed by the present inventors and is described in the Applicants' co-pending European Patent Application No 91303442.7 which process comprises heating the intermetallic starting material in a gas containing the group VA element in the substantial absence of oxygen.

Further the heating of compounds comprising a rare earth element and iron in a gas has previously been described by others but there is no teaching that an interstitial incorporation of another element was achieved. For example EP-A-0356279 describes the improvement in magnetic properties of a thin strip of the material

described above which is suitable for magnetographic printing, by heating the strip in a flux of oxygen at temperatures between 200 and 350°C. However the effect of the oxygen is simply to form a rare earth oxide on the surface of the strip.

In 1987 Higano et al (IEEE Transactions on Magnetics, Vol. Mag 23 No 5) reported an attempt to carry out a nitriding reaction by exposure of powders of $\text{Sm}_2\text{Fe}_{17}$ alloy to gaseous nitrogen at temperatures of 500 to 1100°C. However it was found that the nitriding process simply decomposed the rare-earth/iron alloy starting material to produce iron and nitrides of the rare earth elements. There was no apparent evidence of the interstitially modified compound which had been intended.


A process has now been developed which permits interstitial incorporation of elements of groups IIIA, IVA and VIA of the Periodic Table into the rare-earth/iron type compounds to produce novel materials having improved magnetic properties with regard to Curie temperatures (T_c), spontaneous magnetic moment per unit volume (M_s) and easy uniaxial anisotropy (B_a). Such materials are suitable for further processing to make permanent magnets with a large energy product exceeding 80kJ/m³.

A process for interstitially modifying an intermetallic compound to improve the magnetic properties thereof comprises heating an intermetallic compound comprising at least iron, or a combination of iron with at least one transition metal, and at least one rare earth element in a reaction gas containing at least one element of groups IIIA, IVA or VIA of the periodic table to a temperature of from 400 to 650°C at a pressure of from 0.01 to 1000 bar.

It is to be understood that herein the term rare earth element also includes the elements yttrium, thorium, hafnium and zirconium and that groups IIIA, IVA and VIA of the Periodic Table are those defined by the CAS version of that table, i.e. Group IIIA, B, Al, Ga, In, Tl; Group IVA, C, Si, Ge, Sn, Pb; Group VIA 0, S, Se, Te, Po.

The intermetallic compounds which may be modified by the process of the invention include those of the ThMn_{12} type with a tetragonal crystal structure and those of the $\text{Th}_2\text{Ni}_{17}$ or $\text{Th}_2\text{Zn}_{17}$ type having hexagonal or rhombohedral crystal structures respectively. Those of the crystal structure type BaCd_{11} and CaCu_5 may also be modified by the process.

In one embodiment of the invention the intermetallic starting materials heated in a reaction gas in accordance with the process of the invention may be tetragonal compounds of the general formula:




in which R is at least one rare earth element as herein defined, T is iron or a combination of iron with one or more transition metals, M is an element of Groups IVB, VB or VIB of the Periodic Table, n is approximately 12 and $0.5 < x < 3.0$.

Preferred components for R are yttrium, cerium, praseodymium, neodymium, samarium, gadolinium, terbium, dysprosium, holmium, erbium, thulium or lutetium or a mixture of two or more thereof. Particularly preferred compounds are those where R is praseodymium or neodymium such as for example $\text{PrFe}_{11}\text{Ti}$ or $\text{NdFe}_{11}\text{Ti}$ or compounds where praseodymium or neodymium are combined with another rare earth element. For example in a compound such as $\text{NdFe}_{11}\text{Ti}$ some of the neodymium can be substituted with cerium to reduce cost or substituted with a heavy rare earth such as terbium or dysprosium to improve uniaxial anisotropy.

In compounds of the formula $\text{R}(\text{T}_{n-x}\text{M}_x)$ described above the iron may be in combination with a transition metal such as cobalt, nickel or manganese. In particular the iron may be substituted with up to 45% cobalt.

M is an early transition metal in groups IVB, VB and VIB of the Periodic Table and acts as a stabilizing element. Particularly preferred stabilizing elements are titanium, vanadium, molybdenum, tungsten or chromium.

In another embodiment of the invention the intermetallic starting material which is heated in a reaction gas in accordance with the process of the invention may be a hexagonal or rhombohedral compound of the general formula:



in which R' is at least one rare earth element, T' is iron, M' is one or more transition metals, n is approximately 17 and $0 < x' \leq 6.0$.

Preferred components for R' for these hexagonal or rhombohedral starting materials are yttrium, cerium, praseodymium, neodymium, samarium, gadolinium, terbium, dysprosium, holmium, erbium, thulium or lutetium or a mixture of two or more thereof and particularly preferred are those compounds where R is samarium such as for example $\text{Sm}_2\text{Fe}_{17}$ or where R is samarium partially substituted with neodymium, praseodymium or cerium.

Further, a transition metal M' may substitute for the iron such as cobalt, nickel or manganese.

In yet another embodiment of the invention the intermetallic starting materials may be of the tetragonal crystal structure type BaCd_{11} for example $\text{RFe}_5\text{Co}_4\text{M}''$ where M'' is a stabilizing element such as silicon or of the crystal structure type CaCu_5 , for example $\text{RCO}_3\text{FeM}'''$ where M''' is a stabilizing element such as boron.


The preferred group IIIA, IVA or VIA elements which may be interstitially incorporated into the crystal lattice

of the intermetallic compounds of tetragonal, rhombohedral or hexagonal crystal structure described above are boron in Group IIIA, one or more of carbon, silicon and germanium in Group IVA or one or more of sulphur, selenium and tellurium in Group VIA.

Optionally the interstitially incorporated element may be combined with hydrogen.


5 The elements of Groups IIIA, IVA or VIA which are interstitially incorporated, whether or not in combination with hydrogen, will hereinafter be designated Z.

Thus in accordance with another aspect of the invention there are provided novel magnetic materials of the general formula:



10 wherein R, T, x, M and Z are as herein defined and $0.1 < y \leq 1.0$.

The invention also provides compounds of the general formula:



wherein R', T', M', Z and x' are as herein defined and $0.5 < y' < 3.0$, particularly those where $y' > 1.5$. In the novel compounds of the invention R' is samarium, Z is interstitially incorporated carbon and $2.0 < y < 3.0$. Such compounds have Curie temperatures in the region of 668K.

15 The invention further provides compounds of the formula $RTCo_{n-x}M''_xZ_y$, where R, T, Z and M'' are as hereinbefore defined, n is 11, $1 < x < 3$ and $0 < y < 1$ and also compounds of the formula $RCO_3FeM'''Z$ where R and Z are as hereinbefore defined and M''' is a stabilizing element such as boron.

20 The precise formula of the novel materials will depend upon the starting materials, which of course may have all the variations already discussed herein, and the element or elements of Group IIIA, IVA or VIA of the Periodic Table which are present in the reaction gas.

For example, if the element Z is to be carbon then the reaction gas may be a hydrocarbon such as methane, any C_2 to C_5 alkane, alkene or alkyne or an aromatic hydrocarbon such as benzene. If the element Z is to be boron the reaction gas may be a boron containing gas such as borane, diborane or decaborane vapour. If the element Z is silicon then the reaction gas may be a silane and if the element Z is sulphur the reaction gas may be hydrogen sulphide. The reaction gas may be mixed with an inert carrier gas such as helium or argon.

Particularly preferred magnetic materials produced by the process of the invention are those where the interstitially incorporated element is carbon such as, for example $Sm_2Fe_{17}C_y$, where $y > 2.0$ and more preferably $y = 2.5$ or $NdFe_{11}TiC_y$ and $PrFe_{11}TiC_y$ where $0.5 < y \leq 1.0$, preferably $0.6 < y < 0.9$ and more preferably $y = 0.8$.

30 Other preferred magnetic materials are those where the interstitially incorporated element is boron such as $Sm_2Fe_{17}By$, where $y' > 1.5$.

To carry out the process of the invention an ingot of the rare earth/iron intermetallic starting material is preferably crushed to a fine powder having a particle size of less than 50 microns diameter. Such a powder may be optionally prepared by mechanical alloying. The powder is then placed in a suitable reactor vessel which is evacuated and filled with the reaction gas at a pressure of from 0.01 to 1000 bar. Typically the pressure is from 0.1 to 10 bar. The powder is then heated in the vessel in the presence of the gas to a temperature in the range 400 to 650°C, and preferably about 500°C for a period sufficient to permit diffusion of the element to be incorporated into the interstitial sites throughout each grain of powder. The heating time may be anything up to 100 hours but a suitable period can be readily determined from the diffusion constants of the interstitial atoms in the intermetallic compound. A typical heating period is from 2 to 10 hours.

40 Except in the case where the interstitial element to be incorporated is oxygen it is preferable if the starting materials are heated in the reaction gas in the substantial absence of oxygen.

Following heating the reactor vessel is evacuated to remove excess reaction gas before cooling or alternatively it may be purged with an inert gas. The cooled product can then be processed to form permanent magnets. In the case of Sm_2Fe_{17} ingots, for example, it has been found advantageous to include in the cast ingot up to 5% by weight of an early transition metal additive. Suitable additives include niobium, zirconium or titanium. The additive suppresses the formation of alpha-Fe dendrites which occur because the phase does not melt congruently. Without the additive the α -Fe phase, which tends to destroy coercivity in the interstitially modified material, may be removed by lengthy high temperature annealing at about 1000°C.

50 It is an advantage of the novel process of the invention that interstitial incorporation of an element such as carbon, for example into an intermetallic rare earth/iron compound can be brought about at a much lower temperature than the arc melting method used in EP-A-0397264. Further the gas phase process of the invention allows a higher level of interstitial incorporation to be achieved compared with the arc melting method. As a result the uniaxial anisotropy is much greater and the Curie temperatures significantly higher than materials produced by hitherto known methods.

55 By way of example Table I compares the properties of compounds of the formula $Sm_2Fe_{17}C_y$ made by the process described in EP-A-0397264 with compounds of that formula made by the process of the present invention.

TABLE I
EP-A-0397264

Process of
present invention

5

Compound	$\text{Sm}_2\text{Fe}_{17}\text{C}_y$	$\text{Sm}_2\text{Fe}_{17}\text{C}_y$
Range made	$0.5 < y' < 1.5$	$0.5 < y' < 2.8$
Tc (maximum)	540K	673K
Ba (maximum)	4.0-5.3T	16T
Process	Arc melting of elements	Heating in hydrocarbon gas

10

15

From the above table the improvement in magnetic properties of the compounds produced by the process of the invention is readily apparent.

20

The effect of interstitial incorporation of carbon into compounds of the formula R_2Fe_{17} on the crystal lattice parameters $a(\text{nm})$ $c(\text{nm})$, Curie temperature $T_c(\text{K})$, anisotropy and magnetic moment $M(\mu_B/\text{f.u.})$ is shown in Table II below. h represents compounds of the hexagonal crystal structure and r compounds of the rhombohedral crystal structure. The composition of the carbides is $\text{R}_2\text{Fe}_{17}\text{C}_{y'}$ where y' is between 2.1 and 2.8.

25

TABLE II

30

35

40

45

50

R	Structure	$a(\text{nm})$	$c(\text{nm})$	$T_c(\text{K})$	Anisotropy	$M(\mu_B/\text{f.u.})$
Y	h	0.866	0.840	668	plane	35.8
Ce	r	0.873	1.256	589	plane	33.8
Pr	r	0.880	1.259	653	plane	34.5
Nd	r	0.879	1.260	659	plane	35.1
Sm	r	0.875	1.257	668	axis	34.5
Gd	r	0.870	1.261	711	plane	20.1
Tb	r	0.867	1.264	680	plane	21.3
Dy	h	0.865	0.842	674	plane	17.1
Ho	h	0.861	0.843	672	plane	17.5
Er	h	0.860	0.841	663	$T_{sr} = 124 \text{ K}$	17.9
Tm	h	0.860	0.843	656	$T_{sr} = 226 \text{ K}$	21.2
Lu	h	0.857	0.842	657	plane	36.4

The effect on magnetic properties and crystal lattice parameters of interstitial incorporation of carbon into compounds of the formula RFe_{11}Ti is shown in Table III below. In the table the value of y is between 0.6 and 0.9. In preferred compounds the value of y is 0.8.

55

TABLE III

	a(nm)	c(nm)	V(nm ²)	$\Delta V/V$ (%)	T _c (K)	$\Delta T_c/T_c$ (%)	M _s (μB/f.u.)	4.2 K	273 K	Anisotropy at 300 K
Y(Fe ₁₁ Ti)	0.851	0.479	0.347	-	524	-	19.0	16.6	axis	
Y(Fe ₁₁ Ti)C _y	0.857	0.481	0.353	1.7	678	29.4	19.4	14.8	axis	
Nd(Fe ₁₁ Ti)	0.857	0.478	0.351	-	547	-	?	16.8	axis	
Nd(Fe ₁₁ Ti)C _y	0.862	0.482	0.358	2.0	670	22.5	18.9	19.2	axis	
Sm(Fe ₁₁ Ti)	0.855	0.479	0.350	-	584	-	?	17.1	axis	
Sm(Fe ₁₁ Ti)C _y	0.858	0.480	0.353	0.9	698	19.5	16.9	?	plane	
Gd(Fe ₁₁ Ti)	0.854	0.480	0.350	-	607	-	?	12.5	axis	
Gd(Fe ₁₁ Ti)C _y	0.856	0.480	0.352	0.6	734	20.9	14.4	11.9	axis	
Tb(Fe ₁₁ Ti)	0.851	0.479	0.347	-	552	-	9.7	10.6	axis	
Tb(Fe ₁₁ Ti)C _y	0.857	0.481	0.353	1.7	714	29.3	10.9	11.3	axis	

TABLE III (continued)

	a(nm)	c(nm)	V(nm ³)	$\Delta V/V$ (%)	T _c (K)	$\Delta T_c/T_c$ (%)	M _s (μB/f.u.) 4.2 K	273 K	Anisotropy at 300 K
Dy(Fe ₁₁ Ti)	0.849	0.478	0.344	-	534	-	9.7	11.6	axis
Dy(Fe ₁₁ Ti)C _y	0.857	0.479	0.352	2.3	697	30.5	8.7	9.5	axis
Ho(Fe ₁₁ Ti)	0.849	0.479	0.345	-	520	-	?	?	axis
Ho(Fe ₁₁ Ti)C _y	0.855	0.479	0.350	1.4	691	32.9	8.0	8.9	axis
Er(Fe ₁₁ Ti)	0.848	0.479	0.344	-	505	-	9.2	12.4	axis
Er(Fe ₁₁ Ti)C _y	0.856	0.479	0.351	2.0	685	35.6	10.7	12.6	axis
Tm(Fe ₁₁ Ti)	0.847	0.478	0.343	-	496	-	?	?	axis
Tm(Fe ₁₁ Ti)C _y	0.855	0.478	0.349	1.7	686	38.3	15.5	17.9	axis
Lu(Fe ₁₁ Ti)	0.846	0.478	0.342	-	488	-	17.4	15.5	axis
Lu(Fe ₁₁ Ti)C _y	0.855	0.478	0.349	2.0	682	39.7	16.8	16.0	axis

The effect on magnetic properties of interstitial incorporation of boron into Sm₂Fe₁₇ and of carbon into Nd(Fe₁₁Ti) are shown in Table IV below.

TABLE IV

5		$T_C(^{\circ}\text{C})$	$\mu_0 M_S(\text{T})$	$B_a(\text{T})$
	$\text{Sm}_2\text{Fe}_{17}$	116	1.17	easy plane
	$\text{Sm}_2\text{Fe}_{17}\text{C}_{2.2}$	395	1.46	14T
10	$\text{Sm}_2\text{Fe}_{17}\text{B}_{1.6}$	325	1.4	>5T
	$\text{Nd}(\text{Fe}_{11}\text{Ti})$	274	1.28	1T
	$\text{Nd}(\text{Fe}_{11}\text{Ti})\text{C}_{0.7}$	397	1.32	7T

The interstitial incorporation of an element of Group IVA of the Periodic Table, for which the example is carbon, into selected intermetallic compounds of the formula R_2Fe_{17} or RFe_{11}Ti and the altered properties achieved thereby are further demonstrated in the figures in which:-

Figure 1(a) shows the rhombohedral crystal structure of $\text{Sm}_2\text{Fe}_{17}\text{C}_y$ where the 9e site is occupied by carbon and Figure 1(b) shows the tetragonal crystal structure of $\text{Nd}(\text{Fe}_{11}\text{Ti})\text{C}_y$ showing the 2b site occupied by carbon;

Figure 2 shows X-ray diffraction patterns of $\text{Sm}_2\text{Fe}_{17}$ powder (a) before (b) after treatment in methane for 2 hours at 550°C and (c) after treatment and orientation in a magnetic field of 0.3T. In Figure 2(b) a lattice expansion of about 6% is apparent after interstitial corporation of carbon and in Figure 2(c) easy c-axis anisotropy is shown after orientation;

Figure 3 shows the difference in unit cell volume between compounds having the formula $\text{R}_2\text{Fe}_{17}\text{C}_y$ where $1.5 < y' < 3.0$ and those having the formula R_2Fe_{17} where R is Ce, Pr, Nd, Sm, Gd, Tb, Dy, Ho, Er, Tm or Lu. A substantial increase in unit cell volume is observed for those compounds having the formula $\text{R}_2\text{Fe}_{17}\text{C}_y$; Figure 4 shows the Curie temperature of compounds of the formula $\text{R}_2\text{Fe}_{17}\text{C}_y$ where $1.5 < y' < 3.0$ and R_2Fe_{17} where R is Ce, Pr, Nd, Sm, Cd, Tb, Dy, Ho, Er, Tm or Lu. A substantial increase in Curie temperature is observed for those compounds having the formula $\text{R}_2\text{Fe}_{17}\text{C}_y$;

Figure 5 shows magnetization curves at room temperature of powder of $\text{Sm}_2\text{Fe}_{17}\text{C}_y$ where $1.5 < y' < 3.0$ magnetically aligned in an applied field of 1T and fixed in epoxy resin. The anisotropy field deduced from the data shown in Figure 5 is 16T;

Figure 6 shows X-ray diffraction patterns of $\text{Sm}_2\text{Fe}_{17}$ before treatment (solid line) and after treatment (broken line) at 475°C for 2 hours in benzene vapour showing a lattice expansion of 5.5%;

Figure 7 shows the difference in cell unit volume between compounds having the formula $\text{R}(\text{Fe}_{11}\text{Ti})$ and compounds having the formula $\text{R}(\text{Fe}_{11}\text{Ti})\text{C}_y$ where y is $0.6 < y < 0.9$ and where R is Ce, Dr, Nd, Sm, Gd, Tb, Dy, Ho, Er, Tm or Lu. A substantial increase in unit cell volume is observed where carbon has been interstitially incorporated by heating in butane;

Figure 8 shows the Curie temperatures of compounds of the formula $\text{R}(\text{F}_{11}\text{Ti})$ and $\text{R}(\text{Fe}_{11}\text{Ti})\text{C}_y$ where $0.6 < y < 0.9$ prepared by the process of the invention and where R is Ce, Pr, Nd, Sm, Gd, Tb, Dy, Ho, Er, Tm or Lu. Again a substantial increase in Curie temperature is observed where carbon has been interstitially incorporated;

Figure 9 shows the X-ray diffraction pattern of an arc-melted and unannealed $\text{Sm}_2\text{Fe}_{17}$ ingot containing 5% weight Nb, showing a substantial absence of free iron. The solid line is the trace of the $\text{Sm}_2\text{Fe}_{17}$ ingot with additive and the broken lines indicate where the α -Fe peak would appear in an ingot without additive; Figure 10 shows the variation of anisotropy field as a function of neodymium content for the series of compounds $(\text{Y}_{1-z}\text{Nd}_z)(\text{Fe}_{11}\text{Ti})\text{C}_{0.8}$.

It will be readily apparant from the data presented herein that the process of the invention has substantial advantages over hitherto known processes for bringing about interstitial incorporation of another element into intermetallic magnetic compounds of the rare-earth/iron type and that the materials produced thereby have improved magnetic properties. Specifically the increase in Curie temperature, the uniaxial anisotropy and increase in spontaneous magnetization make the compounds of the invention very well suited for the manufacture of permanent magnets. The high Curie temperatures of these materials means that magnets made from them can be used in apparatus or processes requiring high temperature conditions and the magnetization of the magnet will not be lost.

Magnets may be formed from the materials of the invention by orienting the interstitially modified inter-

metallic compound in powder form in a magnetic field with a polymer resin to make a polymer-bonded magnet. More specifically the powder of the interstitially-modified intermetallic compound may optionally be milled to a finer powder, with particle size of 10 μm or less and then mixed with a polymeric material (e.g. a thermosetting resin or an epoxy resin) and optionally oriented in a magnetic field sufficient to align the easy axes of the grains of powder. The resin is then set and the composite is subject to a large magnetizing field sufficient to saturate the remanent magnetization.

In a modification of this process, the composite may be formed into a desired shape by compression or injection moulding, prior to applying the magnetizing field.


An alternative is to make the composite with a metal matrix rather than a polymer matrix. In this case, a low-melting point metal, such as Zn, Sn or Al, or a low-melting alloy, such a solder may be used. The metal is mixed with the milled intermetallic powder, which may be oriented in a magnetic field prior to heat treatment at a temperature sufficient to melt the metal and form a metal-metal composite. The preferred metal is zinc, which reacts with any free αFe to form a nonmagnetic Fe-Zn alloy, thereby enhancing the coercivity of the magnet.

A further way in which magnets can be formed from the materials is to forge with a soft metal under a stress which tends to mechanically orient the crystallites of the material. In particular a shear stress is applied to the intermetallic powder, which is optionally mixed with a soft metal such as Al. The shear stress aligns the c-axes of the intermetallic crystallites and thereby increases the remanent magnetization of the magnet.

Claims


1. A process for interstitially modifying an intermetallic compound to improve the magnetic properties thereof comprising heating an intermetallic compound comprising at least iron, or a combination of iron with at least one transition metal, and at least one rare earth element in a reaction gas containing at least one element of groups IIIA, IVA or VIA of the periodic table to a temperature of from 400 to 650°C at a pressure of from 0.01 to 1000 bar.

2. A process as claimed in claim 1 wherein the intermetallic compound has the general formula:



wherein R is at least one rare earth element, T is iron or a combination of iron with one or more transition metals, M is an element of groups IVB, VB or VIB of the Periodic Table, n is approximately 12 and $0.5 < x < 3.0$.

3. A process as claimed in claim 1 wherein the intermetallic compound has the general formula:



in which R' is at least one rare earth element, T' is iron, M' is one or more transition metals, n is approximately 17 and $0 < x' < 6.0$.

4. A process as claimed in claim 2 or claim 3 wherein R is yttrium, cerium, praseodymium, neodymium, samarium, gadolinium, terbium, dysprosium, holmium, erbium, thulium or lutetium or a mixture of two or more thereof.

5. A process as claimed in claim 2 or 4 wherein R is neodymium or praseodymium or a combination of neodymium or praseodymium with one or more other rare earth elements.

6. A process as claimed in claim 3 or 4 wherein R' is samarium or samarium in combination with one or more other rare earth elements.

7. A process as claimed in claim 2, 4 or 5 wherein the iron is in combination with one or more of cobalt, nickel or manganese.

8. A process as claimed in any one of claims 2, 4, 5 or 7 wherein M is titanium, vanadium, molybdenum, tungsten or chromium.

9. A process as claimed in any one of claims 3, 4 or 6 wherein M' is cobalt, nickel or manganese or a combination of two or more thereof.


10. A process as claimed in any preceding claim wherein the element of group IIIA, IVA or VIA which is inter-

stitially incorporated into the intermetallic compound is boron, carbon, silicon, germanium, sulphur, selenium or tellurium or a combination of two or more thereof.

- 5 11. A process as claimed in any one of claims 1 to 9 wherein, except in the case where the element to be interstitially incorporated is oxygen, the intermetallic starting material is heated in the reaction gas in the substantial absence of oxygen.
12. A process as claimed in claim 10 or 11 wherein the element of group IVA which is interstitially incorporated is carbon and the reaction gas is a hydrocarbon.
- 10 13. A process as claimed in claim 12 wherein the reaction gas is methane, a C₂ to C₅ alkane, alkene or alkyne or an aromatic hydrocarbon.
14. A process as claimed in claim 12 or 13 wherein the interstitially modified compound produced has the formula:
15
$$\text{Sm}_2\text{Fe}_{17}\text{C}_y'$$
 wherein 0.5 < y < 3.0.
15. A process as claimed in claim 12 or 13 wherein the interstitially modified compound produced has the formula:
20
$$\text{PrFe}_{11}\text{TiC}_y \text{ or } \text{NdFe}_{11}\text{TiC}_y$$
 wherein 0.5 < y ≤ 1.0.
16. A process as claimed in claims 10 or 11 wherein the element of group IIIA which is interstitially incorporated is boron and the reaction gas is borane or decaborane.
- 25 17. A process as claimed in claim 16 wherein an interstitially modified compound produced has the formula:
$$\text{Sm}_2\text{Fe}_{17}\text{By}' \text{ wherein } 0.5 < y' < 3.0.$$
18. A process as claimed in claims 10 or 11 wherein the element of group IVA which is interstitially incorporated is silicon and the reaction gas is a silane.
- 30 19. A process as claimed in claims 10 or 11 wherein the element of group VIA which is interstitially incorporated is sulphur and the reaction gas is hydrogen sulphide.
20. A process as claimed in any preceding claim wherein the intermetallic compound is ground to a powder having a particle size of less than 50 microns diameter prior to heating in the reaction gas.
- 35 21. A process as claimed in any preceding claim wherein the intermetallic compound has included as an additive up to 5% by weight of an element of groups IVB, VB and VIB of the Periodic Table.
- 40 22. A process as claimed in claim 21 wherein the additive is niobium, zirconium or titanium.
23. A method for making a permanent magnet in which a powder of the interstitially modified material produced by the process of any one of claims 1 to 22 is magnetically or mechanically aligned and formed into a magnet.
- 45 24. A method as claimed in claim 23 wherein a permanent magnet is formed by
(a) orienting the interstitially modified intermetallic compound in powder form in a magnetic field with a polymer resin to make a polymer-bonded magnet or
(b) orienting the interstitially modified intermetallic compound in powder form in a magnetic field, mixing with a low melting point metal or alloy and heating to form a metal-bonded magnet or
50 (c) forging the interstitially modified intermetallic compound in powder form with a soft metal under stress which magnetically orients the material to form a metal-bonded magnet.
25. A magnetic material of the general formula:
55
$$\text{R}(\text{T}_{n-x}\text{M}_x)\text{Z}_y$$
 wherein R is at least one rare earth element, T is iron or a combination of iron with one or more transition metals, M is an element of groups IVB, VB or VIB of the Periodic table, Z is one or more elements of groups IIIA, IVA or VIA of the Periodic Table, n is approximately 12 and 0.5 < x < 3.0 and 0.1 < y ≤ 1.0, characterized

in that Z is interstitially incorporated into the crystal lattice of said material.

26. A magnetic material of the general formula:



5 wherein R' is samarium, T' is iron, M' is one or more transition metals, Z is carbon which is interstitially incorporated into the crystal lattice of said material, n is approximately 17 and $0 \leq x' < 6.0$ characterised in that $2.0 < y < 3.0$ and in that said magnetic material has a Curie temperature in the region of 668K.

27. The use of a magnetic material as claimed in claim 25 or claim 26 for making permanent magnets.


10 28. The use of the product of the process of any one of claims 1 to 22 for making permanent magnets.

29. A permanent magnet made from the product of the process of any one of claims 1 to 22.

15 Patentansprüche


1. Verfahren zur interstitiellen Modifizierung einer intermetallischen Verbindung um die magnetischen Eigenschaften davon zu verbessern, umfassend das Erhitzen einer intermetallischen Verbindung umfassend mindestens Eisen oder eine Kombination von Eisen mit mindestens einem Übergangsmetall, und
20 mindestens ein Seltenerdelement in einem Reaktionsgas, das mindestens ein Element der Gruppen IIIA, IVA oder VIA des Periodensystems enthält, auf eine Temperatur von 400 bis 650°C bei einem Druck von 0,01 bis 1000 bar.

2. Verfahren nach Anspruch 1 wobei die intermetallische Verbindung die allgemeine Formel:



25 aufweist, wobei R mindestens ein Seltenerdelement ist, T Eisen oder eine Kombination von Eisen mit mindestens einem oder mehreren Übergangsmetallen ist, M ein Element der Gruppen IVB, VB oder VIB des Periodensystems ist, n annähernd 12 und $0,5 < x < 3,0$ ist.

30 3. Verfahren nach Anspruch 1 wobei die intermetallische Verbindung die allgemeine Formel:



aufweist, wobei R' mindestens ein Seltenerdelement ist, T' Eisen ist, M' ein oder mehrere Übergangsmetalle ist, n' annähernd 17 und $0 < x' < 6,0$ ist.

35 4. Verfahren nach Anspruch 2 oder 3, wobei R Yttrium, Cer, Praseodym, Neodym, Samarium, Gadolinium, Terbium, Dysprosium, Holmium, Erbium, Thulium oder Lutetium oder ein Gemisch von zweien oder mehreren davon ist.

5. Verfahren nach Anspruch 2 oder 4, wobei R Neodym oder Praseodym oder eine Kombination von Neodym oder Praseodym mit einem oder mehreren Seltenerdelementen ist.
40

6. Verfahren nach Anspruch 3 oder 4, wobei R' Samarium oder Samarium in Kombination mit einem oder mehreren Seltenerdelementen ist.

45 7. Verfahren nach Anspruch 2, 4 oder 5, wobei das Eisen in Kombination mit einem oder mehreren aus Cobalt, Nickel und Mangan vorliegt.

8. Verfahren nach einem der Ansprüche 2, 4, 5 oder 7, wobei M Titan, Vanadium, Molybdän, Wolfram oder Chrom ist.

50 9. Verfahren nach einem der Ansprüche 3, 4 oder 6, wobei M' Cobalt, Nickel oder Mangan oder eine Kombination von zweien oder mehreren davon ist.

10. Verfahren nach einem der vorhergehenden Ansprüche, wobei das Element der Gruppe IIIA, IVA oder VIA das interstitiell in die intermetallische Verbindung eingebaut wird Bor, Kohlenstoff, Silizium, Germanium, Schwefel, Selen oder Tellur oder eine Kombination von zweien oder mehreren davon ist.
55

11. Verfahren nach einem der Ansprüche 1 bis 9, wobei, außer falls das interstitiell einzubauende Element Sauerstoff ist, das intermetallische Ausgangsmaterial im Reaktionsgas in der weitgehenden Abwesenheit

von Sauerstoff erhitzt wird.

12. Verfahren nach Anspruch 10 oder 11, wobei das Element der Gruppe IVA das interstitiell eingebaut wird Kohlenstoff ist und das Reaktionsgas ein Kohlenwasserstoff ist.
- 5 13. Verfahren nach Anspruch 12, wobei das Reaktionsgas Methan, ein C₂ bis C₅ Alkan, Alken oder Alkin oder ein aromatischer Kohlenwasserstoff ist.
14. Verfahren nach Anspruch 12 oder 13, wobei die hergestellte interstitiell modifizierte Verbindung die Formel:
10
$$\text{Sm}_2\text{Fe}_{17}\text{C}_y'$$
aufweist, wobei 0,5 < y < 3,0.
- 15 15. Verfahren nach Anspruch 12 oder 13, wobei die hergestellte interstitiell modifizierte Verbindung die Formel:
$$\text{PrFe}_{11}\text{TiC}_y \text{ oder } \text{NdFe}_{11}\text{TiC}_y$$
aufweist, wobei 0,5 < y < 1,0.
16. Verfahren nach Anspruch 10 oder 11, wobei das Element der Gruppe IIIA das interstitiell eingebaut wird Bor ist und das Reaktionsgas Boran oder Dekaboran ist.
- 20 17. Verfahren nach Anspruch 16, wobei eine hergestellte interstitiell modifizierte Verbindung die Formel:
$$\text{Sm}_2\text{Fe}_{17}\text{B}_y'$$
aufweist, wobei 0,5 < y' < 3,0.
- 25 18. Verfahren nach Anspruch 10 oder 11, wobei das Element der Gruppe IVA das interstitiell eingebaut wird Silizium ist und das Reaktionsgas ein Silan ist.
19. Verfahren nach Anspruch 10 oder 11, wobei das Element der Gruppe VIA das interstitiell eingebaut wird Schwefel ist und das Reaktionsgas Schwefelwasserstoff ist.
- 30 20. Verfahren nach einem der vorhergehenden Ansprüche, wobei die intermetallische Verbindung vor dem Erhitzen im Reaktionsgas zu einem Pulver mit einer Teilchengröße von weniger als 50 Mikrometer Durchmesser gemahlen wird.
- 35 21. Verfahren nach einem der vorhergehenden Ansprüche, wobei die intermetallische Verbindung als Zusatzstoff bis zu 5 Gew.-% eines Elements der Gruppen IVB, VB und VIB des Periodensystems umfaßt.
22. Verfahren nach Anspruch 21, wobei der Zusatzstoff Niob, Zirkonium oder Tantal ist.
- 40 23. Verfahren zur Herstellung eines Permanentmagneten, wobei ein Pulver des interstitiell modifizierten Materials, das durch das Verfahren nach einem der Ansprüche 1 bis 22 hergestellt wurde, magnetisch oder mechanisch ausgerichtet und zu einem Magnet ausgebildet wird.
24. Verfahren nach Anspruch 23, wobei ein Permanentmagnet gebildet wird durch
45 (a) Orientieren der interstitiell modifizierten intermetallischen Verbindung in Pulverform in einem magnetischen Feld mit einem Polymerharz um einen Polymergebundenen Magneten zu bilden oder
(b) Orientieren der interstitiell modifizierten intermetallischen Verbindung in Pulverform in einem magnetischen Feld, Mischen mit einem niedrigschmelzenden Metall oder einer niedrigschmelzenden Legierung und Erhitzen um einen Metall-gebundenen Magneten zu bilden oder
50 (c) Schmieden der interstitiell modifizierten intermetallischen Verbindung in Pulverform mit einem Weichmetall unter Spannung die das Material magnetisch orientiert um einen Metall-gebundenen Magneten zu bilden.
25. Magnetisches Material der allgemeinen Formel:
$$\text{R}(\text{T}_{1-n}\text{M}_x)\text{Z}_y$$
,
55 wobei R mindestens ein Seltenerdelement ist, T Eisen oder eine Kombination von Eisen mit einem oder mehreren Übergangsmetallen ist, M ein Element der Gruppen IVB, VB oder VIB des Periodensystems ist, Z ein oder mehrere Elemente der Gruppen IIIA, IVA oder VIA des Periodensystems ist, n annähernd 12 und 0,5 < x < 3,0 und 0,1 < y ≤ 1,0 ist, dadurch gekennzeichnet,

daß Z interstitiell in das Kristallgitter des Materials eingebaut ist.

26. Magnetisches Material der allgemeinen Formel:



5 wobei R' Samarium ist, T' Eisen ist, M' ein oder mehrere Übergangsmetalle ist, Z Kohlenstoff ist der interstitiell in das Kristallgitter des Materials eingebaut ist, n annähernd 17 und $0 \leq x' < 6,0$ ist, dadurch gekennzeichnet, daß $2,0 < y < 3,0$ und daß das Magnetmaterial eine Curietemperatur im Bereich von 668 K hat.

10 27. Verwendung eines Magnetmaterials nach Anspruch 25 oder Anspruch 26 zum Herstellen von Permanentmagneten.


28. Verwendung des Produkts des Verfahrens nach einem der Ansprüche 1 bis 22 zum Herstellen von Permanentmagneten.

15 29. Permanentmagnet, hergestellt aus dem Produkt des Verfahrens nach einem der Ansprüche 1 bis 22.

Revendications

20 1. Procédé de modification interstitielle d'un composé intermétallique pour améliorer ses propriétés magnétiques, comprenant le chauffage d'un composé intermétallique comprenant au moins du fer, ou une combinaison de fer avec au moins un métal de transition et au moins un élément des terres rares, dans un gaz de réaction contenant au moins un élément des groupes IIIA, IVA ou VIA du tableau périodique, à une température de 400 à 650°C et à une pression de 0,01 à 1 000 bars.

25 2. Procédé tel que revendiqué dans la revendication 1, dans lequel le composé intermétallique répond à la formule générale :



30 où R est au moins un élément des terres rares, T est le fer ou une combinaison du fer avec un ou plusieurs métaux de transition, M est un élément choisi dans les groupes IVB, VB ou VIB du tableau périodique, n vaut environ 12, et $0,5 < x < 3,0$.

3 3. Procédé tel que revendiqué dans la revendication 1, dans lequel le composé intermétallique répond à la formule générale :



où R' est au moins un élément des terres rares, T' est le fer, M' représente un ou plusieurs métaux de transition, n vaut environ 17, et $0 < x' < 6,0$.

40 4. Procédé tel que revendiqué dans la revendication 2 ou la revendication 3, dans lequel R est l'yttrium, le cérium, le praséodyme, le néodyme, le samarium, le gadolinium, le terbium, le dysprosium, le holmium, l'erbium, le terbium ou le lutétium, ou un mélange d'au moins deux de ces éléments.

45 5. Procédé tel que revendiqué dans la revendication 2 ou 4, dans lequel R est le néodyme ou le praséodyme ou une combinaison de néodyme ou de praséodyme avec un ou plusieurs autres éléments des terres rares.

6. Procédé tel que revendiqué dans la revendication 3 ou 4, dans lequel R' est le samarium ou une combinaison de samarium avec un ou plusieurs autres éléments des terres rares.

50 7. Procédé tel que revendiqué dans la revendication 2, 4 ou 5, dans lequel le fer est combiné avec un ou plusieurs éléments choisis parmi le cobalt, le nickel et le manganèse.

8. Procédé tel que revendiqué dans l'une quelconque des revendications 2, 4, 5 ou 7, dans lequel M est le titane, le vanadium, le molybdène, le tungstène ou le chrome.

55 9. Procédé tel que revendiqué dans l'une quelconque des revendications 3, 4 ou 6, dans lequel M' est le cobalt, le nickel ou le manganèse ou une combinaison d'au moins deux de ces éléments.

10. Procédé tel que revendiqué dans l'une quelconque des revendications précédentes, dans lequel l'élément

du groupe IIIA, IVA ou VIA, qui est incorporé de façon interstitielle dans le composé intermétallique, est le bore, le carbone, le silicium, le germanium, le soufre, le sélénium ou le tellure, ou une combinaison d'au moins deux de ces composés.

- 5 11. Procédé tel que revendiqué dans l'une quelconque des revendications 1 à 9, dans lequel le matériau intermétallique de départ est chauffé dans le gaz de réaction, essentiellement en l'absence d'oxygène, sauf pour le cas où l'élément à incorporer de façon interstitielle est l'oxygène.
- 10 12. Procédé tel que revendiqué dans la revendication 10 ou 11, dans lequel l'élément du groupe IVA qui est incorporé de façon interstitielle est le carbone, et le gaz de réaction est un hydrocarbure.
13. Procédé tel que revendiqué dans la revendication 12, dans lequel le gaz de réaction est le méthane, un alcane en C_2 à C_5 , un alkène, un alkyne ou un hydrocarbure aromatique.
- 15 14. Procédé tel que revendiqué dans la revendication 12 ou 13, dans lequel le composé produit, modifié de façon interstitielle, répond à la formule :


$$Sm_2Fe_{17}C_y$$
 où $0,5 < y < 3,0$.
- 20 15. Procédé tel que revendiqué dans la revendication 12 ou 13, dans lequel le composé produit, modifié de façon interstitielle, répond à la formule :

$$PrFe_{11}TiC_y \text{ ou } NdFe_{11}TiC_y$$
 où $0,5 < y < 1,0$.
- 25 16. Procédé tel que revendiqué dans la revendication 10 ou 11, dans lequel l'élément du groupe IIIA qui est incorporé de façon interstitielle est le bore, et le gaz de réaction est un borane ou un décaborane.
17. Procédé tel que revendiqué dans la revendication 16, dans lequel le composé produit, modifié de façon interstitielle, répond à la formule :

$$Sm_2Fe_{17}B_{y'}$$
 où $0,5 < y' < 3,0$.
- 30 18. Procédé tel que revendiqué dans la revendication 10 ou 11, dans lequel l'élément du groupe IVA qui est incorporé de façon interstitielle est le silicium, et le gaz de réaction est un silane.
- 35 19. Procédé tel que revendiqué dans la revendication 10 ou 11, dans lequel l'élément du groupe VIA qui est incorporé de façon interstitielle est le soufre, et le gaz de réaction est le sulfure d'hydrogène.
20. Procédé tel que revendiqué dans l'une quelconque des revendications précédentes, dans lequel le composé intermétallique est broyé en une poudre ayant une dimension de particules de moins de 50 microns de diamètre avant le chauffage dans le gaz de réaction.
- 40 21. Procédé tel que revendiqué dans l'une quelconque des revendications précédentes, dans lequel le composé intermétallique renferme, comme additif, jusqu'à 5 % en poids d'un élément des groupes IVB, VB et VIB du tableau périodique.
- 45 22. Procédé tel que revendiqué dans la revendication 21, dans lequel l'additif est le niobium, le zirconium ou le titane.
23. Procédé de fabrication d'un aimant permanent, dans lequel une poudre du matériau modifié de façon interstitielle, produit au moyen du procédé de l'une quelconque des revendications 1 à 22, est alignée magnétiquement ou mécaniquement et transformée en aimant.
- 50 24. Procédé tel que revendiqué dans la revendication 23, dans lequel on forme un aimant permanent au moyen des étapes consistant à :
 - (a) orienter le composé intermétallique modifié de façon interstitielle, à l'état pulvérulent, dans un champ magnétique, avec une résine polymère pour former un aimant lié avec un polymère, ou
 - (b) orienter le composé intermétallique modifié de façon interstitielle, à l'état pulvérulent, dans un champ magnétique, le mélanger avec un métal ou un alliage à point bas de fusion et chauffer ce mélange pour former un aimant lié avec un métal, ou
- 55


(c) forger le composé intermétallique modifié de façon interstitielle, à l'état pulvérulent, avec un métal tendre, avec une contrainte qui oriente magnétiquement le matériau, pour former un aimant lié avec un métal.

- 5 **25.** Matériau magnétique répondant à la formule générale :



où R est au moins un élément des terres rares, T est le fer ou une combinaison de fer et d'un ou plusieurs métaux de transition, M est un élément des groupes IVB, VB ou VIB du tableau périodique, Z représente un ou plusieurs éléments des groupes IIIA, IVA ou VIA du tableau périodique, n vaut environ 12, $0,5 < x < 3,0$ et $0,1 < y \leq 1,0$, caractérisé en ce que Z est incorporé de façon interstitielle dans le réseau cristallin dudit matériau.

- 10 **26.** Matériau magnétique répondant à la formule générale :



où R' est le samarium, T' est le fer, M' représente un ou plusieurs métaux de transition, Z est le carbone, qui est incorporé de façon interstitielle dans le réseau cristallin dudit matériau, n vaut environ 17 et $0 \leq x' \leq 6,0$, caractérisé en ce que $2,0 < y < 3,0$ et en ce que ledit matériau magnétique a un point de Curie dans la région de 668 K.

- 15 **27.** Utilisation d'un matériau magnétique tel que revendiqué dans la revendication 25 ou la revendication 26 pour fabriquer des aimants permanents.

- 20 **28.** Utilisation du produit du procédé de l'une quelconque des revendications 1 à 22 pour fabriquer des aimants permanents.

- 25 **29.** Aimant permanent fabriqué à partir du produit du procédé de l'une quelconque des revendications 1 à 22.

30

35


40

45

50

55

FIG. 1(a)

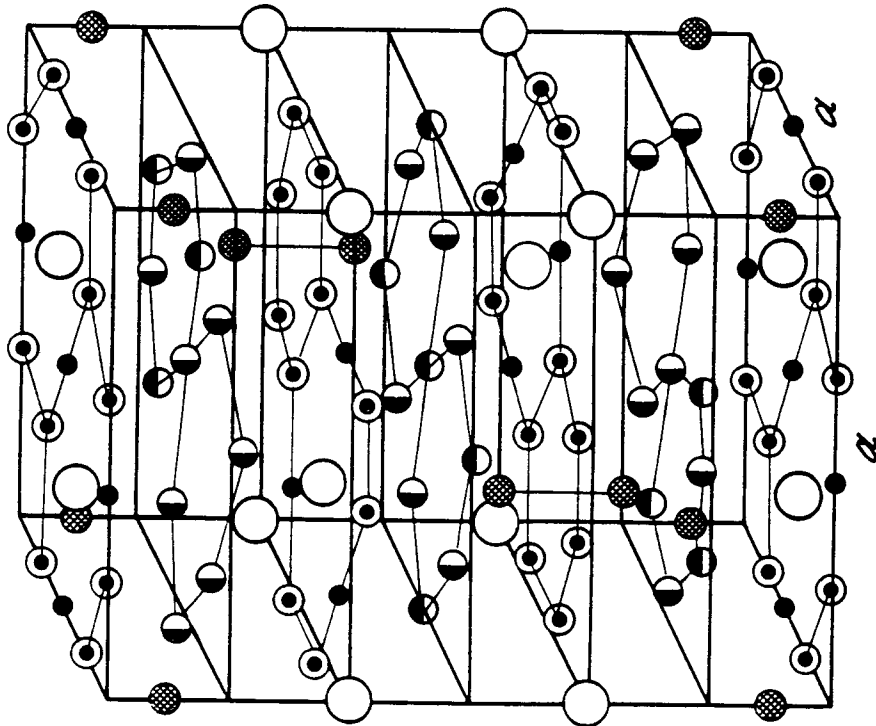


R ○ 6c

Fe ● 6c ● 9d ● 18f ● 18h

C ● 9e

FIG. 1(b)

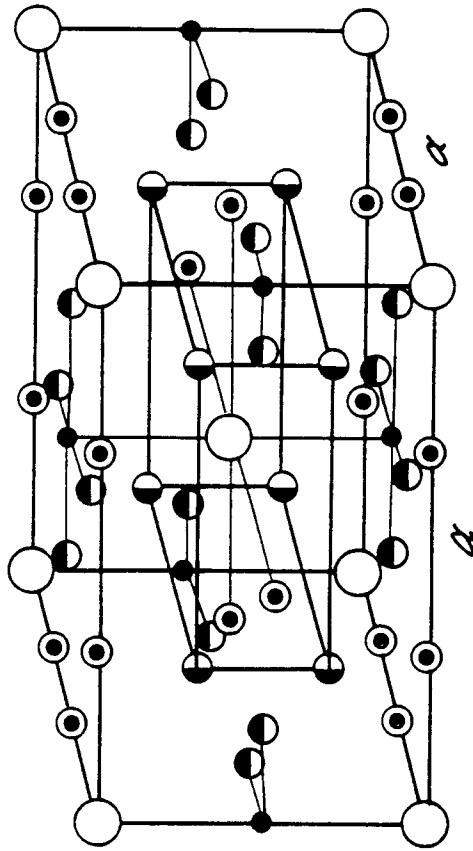

R ○ 2a

Fe ● 8f ● 8i ● 8j

C ● 2b

FIG. 2.

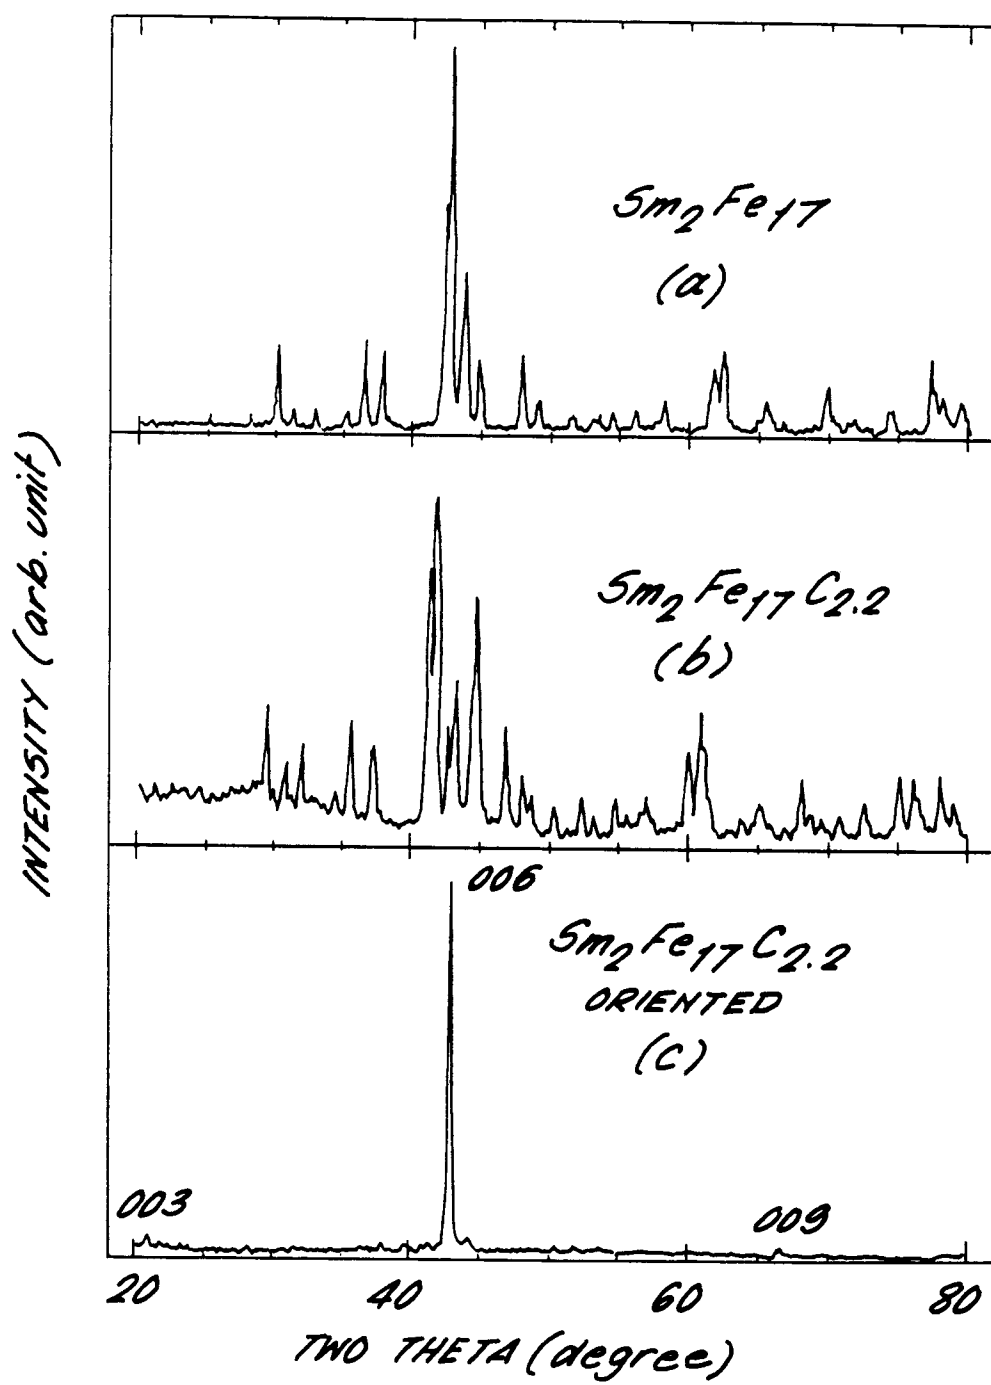


FIG. 3.

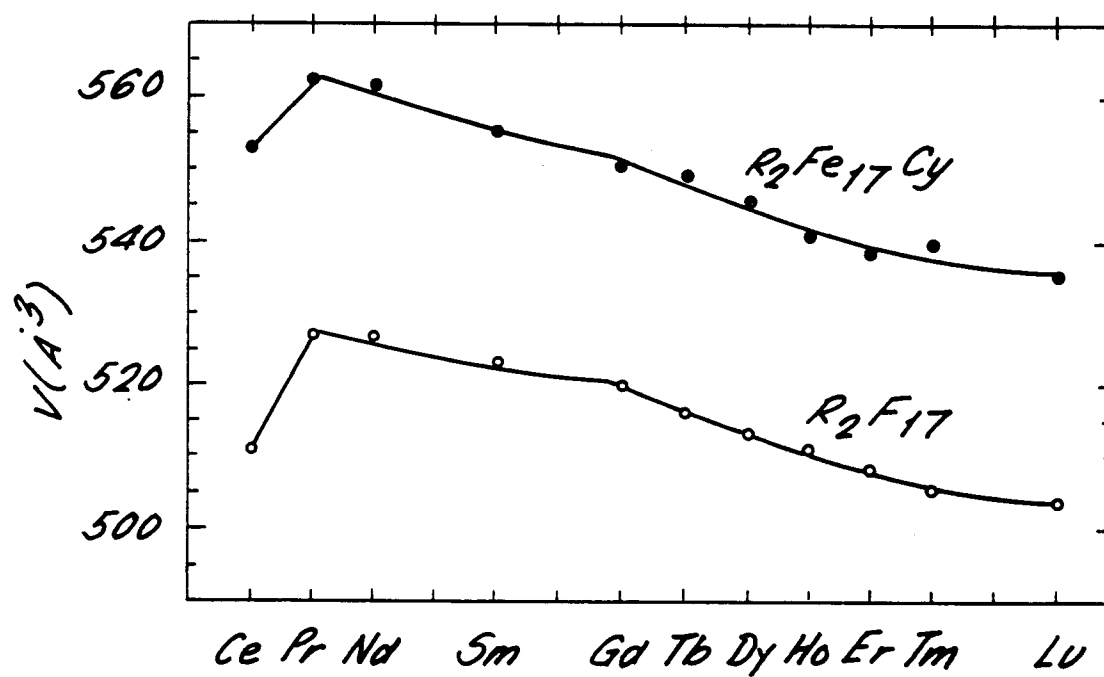


FIG. 4.

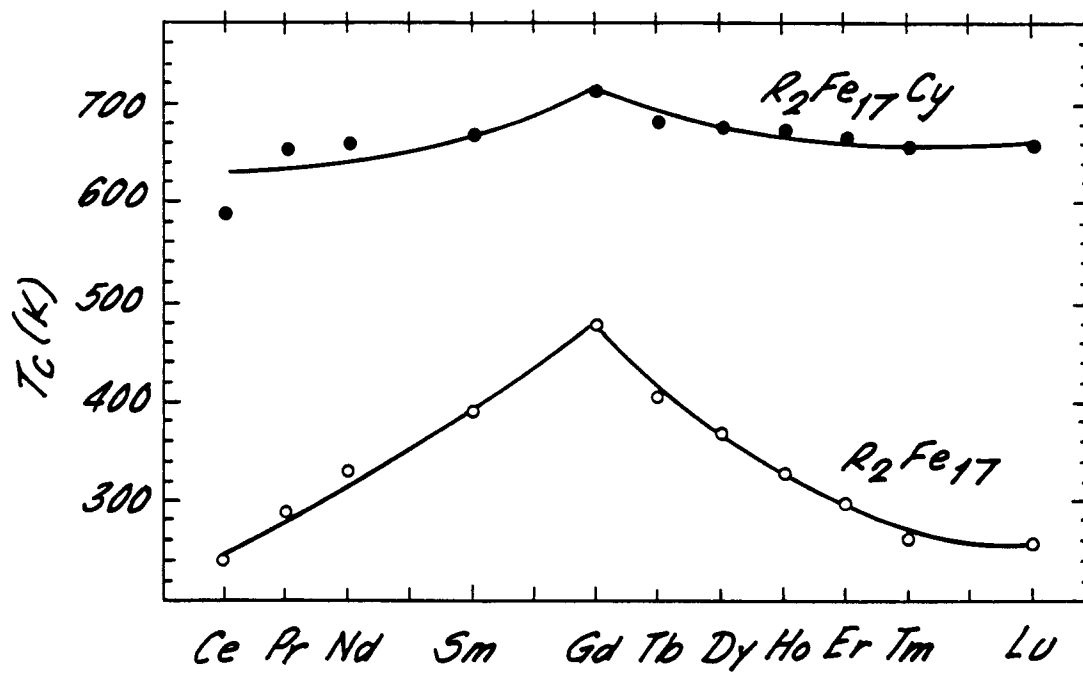
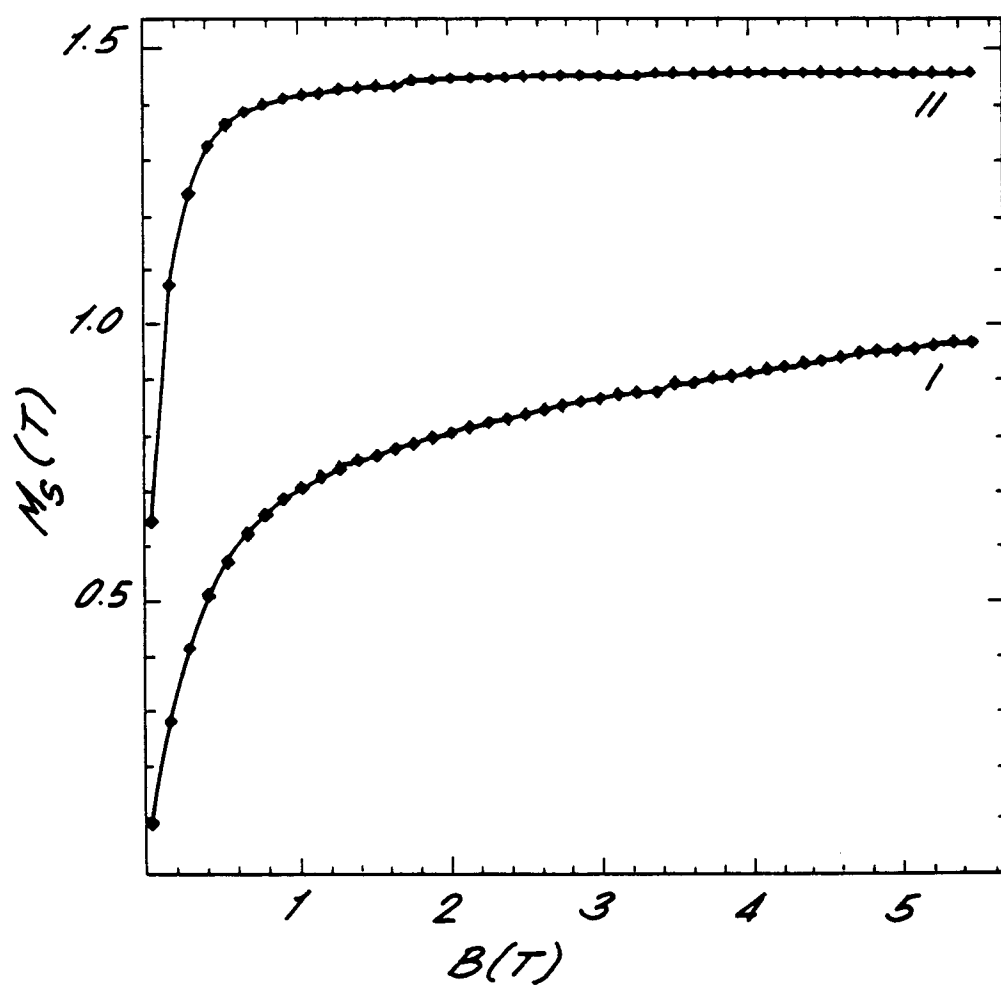


FIG. 5.



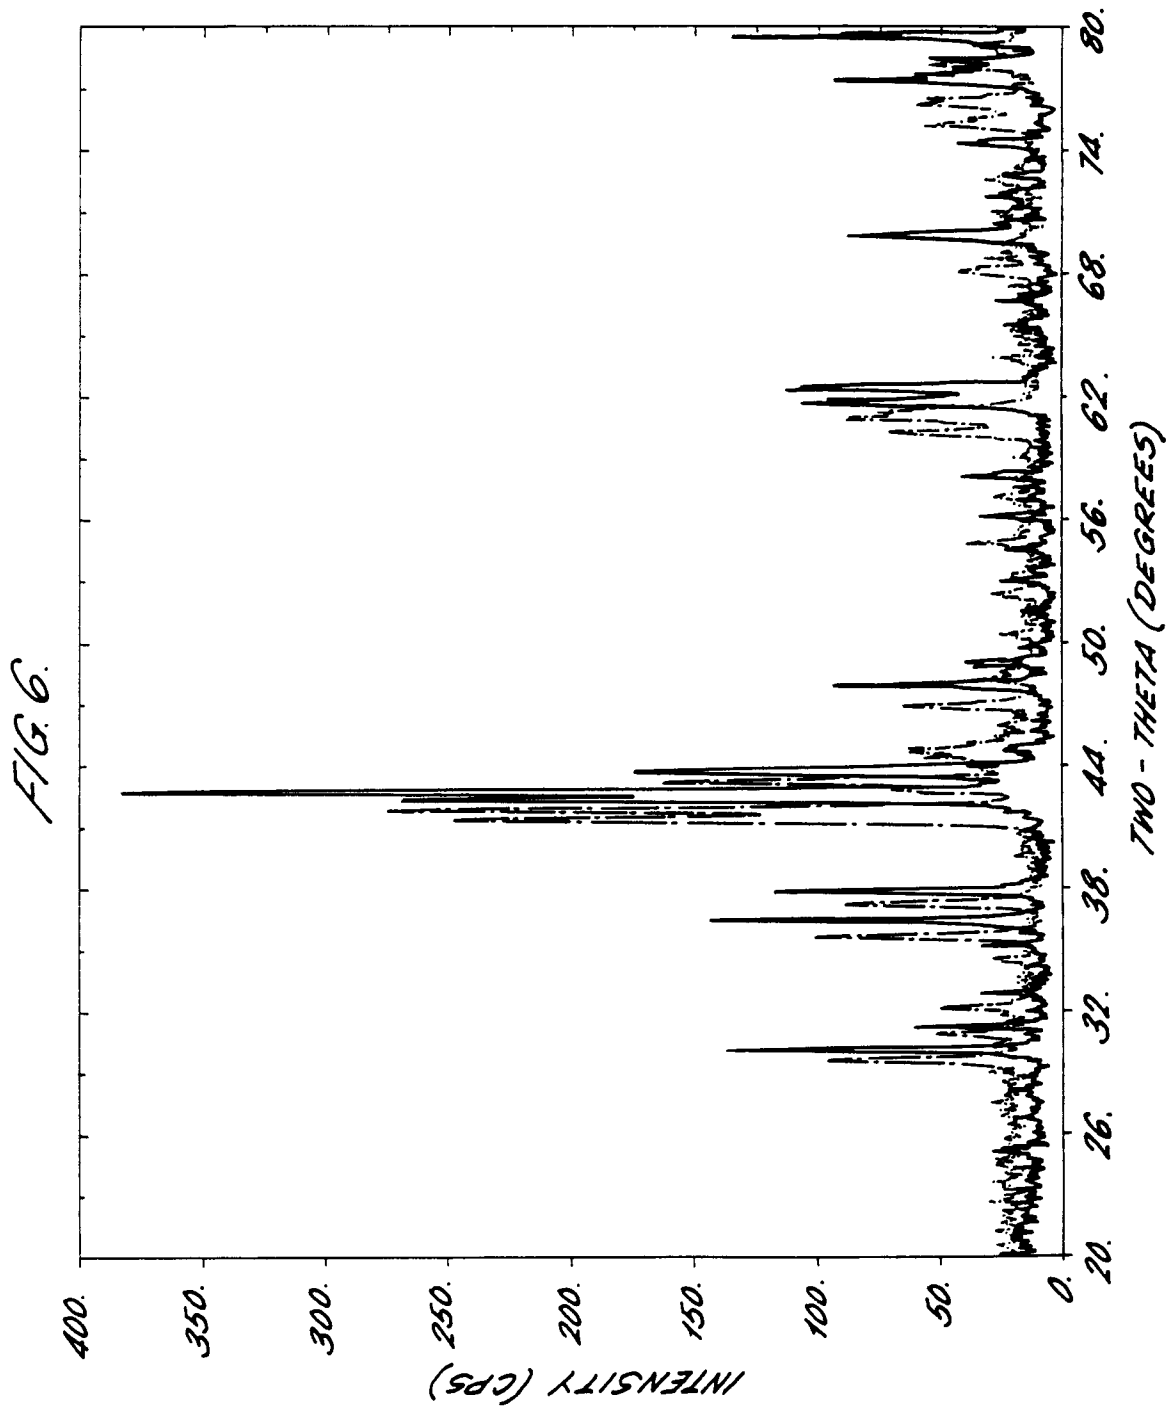


FIG. 7.

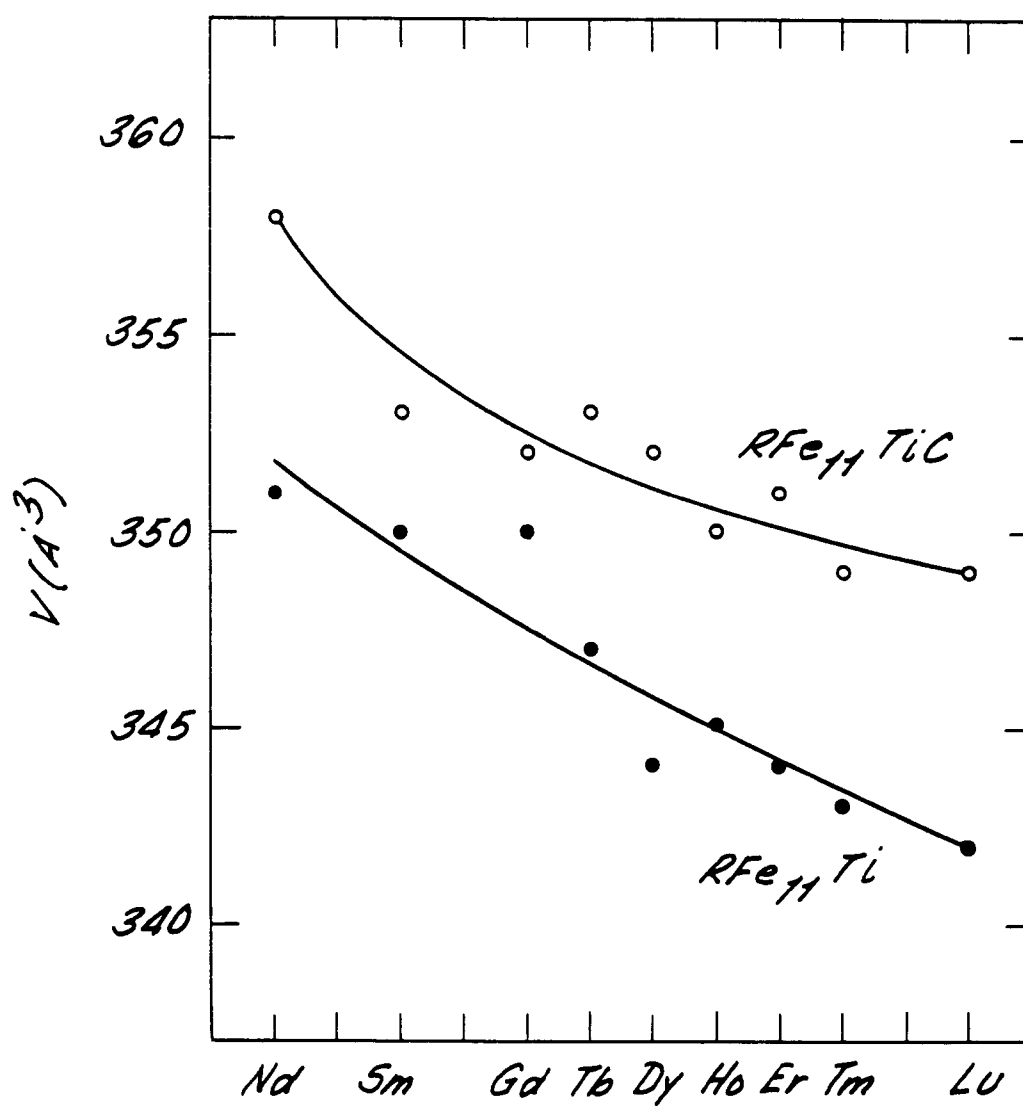
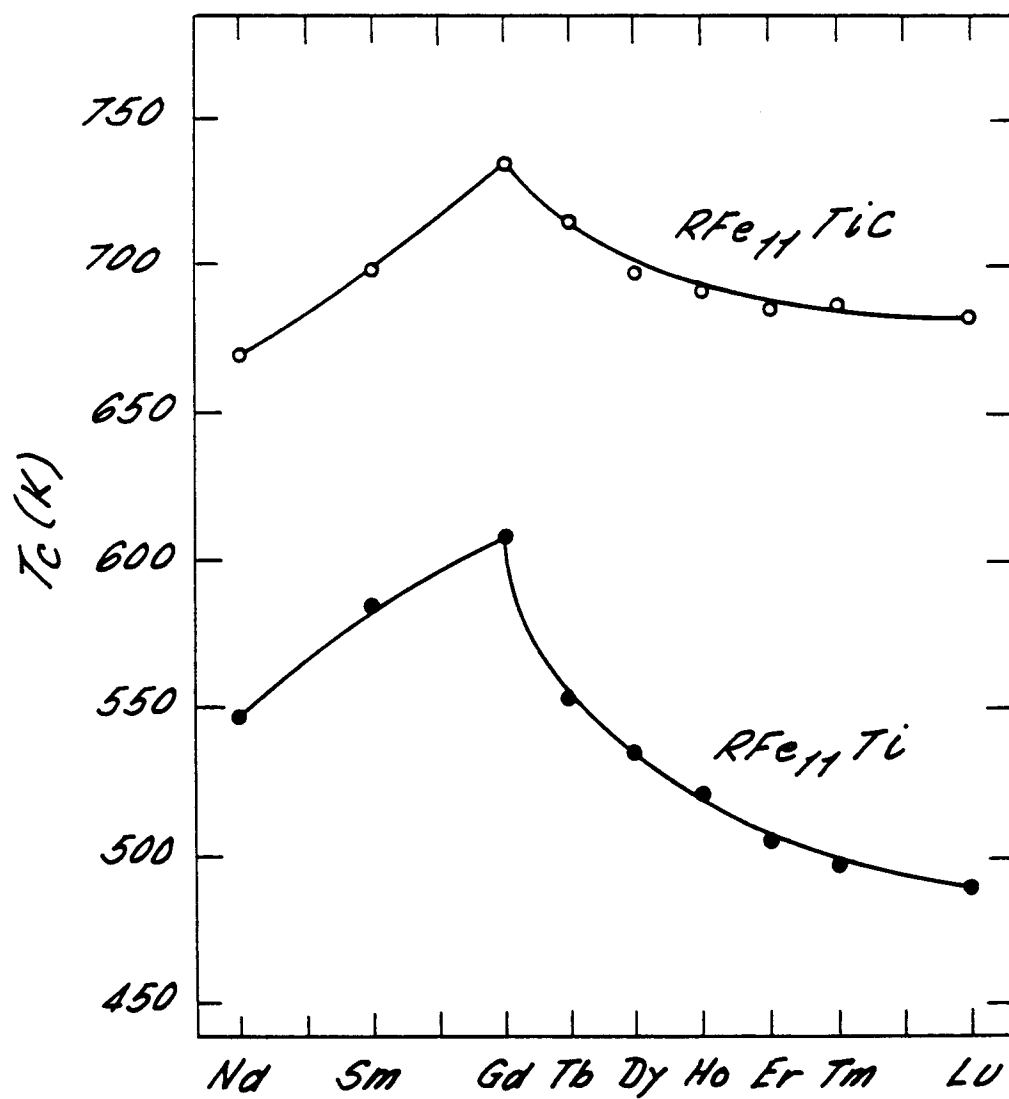


FIG. 8.



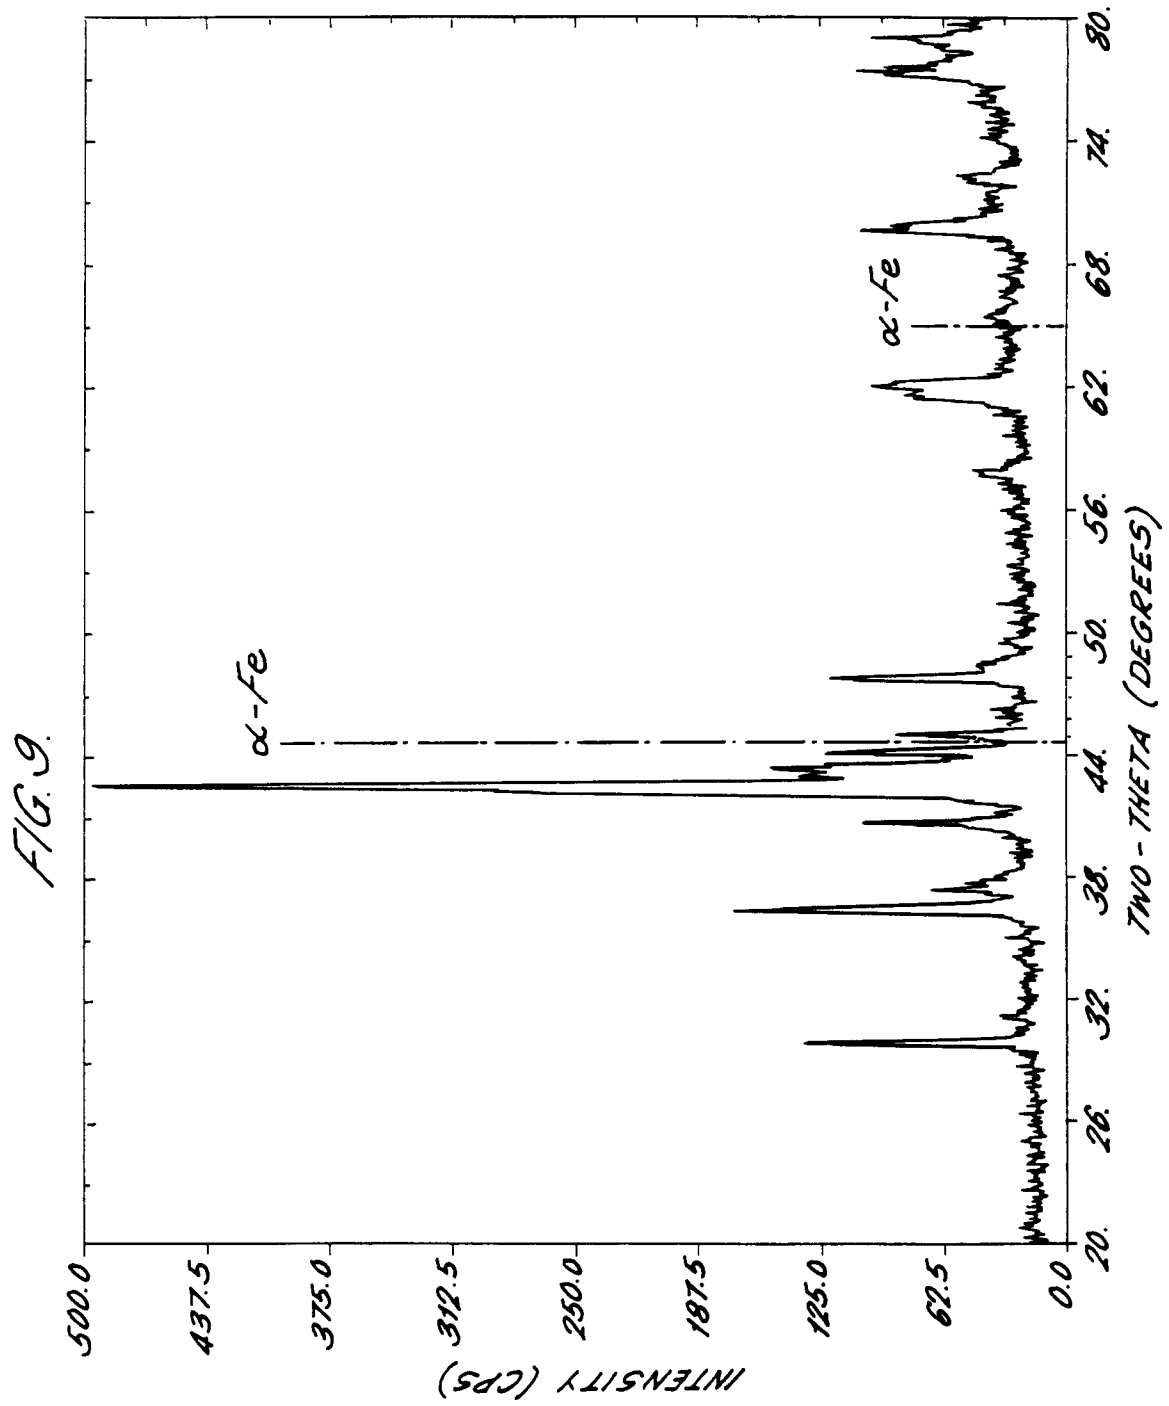


FIG. 10.

