

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 September 2006 (28.09.2006)

PCT

(10) International Publication Number
WO 2006/100550 A1

(51) International Patent Classification:
B28C 5/46 (2006.01) **B01F 15/06** (2006.01)

(21) International Application Number:
PCT/IB2006/000370

(22) International Filing Date:
22 February 2006 (22.02.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/655,975 23 February 2005 (23.02.2005) US
11/339,840 25 January 2006 (25.01.2006) US

(71) Applicant (for all designated States except US): **L'AIR LIQUIDE-SOCIETE ANONYME A DIRECTOIRE ET CONSEIL DE SURVEILLANCE POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE** [FR/FR]; 75 quai d'Orsay, F-75321 Paris Cedex 07, Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KLEIN, Eric P.** [US/US]; 8210 Cross Springs Ct., Houston, TX 77095 (US). **TEAS, Dino** [IN/US]; 7907 Meadowcroft, Houston, TX 77063 (US). **GARNETT, Andrew M.** [—/US]; 817 Hill St., #208, Santa Monica, CA 90405 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report

[Continued on next page]

(54) Title: CONCRETE COOLING INJECTION UNIT AND METHOD OF INJECTING A COOLANT INTO A CONCRETE MIXTURE

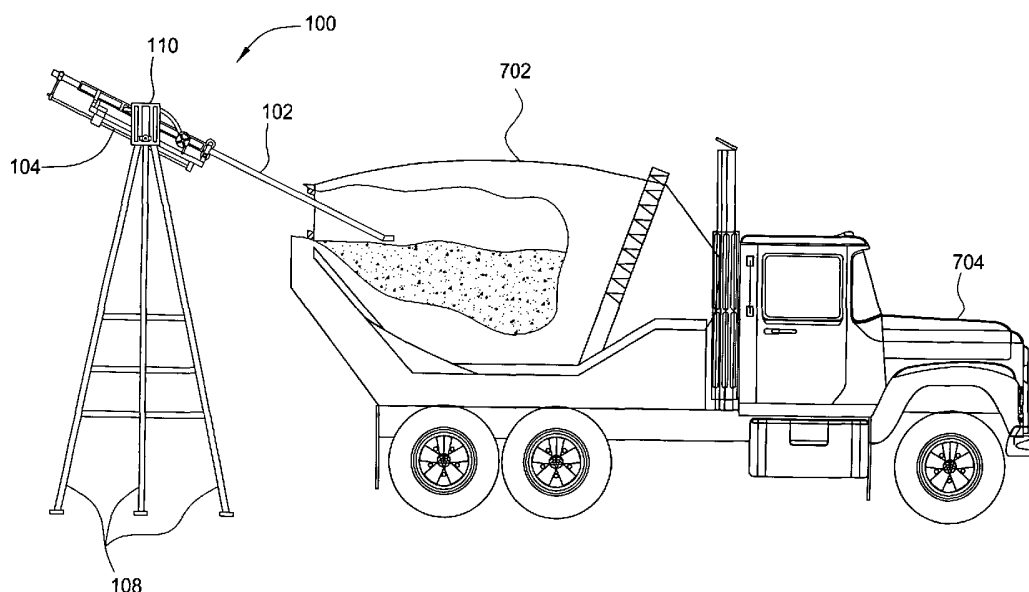

(57) Abstract: A method and apparatus for cooling a mixture with an injection system. The injection system is adjustable to accommodate the relative position and particular specifications of a given container (e.g., concrete mixer). In one embodiment, the injection system is operable to inject a coolant directly into the mixture while in the mixing process.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

CONCRETE COOLING INJECTION UNIT AND METHOD OF INJECTING A COOLANT INTO A CONCRETE MIXTURE

5

Background

Field of the Invention

Embodiments of the present invention generally relate to an apparatus and method for cooling concrete. Particularly, the present invention relates to
10 an apparatus and method for injecting a cryogenic liquid.

Description of the Related Art

In concrete preparation it is often necessary to cool the concrete mix. The structural integrity of concrete is dependent on the temperature at which
15 the concrete is set. In general, the cooler the concrete when poured, the stronger it will be once set. If poured at high temperatures, set concrete will often not meet minimum strength requirements. This is especially true in warm weather climates (e.g., pours done in the summer).

20 Traditionally, this problem was overcome by cooling the water used in mixing the concrete or by adding ice as a partial replacement for the water. The water was cooled using a refrigeration unit, ice, or a cryogenic liquid which was mixed with the water before mixing the concrete. These methods are costly, time consuming and labor intensive. The extensive equipment and
25 labor required for conventional approaches pose various safety concerns such as back injuries from lifting ice, loss of limbs from operating ice crushers, etc. Further, the use of ice can have a negative impact on the concrete's characteristics, such as the slump measurement.

30 Another approach is to inject a cryogenic liquid directly into a concrete mixer drum of a truck while it is being mixed in a conventional rotating mixer. However, the injection processes used previously were cumbersome and expensive. Prior injection systems were stationary injectors, which required time-consuming structural adjustments in order to meet the requirements of

different size mixers. Further, the current injection systems are designed in a manner that increases the potential damage to the truck mixer drum.

Therefore, there is a need for an efficient and economically feasible apparatus and method for cooling concrete. There is a further need for an apparatus that is adjustable in order to quickly meet the requirements of the mixing chamber. There is a further need for a method and apparatus for operating the cooling system remotely.

Summary

The present invention generally provides an apparatus and method for injecting fluid into a container. In one embodiment, the apparatus has a support structure with one or more leg assemblies and a lance support assembly pivotably coupled to the leg assembly and a lance. The lance is configured for reciprocating axial travel so that the lance has an extended and retracted position for fluid injection into the mixing container. The lance has a fluid path for flowing a cooling fluid therethrough, and an injection nozzle coupled to the fluid path, for injecting the cooling fluid into the container. In one embodiment the container is a concrete mixing container.

Another embodiment provides an apparatus for injecting fluid into a concrete mixing container. The apparatus has a lance configured for reciprocating axial travel so that the lance has a retracted position and an extended position for fluid injection into the concrete mixing container. The lance has a tube defining a fluid path for flowing a concrete cooling fluid therethrough. The tube is formed of a material suitable for transporting a cryogenic fluid through the fluid path. The lance also has an injection nozzle coupled to the fluid path. The cooling fluid is injected into the concrete mixing container through the injection nozzle. The apparatus also has a support structure for supporting the lance. The support structure is adjustable in at least one direction.

Another embodiment provides an injection system for injecting a cooling fluid into a mixture located in a container. The injection system has a tubular with an inlet nozzle and an outlet nozzle and defining a central fluid path fluidly coupled to the inlet nozzle and the outlet nozzle. The tubular is adapted for flowing the cooling fluid therethrough. The injection system also has a support carriage for supporting the tubular, the tubular being moveable longitudinally relative to the support carriage. The injection system further includes a support assembly for supporting the carriage, the support carriage being moveable relative to the support assembly. The injection system further includes a lifting mechanism having the support assembly pivotally attached thereto and configured to vertically actuate the support assembly. The injection system further includes one or more legs supporting the lifting mechanism. The injection system further includes a controller for actuating the tubular, the support carriage and the lifting mechanism. The controller is programmed with a cooling fluid injection sequence for causing the cooling fluid to be flowed through the central fluid path of the tubular and into contact with the mixture.

Another embodiment provides a method for cooling a concrete mixture. The method consists of providing an injection system. The injection system has a support structure, a lance and a fluid source. The lance has a fluid path and an injection nozzle fluidly coupled to the fluid path. The lance is movably disposed on the support structure and capable of movement relative to the support structure in at least one direction. The fluid source is fluidly coupled to the fluid path of the lance. The method further consists of adjusting a height of the lance relative to a concrete mixer. The method further consists of adjusting an alignment of the injection nozzle relative to an opening of the concrete mixer. Then extending the lance to insert at least the injection nozzle into the concrete mixer, and flowing a cooling fluid from the fluid source through the fluid path and out of the injection nozzle, whereby the cooling fluid is injected into the concrete mixer.

Another embodiment provides a method for cooling a concrete mixture. The method consists of providing an injection system. Then adjusting an orientation of the lance relative to a concrete mixer. Then extending the lance to insert at least the injection nozzle into the concrete mixer. The method
5 further consists of initiating a concrete cooling process comprising flowing a cooling fluid from the fluid source through the fluid path and out of the injection nozzle, whereby the cooling fluid is injected into the concrete mixer. At least one characteristic of the concrete cooling process is monitored to detect an endpoint of the concrete cooling process. The method further
10 includes retracting the lance from the concrete mixer upon detecting the endpoint. The injection system has a support structure, a lance and a fluid source. The lance has a fluid path and an injection nozzle fluidly coupled to the fluid path. The lance is movably disposed on the support structure and being capable of movement relative to the support structure in at least one
15 direction. The fluid source is fluidly coupled to the fluid path of the lance.

Brief Description of the Drawings

For a further understanding of the nature and objects of the present
20 invention, reference should be made to the following detailed description, taken in conjunction with the accompanying drawings, in which like elements are given the same or analogous reference numbers and wherein:

Figure 1 is a side view of an embodiment of the injection system.
25

Figure 2 is a front view of the injection system, according to one embodiment of the invention.

Figure 3 is a top view of the support structure for the injector, according
30 to one embodiment of the invention.

Figure 3a is a side view of the roller bearing for attaching the carriage to the lance support, according to one embodiment of the invention.

Figure 4 is a top view of the injector, according to one embodiment of the invention.

5 Figure 5 is a side view of the injector, according to one embodiment of the invention.

Figure 6A and 6B are a side view of a vertical lift system, according to one embodiment of the invention.

10

Figure 7A and 7B are a back view of the mixer with the injections system, according to one embodiment of the invention.

Figure 8A is a top view of the mixer with the injections system, according to one embodiment of the invention.

15

Figure 8B is a side view of the mixer with the injections system, according to one embodiment of the invention.

20 Figure 9 is a cross sectional view of the mixer and injection system with the injection system deactivated, according to one embodiment of the invention.

Figure 10 is a cross sectional view of the mixer and injection system with the injection system activated and inside the mixer, according to one embodiment of the invention.

25

Figure 11 is a schematic of a controller, the injection system and a fluid source, according to one embodiment of the invention.

30

Figure 12 is a flow chart, according to one embodiment of the invention.

Description of Preferred Embodiments

Figures 1 and 2 illustrate a side view and a front view, respectively, of an injection system **100**, according to one embodiment of the invention. The injection system **100** includes a lance **102** configured to inject a fluid into a container (e.g., a concrete mixer **702**, such as the one shown in Figure 7). The lance **102** mounts to a carriage **200**, shown in Figure 2. The carriage **200** is disposed on a lance support assembly **104**. The lance support assembly **104** is supported by a support structure **106**. As shown, the support structure **106** consists of two sets of legs **108**. Illustratively, there are three legs **108** for each support structure **106**, however, it should be appreciated that any number of support legs **108** may be used. Further, there may be any number of support structures **106**, including one leg. Further, as shown in Figure 2, the two sets of legs **108** of the support structure **106** define an opening **210** having a height H and width W. In one embodiment, the size of the opening **210** is adjustable in at least one dimension (H and/or W).

Figure 1 shows a fluid supply **118**. Illustratively, the fluid supply is remotely located, but in another embodiment, the fluid supply **118** is mounted to the injection system **100**. The fluid source **118** is fluidly coupled to the injection system **100** with a fluid line **120** whereby a cooling fluid is supplied for injection into a container (not shown), via the lance **102**. In one embodiment, the fluid source **118** can be turned on and off using a valve **124** attached to the lance support assembly **104**, as shown in Figure 2. Although the valve **124** is shown located on the lance support assembly it should be appreciated that the valve **124** can be located anywhere between the fluid source **118** and the lance **102** so long as the cooling fluid is supplied for injection into the container. In the illustrative embodiment, the lance **102** includes an outlet nozzle **112** for releasing the fluid. The outlet nozzle **112**, as shown in Figure 1, projects from the lance **102** at an angle Θ . In one embodiment the angle Θ is approximately a 45° angle substantially in the Y-Y plane. The angle Θ allows the cooling fluid to enter the container in a direction that prevents contact and damage to the container walls. Although

the angle Θ is shown as a 45° , it should be appreciated that any angle or angular orientation relative to the lance **102** may be used. In one embodiment the nozzle is detachable to allow nozzles of different angles and sizes to be quickly attached as is appropriate for a particular application. In another

5 embodiment, the angle Θ automatically adjusts to any angle and orientation relative to the lance **102**, depending on the container requirements. In one embodiment, the lance **102** and nozzle **112** are metal (e.g. carbon steel, alloy). The cooling fluid may be any type known in the art such as liquid nitrogen, argon, oxygen, chilled water or carbon dioxide.

10

Thus, in one embodiment the lance **102** is a tubular that includes a central conduit defining the fluid path for the cooling fluid, and which is fluidly coupled to the nozzle **112**. However, in another embodiment, the fluid path is disposed externally on the lance **102**. For example, a fluid line may be

15 secured to the outer surface of the lance **102** and feed into the nozzle **112**. In this case, the lance **102** merely provides the requisite rigidity, but not the fluid path itself. In another embodiment, multiple fluid paths may be provided, and each fluid path may be fluidly coupled to its own injection nozzle (alternatively, each fluid path may feed into the same nozzle). The respective nozzles may

20 each have a different angular orientation. In this case, it is further contemplated that each fluid path may be coupled to a different fluid source **118**. Each fluid source may provide a respective fluid of a different type, temperature, flow rate, pressure, etc.

25

According to various embodiments of the present invention, the lance **102** is capable of movement with multiple degrees of freedom. The movement of the lance can be accomplished manually, electrically, with hydraulic pressure, or pneumatic pressure provided by lines **126** shown in Figure 2. Further it should be appreciated that any combination of methods

30 may be used to move the lance. This freedom of movement allows for easy adjustment of the lance **102** despite the angle, height and dimensions of the container (e.g., concrete mixer) relative to the injection system **100**. For example, the lance **102** may be capable of axial movement along a X-X axis,

rotational movement about a Y-Y axis and/or vertical movement along a Z-Z axis, all shown in Figure 1. It is further contemplated that the lance **102** is configured for rotational movement about an A-A axis (the A-A axis being orthogonal to the Y-Y axis), shown in Figure 2. Such axial and rotation
5 freedom of movement may be achieved in any number of ways. Illustrative embodiments are described below. However, it is understood that the embodiments described herein regarding the movement of the lance **102** relative to other components of the injection system **100** are merely illustrative and other embodiments are within the scope of the invention.

10

For example, freedom of rotation about the Y-Y axis may be achieved by provision of a swivel connection (not shown) between the lance **102** and the carriage **200**. The swivel connection allows the lance **102** to rotate about axis Y-Y as shown in Figure 1.

15

Rotation about the A-A axis may be achieved, for example, by pivotally attaching the lance support assembly **104** to the support structure **106** to allow rotation of the lance support assembly **104** about the axis A-A. Referring briefly to Figure 3, a top view of the lance support assembly **104** is
20 shown. Illustratively, the lance support assembly **104** includes a pair of support pins **300** formed on opposing sides of the lance support assembly **104**. Referring again to Figure 2, the pins **300** are received by openings (not shown) formed in a vertical lift system **110**. Accordingly, the lance support assembly **104** is pivotally suspended between the two sets of legs **108** of the
25 support structure **106**, whereby the entire lance support assembly **104** is freely rotatable to any angle desired by an operator using automation or by manual operation. In one embodiment, a motor **206** (shown schematically) rotates lance support assembly **104**. The motor **206** fixedly attaches to the support structure **106**, while a drive shaft (not shown) connects to the pin **300**.
30 The drive shaft then transfers rotation directly to the lance support assembly **104** via the pin **300**. In one embodiment, the motor **206** is a servo motor but, more generally, may be any kind of motor capable of providing the desired rotational actuation of the lance support assembly **104**. In another

embodiment, a hydraulic or pneumatic actuator (not shown) could be used, or any other actuator known in the art. By operating the motor **206**, the angle of the lance support assembly **104** is adjusted and thus adjusts the angle of the lance **102** which is attached to the lance support assembly **104**. In this manner, the lance **102** can be positioned to enter a compartment (e.g., a concrete mixer) at a desired angle, e.g., so as not to come into contact with the side walls of the compartment. Although shown as pivoting about pins **300**, it should be appreciated that the lance support assembly **104** could be stationary with the lance **102** being adapted to pivot separately relative to the lance support assembly **104**. In yet another embodiment, both the lance **102** and lance support assembly **104** could be rotatably mounted, thereby allowing the lance **102** and lance support assembly **104** to be adjusted relative to each other as well as to the rest of the injection system **100**.

In one embodiment, the carriage **200** is movably disposed on the lance support assembly **104** so that the carriage **200** is moveable in (or parallel to) a plane defined by the lance support assembly **104**. Referring again to Figure 3, the carriage **200** is shown slidably mounted to the lance support assembly **104** on one or more roller bearings **306** (detail shown in Figure 3a). Illustratively, four roller bearings **306** are shown. Each roller bearing **306** is disposed in, and travels on, a track **310** formed on an inner surface a guide rail **308** of the lance support assembly **104**. Bidirectional lateral movement (illustrated by the arrow **304**) of the carriage **200** is thus achieved. In one embodiment, the carriage **200** is actuated by an actuator **202**, shown in Figure 2. Illustratively, the actuator **202** is a piston-type actuator mounted to the lance support assembly **104** and coupled to the carriage **200** by a piston rod **204**. In the alternative, it is contemplated that a drive device, such as a motor **302** (shown in Figure 3) connected to the roller bearing **306**, a mechanical arm, or an operator could control the carriage **200**. Thus, as the carriage **200** moves along the lance support assembly **104**, the lance **102** moves with the carriage **200** so that the lance **102** aligns with the mixer **702**.

As was stated above, it is also contemplated that the lance **102** moves along its own axis, X-X, as shown in Figure 1. Accordingly, the lance **102** has a retracted position and an extended position (as shown in Figures 9 and 10, both of which will be described in more detail below). To this end, the lance

5 **102** slidably extends through a pair of roller guides **500A-B**, as shown in Figure 5 (showing a side view of the injector). In one embodiment, each roller guide **500A-B** includes a pair of rollers **400** arranged in-line relative to each other. The rollers **400** of each pair define an opening through which the lance **102** extends. In one embodiment, one or more of the rollers **400** include a

10 groove **402** (one shown in Figure 4) sized to receive a least a portion of the lance **102**. In such an arrangement, the guides **500A-B** at once stabilize the axial orientation of the lance and allow the lance **102** to travel axially along the X-X axis. The rollers **400** mount to the carriage **200**, for supporting the lance **102**. In one embodiment the upper roller of rollers **400** is detachable. Thus, if

15 the truck moves before the lance **102** is retracted the upper roller will detach allowing the lance **102** to move, ensuring the lance **102**, the truck or the injection system **100** is not damaged.

In the illustrative embodiment, the axial motivation of the lance **102** is

20 achieved by the provision of an actuator assembly mounted to the carriage **200** and coupled to the lance **102**. Referring now to Figure 5, a side view of an actuator **502** is shown according to one embodiment. The actuator assembly **502** includes a piston cylinder **504** fixedly attached to the support carriage **200** and a moveable piston rod **506**. The piston rod **506** is

25 connected at one end to the lance **102** by a coupler **508**. In one embodiment, the coupler **508** is secured to the piston rod **506** and the lance **102** by fasteners such as screws, thereby allowing the coupler **508** to be readily adjusted at a desired length of the piston rod **506** and/or the lance **102**. In operation, the piston cylinder **504** reciprocally drives the piston rod **506**

30 axially, thereby moving the lance **102** along its axis X-X. Although the lance is shown mounted on rollers **400** with a piston assembly attached to axially move the lance, it should be appreciated that any method of axially extending the lance **102** may be used. For example, a telescoping lance, a rack and

pinion system, or motorized rollers are all contemplated as alternative embodiments. Combinations of such embodiments are also contemplated. For example, the lance may include both the roller guides permitting the slidable axial movement, in addition to a telescoping feature

5

Also shown in Figure 5 is an inlet nozzle **404** for connecting to the fluid source **118**. The inlet nozzle **404** provides an opening into the fluid path formed in the lance **102**, and which ultimately terminates at the nozzle **112**. Preferably, the inlet nozzle is fitted with a quick disconnect fitting, whereby the fluid line from the fluid source **118** may be quickly attached and detached. The inlet nozzle **404** may include more than one inlet nozzle to increase accessibility in multiple direction. For example, inlet nozzles **404** could be on either side of the lance **102**, as shown in Figure 4.

15 In one embodiment, the support structure **106** includes a vertical lift system **110** which connects the support structure **106** to the lance support assembly **104**. The vertical lift system **110** allows the lance support assembly **104** to be raised or lowered, along the Z-Z axis (Figures 6A and 6B).

20 Figures 6A and 6B show the vertical lift system **110** in more detail. The vertical lift system **110** includes one or more lifting pistons **600** coupled to the pins **300**. The vertical lift system **110** may also be equipped with one or more guide rails **602** for stability. Although shown as a piston lift assembly, any mechanism for lifting the lance support assembly **104** could be used. For example, in another embodiment a worm drive is used as the actuation mechanism.

Operation of the injection system **100** is generally contemplated by manual means, automated means or a combination thereof. In one embodiment, a controller is communicatively coupled to the one or more actuators disposed on the injection system **100**. In a particular embodiment, a controller is mounted to the injection system **100**. For example, Figures 1 and 2 show a controller **116** (shown schematically) mounted to the support

30

structure **106**; although it also contemplated that the controller **116** may be remotely located from the injection system **100**. For example, Figures 8A and 8B show a top and side view of the injection system **100**, the controller **116** and a truck **704**, in which the controller **116** is remotely located from the injection system **100**. Preferably, the controller **116** is positioned to allow a driver of the truck **704** to reach out of window of the truck cab and input commands to the controller **116**, while still being close enough to the injection system **100** to allow the lance **102** to enter the mixer **702** and inject a cooling fluid, as will be described in more detail below. In one embodiment, the controller **116** is a handheld device that is in wireless (e.g. infrared, RF, Bluetooth, etc.) communication with the injection system **100**. The handheld device can be operated from any location including the cab of the truck **704**.

Referring now to Figure 11, a schematic is shown of the controller **116** and various components connected to the controller **116**. In various embodiments, the controller **116** can be in wireless (e.g., infrared, RF, Bluetooth, etc.) or wired communication with components of the injection system **100**. Illustratively, the controller **116** is communicatively coupled to the support carriage actuator **202**, the lance support assembly actuator **206**, the lance actuator **502**, the lifting pistons **600**, the fluid source **118**, a sensor **114**, and a camera **208**. The controller **116** may generally be configured to operate each of the respective components in an automated fashion (e.g., according to a preprogrammed sequence stored in memory) or according to explicit user input.

Although not shown, the controller **116** may be equipped with a programmable central processing unit, a memory, a mass storage device, and well-known support circuits such as power supplies, clocks, cache, input/output circuits and the like. Illustratively, the controller **116** also includes a key-operated locking mechanism **1100** which may be used to enable the injection system **100**. Once enabled, an operator may control the operation of the injection system by inputting commands into the controller **116**. To this end, one embodiment of the controller **116** includes a control panel **1102**. The

control panel **1102** may include a key pad, switches, knobs, a touch pad, etc. In one embodiment, the operator is required to input a pass code into the control panel **1102** in order to operate the injection system **100**. The controller **116** may also include, or be connected to, a card reader **1104**. The data read from a card by the card reader **1104** can be used to determine whether the card holder is an authorized operator. Accordingly, the controller **116** may have a network connection to a database **1106** accessed to verify the authorization of the card holder by comparing information read from the card to information stored in the database. In one embodiment, the controller **116** has a wireless receiver (e.g., RF receiver) which can detect a signal of a wireless transmitter associated with a particular operator. On the basis of the wireless signal, the controller can determine whether the particular operator is an authorized user. Accordingly, any number of authentication and access control devices are contemplated. The controller **116** may also be configured to track various information related to the use of the injection system **100**. Accordingly, operator identity and other usage information (e.g., time and date, quantity of cooling fluid, temperatures, etc.) can be tracked. The controller **116** shown in Figure 11 also includes an output device **1108** (e.g., a display and/or a speaker). The output device **1108** may provide information to the operator including, e.g., information regarding the progress of the current injection cycle.

In operation, the controller **116** issues commands to one or more components of the injection system **100** and, in some cases, receives feedback from the components. In particular, the controller **116** issues control signals to the various actuators to orient the lance **102** at a desired location while positioning the lance **102** into a container **702**. Once the lance **102** is positioned, the controller **116** issues a command to open an appropriate valve of the fluid source **118**, whereby fluid is allowed to flow from the fluid source **118** and ultimately out of the injection nozzle **112**.

In one embodiment, the controller **116** is further communicatively coupled to sensing equipment configured to facilitate inserting the lance **102**

into the container **702**. Illustrative sensing equipment shown in Figure 11 includes the sensor **114** and the camera **208**. Although shown as a singular unit, the sensor **114** may be representative of any number of sensors. The sensor **114** may be any type of sensing device or system configured to detect
5 proximity of the container **702**. Illustrative sensors include acoustic sensors and optical (e.g., laser) sensors. During operation of the injection system **100**, the sensor **114** detects a relative distance/location of the container **702** and provides the detected distance/location information to the controller **116**. The controller **116** then responds by making appropriate adjustments to the
10 orientation of the lance **102** (e.g., by issuing signals to one or more of the actuators) during continued extension of the lance into the container **702**. In this way, the controller **116** and the sensor **114** define a closed loop feedback system configured to ensure that the lance **102** avoids contacting the container **702** and terminates at a desired location within the container **702**.
15 Alternatively, or in addition (to the sensor **114**), the camera **208** may be provided to capture and transmit a picture (via, e.g., video feed) to the output device **1108**. The operator of the injection system **100** may then observe the operation of the lance **102** via the output device **1108**.

20 In one embodiment, the controller **116** is further communicatively coupled to temperature sensing equipment, also represented by the sensor **114**. The temperature sensor **114** could be any type contemplated in the art, such as a contact type or contactless device. In general, a contact type element could be inside or outside the concrete mixer. The contact type
25 temperature probe could be a temperature measuring element in contact with the outer surface of the drum to take skin temperature readings. Illustrative contact elements include thermocouples and thermistors. Regardless of the type of contact element, it may be constructed such that contact is maintained during rotation of the drum, i.e. by being spring loaded or using a brush type
30 probe having sufficient flexibility to adapt to the outer surface of the drum as it rotates. It is also contemplated that the contact element may be in direct contact with the concrete mixture. An example of a contactless temperature measuring device is an infrared sensor. Infrared measuring devices are well-

known and are capable of measuring an object's (e.g., concrete mixture) temperature from a distance. The infrared sensor may be mounted on the injection system **100** (e.g., on the lance) in a manner that the infrared light can be projected into the mixture in order to take a temperature reading of the concrete mixture. In one embodiment, the infrared measuring device may include a laser sight to facilitate aiming the infrared light a desired spot. In operation, the temperature sensor **114** measures the temperature of the mixture (e.g., concrete mixture) contained in the container **702** during a mixing operation. If the mixer **702** or the concrete mix were to become too cold, the controller **116** shuts down the injection system **100**. In one embodiment, the operator first inputs a desired temperature (temperature setpoint) of the mixture to be cooled, before the cooling fluid injection begins. Once the temperature setpoint is reached, the controller **116** may issue a command to stop the flow of liquid nitrogen and retract the lance **102** from the container **702**. It is also contemplated that the temperature of the fluid being flowed through the lance **102** is measured.

Additional details of the operation of the injection system **100** will now be described with reference to Figures 7-11. Referring first to Figure 7A, a rearview of the injection system **100** and a cement mixing truck **704** is shown. Figure 7A shows the injection system **100** in a standby position in which the injection system **100** is raised to a height providing sufficient clearance for the truck **704** to drive through the opening **210** formed by the legs **108** and the lance support assembly **104** of the injection system **100**. The truck **704** then proceeds to drive through the opening **210** of the injection system **100** until the truck **704** is at a desired position with respect to the injection system **100**. More particularly, the desired position is defined by a relative distance of the injection nozzle **112** and the opening **700** of the mixer **702**. Such a distance may be any distance from which the lance **102** can be sufficiently extended into the mixer **702**. In one embodiment, the driver of the truck **704** may be instructed to halt the truck **704** (at the desired position) by receiving an appropriate signal from the controller **116**. The controller **116** may issue the signal upon detecting (by signals received from the sensor **114**) that the

desired position has been reached. Alternatively, the driver may use the image received from the camera **208** to determine when the desired position has been reached. In another embodiment, the truck **704** is equipped with a computer chip and communication system (not shown) that sends the controller **116** the dimensions and location of the truck **704**. Thus, as the truck **704** reaches the proper location the controller will actuate and insert the lance **102** into the mixer **702** automatically.

In any case, once the desired position has been reached, the vertical lift system **110** is actuated to lower the lance support assembly **104** to a penetration height, as shown in Figure 7B. A side view of the truck **704** (cutaway view shown) and the injection system **100** at the penetration height is shown in Figure 9. The controller **116** then issues a command (e.g., either according to a preprogrammed sequence or user input) causing the lance **102** to be extended into the mixer, as seen in Figure 10. In a fully automated environment, the controller **116** issues the lance extension command upon detecting that the truck **704** is properly positioned. During its extension, the lance **102** may be guided by appropriate control signals issued by the controller **116** in order to prevent the lance from contacting the mixer **702**, as described above. Thus, insertion of the lance **102** into the mixer **702** is possible regardless of the size and position of the mixer aperture **700**. Further, the lance **102** is capable of entering the mixer **702** while the mixer is turning or when it is stationary. Additionally, the driver of the truck is afforded greater tolerance in maneuvering the truck **101** into a desired position.

Once the lance **102** is properly positioned in the mixer **702**, the controller **116** issues a command causing the cryogenic fluid to be injected into the concrete mix in the mixer **702**. Once the concrete mix is cooled to the desired temperature the controller **116** issues a signal to stop the injection of the fluid. The controller **116** then issues a signal to retract the lance **102** from the mixer **702**. The operator is then free to move the truck **704**, or pour the concrete. It is contemplated that for each of the steps in the operation of the injection system **100**, the controller **116** provides output to the operator. In

this way, the operator is made aware of which step of the injection process is currently being performed. For example, when the injection is completed, the controller **116** may sound an audible signal (which may be a recorded human voice announcing completion of the process).

5

The foregoing sequence of operation is merely illustrative and persons skilled in the art will recognize other embodiments within the scope of the invention. For example, instead of driving through the opening **210**, a truck may back up into the desired position. Further, instead of inserting the lance **102** into the mixer aperture **700**, the mixer **702** may include a separate opening for receiving the lance **102** or the injection nozzle **112**.

During a concrete pour the injection system **100** may be brought to the site of the pour. Accordingly, it is contemplated that the injection system **100** is portable. To this end, the injection system **100** can adapted to be an integral part of a truck or a trailer (not shown) so that it is easily transported to the pour location. Transportation and setup may be further facilitated by configuring the injection system **100** to be easily assembled and disassembled. For example, the injection system **100** may be modularized as a base portion (e.g., the support assembly **106**) and a mounted/suspended portion (e.g., the lance support assembly **104** and carriage **200**). Additionally, or alternatively, portions of the injection system **100** may be collapsible (e.g., folding or telescopic). Additionally, or alternatively, the injection system **100** may be fitted with quick-disconnect fittings for the coupling to the fluid supply **118**. Thus, the fluid supply may be transported separately and once a fluid supply is consumed, the empty fluid supply **118** may be quickly disconnected and a new fluid supply may be quickly connected to the injection **100**.

Figure 12 depicts a flow chart of steps of the cooling process according to one embodiment of the present invention. The first step **1200** an orientation of the lance **102** adjusts relative to the concrete mixer **702**. In the second step **1202**, the lance **102** extends to insert the injection nozzle **112** into the concrete mixer **702**. In the third step **1204**, the concrete mix cools by

flowing a cooling fluid from the fluid source **118** out of the injection nozzle and into the concrete mixer. The fourth step **1206** monitors the characteristics of the cooling to detect an endpoint of the cooling process. In the fifth step **1208** the lance retracts from the concrete mixer upon detecting the end point.

5

In other embodiments it is contemplated that the injection system is used to inject water, food and beverage products, hydrocarbon products, gravel, sand, other minerals, or any other products contemplated by one of skill in the art.

10

It will be understood that many additional changes in the details, materials, steps, and arrangement of parts, which have been herein described and illustrated in order to explain the nature of the invention, may be made by those skilled in the art within the principle and scope of the invention as expressed in the appended claims. Thus, the present invention is not intended to be limited to the specific embodiments in the examples given above and/or the attached drawings.

15

Claims:

1. An apparatus for injecting fluid into a concrete mixing container, comprising:
- 5 a) a support structure comprising:
- i) a leg assembly having at least two legs; and
- ii) a lance support assembly pivotally suspended between the two legs; and
- b) a lance disposed on the lance support assembly; the lance
- 10 being configured for reciprocating axial travel so that the lance has a retracted position and an extended position for fluid injection into the concrete mixing container, wherein the lance comprises:
- i) a fluid path for flowing a concrete cooling fluid
- 15 therethrough; and
- ii) an injection nozzle coupled to the fluid path; wherein the cooling fluid is injected into the concrete mixing container through the injection nozzle.
- 20 2. The apparatus of claim 1, further comprising a lifting mechanism configured to vertically actuate the lance support assembly relative to the leg assembly.
3. The apparatus of claim 1, further comprising a carriage disposed
- 25 on the lance support assembly; wherein the lance is disposed on the carriage and wherein the carriage is configured for bidirectional travel orthogonal to the reciprocating axial travel of the lance.
4. The apparatus of claim 3, further comprising an actuator
- 30 coupled to the carriage and configured for actuating the carriage in the bidirectional travel.

5. The apparatus of claim 1, further comprising an actuator coupled to the lance support assembly and configured to adjust an alignment of the lance relative to an opening of the concrete mixing container by pivoting the lance support assembly to achieve a desired angular orientation of the lance relative to the opening of the concrete mixer.

6. The apparatus of claim 1, further comprising:

c) an actuator coupled to the lance support assembly and configured to adjust an alignment of the lance relative to an opening of the concrete mixing container by pivoting the lance support assembly to achieve a desired angular orientation of the lance relative to the opening of the concrete mixer; and

d) a lifting mechanism configured to vertically actuate the lance support assembly relative to the leg assembly.

7. The apparatus of claim 6, further comprising a carriage disposed on the lance support assembly; wherein the lance is disposed on the carriage and wherein the carriage is configured for bidirectional travel orthogonal to the reciprocating axial travel of the lance.

8. The apparatus of claim 7, further comprising an actuator coupled to the carriage and configured for actuating the carriage in the bidirectional travel.

9. The apparatus of claim 1, further comprising a controller configured to issue command signals to actuate the lance and the lance support assembly.

10. The apparatus of claim 9, wherein the controller is programmed with a cooling fluid injection sequence which, when executed, orients the lance relative to an opening of the concrete mixing container and inserts at least the injection nozzle into the concrete mixing container.

11. The apparatus of claims 1, wherein the lance support assembly and the two legs define a height adjustable opening adapted to accommodate the concrete mixing container.

5 12. The apparatus of claims 11, wherein the concrete mixing container is a concrete truck.

13. An apparatus for injecting fluid into a concrete mixing container, comprising:

10 a) a lance configured for reciprocating axial travel so that the lance has a retracted position and an extended position for fluid injection into the concrete mixing container, wherein the lance comprises:

15 i) a tube defining a fluid path for flowing a concrete cooling fluid therethrough, the tube being formed of a material suitable for transporting a cryogenic fluid through the fluid path; and

ii) an injection nozzle coupled to the fluid path; wherein the cooling fluid is injected into the concrete mixing container through the injection nozzle; and

20 b) a support structure for supporting the lance, wherein the support structure is adjustable in at least one direction.

14. The apparatus of claim 13, further comprising a piston-type actuator connected to the lance and configured to actuate the lance in the reciprocating axial travel.

15. The apparatus of claim 13, further comprising:

30 c) a support assembly disposed on the support structure and wherein the lance is mounted on the support assembly; and

d) a carriage slidably disposed on the support assembly and capable of bidirectional travel orthogonal to the reciprocating axial travel of the lance.

16. The apparatus of claim 13, wherein the support structure is at least one of vertically adjustable, horizontally adjustable, and rotationally adjustable.

5

17. The apparatus of claim 13, wherein the support structure comprises:

- i) a leg assembly; and
- ii) a support assembly disposed on the leg assembly; wherein the lance is mounted on the support assembly.

10

18. The apparatus of claims 17, wherein the support assembly defines an adjustable height to accommodate the concrete mixing container.

15

19. The apparatus of claims 18, wherein the concrete mixing container is a concrete truck.

20. The apparatus of claim 13, wherein the mixer is a concrete truck.

20

21. The apparatus of claim 13, wherein the fluid is a cryogenic fluid.

22. The apparatus of claim 13, wherein the fluid is liquid nitrogen.

25

23. The apparatus of claim 13, wherein a control device operates the apparatus.

24. The apparatus of claim 23, wherein the control device is operable at a remote location relative to the lance and support structure.

30

25. The apparatus of claim 23, wherein the control device is configured to issue command signals to actuate the lance and the support structure.

26. The apparatus of claim 23, wherein the control device is configured to issue command signals to actuate the flow of the concrete cooling fluid.

5

27. The apparatus of claim 23, further comprising a sensor for monitoring the concrete mixing container.

28. The apparatus of claim 23, wherein the controller is
10 programmed with a cooling fluid injection sequence which, when executed, orients the lance relative to an opening of the concrete mixing container and inserts at least a portion of the lance into the concrete mixing container.

29. An injection system for injecting a cooling fluid into a mixture
15 located in a container, comprising:

- a) a tubular with an inlet nozzle and an outlet nozzle and defining a central fluid path fluidly coupled to the inlet nozzle and the outlet nozzle and adapted for flowing the cooling fluid therethrough;
- b) a support carriage for supporting the tubular, the tubular being
20 moveable longitudinally relative to the support carriage;
- c) a support assembly for supporting the carriage, the support carriage being moveable relative to the support assembly;
- d) a lifting mechanism having the support assembly pivotally
25 attached thereto and configured to vertically actuate the support assembly;
- e) one or more legs supporting the lifting mechanism; and
- f) a controller for actuating the tubular, the support carriage and the lifting mechanism; wherein the controller is programmed with
30 a cooling fluid injection sequence for causing the cooling fluid to be flowed through the central fluid path of the tubular and into contact with the mixture.

30. The injection system of claim 29, further comprising a sensor in communication with the controller and configured for sensing at least one condition in the mixture and providing signals regarding the sensed condition to the controller.

5

31. The injection system of claim 29, wherein the controller is configured to execute the cooling fluid injection sequence to orient the lance relative to an opening of the container and insert at least the injection nozzle into the container.

10

32. The injection system of claim 29, wherein the mixture is concrete.

33. A method for cooling a concrete mixture, comprising:

15

a) providing an injection system, comprising:

i) a support structure;

ii) a lance comprising a fluid path and an injection nozzle fluidly coupled to the fluid path; the lance being movably disposed on the support structure and being capable of movement relative to the support structure in at least one direction; and

20

iii) a fluid source fluidly coupled to the fluid path of the lance;

b) adjusting a height of the lance relative to a concrete mixer;

c) adjusting an alignment of the injection nozzle relative to an opening of the concrete mixer;

25

d) extending the lance to insert at least the injection nozzle into the concrete mixer; and

e) flowing a cooling fluid from the fluid source through the fluid path and out of the injection nozzle, whereby the cooling fluid is injected into the concrete mixer.

30

34. The method of claim 33, wherein adjusting the height and adjusting the alignment comprises issuing respective command signals from a controller.

5 35. The method of claim 33, wherein adjusting the height comprises issuing a command signal from a controller to a lifting mechanism coupled to the support structure.

10 36. The method of claim 33, wherein adjusting the alignment comprises at least one of adjusting an angular orientation of the lance and adjusting a lateral orientation of the lance.

15 37. The method of claim 33, wherein adjusting the alignment occurs during the extension of the lance.

38. The method of claim 33, wherein the support structure comprises a leg assembly having at least two legs and a lance support assembly pivotally suspended between the two legs, the lance being disposed on the lance support assembly; and wherein adjusting the alignment
20 comprises pivoting the lance support assembly to achieve a desired angular orientation of the lance relative to the opening of the concrete mixer.

39. The method of claim 38, adjusting the height comprises increasing the height of an opening defined by the lance support assembly
25 and the two legs to accommodate the concrete mixer wherein the concrete mixer is a cement truck.

40. The method of claim 33, the mixer is a cement truck.

30 41. The method of claim 40, wherein adjusting the height and adjusting the alignment comprises issuing respective command signals from a controller, the controller being operated from a cab of the cement truck.

42. The method of claim 33, wherein adjusting the height and adjusting the alignment comprises issuing respective command signals from a controller, the controller being activated automatically upon the mixer being located at a predefined proximity to the injection system.

5

43. A method for cooling a concrete mixture, comprising:

a) providing an injection system, comprising:

i) a support structure;

10

ii) a lance comprising a fluid path and an injection nozzle fluidly coupled to the fluid path; the lance being movably disposed on the support structure and being capable of movement relative to the support structure in at least one direction; and

iii) a fluid source fluidly coupled to the fluid path of the lance;

15

b) adjusting an orientation of the lance relative to a concrete mixer;

c) extending the lance to insert at least the injection nozzle into the concrete mixer;

d) initiating a concrete cooling process comprising flowing a cooling fluid from the fluid source through the fluid path and out of the injection nozzle, whereby the cooling fluid is injected into the concrete mixer;

20

e) monitoring at least one characteristic of the concrete cooling process to detect an endpoint of the concrete cooling process; and

25

f) retracting the lance from the concrete mixer upon detecting the endpoint.

44. The method of claim 43, further including sensing the conditions of concrete mix.

30

45. The method of claim 43, wherein the monitoring comprises sensing a temperature of the concrete mixture.

46. The method of claim 45, wherein sensing the temperature is done with a laser temperature sensor mounted to the lance.

47. The method of claim 43, wherein detecting the endpoint of the concrete cooling process comprises detecting a desired temperature of the concrete mixture.

48. The method of claim 43, wherein adjusting the orientation of the lance comprises:

- i) detecting a relative position of the lance and the opening using sensing equipment; and
- ii) responsively moving the lance into a desired position relative to the opening.

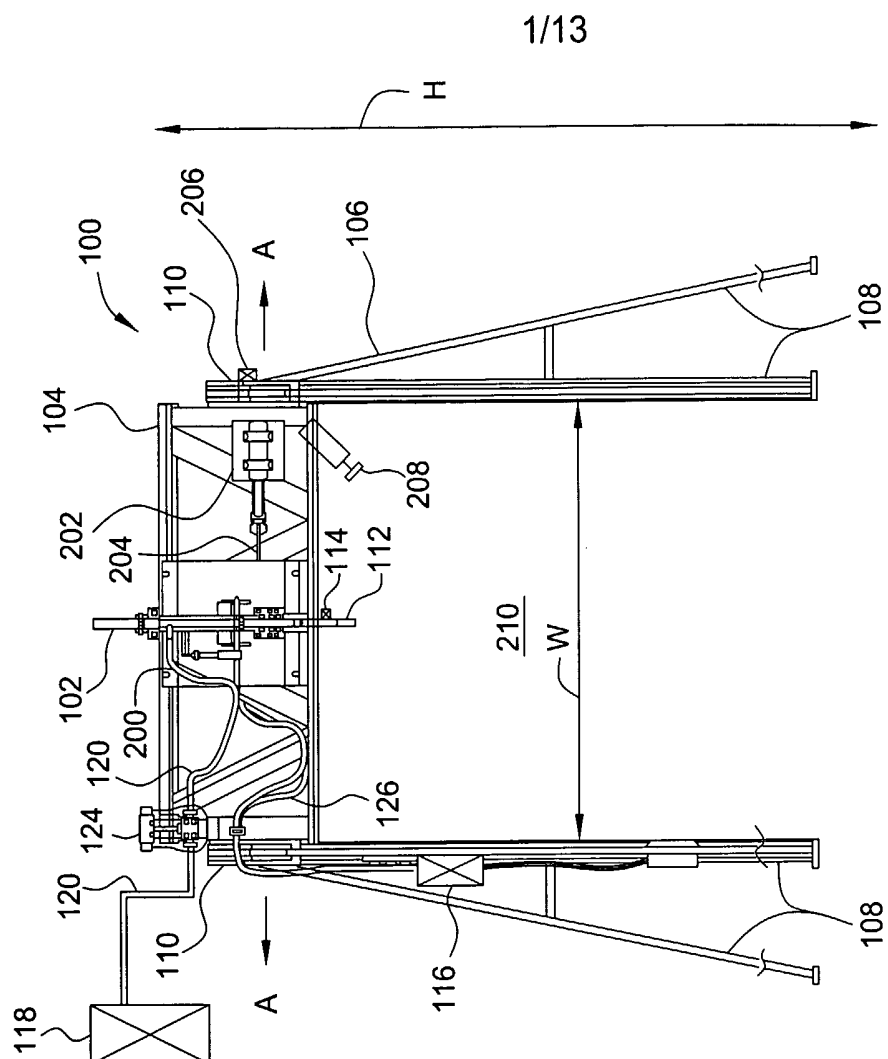


FIG. 2

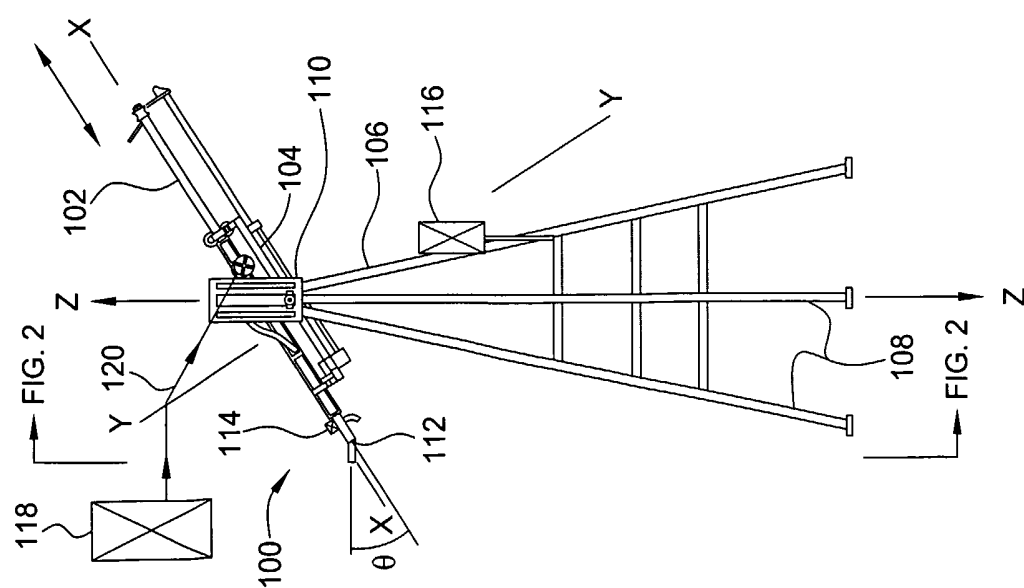


FIG. 1

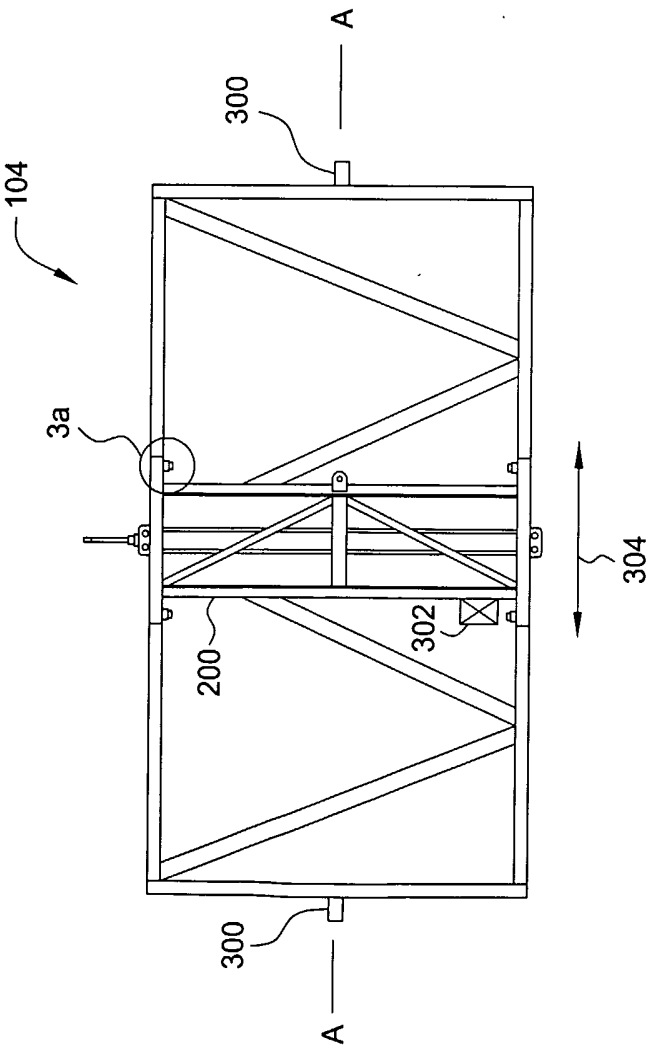


FIG. 3


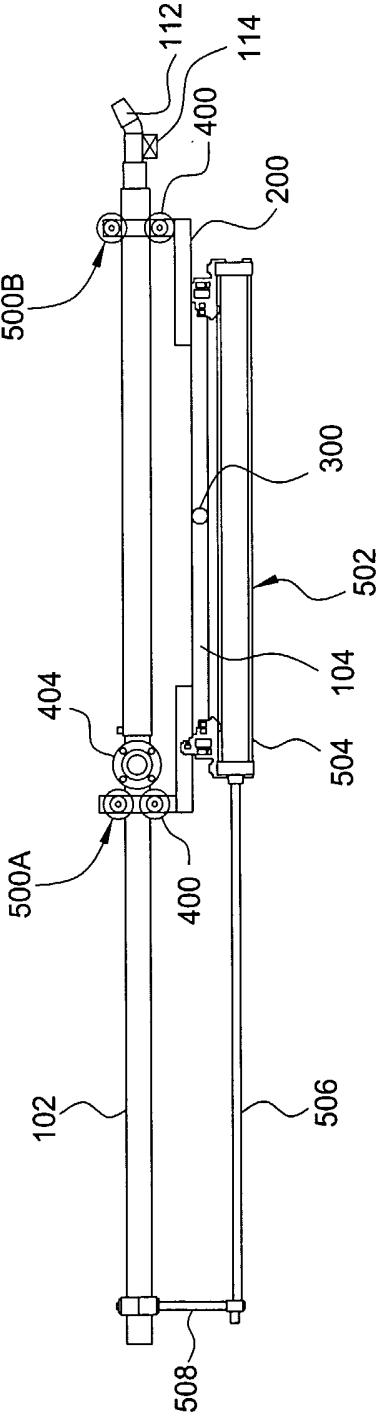
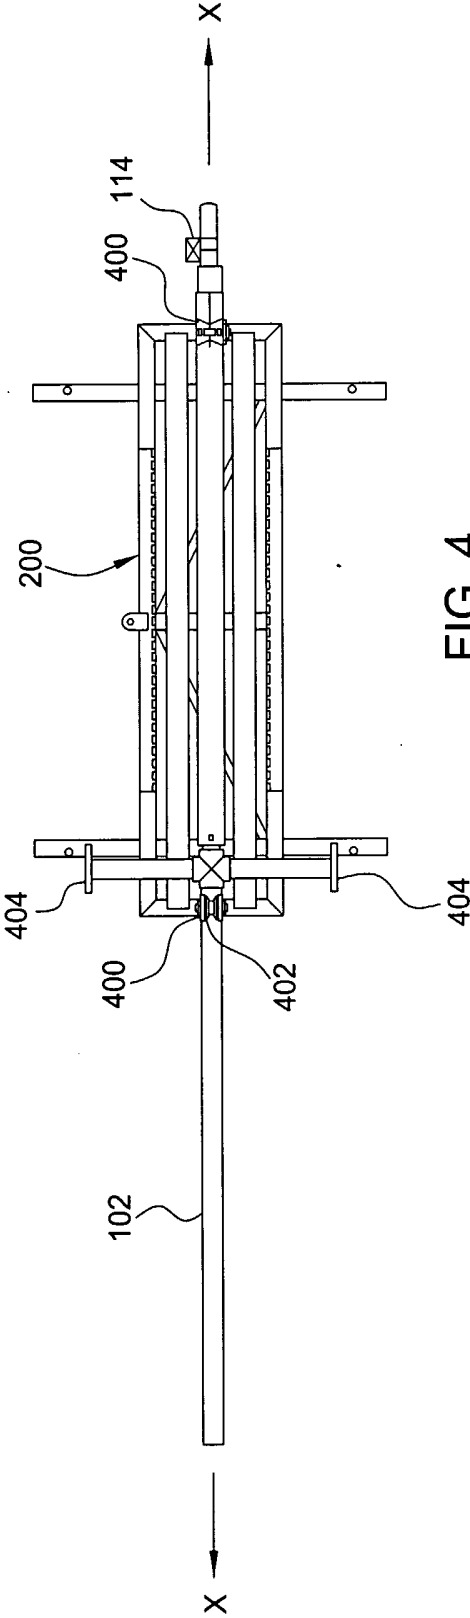


FIG. 3a



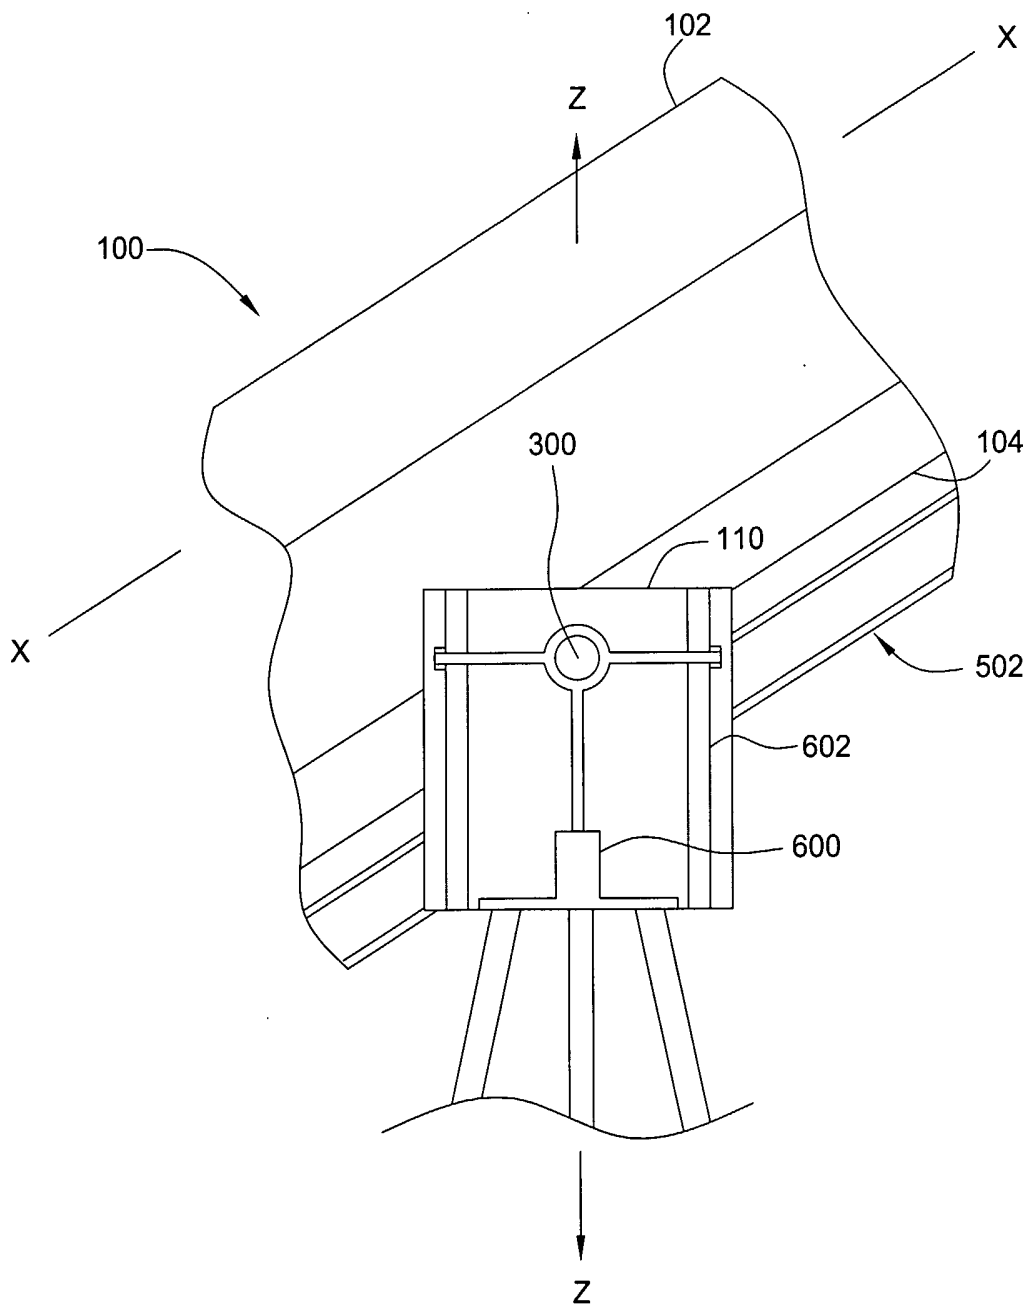


FIG. 6A

5/13

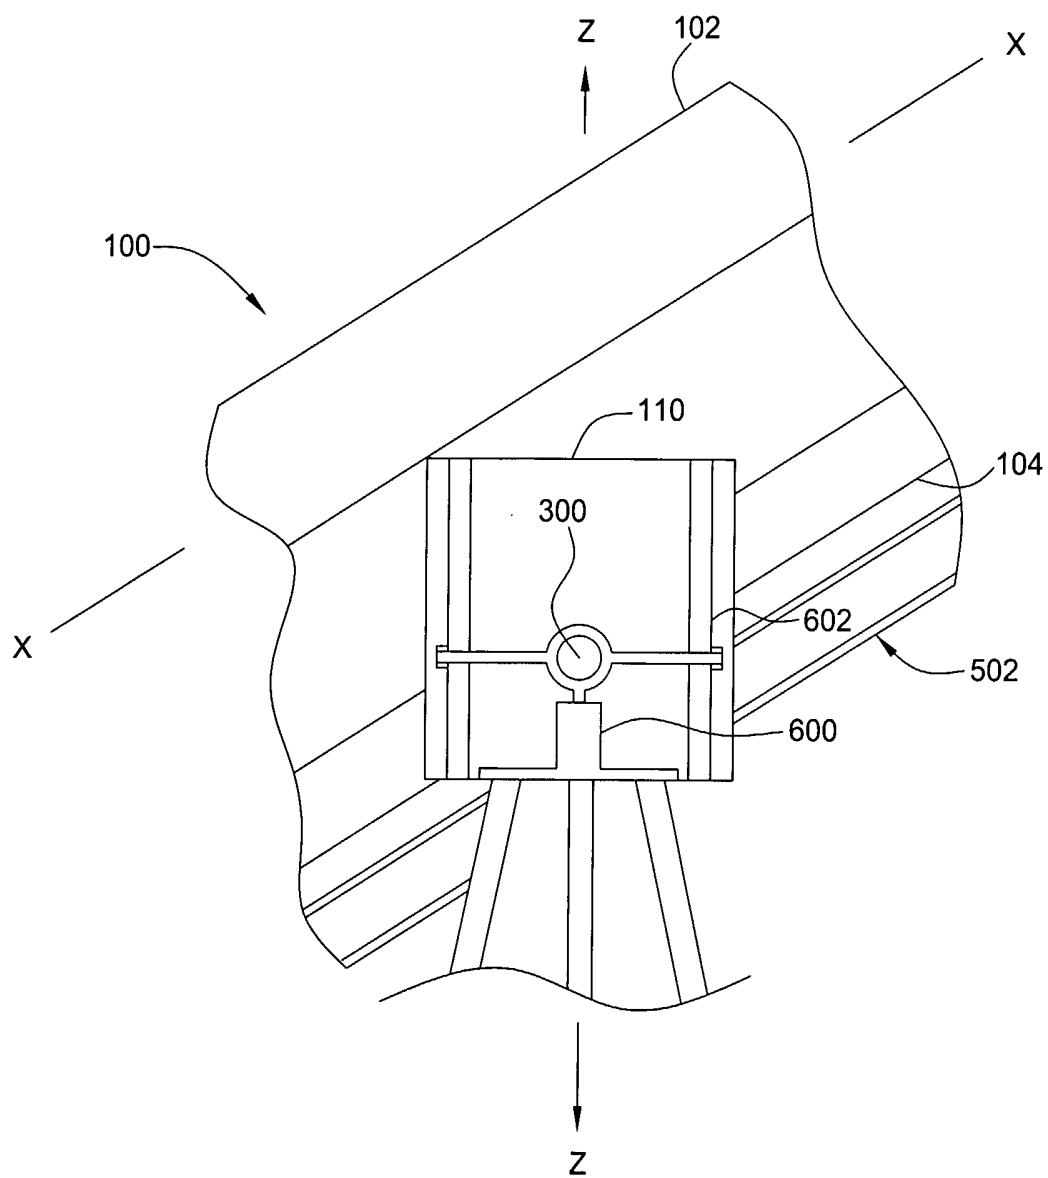


FIG. 6B

6/13

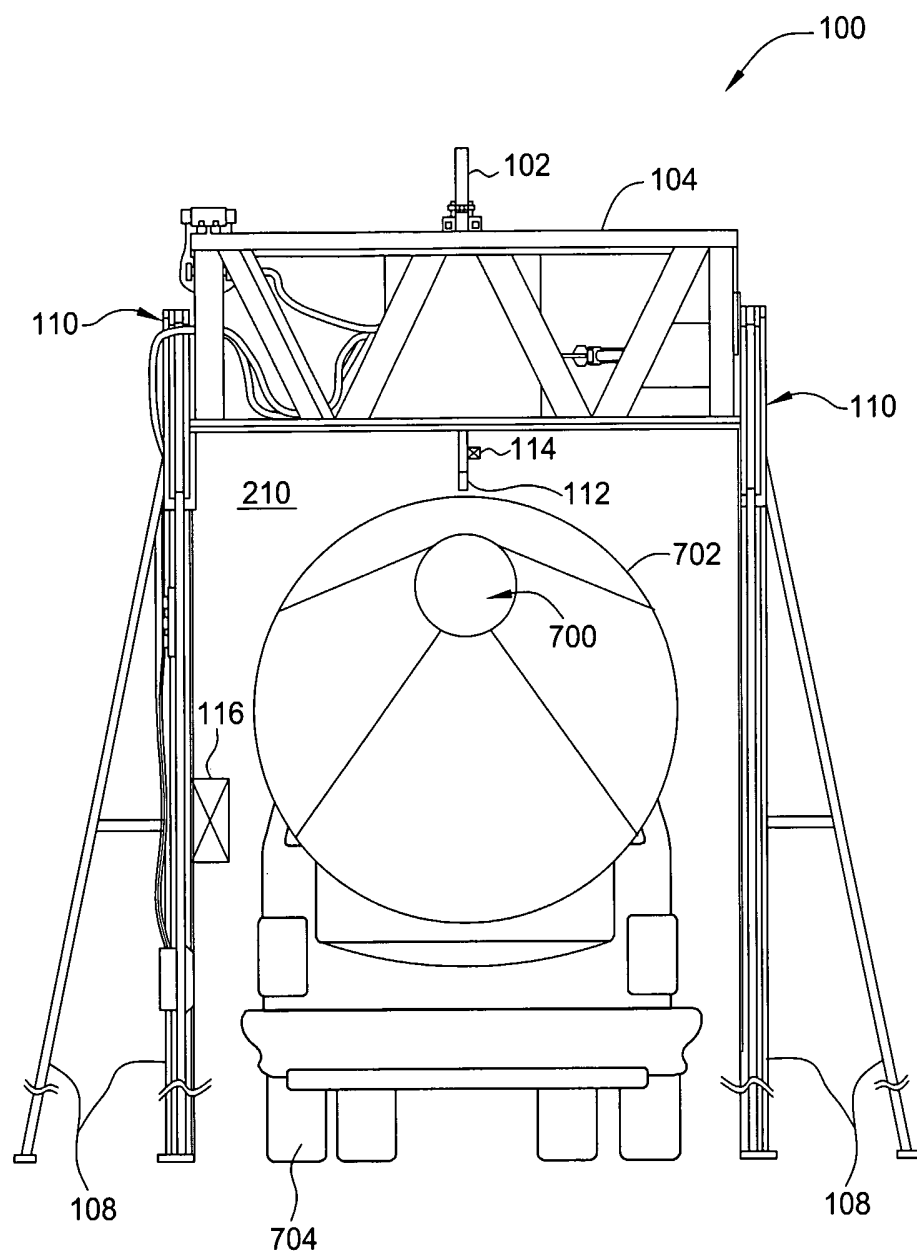


FIG. 7A

7/13

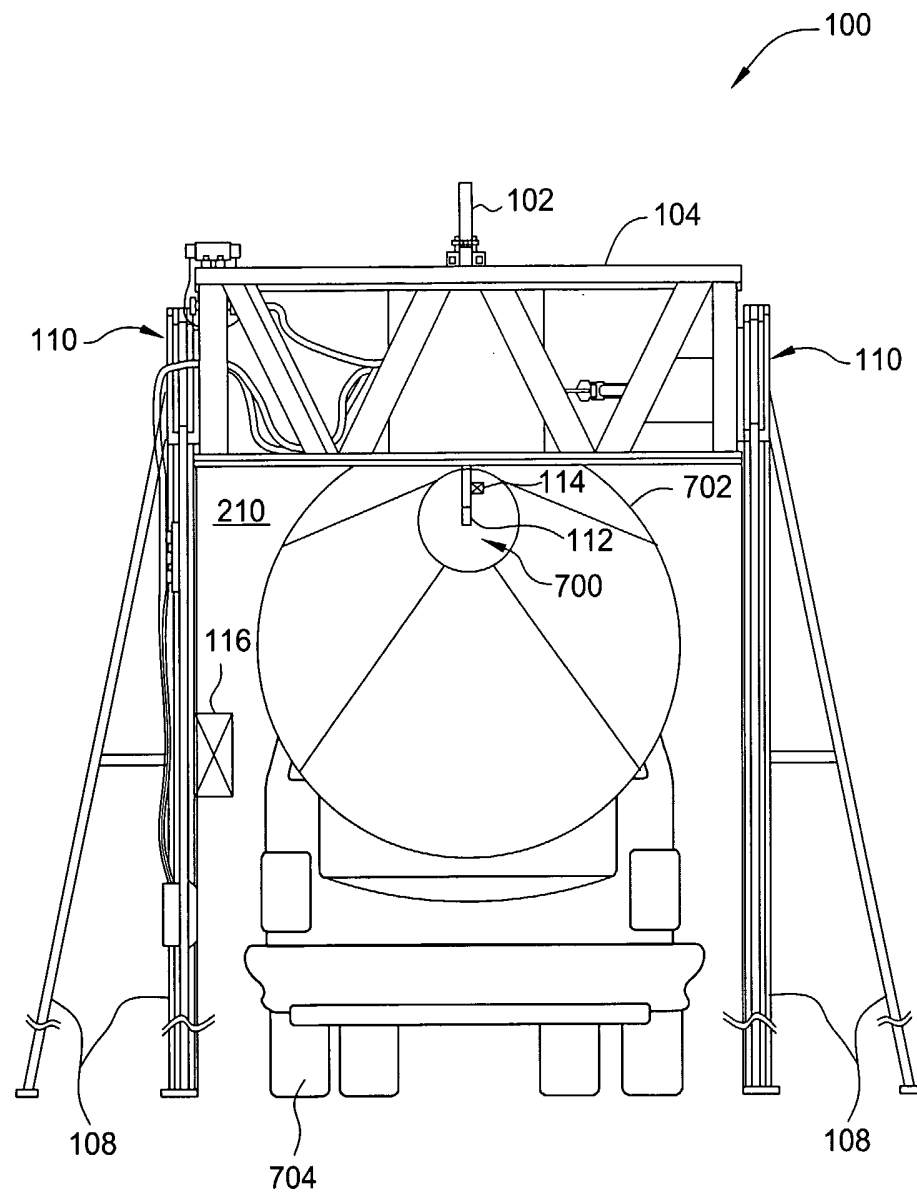
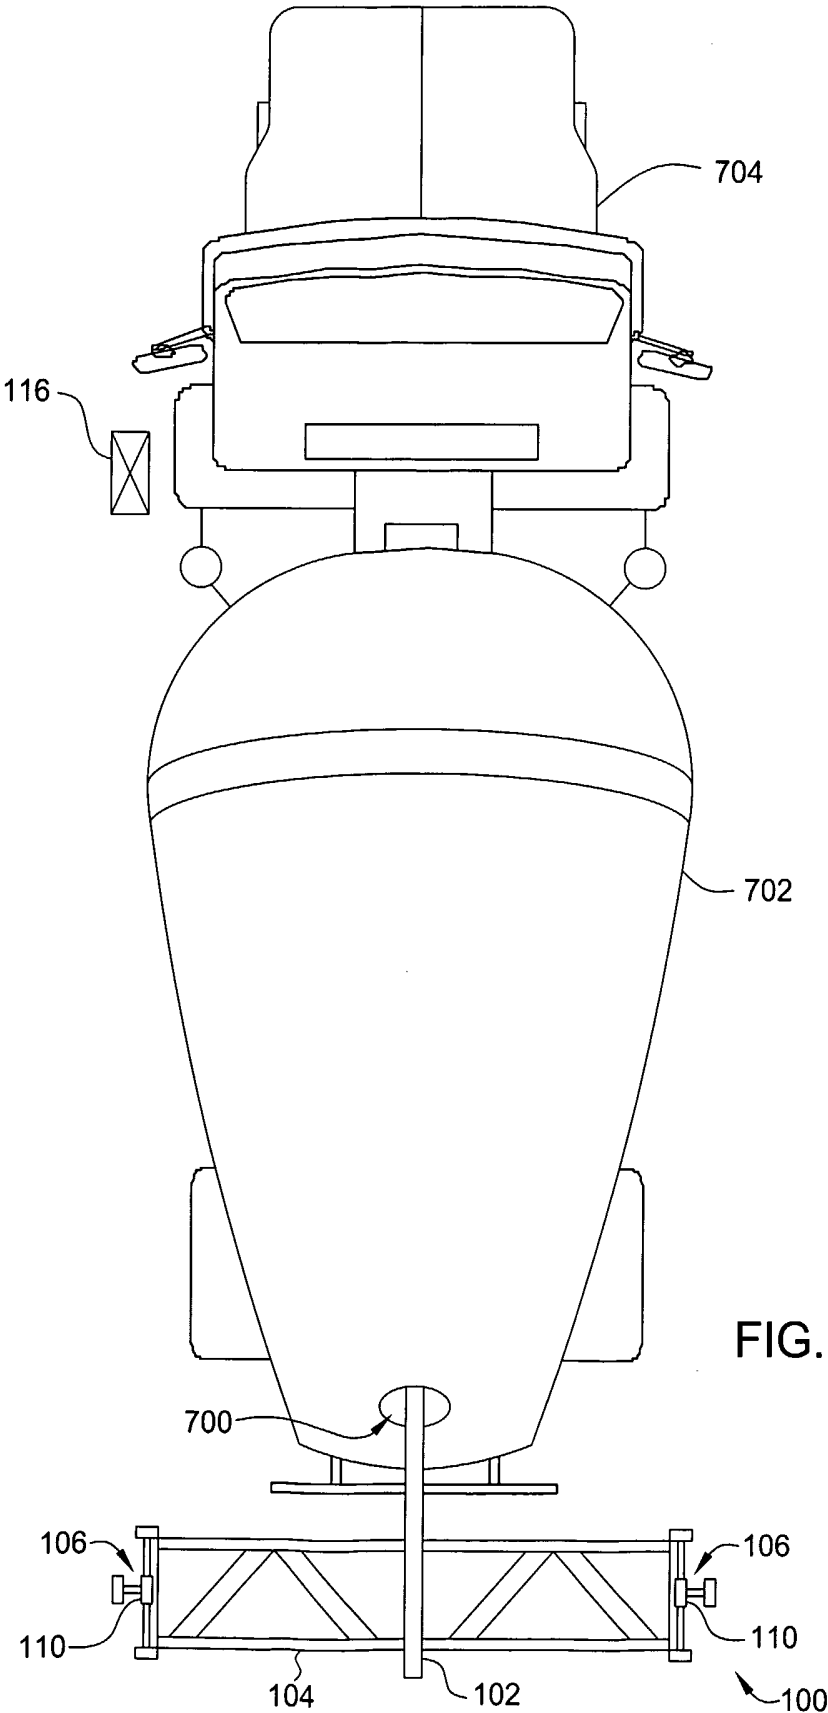


FIG. 7B

8/13



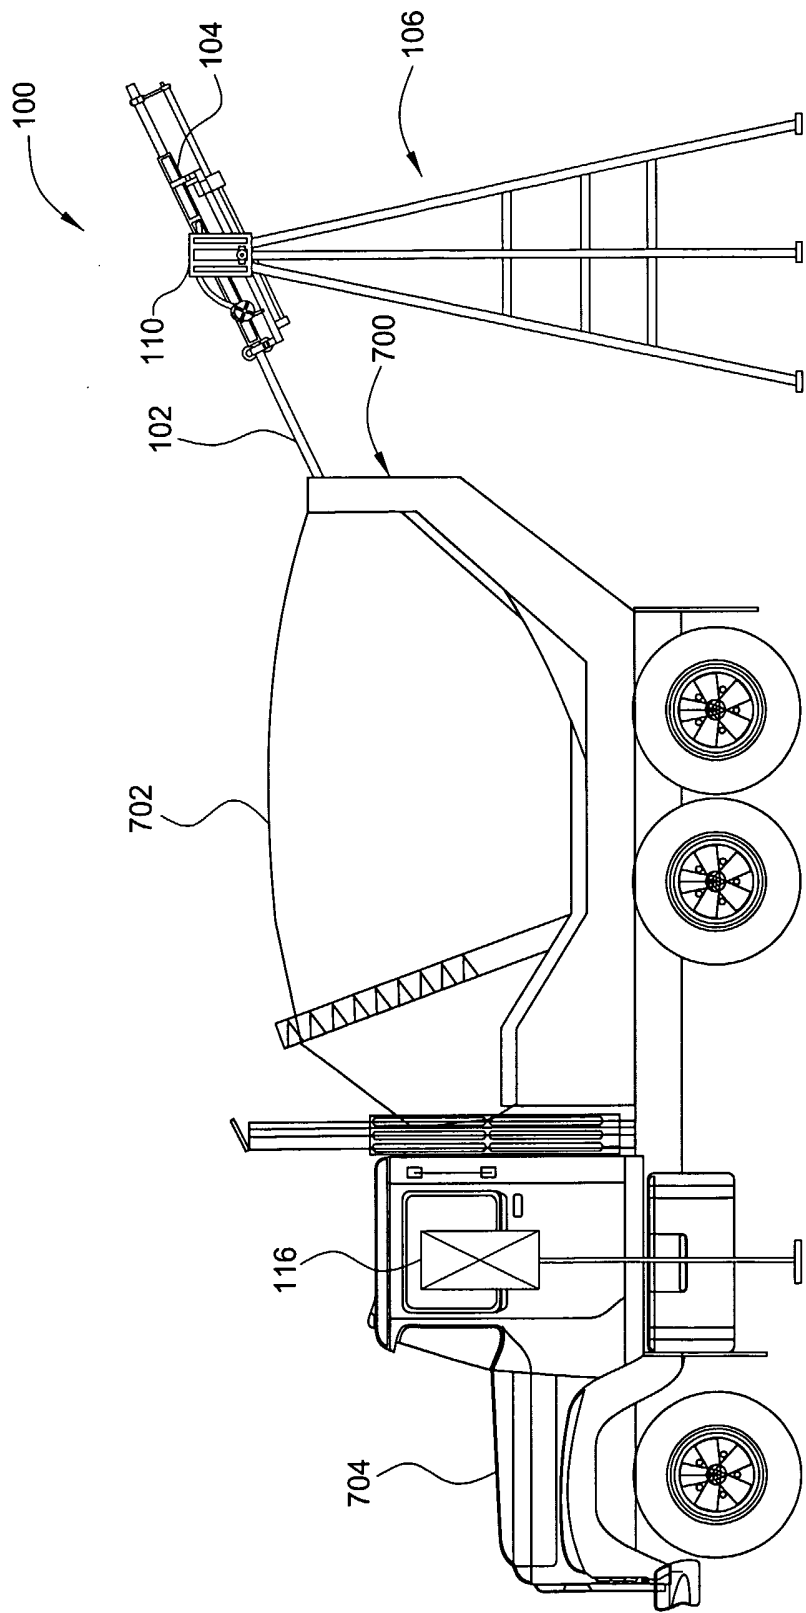


FIG. 8B

10/13

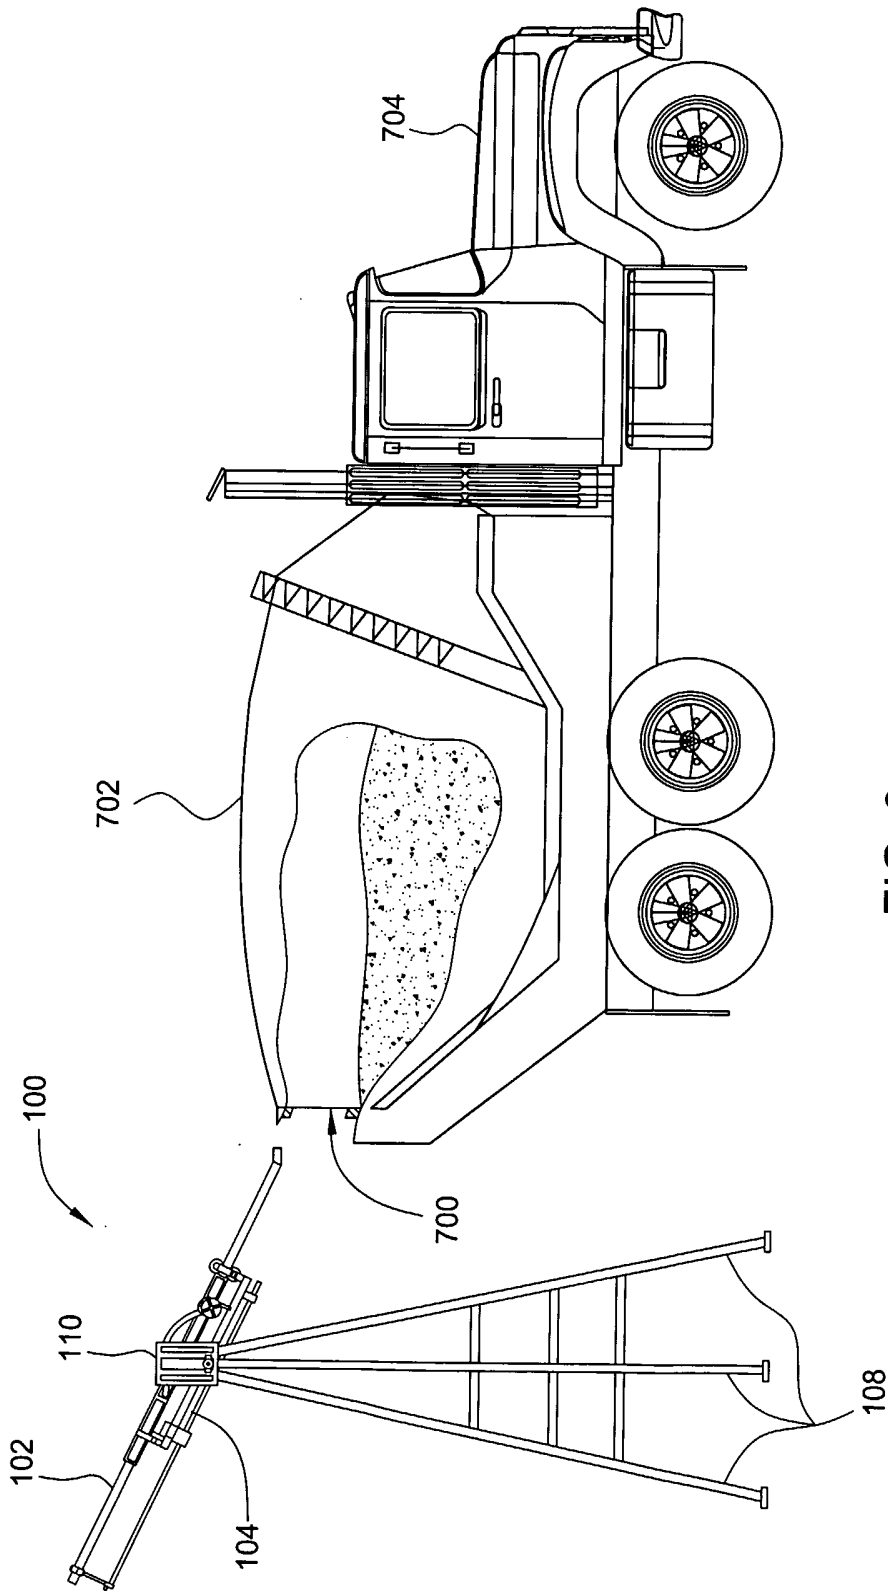


FIG. 9

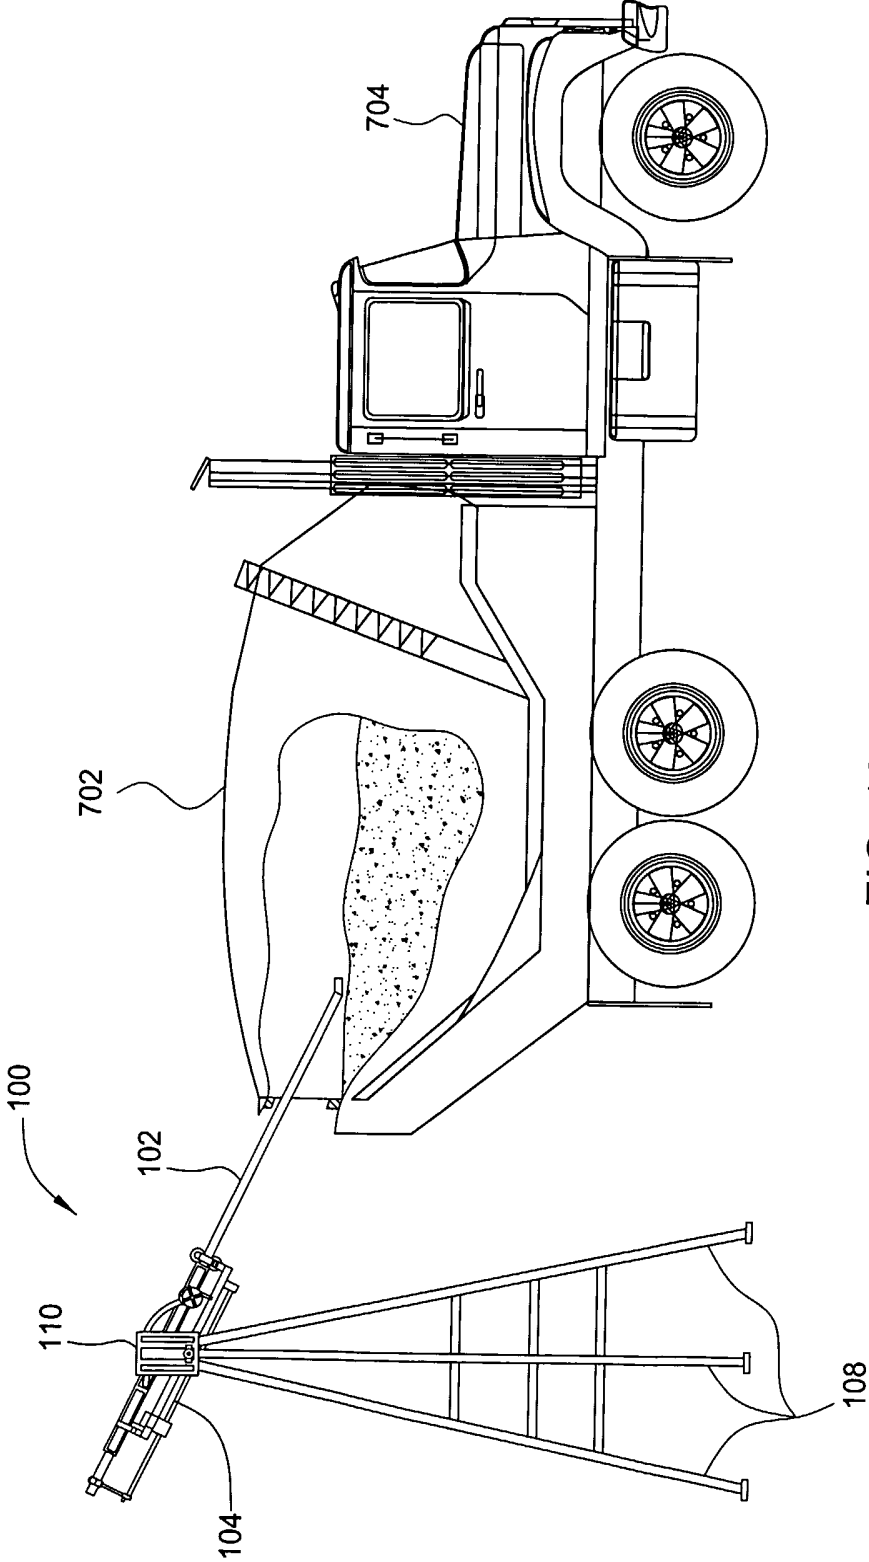


FIG. 10

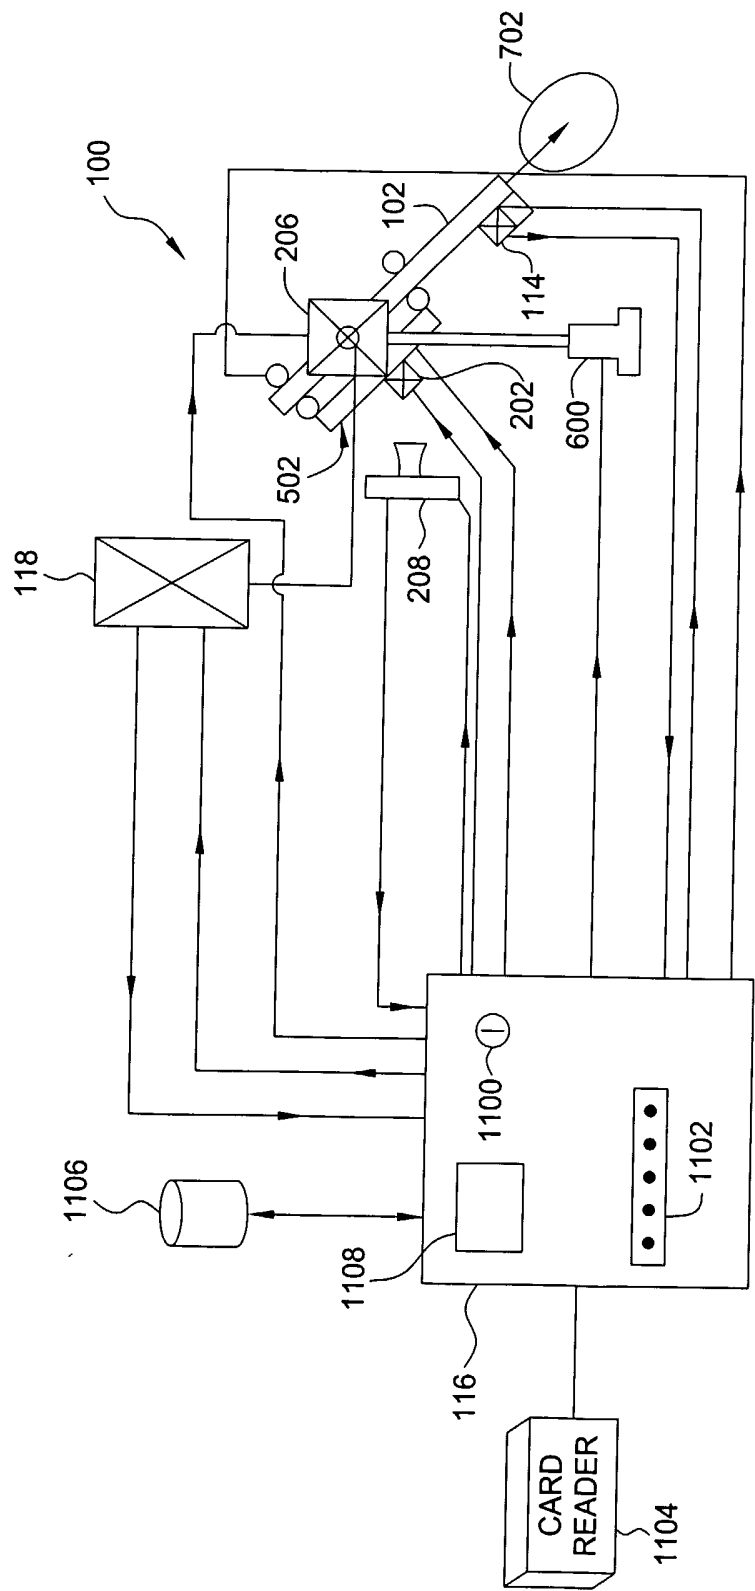


FIG. 11

13/13

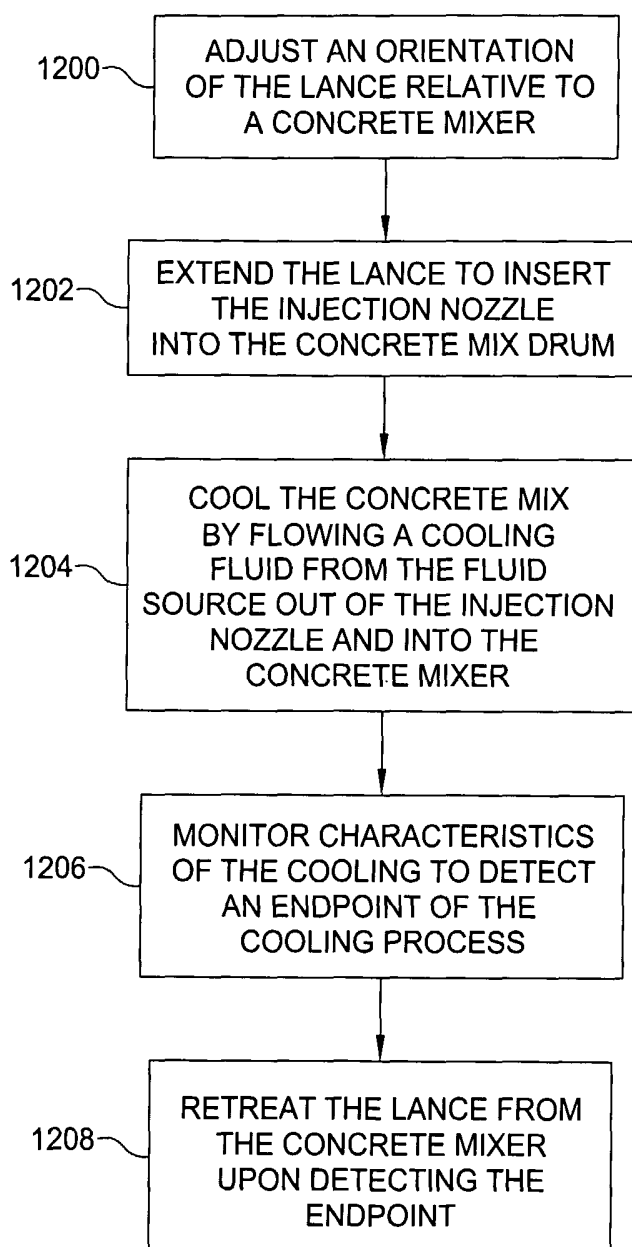


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2006/000370

A. CLASSIFICATION OF SUBJECT MATTER
INV. B28C5/46 B01F15/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B28C C04B B01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 61 229506 A (OHBAYASHIGUMI LTD) 13 October 1986 (1986-10-13)	1, 3, 13, 15-17, 20
Y	the whole document	2, 6, 18, 29, 32-36, 40
Y	WO 03/061925 A (WATTKE, MARTIN, JAMES; CAMPBELL, WILLIAM, WARD) 31 July 2003 (2003-07-31) page 7, line 29 - page 8, line 14; figure 3 page 9, line 1 - line 13 ----- -/--	2, 6, 18, 29, 32-36, 40

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

29 August 2006

Date of mailing of the international search report

05/09/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Orij, J

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2006/000370

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 679 (M-1728), 21 December 1994 (1994-12-21) -& JP 06 270128 A (OSAKA GAS CO LTD; others: 01), 27 September 1994 (1994-09-27)	1,5,13, 14,16, 17,20-22
A	abstract; figures 1,2 paragraph [0014] - paragraph [0017] paragraph [0025] - paragraph [0028] -----	29,33
Y	GB 2 106 887 A (THE * BOC PLC) 20 April 1983 (1983-04-20) page 3, line 21 - line 49; claims 1,2,9,11,15,17; figures page 3, line 71 - page 4, line 93 -----	1,5,9, 10, 12-14, 17, 19-25, 28,43
Y	PATENT ABSTRACTS OF JAPAN vol. 013, no. 360 (M-858), 11 August 1989 (1989-08-11) -& JP 01 120304 A (OHYAYASHI CORP), 12 May 1989 (1989-05-12)	1,5,9, 10, 12-14, 17, 19-25, 28,43
A	abstract -----	29,33

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2006/000370

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 61229506	A	13-10-1986	NONE	
WO 03061925	A	31-07-2003	NONE	
JP 06270128	A	27-09-1994	JP 2747409 B2	06-05-1998
GB 2106887	A	20-04-1983	NONE	
JP 01120304	A	12-05-1989	JP 1828224 C	15-03-1994
			JP 5035650 B	27-05-1993