

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 February 2009 (26.02.2009)

PCT

(10) International Publication Number
WO 2009/026000 A1

(51) **International Patent Classification:**
H04L 9/08 (2006.01) *H04L 29/06* (2006.01)
H04N 5/445 (2006.01)

(74) **Agent: ROGITZ, John, L.;** Rogitz & Associates, 750 B Street, Suite 3120, San Diego, CA 92101 (US).

(21) **International Application Number:**
PCT/US2008/072451

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW

(22) **International Filing Date:** 7 August 2008 (07.08.2008)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
11/842,408 21 August 2007 (21.08.2007) US

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) **Applicants** (for all designated States except US): **SONY CORPORATION** [JP/JP]; 1-7-1 Konan, Minato-ku, Tokyo, 108-0075 (JP). **SONY ELECTRONICS INC.** [US/US]; 1 Sony Drive, Park Ridge, NJ 07656 (US).

(72) **Inventor; and**

(75) **Inventor/Applicant** (for US only): **IWAMURA, Ryuichi** [JP/US]; 11864 Paseo Lucido #2083, San Diego, CA 92128 (US).

Published:
— with international search report

(54) **Title:** NEAR FIELD REGISTRATION OF HOME SYSTEM AUDIO-VIDEO DEVICE

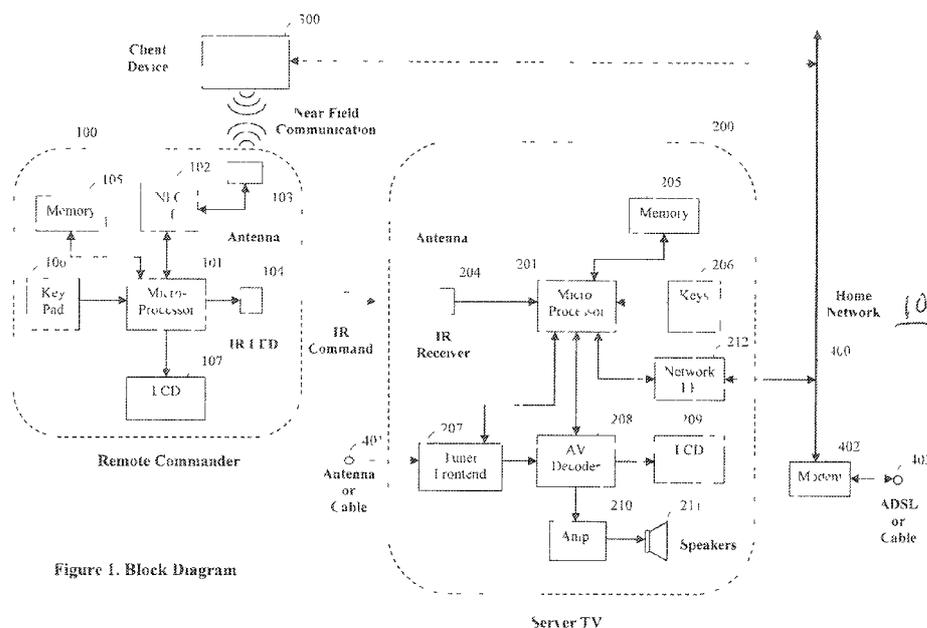


Figure 1. Block Diagram

(57) **Abstract:** A near field communication (NFC) sticker (350) which stores a key is attached to a new client device (300). A remote commander (100) in a home network reads the key using a NFC interface (102) and IR-transmits it to a home network server (200). Once the client is connected to the network, it encrypts its own device information with the key and sends the encrypted information to the server, which decrypts the data with the key sent from the remote commander. In this way, client device registration is executed easily and securely.

WO 2009/026000 A1

NEAR FIELD REGISTRATION OF HOME SYSTEM AUDIO-VIDEO DEVICE

I. FIELD OF THE INVENTION

The present invention relates generally to using near field communications (NFC) to register audio-video devices with home networks.

II. BACKGROUND OF THE INVENTION

Attaching new devices such as new digital video disk (DVD) players or digital video recorders (DVRs) to a network such as a home entertainment network can be a trying experience even for engineers, let alone the customers for whom these products are intended. This is because network registration can entail entering long strings of alpha-numeric characters for IP addresses, wired equivalent privacy (WEP) keys, etc.

As recognized herein, to save the user from the above drudgery, near field communication (NFC) may be used, in which the above exchanges can be undertaken automatically between the device sought to be registered and the network using NFC principles such as but not limited radiofrequency identification (RFID) and/or Sony's "Felica" NFC technology. As also recognized herein, it would be desirable to effect NFC registration without requiring the system server (typically the TV) to be pre-fitted with NFC capability, since most are not. Furthermore, as understood herein NFC registration between a relatively large device and a relatively large server entails moving one the large objects sufficiently close to the other to permit NFC. With these recognitions in mind, the invention herein is provided.

SUMMARY OF THE INVENTION

A near field communication (NFC) sticker which stores a key is attached to a new client device. A remote commander in a home network reads the key using a NFC interface and IR~transmits it to a home network server. Once the client is connected to the network, it encrypts its own device information with the key and sends the encrypted information to the server, which decrypts the data with the key sent from the remote commander. In this way, client device registration is executed easily and securely.

Accordingly, a home network includes a hand-held portable remote commander. The remote commander includes a near field communication (NFC) element and a non-NFC wireless transmitter. A client device is sought to be registered with the network, with the client device including an NFC element storing an encryption key readable using NFC principles by the NFC element of the remote commander. A network server that does not have NFC capabilities and that has a wireless receiver receives the key from the non-NFC wireless transmitter of the remote commander.

The NFC element of the remote commander may be a NFC reader or a NFC reader/writer, and the server may be a digital TV. The non-NFC wireless transmitter may be an IR transmitter. In any case, the server can receive encrypted registration information from the client device over the network and decrypt the registration information using the key.

In another aspect, a key is obtained using NFC from a client device sought to be registered on a network. The key is sent to a registration server using a wireless, non-NFC, non-telephony communication mode and used to register the client device with the server.

In still another aspect, a portable intermediate communication device is disclosed that can be implemented by a wireless telephone or a TV remote commander. The device includes

a NFC element configured for receiving a key from a client device. The intermediate device also includes a non-NFC non-telephony wireless transmitter for transmitting the key to a server, and a processor for controlling the wireless transmitter.

The details of the present invention, both as to its structure and operation, can best be understood in reference to the accompanying drawings, in which like reference numerals refer to like parts, and in which:

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a non-limiting network in accordance with present principles;

Figures 2 and 3 are block diagrams of non-limiting client devices in accordance with present principles; and

Figure 4 is a timeline diagram showing the registration communication process.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring initially to Figure 1, a home network is shown, generally designated 10, which includes at least one client device 300 such as but not limited to a DVD player or PVR or video camera, at least one portable hand-held remote commander 100, and at least one network server 200 such as but not limited to a server TV.

Beginning with the remote commander 100, a microprocessor 101 is provided within the remote commander 100 as shown. As more fully disclosed below, the microprocessor 101 reads certain information from the client device 300 by means of a NFC antenna 303 and associated NFC interface 102. Then, as also described further below, the microprocessor 101

sends the information to the server TV 200 using a non-NFC wireless transmitter such as an IR transmitter 104 (which can be implemented by a light emitting diode (LED)) in accordance with IR communication principles known in the art.

The NFC interface 102/antenna 103, *in non-limiting* embodiments, may be implemented by a Sony "Felica" chip (also known as a "SUIICA" chip) that can be mounted inside or attached to the case of the remote commander 100 or that can be physically separate from the case and connected to the remote commander 100 via a cable such as a universal serial bus (USB) cable. Thus, an RFID writer/reader can be used to implement the present NFC components of the remote commander 100 and/or the NFC components of the client device 300 discussed further below.

In undertaking the present logic illustrated in Figure 4, the microprocessor 101 of the remote commander 100 executes a software program that may be stored in a memory 105 of the remote commander 100. The memory 105, which maybe, without limitation, solid state memory, may also store data such as information read from the client device 300. A keypad 106 is also provided on the remote commander 100 as shown that may be manipulated by a person to, e.g., input a command. The remote commander 100 may also be provided with an output device such as but not limited a liquid crystal display (LCD) 107 that may receive data from the microprocessor 101 to show a message, for example, "Key read", "Key sent to server", etc.

Turning now to the server 200, in one embodiment the server 200 is implemented by a digital TV that can receive audio/video (AV) signals from an antenna or cable network 401 that is tuned in a tuner/frontend 207. The signals are decoded in an AV decoder 208, with the

video part of the signals being sent to a TV display such as an LCD panel 209. The audio signals are amplified in an audio amplifier 210 and sent to speakers 211 as shown.

In accordance with digital TV principles known in the art, a TV microprocessor 201 controls the tuner/frontend 207 and the AV decoder 208. Furthermore, the TV microprocessor 201 receives data from an IR receiver 204, with the data representing signals including command signals (e.g., channel up/down, volume control, etc.) received from the IR transmitter 104 of the remote commander 100. The same types of command signals may also be input to the TV microprocessor 201 using manipulable keys 206 on the TV server 200.

In addition to providing output to the tuner frontend 207 and AV decoder 208, as shown in Figure 1 the TV microprocessor 201 may also communicate with a network interface 212 such as but not limited to an Ethernet interface. The network interface 212 is connected to a home network 400 as shown. The TV microprocessor 201 may also access a server memory 205 such as but not limited to disk-based or solid state memory to execute the present logic and to store data. In any case, the server 200 need not have NFC capabilities.

In some implementations, the home network 400 may be implemented as an Ethernet network or other wired network such as a powerline network. In other implementations the home network 400 may be implemented as a wireless network such as an IEEE 802.11-based network. In any case, the home network 400 can be connected to the Internet 403 using a modem 402 to permit the TV microprocessor 201 to access the Internet.

Having described a non-limiting illustrative remote commander 100 and server 200, attention is now drawn to Figures 2 and 3 for an understanding of two non-limiting embodiments of the client device 300 shown in Figure 1. In accordance with present principles, the client device 300 includes a NFC element 350. In the embodiment shown, the

element 350 may be a sticker that can be physically adhered to the client device 300 on the inner or outer surface of the housing of the client device 300. The NFC element 350 may be, without limitation, a RFID reader or and RFID writer, and alternative to adhering it to the client device it may be connected to the client device using a cable such as a USB cable.

As shown, the NFC element 350 includes a NFC antenna 351 and an NFC module 352 that stores data, such as but not limited to an encryption key that preferably is factory-written into the module 352. Additionally, the client device 300 includes a client microprocessor 310 that can execute logic stored in a client memory 305, which may also store a copy of the key in the NFC module 352. Still further, the client device 300 may include a network interface 304 that is configured to communicate with the home network 400 and, hence, with the server TV 200 through the network 400. Additional non-limiting functional blocks maybe included in the client device 300. For example, if the client device 300 is a security camera, it may include a CMOS/CCD imager, an A-D converter, a video encoder, etc.

Figure 3 shows an alternate client device that in all essential respects maybe identical in function and structure to the client device shown in Figure 2, except that the client device 300 shown in Figure 3 may include, instead of the sticker 350, a NFC antenna 303 and NFC interface 302, with the above-mention key being stored in the client device memory 305 and sent to the remote commander 100 using the NFC interface 302 and the antenna 303.

In addition to the encryption key, the client device stores device information including, example, device name, type, serial number, MAC address, etc. The device information may be encrypted with the key, so that once the client device 300 is connected to the network 400, the client device can send its encrypted device information to the server TV 200 over the network 400. In non-limiting implementations, DES or AES encryption can be used. In less

preferred embodiments, both the key and the device information including, example, device name, type, serial number, MAC address, etc. can be sent using NFC to the remote commander 100 and from the remote commander 100 to the server 200 using IR.

Thus, in the preferred embodiment, the TV microprocessor 201 receives the key that is IR-transmitted from the remote commander 100 and stores it in the TV memory 205. The TV microprocessor 201 also receives the encrypted data from the client device 300 over the network 400. The microprocessor 201 decrypts the encrypted data with the key and registers the client device 300 as a new network device.

Figure 4 illustrates the above-discussed communications between these devices. First, the remote commander 100 is touched to the new client device 300 and the key is sent from the client device 300 to the remote commander 100 via NFC, as indicated at step (1). Then, at step (2) the key is IR-transmitted from the remote commander 100 to the server TV. Note that an adversary cannot monitor the IR message outside the room. The server TV 200 then broadcasts, e.g., a User Datagram Protocol (UDP) message over the network at step (3) to prompt the client device 300 to respond. At step (4) the client device 300 returns an appropriate UDP response and at step (5) sends the above-mentioned encrypted data to the server TV using, e.g., Transmission Control Protocol (TCP). The server returns a TCP acknowledge message to the client device 300 to let the client device know that the message was received, step (6).

Note that the UDP message exchange discussed above advantageously may be used because the server 200 and the client 300 do not know each other at the beginning of the communications. After the UDP message exchange, they know with whom they should communicate.

It is preferred that the IR communication discussed above is sufficiently fast and stable to send a 64-bit or longer encryption key.

The non-NFC communication method between the remote commander 100 and the server TV 200 is not limited to IR communication. A wireless communication, for example, so-called "ZigBee" communication, may be used. In the case of wireless non-NFC communication, it is advantageous that the remote commander and the server TV share another common key to prevent an adversary from monitoring wireless communication. For example, the server TV might show a key number on the screen. The user can enter the key number to the remote commander using the keypad 106. The original key of the client device can then be encrypted with this common key and sent to the server TV.

Optionally, the remote commander 100 may have e-payment capability. In this case, the remote commander can read a prepaid NFC card presented by the user. If a charge is successfully withdrawn, the remote commander IR-transmits a purchase ID to the server TV. The server TV can then access a pay-per-view program with the purchase ID and obtain a decoding permission.

In some implementations the remote commander hardware may be built in a wireless telephone, recognizing that some wireless phones already have a NFC interface and e-payment applications. A non-NFC wireless transmitter (e.g., the IR LED mentioned above) is supplied on the wireless phone in addition to its wireless telephony transmitter, such that the modified cell phone can then be used as the above-described remote commander.

It may now be appreciated that the system and method described above is easy to use. The user only needs to touch a new device with the remote commander to effect registration of the device. The system and method presented herein can easily register large, heavy,

non-portable devices, and is secure, because device information is encrypted and sent over the network. It is most difficult to connect an illegal device to the network. Also, the system and method herein is a low cost solution because, e.g., the server TV needs no NFC interface. And, if a cell phone is used, only an IR LED and small software addition are required.

While the particular NEAR FIELD REGISTRATION OF HOME SYSTEM AUDIO-VIDEO DEVICE is herein shown and described in detail, it is to be understood that the subject matter which is encompassed by the present invention is limited only by the claims.

WHAT IS CLAIMED IS:

1. A portable intermediate communication device (100), comprising:
 - at least one NFC element (102) configured for receiving at least one key from a client device (300);
 - at least one non-NFC non-telephony wireless transmitter (104) for transmitting the key to a server (200); and
 - a processor (101) controlling the wireless transmitter.
2. The device of Claim 1, wherein the device (100) is a TV remote commander.
3. The device of Claim 1, wherein the device (100) is a wireless telephone.
4. The device of claim 2, wherein the server (200) is a TV.

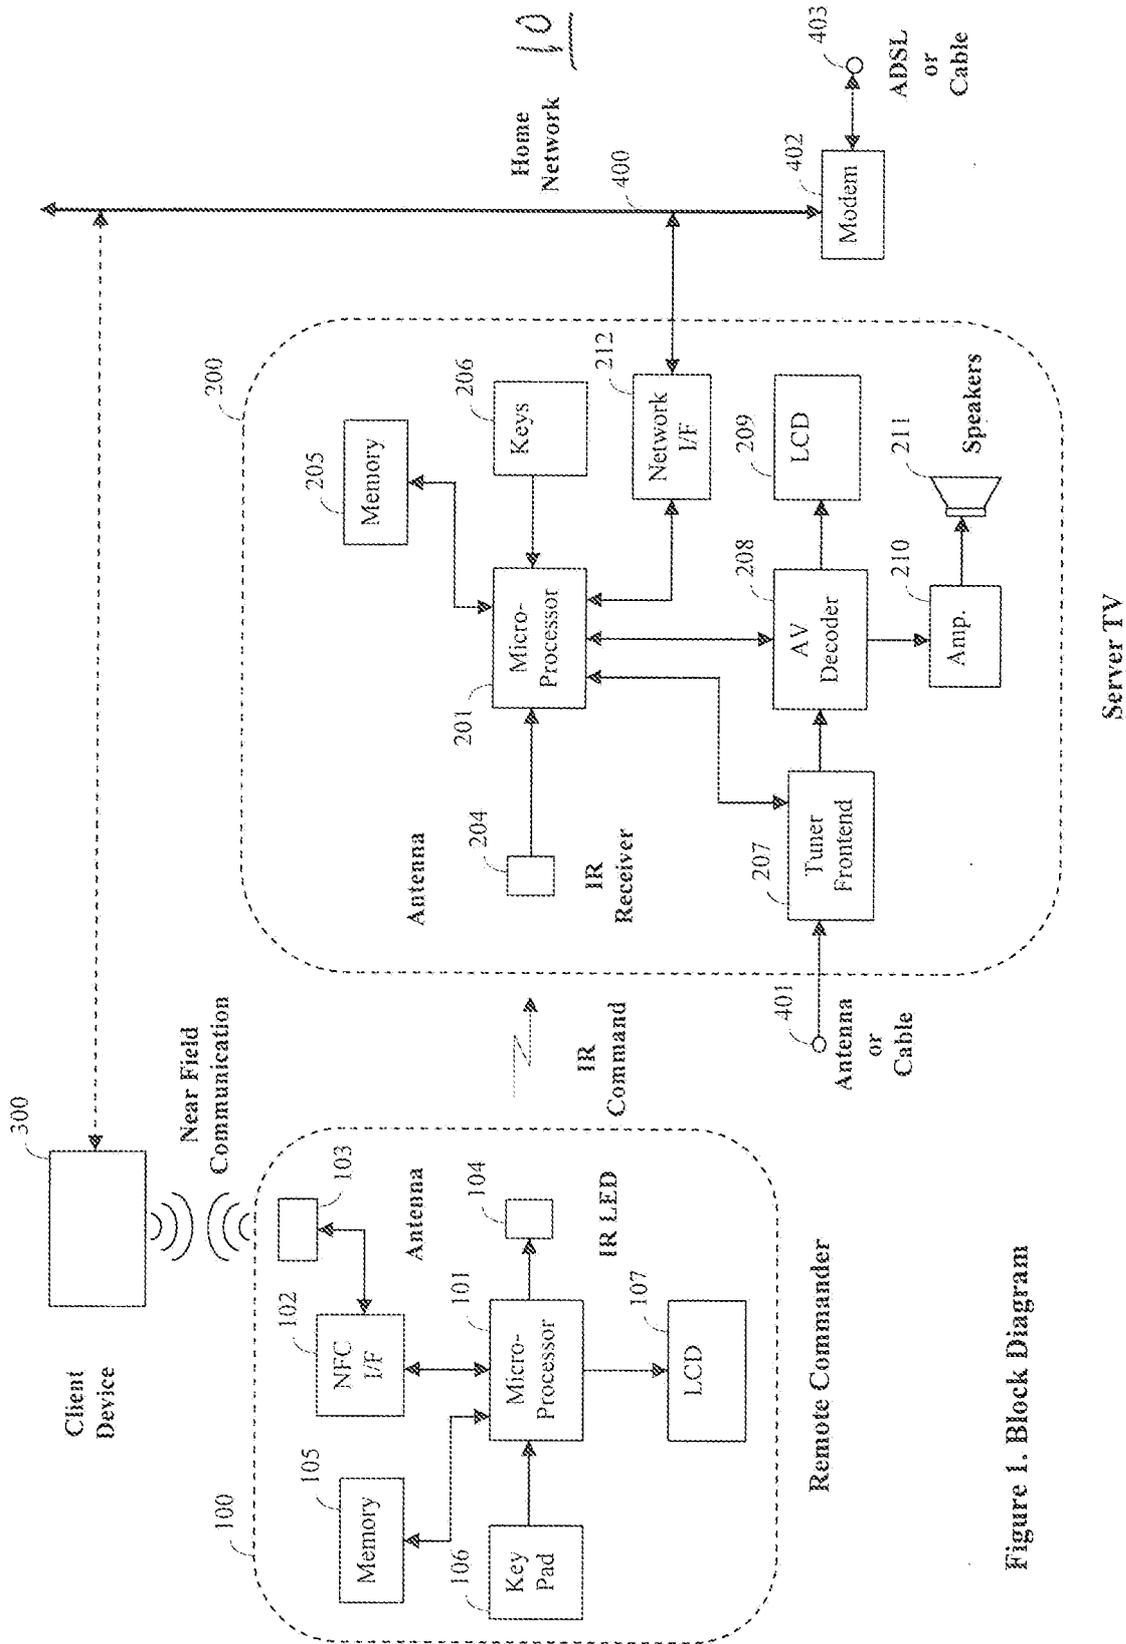


Figure 1. Block Diagram

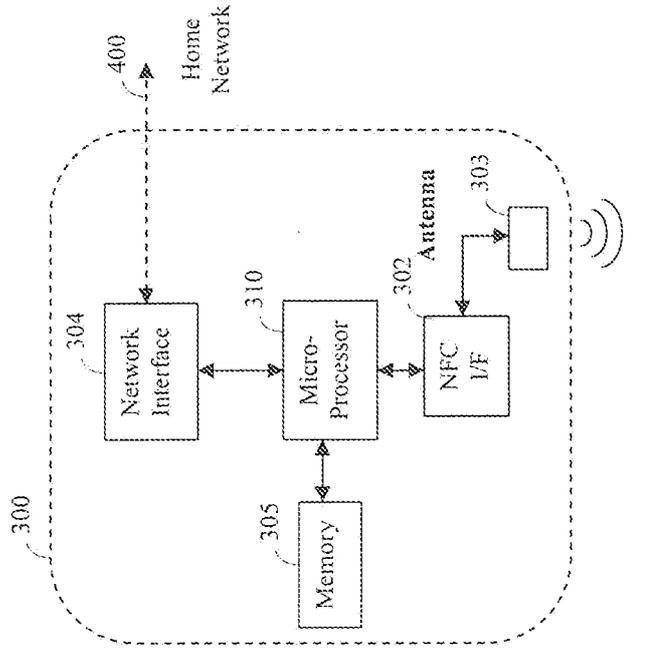


Figure 3. Client Device (2)

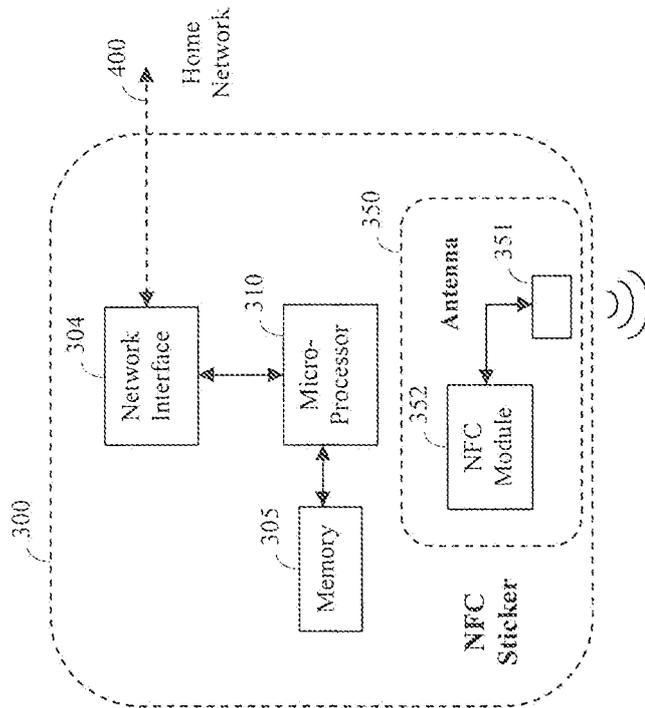


Figure 2. Client Device (1)

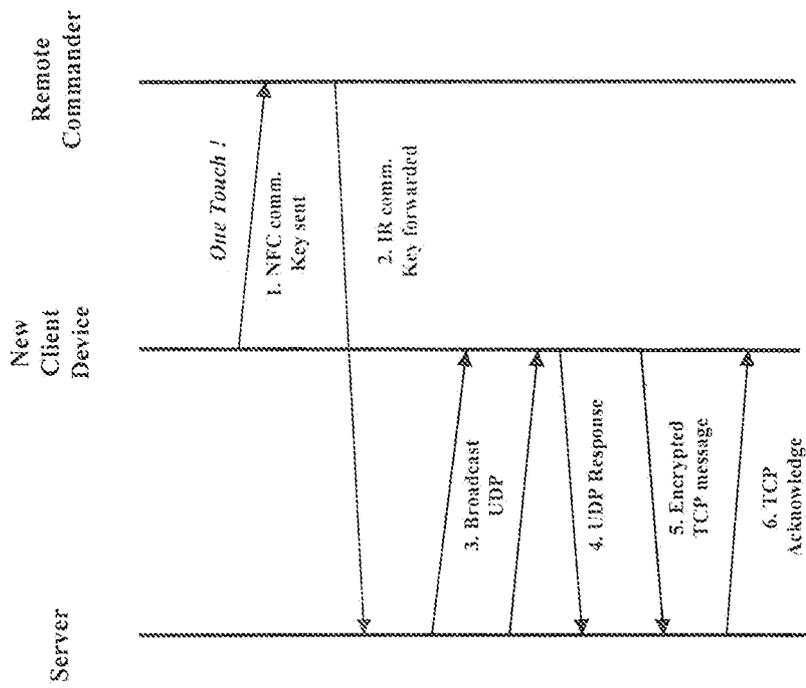


Figure 4. Communications For Device Registration

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/072451

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04L9/08 H04N5/445 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. REIDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal , WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/083416 A (UNIVERSAL ELECTRONICS INC [US]; HAYES PATRICK H [US]; BLACK JEREMY [US]) 10 August 2006 (2006-08-10) page 4, line 24 - page 7, line 31 page 26, line 32 - page 29, line 23; figures 2,7	1-4
A	US 2002/143643 A1 (CATAN CAROLYN RAMSEY [US]) 3 October 2002 (2002-10-03) paragraphs [0059] - [0062]	1
A	US 2006/087433 A1 (SHELLER NATHAN J [US]) 27 April 2006 (2006-04-27) paragraphs [0025] - [0030]	1
A	US 2007/054616 A1 (CULBERT MICHAEL [US]) 8 March 2007 (2007-03-08) the whole document	1
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

Special categories of cited documents :

- 'A' document defining the general state of the art which is not considered to be of particular relevance
- 'E' earlier document but published on or after the international filing date
- 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O' document referring to an oral disclosure, use, exhibition or other means
- 'P' document published prior to the international filing date but later than the priority date claimed

- 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- 'S' document member of the same patent family

Date of the actual completion of the international search

1 December 2008

Date of mailing of the international search report

08/12/2008

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Palenlaan 2
NL - 2200 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax (+31-70) 340-3016

Authorized officer

Reeck, Guido

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/072451

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
P, A	US 2008/088474 A1 (HARDACKER ROBERT [US] ET AL) 17 April 2008 (2008-04-17) the whole document -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2008/072451

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2006083416 A	10-08-2006	EP 1851596 A2	07-11-2007
US 2002143643 A1	03-10-2002	AT 341042 T CN 1636215 A DE 60214991 T2 EP 1377923 A2 UO 02080057 A2 JP 2004534990 T	15-10-2006 06-07-2005 24-05-2007 07-01-2004 10-10-2002 18-11-2004
US 2006087433 A1	27-04-2006	NONE	
us 2007054616 A1	08-03-2007	NONE	
us 2008088474 A1	17-04-2008	NONE	