



(22) **Date de dépôt/Filing Date:** 2016/07/25

(41) **Mise à la disp. pub./Open to Public Insp.:** 2017/02/18

(30) **Priorité/Priority:** 2015/08/18 (US62/206,652)

(51) **Cl.Int./Int.Cl.** **A61G 7/10** (2006.01),
A47C 27/08 (2006.01), **A61G 7/057** (2006.01),
F16L 33/01 (2006.01)


(71) **Demandeur/Applicant:**
SAGE PRODUCTS, LLC, US

(72) **Inventeurs/Inventors:**
KENNEDY, JEFFREY A., US;
DAVIS, GREGORY T., US;
ALVAREZ, RYAN A., US;
GOLDEN, CRAIG S., US;
HOLLABAUGH, CURTIS L., US;
ECKLUND, BRIAN J., US

(74) **Agent:** NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) **Titre : APPAREILLAGE DE POMPE ET SYSTEME ET METHODE ASSOCIES**

(54) **Title: PUMP APPARATUS AND ASSOCIATED SYSTEM AND METHOD**

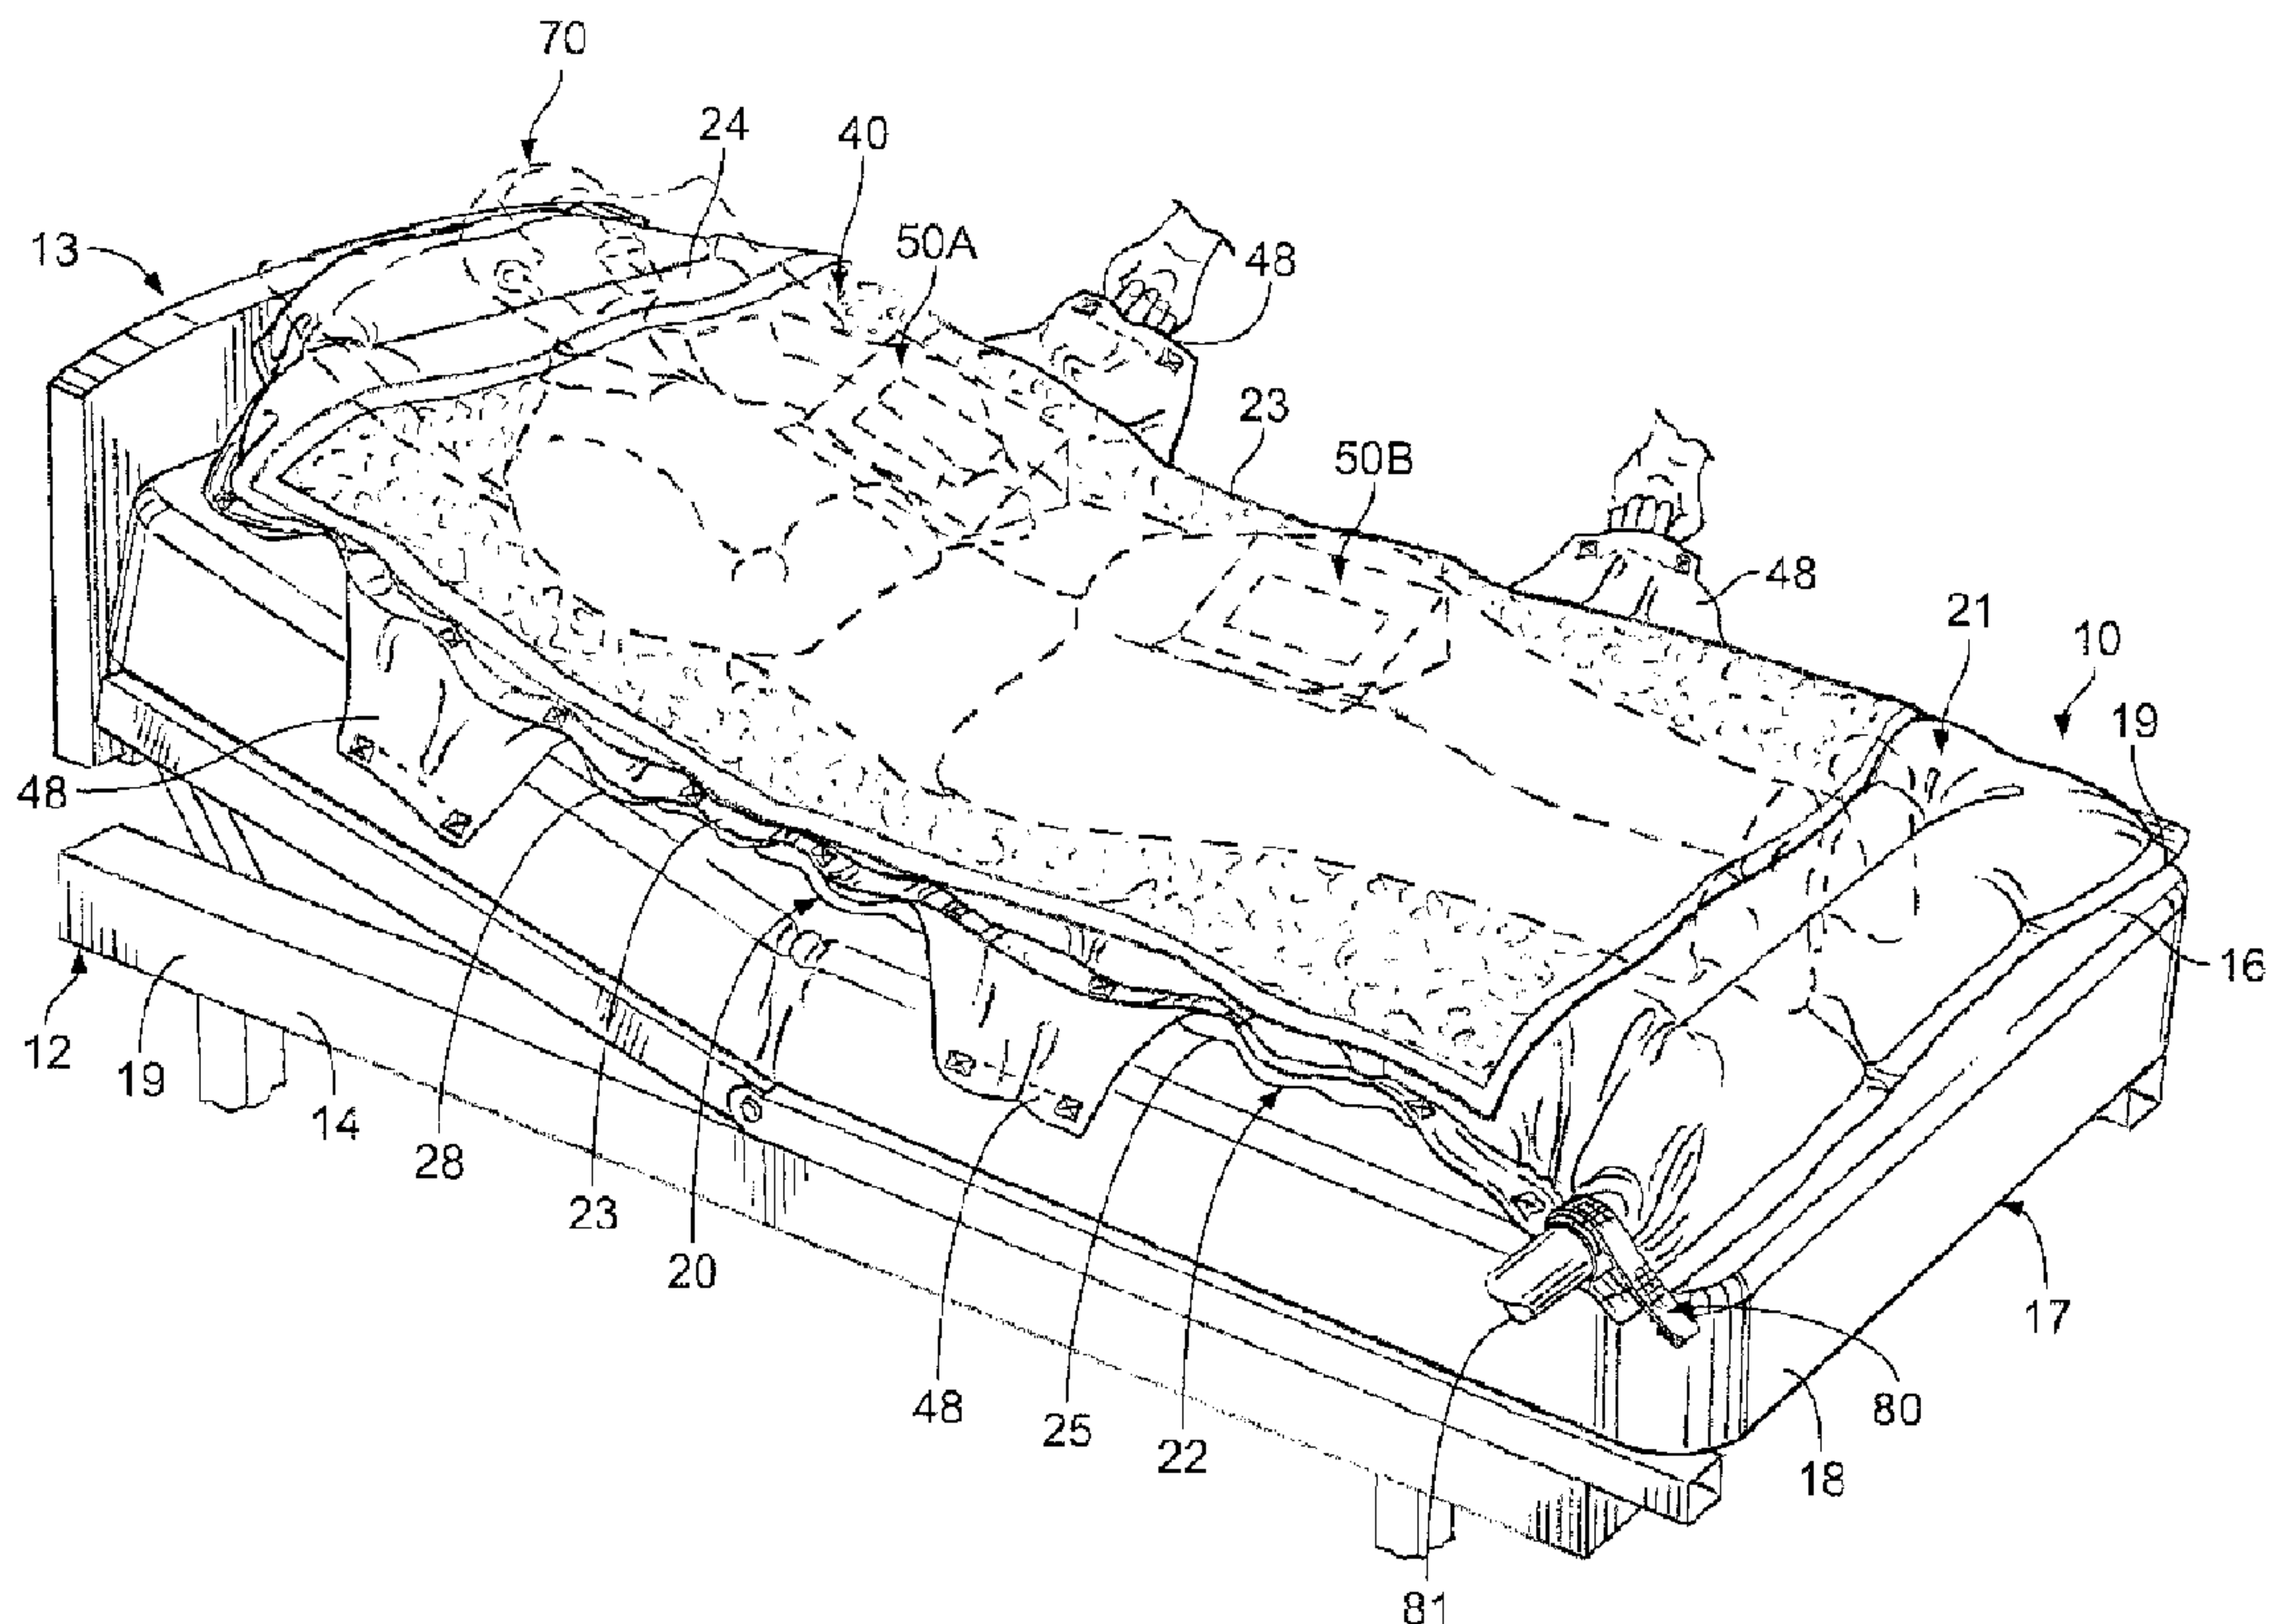

(57) **Abbrégé/Abstract:**

A pumping apparatus includes a pump configured for moving air, a housing supporting and at least partially containing the pump, and an air output that includes a hose having a first end connected to the housing and in communication with the pump, such that the pump is configured to move air through the hose, and a second end configured for allowing air to exit the hose, wherein the hose has a length defined between the first and second ends. A switch is mounted on the hose and located along the length of the hose, and the switch is configured for controlling operation of the pump. The switch is located a distance from the second end of the hose that is less than 50% of the length of the hose.



