



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.06.2021 Bulletin 2021/24

(51) Int Cl.:
G01N 35/04 (2006.01) B65G 54/02 (2006.01)

(21) Application number: **20212107.5**

(22) Date of filing: **02.11.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **04.11.2011 EP 11187982**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
12779094.7 / 2 773 967

(71) Applicants:
• **Roche Diagnostics GmbH**
68305 Mannheim (DE)
Designated Contracting States:
DE
• **F. Hoffmann-La Roche AG**
4070 Basel (CH)
Designated Contracting States:
AL AT BE BG CH CY CZ DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventors:
• **Heise, Michael**
71672 Marbach (DE)
• **Schneider, Hans**
71409 Schwaikheim (DE)

(74) Representative: **Patentanwälte**
Ruff, Wilhelm, Beier, Dauster & Partner mbB
Kronenstraße 30
70174 Stuttgart (DE)


Remarks:

This application was filed on 07-12-2020 as a divisional application to the application mentioned under INID code 62.

(54) **LABORATORY SAMPLE DISTRIBUTION SYSTEM AND LABORATORY SYSTEM**

(57) A Laboratory sample distribution system (100) comprises: a number of container carriers (1), said container carriers each comprising at least one magnetically active device, preferably at least one permanent magnet, and being adapted to carry a sample container (3) containing a sample, a transport plane (4) being adapted to carry said multiple container carriers, a number of electro-magnetic actuators being stationary arranged below said transport plane, said electro-magnetic actuators being adapted to move a container carrier on top of said transport plane by applying a magnetic force to said container carrier, and at least one transfer device (33) being arranged to transfer a Sample-Item, said Sample-Item being a container carrier, a sample container, part of the sample and/or the complete sample, between said transport plane and a laboratory station (22), preferably a pre-analytical, an analytical and/or a post-analytical station.

Fig. 1

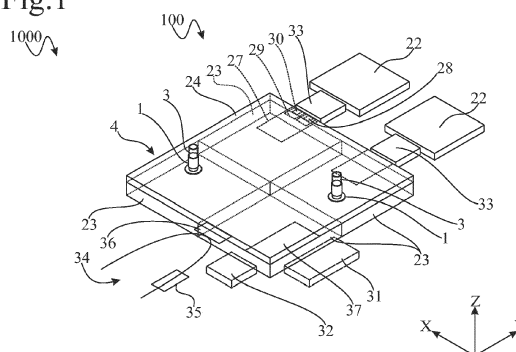

Description

[0001] The invention refers to a laboratory sample distribution system, a laboratory system and a corresponding method of operating.

[0002] Laboratory sample distribution systems are used to distribute samples or specimens, e.g. blood samples, between various different stations or specimen-processing instruments, such as pre-analytical stations, analytical stations and post-analytical stations, of a laboratory system.

[0003] US 2005/0196320 A1 discloses a drive mechanism which operates to advance specimen-container racks on a surface by producing an X/Y movable magnetic field below the surface. The movable magnetic field is produced by permanent magnets carried by an X/Y movable magnetic truck assembly. The magnetic field produced by each magnet magnetically couples with magnetically-attractive members carried in a base portion of each specimen-transport rack. The magnetic bond between the magnets and magnetically-attractive members is sufficiently strong that, as the magnetic truck assembly moves in the X/Y plane, a magnetically-coupled rack follows. Due to mechanical constraints caused by the X/Y movable magnetic truck assembly independent simultaneous movements of multiple specimen-transport racks are difficult to implement. Further, specimen-containers can only be moved together in specimen-transport rack quantities.

[0004] It is the object of the present invention to provide for a laboratory sample distribution system, a laboratory system and a method of operating being highly flexible and offering a high transport performance.

[0005] The laboratory sample or specimen distribution system comprises a number of container carriers, e.g. 50 to 500 container carriers. The container carriers are not self-powered. The container carriers comprise at least one magnetically active, i.e. magnetically attractive, device and are adapted to carry a single sample container. Further, the system comprises a two dimensional transport plane or supporting surface, which may be completely planar and is adapted to carry at least part of the container carriers. A number of electro-magnetic actuators, e.g. 50 to 5000 electro-magnetic actuators, are arranged stationary or fixed below the transport plane. The electro-magnetic actuators are adapted to move a container carrier on top of the transport plane in at least two different directions by applying or causing a magnetic force to the container carrier, i.e. to the magnetically active device of the container carrier.

[0006] The transport plane supports the container carriers in a way to allow movement along directions as guided by magnetic forces. Accordingly the transport plane is continuous in at least those directions of movements to allow a smooth travel of the container carriers. In order to allow a flexible transfer of carriers along many lateral directions a flat transport plane is of advantage. On a microscopic level it might be advantageous to employ a

surface with many small protrusions in order to reduce friction between the transport plane and the bottom surface of the container carrier.

[0007] The transport plane further needs to transmit the magnetic field of the electro-magnetic actuators. Accordingly the transport plane is made from magnetically transmissive materials as e.g. glass or plastics. Further the thickness of the transport plane is a compromise between mechanical stability and magnetic shielding. It has shown that a transport plane having a thickness of 2 to 10 mm is well suited.

[0008] The magnetically active device is a device adapted to cause magnetic forces in interaction with a corresponding magnetic field, wherein the magnetically active device may comprise at least one permanent magnet. By means of the multiple electro-magnetic actuators interacting individually with corresponding container carriers it is possible to independently and simultaneously move multiple individual sample containers along a given grid over the transport plane offering high transport flexibility, which means that single containers can be transported independently from each other to desired locations on the transport plane.

[0009] Further at least one, e.g. automatic, transfer device is provided being arranged to, e.g. automatically, transfer or move a Sample-Item, said Sample-Item being a container carrier, a sample container, part of the sample and/or the complete sample, between said transport plane and a laboratory station. The term "automatic" means that the transfer is performed using a process control or control device controlling the necessary devices used for said transfer. In case of an automatic transfer no human or manual interaction is necessary for said transfer. The laboratory station may be a pre-analytical, an analytical and/or a post-analytical station as typically used in laboratory systems. An analytical station or analyzer may e.g. be adapted to use the sample or part of the sample and a reagent to generate a measurable signal based on which the presence or concentration of the analyte can be determined.

[0010] The transfer device provides an interface between the transport plane and the laboratory station. The transfer device is arranged such that even conventional laboratory stations placed adjacent to the transport plane can easily interface with the transport plane without modification. The transfer device may e.g. comprise a picker for picking the container carrier or the sample container, the picker being movable along predetermined axes, e.g. along a vertical axis Z and along a single horizontal axis X or Y. If the laboratory station operates rack based, i.e. processes samples or sample containers being provided in a sample container rack placed at specific positions, the transfer device may transfer the sample containers from the transport plane to the sample container rack and vice versa. The transfer device may also be incorporated as a pipettor. The pipettor may e.g. take part of the sample contained in a sample container and transfer this sample to a laboratory station.

[0011] The transfer device may be provided separate from the transport plane and the laboratory station, i.e. the transport plane, the transfer device and the laboratory station may be provided as separate modules or devices. Alternatively, the transfer device may be part of the laboratory station.

[0012] The transfer device may provide a sample container rack formatting and/or reformatting operation.

[0013] Formatting means that the transfer device transfers the sample containers from the transport plane to one or more sample container racks. Reformatting means that the transfer device transfers the sample containers from one or more sample container racks to container carriers on the transport plane.

[0014] Since a sample container is carried by a corresponding individually movable container carrier, the sample containers may be moved over the transport plane with high flexibility. Together with the transfer device performing a formatting/reformatting operation, the laboratory station may operate rack based with optimized throughput.

[0015] The sample container racks may have different rack formats, the rack format specifying amongst others the number of sample containers which can be placed in the sample container rack, i.e. the container capacity.

[0016] A specific rack format may correspond to a specific laboratory station. The transfer device may adapt to a specific rack format. The transfer device may determine the rack format, e.g. by means of suitable sensors. After having determined the rack format the transfer device may perform the formatting/reformatting operation rack format specific, e.g. by placing the corresponding number of sample containers into the sample container rack.

[0017] The sample containers may be delivered for processing comprised in input sample container racks which are placed automatically by a corresponding device or manually at a specific location adjacent to a dedicated transfer device. This transfer device may take the sample containers from the input sample container rack and place it in corresponding empty container carriers being e.g. provided in one or more buffer areas adapted to store container carriers actually not carrying a sample container. After being processed the sample containers may be transferred to a corresponding output sample container rack by a dedicated transfer device, wherein the type of the input sample container rack and the type of the output sample container rack may differ.

[0018] The operation of the transfer devices, the operation of the transport plane and the operation of the laboratory stations may be synchronized as follows.

[0019] One way to synchronize operations is to provide data communications between the transport plane, the transfer devices and the laboratory station. The transport plane may signalize to the transfer device that a container carrier is placed at a specific transfer location. As a result the transfer device may signalize to the corresponding laboratory station that a sample container is ready for analysis. The laboratory station then may signalize to the

transfer device to transfer the sample container to the laboratory station, if processing capacity is available.

[0020] The workflow for transferring sample containers from the transport plane to the laboratory stations may also be controlled by a master control device being in data communication with the transport plane, the transfer devices and the laboratory stations.

[0021] The data communication may be done according to a predetermined data communication protocol including software and hardware specification.

[0022] Additionally or alternatively sensors may be provided to signalize to the transfer device that a sample container is ready for transfer, e.g. has reached a transfer location. Such a sensor may be an optical sensor or a magnet sensor, as e.g. a hall sensor, sensing a container carrier at a specific transfer location on the transport plane.

[0023] Additionally or alternatively one or more signaling lines may be provided to synchronize the operation of the transport plane, the transfer device and the laboratory station.

[0024] It may e.g. be possible to fill a sample container rack by means of the transfer device. If the sample container rack is completely filled the transfer device may signal this condition by means of a corresponding signaling line to the laboratory station. The laboratory station may then process this sample container rack.

[0025] If the container carrier or the sample container comprises a RFID tag, a RFID reader may detect the presence of the container carrier, if the container carrier enters a reading distance of the RFID reader.

[0026] Also an image processing system including a camera may be provided to determine the presence of a container carrier/sample container.

[0027] The image processing system, the sensors and/or the RFID reader may be part of the transfer device.

[0028] According to an embodiment the transport plane is fixed to the transfer device and the transfer device is fixed to the laboratory station. This e.g. can be achieved by screwing the items together, by latching or clamping.

[0029] The transfer device may be adapted to transfer said Sample-Item along at least two axes. Due to the highly flexible transport plane capable of moving the container carriers at various different transfer positions it is basically sufficient if the transfer device is adapted to transfer the Sample-Item along only two axes. These axes may e.g. be the Z-Axis enabling the transfer in a direction perpendicular to the transport plane, i.e. providing a height movement, and the X- or the Y-axis providing a movement to and/or from the laboratory station.

[0030] Due to the flexible transport system container carriers can be conveyed into a single transfer location per laboratory station for transferring a Sample-Item to the laboratory station. Accordingly the transfer device can be kept simple and can be reduced to operate along only two axes.

[0031] The transfer device may be adapted to transfer

more than one Sample-Item in parallel thereby increasing the processing performance.

[0032] The transport plane may comprise at least one transfer area located adjacent to said at least one transfer device. The transfer area may be adapted to store a fixed or variable number of container carriers at different positions. The transfer device may be arranged to, e.g. automatically, transfer the Sample-Item between at least one specific transfer location of said transfer area and said laboratory station. The transfer area may provide a dynamic processing queue for a corresponding laboratory station, thereby enabling a flexible load balancing for a specific laboratory station. The dynamic processing queue may get longer if a large number of samples have to be processed by the corresponding laboratory station having a limited processing capacity. The non-processed sample carriers or samples are queued within the transfer area, wherein the number of locations may be fixed or variable. If the number is variable, the size of the transfer area may be dynamically increased in response to the number of container carriers waiting for processing.

[0033] The transfer area may comprise priority areas. The transfer device may be arranged to, e.g. automatically, transfer the Sample-Item between at least one specific priority location of the priority area and the laboratory station with priority, i.e. with priority compared with Sample-Items of the conventional transfer location. Priority areas speed up the handling of emergency samples being distributed between the laboratory stations, thereby reducing the overall processing time of emergency samples significantly compared with systems without prioritization.

[0034] The transport plane may comprise at least one buffer area adapted to store container carriers actually not carrying a sample container. These empty container carriers located in the buffer area may be filled with sample containers comprising samples to be processed. If an empty container carrier having a container carrier ID is filled with a sample container having a sample container ID a database storing matching container carrier IDs and sample container IDs may be updated. The stored matching between the IDs may be checked, e.g. before the corresponding sample is analyzed and/or if the sample container is removed from the transport plane. If the IDs do not match, which may e.g. be caused by manually swapping sample containers, an error may be generated. This may prevent erroneous analyzing results.

[0035] The filling or placing of sample containers in corresponding container carriers may be done manually or automatically, e.g. by a corresponding transfer device picking sample containers out of a sample container rack comprising a number of sample containers to be processed. The sample container rack may be placed manually within an operating range of the transfer device.

[0036] The system may comprise a container carrier conveyor or conveyor belt system functionally coupled to the transport plane, i.e. having a transport gateway to transfer container carriers and/or sample containers be-

tween the transport plane and the conveyor. The container carrier conveyor may be arranged to convey container carriers not being placed on top of said transport plane. The container carrier conveyor may be a conventional transport system, e.g. be suited for long distance transportation of the container carriers. The combination of the transport plane and the conveyor provides for a flexible distribution of samples where necessary and a cost effective, rapid distribution over long distances. The electro-magnetic actuators may be controlled such that a speed of a sample container intended to be transferred from the transport plane to the conveyor matches with the linear speed of the conveyor.

[0037] The system may comprise at least one RFID reader, wherein each container carrier comprises a RFID tag storing a unique ID, thereby making an identification of a specific container carrier easily possible.

[0038] The system may comprise at least one barcode reader, wherein each sample container carries a barcode representing a sample identification.

[0039] The barcode reader may be comprised in said at least one transfer device.

[0040] The transfer device may further comprise a camera for image processing. By use of the barcode reader and/or the camera the transfer device is capable of determining features of said Sample-Items being provided for transfer and to use these features in the transfer process. Said features may comprise a tube type, a cap type, a fluid level, a sample quality, a sample color, a sample identification, etc.

[0041] The transfer device may comprise a pick-and-place device, said pick-and-place device being adapted to pick a Sample-Item or a sample container from said transport plane and place said Sample-Item or said sample container in a sample container rack. Additionally or alternatively said pick-and-place device may be adapted to pick a Sample-Item or a sample container from a sample container rack and place said Sample-Item or sample container in a container carrier placed on said transport plane.

[0042] Said pick-and-place device may be adapted to rotate said sample container to enable a barcode reader, e.g. being part of the transfer device, to read a barcode attached to said sample container.

[0043] Said pick-and-place device may move a grabber only in a vertical direction (Z) and in one horizontal direction (X or Y).

[0044] Said transfer device may comprise at least one conveyor, e.g. in the form of a conveyor belt having a pusher, said conveyor being adapted to move a sample container rack from a pick-and-place device towards a laboratory station and/or to move a sample container rack from a laboratory station towards said pick-and-place device. Such a configuration makes it possible to use a pick-and-place device moving only in the vertical direction (and one horizontal direction), since the transport towards the laboratory station can be done by means of the conveyor.

[0045] The transfer device may comprise a sample container rack storage device adapted to store sample container racks. The sample container racks are adapted to include a number (e.g. 1 to 128) of sample containers. Such sample container racks are typically used in laboratory stations operating rack based. The sample container rack may be filled manually or automatically, e.g. by means of a corresponding transfer device.

[0046] Said sample container rack storage device may be adapted to store sample container rack trays, each sample container rack tray being adapted to store a number, e.g. 2 to 24, of sample container racks.

[0047] Said sample container rack storage device may comprise a push loading drawer, said push loading drawer having an open and a closed state, wherein in said open state said push loading drawer is adapted to be filled with sample container racks and/or sample container rack trays. In the closed state said push loading drawer may be adapted to supply sample container racks or sample container rack trays if necessary.

[0048] Said sample container rack storage device may be adapted to store sample container racks or sample container rack trays in at least one storage level below a transport plane level of said transport plane, wherein said sample container rack storage device comprises an elevator device, said elevator device being adapted to lift a sample container rack or a sample container rack tray from said at least one storage level to said transport plane level. Lowering the storage level below the transport plane level makes it possible to use the space below the transport plane for storing sample container racks or a sample container rack trays.

[0049] The transfer device may be adapted to automatically remove a sample container rack from the sample container rack storage device, sequentially or in parallel take a number (corresponding to the capacity of said sample container rack) of sample containers to be transferred from the transport plane and insert them into the sample container rack and provide the sample container rack including the inserted sample containers to the laboratory station.

[0050] Accordingly, the transfer device may transfer processed sample containers from the transport plane back into sample container racks.

[0051] The laboratory system comprises at least one laboratory station, preferably a pre-analytical, an analytical and/or a post-analytical station, and a laboratory sample distribution system as described above.

[0052] The pre-analytical, analytical and/or a post-analytical stations may comprise at least one of a decapping station, a recapping station, an aliquot station, a centrifugation station, an archiving station, a pipetting station, a sorting station, a tube type identification station, and a sample quality determining station.

[0053] The laboratory system may comprise a memory device, storing matching pairs of a unique ID corresponding to a container carrier and a container ID being carried by the container carrier, making it possible to control and

track the path of a sample container over the transport plane.

[0054] The method of operating a laboratory system comprises the steps of: moving a container carrier from a start location to a destination location over said transport plane by means of said electro-magnetic actuators, transferring a Sample-Item between said destination location and a laboratory station adjacent to said destination location by means of said transfer device, and performing a pre-analytical, an analytical and/or a post-analytical function by means of said laboratory station. The start location may be a location on the transport plane which is intended for importing container carriers into the laboratory system. These imported container carriers carry sample containers comprising samples intended for an analysis. Further, the start location may be a location on which container carriers are placed after being served by a station. The destination location may e.g. be located within a transfer area. In other words, a container carrier travels over the transport plane between laboratory stations needed for the intended analysis. By means of the transfer device the Sample-Item is transferred to the stations. In case of sample containers the transfer device may also transport the container back into a container carrier on the transport plane. For this the same container carrier may be used in which the sample container was located before or a new container carrier may be employed.

[0055] The method may further comprise the steps of manually or automatically feeding a sample container to said laboratory system, determining laboratory stations needed for processing a sample contained in the sample container, moving said sample container to said determined laboratory stations, and processing the sample container and/or the sample by means of said determined laboratory stations. The laboratory stations needed for processing may be determined by reading sample information attached to the sample container. The sample information attached to the sample container may be incorporated in form of a barcode attached to the sample container.

[0056] The at least one permanent magnet of the container carrier may be ball-shaped, wherein a north pole or a south pole of the ball-shaped permanent magnet is directed to the transport plane. In other words, an axis extending through the opposite poles of the ball-shaped permanent magnet is perpendicular to the transport plane. A diameter of the ball-shaped permanent magnet may be approximately 12 mm. The ball-shaped permanent magnet causes an optimized magnetic field in interaction with the electro-magnetic actuators, e.g. compared with a bar magnet, resulting in higher magnetic force components in a lateral movement direction.

[0057] The permanent magnet in conjunction with a ferromagnetic core of a currently adjacent non-activated electro-magnetic actuator causes an unwanted magnetic retention force. The retention force hinders the desired movement of the container carrier away from the current-

ly adjacent non activated electro-magnetic actuator towards an activated electro-magnetic actuator. Increasing the distance between the permanent magnet and the transport plane, i.e. also increasing the distance between the permanent magnet and the electro-magnetic actuators, reduces this magnetic retention force. Unfavorably, an increasing distance also lowers a desired magnetic transport force in a lateral movement direction. Therefore, a distance between a center of the at least one permanent magnet and a bottom surface of the container carrier, the bottom surface being adapted to be in contact with the transport plane, may be selected within a range of 5 mm to 50 mm. The given distance range provides an optimum between a desired magnetic transport force in movement direction and an unwanted magnetic retention force.

[0058] The container carriers may comprise a first permanent magnet being arranged in the center of a stand of the container carrier and a second permanent magnet having a ring shape being arranged in the stand surrounding the first permanent magnet. This arrangement provides for a high flexibility in causing push and pull magnetic forces, especially if more than one electro-magnetic actuator is activated at a given time. The first and second permanent magnets may have a reverse polarity, i.e. a south pole of the first permanent magnet and a north pole of the second permanent may point to the transport plane, or vice versa. The ring shaped second permanent magnet may constitute a circular area having a diameter that is smaller than a distance between axes of electro-magnetic actuators of the transport plane.

[0059] The container carriers may comprise a RFID tag storing a unique ID. This enables matching between a sample container ID, e.g. a barcode, and the corresponding container carrier. The unique carrier ID can be read by an optional RFID reader being part of the system and being placed at one or more specific locations within the system.

[0060] The RFID tag may comprise a ring shaped antenna being arranged in a stand of the container carrier. This antenna arrangement makes it possible to read the RFID tag by a RFID reader antenna below the transport plane. Thus, the transport plane itself and/or areas above the transport plane may be designed free of any disturbing RFID reader antennas.

[0061] A stand of the container carrier has a circular cross section having a diameter of approximately 3,5 cm to 4,5 cm. The circular cross section of the stand reduces the likelihood of a stand collision of container carriers moving adjacent in different directions. Compared e.g. with quadratic stands, this reduces the required safety distance between adjacent positions and the requirements on positioning accuracy. Further the circular stand improves the self-supporting of the container carrier, e.g. prevents that the containers carrier tilts under normal operating conditions.

[0062] The electro-magnetic actuators may comprise a ferromagnetic core guiding and amplifying a magnetic

field. The electro-magnetic actuators may have a center finger and four outer fingers, each of the fingers extending perpendicular to the transport plane. Only the center finger may be surrounded by a coil being driven by an actuating current. This arrangement reduces the number of coils needed for activating the electro-magnetic actuators, wherein the center finger and the outer fingers interact advantageously by providing push and pull forces, respectively, especially if the container carrier comprises a first permanent magnet being arranged in the center of the stand and a second permanent magnet having a ring shape being arranged in the stand surrounding the first permanent magnet.

[0063] The system may further comprise a container carrier sensing device adapted to sense the presence and/or position of container carriers located on the transport plane. The container carrier sensing device provides for an optimized tracking of container carriers placed on top of the transport plane.

[0064] The container carrier sensing device may be embodied based on infrared (IR) based reflection light barriers. These light barriers might be arranged in recesses in the transport plane or might be arranged below a transport plane which is at least partially transparent for the employed light. In the latter case a closed transport plane can be provided which inter alia is easier to clean.

[0065] The electro-magnetic actuators may be arranged in rows and columns forming a grid or matrix of active transport fields. According to an embodiment the rows and columns have either a first grid dimension g_1 or a second grid dimension g_2 , wherein $g_2 = 2 * g_1$. Adjacent rows and adjacent columns have different grid dimensions. The grid dimension specifies a distance between adjacent or consecutive electro-magnetic actuators in a given row or column. In other words, the electro-magnetic actuators are arranged in form of a grid or matrix, wherein the grid or matrix has blank positions representing omitted electro-magnetic actuators. This arrangement considers that diagonal movements of the container carriers are not necessary to reach a specific destination on the transport plane, since the specific destination can be reached based on movements along said rows and columns. The mentioned arrangement of the electro-magnetic actuators reduces the number of required electro-magnetic actuators significantly (by e.g. 33%) compared to a solution having a constant grid dimension. Nevertheless, if a diagonal movement is required, it is self-evident that the rows and columns may be provided having a constant grid dimension, e.g. forming a transport plane being divided in active transport fields with equal dimensions.

[0066] The transport plane may be divided into multiple sub planes, each sub plane having a first outer face, a second outer face, a third outer face and a fourth outer face at which further planes can be arranged in a tiling manner to form a transport plane. This approach hence offers the ability to provide transport planes of desired shape. This is of big advantage to serve the needs an

individual laboratory might have due to the laboratory stations present or due to spatial restraints.

[0067] The approach to build the transport plane from sub planes can be combined with the concept of rows having different grid dimensions to reduce the number of needed electro-magnetic actuators. Sub planes can be employed where along the first and the second outer face the electro-magnetic actuators are arranged in a first grid dimension g_1 and along the third and the fourth outer face the electro-magnetic actuators are arranged in a second grid dimension g_2 , wherein $g_2 = 2 \cdot g_1$. Multiple sub planes can be arranged adjacent in a tiling manner to form the transport plane, wherein adjacent outer faces of different sub planes have different grid dimensions.

[0068] The system may comprise a magnetisable coupling element being adapted to provide a magnetic coupling between adjacent electro-magnetic actuators. Due to the coupling element the activated electro-magnetic actuator automatically causes a magnetic field in the adjacent actuators having an inverse polarization. This automatically provides respective pull and push forces even if only a single electro-magnetic actuator is activated, e.g. by a corresponding activating current.

[0069] The surface of the container carriers and the surface of the transport plane may be arranged to reduce friction between the surfaces, e.g. by coating the container carriers and/or the transport plane.

[0070] The system may comprise a cover profile covering the transport plane, especially covering multiple sub planes forming the transport plane, the cover plane being fluidtight. The cover plane simplifies the cleaning of the transport plane and avoids disturbing gaps between adjacent sub planes, when the transport plane is formed of multiple adjacent sub planes. Further, the cover profile mitigates height differences between adjacent sub planes. The cover profile may be just overlying the transport plane or may be glued to the top surface of the sub planes to stabilize the arrangement and to prevent spacing which would reduce magnetic forces.

[0071] A method for the versatile transport of sample containers can be achieved with laboratory sample distribution system comprising a number of container carriers as described above. The container carriers comprise at least one magnetically active device and are adapted to carry a sample container. The laboratory sample distribution system further comprises a transport plane being adapted to carry said container carriers, and a number of electro-magnetic actuators being stationary arranged below said transport plane. The electro-magnetic actuators are adapted to move a container carrier on top of said transport plane by applying a magnetic force to said container carrier. The method comprises the steps of: activating at least one of said electro-magnetic actuators to apply a magnetic force to a container carrier within an operating distance of said at least one activated electro-magnetic actuator. Activating an electro-magnetic actuator means that a magnetic field is generated by the elec-

tro-magnetic actuator. Activating may be done by generating a driving current applied to a coil surrounding a ferromagnetic core.

[0072] A speed of a container carrier moving across the transport plane may be set by setting a period between a successive activation of adjacent electro-magnetic actuators. If this duration is set shorter the speed increases and vice versa. By changing the duration dynamically, a container carrier may be accelerated or slowed down.

[0073] The electro-magnetic actuators may be activated in response to a sensed position of said container carrier to be applied with said magnetic force. The electro-magnetic actuators may be activated such that a polarity of the generated magnetic field depends on a position of the container carrier relative to the electro-magnetic actuator. This causes position-dependent pull and push forces. In a first position range when the container carrier is moving towards the activated electro-magnetic actuator the pull force may attract the container carrier towards the activated electro-magnetic actuator. In a second position range when the container carrier has traversed the electro-magnetic actuator the push force may push the container carrier away from the activated electro-magnetic actuator now generating a magnetic field having an opposite polarity. Additionally, the magnetic field strength may be changed in response to the sensed position to provide a steady movement of the container carrier. The electro-magnetic actuators may be adapted to generate magnetic fields having only a single polarity to simplify the system. In this case, the activated electro-magnetic actuator may generate the pull force in the first position range when the container carrier is moving towards the activated electro-magnetic actuator. In the second position range when the container carrier has traversed the electro-magnetic actuator the electro-magnetic actuator may be deactivated.

[0074] For moving a first container carrier along a first transport path a first group of electro-magnetic actuators may be activated along the first transport path. For independently and at least partially simultaneously moving a second container carrier along a second transport path a second group of multiple electro-magnetic actuators may be activated along the second transport path. The term "simultaneously" means that during a certain time interval both the first and the second container carrier move. The electro-magnetic actuators of the first or the second group may be activated one after the other along the respective transport path. Alternatively, two or more adjacent electro-magnetic actuators along the respective transport path may be activated at least partially overlapping in time.

[0075] A movement of a container carrier placed on a field on top of a first electro-magnetic actuator to an adjacent field on top of a second electro-magnetic actuator may comprise activating the first and the second electro-magnetic actuator and a third electro-magnetic actuator being adjacent to the first electro-magnetic actuator and

opposite to the second electro-magnetic actuator and being part of the same row or column as the first and the second electro-magnetic actuators in a predetermined order.

[0076] If the container carriers comprise a first permanent magnet being arranged in the center of a stand of the container carrier and a second permanent magnet having a ring shape being arranged in the stand surrounding the first permanent magnet the method may further comprise the steps of: activating said second electro-magnetic actuator such that a resulting pull-force regarding said second permanent magnet having a ring shape is generated, and activating said third electro-magnetic actuator such that a resulting push-force regarding said second permanent magnet is generated; after a predetermined time interval or at a predetermined position of the container carrier: activating said first electro-magnetic actuator such that a resulting pull-force regarding said second permanent magnet is generated and that a resulting push-force regarding said first permanent magnet is generated; and after a second predetermined time interval or at a second predetermined position of the container carrier: activating said second electro-magnetic actuator such that a resulting pull-force regarding said second permanent magnet is generated. A movement between adjacent electro-magnetic actuators is done in a sequence of three activation patterns regarding three adjacent electro-magnetic actuators. This leads to a continuous uniform movement with a high positioning accuracy. The first and second time interval or the first and the second position may be determined based on a sensed position of the container carrier provided by the container carrier sensing device.

[0077] Embodiments of the invention are shown in the schematic drawings, wherein

- Fig. 1 shows a laboratory system comprising a laboratory sample distribution system having a transport plane being formed of multiple sub planes,
- Fig. 2 shows a top view on an exemplary sub plane shown in Fig. 1,
- Fig. 3 shows a more detailed perspective side view of the sub plane shown in Fig. 2,
- Fig. 4 shows a container carrier according to a first embodiment,
- Fig. 5 shows a container carrier according to a second embodiment and a corresponding electro-magnetic actuator,
- Fig. 6 shows a simulated magnetic flux density for the case that a container carrier is positioned on top of an electro-magnetic actuator not being activated and an adjacent electro-magnet-

ic actuator being activated,

- Fig. 7 shows a side view of an embodiment of a sub plane comprising a magnetisable coupling element providing a magnetic coupling between adjacent electro-magnetic actuators,
- Fig. 8 shows a movement of a container carrier and an activation order of corresponding electro-magnetic actuators according to a first embodiment,
- Fig. 9 shows a movement of a container carrier and an activation order of corresponding electro-magnetic actuators according to a second embodiment, and
- Fig. 10 shows a transfer device.

[0078] Fig. 1 shows a laboratory system 100 comprising pre-analytical, analytical and post-analytical stations 22; e.g. in form of a decapping station, a recapping station, an aliquot station, a centrifugation station, an archiving station, a pipetting station, a labeling station, a sorting station, a tube type identification station, an analyzer, and a probe quality determining station; and a laboratory sample distribution system 100. Fig. 1 shows only two exemplary laboratory stations 22, nevertheless it is self-evident that more than two laboratory stations may be provided.

[0079] The laboratory sample distribution system 100 is used to distribute samples or specimens, e.g. blood samples, contained within sample containers 3 between the different laboratory stations 22.

[0080] The laboratory sample distribution system 100 comprises a number of container carriers or Single-Tube-Carriers 1 each being adapted to carry a corresponding sample container 3 over a transport plane 4. Multiple electro-magnetic actuators 5 (see figures 2 and 3) are stationary arranged below the transport plane 4. Each of the electro-magnetic actuators 5 is adapted to move a container carrier 1 in operating distance of a corresponding electro-magnetic actuator 5 by applying a magnetic force to the container carrier 1.

[0081] The system further comprises a barcode reader 31, a RFID reader 32, transfer devices 33 corresponding to the laboratory stations 22 and a conventional belt-driven container carrier conveyor 34 operationally coupled to the transport plane 4.

[0082] The depicted transport plane 4 is divided into four quadratic sub planes 23, the sub planes 23 being arranged adjacent to one another. The transport plane is covered by an optional cover profile 24, the cover profile 24 being fluidtight and covering gaps and mitigating height differences between adjacent sub planes 23. The material of the cover profile 24 provides a low friction coefficient. The cover profile 24 may e.g. be a glass plate or a foil of polyethylene or PTFE (poly-tetra-fluoro-ethyl-

ene).

[0083] The transfer devices 33 are adapted to transfer a Sample-Item between the transport plane 4 and a corresponding laboratory station 22. The Sample-Item may be a container carrier 1 together with a corresponding sample container 3, a sample container 3 including the sample, part of the sample or the complete sample without the corresponding sample container 3.

[0084] Each transfer device 33 is adapted to transfer said Sample-Item along at least two axes, e.g. along the Z-axis and the Y-axis. At least some of the transfer devices 33 may be adapted to transfer more than one Sample-Item in parallel to speed up the transfer capacity. The transfer devices 33 may be pick-and-place devices, multi-axis robots having a picker, pipettors, etc.

[0085] Usage of the transfer devices provides that conventional laboratory devices can be employed in conjunction with the transport system without the need to redesign existing laboratory devices or to adapt them specifically to the transport system.

[0086] In order to provide processing queues the transport plane 4 comprises transfer areas 27 located adjacent to corresponding transfer devices 33. The transfer areas 27 are adapted to store in a one- or two-dimensional queue a number, e.g. 10 to 20, of container carriers 1, wherein the corresponding transfer device 33 is arranged to transfer the Sample-Item between at least one specific transfer location 28 within the transfer area 27 and the corresponding laboratory station 22 and vice versa.

[0087] In order to provide optimized processing paths for emergency samples, each transfer area 27 comprises priority areas 29. The corresponding transfer device 33 is arranged to transfer said Sample-Item between a specific priority location 30 within the priority area 29 and the corresponding laboratory station 22 with priority, i.e. prior to those Sample-Items being placed on the non-prioritized transfer-location 28.

[0088] In order to handle container carriers actually not carrying a sample container the transport plane 4 comprises a buffer area 37 adapted to store container carriers 3 actually not carrying a sample container. Alternatively or in addition a buffer unit for unloaded container carriers may be provided which is located adjacent the transport plane. The buffer unit may have an in-built transfer mechanism for transferring container carriers from the buffer unit onto the transport plane or a transfer device as described above may be used in between the buffer unit and the transport plane.

[0089] The RFID reader 32 is used to interact with RFID tags 9 comprised in each container carrier 1 (see fig. 5). The barcode reader 31 is adapted to read a barcode (not shown) on the sample containers 3 representing sample characteristics. The laboratory system 1000 comprises a memory device as part of a laboratory system control device (not shown), storing matching pairs of a unique ID corresponding to a container carrier and a barcode of a sample container being carried by the container carrier in order to track sample containers 3 over the processing

path.

[0090] The conventional belt-driven container carrier conveyor 34 is functionally coupled by means of a transport gateway 36 to the transport plane 4, said container carrier conveyor 34 being arranged to convey container carriers 3 not being placed on top of the transport plane 4 in corresponding racks 35.

[0091] Fig. 2 shows a schematic top view on an exemplary sub plane 23 of Fig. 1. The sub plane has a first outer face 20, a second outer face 21, a third outer face 18 and a fourth outer face 19. Along the first and the second outer face 20 and 21 the electro-magnetic actuators 5 are arranged in a first grid dimension g_1 . Along the third and the fourth outer face 18 and 19 the electro-magnetic actuators 5 are arranged in a second grid dimension g_2 , wherein $g_2 = 2 \cdot g_1$. The grid dimension g_1 may e.g. be 20 mm.

[0092] The electro-magnetic actuators 5 are arranged in rows and columns, e.g. 16 rows and 16 columns, the rows and columns having either a first grid dimension g_1 or a second grid dimension g_2 , wherein $g_2 = 2 \cdot g_1$, and adjacent rows having a different grid dimension and adjacent columns having a different grid dimension. If a position or field on the transport plane has to be accessible as a target destination a corresponding electro-magnetic actuator is provided below that target destination. If a specific field or area has not to be accessible an electro-magnetic actuator may be omitted at that position.

[0093] Fig. 3 shows a more detailed perspective side view of the sub plane 23 shown in Fig. 2.

[0094] As illustrated, each electro-magnetic actuator 5 is fixed on a carrier plate 26 and comprises a ferro-magnetic cylindrical core 5a extending basically perpendicular to the transport plane 4. A coil 5b surrounds the ferromagnetic cylindrical core 5a. The coil 5b can be applied with an actuating current provided by a driver unit (not shown) over electrical contacts 5c. If driven by an actuating current each electro-magnetic actuator 5 generates a magnetic field. When this field interacts with a permanent magnet 2 (see figure 4) arranged in the container carrier 1 it provides a driving force moving the container carrier 1 along the transport plane 4. The ferro-magnetic cylindrical core 5a bundles and amplifies the magnetic field generated by the coil 5b.

[0095] In the most simple form, each container carrier 1 may be exposed to a driving force generated by means of a single activated electro-magnetic actuator 5 proximate to the corresponding container carrier 1 thereby pulling the container carrier 1 towards the activated electro-magnetic actuator 5. Further, it is possible to superpose push and pull driving forces of multiple electro-magnetic actuators 5 proximate to the corresponding container carrier 1.

[0096] Further, it is possible to activate multiple electro-magnetic actuators 5 at the same time to move multiple different container carriers 1 independent of each other along predetermined paths over the transport plane 4.

[0097] In order to sense the presence and position of container carriers 1 located on the transport plane 4 a container carrier sensing device is provided. The depicted embodiment comprises a printed circuit board 25 having multiple IR based reflection light barriers 17 arranged in a grid on top as shown in fig. 3.

[0098] The IR based reflection light barriers 17 detect container carriers 1 placed on top of a corresponding light barrier 17 since the container carriers 1 are arranged to reflect IR radiation emitted by the light barriers 17. If no container carrier is present, no reflected IR light gets into the IR sensor of a corresponding light barrier 17.

[0099] Fig. 4 shows a container carrier 1 according to a first embodiment. The container carrier 1 comprises a ball-shaped permanent magnet 2. A distance l between a center of said at least one permanent magnet 2 and a bottom surface 8a of said container carrier, said bottom surface 8a being adapted to be in contact with said transport plane 4, lies within a range of 5 mm to 50 mm, and may be approximately 12 mm.

[0100] The permanent magnet 2 may be made from hard ferromagnetic materials. These include e.g. iron ore (magnetite or lodestone), cobalt and nickel, as well as the rare earth metals. A north pole N of the permanent magnet 2 is directed towards the transport plane.

[0101] A stand 8 of the shown container carrier has a circular cross section having a diameter of approximately 3,5 cm to 4,5 cm covering approximately five electro-magnetic actuators 5 if positioned in the center of a cross formed by the five electro-magnetic actuators 5. The electro-magnetic actuator in the center of the cross is fully covered, wherein the four outer electro-magnetic actuators are nearly covered by half. Due to this two carriers moving on adjacent tracks can pass by each other without collision. On the other hand the footprint is large enough to provide a smooth transport without much tilting. Accordingly container carriers may have an optimized circular bottom surface 8a with a radius being 5 to 30 % smaller than the grid distance of the transport plane.

[0102] The container carriers may comprise a sample container fixing means which may e.g. be incorporated in form of flexible flat spring 43. The flexible flat spring 43 is arranged at the side wall of the cylindrical opening of the container carrier 3. The flexible flat spring 43 safely fixes the sample container 3 within the container carrier 1, even if the sample container 3 has a smaller diameter than the corresponding opening.

[0103] If different sample container types are used, e.g. having different form factors, it is even possible to provide specific container carriers with different inner diameters corresponding to respective sample container types.

[0104] Fig. 5 shows a container carrier 1' according to a second embodiment having a different magnet arrangement and a corresponding electro-magnetic actuator 5'.

[0105] The container carrier 1' comprises a first permanent magnet 6 being arranged in the center of a stand

8 of said container carrier 1' and a second permanent magnet 7 having a ring shape being arranged in said stand 8 surrounding said first permanent magnet 6. The permanent magnets 6 and 7 have a reverse polarity. A north pole of the center permanent magnet 6 and a south pole of the ring shaped permanent magnet 7 are directed towards the transport plane 4.

[0106] Further, the container carrier 1' comprises a RFID tag 9 storing a unique ID corresponding to a specific container carrier. The RFID tag 9 comprises a ring shaped antenna 10 which is arranged in the stand 8 of the container carrier 1' between the first and the second permanent magnet 6 and 7.

[0107] The corresponding electro-magnetic actuator 5' comprises a ferromagnetic core having a center finger 11 and four outer fingers 12, 13, 14, and 15, each of the fingers extending perpendicular to the transport plane 4, wherein only the center finger 11 is surrounded by a coil 16 being driven by an actuating current I_a . This arrangement reduces the number of coils needed for activating the electro-magnetic actuator 5' compared with the embodiment shown in Fig. 3, wherein the center finger 11 and the outer fingers 12 to 15 interact advantageously by providing push and pull forces, respectively, especially if the container carrier 1' is arranged as shown.

[0108] Fig. 6 schematically shows a simulated magnetic flux density B for the case that a container carrier as depicted in Fig. 4 is positioned on top of an electro-magnetic actuator 5_2 not being activated and an adjacent electro-magnetic actuator 5_3 being activated. Different flux densities B are represented by corresponding hachures.

[0109] As shown, the ball shaped permanent magnet 2 in conjunction with a ferromagnetic core of the non-activated electro-magnetic actuator 5_2 causes an unwanted magnetic retention force F_2 pulling the permanent magnet 2 towards the ferromagnetic core of the non-activated electro-magnetic actuator 5_2, thereby causing an unwanted force-component in opposite direction of the desired movement and additionally increasing friction between the corresponding surfaces of the transport plane and the stand. The activated electro-magnetic actuator 5_3 generates a force F_1 .

[0110] In order to reduce these unwanted effects it is possible to generate an opposing magnetic field by means of reversely activating the electro-magnetic actuator 5_2 pushing the container carrier, thereby reducing friction.

[0111] Alternatively or additionally it is possible to choose an optimized distance between the permanent magnet 2 and the transport plane, see also the description regarding fig. 4.

[0112] Nevertheless, the magnetic forces in a desired movement direction using a ball-shaped permanent magnet 2 are higher compared to a bar magnet. A bar magnet bundles the magnetic field in one direction such that the lateral field density is low. Accordingly the lateral forces which are needed for a lateral transport are rela-

tively low while the unwanted retention forces are comparatively high. In case of a ball shaped magnet the magnetic field is less bundled and the lateral field density is similar to the field density in direction of the transport plane. Accordingly higher lateral forces can be generated and unwanted retention forces are lower.

[0113] Fig. 7 shows a side view of an embodiment of a sub plane comprising a magnetisable coupling element 27 providing a magnetic coupling between adjacent electro-magnetic actuators 5.

[0114] As shown, only the electro-magnetic actuator 5_3 is activated by driving the corresponding coil with a driving current and causes a magnetic flow guided by the coupling element 27 and extending in the ferromagnetic cores of the non-activated electro-magnetic actuators 5_2 and 5_3. As a result, a magnetic push force is generated by the electro-magnetic actuator 5_2 in interaction with the permanent magnet 2 reducing friction and superimposing in the desired direction with a pull force generated by the activated electro-magnetic actuators 5_3.

[0115] Fig. 8 shows a movement of a container carrier 1 and an activation order of corresponding electro-magnetic actuators 5_1 to 5_5 according to a first embodiment.

[0116] As shown, at time $t=0$ only the electro-magnetic actuator 5_2 is activated such that it generates a pull force moving the container carrier 1 in the shown direction.

[0117] At time $t=1$ the container carrier 1 has moved such that it resides on top of the electro-magnetic actuator 5_2, what e.g. can be sensed by means of the container carrier sensing device. In order to continue the movement electro-magnetic actuator 5_2 is deactivated and electro-magnetic actuator 5_3 is activated, thereby pulling the container carrier 1 forward.

[0118] At time $t=2$ the container carrier 1 has moved such that it resides on top of the electro-magnetic actuator 5_3. In order to continue the movement electro-magnetic actuator 5_3 is deactivated and electro-magnetic actuator 5_4 is activated, thereby pulling the container carrier 1 forward.

[0119] The above steps are repeated as long as a movement is desired. Concluding, a group of multiple electro-magnetic actuators 5_1 to 5_5 along a transport path is sequentially activated, to move the container carrier 1 along said first transport path.

[0120] Since the electro-magnetic actuators 5 can be activated independently, it is possible to independently and simultaneously move a plurality of different container carriers 1 along different paths, wherein self-evidently collisions have to be avoided.

[0121] Fig. 9 shows a movement of a container carrier 1' and an activation order of corresponding electro-magnetic actuators 5_1 to 5_3 according to a second embodiment. Fig. 5 shows the container carrier 1' in more detail.

[0122] In the shown embodiment a movement of the container carrier 1' placed on a first electro-magnetic actuator 5_2 to an adjacent second electro-magnetic actuator 5_3 comprises activating the first and the second electro-magnetic actuators 5_2 and 5_3 and a third electro-magnetic actuator 5_1 being adjacent to the first electro-magnetic actuator 5_2 in a specific order and polarity.

The electro-magnetic actuators 5_1 to 5_3 are part of the same row or column and can be activated generating a south-pole (S) or a north-pole (N) pointing towards the container carrier 1'.

[0123] In a first step at $t=0$ the second electro-magnetic actuator 5_3 is activated such that a resulting pull-force regarding the second permanent magnet 7 having a ring shape is generated, and the third electro-magnetic actuator 5_1 is activated such that a resulting push-force regarding said second permanent magnet 7 is generated.

[0124] After the container carrier 1' reaches a first predetermined position at time $t=1$, what e.g. can be sensed by means of the container carrier sensing device, the second and third electro-magnetic actuators 5_1 and 5_3 are deactivated and the first electro-magnetic actuator 5_2 is activated such that a resulting pull-force regarding the second permanent magnet 7 is generated and that a resulting push-force regarding said first permanent magnet 6 is generated.

[0125] After the container carrier 1' reaches a second predetermined position at time $t=2$ the first and the third electro-magnetic actuators 5_1 and 5_2 are deactivated and the second electro-magnetic actuator 5_3 is activated such that a resulting pull-force regarding the second permanent magnet 7 is generated.

[0126] In the shown embodiment a movement between adjacent electro-magnetic actuators 5_2 and 5_3 is performed in a sequence of three activation patterns regarding three adjacent electro-magnetic actuators 5_1 to 5_3. This leads to a continuous uniform smooth movement with a high positioning accuracy.

[0127] Fig. 10 shows a transfer device 33. The transfer device 33 may be arranged adjacent to or partially on top of the transport plane 4 (partially overlapping) and adjacent to a laboratory station 22 (see also Fig. 1).

[0128] The transfer device 33 comprises a pick-and-place device 42 movable in a vertical direction (Z direction) and a horizontal direction (X direction and/or Y direction). Further, the transfer device 33 may be adapted to rotate the sample container 3 along a vertical axis. The transfer device 33 may be further adapted to pick or grab the sample container 3 only on a sample container body avoiding picking a sample container cap.

[0129] The pick-and-place device 42 is adapted to pick a sample container 3 from a container carrier 1 placed on the transport plane 4 and place the sample container 3 in a sample container rack 35 in a formatting operation. In a reformatting operation the pick-and-place device 42 is adapted to pick a sample container 3 from a sample container rack 35 and place said sample container 3 in an empty container carrier 1 placed on said transport plane 4.

[0130] The transfer device 33 comprises a first and a second conveyor belt 41 being adapted to move a sample

container rack 35 from a formatting position below the pick-and-place device 42 towards a laboratory station 22 and to move the sample container rack 35 from the laboratory station 22 towards a reformatting position under said pick-and-place device 42.

[0131] The transfer device 33 comprises a sample container rack storage device 38 adapted to store sample container racks 35 in sample container rack trays 40.

[0132] The sample container rack storage device 38 comprises a push loading drawer, said push loading drawer having an open and a closed state, wherein in said open state said push loading drawer is adapted to be filled with sample container rack trays 40.

[0133] The sample container rack storage device 38 is adapted to store sample container rack trays 40 in three different storage levels below a transport plane level of said transport plane 4.

[0134] The sample container rack storage device 38 comprises an elevator device 39, said elevator device 39 being adapted to lift a sample container rack 35 from one of said storage levels to said transport plane level.

[0135] In the closed state said push loading drawer is adapted to supply sample container rack trays to the elevator device 39, wherein the elevator device 39 sequentially removes sample container racks 35 from the sample container rack tray and sequentially lifts the sample container racks 35 to the transport plane level.

[0136] Concluding, the transfer device 33 is adapted to remove a sample container rack 35 from the sample container rack storage device 38, (sequentially) take a number of sample containers 3 to be transferred from the transport plane 4 and insert them into the sample container rack 35. After said sample container rack 35 is filled, the sample container rack 35 including said inserted sample containers is transferred to the laboratory station 22 by means of the first conveyor belt 41.

[0137] After being processed, the laboratory station outputs the sample container rack 35. The sample container rack 35 is then transferred to the pick-and-place device 42 by means of the second conveyor belt 41.

[0138] Finally, the pick-and-place device 42 transfers the sample containers 3 back into corresponding container carriers 1 placed under the pick-and-place device 42 on top of the transport plane 4.

Claims

1. Laboratory sample distribution system (100), comprising:

- a number of container carriers (1), said container carriers each comprising at least one magnetically active device, preferably at least one permanent magnet (2, 6, 7), and being adapted to carry a sample container (3) containing a sample,
- a transport plane (4) being adapted to carry

said multiple container carriers,

- a number of electro-magnetic actuators (5, 5') being stationary arranged below said transport plane, said electro-magnetic actuators being adapted to move a container carrier on top of said transport plane by applying a magnetic force to said container carrier, and

- at least one transfer device (33) being arranged to transfer a sample container carried by a container carrier on the transport plane to a sample container rack (35) used by a laboratory station (22) in a formatting operation and/or to transfer a sample container from a sample container rack used by the laboratory station to a container carrier on the transport plane in a reformatting operation, wherein the at least one transfer device comprises a sensor for determining a rack format of the sample container rack, wherein the transfer device is adapted to perform the formatting operation and/or the reformatting operation rack format specific.

2. Laboratory sample distribution system according to claim 1, **characterized in that** said at least one transfer device is adapted to transfer more than one sample container in parallel.

3. Laboratory sample distribution system according to anyone of the preceding claims, **characterized in that** said transport plane comprises at least one transfer location (28) located adjacent to said at least one transfer device, said at least one transfer device being arranged to transfer said sample container between said at least one transfer location and said sample container rack.

4. Laboratory sample distribution system according to claim 3, **characterized in that** said transport plane comprises at least one transfer area (27) located adjacent to said at least one transfer device and being adapted to store a number of container carriers, said at least one transfer location being located within said at least one transfer area.

5. Laboratory sample distribution system according to claim 4, **characterized in that** said at least one transfer area comprises priority areas (29), said at least one transfer device being arranged to transfer said sample container between at least one specific priority location (30) of said priority area and said sample container rack with priority.

6. Laboratory sample distribution system according to anyone of the preceding claims, **characterized in that** said transport plane comprises at least one buffer area (37) adapted to store container carriers actually not carrying a sample container.

7. Laboratory sample distribution system according to anyone of the preceding claims, **characterized by** a container carrier conveyor (34) functionally coupled to the transport plane, said container carrier conveyor being arranged to convey container carriers not being placed on top of said transport plane.
8. Laboratory sample distribution system according to anyone of the preceding claims, **characterized in that** said transfer device (33) comprises at least one conveyor (41), said conveyor (41) being adapted to move a sample container rack (35) towards a laboratory station and/or to move a sample container rack (35) from a laboratory station towards said transport plane (4).
9. Laboratory sample distribution system according to anyone of the preceding claims, **characterized in that** said transfer device (33) comprises a sample container rack storage device (38) adapted to store sample container racks (35).
10. Laboratory sample distribution system according to claim 9, **characterized in that** said sample container rack storage device (38) is adapted to store sample container rack trays (40), said sample container rack trays (40) being adapted to store a number of sample container racks (35).
11. Laboratory sample distribution system according to claim 9 or 10, **characterized in that** said sample container rack storage device (38) comprises a push loading drawer, said push loading drawer having an open and a closed state, wherein in said open state said push loading drawer is adapted to be filled with sample container racks (35) and/or sample container rack trays (40).
12. Laboratory sample distribution system according to anyone of claims 9 to 11, **characterized in that** said sample container rack storage device (38) is adapted to store sample container racks (35) or sample container rack trays (40) in at least one a storage level below a transport plane level of said transport plane (4), wherein said sample container rack storage device (38) comprises an elevator device (39), said elevator device (39) being adapted to lift a sample container rack (35) or a sample container rack tray (40) from said at least one storage level to said transport plane level.
13. Laboratory sample distribution system according to anyone of claims 9 to 12, **characterized in that** said transfer device (33) is adapted to remove a sample container rack (35) from said sample container rack storage device (38), take a number of sample containers (3) to be transferred from said transport plane (4) and insert them into said sample container rack (35) and provide said sample container rack (35) including said inserted sample containers to said laboratory station (22).
14. Laboratory system (1000), comprising:
- at least one laboratory station (22), preferably a pre-analytical, an analytical and/or a post-analytical station, and
 - a laboratory sample distribution system (100) according to anyone of the preceding claims.
15. Laboratory system according to claim 14, **characterized in that** said at least one laboratory station is a decapping station, a recapping station, a labeling station, an aliquot station, a centrifugation station, an archiving station, a pipetting station, a sorting station, a tube type identification station, or a sample quality determining station.

Fig.1

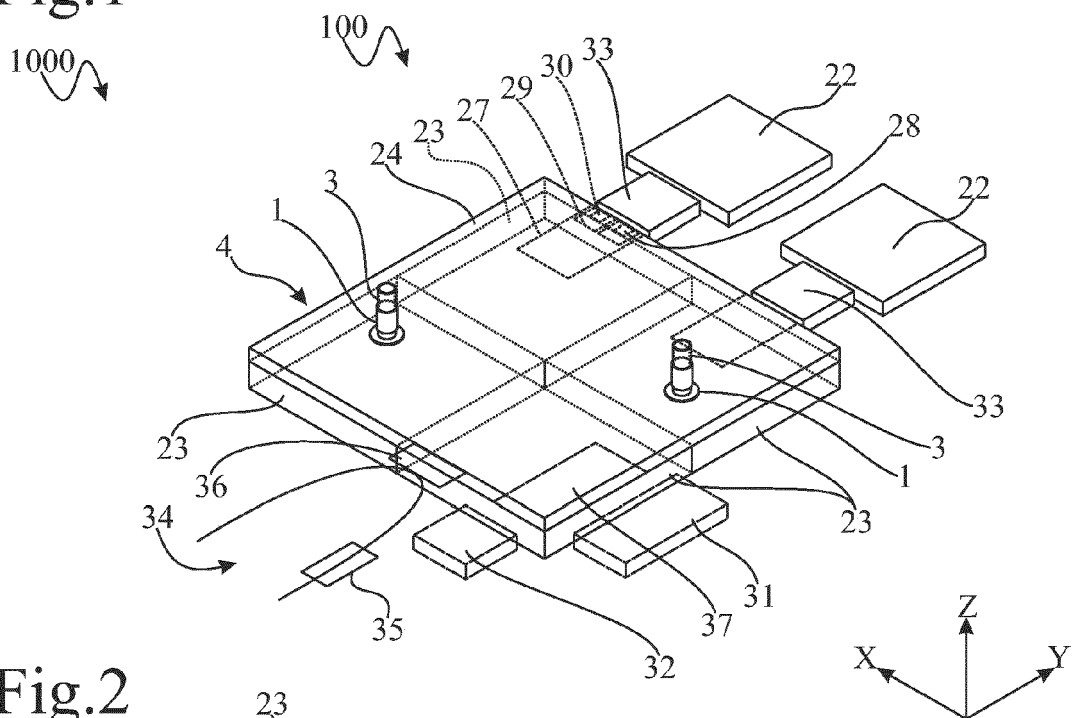


Fig.2

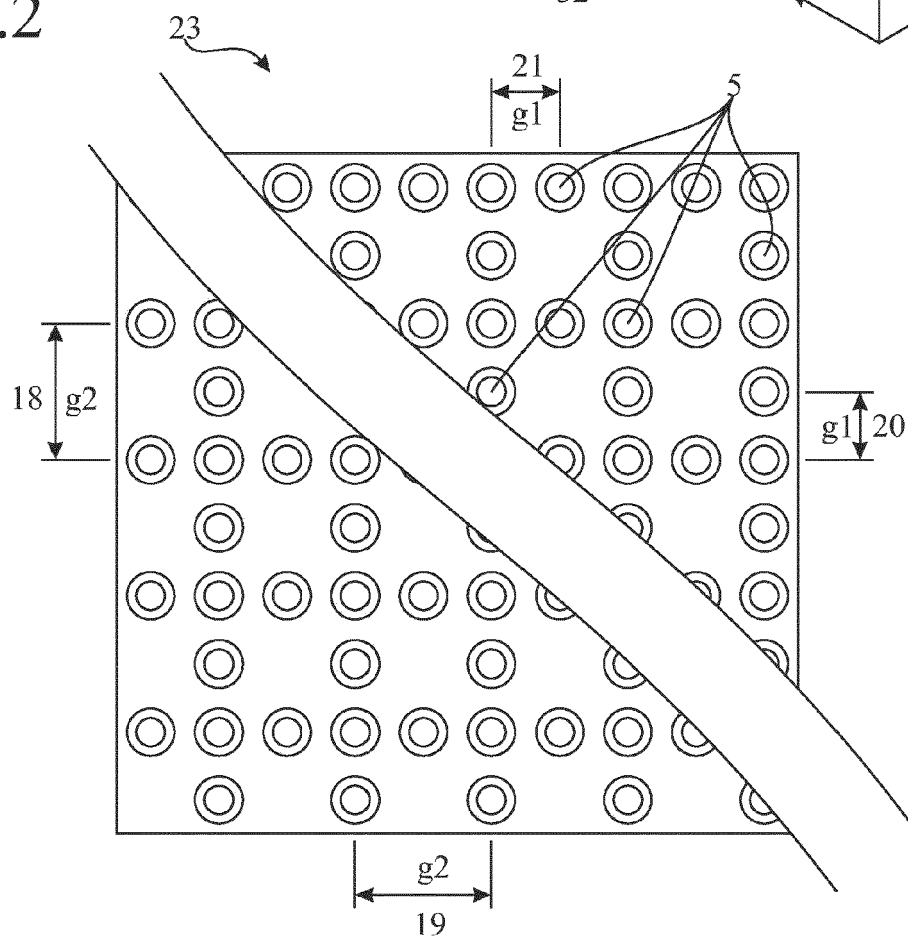


Fig.3

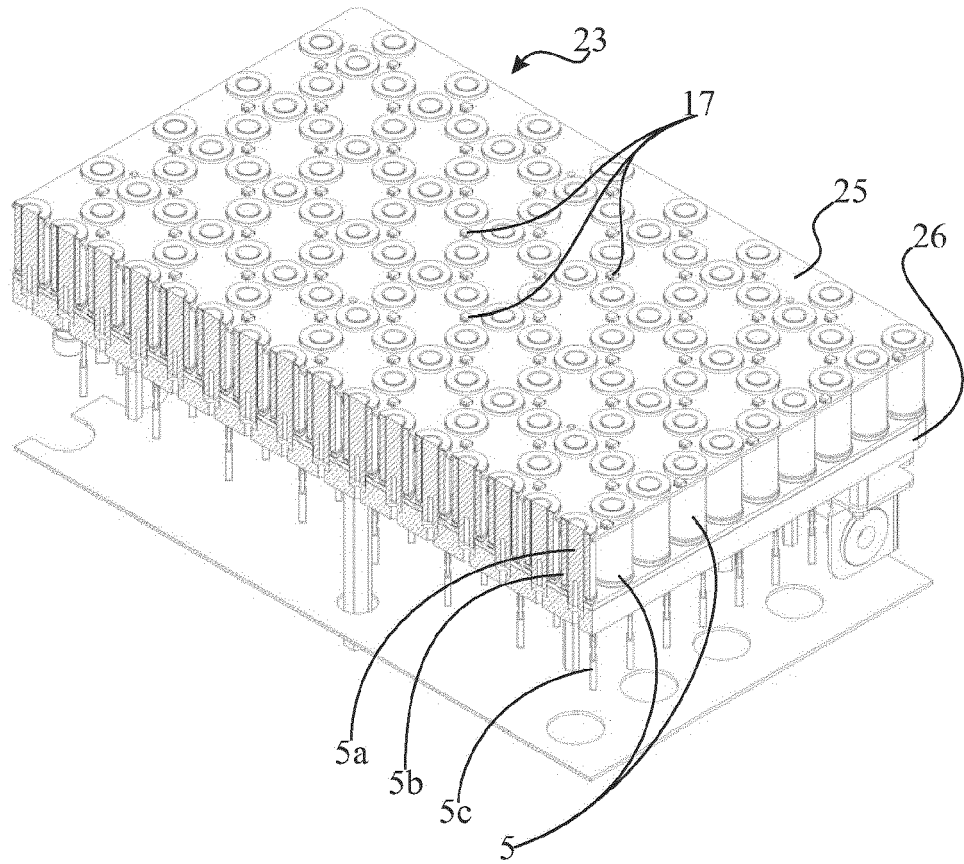


Fig.4

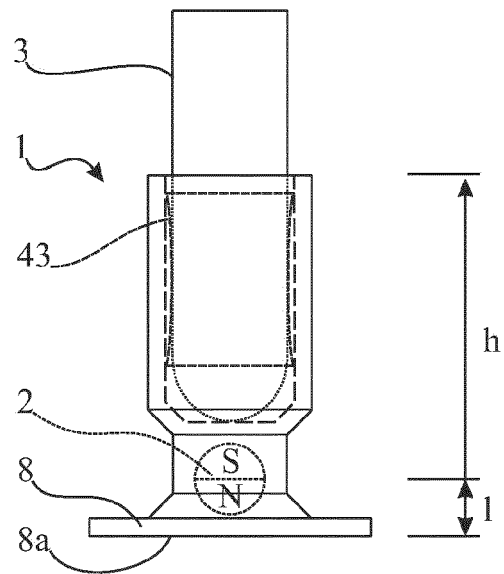


Fig.5

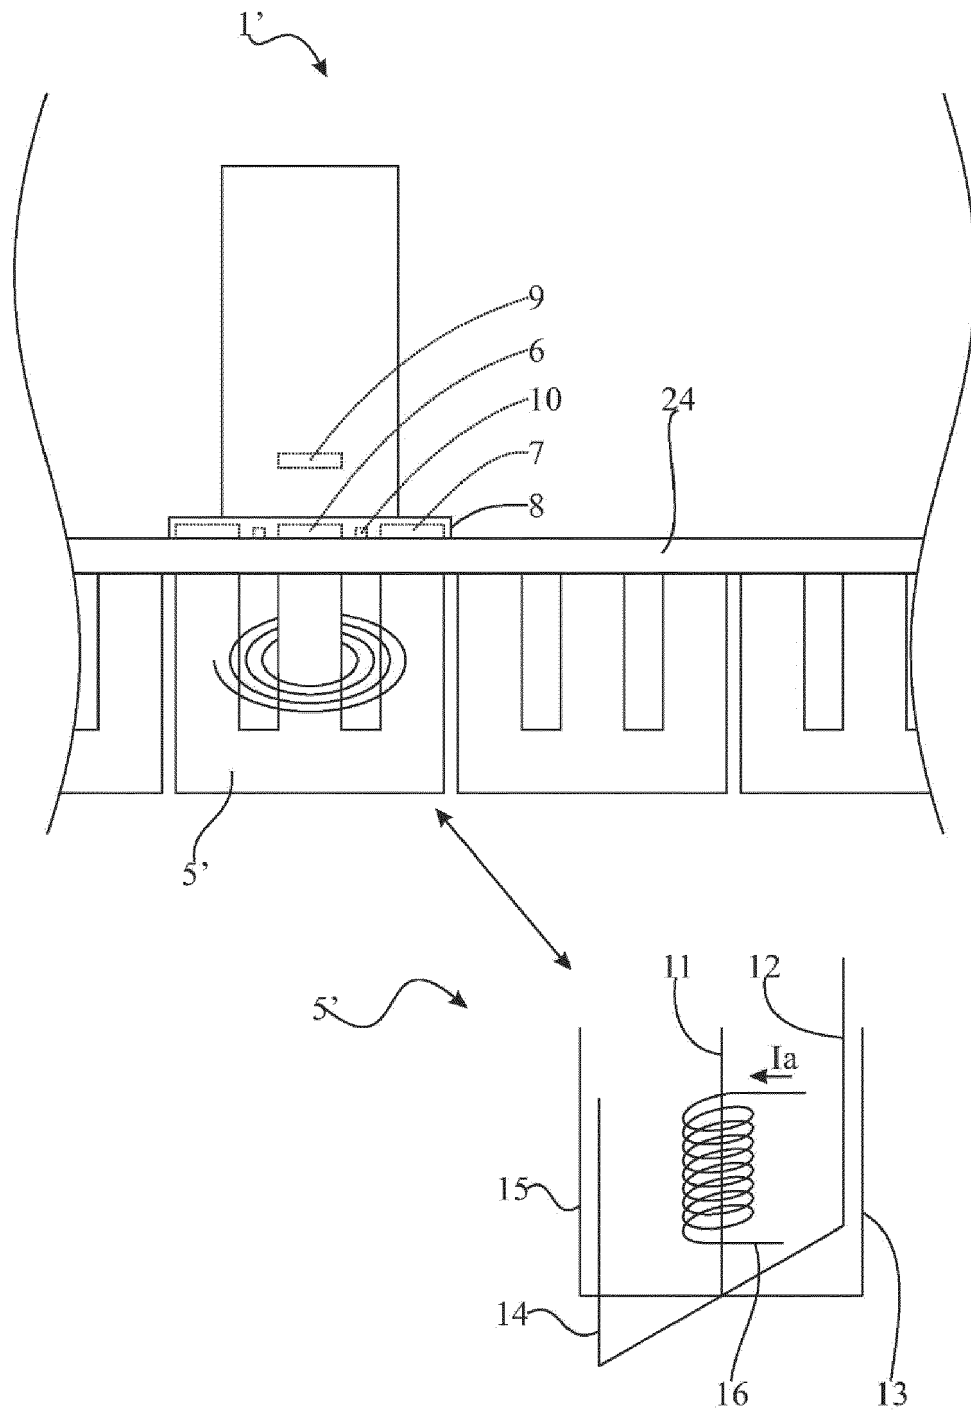


Fig.6

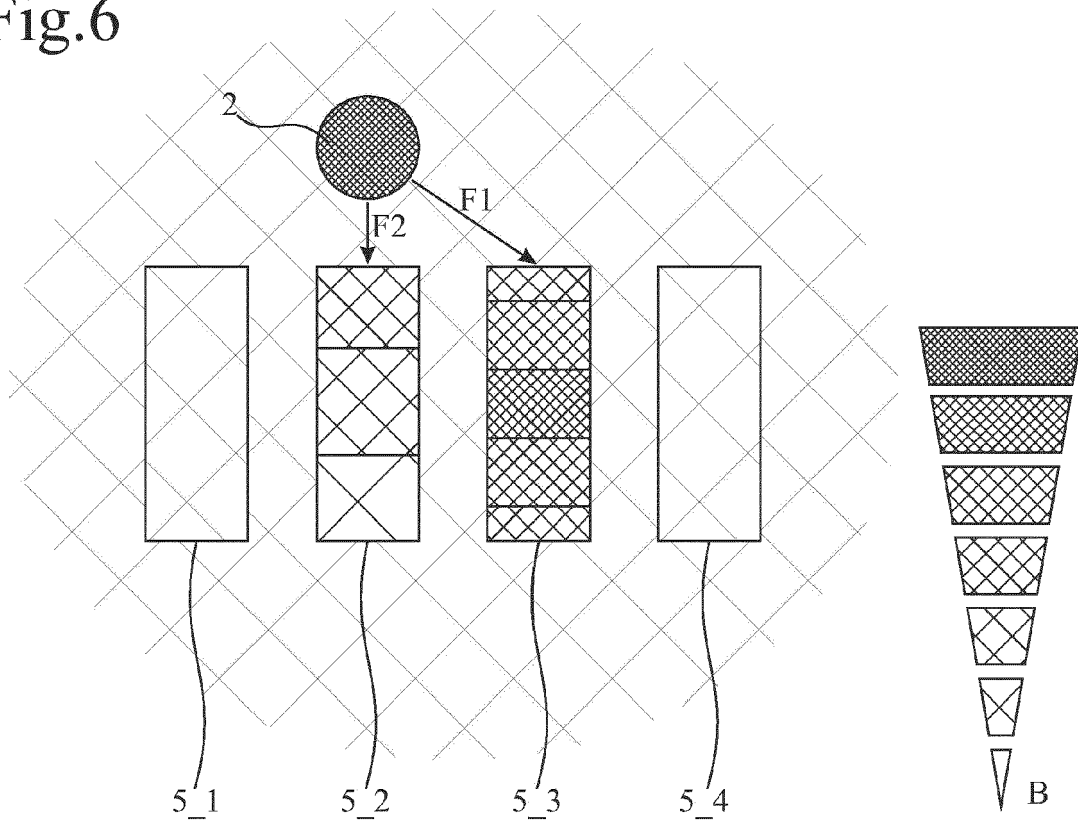


Fig.7



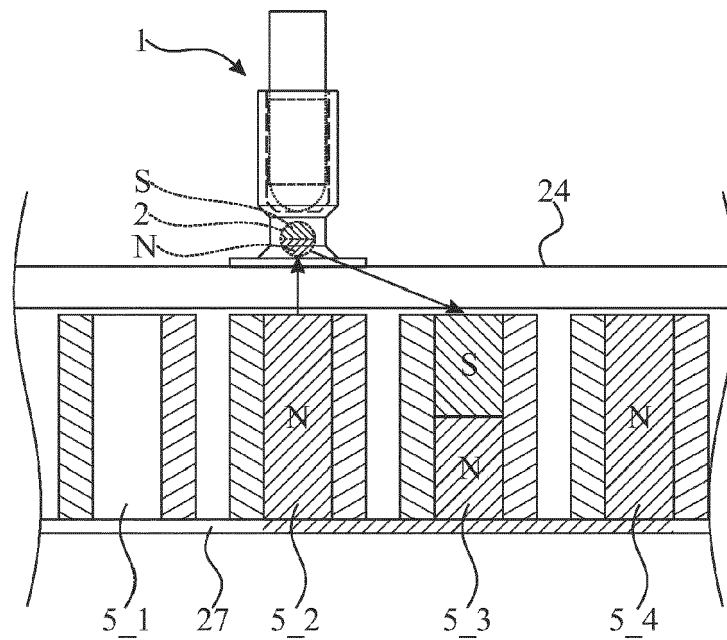


Fig.8

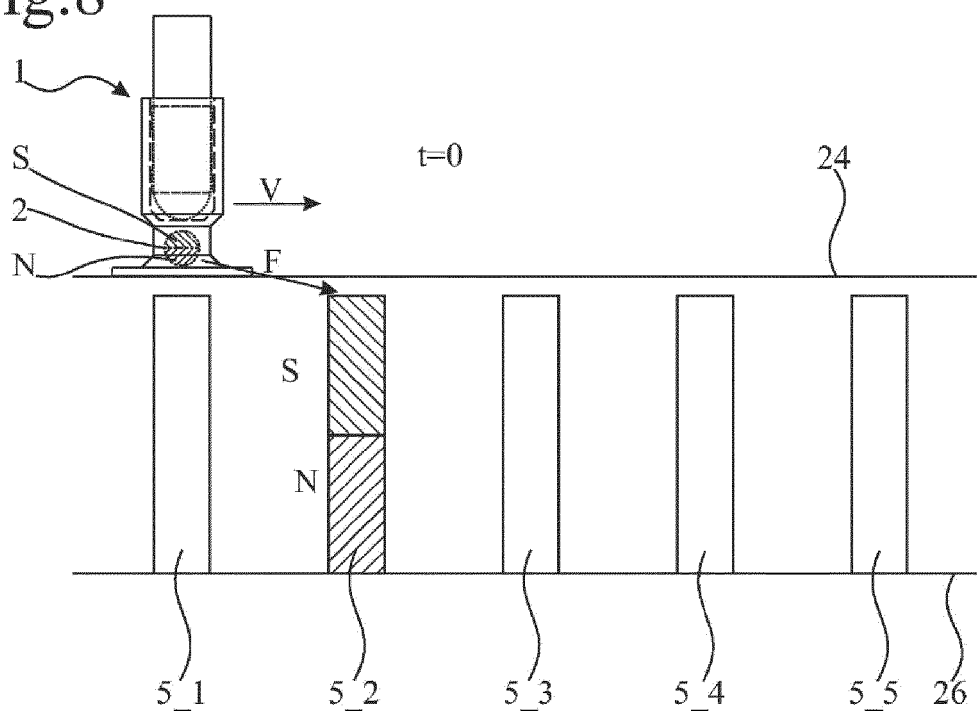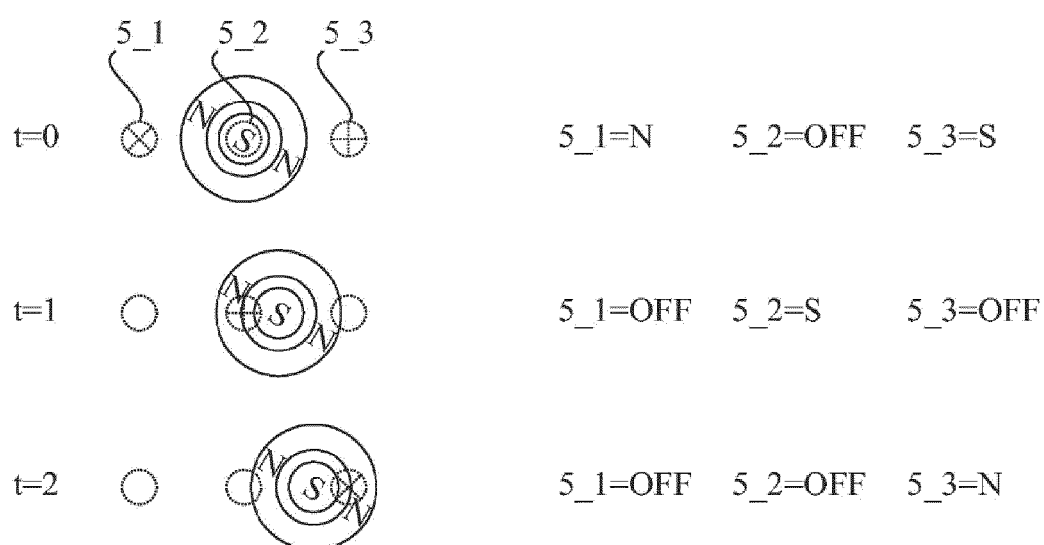

$t=0$	5_1=OFF	5_2=ON	5_3=OFF	5_4=OFF	5_5=OFF
$t=1$	5_1=OFF	5_2=OFF	5_3=ON	5_4=OFF	5_5=OFF
$t=2$	5_1=OFF	5_2=OFF	5_3=OFF	5_4=ON	5_5=OFF

Fig.9



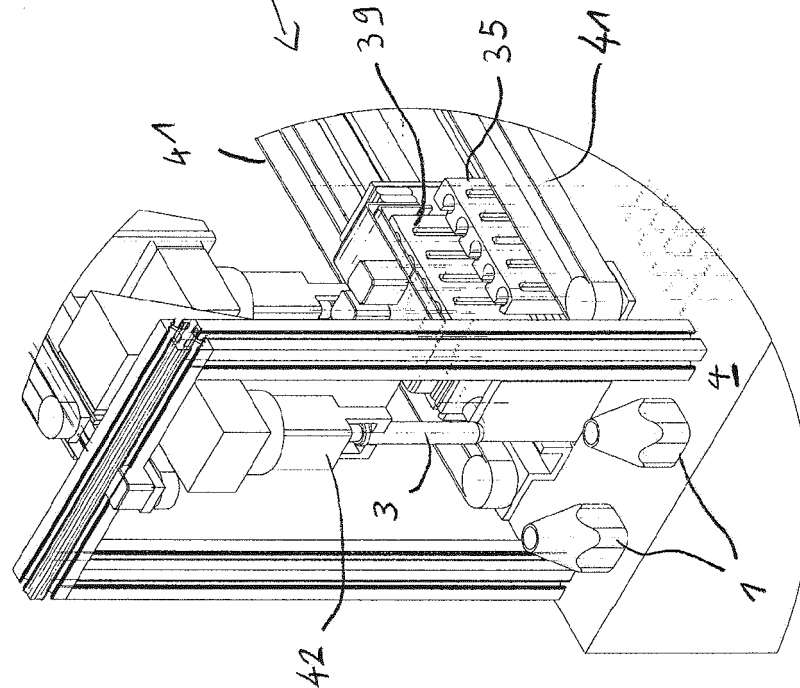
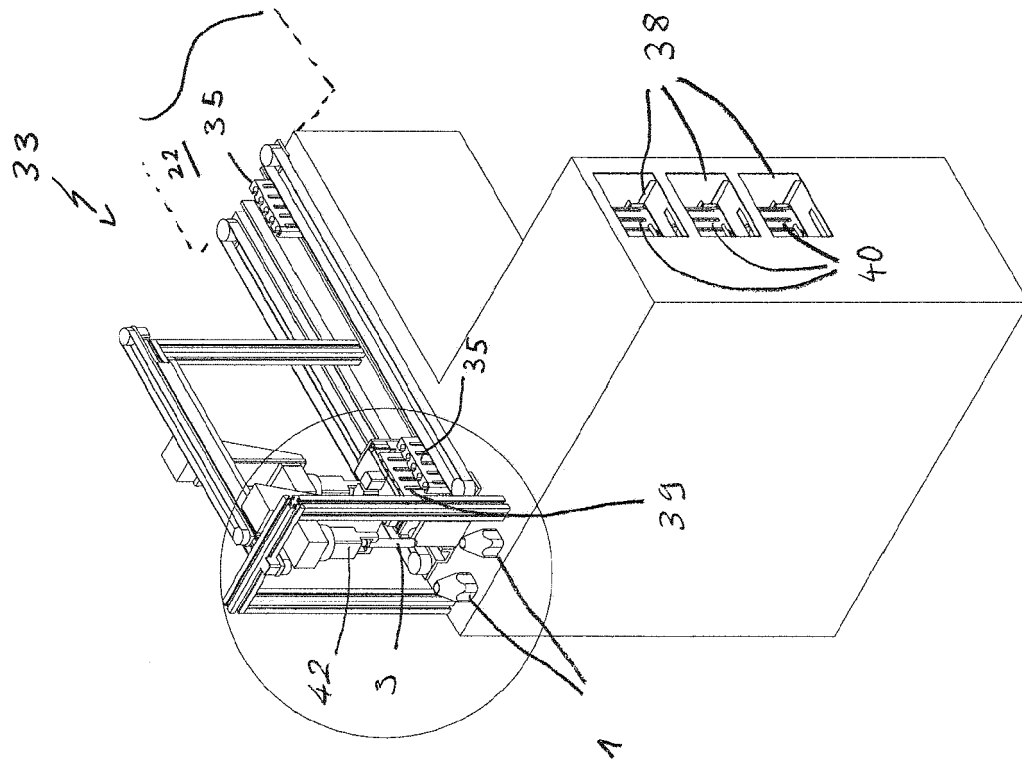


Fig. 10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20050196320 A1 [0003]