



HU000025493T2

(19) **HU**(11) Lajstromszám: **E 025 493**(13) **T2****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala**EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 12 181714**
(22) A bejelentés napja: **2012. 08. 24.**

(51) Int. Cl.: **C04B 351/09** (2006.01)
C04B 354/84 (2006.01)

(96) Az európai bejelentés bejelentési száma:
EP 20120181714

(97) Az európai bejelentés közzétételi adatai:
EP 2700624 A1 **2014. 02. 26.**

(97) Az európai szabadalom megadásának meghirdetési adatai:
EP 2700624 B1 **2015. 04. 15.**

(72) Feltaláló(k):
Gupta, Amul, Falconer, NY 14733-1797 (US)
Heidrich, Roland, 33078 San Vito al Tagliamento (PN)
(IT)
Lurlaro, Fabio, 33078 San Vito (IT)
Corrado, Barbara, 33078 San Vito (IT)
Selkregg, Kevin, Dewittville NY New York 14728 (US)
Pagnucco, Ivan, 33098 Arzene (PN) (IT)
Lenarduzzi, Ilario, 33075 Cordovado (PN) (IT)
Batagelj, Luciano, 33078 San Vito al Tagliamento (PN)
(IT)

(73) Jogosult(ak):
Refractory Intellectual Property GmbH & Co.
KG, 1100 Wien (AT)

(74) Képviselő:
Mészáros Katalin, BUDAPATENT Szabadalmi
és Védjegy Iroda Kft., Budapest

(54) **Ömlesztett tűzálló anyag, mely alumínium-oxid, cirkónium-dioxid és szilícium-dioxid alapú, és ilyen anyag alkalmazása**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 700 624 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
15.04.2015 Bulletin 2015/16

(51) Int Cl.:
C04B 35/109 (2006.01) C04B 35/484 (2006.01)

(21) Application number: **12181714.2**

(22) Date of filing: **24.08.2012**

(54) **Fused cast refractory material based on aluminium oxide, zirconium dioxide and silicon dioxide, and use of such a material**

Feuerbeständiges Schmelzgussmaterial basiert auf Aluminiumoxid, Zirkoniumoxid und Siliciumdioxid und Verwendung eines solchen Materials

Matériau réfractaire coulé fondu à base d'oxyde d'aluminium, de dioxyde de zirconium et de dioxyde de silicium, et utilisation d'un tel matériau

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
26.02.2014 Bulletin 2014/09

(73) Proprietor: **Refractory Intellectual Property GmbH
& Co. KG
1100 Wien (AT)**

(72) Inventors:
• **Gupta, Amul
Falconer, NY 14733-1797 (US)**
• **Heidrich, Roland
33078 San Vito al Tagliamento (PN) (IT)**
• **Lurlaro, Fabio
33078 San Vito (IT)**

- **Corrado, Barbara
33078 San Vito (IT)**
- **Selkregg, Kevin
Dewittville NY New York 14728 (US)**
- **Pagnucco, Ivan
33098 Arzene (PN) (IT)**
- **Lenarduzzi, Ilario
33075 Cordovado (PN) (IT)**
- **Batagelj, Luciano
33078 San Vito al Tagliamento (PN) (IT)**

(74) Representative: **Berkenbrink, Kai-Oliver
Patentanwälte Becker & Müller
Turmstrasse 22
40878 Ratingen (DE)**

(56) References cited:
WO-A2-02/08143 FR-A1- 2 875 497

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 700 624 B1

Description

[0001] The invention relates to a fused cast refractory material based on aluminium oxide, zirconium dioxide and silicon dioxide, and a use of such a material.

5 **[0002]** Fused cast refractory materials including aluminium oxide (Al_2O_3), zirconium dioxide (ZrO_2) and silicon dioxide (SiO_2) as the main components are called fused cast AZS products or AZS bricks.

[0003] AZS bricks are used in melter tanks and gathering ends in the glassmaking industry in areas that come into contact with the molten glass, but also in the superstructure and crown of the tanks.

10 **[0004]** Fused cast AZS bricks have a vitreous phase that comprises SiO_2 , Al_2O_3 , ZrO_2 and Na_2O (sodium oxide) as main components. When the AZS brick is used, the vitreous phases form melting phases with low melting point that may be sweated out of the brick and come into contact with the molten glass due to their low viscosity. This sweating out of the molten phase fractions of the vitreous phase, also called to as exudation, may contaminate the molten glass.

15 **[0005]** In the past therefore, there has been no shortage of attempts to make AZS bricks having a lower rate of exudation when used in a glass tank. Such attempts to produce AZS bricks in which the tendency to exudate was lower concentrated particularly on reducing the fraction of vitreous phases in the fused cast AZS bricks. In another approach, efforts were concentrated on reducing the formation of molten phase fractions of the vitreous phase by establishing a given ratio between the fractions of SiO_2 and Na_2O in the vitreous phase.

20 **[0006]** FR 2875497 discloses a fused cast refractory material based on aluminium oxide, zirconium oxide and silicon dioxide, having a vitreous phase fraction comprising Al_2O_3 and Na_2O , the vitreous phase fraction is 17-24 wt%, the mass fractions of Al_2O_3 is 59.5-73%; the mass fraction of Na_2O is 1.0-2.5 %; the mass fraction of the ZrO_2 component is 15.5-22 %; the mass fraction of the SiO_2 component is 10.5-15 %.

[0007] However, the fused cast AZS bricks yielded by these methods still exhibited a tendency to exudate abundantly when used in the glass tanks, a property that is capable of significantly impairing the molten glass.

25 **[0008]** The object of the invention is to provide a fused cast refractory material based on aluminium oxide, zirconium dioxide and silicon dioxide, particularly in the form of an AZS brick, that exhibits reduced tendency to exudate when used in glass tanks.

[0009] In order to solve this object, a fused cast refractory material according to claim 1 is provided.

[0010] The fused cast refractory material according to the invention is a fused cast shaped refractory material, in the form of a fused cast and shaped AZS product, particularly in the form of a fused cast AZS brick.

30 **[0011]** The exceptionally low tendency to exudate exhibited by the material according to the invention does not take place unless the material components are present in the material in the very narrowly defined fractions according to the invention.

35 **[0012]** The invention is based particularly on the realisation that the tendency to exudate of a fused cast AZS brick is determined by the fractions of Al_2O_3 and Na_2O , and particularly by the proportion of the fractions of these components relative to one another in the vitreous phase fraction of the AZS brick. According to the invention, it was found that it is possible to provide a fused cast AZS brick with exceptionally low tendency to exudate if the fractions of Al_2O_3 and Na_2O in the fused cast brick are in the fraction range as set forth herein.

40 **[0013]** Surprisingly, it has been revealed according to the invention that the material according to the invention has a particularly low tendency to exudate when the molar ratio between Al_2O_3 and Na_2O in the vitreous phase of the material is within a characteristic range from 0.8 to 1.6, relative to the vitreous phase. The molar ratio between Al_2O_3 and Na_2O in the vitreous phase of the material according to the invention may particularly preferably be at least 0.8 or 0.83 or 0.87 or 0.9 or 0.93 or 0.96 or 1.0 or 1.03 or 1.06 or 1.1 and not above 1.6 or 1.58 or 1.53 or 1.5 or 1.46 or 1.43 or 1.4.

45 **[0014]** It has been discovered that the tendency to exudate of a species-related AZS brick can increase sharply if the molar ratio between Al_2O_3 and Na_2O in the vitreous phase is even slightly outside of the ranges cited previously. For example, the tendency of an AZS brick to exudate may be greater by a factor of 10 or 20 if the molar ratio between Al_2O_3 and Na_2O in the vitreous phase of an AZS brick is 1.65, that is to say only slightly above the value of 1.6.

50 **[0015]** A further surprising discovery is that the tendency to exudate of a material according to the invention may be particularly low when the fraction of Na_2O in the vitreous phase is relatively high. According to one embodiment, it may therefore be provided that the molar fraction of Na_2O in the vitreous phase is in the range from 8.0 to 14.0 mole percent relative to the vitreous phase, and for example at least 9.0 or 9.5 or 10 mole percent relative to the vitreous phase. An upper limit of the Na_2O fraction in the vitreous phase may be 14.0 or 13.0 or 12.0 or 11.5 or 11.0 mole percent, for example, again relative to the vitreous phase.

[0016] The vitreous phase may contain all of the components of the material according to the invention, in particular the components Al_2O_3 , Na_2O and SiO_2 .

55 **[0017]** According to one embodiment of the invention, the molar fraction of Al_2O_3 in the vitreous phase may be in the range of the molar fraction of Na_2O or slightly higher, that is for example in a range from 8.0 to 18.0 mole percent relative to the vitreous phase, and for example may be at least 8.0 or 9.0 or 10.0 or 10.5 or 11.0 or 11.5 or 12.0 or 12.5 mole percent relative to the vitreous phase. An upper limit of the Al_2O_3 fraction in the vitreous phase may be 18.0 or 17.0 or

16.0 or 15.0 or 14.5 or 14.0 or 13.5 mole percent, for example, again relative to the vitreous phase.

[0018] The molar fraction of SiO_2 in the vitreous phase may be in the range from 70.0 to 84.0 mole percent relative to the vitreous phase, and for example may be at least 70.0 or 72.0 or 74.0 mole percent relative to the vitreous phase. An upper limit of the SiO_2 fraction in the vitreous phase may be 84.0 or 82.0 or 80.0 or 78.4 mole percent, for example, again relative to the vitreous phase. The material according to the invention may contain a relatively large fraction of vitreous phase compared with the AZS bricks known from the prior art, for example a vitreous phase fraction greater than 20.0 % by mass, for example yet greater than 22.0 or 23.0 or 23.3 or even 24.0 % by mass as well. Moreover, it may particularly be provided that the fraction of vitreous phase in the material according to the invention is not greater than 30.0 % by mass, that is to say for example also not above 28.0 or 27.0 or 26.3 or 26.0 % by mass. The fraction of vitreous phase in the material according to the invention may preferably be in the range from 22.0 to 27.0 % by mass, particularly preferably 23.3 to 26.3 % by mass.

[0019] As set forth in the precedings, the invention is based particularly on the realisation that the tendency to exudate of a fused cast AZS brick is determined by the fractions of Al_2O_3 and Na_2O , and particularly by the proportion of the fractions of these components relative to one another in the vitreous phase fraction of the AZS brick. Beside the proportion of the fractions of these components relative to one another in the vitreous phase fraction, according to the invention, it was found that it is possible to provide a fused cast AZS brick with exceptionally low tendency to exudate if the fractions of Al_2O_3 and Na_2O in the fused cast brick, i.e. in the bulk material, are in the mass fraction range set forth herein.

[0020] All of the values in mass percentage, provided herein, are mass percentage values relative to the overall mass of the material according to the invention unless otherwise indicated in individual cases.

[0021] According to a preferred embodiment of the invention, the mass fraction of Al_2O_3 in the material may be present in the range from 60 to 70 % by mass, particularly preferably in a fraction of at least 61.0 or 61.75 or 62.9 % by mass and in a fraction of not above 69.0 or 68.4 or 66.2 or 65.5 % by mass.

[0022] The fraction of Na_2O in the material may be present in the range from 2.0 to 2.6 % by mass, particularly preferably in a fraction of at least 2.1 or 2.2 % by mass and in a fraction of not above 2.5 or 2.45 % by mass.

[0023] In this context, it was also particularly surprising to discover that the fractions of Na_2O in the refractory material according to the invention are relatively high, and that it was therefore to be expected that a fused cast AZS brick comprising such a high fraction of Na_2O would exhibit a marked tendency to exudate. Because a high fraction of Na_2O in a fused cast AZS brick is usually associated with a high fraction of vitreous phase with low viscosity and thus also with a high fraction of molten phases that would cause increased exudation when the brick was used.

[0024] In fact, the fraction of vitreous phases in the material according to the invention may indeed be relatively large. However, it has been discovered according to the invention that the high fraction of vitreous phases in the material according to the invention does not result in the formation of a large fraction of molten phases with low melting point when the material is used, because these vitreous phases form highly viscous molten phases due to the characterizing fraction of Al_2O_3 and Na_2O in the material according to the invention, such that the material according to the invention has an extremely low tendency to exudate when it is used in tank furnaces.

[0025] The molar ratio of Al_2O_3 to Na_2O in the material according to the invention is preferably in the range from 14.0 to 21.3, particularly preferably in a molar ratio of at least 15.0 or 15.6 and not above 19.2 or 17.8.

[0026] Beside Al_2O_3 and Na_2O , the fused cast material according to the invention may comprise further components in the range from 38.0 to 27.4 % by mass. Such further components are ZrO_2 and SiO_2 beside any further components, if any.

[0027] The mass fraction of the component ZrO_2 in the fused cast material according to the invention may be of particular importance for corrosion resistance and mechanical stability in the production process.

[0028] The mass fraction of the ZrO_2 component in the material according to the invention may be for example in the range from 13 to 19 % by mass, particularly preferably in a mass fraction of at least 14.0 or 15.0 or 15.9 or 16.2 % by mass and in a mass fraction of not above 18.5 or 18.0 or 17.5 % by mass. The mass fraction of ZrO_2 indicates the sum of the mass fraction of ZrO_2 and HfO_2 in the fused cast refractory material of the present invention as ZrO_2 and HfO_2 are hardly to differentiate analytically. According to the invention, the mass fraction of the HfO_2 component in the material according to the invention may be for example below 0.5 % by mass, particularly preferably below 0.4 % by mass.

[0029] The mass fractions of the component SiO_2 in the fused cast material according to the invention may also be of particular importance for the vitreous phase formation and for the exudation behaviour.

[0030] The mass fraction of the SiO_2 component in the material according to the invention may be in the range from 15.5 to 18 % by mass, particularly preferably in a mass fraction of at least 15.9 % by mass and in a mass fraction of not above 17.5 or 17.2 or 17.0 % by mass.

[0031] According to one embodiment, it may particularly be provided that the mass fraction of further components that are present in the material according to the invention beside Al_2O_3 , Na_2O , ZrO_2 and SiO_2 is relatively low and for example is below 1.0 or 0.5 or 0.25 % by mass or even below 0.2 % by mass. Such further components can be, for example, one or several of the following components: Fe_2O_3 , TiO_2 , CaO , K_2O , MgO , Li_2O , Cr_2O_3 , BaO , B_2O_3 , P_2O_5 or CuO . Preferably, the mass fraction of each of these further components is present in the material according to the invention

EP 2 700 624 B1

below 0.1 % by mass. Moreover, preferably the mass fraction of these further components is present in the material according to the invention below the following % by mass:

5 Fe₂O₃ below 0.1 or 0.08 % by mass;
 TiO₂ below 0.06 or 0.05 % by mass
 CaO below 0.05 or 0.04 % by mass;
 K₂O below 0.04 or 0.03 by mass;
 MgO below 0.03 or 0.2 % by mass;
 LiO₂ below 0.1 or 0.01 % by mass;
 10 Cr₂O₃ below 0.1 or 0.01 % by mass,
 B₂O₅ below 0.1 or 0.01 % by mass;
 P₂O₅ below 0.1 or 0.01 % by mass;
 CuO below 0.1 or 0.01 % by mass.

15 **[0032]** The bulk density of the material according to the invention may be relatively low. According to one embodiment, the bulk density of the material according to the invention is below 3.7 g/cm³, for example below 3.6 or 3.56 g/cm³ as well. The bulk density of the material according to the invention may be for example at least 3.3 g/cm³, that is to say for example at least 3.4 or 3.45 or 3.5 or 3.53 g/cm³. The bulk density of the material according to the invention is preferably in a range from 3.4 to 3.7 g/cm³, particularly preferably in a range from 3.5 to 3.6 g/cm³ or in a range from 3.53 to 3.56 g/cm³.

20 **[0033]** The following table 1 lists the components of six different AZS bricks. The brick identified with the letter E indicates an AZS brick according to the invention. The bricks identified with designators S1 to S5 are AZS bricks according to the prior art.

Table 1

Components	AZS bricks according to prior art					AZS brick according to invention
	S1	S2	S3	S4	S5	E
Al ₂ O ₃	51.0	48.6	53.45	45.55	68.0	64.20
ZrO ₂	32.7	36.5	36.5	41.0	17.0	16.83
SiO ₂	14.9	13.6	9.0	12.2	13.0	16.46
Na ₂ O	1.15	1.05	0.8	1.0	1.7	2.35
Impurities	0.25	0.25	0.25	0.25	0.3	0.16
Vitreous phase	20.0	17.5	13.0	16.5	21.0	24.8
Bulk Density [g/cm ³]	3.72	3.85	3.93	4.0	3.65	3.55

40 **[0034]** All figures in percentage by mass unless otherwise indicated.

[0035] Bricks S 1 to S5 and E were tested in respect of their tendency to exudate. For this purpose, the TC11 Exudation Test Guidelines (Technical Committee 11; TC 11) issued by the International Commission on Glass (ICG) were used. This test method for determining exudation is a generally recognised test method for determining exudation of fused cast AZS bricks.

45 **[0036]** The test method according to these TC 11 Exudation Test Guidelines is as follows:

[0037] Tested are samples of the following dimensions: cylinders with a diameter of 50 mm and a height of 100 mm. The samples are heated up to 1550°C for several cycles (up to ten). The dwell time is 96 h for the first cycle and 2 h for all following cycles. After each cycle, the samples are cooled down to room temperature. Archimedes' principle is applied to determine volume increase due to exudation, i.e. volume of vitreous phase adherent on the surface of the specimen after the corresponding heating cycle.

50 **[0038]** In all, 10 heating-up cycles were performed to determine exudation. The loss of mass that the bricks according to table 1 underwent as a result of exudation is indicated in table 2, relative to the respective total mass of the bricks. Moreover, in table 2 is indicated the molar ratio between Al₂O₃ and Na₂O in the vitreous phase and in the bulk material, according to the bricks according to table 1.

55

Table 2

	AZS bricks according to prior art					AZS brick according to invention
	S1	S2	S3	S4	S5	E
Molar ratio $\text{Al}_2\text{O}_3 / \text{Na}_2\text{O}$ in vitreous phase	2.95	2.77	2.17	2.7	1.65	1.37
Molar ratio $\text{Al}_2\text{O}_3 / \text{Na}_2\text{O}$ in bulk material	26.96	28.14	40.61	27.69	24.31	16.45
Exudation [wt. %]	5.88	4.95	3.17	3.96	9.61	0.43

[0039] The reduction in exudation in a fused cast AZS brick according to the invention compared with the exudation in a fused cast AZS brick according to the prior art is thus substantial.

[0040] The correlation between the molar ratio between Al_2O_3 and Na_2O in the vitreous phase (Figure 1) or in the bulk material (Figure 2), respectively, on the one hand and the exudation on the other hand, according to table 2, is illustrated in Figures 1 and 2.

[0041] The fused cast refractory AZS brick according to the invention may be produced according to methods for producing fused cast AZS products known from the prior art. According to the known methods for producing fused cast AZS products, suitable raw materials are melted and the molten mass is cast into a mould. The molten mass cools down in the mould and upon solidifying forms the fused cast AZS brick. The raw materials may particularly be melted electrically, that is to say particularly with the aid of an electric arc.

[0042] The object of the invention is also a method as described previously for producing a material according to the invention and a material obtained according to said method.

[0043] Another object of the invention is the use of a material according to the invention in areas of apparatuses used in the melting of glass and/or for treating molten glass that do not come into contact with the molten glass.

[0044] Such apparatuses for melting glass or for treating molten glass may particularly be glass tanks, particularly melting tanks or gathering ends, for example container glass tanks or float glass tanks.

[0045] In particular, the materials according to the invention may be used in the superstructure or the crown of the apparatuses cited previously, that is to say in areas above the molten glass in the corresponding apparatuses.

[0046] All of the inventive features disclosed here may be implemented individually or may be used in any combination with each other.

Claims

1. Fused cast refractory material based on aluminium oxide, zirconium dioxide and silicon dioxide, having a vitreous phase fraction comprising Al_2O_3 and Na_2O , wherein the molar ratio between Al_2O_3 and Na_2O in the vitreous phase is in the range from 0.8 to 1.6, and wherein the mass fraction of the SiO_2 component in the material is in the range from 15.5 to 18 % by mass.
2. The material according to claim 1 having a molar ratio between Al_2O_3 and Na_2O in the range from 14 to 21.3.
3. The material according to at least one of the preceding claims, having a vitreous phase fraction in the range from 20 to 30 % by mass.
4. The material according to at least one of the preceding claims, having mass fractions of the following components in the following ranges:
 - 4.1 Al_2O_3 : 60 to 70 % by mass;
 - 4.2 Na_2O : 2.0 to 2.6 % by mass.
5. The material according to at least one of the preceding claims, having a mass fraction of the ZrO_2 component in the range from 13.0 to 19.0 % by mass.
6. The material according to at least one of the preceding claims, having a mass fraction of components that are present in the material other than Al_2O_3 , Na_2O , ZrO_2 and SiO_2 below 1.0 % by mass.
7. Use of a material according to at least one of the preceding claims in areas of apparatuses for melting glass or for treating molten glass that do not come into contact with the molten glass.

Patentansprüche

1. Schmelzgegossener feuerfester Werkstoff auf Basis von Aluminiumoxid, Zirkondioxid und Siliziumdioxid mit einem Anteil an Glasphase, umfassend Al_2O_3 und Na_2O , wobei das Molverhältnis von Al_2O_3 zu Na_2O in der Glasphase im Bereich von 0,8 bis 1,6 liegt, und wobei der Massenanteil der Komponente SiO_2 im Werkstoff im Bereich von 15,5 bis 18 Masse-% liegt.
2. Werkstoff nach Anspruch 1 mit einem Molverhältnis von Al_2O_3 zu Na_2O im Bereich von 14 bis 21,3.
3. Werkstoff nach wenigstens einem der vorhergehenden Ansprüche mit einem Anteil an Glasphase im Bereich von 20 bis 30 Masse-%.
4. Werkstoff nach wenigstens einem der vorhergehenden Ansprüche mit mit Massenanteilen der folgenden Komponenten in den folgenden Bereichen:
 - 4.1 Al_2O_3 : 60 bis 70 Masse-%;
 - 4.2 Na_2O : 2 bis 2,6 Masse-%.
5. Werkstoff nach wenigstens einem der vorhergehenden Ansprüche mit einem Massenanteil der Komponente ZrO_2 im Bereich von 13,0 bis 19,0 Masse-%.
6. Werkstoff nach wenigstens einem der vorhergehenden Ansprüche mit einem Massenanteil an Komponenten, die neben Al_2O_3 , Na_2O , ZrO_2 und SiO_2 im Werkstoff vorliegen, unter 1,0 Masse-%.
7. Verwendung eines Werkstoffs nach wenigstens einem der vorhergehenden Ansprüche in Bereichen von Aggregaten zum Erschmelzen von Glas und zur Behandlung von Glasschmelze, die nicht in Kontakt mit der Glasschmelze treten.

Revendications

1. Matériau réfractaire fondu et coulé à base d'oxyde d'aluminium, de dioxyde de zirconium et de dioxyde de silicium, possédant une fraction de phase vitreuse comprenant Al_2O_3 et Na_2O , dans lequel le rapport molaire entre Al_2O_3 et Na_2O dans la fraction de la phase vitreuse est compris dans la gamme de 0,8 à 1,6 et dans lequel la fraction en masse du composé SiO_2 dans le matériau est comprise dans la gamme de 15,5 % à 18 % en masse.
2. Matériau selon la revendication 1 possédant un rapport molaire entre Al_2O_3 et Na_2O compris dans la gamme de 14 à 21,3.
3. Matériau selon au moins l'une des revendications précédentes, possédant une fraction de la phase vitreuse comprise dans la gamme de 20 % à 30 % en masse.
4. Matériau selon au moins l'une des revendications précédentes, possédant des fractions en masse des composés suivants dans les gammes suivantes :
 - 4.1 Al_2O_3 : de 60 % à 70 % en masse ;
 - 4.2 Na_2O : de 2,0 % à 2,6 % en masse.
5. Matériau selon au moins l'une des revendications précédentes, possédant une fraction en masse du composé ZrO_2 comprise dans la gamme de 13,0 % à 19,0 % en masse.
6. Matériau selon au moins l'une des revendications précédentes, possédant une fraction en masse des composés qui sont présents dans le matériau autres que Al_2O_3 , Na_2O , ZrO_2 et SiO_2 de moins de 1,0 % en masse.
7. Utilisation d'un matériau selon au moins l'une des revendications précédentes dans des domaines d'appareils de fusion du verre ou d'appareils de traitement du verre fondu qui n'entrent pas en contact avec le verre fondu.

Correlation between exudation vs ratio Al₂O₃/Na₂O in vitreous phase

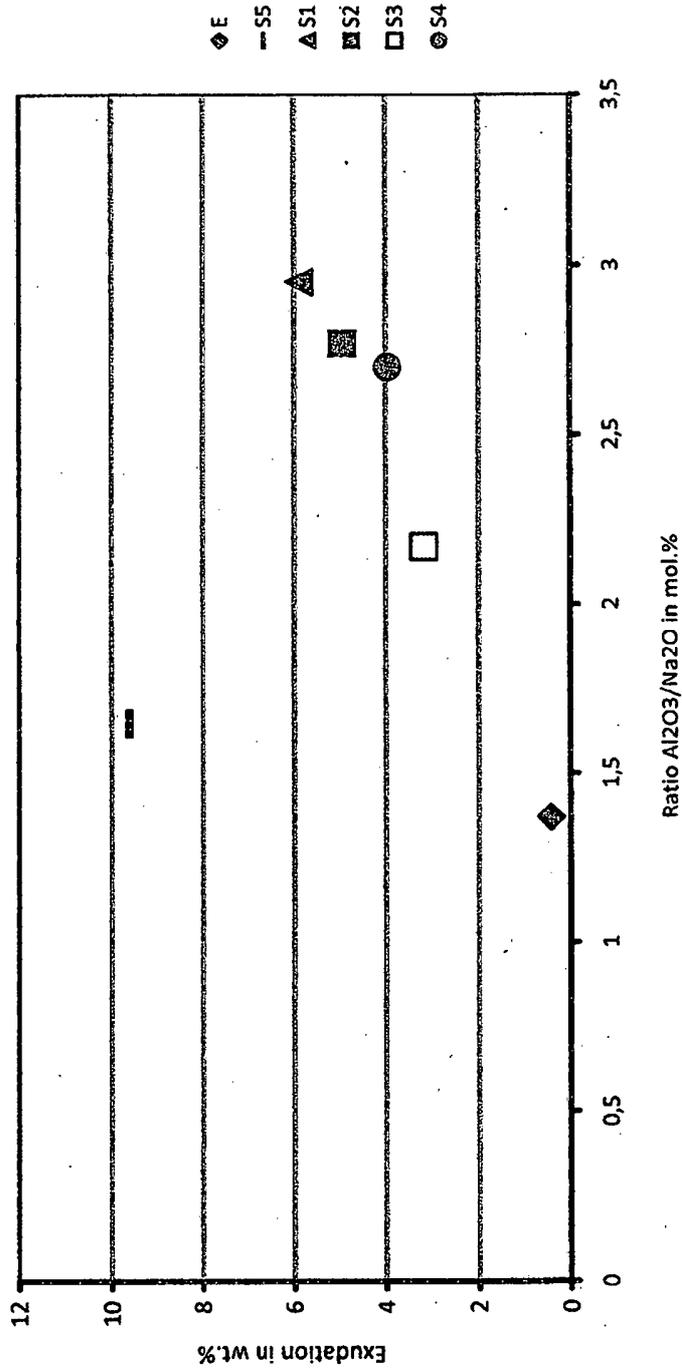


Fig. 1

Correlation between exudation vs ratio Al₂O₃/Na₂O in bulk material

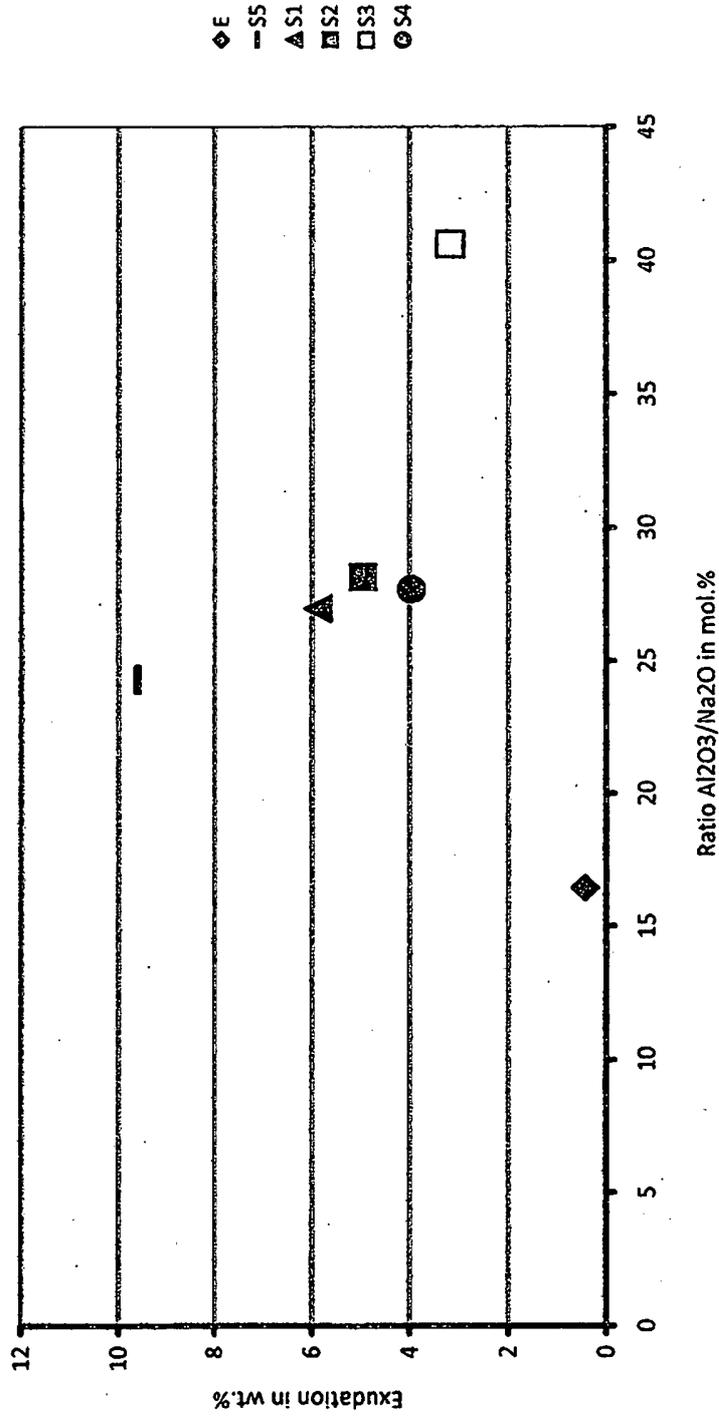


Fig. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- FR 2875497 [0006]

Szabadalmi igénypontok:

1. Ömlesztett tűzálló anyag, mely alumínium-oxid, cirkónium-dioxid és szilícium-dioxid alapú, melynek van egy üvegfázisú része, amely tartalmaz Al_2O_3 -at és Na_2O -t, ahol a moláris arány az Al_2O_3 és Na_2O között az üvegfázisban 0,8 – 1,6 tartományban van, és ahol a SiO_2 komponens tömeg részaránya az anyagban 15,5 – 18 tömeg% tartományban van.
2. Az 1. igénypont szerinti anyag, amelyben az Al_2O_3 és Na_2O közötti moláris arány 14 – 21,3 tartományban van.
3. Az előző igénypontoknak legalább egyike szerinti anyag, amelyben az üvegfázis részarány 20 – 30 tömeg% tartományban van.
4. Az előző igénypontoknak legalább egyike szerinti anyag, amelyben a következő komponenseknek a tömeg részarányai vannak a következő tartományokban:
 - 4.1 Al_2O_3 : 60 – 70 tömeg%;
 - 4.2 Na_2O : 2,0 – 2,6 tömeg%.
5. Az előző igénypontoknak legalább egyike szerinti anyag, amelyben a ZrO_2 komponensnek a tömeg részaránya 13,0 – 19,0 tömeg%.
6. Az előző igénypontoknak legalább egyike szerinti anyag, ahol az anyagban jelen levő, Al_2O_3 -tól, Na_2O -tól, ZrO_2 -tól és SiO_2 -tól eltérő komponenseknek a tömeg részaránya 1,0 tömeg% alatt van.
7. Az előző igénypontoknak legalább egyike szerinti anyag alkalmazása üveg olvasztására vagy olvasztott üveg kezelésére szolgáló berendezések területén, amelyek nem kerülnek kontaktusba az olvadt üveggel.