

Magnetic Fastening Device

5

Description

The invention relates to a magnetic fastening device for releasably fastening a first unit and a second unit to each other,

10 said first unit having a first unit abutment surface, and said second unit having a second unit abutment surface, said first unit abutment surface and said second unit abutment surface being adapted for abutment against each other, and

15 said magnetic fastening device further comprising at least one pair of magnets, a first magnet of said pair of magnets being allocated to the first abutment surface, and a second magnet of said pair of magnets being allocated to the second abutment surface, said first magnet and said second magnet exerting an attractive force to each other.

20 Magnetic fastening devices of the afore-mentioned type are, for example, known from magnetic whiteboards. In this case, papers or foils may be fastened to a board (constituting the first unit) made from ferromagnetic material, e.g. a ferritic steel sheet, forming the actual whiteboard by using fastening elements (constituting the second unit) comprising permanent magnets. In this case, the first unit abutment surface and the second unit
25 abutment surface are sandwiching the paper or foil between them when abutting against each other.

With this arrangement, on the one side, the papers or foils may easily be fastened to the whiteboard. On the other side, this type of magnetic fastening
30 is susceptible to disturbance by external forces, in particular external forces exceeding the attractive magnetic forces acting between the magnets of the at least one pair of magnets.

In view of the above, it is the object of the present invention to further improve magnetic fastening devices of the afore-mentioned type.

5 According to the present invention, this object is solved by a magnetic fastening device of the afore-mentioned type,

in which a first abutment surface of said first unit abutment surface and said second unit abutment surface is provided with at least one protrusion,

10 in which a second abutment surface of said first unit abutment surface and said second unit abutment surface is provided with at least one recess, said at least one recess being adapted to receive said at least one protrusion, and

in which said first magnet and said second magnet are displaced relative to each other by a displacement distance in a displacement direction
15 extending parallel to the extension of said first abutment surface and said second abutment surface at the location of said protrusion and said recess such that, in a state in which said first abutment surface abuts against said second abutment surface and said at least one protrusion is received in said at least one recess, a component of said attractive force extending parallel to
20 said first abutment surface and said second abutment surface maintains said at least one protrusion in said at least one recess.

According to the present invention, the magnetic fastening force is supplemented by a form fit between the at least one protrusion and the at
25 least one recess. Preferably, the at least one protrusion and the at least one recess positively mate with each other when said first abutment surface and said second abutment surface abut against each other. As a consequence, if the magnetic fastening force of the at least one pair of magnets should be exceeded by an external force, the first and second units nevertheless
30 remain fastened to each other due to the form fit. In addition, the magnetic fastening device according to the present invention provides for a synergistic effect between the magnetic fastening and the form fit fastening, as the

attractive force between the first and second magnets maintains the form fit, in other words holds said at least one protrusion in said at least one recess.

In order to be able to provide for a mechanically stable connection, i.e. a
5 connection substantially without play, it is further suggested that said at least one protrusion has a protrusion abutment surface, and said at least one recess has a recess abutment surface, and that said component of said attractive force pulls said protrusion abutment surface against said recess abutment surface.

10

According to a preferred embodiment, the at least one protrusion has the shape of a pin, a longitudinal axis of said pin extending obliquely with respect to said first abutment surface. Preferably, said longitudinal axis may enclose with a normal direction of said first abutment surface an angle different from
15 0°, preferably amounting to between about 30° and about 60°, more preferably amounting to about 45°. If the external forces have a main direction from which they are exerted on the fastening device, the longitudinal axis may be generally inclined towards or away from this main direction depending on which of the first and second units it is provided. In this way,
20 the external forces may contribute to maintaining the form fit between the at least one protrusion and the at least one recess.

In order to provide a sufficiently strong attractive force between the magnets, it is advantageous that the displacement distance amounts to less than a
25 width of at least one of said first magnet and said second magnet determined parallel to said displacement direction, preferably less than half of said width. This arrangement guarantees that the two magnets at least partially face each other.

30 Furthermore, at least one of the magnets, preferably both magnets, of the at least one pair of magnets may be arranged inside the corresponding first unit and/ or the corresponding second unit and in close vicinity of the

corresponding first unit abutment surface or second unit abutment surface, respectively. For aesthetical reasons, however, the at least one magnet may be covered by a thin layer of the material constituting a housing of the first unit and second unit, respectively.

5

Sufficiently strong magnetic forces may be achieved, for example, if at least one magnet of said pair of magnets is an active magnet, e.g. a permanent magnet or an electromagnet. Active magnets, in contrast to passive magnets, emit a magnetic field even when not being influenced by an external

10 magnetic field.

According to an embodiment, a rare earth magnet, preferably a Samarium-Cobalt magnet, more preferably a Neodymium-Samarium-Cobalt magnet may, for example, be used as a permanent magnet.

15

Although it is preferred, in particular in view of the strength of the magnetic forces, to have two active magnets, in particular two permanent magnets, it might be conceivable, in particular in order to reduce the costs of the magnetic fastening device, that one magnet of said pair of magnets is

20 constituted by a passive magnet, e.g. an element at least partially made from a ferromagnetic or ferrimagnetic material and magnetized by the respective other magnet of said pair of magnets. Passive magnets, e.g. elements made from ferromagnetic or ferrimagnetic material, emit a magnetic field only when being magnetized by an active magnet.

25

A major advantage of the fastening device according to the present invention, resides in the fact that it is free of moving parts. As a consequence, for example, the first unit may be released from the second unit by simply gripping and removing it from the second unit in a direction extending

30 oppositely to the engagement direction of the form fit. In particular in contrast to fastening devices involving a snap-lock connection, there is no need for

depressing a tab and holding it depressed while removing the first unit from the second unit which considerably facilitates the releasing process.

According to a specific embodiment, said second unit may be constituted by
5 a helmet, in particular motorcycle helmet, or a separate unit permanently fixed to said helmet. Many types of helmets, in particular protective helmets, are used across many different industries and sports. Among the most commonly used protective helmets are motorcycle helmets.

10 According to a further embodiment of the present invention, said first unit may include a functional device, for example a communication device, in particular a communication device using Bluetooth® technology. Such communication devices are well known in the art. The applicant is well-known as a manufacturer of such communication devices.

15 If it is required to establish an electrical connection between the functional unit and functional components of the helmet, e.g. microphones and/or loudspeakers, at least one electrical contact may be provided on at least one protrusion and in its corresponding recess. It is, however, also conceivable to
20 provide at least one separate electrical connector at the first unit and the second unit.

In order to allow easy access to the functional device, it may preferably be disposed at a side surface of the helmet. In other words, said first abutment
25 surface and said second abutment surface preferably may extend substantially parallel to a side surface of said helmet.

In this specific arrangement, the external forces jeopardizing the fastening of the first and second units mainly are forces caused by a forward movement
30 of the wearer of the helmet, e.g. wind forces caused by a motorcycle ride or slapping forces caused by twigs of bushes and/or trees. As mentioned before, external forces having a main direction may be used for maintaining

the form fit between the at least one protrusion and the at least one recess. Therefore, it is further suggested for a helmet, in particular a motorcycle helmet, that said displacement direction extends towards a front portion or a rear portion of said helmet depending on whether the protrusion is allocated
5 to the helmet or the functional unit.

In addition to the form-fit of the at least one protrusion and the at least one recess, the magnetic fastening device according to the present invention may include at least one further mechanical locking unit, for example a turn and
10 release locking unit and/or a lift and release locking unit and/or a safety catch locking unit and/or a latch type locking unit and/or a snap-lock unit including a catch, a trap and a release mechanism, e.g. a release button, for overriding the locking effect of catch and trap. In this context, the magnetic forces of the
15 at least one pair of magnets helps avoiding detachment of the first unit from the second unit by mistake, in particular if the user unintentionally presses the release button of the further mechanical locking unit. This allows a two- or more-step release mechanism.

In the following, the invention will be described in more detail with respect to
20 a specific embodiment referring to the enclosed drawings, in which:

- Figure 1 shows a cross-sectional view of a magnetic fastening device according to the invention; and
- 25 Figure 2 shows a perspective view of a motorcycle helmet having a communication device attached thereto using a magnetic fastening device according to the invention.

In Figure 1 a magnetic fastening device is generally designated by reference
30 numeral 100.

The magnetic fastening device 100 comprises a first unit 102 having a first unit abutment surface 102a and a second unit 104 having a second unit abutment surface 104a. In the fastened state of the magnetic fastening device 100 shown in Figure 1, the first unit abutment surface 102a and the
5 second unit abutment surface 104a are abutting against each other.

Furthermore, the first unit 102 comprises a protrusion 106 protruding from the first unit abutment surface 102a and, in the fastened state of the magnetic fastening device 100 shown in Figure 1, engaging into a mating recess 108
10 provided in the second unit abutment surface 104a. Although Figure 1 shows a small distance between a protrusion abutment surface 106a of the protrusion 106 and a recess abutment surface 108a of the recess 108, the protrusion 106 preferably tightly fits into the recess 108.

15 In the embodiment shown in Figure 1, the protrusion 106 has the shape of a pin, the longitudinal axis A of which extends obliquely from said first abutment surface 102a, enclosing with a normal direction N extending orthogonal to the first unit abutment surface 102a and the second unit abutment surface 104a an angle α different from 0° . In the embodiment
20 shown in Figure 1, the angle α amounts to about 45° .

In the embodiment shown in Figure 1, the magnetic fastening device 100 further comprises two pairs 110 and 112 of magnets 110a, 110b and 112a, 112b. A first magnet 110a, 112a of each pair 110, 112 is allocated to the first
25 unit 102 while a second magnet 110b, 112b of each pair 110, 112 is allocated to the second unit 104. The first magnets 110a, 112a are located in close vicinity of the first unit abutment surface 102a, while the second magnets 110b, 112b are located in close vicinity of the second unit abutment surface 104a. Furthermore, the magnetic poles "N" and "S" of the magnets
30 110a, 110b and 112a, 112b of each pair 110, 112 are oriented in such a way that the magnets exert an attractive magnetic force onto each other.

As may be seen from Figure 1, corresponding magnets 110a, 110b and 112a, 112b, when seen in normal direction N, are not in perfect alignment with each other. Rather, the respective first magnet 110a, 112a is displaced relative to the corresponding second magnet 110b, 112b by a displacement distance d in a displacement direction D extending parallel to the extension of said first abutment surface 102a and said second abutment surface 104a. As a consequence, a component F_D of said attractive force (exemplarily shown for magnet 110b: attractive force F_{110b}) extending parallel to the displacement direction D maintains the protrusion 106 and recess 108 in engagement with each other.

As the displacement of the magnets 110a, 110b and 112a, 112b reduces the overall attractive force acting in normal direction N, the displacement distance d amounts to less the width w of the magnets.

Although in the embodiment of Figure 1, the magnets 110a, 110b of the first pair 110 both are permanent magnets, i.e. active magnets, it is to be noted that it is also conceivable that one of the magnets may be a passive magnet, i.e. a magnet having a magnetic field only due to being magnetized by an active magnet. In Figure 1, this is indicated for magnet 112b of the second pair 112, by putting the signs "N" and "S" for the magnetic poles in brackets.

One major advantage of the magnetic fastening device 100 according to the present invention is that it is free of any moving parts.

As may be seen from Figure 2, the magnetic fastening device 100 according to the present invention may be used, for example, for fastening a communication unit 120, e.g. a Bluetooth® communication unit, to a motorcycle helmet 122, either indirectly using a tray 124 mounted at the helmet 122 or directly (not shown).

In this case, the communication device 120 is an element of the first unit 102. Furthermore, the helmet 122 (in the case of direct fastening to the helmet 122) or the tray 124 (in the case of indirect fastening) constitute or are part of the second unit 104 of the magnetic fastening device 100.

5

As may be seen from Figure 2, the communication device 120 is fastened to a side surface 122a of the helmet 122, preferably in such a way that the wind forces exerted by the driving wind during a motorcycle ride support the maintenance of the form fit between protrusion 106 and recess 108.

10

In the embodiment of Figure 2, the magnetic fastening device 100 includes four protrusions 106 and two magnets 110a, 112a (shown in dotted lines as covered by the plastics material of the tray 124). The corresponding recesses and other magnets are not shown in Figure 2 as they are located at the lower side of the communication device 120. However, it should be noted that the
15
afore-mentioned numbers are by no means intended to limit the scope of protection, and that a different number of protrusions and/or a different number of pairs of magnets may be used as well. Furthermore, the locations of the protrusions and/or magnets shown in Figure 2 are merely intended as
20
examples, but by no means limiting the scope of protection.

As a further option, an electric connector 126 intended for connecting at least one microphone (not shown) and at least one loudspeaker (not shown) implemented in the helmet 122 to the communication device 120 may be
25
provided on the tray 124. As the connector 126 is merely an option, it is shown in dashed lines in Figure 2.

Finally, it should be mentioned, that the tray 124 may be fixed to the helmet 122 by a clamp (not shown) which may permanently or releasably be fixed to
30
the tray 124. It is, however, also conceivable to glue the tray 124 to the helmet 122, e.g. by using a strong double-sided tape.

With respect to the afore-given discussion of a specific embodiment of the invention, it is to be noted that neither the drawings nor the description thereof are intended to limit the scope of protection. For example, the protrusion may assume any suitable shape, e.g. the form of a thin and
5 roundish pin or a rectangular protrusion or any other shape, as long as it fits into the recess.

Claims

1. A magnetic fastening device (100) for releasably fastening a first unit (102) and a second unit (104) to each other,

5 said first unit (102) having a first unit abutment surface (102a), and said second unit (104) having a second unit abutment surface (104a), said first unit abutment surface (102a) and said second unit abutment surface (104a) being adapted for abutment against each other, and

10 said magnetic fastening device (100) further comprising at least one pair (110, 112) of magnets (110a, 110b, 112a, 112b), a first magnet (110a, 112a) of said pair (110, 112) of magnets being allocated to the first abutment surface (102a), and a second magnet (110b, 112b) of said pair (110, 112) of magnets being allocated to the
15 second abutment surface (104a), said first magnet (110a, 112a) and said second magnet (110b, 112b) exerting an attractive force (F) to each other,

 wherein a first abutment surface (102a) of said first unit abutment surface (102a) and said second unit abutment surface
20 (104a) is provided with at least one protrusion (106),

 wherein a second abutment surface (104a) of said first unit abutment surface (102a) and said second unit abutment surface (104a) is provided with at least one recess (108), said at least one recess (108) being adapted to receive said at least one protrusion
25 (106), and

 wherein said first magnet (110a, 112a) and said second magnet (110b, 112b) are displaced relative to each other by a displacement distance (d) in a displacement direction (D) extending parallel to the extension of said first abutment surface (102a) and said second
30 abutment surface (104a) at the location of said protrusion (106) and said recess (108) such that, in a state in which said first abutment surface (102a) abuts against said second abutment surface (104a)

and said at least one protrusion (106) is received in said at least one recess (108), a component (F_D) of said attractive force (F) extending parallel to said first abutment surface (102a) and said second abutment surface (104a) maintains said at least one protrusion (106) in said at least one recess (108).

2. The magnetic fastening device according to claim 1, wherein said at least one protrusion (106) has a protrusion abutment surface (106a), and said at least one recess (108) has a recess abutment surface (108a), and wherein said component (F_D) of said attractive force (F) pulls said protrusion abutment surface (106a) against said recess abutment surface (108a).
3. The magnetic fastening device according to claim 1 or claim 2, wherein at least one protrusion (106) has the shape of a pin, a longitudinal axis (A) of said pin extending obliquely with respect to said first abutment surface (102a).
4. The magnetic fastening device according to claim 3, wherein said longitudinal axis (A) encloses with a normal direction (N) of said first abutment surface (102a) an angle (α) different from 0° , preferably amounting to between about 30° and about 60° , more preferably amounting to about 45° .
5. The magnetic fastening device according to any of claims 1 to 4, wherein said displacement distance (d) amounts to less than a width (w) of at least one of said first magnet (110a, 112a) and said second magnet (110b, 112b) determined parallel to said displacement direction (D), preferably less than half of said width (w).

6. The magnetic fastening device according to any of claims 1 to 5,
wherein at least one magnet (110a, 110b, 112a) of said pair (110, 112)
of magnets is an active magnet, e.g. a permanent magnet or an
electromagnet.
- 5 7. The magnetic fastening device according to claim 6,
wherein one magnet (112b) of said pair (112) of magnets is
constituted by a passive magnet, e.g. an element at least partly made
from a ferromagnetic or ferrimagnetic material and magnetized by the
10 respective other magnet of said pair of magnets.
8. The magnetic fastening device according to any of claims 1 to 7,
wherein it is free of moving parts.
- 15 9. The magnetic fastening device according to any of claims 1 to 8,
wherein said second unit (104) is a helmet (122), in particular
motorcycle helmet, or a separate unit (124) permanently fixed to said
helmet (122).
- 20 10. The magnetic fastening device according to any of claims 1 to 9,
wherein said first unit (102) includes a functional device (120), for
example a communication device, in particular a communication
device using Bluetooth® technology.
- 25 11. The magnetic fastening device according to claim 9 or claim 10,
wherein said first abutment surface (102a) and said second abutment
surface (104a) extend substantially parallel to a side surface (122a) of
said helmet (122).
- 30 12. The magnetic fastening device according to any of claims 9 to 11,
wherein said displacement direction (D) extends towards a front
portion or a rear portion of said helmet (122) depending on whether

the protrusion is allocated to the helmet (122) or the functional unit (124).

- 5 13. The magnetic fastening device according to any of claims 1 to 12,
wherein in addition to the cooperation of said at least one protrusion (106) and said at least one recess (108), the magnetic fastening device (100) includes at least one further mechanical locking unit.


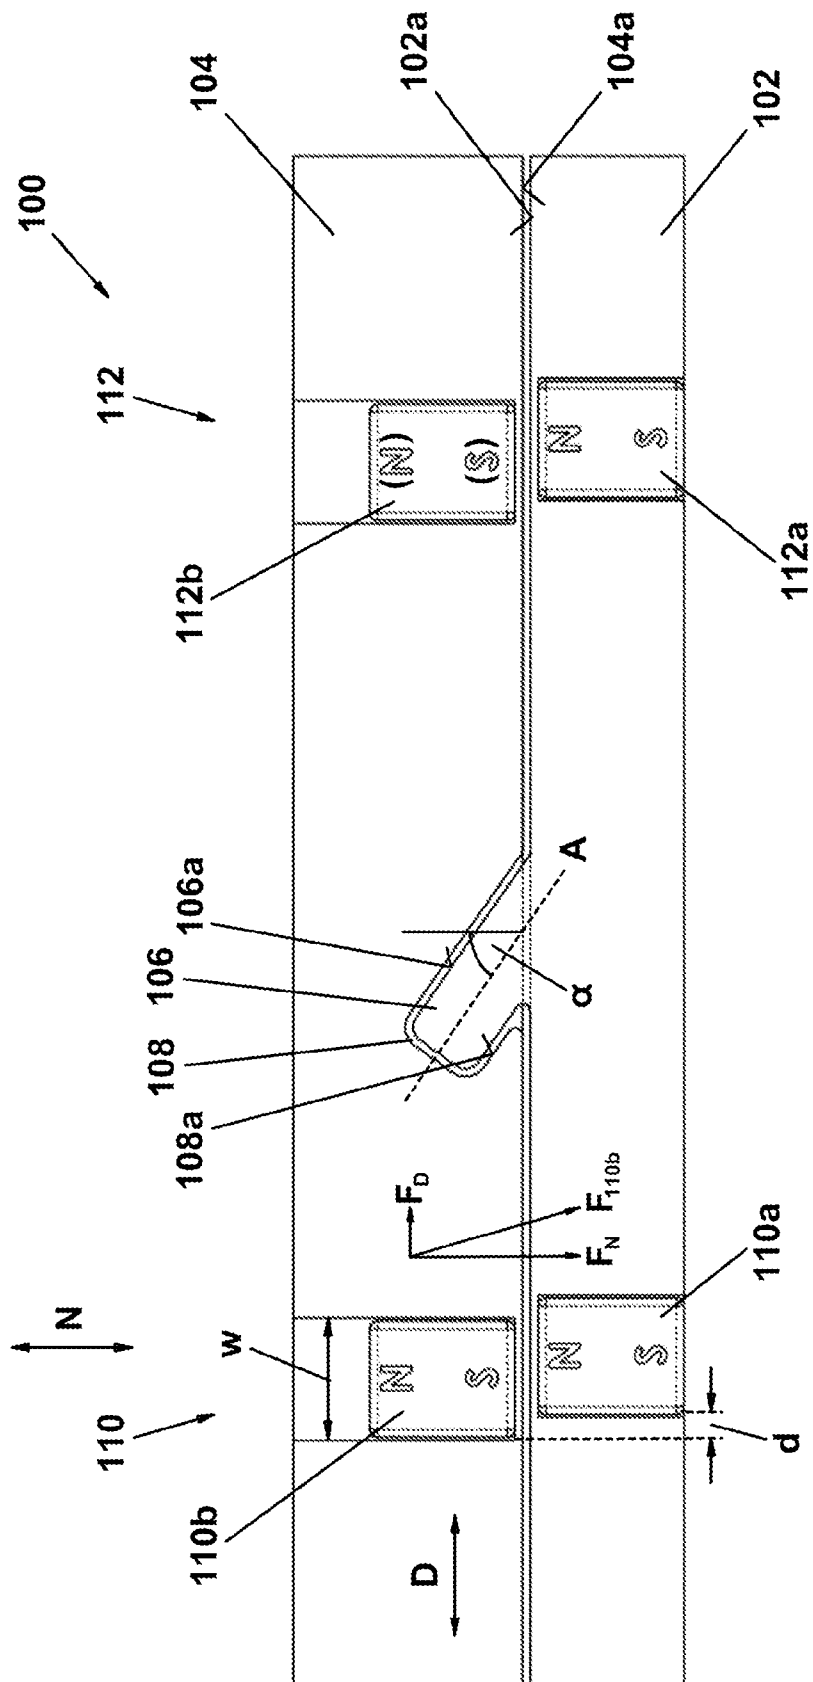


Fig. 1

Fig. 2

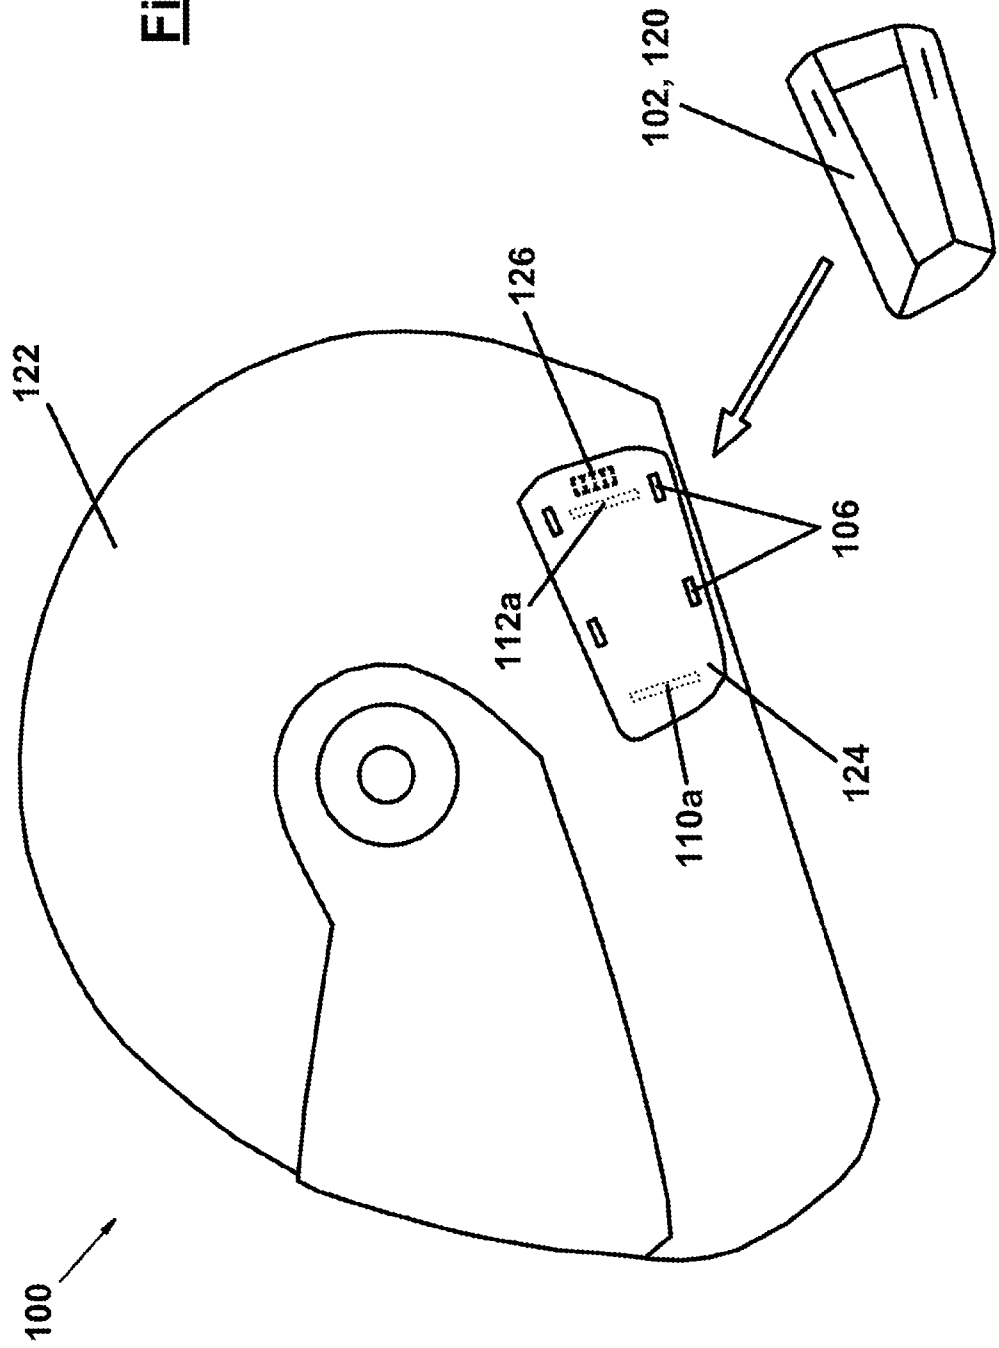

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2020/060404

A. CLASSIFICATION OF SUBJECT MATTER
INV. A42B3/04
ADD. F16B1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A42B F16B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006/133068 A1 (SHERRING PAUL D [GB]) 22 June 2006 (2006-06-22) paragraph [0035]; figure 3 -----	1-13
A	US 2015/286117 A1 (SUNG ALEXANDER [US] ET AL) 8 October 2015 (2015-10-08) paragraph [0103]; figures 6,7 -----	1-13
A	US 2017/341871 A1 (PETERS ANDREAS [DE]) 30 November 2017 (2017-11-30) paragraphs [0017], [0018]; figures 1-4 -----	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 July 2021

Date of mailing of the international search report

12/07/2021

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

D'Souza, Jennifer

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2020/060404

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006133068	A1	22-06-2006	AT 380481 T 15-12-2007
		AU 2004204387	A1 29-07-2004
		CA 2513478	A1 29-07-2004
		CN 1753629	A 29-03-2006
		DE 602004010618	T2 28-08-2008
		EP 1589842	A1 02-11-2005
		ES 2298712	T3 16-05-2008
		GB 2397372	A 21-07-2004
		HK 1082387	A1 09-06-2006
		JP 2006516309	A 29-06-2006
		KR 20050118666	A 19-12-2005
		US 2006133068	A1 22-06-2006
		WO 2004062410	A1 29-07-2004

US 2015286117	A1	08-10-2015	NONE

US 2017341871	A1	30-11-2017	EP 3251984 A1 06-12-2017
		US 2017341871	A1 30-11-2017
